


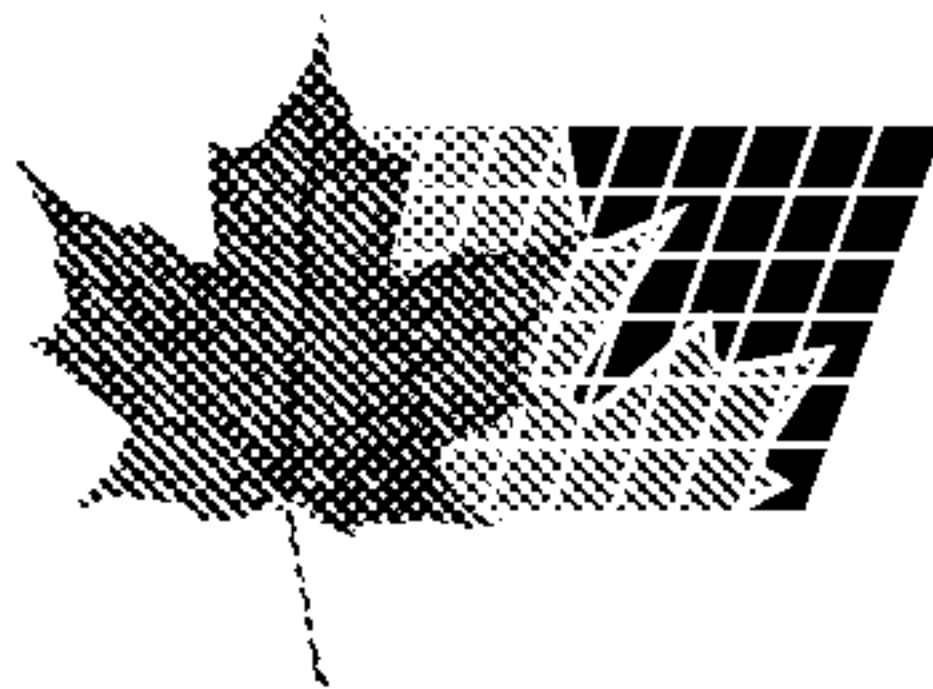

(22) 1991/03/20

(43) 1991/09/22

(62) 2,038,691

(22) 1991/03/20

(72) VERNON, GEOFFREY WILLIAM, GB

(72) GOODWIN, JAMES, GB

(72) CAHILL, MICHAEL JOHN, GB

(72) BUCKLEY, WILLIAM M., GB

(71) UNILEVER PLC, GB


(51) Int.Cl.⁷ B65D 85/808

(30) 1990/03/21 (9006388.4) GB

(30) 1990/11/30 (9026122.3) GB

(54) **PAQUETS ET CONDITIONNEMENT**

(54) **PACKETS AND PACKAGING**

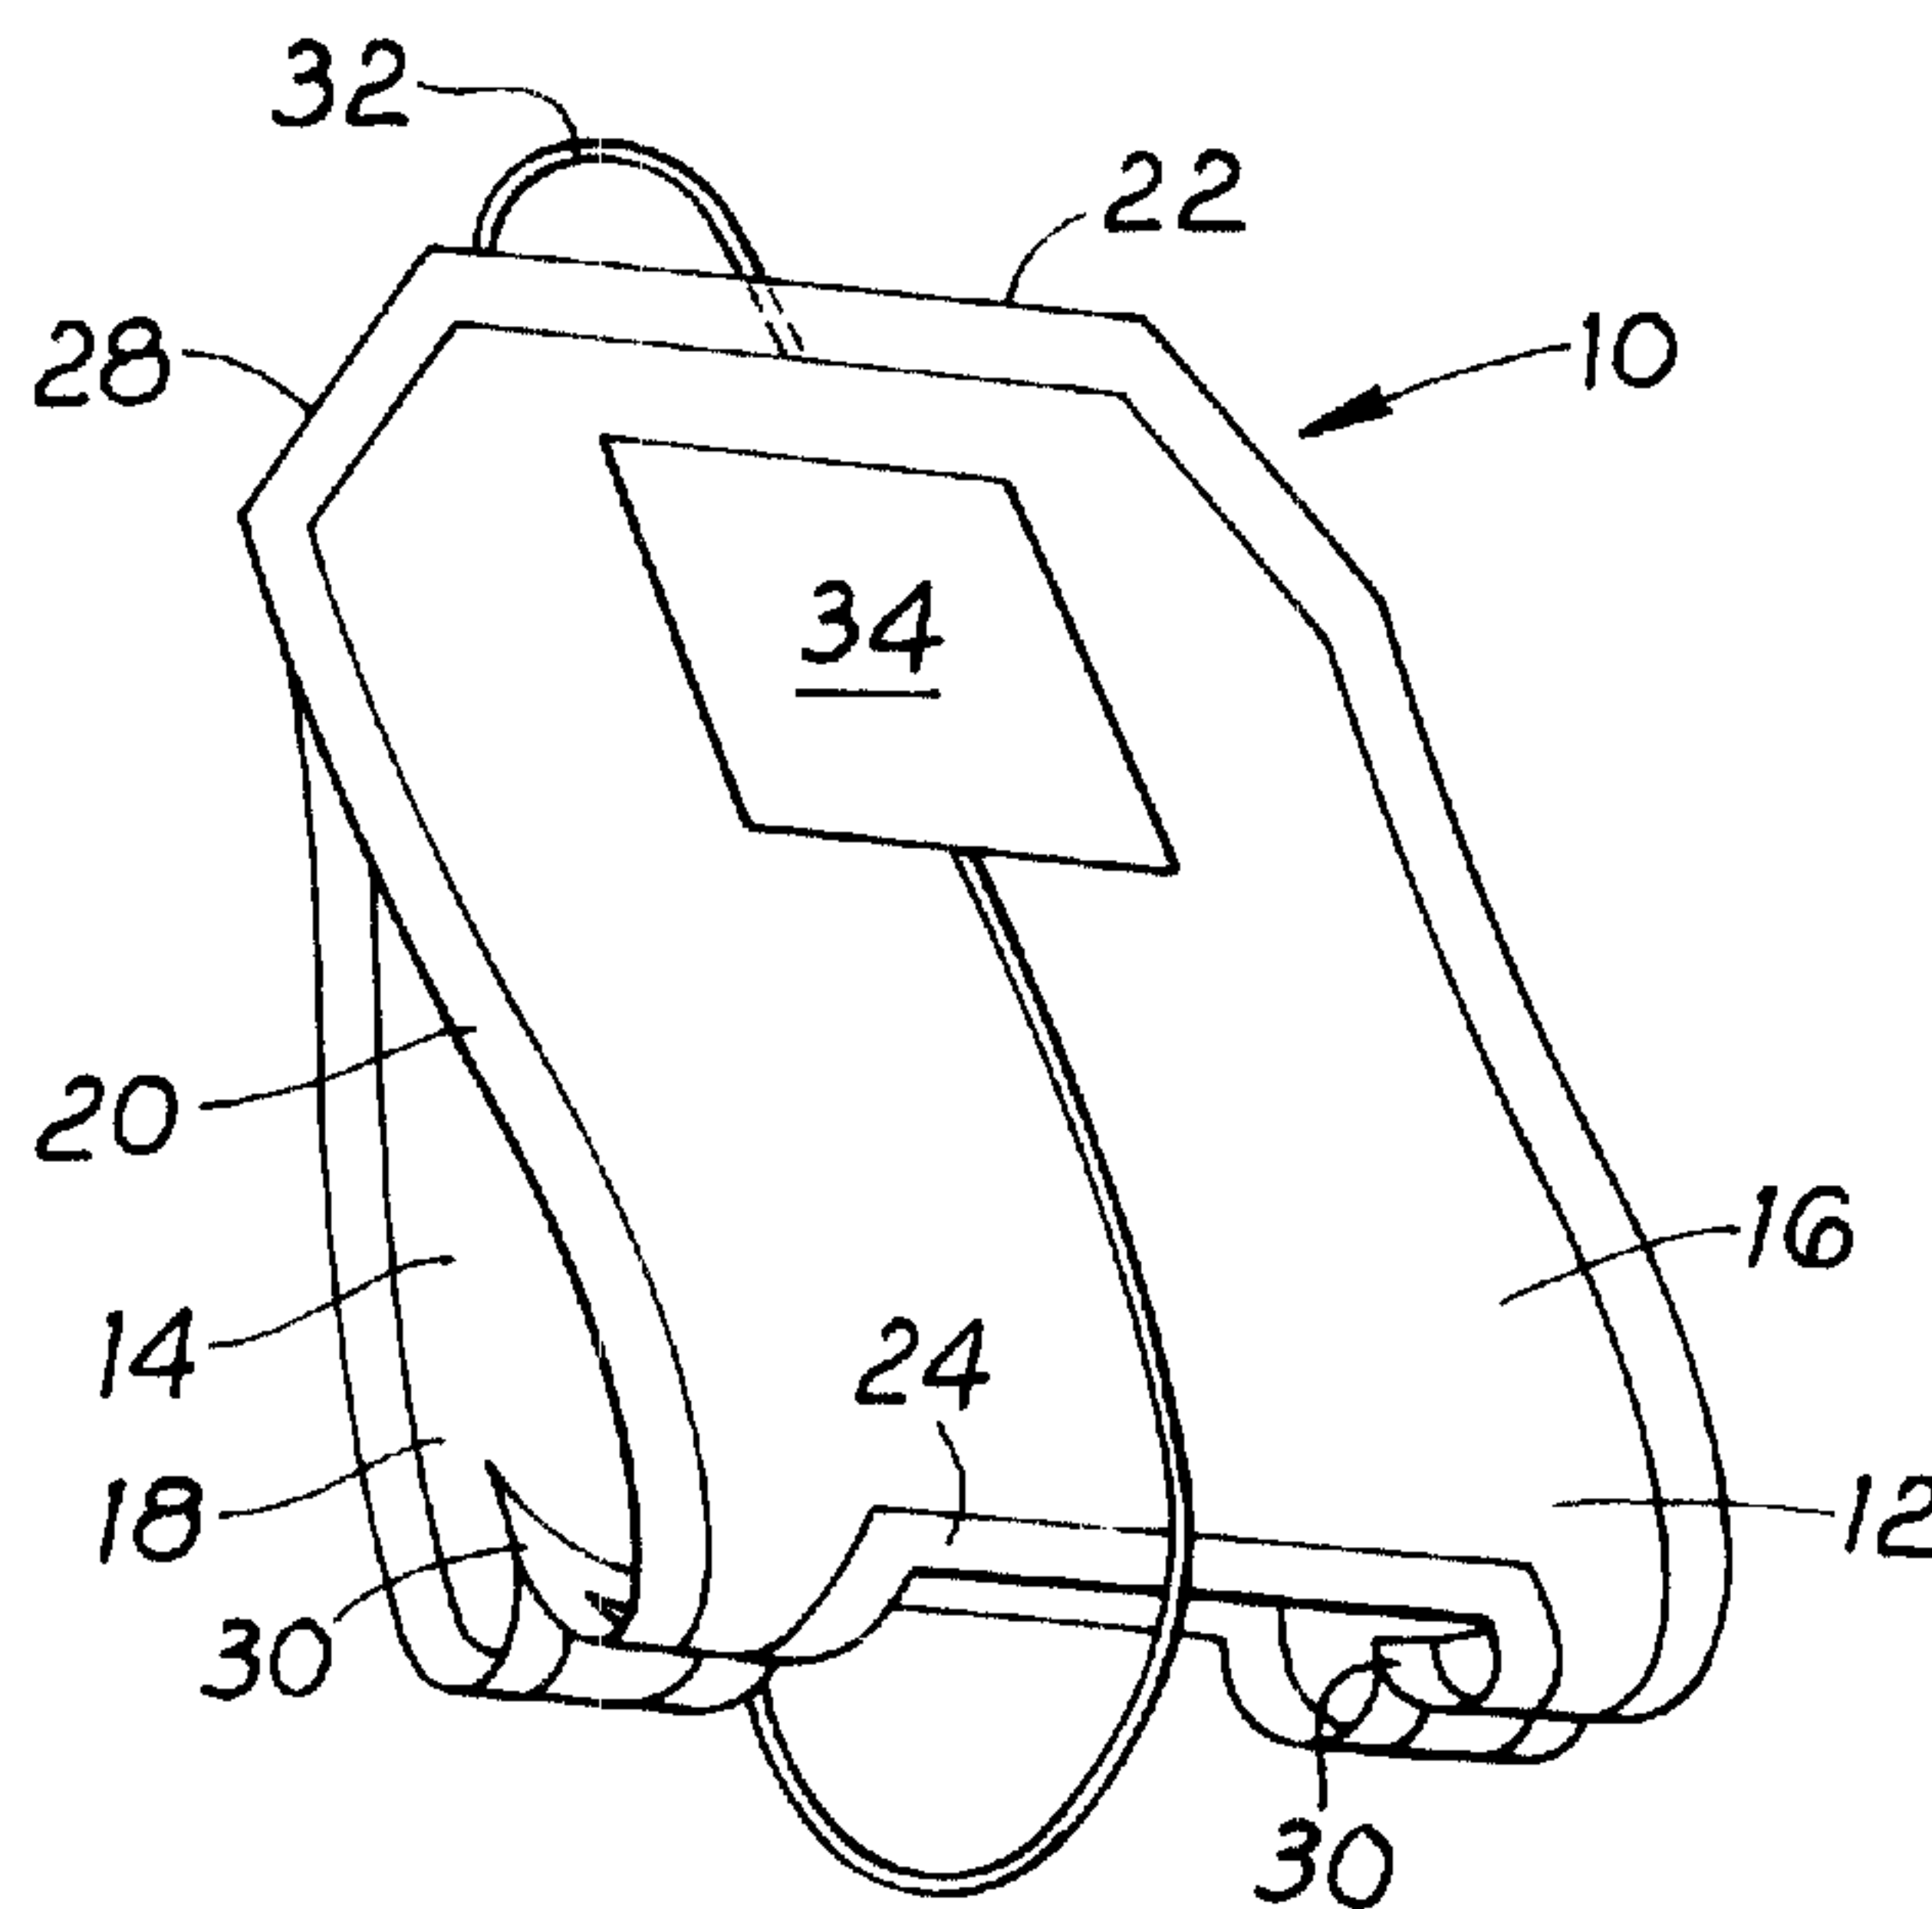

(57) Twin compartment packets, eg. tea bags, are formed with the compartments connected at the heads of the packet and optionally at the tails. The packets are produced from a pair of compartmented tubular webs that are brought together with the compartments in register, the webs then being interconnected at the compartment end seals and severed at those seals to form the separate packets. Apparatus for performing the process deposits doses of tea at spaced intervals onto the two separate webs before forming them into the tubular compartmented webs, brings the compartments of the two webs into register, interconnects the registered compartments, and separates the interconnected compartments into individual packets while the web advances continuously through the apparatus. The process is capable of high production rates because the webs are able to move through the successive stages at a uniform speed.

PACKETS AND PACKAGINGABSTRACT

Twin compartment packets, eg. tea bags, are formed with the compartments connected at the heads of the packet and optionally at the tails. The packets are produced from a pair of compartmented tubular webs that are brought together with the compartments in register, the webs then being interconnected at the compartment end seals and severed at those seals to form the separate packets. Apparatus for performing the process deposits doses of tea at spaced intervals onto the two separate webs before forming them into the tubular compartmented webs, brings the compartments of the two webs into register, interconnects the registered compartments, and separates the interconnected compartments into individual packets while the web advances continuously through the apparatus. The process is capable of high production rates because the webs are able to move through the successive stages at a uniform speed.

PACKETS AND PACKAGING

This invention relates to packets, particularly but not exclusively to infusion packets containing an infusible material, such as tea bags.

5 Tea bags consist of doses of dried and shredded tea leaves sealed in compartments made of a readily permeable web material, generally referred to as paper although it may have a significant plastics content. The bags may be formed from folded-over tubular lengths of the paper so
10 that each bag has a pair of compartments containing the infusible material one on each side of the fold.

 Examples of such twin-compartment bags can be found in GB-A-681816, GB-A-870800, US-A-2593608 and US-A-2925171. These documents also show bags in which a tubular length of
15 the paper is given a W-shaped fold across the middle of its length. As a result of the fold, the two open ends of the tubular length are brought together, and can then receive their doses of tea or other infusible material from twin
20 nozzles inserted then into the open ends to fill both tubular compartments simultaneously, as shown in GB-A-870800. The open ends are typically folded over and closed by being stapled or clipped or heat-sealed together. A tag may be attached to the staple by means of a thread, to make it more convenient for the consumer to handle the bag in
25 use.

 It is also known to make tea bags of this twin-compartment form in which the bag has been sealed at the W-fold to close off the compartments from each other.

 The present invention is concerned with an
30 infusion packet, such as a tea bag,

comprising first and second sealed compartments lying one upon the other and joined to each other at opposite ends, at one said end the compartments each being provided with a convex or peaked profile edge through which they are
5 joined, and at the opposite said end said compartments each being provided with a concave or centrally recessed profile edge having a pair of laterally outer extensions through which the compartments are joined.

Preferably the compartments are joined together
10 through portions of said extensions which project towards the opposite end of the packet, whereby in the region of said joined extensions the packet is given a generally W-form profile. Said joining may be made through overlapped end portions of said laterally outer extensions, said
15 joined end portions overlapping the centre apex of said profile and extending therefrom towards the outer apices.

The profiles at the two ends of the packet can be complementary so that the compartments can be formed without wastage from a continuous web. The W-form
20 portions which allow for expansion of the contents during infusion but which do not normally carry any of the contents of the packet, can be confined to a considerably smaller area of material than is the case with the known forms of packet referred to above. It is possible
25 therefore to make substantial material savings.

In producing such packets in which the compartments of each web are initially partially separated from each other, the W-folds can be formed in the course

of connecting together the regions of partial separation, although the method may also be employed to produce other forms of packet. Preferably, when producing the packets by this method, said partial separation is effected before
5 the two webs are brought together. It is also preferred to seal the compartments from each other before said partial separation, which is then arranged not to impair said seals.

The two tubular webs may be formed from a single
10 web of material which is split in half longitudinally and the two halves then folded longitudinally to give each the tubular form. Alternatively, the two tubular webs may be formed from four narrower webs which are not folded. The four narrower webs may derive from a web of material which
15 is sub-divided.

If a packet is to be provided with a handling thread, which may have a tag on its free end, the other end of the thread can conveniently be attached to the head of one of each pair of compartments prior to their being
20 joined together.

The invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Fig. 1 shows one form of tea bag according to
25 one embodiment of the invention;

Fig. 2a-d gives a schematic representation of a method of making the tea bag shown in Fig. 1,

Fig. 3 shows another form of tea bag according

to the invention,

Fig. 4a-c gives a schematic representation of a method of making the tea bag shown in Fig. 3,

5 Figs. 5 and 6 illustrate apparatus for performing the method shown in Fig. 4a-c, the figures showing, respectively the dosing and compartment-forming and the bag assembly stages,

10 Figs. 7 and 8 show details from Fig. 6 to a larger scale, of the tail folding and tail pressing units, and

Figs. 9 and 10 show modified forms of the tea bag in Fig. 3.

Referring to Fig. 1, the tea bag 10 comprises two identical, separate compartments 12,14 joined together
15 at their heads and tails. Each compartment has a pair of opposed walls 16,18 sealed together at their peripheries to form an enclosed space in which has been deposited a dose of tea or other infusible material 46 (Fig. 2).

20 The edge-sealing of the walls 16,18 is effected by longitudinal edge seals 20 and profile end seals 22,24 at the head and tail respectively of each compartment. The head seal 22 has a convex profile that gives the appearance of cutaway or folded corners 28. This mimics the conventional shape of a double-compartmented tea bag.
25 The tail seal 24 has a concave profile complementary to the profile of the head seal so that it comprises a pair of side extensions 30. Each compartment is folded over on itself so that the joined tail seals 24 of the pair of

compartments lie between the compartments, which gives the tail of the tea bag a W-shaped cross-section.

A thread 32 is attached to the tea bag by having one of its ends caught between the joined heads of the compartments. The other end of the thread is attached to a tag 34. For neatness of packaging, the thread may be wrapped around the tea bag and the tag 34 lightly tacked to one face of the tea bag.

Fig. 2 shows one method of making the tea bag of Fig. 1. In Fig. 2a two pairs of single thickness webs 42, which may be fed from separate reels or slit from a single reel of heat-sealable filter paper, which may suitably be a 15.5gsm double-sided heat sealable filter paper made by Messrs J R Compton of Bury, Lancashire, and known as "Single Phase Superseal". The single thickness webs 42 are brought together to form two tubular webs 44 by means of the longitudinal heat seals 20. Before the pairs of webs 42 are brought together and their longitudinal edges sealed, doses 46 of tea are placed at spaced intervals on the lower web of each pair. Heat seals 48 are made formed across each tubular web 44 intermediate the tea doses, after sealing the longitudinal edges. These latter heat seals 48 are profiled, to give the cutaway shoulders 28 of the bag shown in Fig. 1.

As a next step the two tubular webs 44 are brought together with the compartments in register. At the tails of the registered pairs of compartments 12,14 a cutting operation is performed within the existing

transverse seals 48 to separate the pairs of compartments and divide the seals 48 into the head and tail seals 22,24. Simultaneously, the compartments are welded together at the tail extensions 30 but their heads are
5 left unattached.

As a pair of compartments is so separated, the heads of the compartments are moved apart as shown in Fig. 2b, and around towards each other as shown in Fig. 2c. The partially completed tea bag assumes a W-form profile
10 as seen edge on, ie. in the direction C in Fig. 2c, with the tail seal 24 located between the main parts of the two compartments. In a final step, the heads of each pair of compartments are brought together and are sealed to each other over the head seals 22.

15 Between the step of severing a pair of compartments from the webs (Fig. 2b) and that of sealing together the two heads of the compartments (Fig. 2d) one end of the thread 32 is attached at the head of one of the compartments by a preliminary heat seal or adhesive 56
20 which is sufficient to retain the thread on the bag until the heads of the two compartments are sealed together to lock the thread firmly between them.

In the initial stages of this process the compartments can alternatively each be formed from a
25 single web that is folded over longitudinally. Spaced tea doses would be dispensed along one half of the web and the second half would then be folded over the tea doses and the free edges heat sealed together to give the web a

tubular form.

Fig. 3 shows an alternative tea-bag 70 which comprises first and second compartments 72,74, each containing a dose of tea. A tag 76 is attached to the tea-bag and a thread 78 comprising a gathered length or one or more loops 80 held under the tag is secured at one end to the tag by glue spot 82 and at the other to the head or top of the tea bag by glue spot 84. The tag is held releasably in place on the tea-bag by a light heat seal or glue tack (not shown).

The compartments 72,74 have each been produced from a web folded lengthwise to form an elongate tube about the tea doses, the overlapping edges of the folded web being closed together by a butt or lap seal 86. Both seals 86 run along the opposed or inner faces of the two compartments of the tea-bag. The head and tail of each compartment are closed by profiled heat seals 88,90 respectively. These profiled seals are complementary to each other, the head seal 88 being convex and the tail seal 90 being concave as in the first example. The two compartments are sealed together at their heads by a further heat sealing operation overlaid onto the seals 88. At their tails the pair of compartments are connected together only through the tapered side extensions 92 that form the outer parts of the concave profile there. For this connection the side extensions of the two compartments are folded forwards (ie. towards the head of the bag) to overlap each other and further heat seals are

applied to their overlap. In the course of this, a further fold is made at the centre of the overlap of the extensions so that in side view the tail of the tea-bag shows a W-form profile 94.

5 In this embodiment of the invention, the W-profile can be produced by tucking in, one after the other, the tail portions of each of the compartments of a pair, as shown in Fig. 4, instead of folding over the compartments as in Figs. 1 and 2. This allows the partly
10 formed tea bags to move continuously forwards along a travel path as they are brought together and the W-profile formed and the heads of the compartments are connected together (whether before or after the tails), which makes a faster production rate possible.

15 In the method illustrated in Fig. 4, the dosed and compartmented tubular webs 44 are partially severed by a pair of cuts 96 in the inclined side portions of each heat seal 48 (Fig. 4a). The webs are brought adjacent to each other, with their compartments in register and the
20 tail portions of each compartment at the cuts are bent inwards towards each other. These portions heat sealed together and folded in to give the W-form profile 94 at each side (Fig. 4b). The pairs of compartments can now be
25 sealed together at their heads and the cuts in the heat seals 48 completed to sever the dual-compartment tea bags from the webs, leaving each pair of compartments with the joined head seal 88 and separate tail seals 90 (Fig. 4c). An example of the apparatus by means of which this method

can be carried out is shown in Figs. 5 to 8.

In Fig. 5, two webs 102a,102b of filter paper are shown travelling through the apparatus, each of which is to form a compartmented tubular web 44. Although not
5 shown, one of the webs may be provided with the thread and tags shown on the tea bag of Fig. 3. Each web travels under a respective tea hopper 104a,104b and in close contact with a dosing wheel 106a,106b fed from the hopper to receive the doses of tea contained in pockets (not
10 shown) in the periphery of the wheel.

In this example, the two webs are formed from a single reel of double-width material (not shown) and the arrangement of rollers through which one of the webs passes is designed to ensure that the tea doses are
15 deposited on the same face of each web, for example, that which lies outermost when the material is on the reel. The processes through which the two webs go through in the apparatus shown in Fig. 5 are otherwise identical and the treatment of only the web 102a will therefore be
20 described.

The dosing wheel 106a is narrower than the web and with the aid of guide rollers 108 the sides of the web begin to fold upwards as a first step in forming the tube 44 in which the opposite edges of the web are sealed
25 together. This tube forming operation can be carried out in generally known manner by folding the sides of the travelling web around a fixed shoe (not visible) and passing the overlapped side edges through seam sealing

rollers 110.

After the longitudinal heat seal is made with the seam rollers 110 the web passes between a pair of rollers 112 which make profiled dividing seals 48. The
5 rollers 112 are synchronised with the dosing wheels 106 so that the seals 48 are placed between successive tea doses.

The securing of the compartments of the two webs together and the separation of pairs of compartments to form the individual tea-bags is carried out in a following
10 section of the apparatus shown in Fig. 6. The webs travel from their end sealers to respective pairs of cutter and pressure rollers 118. These rollers partially sever the compartments from each other by cuts made from each side edge of the webs in the oblique heat seals that define the
15 tapered portions of the tails and prepare these portions for the W-folds. The compartmented webs then travel on to a tail folding device 120 (Figs. 6 and 7) which comprises a pair of opposed top and bottom belts 122,124 and opposite side frames 126 (one shown partly broken away)
20 which each hold a circulating series of sealing carriers 128 secured to endless belts 130 driven in synchronism with the belts 122,124.

Each carrier 128 comprises a body 128a guided by rollers 132,134 running on a side rail 136 and in an upper
25 guide slot 138 of the side frame 126. Projecting from the side of the body 128a is an anvil 140 which cooperates with a presser 142 mounted on a spindle 144 that pivots in the carrier 128. The spindle 144 projects downwards from

the body and has at its lower end a pair of rollers 146 biased by a spring 148 against opposite faces of a cam track 150 in the side frame 128. By means of the cam track 150 the presser 142 is normally held clear of the anvil 140 but in a narrower region 150a of the cam track the spindle is pivoted to clamp a pair of severed tail portions of the respective webs between a recessed V-profile face 140a of the anvil and a complementary projecting V-profile face 142a of the presser. To heat seal the clamped tail portions together, the presser contains a cartridge heater (not shown) that is supplied with current at this stage through a brush unit 152 on the carrier contacting slip rings 154 fixed in the side frame.

In operation, the movements of the sealing carriers 128 in both side frames and of the belts 122,124 are synchronised. Initially, the anvil 140 and presser 142 of a carrier come between the two webs upstream of the belts 122,124 while the presser is held away from the anvil. The belts 122,124 carry projections 156 which then push the severed tail portions of the compartments into the gaps between each anvil 140 and its presser 142. The cam track 150 now causes the presser 142 to move between the projections 156 and to close against the anvil 142 clamping the adjacent tail portions in overlapping relationship. As the tail portions are clamped the carrier reaches the slip rings 154 so that the presser is heated and the clamped portions are welded together before the presser again separates from the anvil to allow the

webs to exit to a tail pressing unit 160.

The tail pressing unit 160 comprises a pair of fixed, slowly converging guide channels 162 through which the heat sealed tail portions pass. At opposite sides of the webs, rotary tucker mechanisms 164 are provided to ensure that the welded portions are given a reflex fold, ie. that they do not tend to flex rearwards, which would extend the overall length of the tea bags and disrupt subsequent processing. Each tucker mechanism 162 comprises a rotary boss 164 on which a plurality of tucker wings 166 are pivoted at equispaced angular intervals. Rollers 168 on the tucker wings 166 are held against the outer periphery of a fixed cam disc 170 by springs 172. As the wings 166 rotate with the boss 164 they enter the path of the interconnected webs 102a,102b and insert themselves between the webs in the regions of the welded tail portions.

As they pass through the path of the webs, the profile of the cam disc 170 causes the wings 166 initially to pivot in the direction of rotation of the boss 164 and then to pivot in the opposite direction. Thus, the wings 166 are accelerated as they enter between the webs so that they move forwards into the overlapped welded portions to tuck these in with the reflex fold shown in Fig. 4c, if the fold is not already there, and before the wings 166 leave the path of the web they are slowed so that they do not foul the web folds as they move out of the path.

While the wings 166 are inserted into the welded

tail portions, these portions move further along the guide channels 162 and are sufficiently constrained by the narrowing channels to ensure that the folds are held. At the exit to the guide a pair of opposed upper and lower
5 rollers 174 rotate and have elastic presser pads 176 which grip the folded tail portions between them to reinforce and finally stabilize the folds. The shaping of the tail seal portions is now retained without any further guidance.

10 The interconnected webs next enter a top joining device 180 comprising upper and lower belts 182,184 each carrying profiled heat sealing blocks 186 which are arranged to clamp upon the webs between the adjacent runs of the belts in register with the heat seals 48 made by
15 the rollers 112 to make the heat seals 88 joining the webs at the top of the compartments. It is possible, alternatively to the device 180, to perform this function with heat seal rollers analogous to the rollers 112.

 The heat seals 88 are narrower than the seals 48
20 so that the webs remain separate at the forward margin of the seal 48 between the W-form seals of the tails. In this state the webs enter a top cutter 190 comprising pairs of upper and lower drive belts 192,194 gripping the already severed side portions of the formed tea bags, and
25 between the pairs of belts a cutter wheel 196 which severs the remaining connections of the webs between successive pairs of compartments to form the separate dual compartment tea-bags. If the thread and tags (not shown)

have been attached to the one web in a continuous string, the cutter wheel can simultaneously cut the thread at each line of severance between the bags.

Fig. 9 illustrates a modified form of the tea bag in Fig. 3. Corresponding features are indicated by the same reference numbers and it will be noted that the two tea bags differ in the manner of interconnection of the compartments at their heads. In this example the head interconnection extends only over the central regions of the head seals 88; over the sloping side regions of the head seals the two compartments remain unconnected. This feature also assists free circulation of the infusing liquid when the tea bag is immersed in it. The figure shows the overlapping of the tail side pieces before the forwards centre fold has been made to complete the W-profile.

The tag is shown attached to the tea bag of Fig. 9 only by its thread. The different arrangements of tag and thread can be used interchangeably in any of the examples.

A feature of all the illustrated embodiments so far is that the compartments are connected together at their tails only at the laterally outer regions in the oblique portions of the end seals. Such an arrangement allows the infusing liquid to circulate more easily through the immersed tea bag. The complementary form of the head and tail profiles avoids waste while allowing the head to retain a conventional shape with cutaway corners.

Fig. 10 illustrates another form of twin-compartment tea bag which can be produced by the method and apparatus of the present invention. It is connected only at the heads of the compartments 72a, 74a, in the central region of the head seals 88 of the individual compartments as in the example of Fig. 9, but unlike the earlier examples it is not joined at the tails. The tail seals 90a of the compartments are not shown profiled, as they do not have single margin connections, but they can be given a complementary profile to the head seals. Because the compartments are not interconnected at their tails, the production of the tea bags is considerably simplified.

The use of heat sealable paper for the webs of the illustrated embodiments allows a relatively narrow overlap for the longitudinal seals and also eliminates the need for a folded and overlapped top closure or a securing tape such as is provided in known tea bags. A suitable grade of paper would be the 15.5gsm double-sided heat-sealable filter paper made by Messrs J R Compton of Bury, Lancashire, GB and known as "Single Phase Superseal".

CLAIMS:

1. An infusion packet comprising first and second sealed compartments lying against one another, opposite ends of said first and second compartments being joined to each other, a convex or peaked profile edge being formed at one said end of the compartments by said joining of the compartments thereat, and at the end opposite said one end said compartments each being formed with a concave or centrally recessed profile edge comprising a pair of laterally outer extensions through which the compartments are joined at said opposite end.
2. A packet according to claim 1 wherein portions of said extensions project towards said one end of the packet and the compartments are joined together at said opposite end through said portions, whereby in the region of said joined extensions the packets have a generally W-form edge profile.
3. A packet according to claim 2 wherein said W-form profile comprises a centre apex and respective outer apices on each side of said centre apex, and said end portions through which the compartments are joined overlap said centre apex and extend along said W-form profile towards its respective outer apices.
4. A packet according to claim 2 wherein said W-form profile comprises a centre apex and said end portions

through which the compartments are joined lie face to face to form a cusp as said centre apex of said W-form profile.

5. A packet according to any one of claims 1 to 3 wherein the compartments comprise a central region at said opposite end, between said laterally outer extensions, at which central region the compartments are not joined together.

6. A packet according to any one of claims 1 to 3 wherein at said one end the compartments are joined only at a central region of said convex or peaked profile edge.

7. A packet according to any one of claims 1 to 3 wherein the profiles at the two ends of the compartments are complementary whereby they can be formed without wastage from a continuous web.

8. A packet according to claim 1 provided with a thread attached at one end to the compartments and a tag attached to the other end of said thread, said attachment to the compartments being made between the joined compartments at said one end.

9. A packet according to claim 8 wherein the thread is releasably held at said opposite end of the packet.

10. A packet according to claim 8 having a lateral outer face to which the tag is attached, a loose length of said thread intermediate said attachments of the thread to the

compartments and the tag being held between the tag and said outer face of the packet.

RIDOUT & MAYBEE LLP
Toronto, Canada
Patent Agents

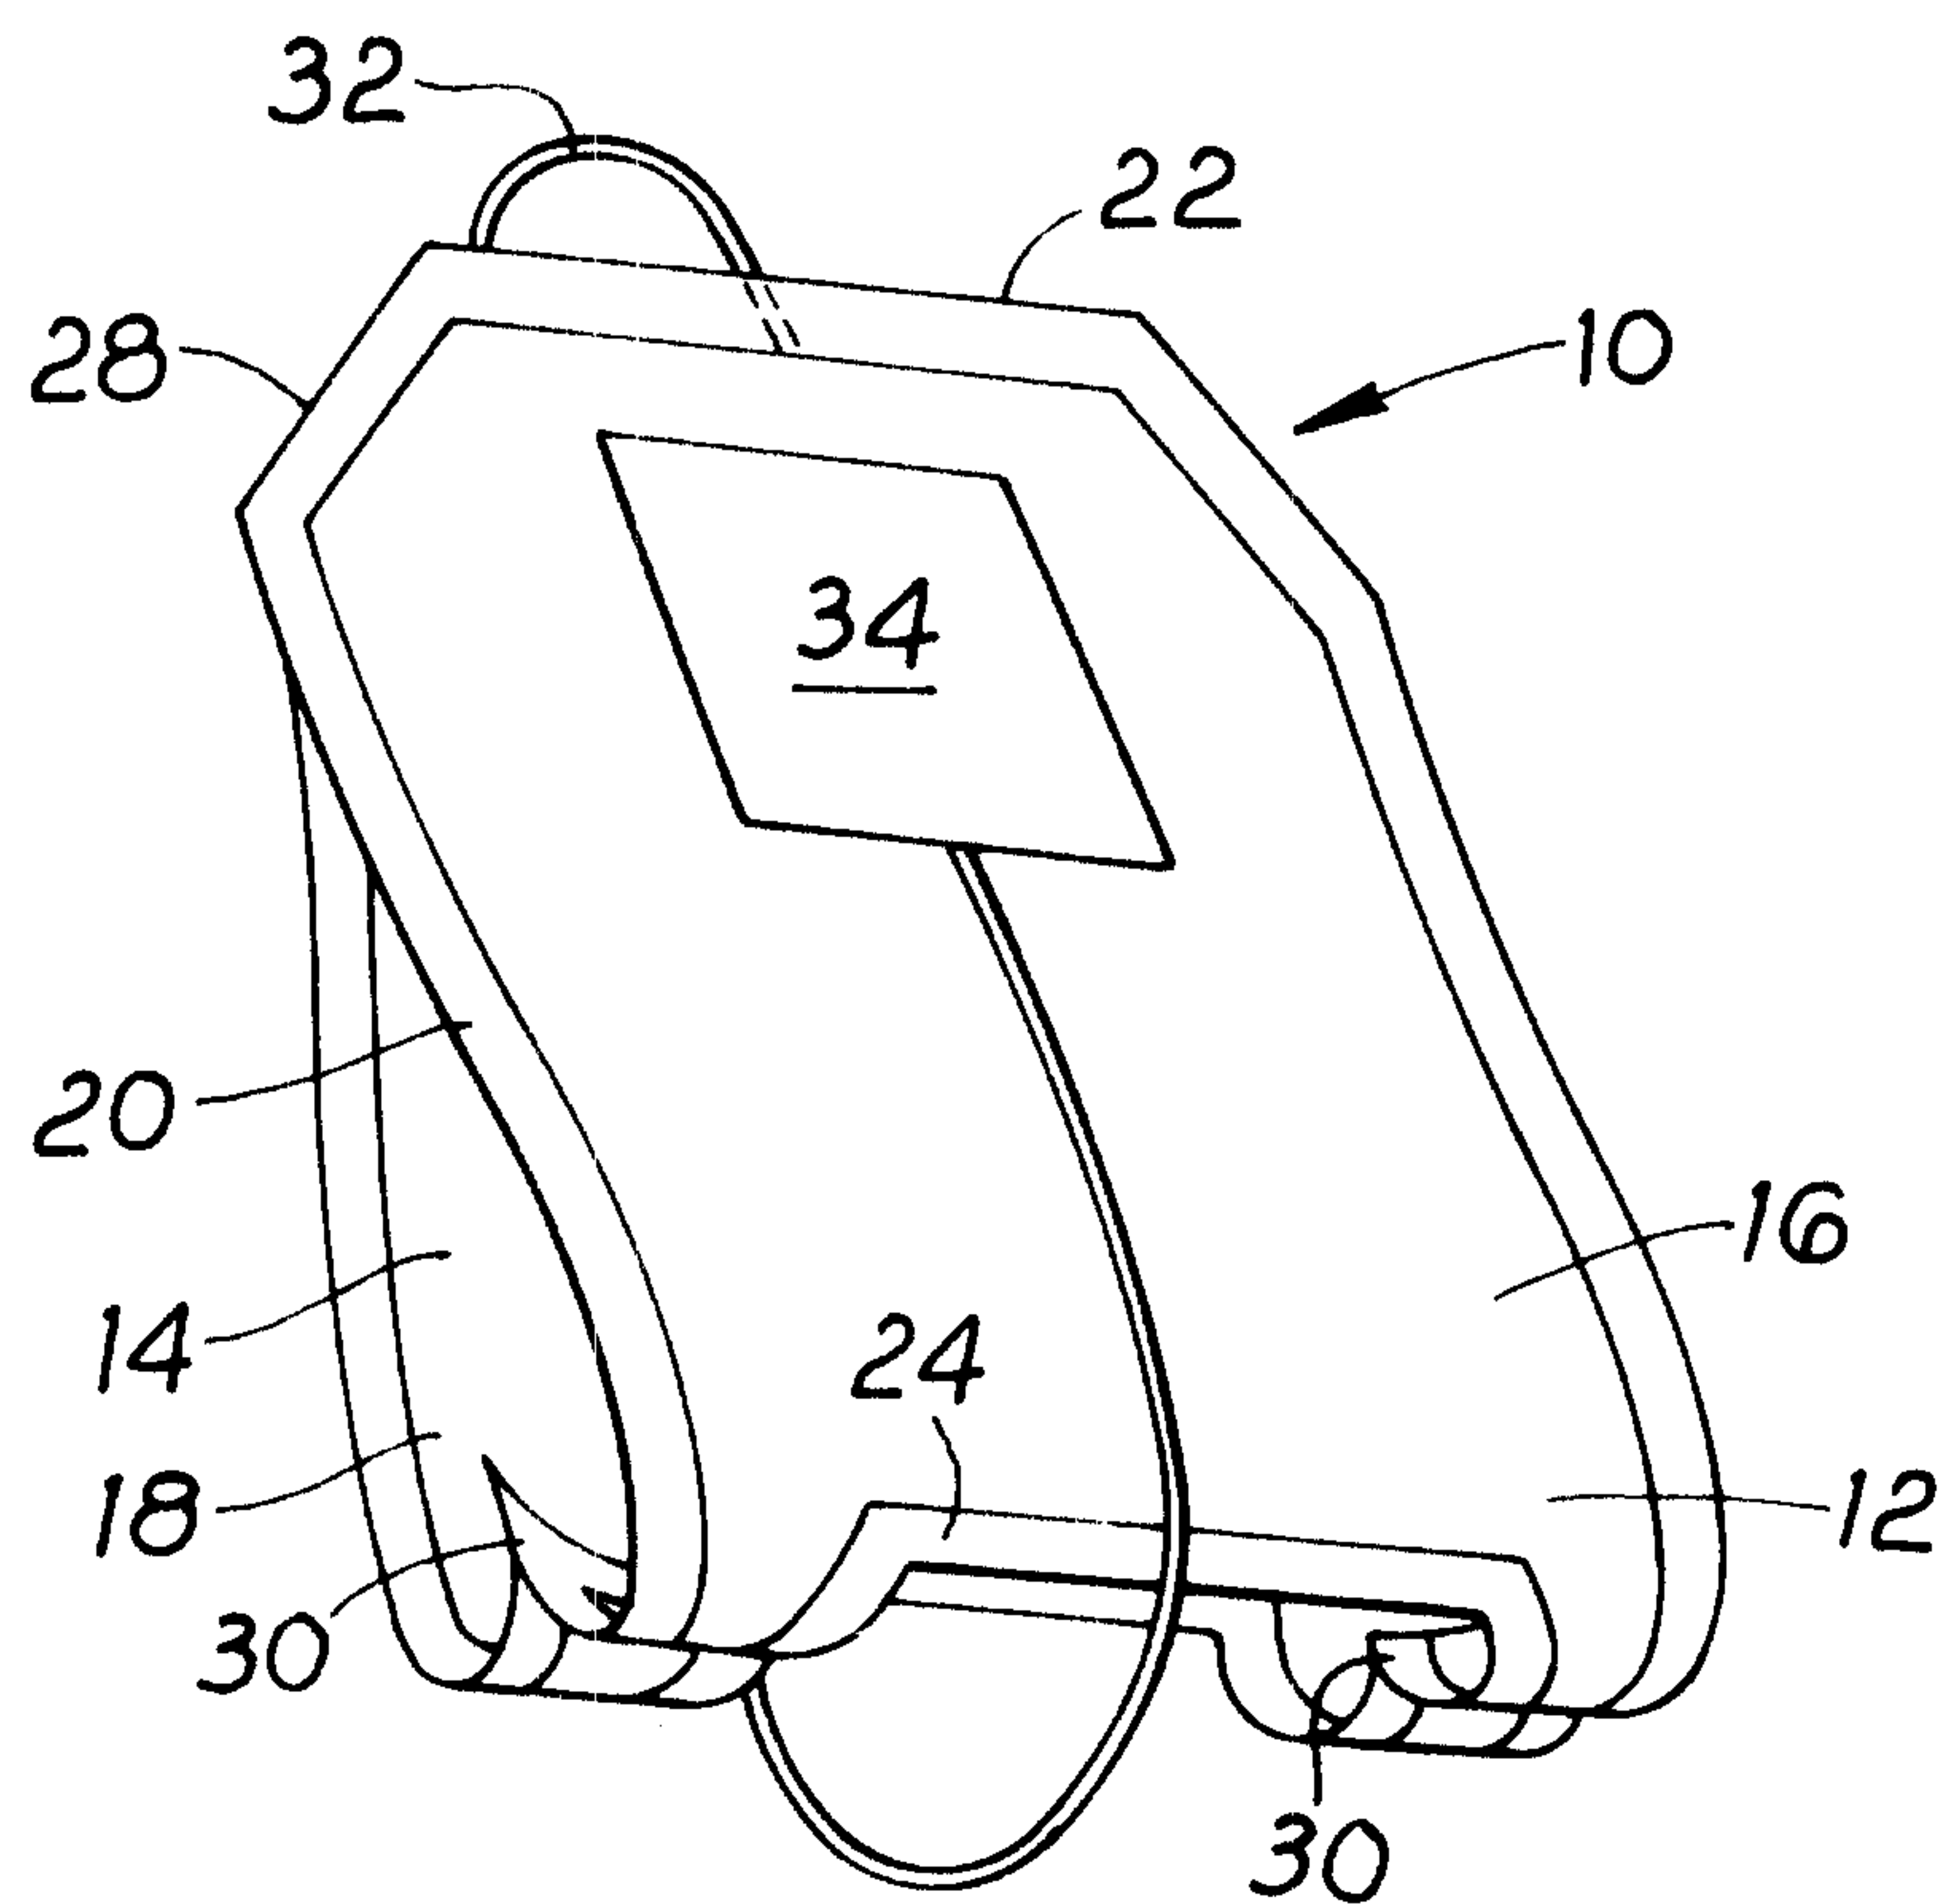


Fig. 1

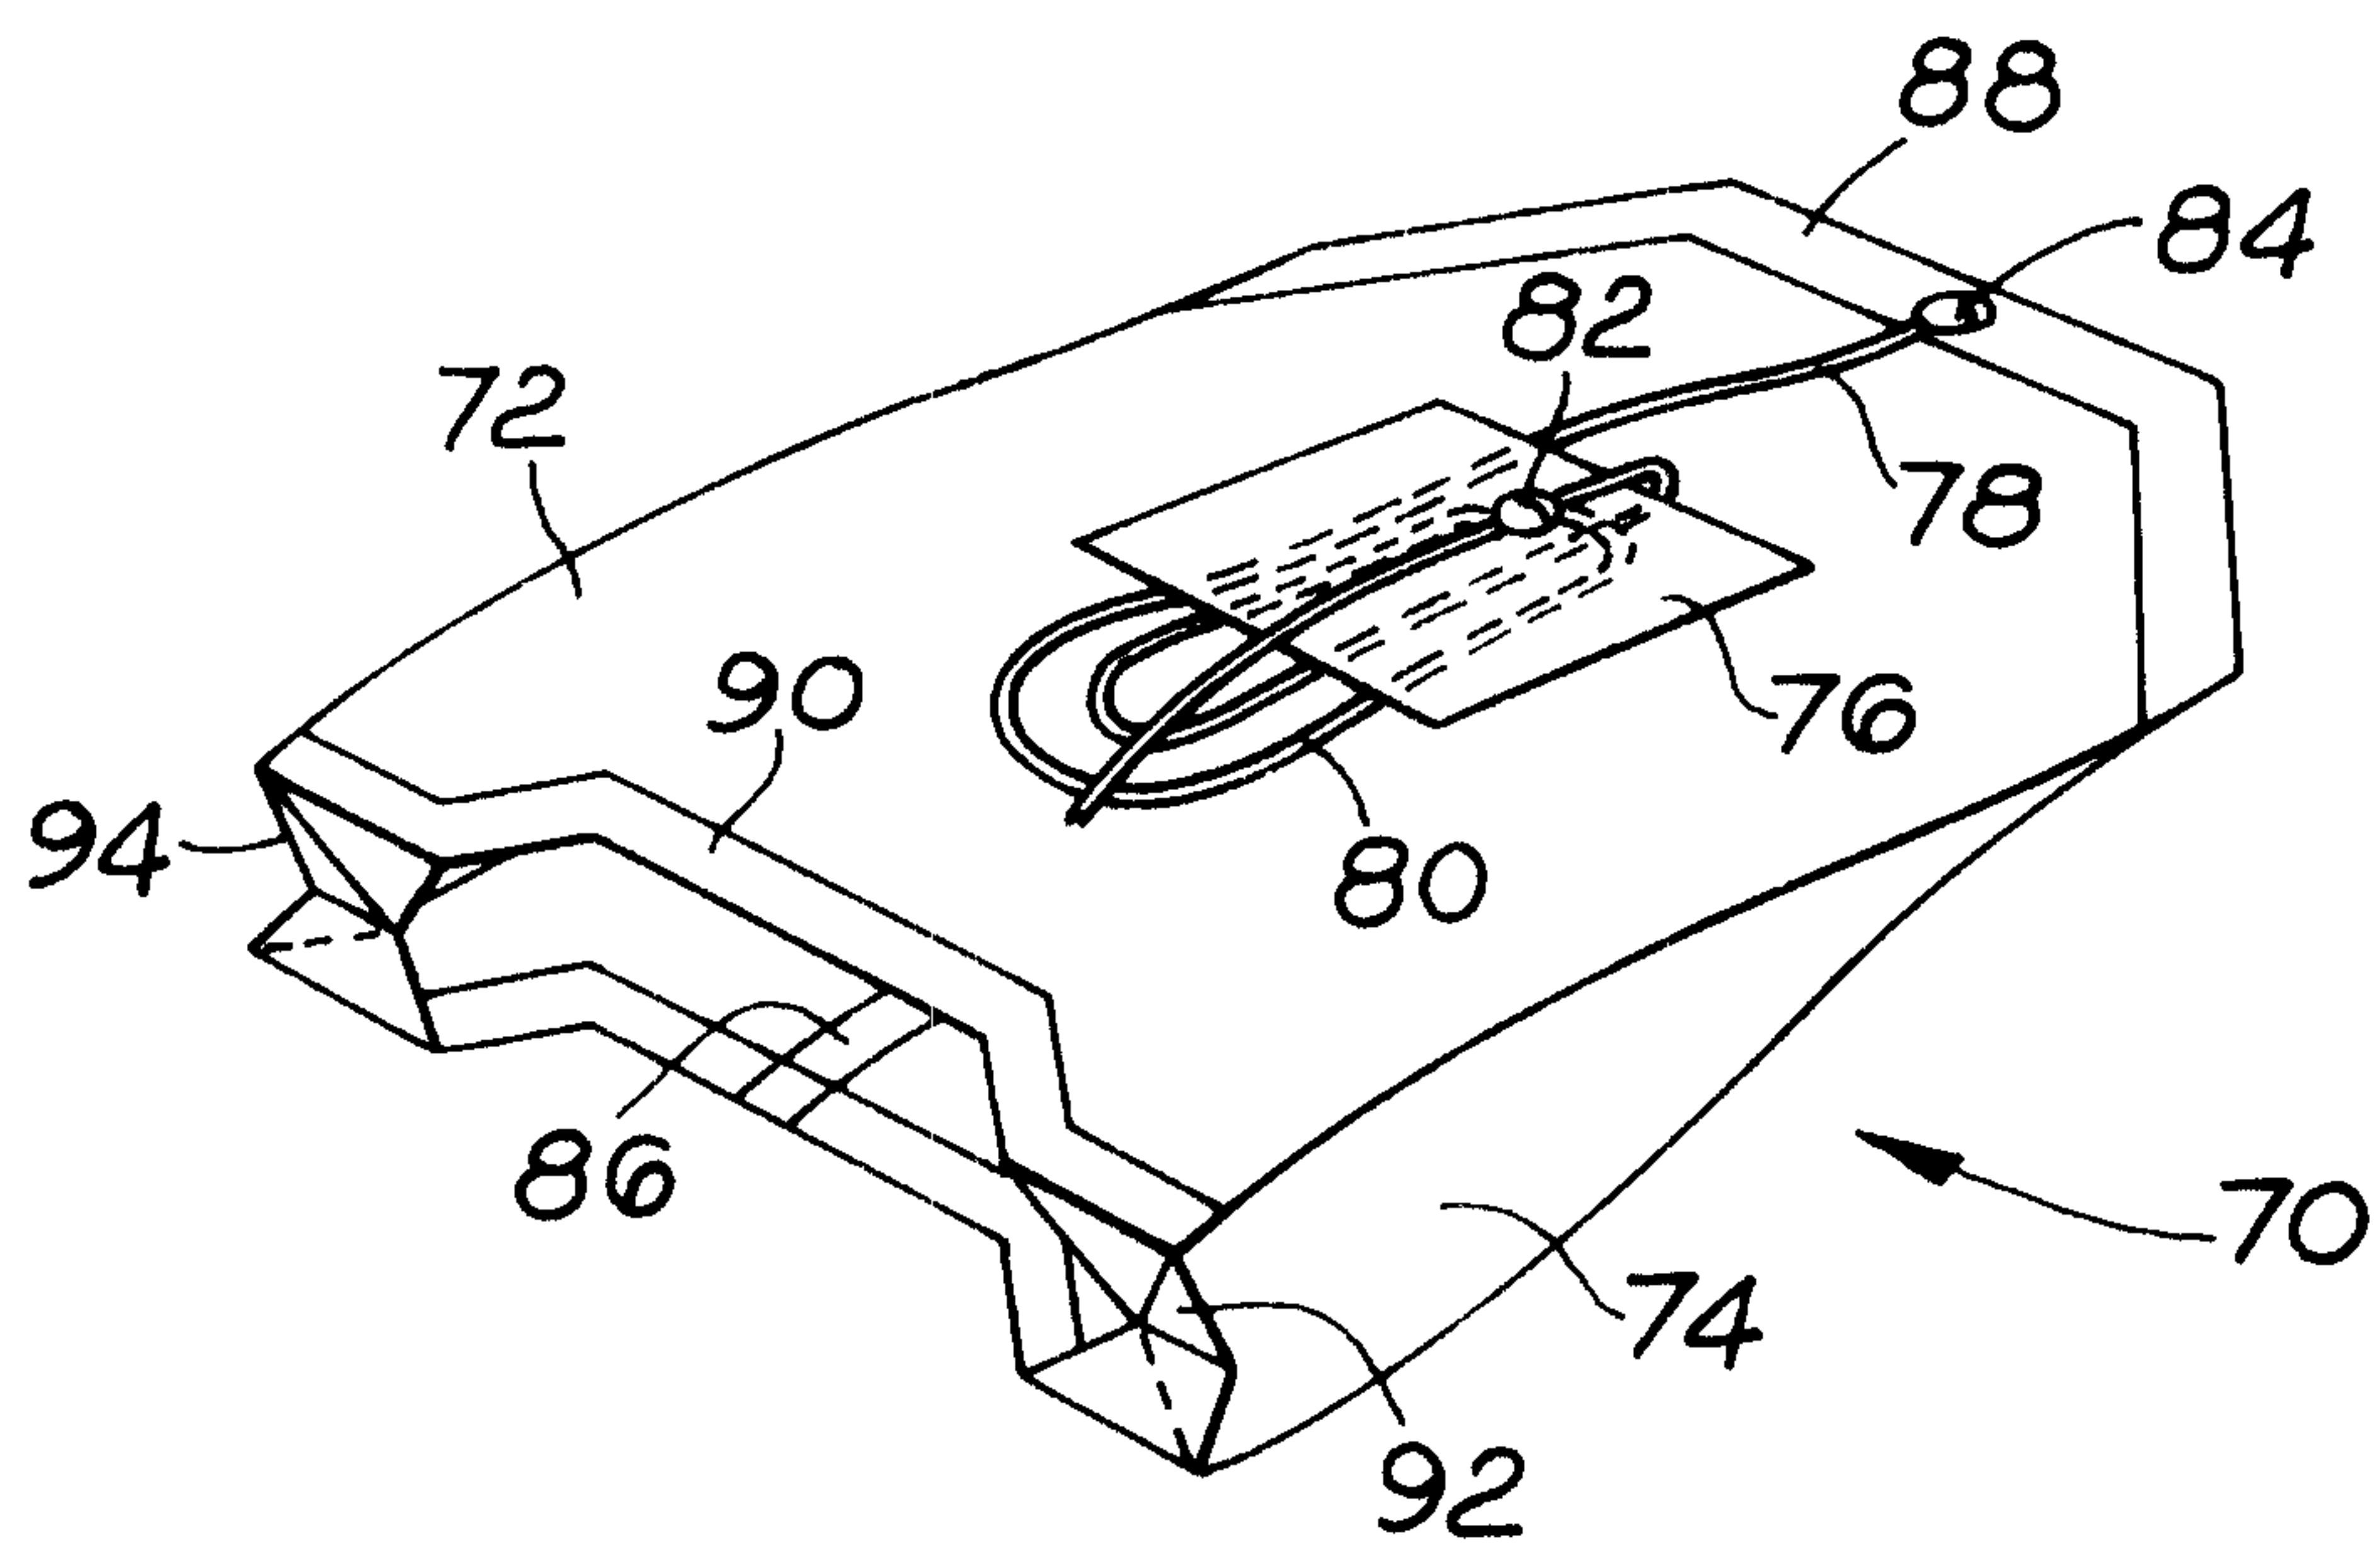
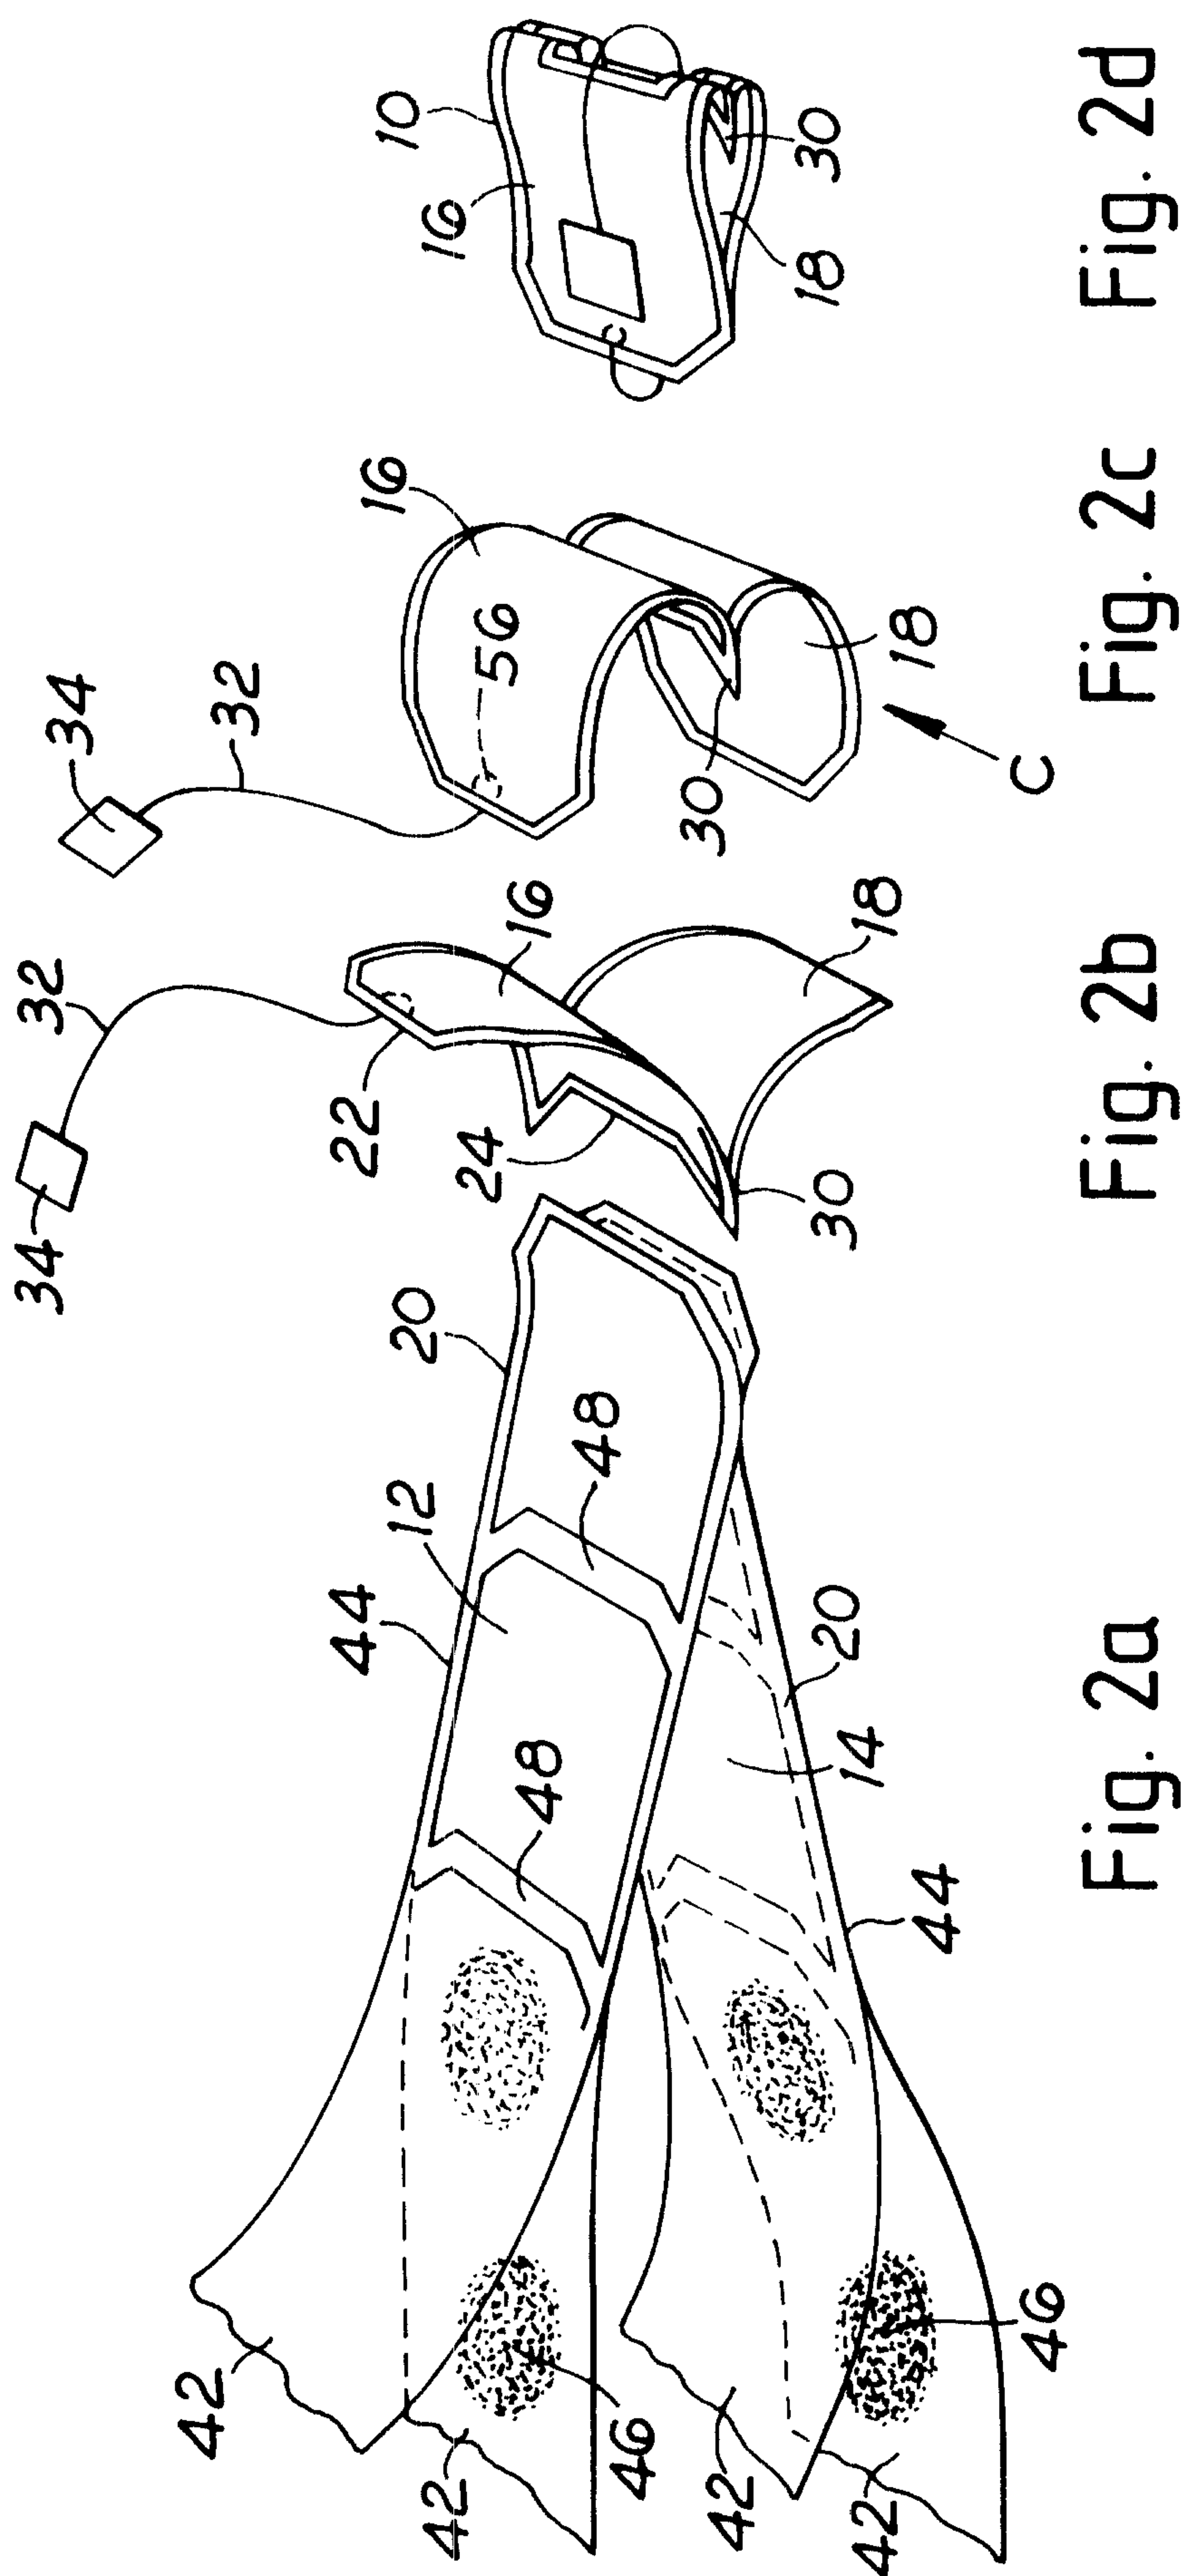


Fig. 3



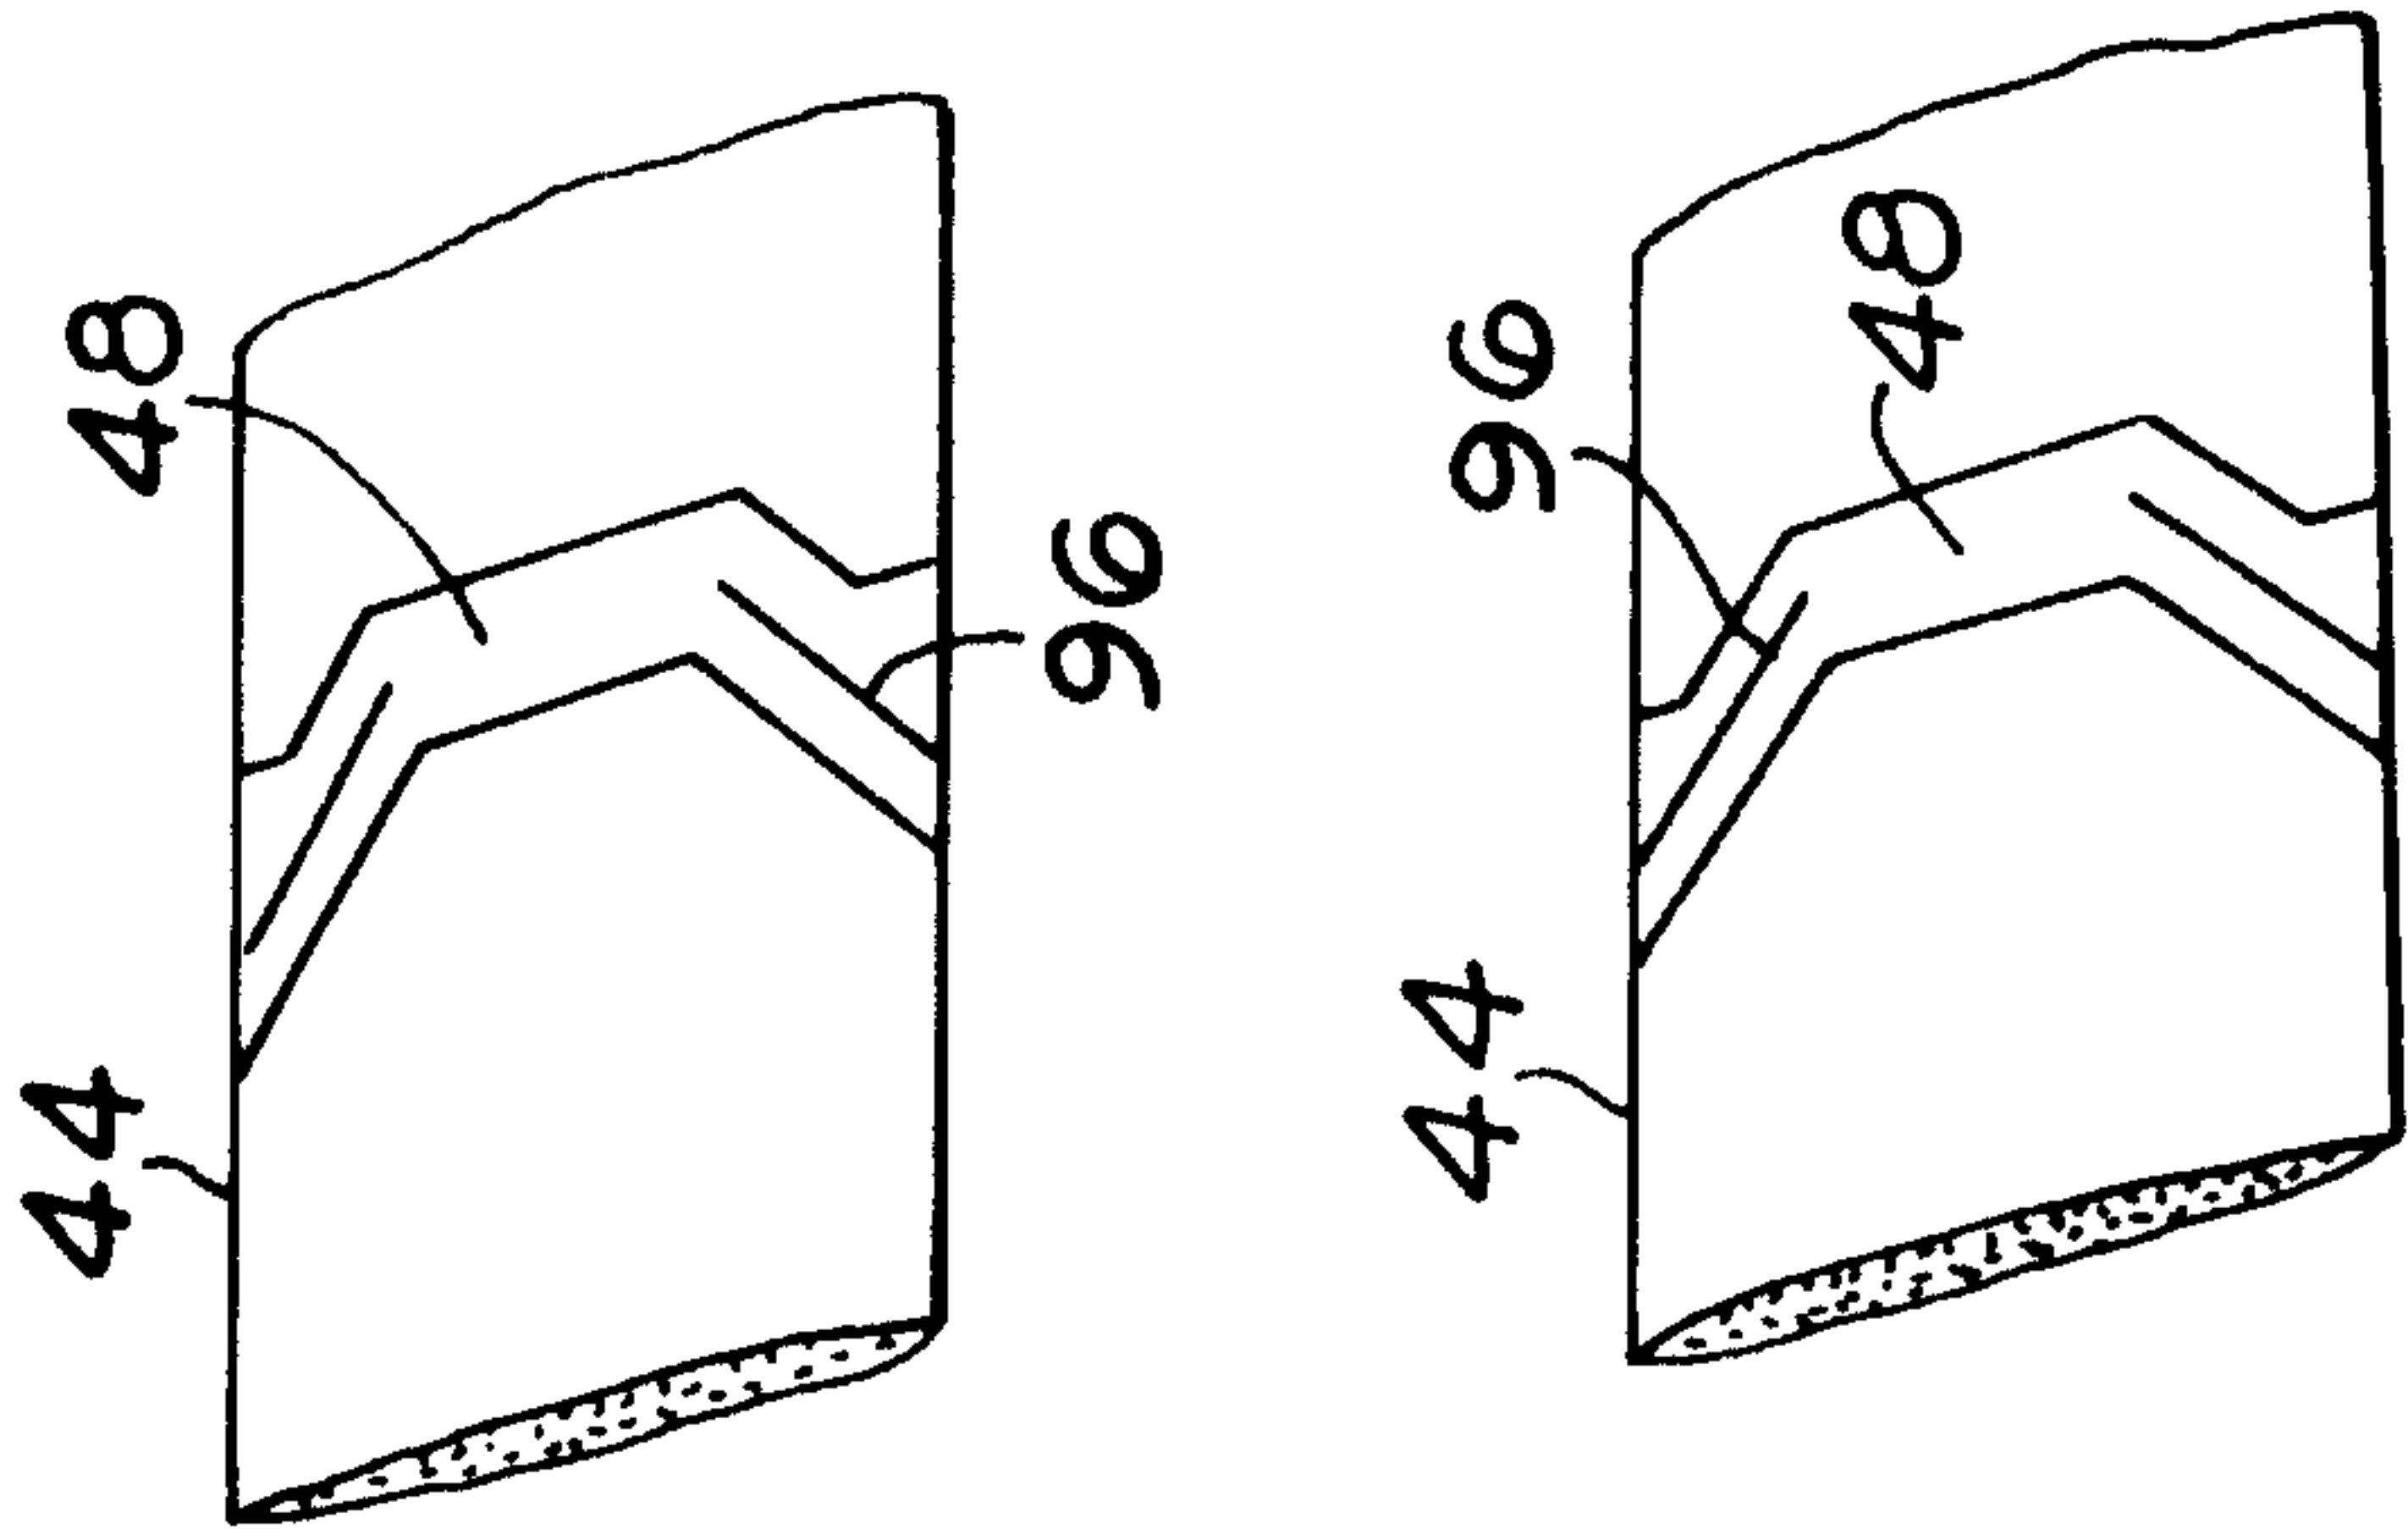


Fig. 4a

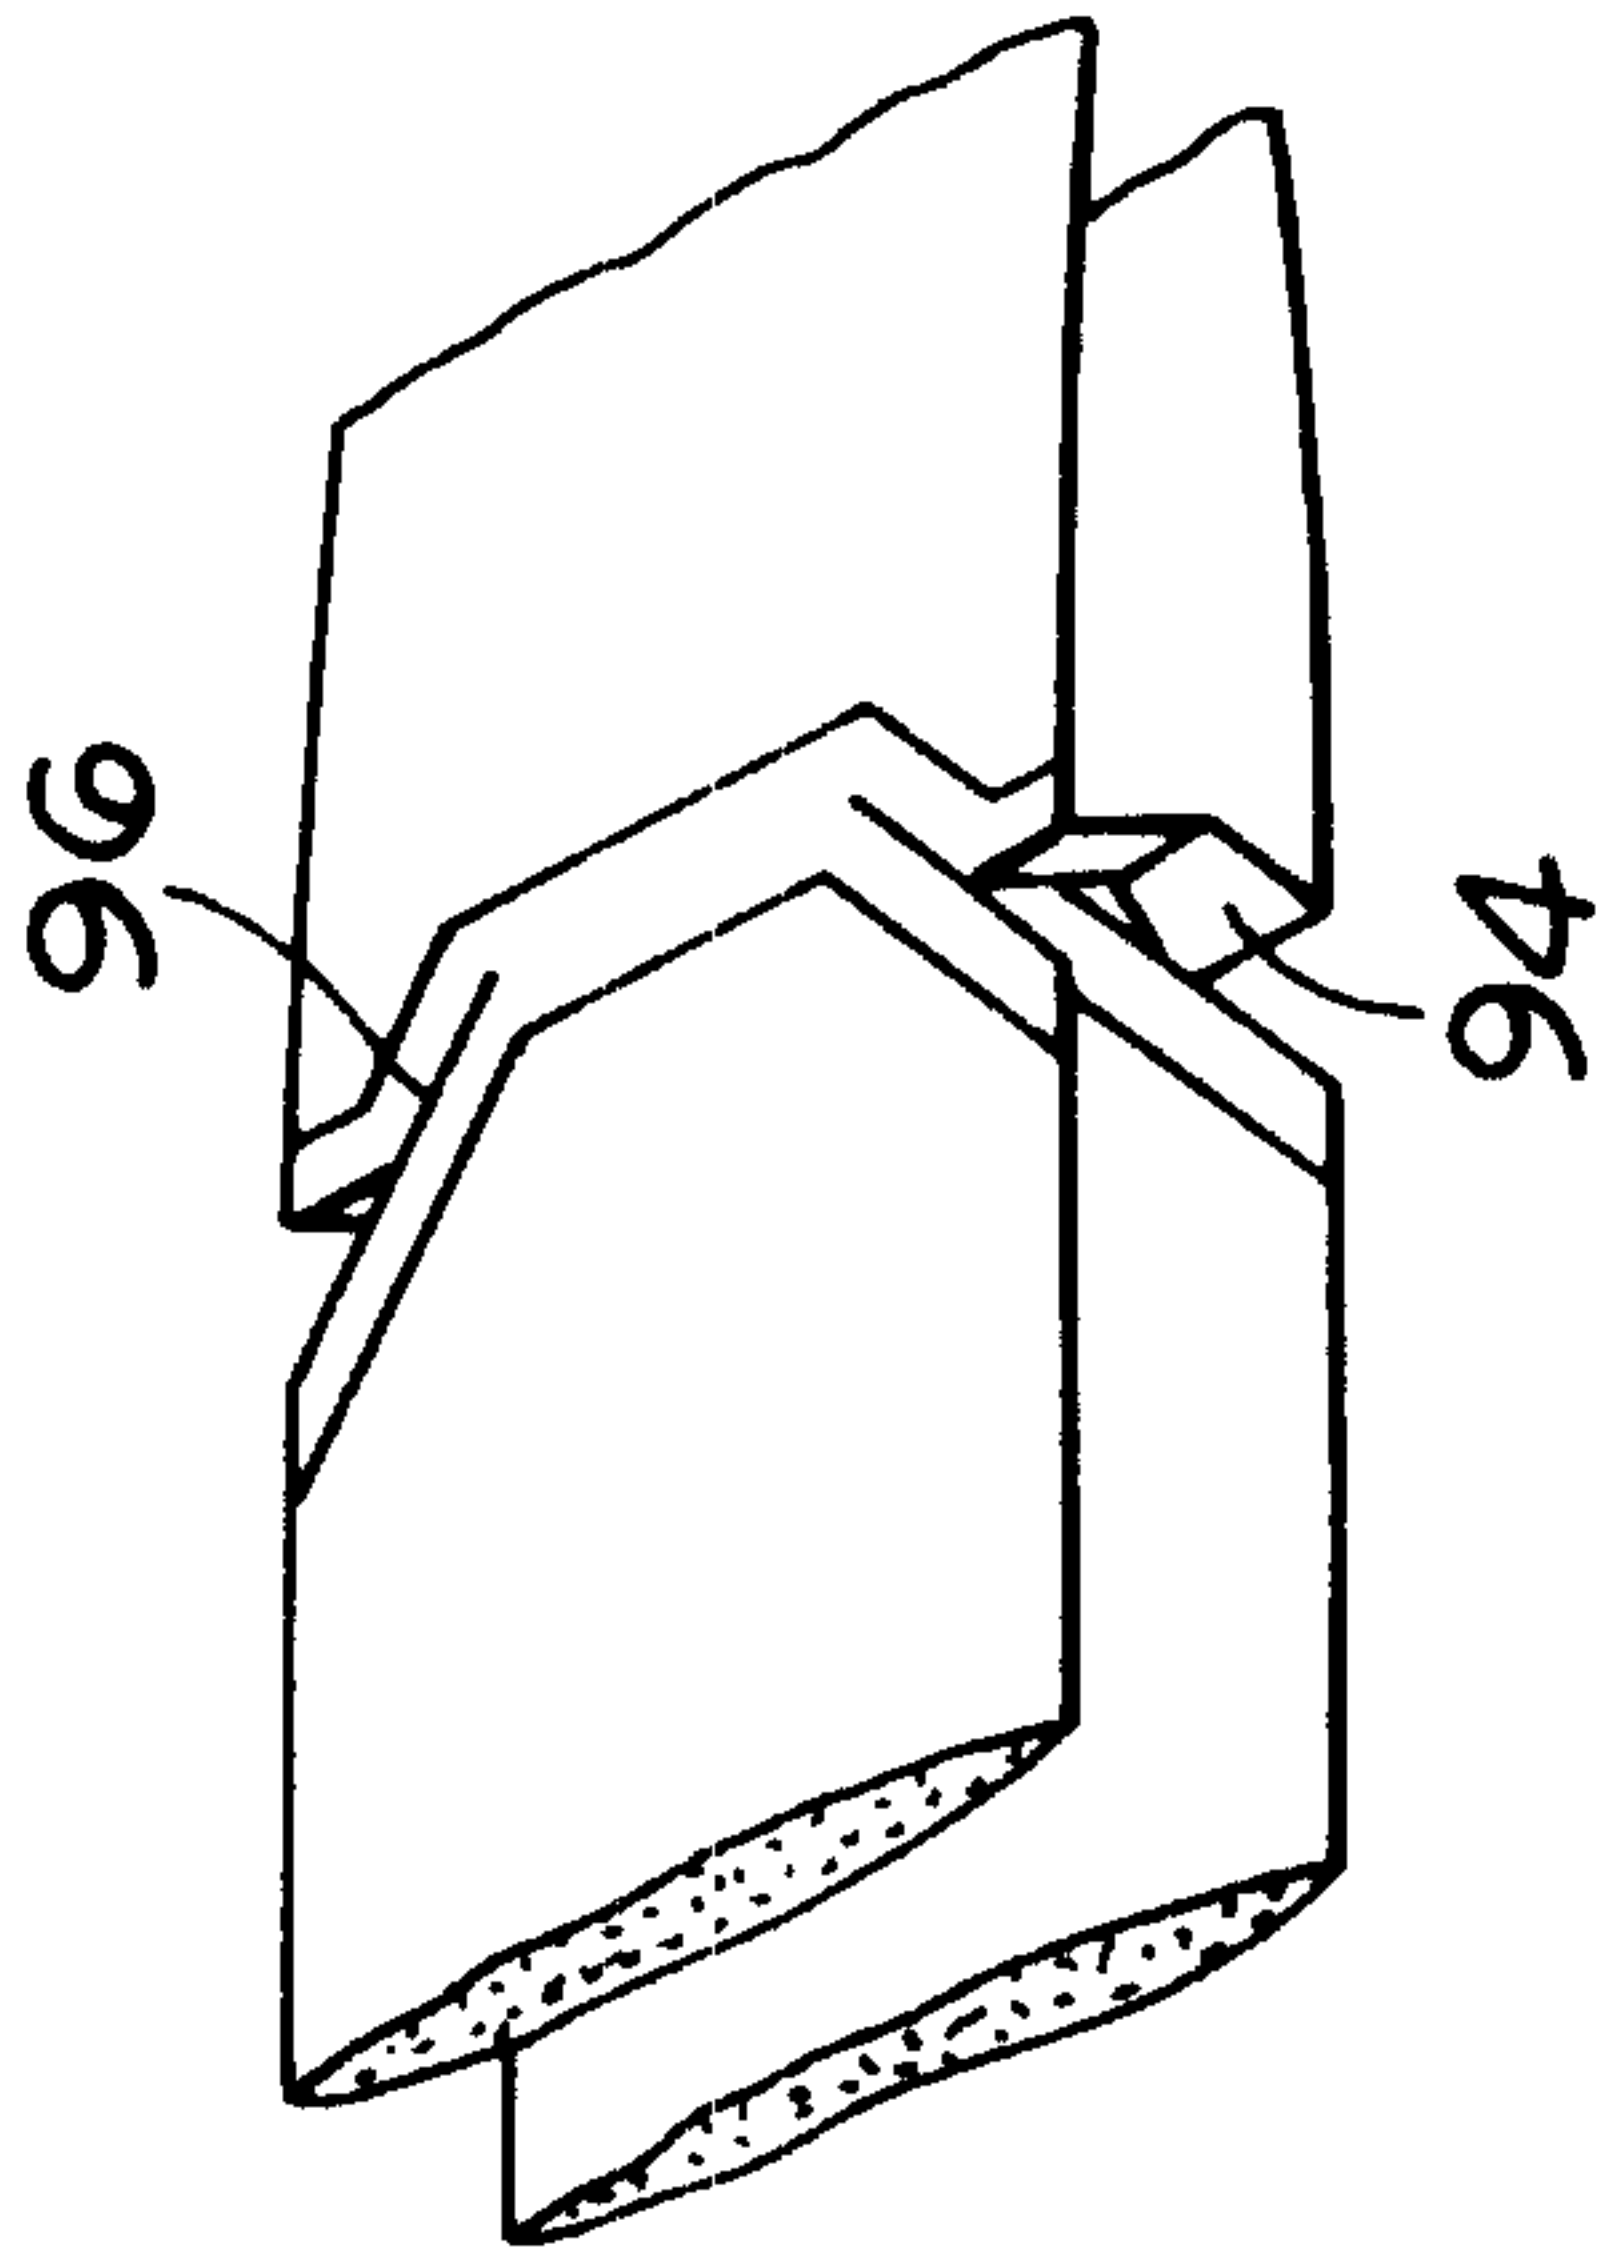


Fig. 4b

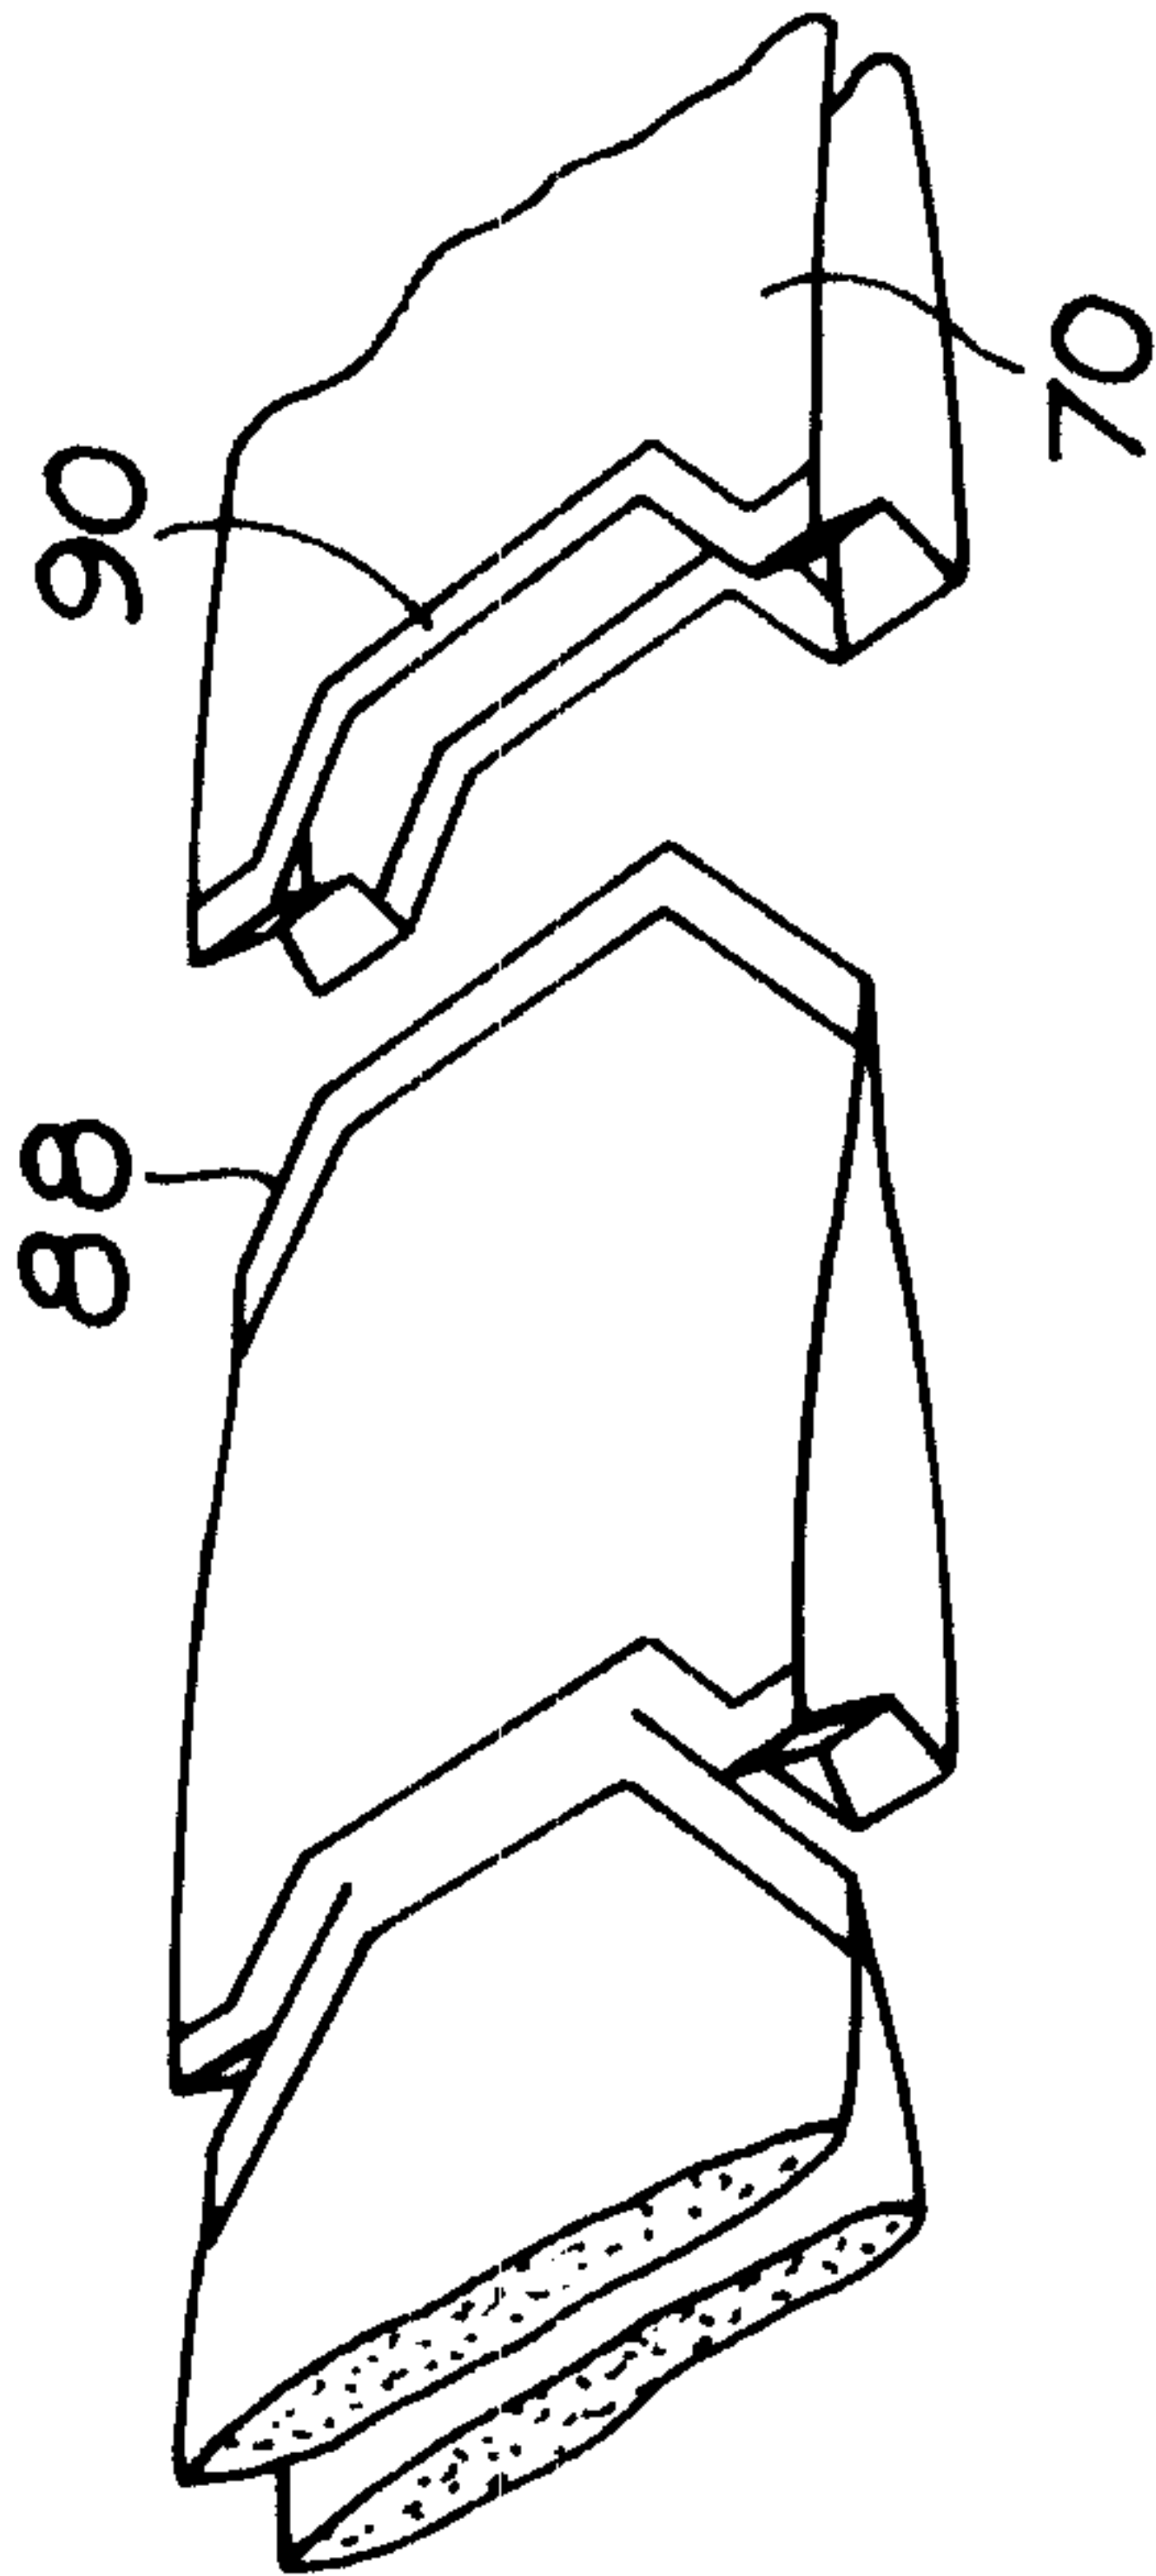
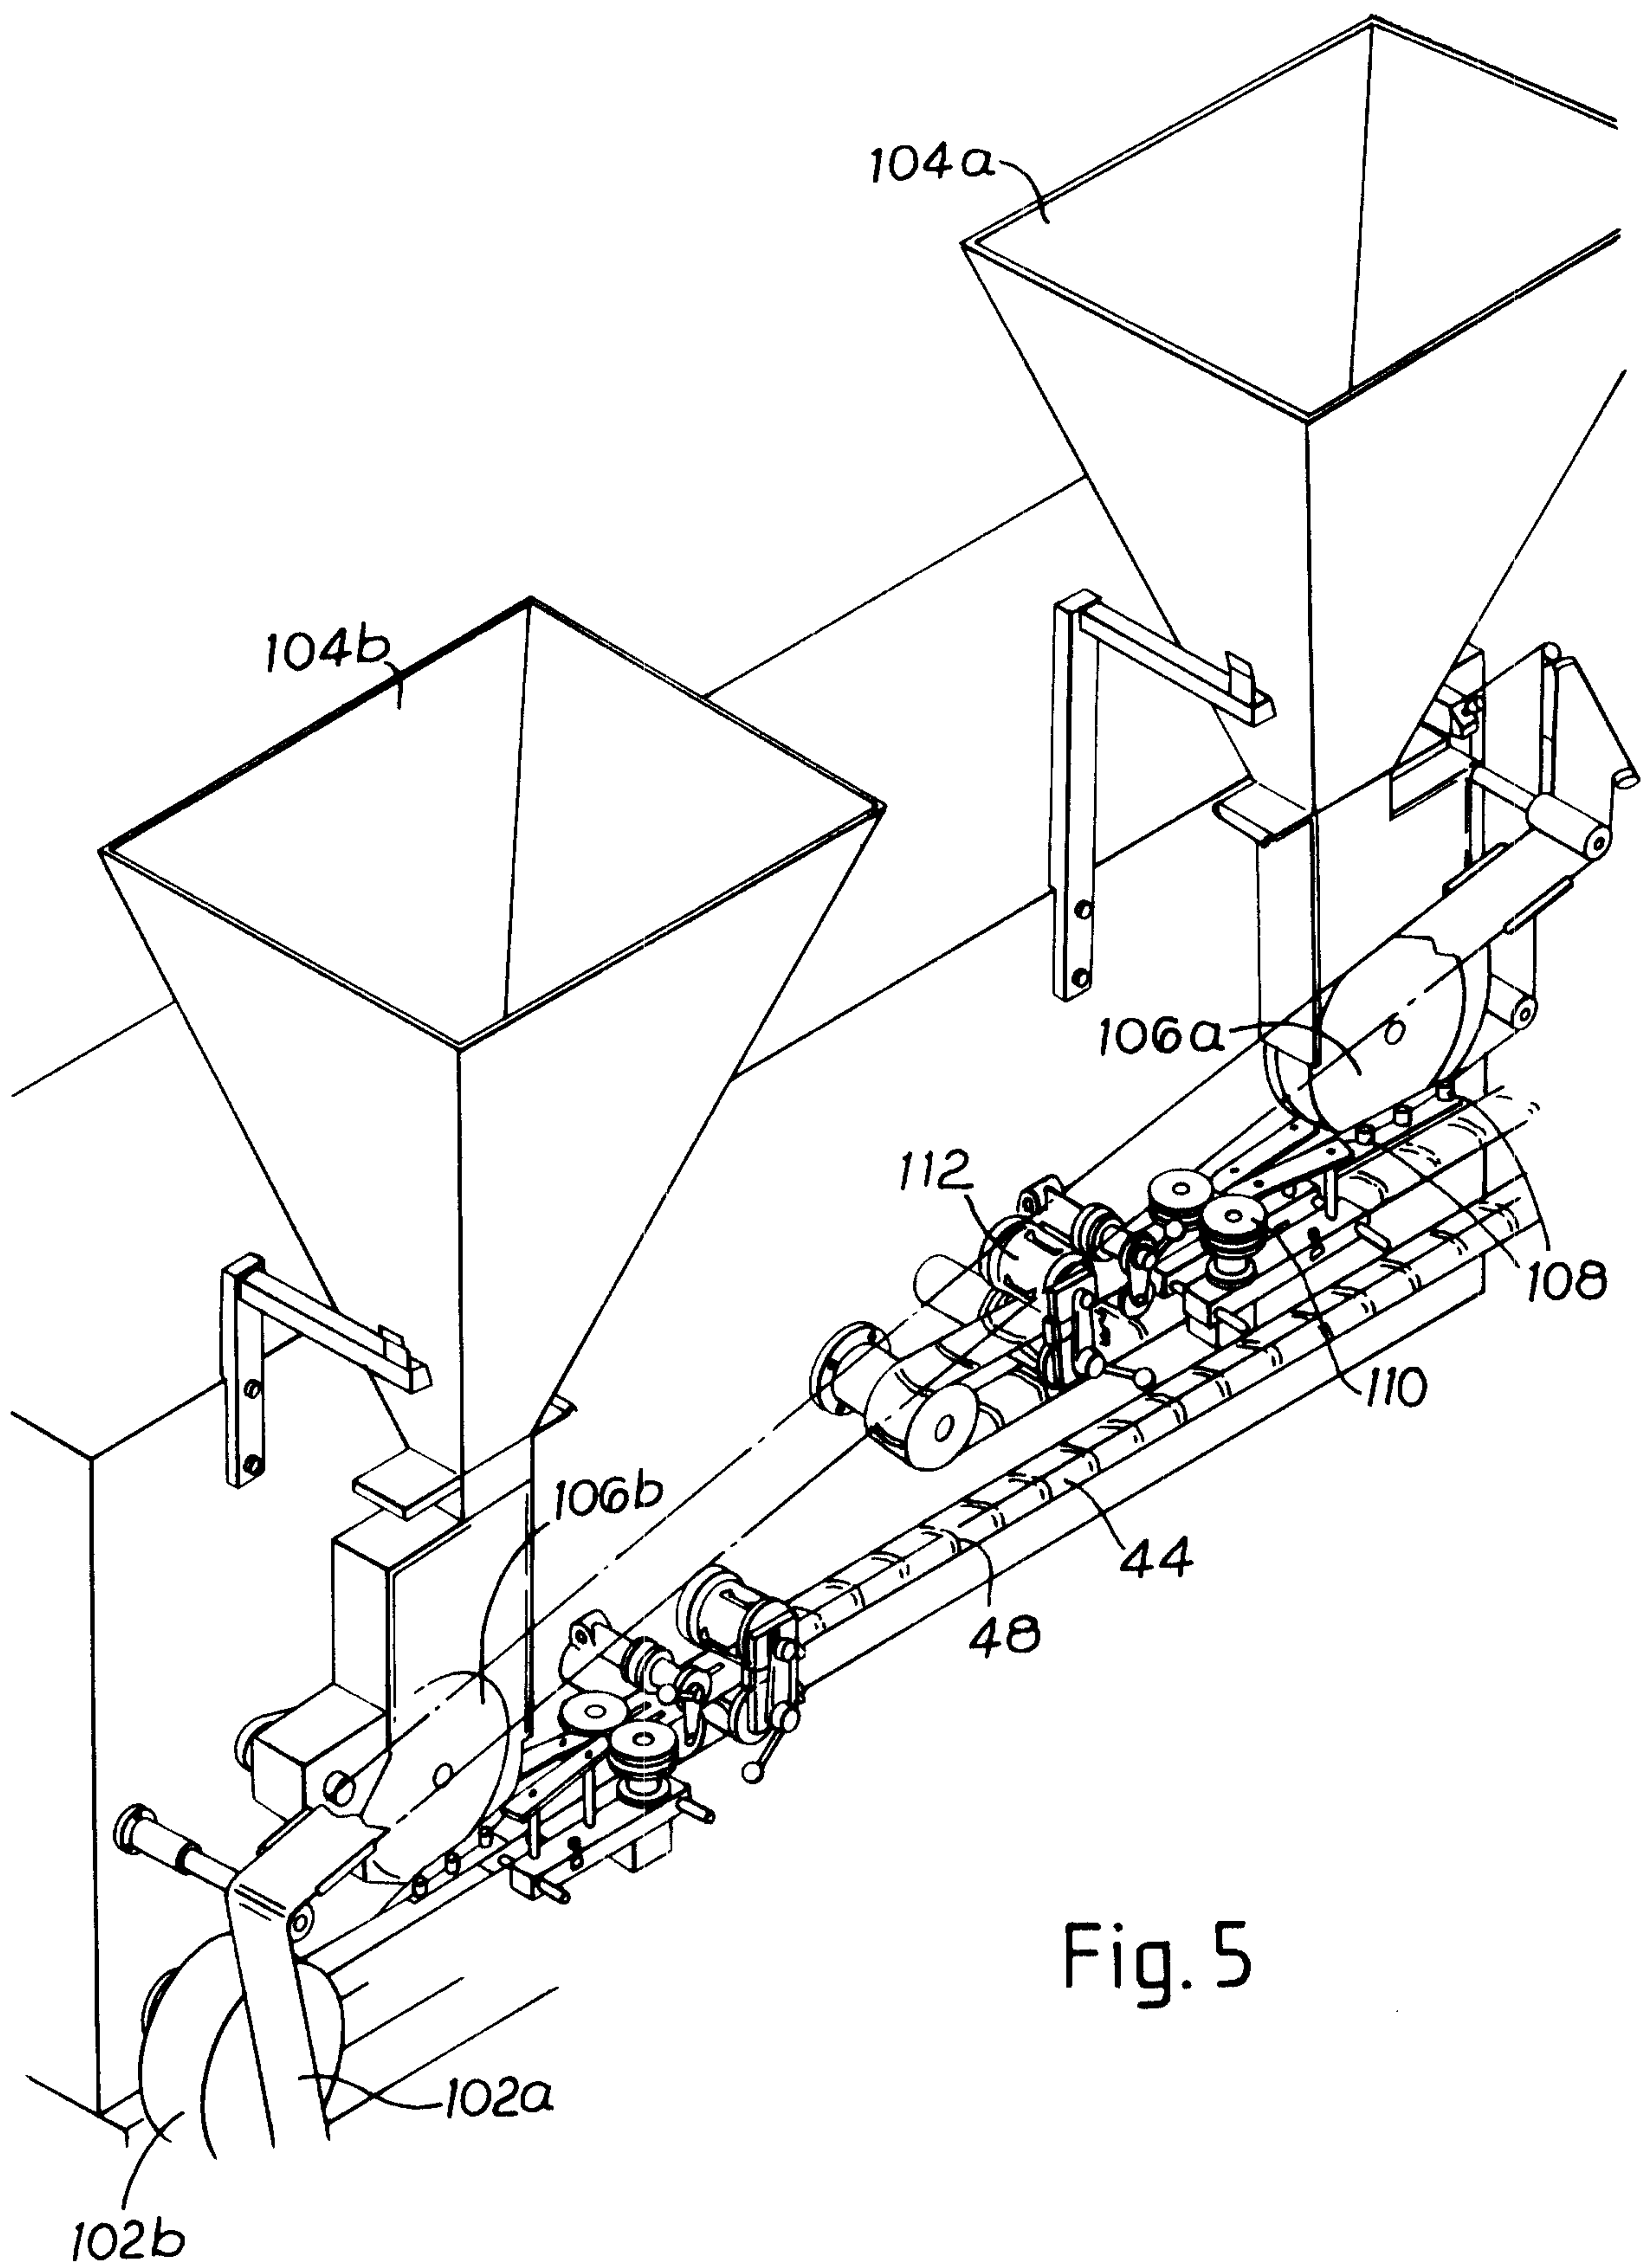


Fig. 4c



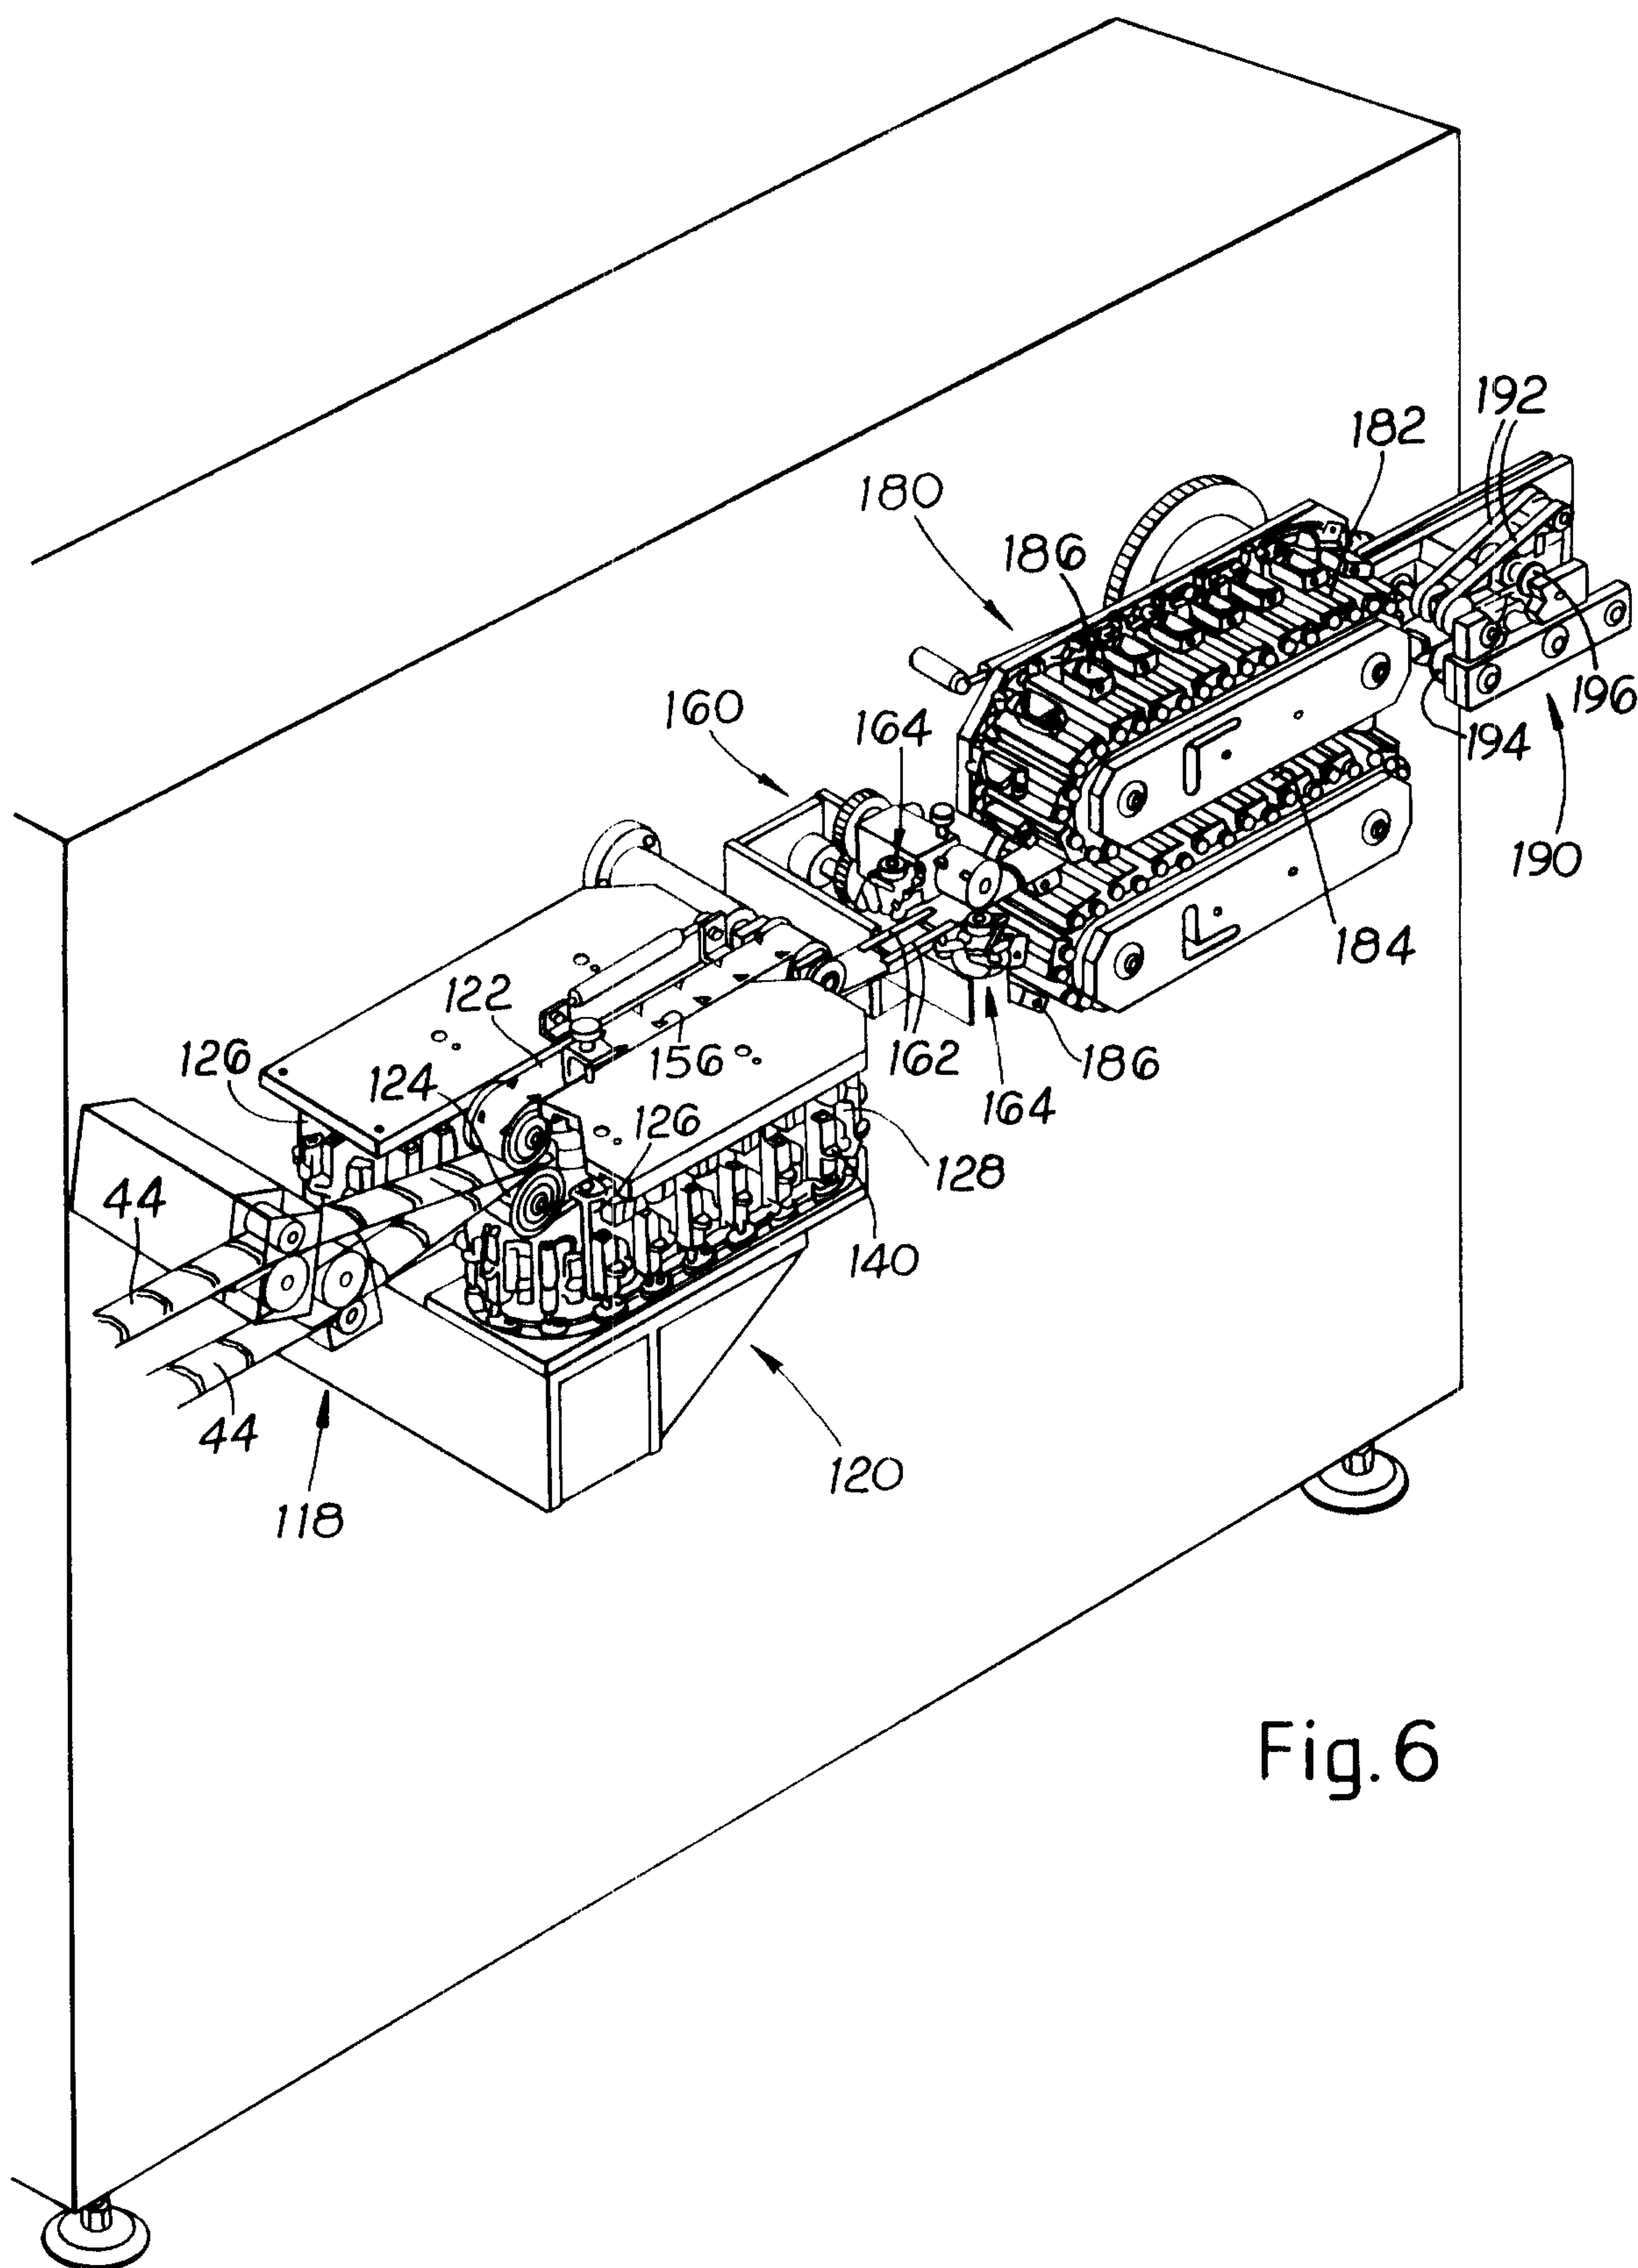


Fig.6

