



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2276624 C 2001/07/24

(11)(21) 2 276 624

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 1997/12/31
(87) Date publication PCT/PCT Publication Date: 1998/07/09
(45) Date de délivrance/Issue Date: 2001/07/24
(85) Entrée phase nationale/National Entry: 1999/06/29
(86) N° demande PCT/PCT Application No.: US 97/23734
(87) N° publication PCT/PCT Publication No.: WO 98/29787
(30) Priorité/Priority: 1996/12/31 (60/034,614) US


(51) Cl.Int.⁶/Int.Cl.⁶ G05D 21/02

(72) Inventeurs/Inventors:
THOMAS, CARL J., US;
LONG, ROBERT L., US;
MCDONALD, MICHAEL F., US

(73) Propriétaire/Owner:
EXXONMOBIL CHEMICAL PATENTS INC., US

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : CONTROLE EN DIRECT DANS UNE INSTALLATION DE TRAITEMENT CHIMIQUE
(54) Title: ON-LINE CONTROL OF A CHEMICAL PROCESS PLANT

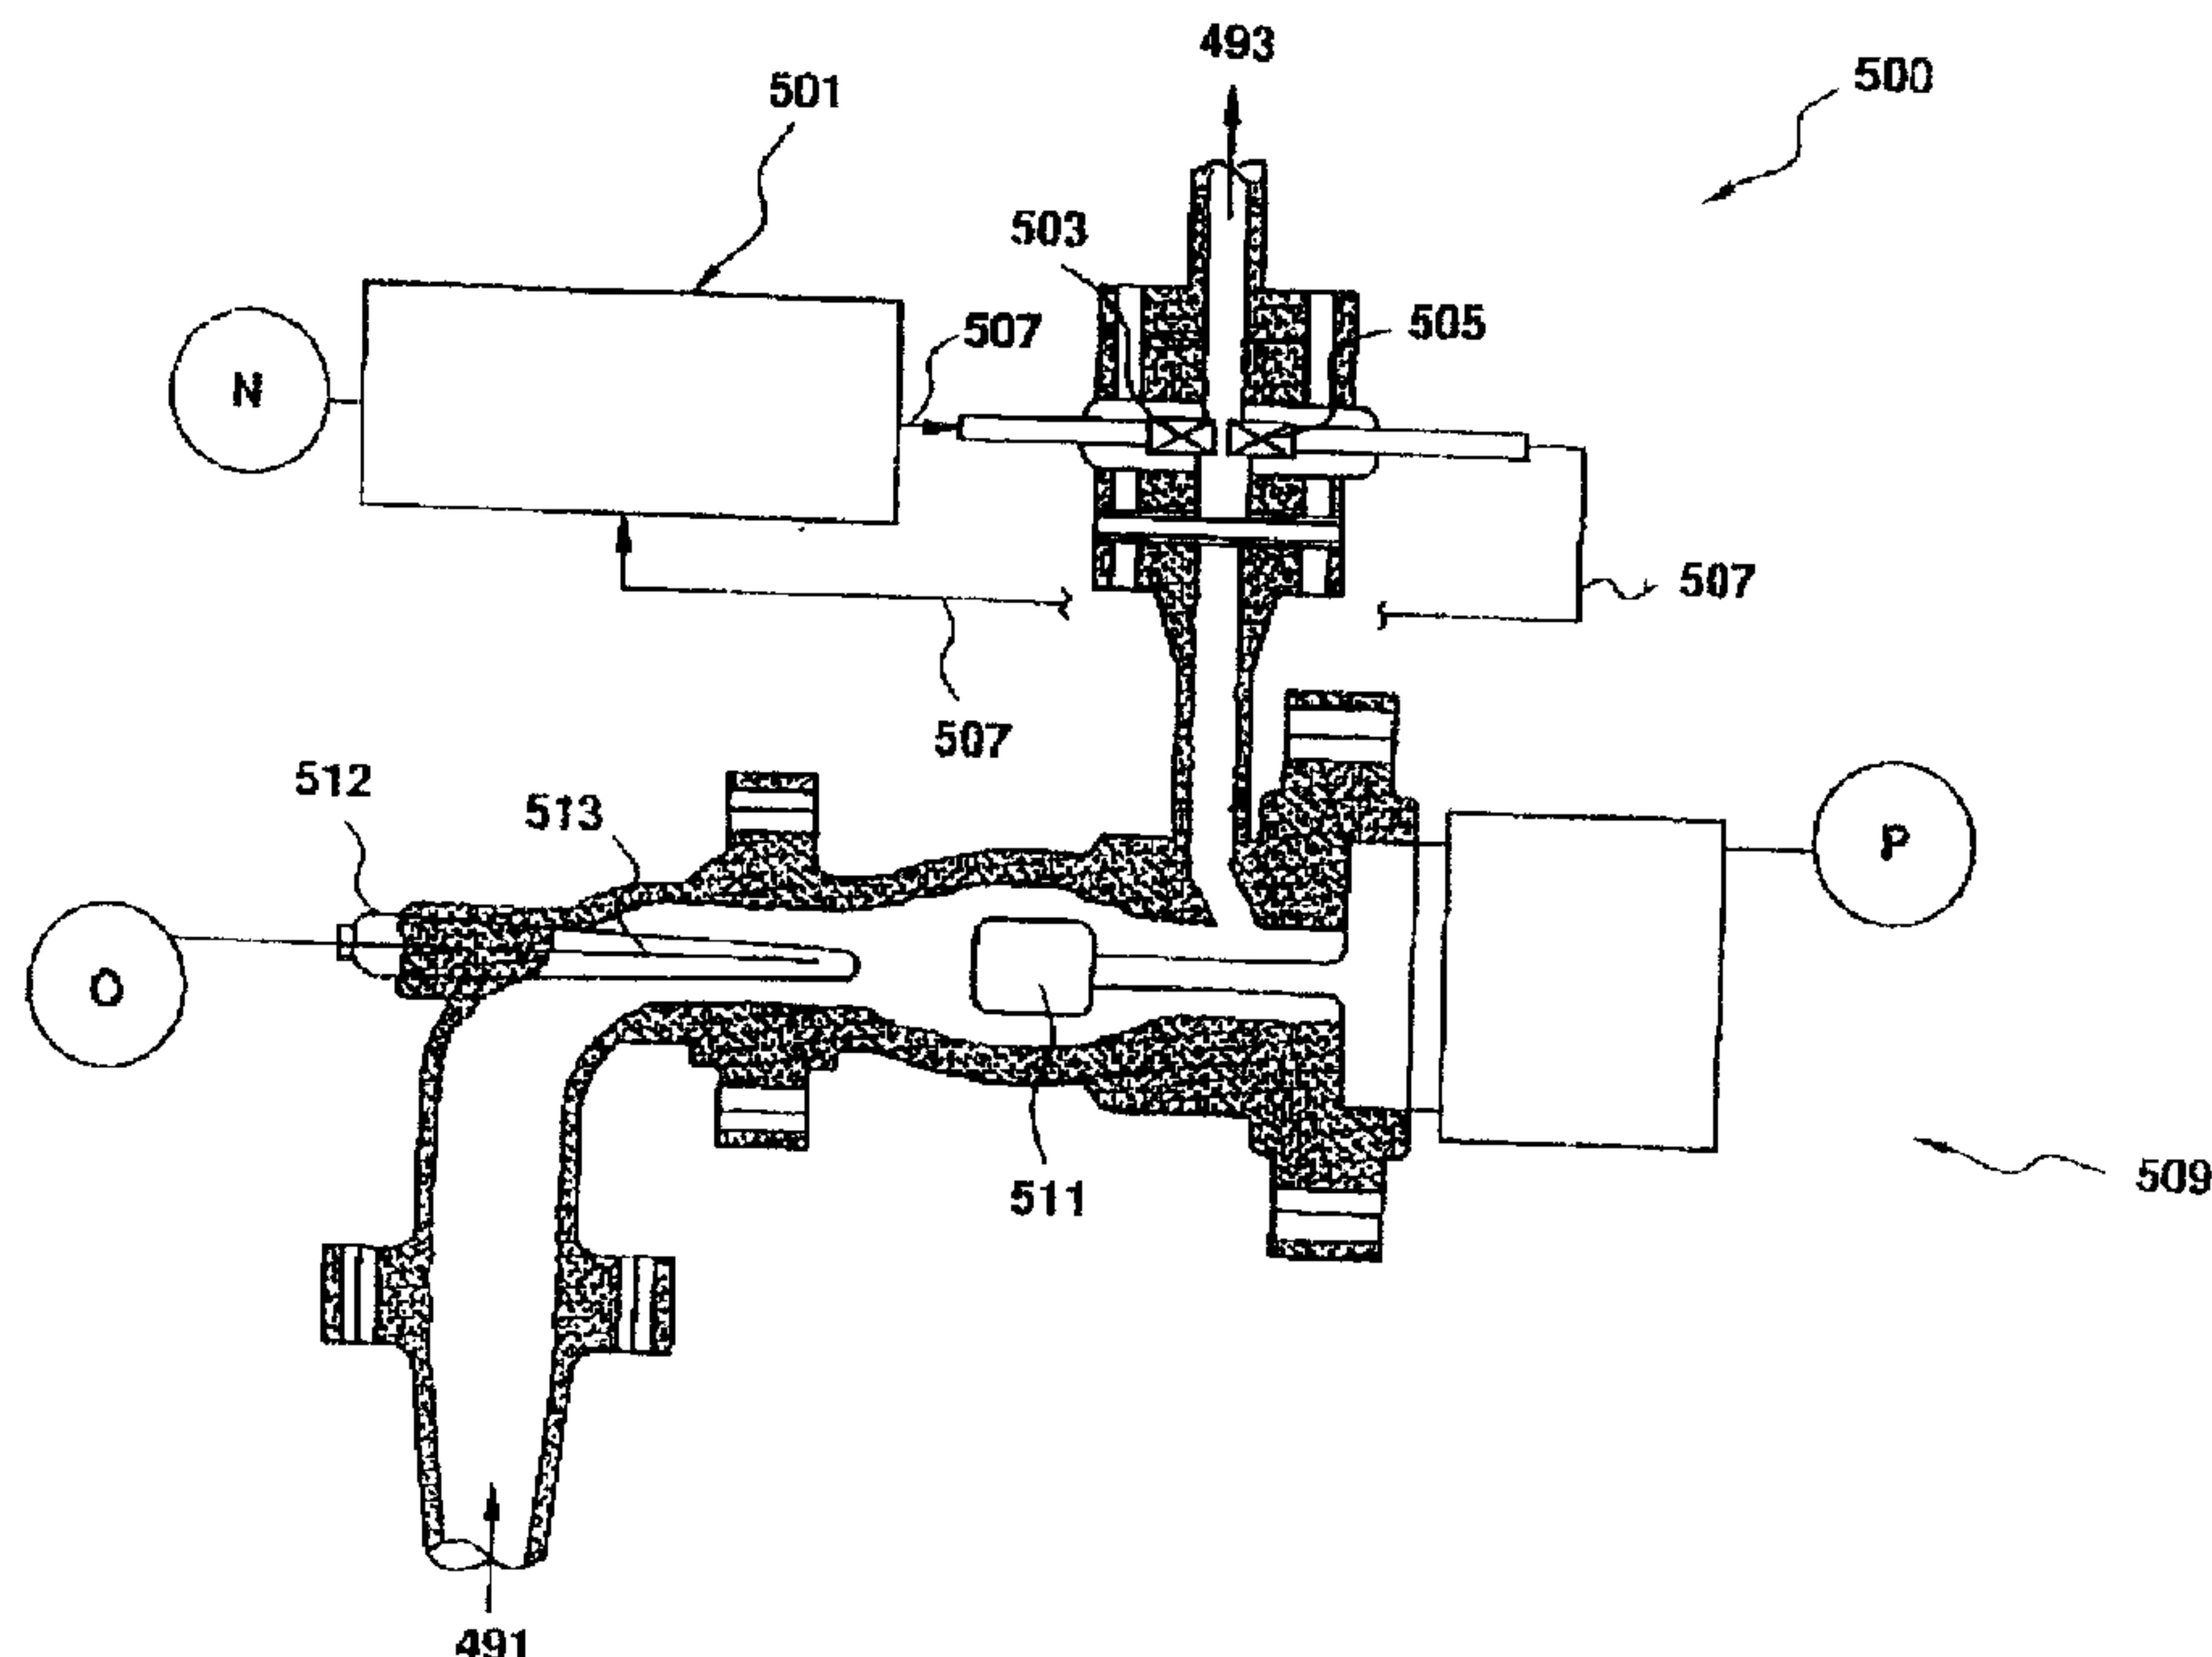

(57) Abrégé/Abstract:

A process plant for the manufacture of halobutyl rubber is provided with online monitoring and control of the process parameters to control the properties of the product. It incorporates an in situ measurement system that does not require the removal of any sample material from the process. It uses a Fourier Transform Near Infrared (FTNIR) spectrometer, fiber-optic cables, a viscometer for measuring solution viscosity and a Resistance Temperature Device (RTD) for temperature measurement. An online real-time analyzer system using a Constrained Principal Spectral Analysis program predicts the property of the polymer product and provides the process control system with analysis of the data using derived relationships between the physical properties of the polymer and these spectral measurements and the measured values of fluid viscosity and temperature. Differences between the predicted and desired property of the product are used to control process parameters. The method can be used for a variety of chemical process plants.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G05D 21/02		A1	(11) International Publication Number: WO 98/29787 (43) International Publication Date: 9 July 1998 (09.07.98)
(21) International Application Number: PCT/US97/23734		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 31 December 1997 (31.12.97)			
(30) Priority Data: 60/034,614 31 December 1996 (31.12.96) US			
(71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US).			
(72) Inventors: MCDONALD, Michael, F.; 5634 Spring Lodge, Kingwood, TX 77345 (US). LONG, Robert, L.; 15014 Cobre Valley, Houston, TX 77062 (US). THOMAS, Carl, J.; 4500 Bayway Drive, Baytown, TX 77522 (US).			
(74) Agents: RUSSELL, Linda, K. et al.; Exxon Chemical Com- pany, P.O. Box 2149, Baytown, TX 77522-2149 (US).			

(54) Title: ON-LINE CONTROL OF A CHEMICAL PROCESS PLANT

(57) Abstract

A process plant for the manufacture of halobutyl rubber is provided with online monitoring and control of the process parameters to control the properties of the product. It incorporates an in situ measurement system that does not require the removal of any sample material from the process. It uses a Fourier Transform Near Infrared (FTNIR) spectrometer, fiber-optic cables, a viscometer for measuring solution viscosity and a Resistance Temperature Device (RTD) for temperature measurement. An online real-time analyzer system using a Constrained Principal Spectral Analysis program predicts the property of the polymer product and provides the process control system with analysis of the data using derived relationships between the physical properties of the polymer and these spectral measurements and the measured values of fluid viscosity and temperature. Differences between the predicted and desired property of the product are used to control process parameters. The method can be used for a variety of chemical process plants.

ON-LINE CONTROL OF A CHEMICAL PROCESS PLANT**Field of the Invention**

5 The invention relates to a chemical plant and to a method of controlling chemical processes in a chemical plant. More particularly, the invention relates to a method for controlling Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, molecular weight and molecular weight distribution during polymerization or halogenation process of isolefin
10 copolymers and multiolefins, in particular butyl rubber.

Description of the Related Art

A prominent method for controlling the polymerization of olefins in a medium
15 of inert solvents or diluents involves measuring the concentration of polymer in the medium and the viscosity of the polymer solution in order to calculate a single variable--the "Mooney viscosity." The Mooney viscosity then is used as the single variable by which the entire process is controlled.

20 "Single variable" process control works well where the quality of the desired product is directly proportional to only one variable. "Single variable" process control does not work well where two or more variables are directly related to product quality. For example, the quality of butyl rubber is directly related to both Mooney viscosity and molecular weight distribution within the
25 polymer solution during processing.

Various attempts have been made to provide additional process control for the production of butyl rubber based on the molecular weight distribution of the polymer as well as on Mooney viscosity. Unfortunately, the methods
30 used to date either have been inefficient or have been based on

insufficiently comprehensive data to effectively control the process on the basis of molecular weight as well as Mooney viscosity.

A need exists for an efficient and precise method to control the production of
5 butyl rubber using both Mooney viscosity and polymer molecular weight as process control parameters.

Summary of the Invention

10 The invention is a method for online control of a process plant having a plurality of steps producing a product with a property **P** having a desired value **D**. It obtains a set of measured spectra for a set of calibration samples representative of at least one intermediate step in the process and removes the effect of measurement errors for the calibration samples to produce a
15 set of corrected spectra for the set of calibration samples. A set of weights relating the corrected spectrum of each of the calibration samples to a set of orthonormal basis functions, including for example eigenspectra, are determined, giving a matrix of weights. A value of the property **P** of the finished product corresponding to each of the calibration samples is
20 obtained. Next, a predictive model relating the value of the property **P** of the product corresponding to the calibration samples to the set of weights is derived. Next, a spectrum for a test sample at the intermediate step in the process is measured and corrected for measurement errors. A value for the property **P** of the predicted product corresponding to the test sample is
25 predicted from a predictive model that uses the set of weights derived from the calibration samples and the corrected spectrum of the test sample. The difference between this predicted value of the predicted product and the desired value is used for controlling the process. Optionally, additional property measurements of the calibration samples and test sample may be

2a

made and used in the derivation of the predictive model and the predictive process.

AMENDED SHEET

96B092/2

Brief Description of the Figures

Figure 1 is a simplified flow diagram of a plant for butyl rubber polymerization.

5

Figure 2 is a simplified flow diagram of a plant for halogenation of butyl rubber.

10 Figure 3 illustrates the equipment used in the instrumentation and control of the process.

Figure 4 is a comparison of the measured and predicted Mooney viscosity according to the method of this invention.

15 Figure 5 is a comparison of the measured and predicted unsaturation according to the method of this invention.

Detailed Description of the Invention

20 The invention is best understood by reference to the accompanying figures 1- 5 illustrating the preferred embodiment of the invention.

25 The bulk of the world production of butyl rubber is made by a precipitation (slurry) polymerization process in which isobutylene and a minor amount of isoprene are copolymerized using aluminum chloride in methyl chloride diluent at -100 to -900°C. Halogenated butyl rubbers are produced commercially by dissolving butyl rubber in a hydrocarbon solvent and contacting the solution with elemental halogens.

Figure 1 is a simplified flow diagram of the polymerization section of a slurry process. Isobutylene **101** is dried and fractionated in a drying tower **103**. The water **103a** is removed and the fraction consisting of isobutylene, 2-butenes and high boiling components **103b** is purified in the isobutylene purification tower **105**. The feed blend drum **109** blends a feed consisting of 5 25-40% by weight of isobutylene **105b**, 0.4 - 1.4% by weight of isoprene **107** (depending upon the grade of butyl rubber to be produced) and recycled methyl chloride **111a** from a methyl chloride purification tower **111**. Coinitiator solution is produced by passing pure methyl chloride **111b** 10 through beds **113** of granular aluminum chloride at 30-45°C. This concentrated solution **113b** is diluted with additional methyl chloride and stored in drum **115**. The diluted mixture is chilled in catalyst chillers **117** to a temperature of -100 to -90°C. The chilled coinitiator **117b** is fed to the reactor **119**. The reactor comprises a central vertical draft tube surrounded 15 by concentric rows of cooling tubes. The reactor is mixed by an axial flow pump located at the bottom of the draft tube that circulates slurry through the cooling tubes. The copolymerization reaction is exothermic, releasing approximately 0.82 MJ/kg of polymer (350 Btu/lb). The heat is removed by exchange to boiling ethylene supplied as liquid to jackets that enclose the tube section of the reactor. The reactor is constructed of alloys that have 20 adequate impact strength at the low temperature of the polymerization reaction. As shown in figure 1, the blended feed **109a** is chilled by feed chillers **121** and fed into the reactor **119**. A branching agent **109b** may be added to the blended feed **109a** to control the properties of the polymer 25 formed in the reactor **119**. The output of the reactor **119a** consists of butyl rubber, methyl chloride and unreacted monomers. Warm hexane and hexane vapor **125** and a quench agent **125b** are added to the reactor outlet line **119a** and solution drum **123** and most of the methyl chloride and unreacted monomers are vaporized and sent to the recycle gas compressor

151. The butyl rubber solution in liquid hexane is fed to the cement stripper 131 where hot hexane vapor is added 133. The hot cement 131a from the bottom of the cement stripper 131 contains the polymer in solution in hexane. The hot cement 131a flows through the flash concentrator 137 5 where cement is concentrated by vaporizing a portion of the hexane in stream 131a. The flushed hexane is recycled to the solution drum 123, and the output 137b of the flash concentrator is the feed for halogenation, described below with reference to figure 2. All the Methyl chloride, monomers and a minor amount of hexane 131b from the cement stripper are 10 recycled. 151 is a recycle gas compressor that, in association with dryers 187, methyl chloride purification tower 111, recycle tower 183 and purge tower 185 recycles the methyl chloride 111a and isobutylene 185a. Stream 185b is purged from the process.

15 In the halogenation process shown in figure 2, the butyl rubber solution 137b is stored in tanks 153. The solution reacts with chlorine or bromine 155 in one or more highly agitated reaction vessels 157 at 30 - 60°C. For safety reasons, chlorine is introduced as a vapor or in dilute solution because liquid chlorine reacts violently with the butyl rubber solution. 20 However, bromine may be used in liquid or vapor form because of its lower reaction rate. The halogenation by-product of HCl or HBr is neutralized with dilute aqueous caustic 163 in high intensity mixers 159. Antioxidants and stabilizers 167 such as calcium stearate and epoxized soybean oil are added. The solution is sent to a multi vessel solvent-removal system 171 25 where steam and water 165 vaporize the solvent and produce crumb like rubber particles in water. The final solvent content and the steam usage for solvent removal depends on the conditions in each vessel. Typically, the lead flash drum is operated at 105-120°C and 200-300 kPa (2-3 atm). Conditions in the final stripping stage 173 are 101°C and 105 kPa (1.04

atm). The hexane **175a** is recycled while the halobutyl slurry **173a** is sent on for finishing.

Figure 3 is an illustration of an apparatus useful in the present invention for
5 online monitoring of a flow stream in a manner that enables a prediction of the properties of the finished product. This prediction is, in turn, used to manipulate the inputs and the operating conditions of the equipment to obtain finished products with the desired properties.

10 The instrumentation assembly **500** is generally mounted so as to monitor fluids in the flow stream of the process. As discussed above, in one embodiment of the invention, this is done at the output to the cement stripper **131** to monitor the cement solution **131a** (figure 1) and to monitor the output **157a** after halogenation (figure 2). At the output of the cement stripper **131**, the measurements are used to determine Mooney viscosity, Unsaturation and Molecular Weight Distribution, while at the output **157a** after halogenation (figure 2), the measurements are used to predict the Halogen content of the finished product. Flow into the instrumentation assembly is indicated at **491** while the outflow is indicated at **493**, with the 15 direction of flow of the fluids in the process stream as indicated. In the preferred embodiment of the invention, the assembly comprises a spectrometer, a viscometer and a temperature measurement device. In figure 3, the spectrometer is shown at **501**. In the preferred embodiment, it is a Fourier Transform Near Infrared (FTNIR) spectrometer. As the name 20 suggests, FTNIR is a spectrometer designed to make measurements in the near infrared region and includes appropriate microprocessors (not shown) to compute Fourier Transforms of the input data. A fiber optic link **507** from the FTNIR spectrometer sends an infrared signal across the flow stream between the gap **503 -505**. The output of the FTNIR spectrometer is 25

spectral data **N** detailing the absorption spectra of the fluid being monitored and is used by the process control computer, not shown, as described below.

5 The instrumentation also includes a viscometer, indicated at **509**, that has a probe **511** in the fluid flow stream. The probe measures the viscosity product (product of viscosity and density) of the fluid in the flow stream. The viscosity product measurements are output at **P** for use by the process control computer, not shown.

10

The next component of the instrumentation is a temperature measuring device **512** that comprises a probe **513** that monitors the temperature of the fluid in the flow stream. The output of the temperature measuring device is a temperature measurement **O** of the temperature of the fluid in the flow 15 stream. The temperature measurement **O** is used by the process control computer, not shown, as described below.

20 In a preferred embodiment, the path length for the infrared signal is approximately 0.8 mm. This path length greatly reduces the need to compensate the absorption spectra for changes in the path length compared to conventional methods where the path length is much smaller.

25 The components of the instrumentation (the temperature measuring device, viscometer and spectrometer) are not discussed in detail as they would be familiar to those knowledgeable in the art.

The outputs **N**, **O** and **P** of the instrumentation assembly are transmitted to a computer that analyzes the measurements, as discussed below, and predicts properties of the finished product that could be expected from the

30

process. Differences between the predicted and desired properties of the product are used to control the process parameters, also as discussed below.

5 The three measuring instruments disclosed here (spectrometer, viscometer and temperature gauge) are for illustrative purposes only. Those knowledgeable in the art would recognize that other measurements could also be made. These additional measurements are intended to be within the scope of the present invention.

10

Analysis of Data

15 Brown (US 5121337) discloses a method for correcting spectral data for data due to the spectral measurement process itself and estimating unknown property and/or composition data of a sample using such method. This patent is incorporated here by reference and forms the basis for the analysis of the spectral data derived from the FTNIR spectrometer.

As disclosed by Brown, the first step of the analysis is that of calibration. 20 The spectral data for n calibration samples is quantified at f discrete frequencies to produce a matrix X (of dimension $f \times n$) of calibration data. The first step in the method involves producing a correction matrix U_m of dimension $f \times m$ comprising m digitized correction spectra at the discrete frequencies f , the correction spectra simulating data arising from the 25 measurement process itself. The next step involves orthogonalizing X with respect to U_m to produce a corrected spectral matrix X_c whose spectra are orthogonal to all the spectra in U_m . Due to this orthogonality, the spectra in matrix X_c are statistically independent of spectra arising from the measurement process itself.

30

The spectra can be absorption spectra and preferred embodiments described below all involve measuring absorption spectra. However, this is to be considered as exemplary and not limiting on the scope of the invention as defined by the appended claims, since the method disclosed herein can 5 be applied to other types of spectra such as reflection spectra and scattering spectra (such as Raman scattering). Although the description given herein and with reference to the drawings relate to NIR (near-infrared) and MIR (mid-infrared), nevertheless, it will be understood that the method finds applications in other spectral measurement wavelength ranges 10 including, for example, ultraviolet, visible spectroscopy and Nuclear Magnetic Resonance (NMR) spectroscopy.

Generally, the data arising from the measurement process itself are due to two effects. The first is due to baseline variations in the spectra. The 15 baseline variations arise from a number of causes such as light source temperature variations during the measurement, reflectance, scattering or absorption by the cell windows, and changes in the temperature (and thus the sensitivity) of the instrument detector. These baseline variations generally exhibit spectral features which are broad (correlate over a wide 20 frequency range). The second type of measurement process signal is due to ex-sample chemical compounds present during the measurement process, which give rise to sharper line features in the spectrum. For current applications, this type of correction generally includes absorptions due to water vapor and/or carbon dioxide in the atmosphere in the 25 spectrometer. Absorptions due to hydroxyl groups in optical fibers could also be treated in this fashion. Corrections for contaminants present in the samples can also be made, but generally only in cases where the concentration of the contaminant is sufficiently low as to not significantly dilute the concentrations of the sample components, and where no 30 significant interactions between the contaminant and sample component

occurs. It is important to recognize that these corrections are for signals that are not due to components in the sample. In this context, "sample" refers to that material upon which property and/or component concentration measurements are conducted for the purpose of providing data for the 5 model development. By "contaminant", we refer to any material which is physically added to the sample after the property/component measurement but before or during the spectral measurement.

In a preferred way of performing the invention, in addition to matrix X of 10 spectral data being orthogonalized relative to the correction matrix U_m , the spectra or columns of U_m are all mutually orthogonal. The production of the matrix U_m having mutually orthogonal spectra or columns can be achieved by first modeling the baseline variations by a set of orthogonal frequency (or wavelength) dependent polynomials, which are computer generated 15 simulations of the baseline variations and form the matrix U_p , and then at least one, and usually a plurality, of spectra of ex-sample chemical compounds (e.g., carbon dioxide and water vapor) which are actual spectra collected on the instrument, are supplied to form the matrix X_s . Next the columns of X_s are orthogonalized with respect to U_p to form a new matrix 20 X_s' . The preceding steps remove baseline effects from ex-sample chemical compound corrections. Then, the columns of X_s' are orthogonalized with respect to one another to form a new matrix U_s , and lastly U_p and U_s are combined to form the correction matrix U_m , whose columns are the columns 25 of U_p and U_s arranged side-by-side. It would be possible to change the order of the steps such that the columns of X_s are first orthogonalized to form a new matrix of vectors and then the (mutually orthogonal) polynomials forming the matrix U_p are orthogonalized relative to these vectors and then combined with them to form the correction matrix U_m . However, this changed order is less preferred because it defeats the advantage of 30 generating the polynomials as being orthogonal in the first place, and it will

also mix the baseline variations in with the spectral variations due to ex-sample chemical compounds and make them less useful as diagnostics of instrument performance.

- 5 Once the matrix X (dimension f x n) has been orthogonalized with respect to the correction matrix Um (dimension f x m), the resulting corrected spectral matrix Xc will still contain noise data. The noise can be removed in the following way. Firstly, a singular value decomposition is performed on matrix Xc in the form $Xc = U Vt$, where U is a matrix of dimension f x n and contains
- 10 the principal component spectra as columns, is a diagonal matrix of dimension n x n and contains the singular values, and V is a matrix of dimension n x n and contains the principal component scores, Vt being the transpose of V. In general, the principal components that correspond to noise in the spectral measurements in the original n samples will have
- 15 singular values which are small in magnitude relative to those due to the wanted spectral data, and can therefore be distinguished from the principal components due to real sample components. Accordingly, the next step in the method involves removing from U, and V the k+1 through n principal components that correspond to the noise, to form the new matrices U', ' and
- 20 V' of dimensions f x k, k x k and n x k, respectively. When these matrices are multiplied together, the resulting matrix, corresponding with the earlier corrected spectra matrix Xc, is free of spectral data due to noise.

For the selection of the number (k) of principal components to keep in the model, a variety of statistical tests suggested in the literature could be used but the following steps have been found to give the best results. Generally, the spectral noise level is known from experience with the instrument. From a visual inspection of the eigenspectra (the columns of matrix U resulting from the singular value decomposition), a trained spectroscopist can

25 generally recognize when the signal levels in the eigenspectra are

30

comparable with the noise level. By visual inspection of the eigenspectra, an approximate number of terms, k , to retain can be selected. Models can then be built with, for example, $k-2$, $k-1$, k , $k+1$, $k+2$ terms in them and the standard errors and PRESS (Predictive Residual Error Sum of Squares) values are inspected. The smallest number of terms needed to obtain the desired precision in the model or the number of terms that give the minimum PRESS value is then selected. The selection of the number of steps is made by the spectroscopist, and is not automated. A Predicted Residual Error Sum of Squares is calculated by applying a predictive model for the estimation of property and/or component values for a test set of samples which were not used in the calibration but for which the true value of the property or component concentration is known. The difference between the estimated and true values is squared, and summed for all the samples in the test set (the square root of the quotient of the sum of squares and the number of test samples is sometimes calculated to express the PRESS value on a per sample basis). A PRESS value can be calculated using a cross validation procedure in which one or more of the calibration samples are left out of the data matrix during the calibration, and then analyzed with the resultant model, and the procedure is repeated until each sample has been left out once.

The method further requires that c properties and/or composition data be collected for each of the n calibration samples to form a matrix Y of dimension $n \times c$ where $c \geq 1$. For each of the calibration samples, the corresponding column of X_c is represented by a weighted combination of the principal components (the columns of). These weights are called the "scores" and are denoted by s_i . A regression relation is then determined between the property (dependent variable) and a combination of the "scores" and other measurements (independent variables). The additional measurements that have been used in the present invention are the

viscosity product (product of viscosity and density, denoted by ν) and the temperature t . Once these regression coefficients have been determined, they are used as part of the online prediction process. In the prediction process, the measured spectra are corrected for background effects as 5 discussed above and the "scores" with the determined principal components calculated. The scores, the measured viscosity product and temperature, and the regression coefficients derived in the calibration process give a prediction of the property under consideration.

10 It has been found that the Mooney viscosity can be accurately predicted (within 1 unit) using the FTNIR spectral measurements along with the viscosity product and the temperature. This is a considerable improvement over prior art. The unsaturation content and halogen content can be accurately predicted by direct correlation with the FTNIR spectra.

15 Those versed in the art would recognize that the eigenspectra obtained by this invention through the singular value decomposition form a set of orthonormal basis functions for the range of wavelengths used: any member 20 of an orthonormal set of basis functions has a dot product of unity with itself and zero with any other member of the orthonormal set of basis functions. Other orthonormal basis functions could also be used in the derivation of the predictive model including Legendre polynomials and trigonometric functions (sines and cosines). The use of other orthonormal basis functions is intended to be within the scope of the present invention.

25 Figure 4 shows a comparison of results of prediction of Mooney viscosity from the FTNIR spectral measurements and the measurements of viscosity product and temperature. The abscissa is the measured Mooney viscosity of laboratory samples while the ordinate is the predicted Mooney viscosity

based on the regression relations. As can be seen the fit is very good with a standard error of prediction less than one unit.

Figure 5 is a similar plot comparing the predictions of unsaturation of 5 halobutyl rubber with known values of unsaturation based on spectral measurements only. The abscissa is the measured laboratory value of the halobutyl rubber unsaturation content while the ordinate is the predicted value of the halobutyl unsaturation from a regression of the spectral value.

10 The predictions made as in figures 4 and 5 are accurate enough to be able to provide feedback control of these properties, described below.

Process Control

15 The in-situ determination of Mooney viscosity made by the method described above can be used as input to a controller that manipulates the catalyst addition or coinitiator rate at 117b in figure 1. Unsaturation can be controlled by using the in-situ saturation measurement to a controller that manipulates the isoprene content of the feed 107 in figure 1. Comonomer 20 incorporation can be controlled by using the in-situ comonomer content as the input to a controller that manipulates the butyl reactor feed comonomer that in a preferred embodiment is isoprene 107. Molecular weight distribution can be controlled by using the in-situ molecular weight distribution as the input to a controller that manipulates the quench flow 25 125b and/or branching agent 109b flow to the butyl reactor. Butyl reactor halogen content can be controlled by using the ins-situ halogen content measurement as the input to a controller that manipulates the halogen flow to a butyl halogenation reactor (155 in figure 2).

The example given above is for illustrative purposes only. The invention can be used for a wide variety of processes and manufacturing plants. The processes for which the method can be used include, but are not limited to polymerization, steam cracking,
5 olefin purification, aromatic purification, isomerization, catalytic cracking, catalytic reforming, hydrogenation, oxidation, partial oxidation, dehydration, hydration, nitration, epoxidation, distillation, combustion, alkylation, neutralization, ammoniation, esterification, dimerization, membrane separation, carbonylation, ketonization,
10 hydroformulation, oligomerization, pyrolysis, sulfonation, crystallization, adsorption, extractive distillation, hydrodealkylation, dehydrogenation, aromatization, cyclization, thermal cracking, hydrodesulphurization, hydrodenitrogenation, peroxidation, deashing and halogenation. The properties that are controlled
15 could include Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, stream component composition, moisture in the product, and molecular weight distribution. Depending upon the process, the in situ measurement
20 made in addition to the spectral measurements could include, among others, temperature, viscosity, pressure, density, refractive index, pH value, conductance and dielectric constant.

These and other similar variations in the process, property being
25 controlled and measurements made for prediction of the property being controlled are intended to be within the scope of the claims.

What is claimed is:

1. A method for online control of a process that produces a product with a property P having a desired value D, whereby the spectra of a test sample taken at an intermediate step in said process is measured and used to control said product property P, comprising:
 - 5 obtaining a set of measured spectra having measurement errors for a set of calibration samples representative of at least one intermediate step in said process;
 - 10 correcting said measured spectra for said measurement errors to produce a set of corrected spectra for said set of calibration samples;
 - 15 determining a set of weights from the set of corrected calibration sample spectra relating said corrected spectrum of each of said calibration samples to a set of orthonormal basis functions;
 - 20 obtaining a value of said property P of the product that corresponds to each calibration sample of said set of calibration samples;
 - 25 determining a predictive model relating said value for said property P of said product to said set of weights;
 - measuring a spectrum for a test sample at said at least one intermediate step in said process;
 - obtaining a corrected spectrum for said test sample at said at least one intermediate step in said process;
 - 25 determining an estimated value E for said property P of the predicted product corresponding to said test sample from said predictive model and said corrected spectrum of said test sample; and

AMENDED SHEET

16a

controlling said process using a calculated difference between said estimated value E of said predicted product and said desired value D.

5 2. The method of claim 1 wherein said product comprises a polymer.

AMENDED SHEET

96B092/2

3. The method of claim 1 wherein said measured spectra are selected from the group consisting of: Raman spectra, NMR spectra, and infrared spectra.
- 5 4. The method of claim 1 wherein said measured spectra comprise absorbance spectra in the near infrared region.
5. The method of claim 4 wherein said predictive model is determined by a linear least squares regression.
- 10 6. The method of claim 3 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammination; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; extractive distillation; hydrodealkylation; 20 dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation
- 25 7. The method of claim 4 wherein said process comprises a procedure chosen from the group consisting of : polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammination; esterification; 30 dimerization; membrane separation; carbonylation; ketonization;

hydroformulation; oligomerization; pyrolysis; sulfonation;
crystallization; adsorption; extractive distillation; hydrodealkylation;
dehydrogenation; aromatization; cyclization; thermal cracking;
hydrodesulphurization; hydrodenitrogenation; peroxidation, deashing
5 and halogenation

8. The method of claim 6 wherein said set of orthonormal basis functions characterizing said corrected spectra for said calibration samples comprise eigenspectra determined by a Singular Value
10 Decomposition.
9. The method of claim 7 wherein said set of orthonormal basis functions characterizing said corrected spectra for said calibration samples are eigenspectra determined by a Singular Value
15 Decomposition.
10. The method of claim 8 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution.
11. The method of claim 9 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution.
20

AMENDED SHEET

96B092/2

12. The method of claim 9 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.
- 5 13. The method of claim 11 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.
- 10 14. The method of claim 10 wherein said measurement of said spectrum for said test sample is performed at least once every two minutes.
- 15 15. The method of claim 11 wherein the measurement of said spectrum for said test sample is performed at least once every two minutes.
16. A method for online control as claimed in claim 1, further including:
 - 20 obtaining a value of at least one additional property for each calibration sample of said set of calibration samples; and
 - measuring said at least one additional property for said test sample at said at least one intermediate step in said process;
- 25 wherein, said predictive model is determined relating said value for said property P of said product to said set of weights and said value of said at least one additional property of said calibration samples; and
- 30 said estimated value E for said property P of the predicted product corresponding to said test sample is determined

from said predictive model, said corrected spectrum and said value of said at least one additional property of said test sample.

- 5 17. The method of claim 16 wherein said at least one additional property is selected from the group of: temperature, viscosity, pressure, density, refractive index, pH value, conductance and dielectric constant.
- 10 18. The method of claim 17 wherein said product comprises a polymer.
- 15 19. The method of claim 17 wherein said spectra are selected from the group consisting of: Raman spectra, NMR spectra, and infrared spectra.
20. The method of claim 17 wherein said measured spectra comprise absorbance spectra in the near infrared region.

21. The method of claim 20 wherein said predictive model is determined by a linear least squares regression.
22. The method of claim 19 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammination; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation.
23. The method of claim 20 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammination; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation

24. The method of claim 20 wherein said set of orthonormal basis functions characterizing said corrected absorbance spectra for said calibration samples comprise eigenspectra determined by a Singular Value Decomposition.
- 5 25. The method of claim 21 wherein said set of orthonormal basis functions characterizing said corrected absorbance spectra for said calibration samples comprise eigenspectra determined by a Singular Value Decomposition.
- 10 26. The method of claim 22 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and 15 molecular weight distribution.
27. The method of claim 23 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and 20 molecular weight distribution.
28. The method of claim 23 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.

SUBSTITUTE SHEET (RULE 28)

29. The method of claim 25 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.

5 30. The method of claim 24 wherein said measurement of said spectrum for said test sample is performed at least once every two minutes.

31. The method of claim 25 wherein said measurement of said spectrum for said test sample is performed at least once every two minutes.

10

32. A process plant to produce a product with a property P having a desired value D, the process plant comprising:

15 a first device for measuring a spectrum contaminated by measurement errors corresponding to at least one intermediate step in the process, to give a set of measured spectra for a set of calibration samples and for a test sample;

20 a second device for measuring said value of said property P of the product corresponding to each of said calibration samples; and

25 a computer adapted to:

30 correcting said measured spectra of said calibration samples and said test sample for measurement errors to give sets of corrected spectra; deriving a predictive model relating said corrected spectra for said calibration samples to said measured value of said property P of said product corresponding to each of said calibration samples; predicting an expected value E for said property P of the predicted product corresponding to said test sample from said predictive model and said corrected spectra for said test sample; and

AMENDED SHEET

96B092/2

controlling said process plant using a calculated difference between said value E of the predicted product and said desired value D.

5 33. The process plant of claim 32 wherein said product comprises a polymer.

10 34. The process plant of claim 32 wherein said measured spectra are selected from the group consisting of: Raman spectra, NMR spectra, and infrared spectra.

35. The process plant of claim 32 wherein said measured spectra comprise absorbance spectra in the near infrared region.

15 36. The process plant of claim 35 wherein said predictive model is determined by a linear least squares regression.

20 37. The process plant of claim 34 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammination; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; 25 extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation.

30 38. The process plant of claim 35 wherein said process comprises a procedure chosen from the group consisting of: polymerization;

steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; 5 neutralization; ammination; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; 10 hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation.

39. The process plant of claim 37 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer 15 unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution.
40. The process plant of claim 38 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer 20 unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution.
41. The process plant of claim 39 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.
- 30 42. The process plant of claim 40 wherein said measurement of near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.

AMENDED SHEET

96B092/2

43. A process plant as claimed in claim 42 further including:

a third device for obtaining a value of at least one additional property of said calibration samples and of said test sample;

5 wherein, said predictive model is derived relating said corrected spectra and said value of said at least one additional property for said calibration samples to said measured value of said property P of said product corresponding to each of said calibration samples; and
10 said expected value E for said property P of the predicted product corresponding to said test sample is predicted from said predictive model, said corrected spectra and said value of said at least one additional property for said test sample.

15

20

25

44. The process plant of claim 43 wherein said at least one additional property is selected from the group of: temperature, viscosity, pressure, density, refractive index, pH value, conductance and dielectric constant.

5

45. The process plant of claim 43 wherein said product comprises a polymer.

10

46. The process plant of claim 43 wherein said spectra are selected from the group consisting of: Raman spectra, NMR spectra, and infrared spectra.

15

47. The process plant of claim 43 wherein said measured spectra comprise absorbance spectra in the near infrared region.

48. The process plant of claim 45 wherein said predictive model is determined by a linear least squares regression.

20

49. The process plant of claim 44 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammoniation; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; 25

30

deashing and halogenation.

50. The process plant of claim 46 wherein said process comprises a procedure chosen from the group consisting of: polymerization; steam cracking; olefin purification; aromatic purification; isomerization; catalytic cracking; catalytic reforming; 5 hydrogenation; oxidation; partial oxidation; dehydration; hydration; nitration; epoxidation; distillation; combustion; alkylation; neutralization; ammoniation; esterification; dimerization; membrane separation; carbonylation; ketonization; hydroformulation; oligomerization; pyrolysis; sulfonation; crystallization; adsorption; 10 extractive distillation; hydrodealkylation; dehydrogenation; aromatization; cyclization; thermal cracking; hydrodesulphurization; hydrodenitrogenation; peroxidation; deashing and halogenation.


15 51. The process plant of claim 47 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution. 20

52. The process plant of claim 48 wherein said property P is selected from the group consisting of: Mooney viscosity, polymer unsaturation, comonomer incorporation, halogen content, polymer concentration, monomer concentration, molecular weight, melt index, polymer density, stream component composition, moisture in the product, and molecular weight distribution. 25

30 53. The process plant of claim 51 wherein said measured near infrared spectra are made by a Fourier Transform Near Infrared (FTNIR) spectrometer.


54. The process plant of claim 50 wherein said infrared spectra are measured by a Fourier Transform Near Infrared (FTNIR) spectrometer.

FIG. 1




2/5

FIG.2

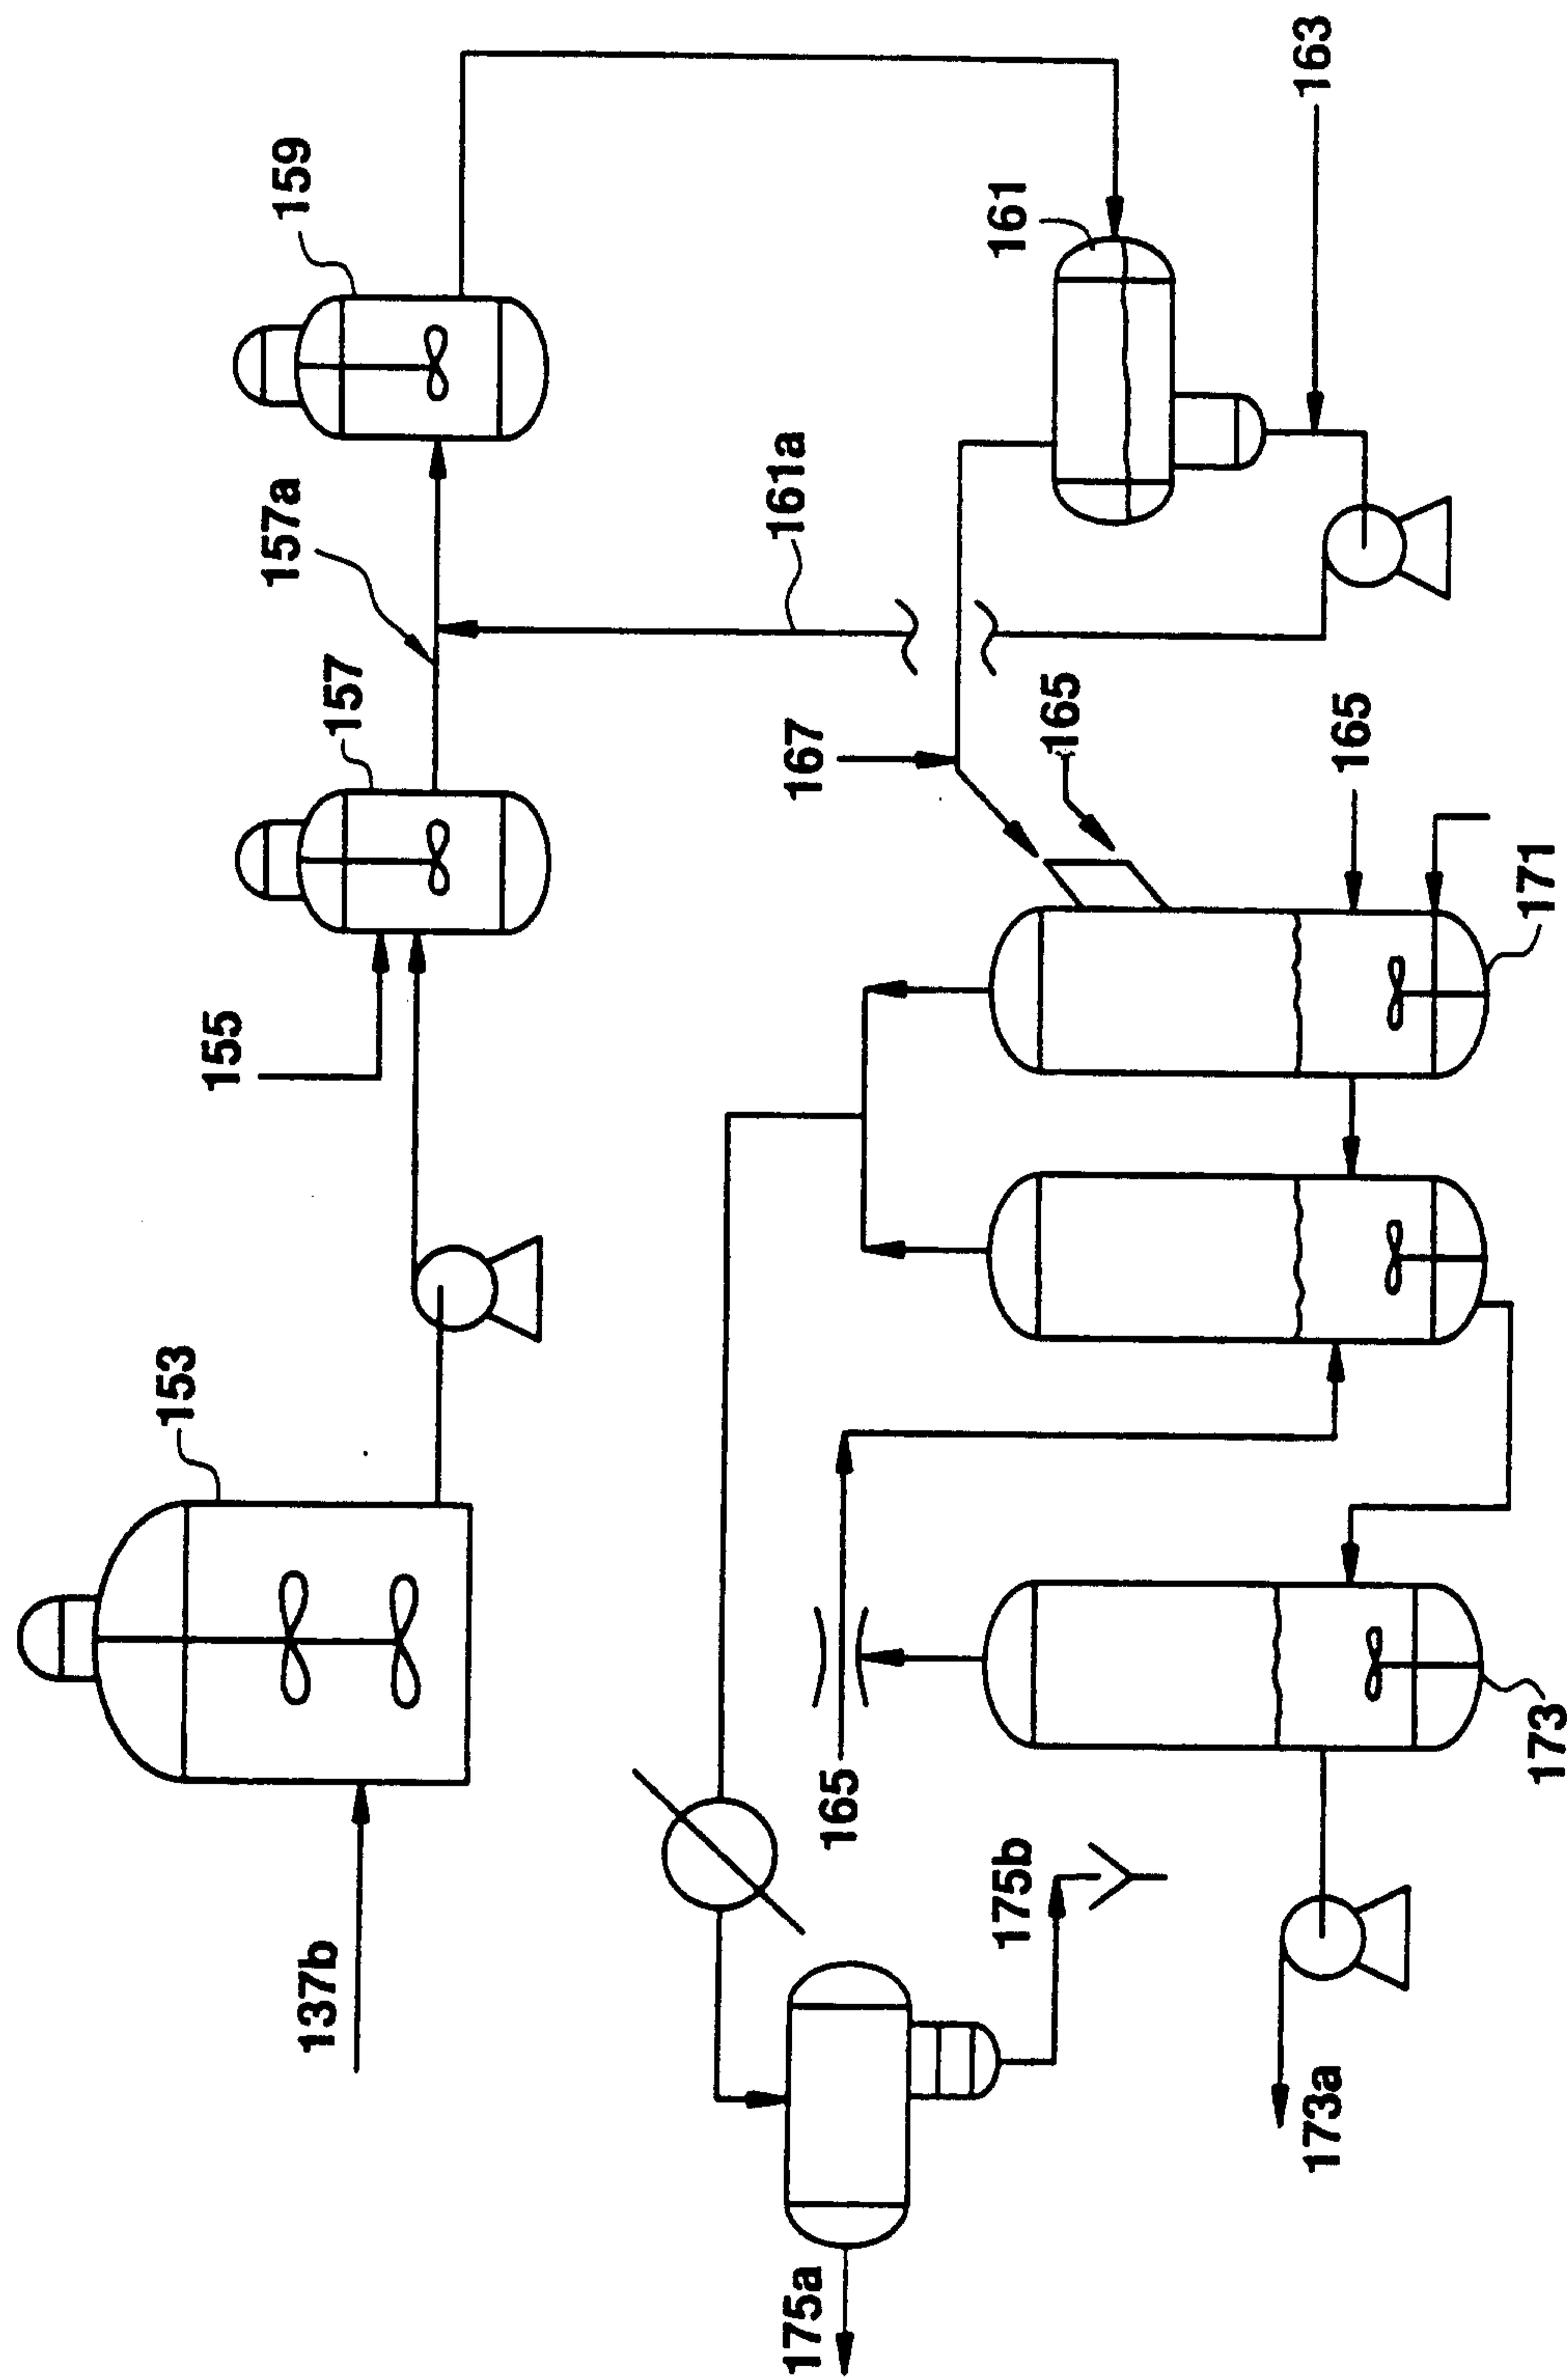


315

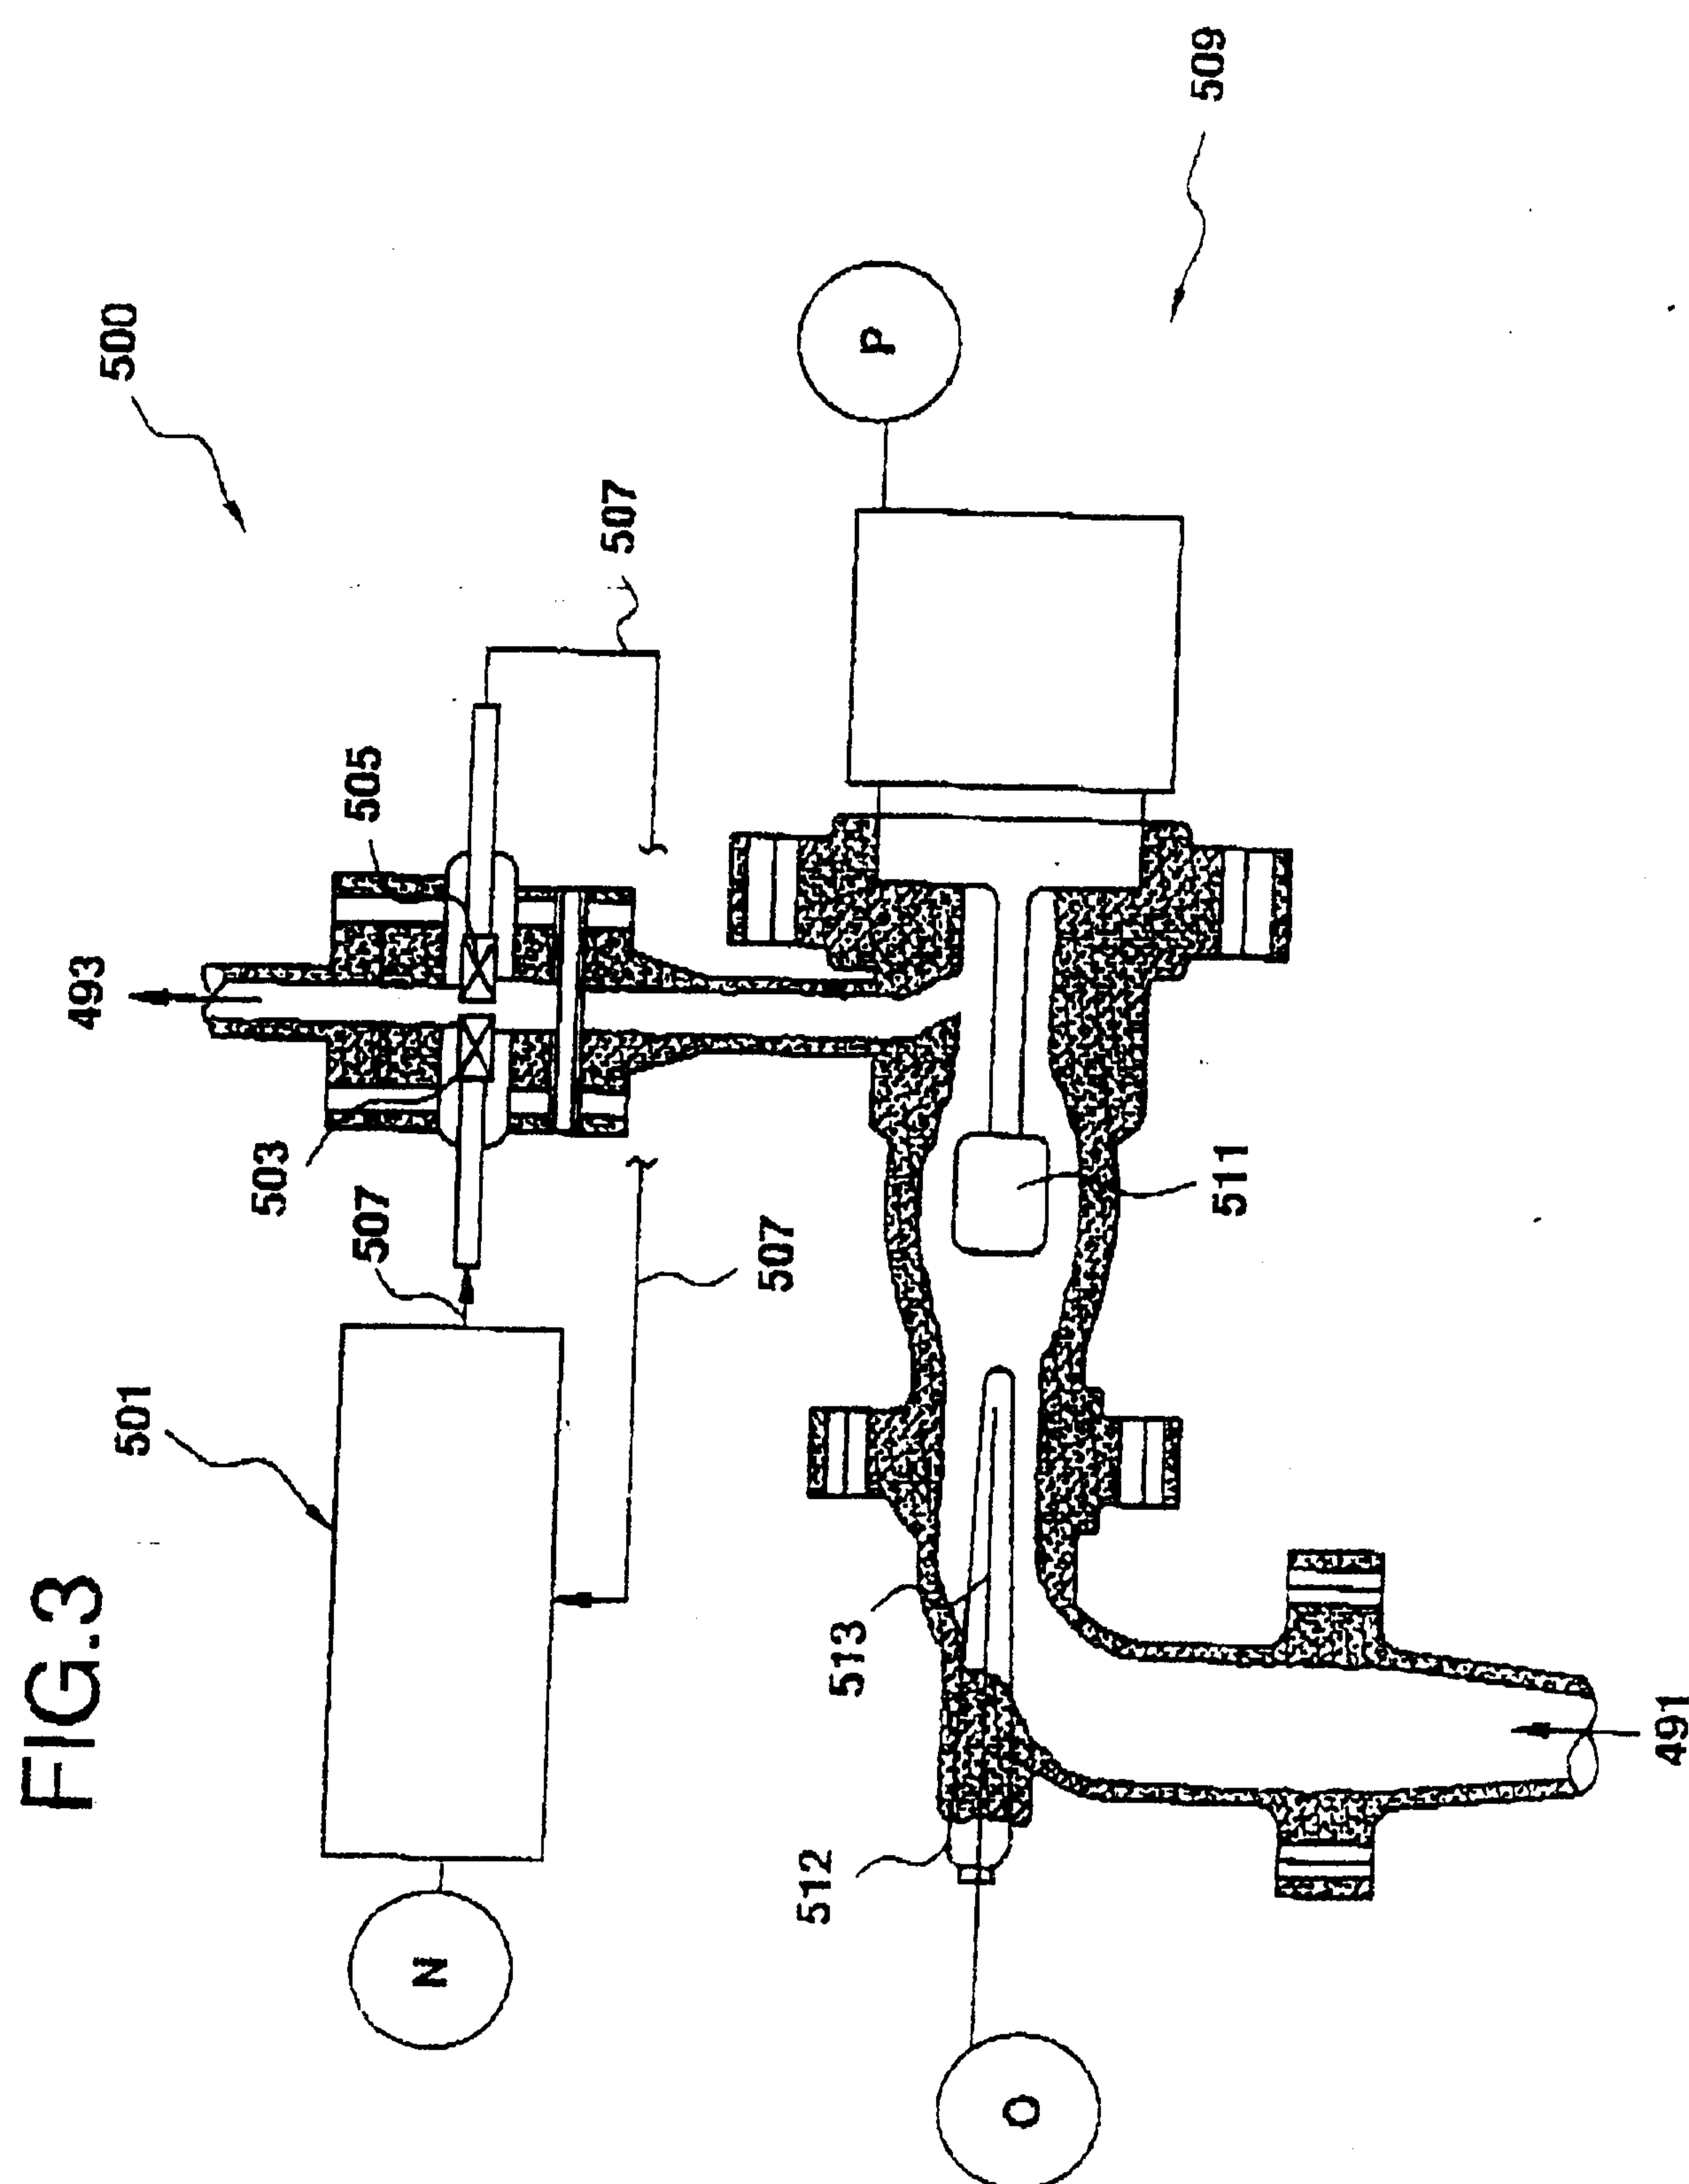

97/23734
F005 17 FEB 1998

4/5

FIG.4

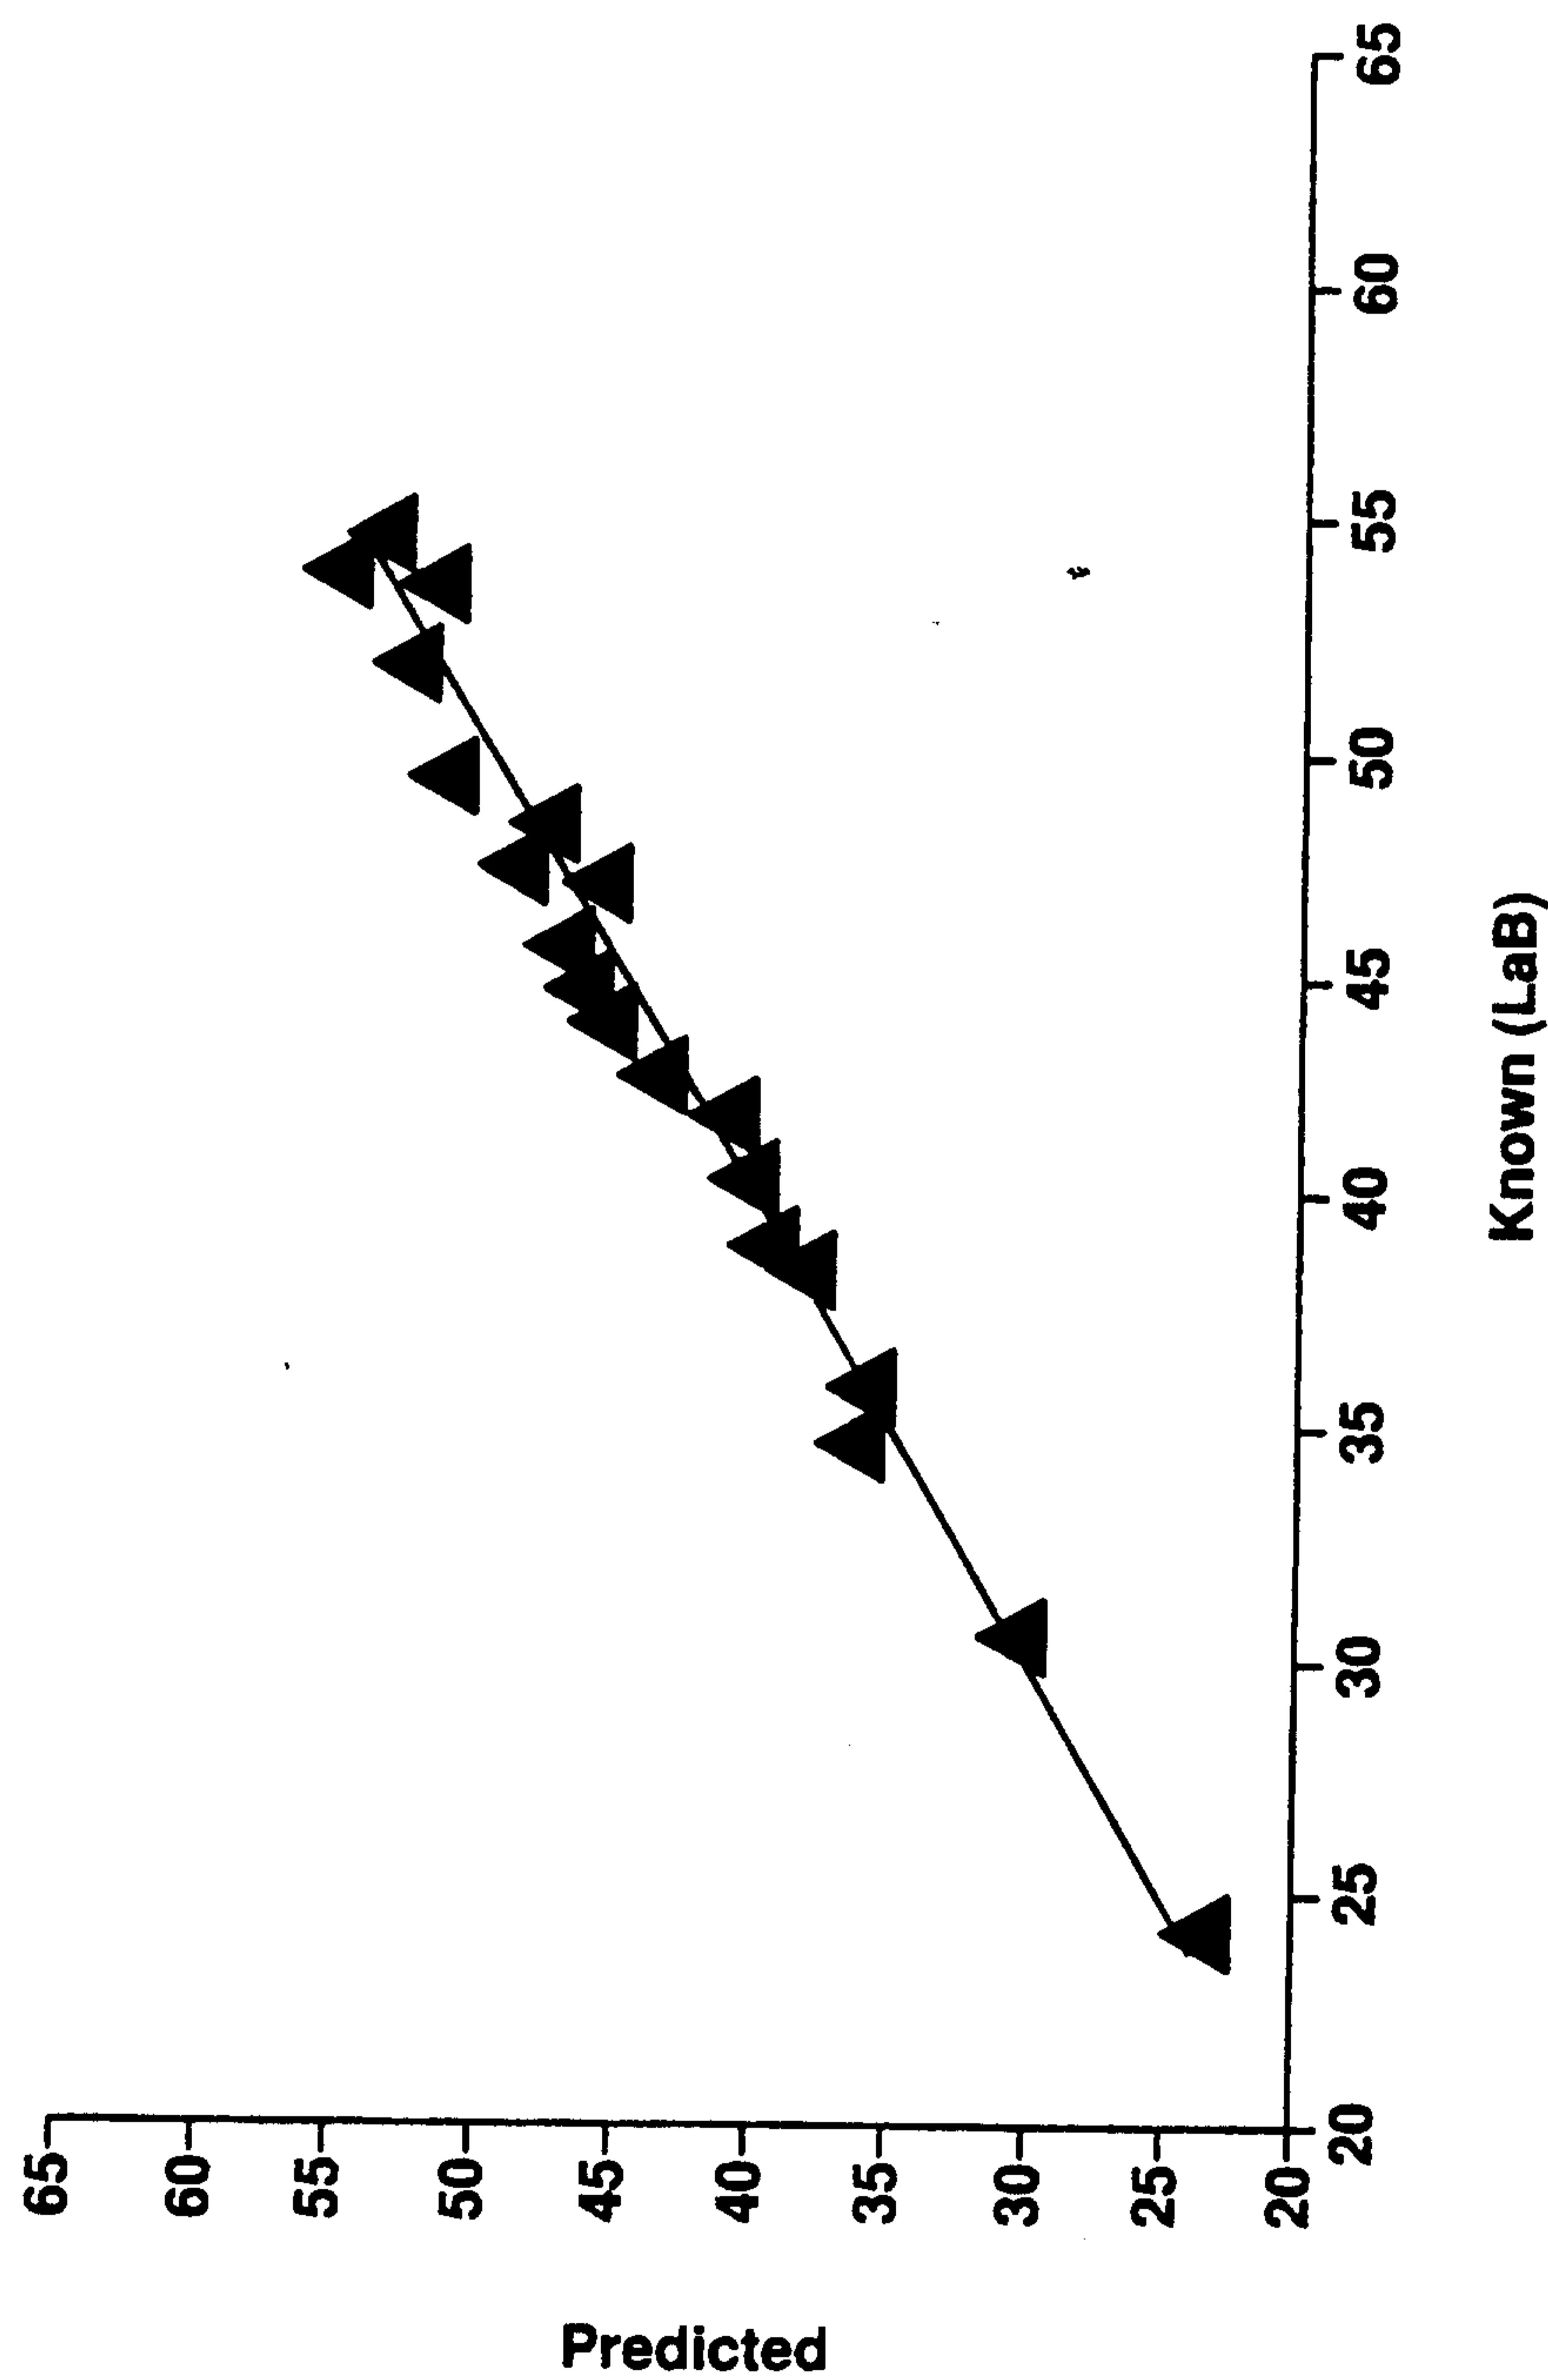

CONFIDENTIAL SOURCE 20

97/23734
17 FEB 1998

5/5

FIG. 5

