



(72) SMITH, KEVIN W., US


(71) BOSTON SCIENTIFIC CORPORATION, US

(51) Int.Cl.⁷ A61B 18/18

(30) 1999/08/06 (09/369,724) US

(54) INSTRUMENT DE POLYPECTOMIE A ANSE DIATHERMIQUE

(54) POLYPECTOMY SNARE INSTRUMENT

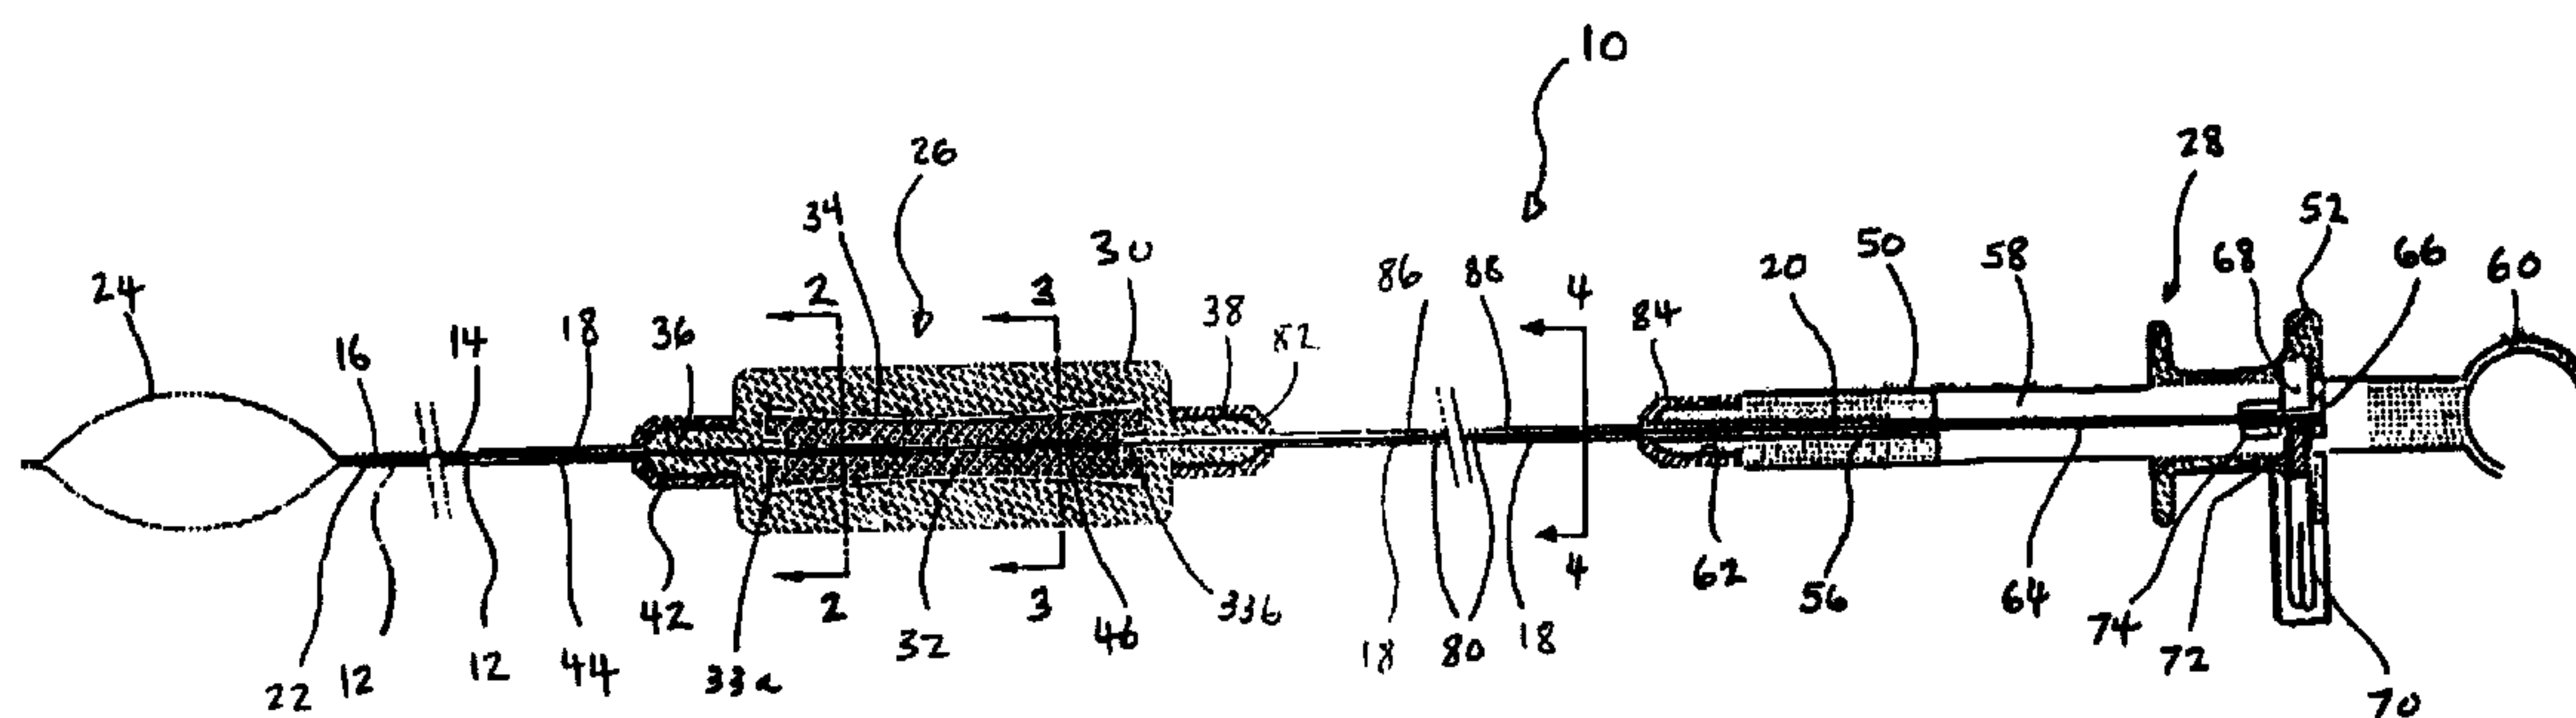

(57) A surgical snare instrument includes a first handle (26) capable of controlling the rotational position of the snare (24), and a second handle (28) adapted to control the opening and closing of the snare (24) and cauterization. The first handle (26) serves as a grippable element on the sheath (12) and contains a system which rotates the shaft (18), and consequently the snare (24), so that when the physician grips the first handle (26), the physician is capable of steering the snare (24) by operating the first handle (26). In addition, the physician is also capable of positioning the entire sheath (12) relative to the endoscope by sliding the sheath (12) into and out of the working channel of the endoscope.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/10321 A1

- (51) International Patent Classification⁷: **A61B 18/18** (72) Inventor: SMITH, Kevin, W.; 570 Arvida Parkway, Coral Gables, FL (US).
- (21) International Application Number: PCT/US00/21411 (74) Agents: LYNCH, John, E. et al.; Fulbright & Jaworski, LLP, Washington, DC 20004-2615 (US).
- (22) International Filing Date: 7 August 2000 (07.08.2000) (81) Designated States (*national*): CA, JP.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data:
09/369,724 6 August 1999 (06.08.1999) US
Published:
— With international search report.
- (71) Applicant: BOSTON SCIENTIFIC CORPORATION
[US/US]; One Boston Scientific Place, Natick, MA 01760-1537 (US).
For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POLYPECTOMY SNARE INSTRUMENT

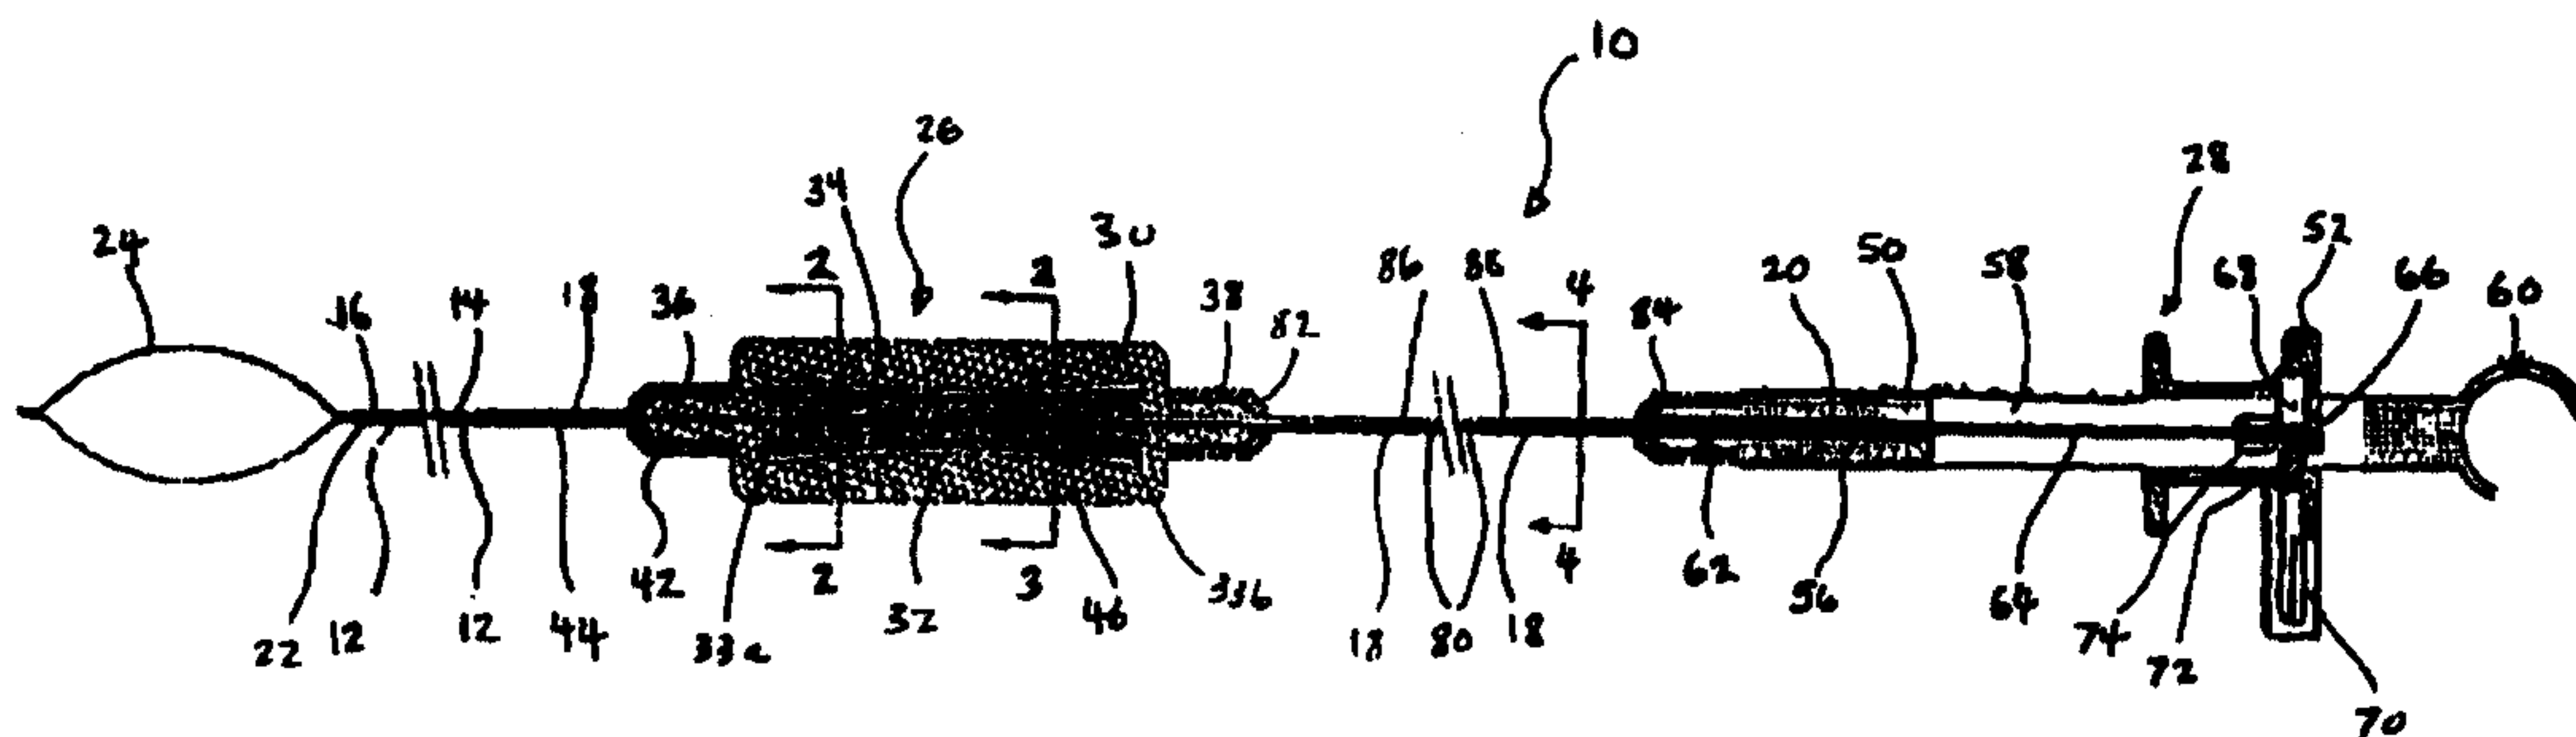

(57) Abstract: A surgical snare instrument includes a first handle (26) capable of controlling the rotational position of the snare (24), and a second handle (28) adapted to control the opening and closing of the snare (24) and cauterization. The first handle (26) serves as a grippable element on the sheath (12) and contains a system which rotates the shaft (18), and consequently the snare (24), so that when the physician grips the first handle (26), the physician is capable of steering the snare (24) by operating the first handle (26). In addition, the physician is also capable of positioning the entire sheath (12) relative to the endoscope by sliding the sheath (12) into and out of the working channel of the endoscope.

WO 01/10321 A1

WO 01/10321

PCT/US00/21411

1 POLYPECTOMY SNARE INSTRUMENT

2
3 BACKGROUND OF THE INVENTION

4
5 1. Field of the Invention

6 This invention relates broadly to surgical instruments. More
7 particularly, this invention relates to a surgical snare
8 instrument for excising polyps.
9

10 2. State of the Art

11 Polypectomy snare instruments are used for the endoscopic
12 removal of hypertrophic tissue growths within a body cavity, and
13 particularly within the colon. Polypectomy snare instruments
14 generally include an elongate tubular member, such as a catheter
15 sheath, a shaft extending through the tubular member, an elastic
16 wire forming a snare (loop) at the distal end of the shaft, and a
17 handle for moving the shaft distally and proximally within the
18 tubular member. The snare can be opened by moving the snare
19 beyond the distal end of the sheath and closed by retraction of
20 the snare into the tubular member, each effected by movement of
21 the shaft relative to the sheath.
22

23 In operation, a physician introduces the distal end of the
24 instrument, with the snare of the snare instrument in a retracted
25 position, through the working channel of an endoscope until the

WO 01/10321

PCT/US00/21411

1 sheath begins to extend out of the distal end of the endoscope.
2 The physician then directs an assistant, who has control of the
3 handle of the snare instrument, to open the snare. The assistant
4 accomplishes this function by moving two portions of the handle
5 relative to each other. The physician then advances and retracts
6 the sheath into and out of the endoscope, while applying torque to
7 some portion of the instrument to position the snare loop over and
8 around a polyp. Once the snare loop is positioned around the
9 polyp, the physician orders the assistant to close the snare
10 around the polyp. Then, the physician or assistant energizes a
11 source of electrocautery current coupled to the shaft to
12 desiccate, sever, and cauterize the polyp. Finally, the polyp is
13 removed by withdrawing the snare (or, in some cases, the polyp is
14 retrieved by use of another instrument such as a biopsy forceps).
15 In a variation of the procedure, the physician uses suction
16 applied to a channel of the endoscope to remove the polyp or to
17 hold it to the end of the endoscope.

18

19 Prior art snare instruments have several problems. First, it
20 is difficult for the physician to precisely position the snare
21 because the physician relies on gripping the small, slippery
22 sheath over the shaft near where the sheath enters the endoscope
23 handle. Typically, it is necessary for the physician to
24 repeatedly push, pull, and torque the sheath and the shaft of the
25 instrument in order to achieve the desired position with the snare

WO 01/10321

PCT/US00/21411

1 around the polyp. Second, the prior art instruments are not
2 capable of efficient steering, because the shaft which is
3 generally used is a cable having low torsional stiffness, and is
4 not usually free of camber or "set". The result of these defects
5 is that when the instrument is used in a tightly-flexed endoscope,
6 the distal end of the snare does not respond directly to torsional
7 input on the shaft where it enters the endoscope handle; i.e.,
8 rather than directly respond to torsional input from the
9 physician, the shaft stores the torsional force and upon reaching
10 a threshold, uncontrollable rotationally whips to release the
11 force. Third, while several attempts have been made at providing
12 a snare instrument with a handle adapted to more adeptly steer the
13 snare, most of such prior art instruments do not specifically
14 allow for rotating the snare to position it relative to the polyp.
15 Rather, the physician must rotate the shaft of the instrument by
16 tightly gripping and rotating the sheath where it enters the
17 endoscope to try to maneuver the snare over the polyp. In
18 addition, in the several prior art devices specifically adapted
19 for rotational control, e.g., U.S. Patent No. 5,066,295 to Kozak
20 et al. and U.S. Patent Nos. 3,955,587, 4,256,113, and 4,294,254 to
21 Chamness et al., the rotational control function is placed in the
22 handle at the proximal end of the instrument. This handle then
23 controls the extension and retraction of the snare loop as well as
24 the rotation of the snare loop. However, this handle is typically
25 held by the assistant, so the physician must orally direct the

1 assistant to coordinate the handle controls while the physician
2 moves the jacket in and out of the endoscope. As a result, these
3 instruments have not been widely accepted by physicians.

4

5

SUMMARY OF THE INVENTION

6

7 It is therefore an object of the invention to provide a snare
8 instrument which permits the physician to control all aspects of
9 positioning the snare loop relative to the polyp, while allowing
10 the assistant to perform the cauterizing and severing of the
11 polyp.

12

13 It is a further object of the invention to provide a snare
14 instrument which provides to the physician the means for advancing
15 and retracting the distal end of the snare instrument through the
16 endoscope, as well as rotating the snare, and which provides to
17 the assistant the means for extending and retracting the snare
18 loop from the sheath of the snare instrument.

19

20 It is another object of the invention to provide a snare
21 instrument in which the physician has direct and immediate control
22 of the entire instrument.

23

WO 01/10321

PCT/US00/21411

1 It is also an object of the invention to provide a snare
2 instrument which obviates the need for an assistant during a
3 polypectomy procedure.
4

5 It is yet another object of the invention to provide a snare
6 instrument which improves the speed and efficiency of a
7 polypectomy procedure.
8

9 In accord with these objects, which will be discussed in
10 detail below, a surgical snare instrument is provided. The snare
11 instrument includes an elongate flexible tubular sheath, a
12 flexible shaft extending through and axially movable relative to
13 the sheath, a snare coupled to or formed at the distal end of the
14 shaft, and a system to move the shaft, and consequently the snare,
15 relative to the sheath. According to several embodiments of the
16 invention, the system for moving the shaft relative to the sheath
17 includes a first (physician's) handle capable of controlling the
18 position of the snare, and a second (assistant's) handle proximal
19 the first handle and adapted to control contraction of the snare
20 and cauterization. The handles are coupled by a tubular sheath
21 extension.
22

23 The physician's handle is preferably positioned along the
24 sheath of the snare instrument so that it is a few inches proximal
25 to the entry port of the endoscope handle when the distal end of

1 the sheath is adjacent to the distal end of an endoscope. The
2 physician's handle serves as a grippable element on the sheath and
3 contains a rotating means for rotating the shaft, so that when the
4 physician grips that handle the physician is capable of steering
5 (rotating) the snare by operating the rotating means. In
6 addition, the physician is also capable of positioning the entire
7 sheath relative to the endoscope by sliding the sheath into and
8 out of the working channel of the endoscope. The proximal handle
9 is operable by an assistant and permits longitudinal movement of
10 the shaft and snare and the application of a cautery current to
11 the shaft and snare.

12
13 According to other embodiments, the snare instrument is
14 provided with a connector which enables the snare instrument to be
15 fixed relative to an endoscope handle. Additionally, an
16 embodiment is also provided in which a single handle provides a
17 physician with means for advancing and retracting the sheath of
18 the snare instrument relative to the distal end of the endoscope,
19 means for advancing (opening) and retracting (closing) the snare
20 relative to the distal end of the sheath, and means for steering
21 (rotating) the snare to position the snare over a polyp. Since
22 the physician has direct and immediate control of the entire
23 instrument, the snare instrument obviates the need for an
24 assistant during the procedure, and improves the speed and
25 efficiency of the polypectomy procedure.

1 Additional objects and advantages of the invention will
2 become apparent to those skilled in the art upon reference to the
3 detailed description taken in conjunction with the provided
4 figures.

5
6 BRIEF DESCRIPTION OF THE DRAWINGS

7
8 Fig. 1 is broken side elevation in section of a first
9 embodiment of a snare instrument according to the invention;

10
11 Fig. 2 is an enlarged cross-section taken through line 2-2 in
12 Fig. 1;

13
14 Fig. 3 is an enlarged cross-section taken through line 3-3 in
15 Fig. 1;

16
17 Fig. 4 is an enlarged cross-section taken through line 4-4 in
18 Fig. 1;

19
20 Fig. 5 is a broken section view of a physician's handle
21 assembly according to a second embodiment of the snare instrument
22 of the invention;

23
24 Fig. 6 is an enlarged cross-section through line 6-6 in
25 Fig. 5, showing the engagement of a key in a knob shaft;

WO 01/10321

PCT/US00/21411

1 Fig. 7 is an enlarged cross-section through line 7-7 in
2 Fig. 5, at a location proximal of the key;

3
4 Fig. 8 is a broken section view of a third embodiment of the
5 snare instrument according to the invention;

6
7 Fig. 9 is an enlargement of the area between lines 9a-9a and
8 9b-9b in Fig. 8;

9
10 Fig. 10 is a broken section view of a fourth embodiment of
11 the snare instrument of the invention; and

12
13 Fig. 11 is a broken section view of a fifth embodiment of the
14 snare instrument of the invention.

15
16 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

17
18 Turning now to Fig. 1, a first embodiment of a surgical snare
19 instrument 10 according to the invention is shown. The snare
20 instrument 10 includes an elongate flexible tubular sheath 12
21 having a proximal end 14 and a distal end 16, a flexible shaft 18
22 having a proximal end 20 and a distal end 22 extending through and
23 axially movable relative to the sheath 12, a snare 24 coupled to
24 or formed at the distal end 22 of the shaft 18, preferably
25 adjacent the distal end 16 of the sheath 12, and first and second

1 handle assemblies 26, 28, respectively, for moving the shaft 18
2 relative to the sheath 12.

3

4 The shaft 18 is preferably a high strength, straightened
5 (camber-free) stainless steel wire of high elastic limit. The
6 shaft 18 is adapted to be bent through a tortuous path without
7 permanent deformation. In addition, since the shaft 18 is free of
8 camber, it is possible to precisely rotate the snare 24 by
9 rotating the shaft at any point along its length.

10

11 Referring now to Figs. 1 through 3, the physician's handle
12 assembly 26, which is the more distal of the two handles,
13 generally includes a body 30 and a knob 32 mounted in the body 30
14 on bearings 33a, 33b in a manner which permits the knob 32 to
15 rotate coaxially relative to the body. The body 30 includes a
16 central bore 34 with one or more apertures 35, a threaded distal
17 end 36, and a threaded proximal end 38. The sheath 12 of the
18 snare instrument 10 is connected to the threaded distal end 36 of
19 the body 32, e.g., by means of a flare-nut connection 42.
20 Preferably, a stiffening sleeve 44 is provided over the sheath 12
21 at the connection 42. The knob 32 includes a non-circular bore
22 40, e.g., having the cross-sectional shape of a square. The knob
23 32 (for reasons discussed below) is preferably at least as long as
24 the distance of movement required to open and close the snare 24;
25 i.e., the length of the snare when compressed in the sheath 12.

WO 01/10321

PCT/US00/21411

1 The apertures 35 provide access to the knob 32, so that the knob
2 32 can be rotated relative to the body 30, e.g., by a physician.

3

4 A portion of the shaft 18 extending through the bore 40 of
5 the knob 32 is provided with a key 46; that is, a spline element
6 fixed on and about the shaft 18 or, alternatively, rigidly and
7 fixedly interposed between two portions of the shaft. The key 46
8 preferably has a rectangular shape but may have another non-
9 circular shape. The key 46 is slidably axially movable within the
10 bore 40. Therefore, the shaft 12 may be moved axially through the
11 bore 40 (and that is why the length of the knob 32 is preferably
12 at least as long as the distance of movement required to open and
13 close the snare). However, when the knob 32 is rotated relative
14 to the body 30, the key 46 within the bore 40 is rotated and,
15 consequently, the shaft 18 and snare 24 are rotated relative to
16 the sheath 12.

17

18 The distal handle assembly 28 is preferably positioned
19 approximately 210 cm from the distal end 16 of the sheath 12 for a
20 snare instrument 10 designed to be inserted into a 200 cm
21 endoscope. Thus, the physician can grip the body 30 in a manner
22 which permits rotating the knob 32 relative to the body, and hence
23 the snare 24 relative to the sheath 12, while using the body 30 as
24 a grip to axially position the snare instrument 10 within the
25 working channel of an endoscope.

WO 01/10321

PCT/US00/21411

1 The shaft 18 extends out of the proximal end 38 of the body
2 30 to the proximal handle assembly 28, or assistant handle. The
3 proximal handle assembly 28 preferably includes a stationary
4 member 50 and a spool member 52 slidable relative to the
5 stationary member. The stationary member 50 includes a
6 longitudinal throughbore 56 through which the proximal end 20 of
7 the shaft 18 extends, a transverse slot 58, a proximal thumb ring
8 60, and a distal threaded connector 62. The proximal end of the
9 shaft 18 is preferably provided with a conductive stiffening
10 sleeve 64, and a cylindrical conductive bearing 66 is coupled
11 about the proximal end of the stiffening sleeve 64. The spool
12 member 62 includes a cross bar 68 which extends through the
13 transverse slot 58 to secure the spool member 52 on the stationary
14 member 50. In addition, the spool member 62 preferably includes a
15 cautery plug 70. The conductive bearing 66 extends through the
16 cross bar 68 and a collar 74 secures the bearing 66 in the cross
17 bar 68 in a manner which permits the conductive bearing to freely
18 rotate within the cross bar 68. A spring 72 extends between the
19 cautery plug 70 and the conductive bearing 66, and provides a
20 contact between the plug 70 and the bearing 66 regardless of the
21 rotational position of the bearing 66. Movement of the spool
22 member 52 relative to the stationary member 50 causes the snare 24.
23 to extend from and retract into the distal end 16 of the sheath
24 12.

25

1 Referring to Figs. 1 and 4, an electrically insulative
2 extension sheath 80 extends over the shaft 18 between the proximal
3 end 38 of the body 30 and the distal end 62 of the stationary
4 member 50, coupled, e.g., via flare-nut connections 82, 84. Thus,
5 there is a continuous outer connection joining, yet spacing apart,
6 the distal handle assembly 26 and the proximal handle assembly 28.
7 A stiffening sleeve 86 is preferably provided over the extension
8 sheath 80 at the proximal end 38 of the body 30, and another
9 stiffening sleeve 88 is preferably provided over the extension
10 sheath 80 at the distal end 62 of the stationary member 50.

11

12 In use, the physician introduces the snare instrument 10 into
13 the endoscope (not shown), typically by means of a port in the
14 endoscope handle which communicates with the working channel of
15 the endoscope. Then, the physician gives the proximal assistant's
16 handle 28 to the assistant. The physician then grips the body 30
17 of the distal physician's handle 26 of the snare instrument and
18 uses it to position the distal end 16 of the sheath 12 adjacent to
19 the polyp to be excised. The physician then instructs the
20 assistant to extend the snare, which is performed by moving the
21 spool member 52 relative to the stationary member 50. The
22 physician then uses the distal handle 26 to simultaneously axially
23 position and rotate the snare over the polyp. Then, the physician
24 instructs the assistant to close the snare and sever the polyp,
25 using cautery if desired. In this manner, the physician controls

1 the means of positioning the snare onto the polyp, and the
2 assistant controls the opening and closing of the snare and the
3 cauterization.

4
5 In the first embodiment, as discussed above, it will be
6 appreciated that the knob 32 is preferably at least as long as the
7 distance of movement needed to open and close the snare 24.
8 However, turning now to Figs. 5-7, according to a second
9 embodiment of a snare instrument 110, the key 146 on the shaft 118
10 is made sufficiently small in diameter such that it can pass
11 partly into the bearings 190, 191 on the body 130 (which support
12 the knob 132) and proximal and distal ends 136, 138 of the body
13 130, or even into the sheath 112 and extension sheath 180, and
14 their respective stiffening sleeves. Accordingly, the knob 132 is
15 provided with a hollow knob shaft 192 having a non-circular bore
16 140 which rotatably engages the key 146 on the instrument shaft
17 118. The knob shaft 192 extends beyond the proximal and distal
18 ends of the knob 132. The knob shaft 192 extends into bearings
19 190, 191 of the body 130 which allows the knob 132 and knob shaft
20 192 to spin within the body 130. The knob shaft 192 may
21 optionally extend through the proximal and distal ends 136, 138 of
22 the body 130, into the sheath (on the distal end) and into the
23 extension sheath (on the proximal end). In this manner, it is
24 possible to achieve a large range of axial motion (e.g., 3.5
25 inches) while having a knob 132 of much shorter dimension (e.g.,

1 1.25 inches). It should be noted that if the key 146 has a
2 substantial length (e.g., 0.75 inch), the body 130 and knob 132
3 can be made even shorter, since it is necessary for only a portion
4 of the key 146 to be engaged with the non-circular bore 140 of the
5 knob shaft 192 at any time.

6

7 In addition, while the first embodiment describes a shaft 18
8 that is monolithic and continuous from the snare 24 to the
9 proximal handle assembly 28, the shaft may alternatively be a
10 composite structure. Specifically, referring to Figs. 8 and 9,
11 according to a third embodiment of the invention, the
12 straightened, torsionally-stiff, camber-free section of the shaft
13 218 need only extend from the snare to the knob 232. A swivel
14 joint 290 may be interposed on the shaft 218 between the knob 232
15 and the proximal handle assembly, and join the shaft 218 to a
16 flexible or stiff proximal shaft extension 292 which extends to
17 the proximal handle assembly. The proximal end 294 of the shaft
18 218 is preferably formed into an enlarged section, i.e., a head
19 296, or a separate, enlarged head may be attached to the proximal
20 end of the shaft. A swivel tube 298, preferably made of a
21 malleable alloy, such as brass or stainless steel, is provided
22 over the head 296. A distal end 299 of the swivel tube 298 is
23 swaged or crimped to form a loose fit on the shaft 218, while
24 being small enough to retain the head 296. The swivel tube 298 is
25 placed onto the shaft 218 such that the head 296 is trapped inside

1 the non-crimped portion 300 of the swivel tube 298. The extension
2 shaft 292 is pushed into the proximal open end 304 of the swivel
3 tube 298, and the swivel tube 298 is firmly crimped onto the
4 extension shaft 292. The extension shaft 292 is preferably made
5 of either a flexible cable, for example, a 1x7 stranded stainless
6 steel cable preferably of 0.032 inch diameter, or a solid wire of
7 a springy material such as stainless steel, for example, a 0.020
8 inch diameter 304 stainless steel spring-temper wire. The
9 extension shaft 292 extends proximally from the swivel tube 298 to
10 the spool so that it transmits reciprocating longitudinal motion
11 of the spool through the swivel tube 298 to the shaft 218.

12

13 This variation in construction of the extension shaft 292 is
14 allowed because the purpose of the extension of the shaft 218 is
15 merely to transmit the reciprocating axial motion imparted by the
16 proximal handle; thus, if there exists a freely rotational joint
17 between distal shaft 218 and the extension shaft 292, there is no
18 requirement for the extension shaft to be straight,
19 torsionally-stiff, or camber-free.

20

21 Turning now to Fig. 10, according to a fourth embodiment of
22 the invention, the distal handle assembly 326 includes a mount 350
23 capable of firmly coupling the distal handle assembly 326 to a
24 port in an endoscope handle (not shown), for example, by
25 interference fit. In a preferred configuration, the mount 350

1 includes a coupling fitting 352 which is couplable to the port of
2 the endoscope, and a connector 354 which is slidably movable, yet
3 capable of being secured in a position, relative to the coupling
4 fitting 352. The connector 354 has a proximal end 356 which is
5 threadably coupled to the distal end 336 of the body 330.

6

7 The coupling fitting 352 includes a cylindrical block 358
8 having an axial bore 360, and a tubular nosepiece 362 secured in
9 the axial bore 360. The connector 354 includes a stepped bore 364
10 having a relatively large central portion 366, and relatively
11 smaller proximal and distal portions 368, 370. The central
12 portion 366 of the stepped bore 364 is sized to permit relative
13 axial movement over the block 358. The distal portion 370 of
14 stepped bore 364 is sufficiently large to permit axial movement of
15 the connector 354 over the nosepiece 362. A locking screw 372
16 extends radially into the central portion 366 of the stepped bore
17 364 of the connector 354 such that the screw 372 may be rotated to
18 tighten against the block 358 to lock the connector 354 axially
19 relative to the block. The proximal end 314 of the sheath 312
20 extends through the nosepiece 362 and block 358 and is fixedly
21 coupled in the proximal portion 368 of the stepped bore 364.
22 Other aspects of the fourth embodiment are substantially as
23 described above with respect to the first embodiment.

24

1 In use, the snare instrument is inserted through a port of an
2 endoscope until the nosepiece 362 of the snare instrument is
3 stably inserted in the port. The distal end of the sheath of the
4 snare instrument may then be adjustably fixed relative the distal
5 end of the endoscope by adjusting the connector 354 (and hence the
6 handle 326, shaft 318, and sheath 312) over the block 358. When
7 the sheath is correctly positioned, screw 372 may be set. The
8 distal handle 326 may then be operated, as described with respect
9 to the first embodiment, to rotate the shaft 318 and snare
10 relative to the sheath 312. Likewise, a proximal handle assembly,
11 as described with respect to the first embodiment, may then be
12 manipulated to longitudinally move the shaft 318 to open and close
13 the snare (the sheath having been previously set in position).
14 With the above described embodiment, it may be possible for the
15 physician to operate without an assistant as the axial placement
16 of the snare instrument is established and set prior to rotation
17 and activation of the snare loop.

18
19 Referring now to Fig. 11, according to a fifth embodiment of
20 the invention, a single handle assembly 427 capable of being fixed
21 relative to an endoscope handle is provided. The handle assembly
22 427 of the snare instrument includes all of the controls
23 previously provided in the proximal and distal handle assemblies,
24 and is substantially similar to the distal handle assembly 326,
25 described above, with the additional incorporation of the snare

1 opening and closing functions. To that effect, a sliding spool
2 assembly 428 for longitudinally moving the shaft 418 relative to
3 the sheath 412 may be substantially rigidly fixed to the proximal
4 end 438 of the body 430. For example, a distal end 462 of a
5 stationary member 450 of the spool assembly 428 may be threadably
6 mated with the proximal end 438 of the body 430. The spool
7 assembly is preferably otherwise substantially as described with
8 respect to proximal handle assembly 28 of the first embodiment of
9 the invention.

10
11 The resulting device is fixedly couplable relative to an
12 endoscopic handle and provides to the physician the following
13 controls: a means for controllably advancing, retracting, and
14 setting the sheath of the snare instrument relative to the distal
15 end of the endoscope; a means for advancing (opening) and
16 retracting (closing) the snare relative to the distal end of the
17 sheath; and a means for steering (rotating) the snare to position
18 the snare over a polyp. Since the physician has direct and
19 immediate control of the entire instrument, the snare instrument
20 obviates the need for an assistant during the procedure, and
21 improves the speed and efficiency of the procedure.

22
23 There have been described and illustrated herein several
24 embodiments of a surgical snare instrument. While particular
25 embodiments of the invention have been described, it is not

1 intended that the invention be limited thereto, as it is intended
2 that the invention be as broad in scope as the art will allow and
3 that the specification be read likewise. Thus, while the use of a
4 particular monolithic and composite shafts have been disclosed
5 with respect to a snare instrument, it will be appreciated that
6 other flexible shafts may also be provided. Also, while the
7 cautery connector has been shown on the proximal handle, it will
8 be appreciated that the cautery connection may be provided in the
9 physician's handle, or elsewhere along the length of the device,
10 provided that the cautery connection will not interfere with the
11 axial longitudinal and rotating motions of the shaft.
12 Furthermore, while particular shapes and configurations have been
13 described with respect to the proximal and distal handles, it will
14 be appreciated that other shapes and configurations may be
15 provided therefor. As such, it will also be appreciated that
16 other configurations which provide a gripping handle for the
17 sheath, means for rotating the shaft, and means for longitudinally
18 moving the shaft may be used. For example, a control knob which
19 rotates about an axis perpendicular to the axis of the shaft via a
20 right-angle drive (using two meshing bevel gears) may be used to
21 rotate the shaft. The gears may be configured to permit step-up
22 or step-down rotation, for example, such that rotation of the
23 shaft rotates the shaft twice as much or one-half as much. In
24 addition, levers, gears, friction wheels, pulleys, links, etc.,
25 may be used to longitudinally move the shaft within the sheath,

1 and the snare relative to the distal end of the sheath. Moreover,
2 while a particular nosepiece has been described for use in the
3 fourth and fifth embodiment, it will be appreciated that other
4 nosepieces enabling stable coupling of the snare handle to an
5 endoscope handle may be used. For example, a threaded connector
6 capable of threading into or over a port on the endoscope handle
7 may be used. Also, in the fourth and fifth embodiment, the mount
8 and the body may be integrally formed or molded, and in the fifth
9 embodiment, the body and the proximal sliding spool assembly may
10 be integrally formed or molded. In addition, it will be
11 appreciated that aspects of the various embodiments may be
12 combined. For example, but not by way of limitation, the key of
13 the second embodiment or the swivel joint of the third embodiment
14 may be used in either of the fourth and fifth embodiments.
15 Furthermore, the described handle assemblies may be used with
16 other surgical instruments where both axial and rotational
17 movement of a control member relative to a tubular member is
18 required. For example, the handle may be used in laparoscopic and
19 endoscopic instruments, generally, which include an end effector
20 other than a snare loop. For example, and not by way of
21 limitation, end effectors such as baskets and forceps may be used
22 with the handle. It will therefore be appreciated by those
23 skilled in the art that yet other modifications could be made to
24 the provided invention without deviating from its spirit and scope
25 as claimed.

WO 01/10321

PCT/US00/21411

What is claimed is:

1. A surgical instrument for insertion through an endoscope having a handle and a working channel, said surgical instrument comprising:

a) a elongate flexible tubular sheath having proximal and distal ends;

b) a flexible shaft extending through and axially movable relative to the sheath, said shaft having proximal and distal ends;

c) an end effector coupled to or formed at said distal end of said shaft;

d) a first means coupled to said shaft for rotating said shaft relative to said sheath;

e) a second means for longitudinally moving said shaft relative to said sheath; and

f) a tubular member coupling said first and second means together.

2. A surgical instrument according to claim 1, wherein:
said end effector is a snare.

3. A surgical instrument according to claim 1, wherein:
said tubular member is flexible.

WO 01/10321

PCT/US00/21411

4. A surgical instrument according to claim 1, wherein:

said first means is located distal said second means.

5. A surgical instrument according to claim 1, wherein:

said tubular member has proximal and distal ends, and

said first means is a first handle including a first member and including a second member provided with a bore, said second member being axially rotatable relative to said first member,

said first member having a distal end fixedly coupled to said proximal end of said sheath and a proximal end coupled to said distal end of said tubular member,

said shaft extending through said bore, and said second member having means for engaging said shaft such that rotation of said second member relative to first member causes rotation of said shaft relative to said sheath.

6. A surgical instrument according to claim 5, wherein:

said shaft includes a key portion provided with a non-circular cross section, and said means for engaging said shaft is a non-circular cross section of said bore of said second member adapted to engage said key portion.

WO 01/10321

PCT/US00/21411

7. A surgical instrument according to claim 6, wherein:

said second member is provided with a tubular portion which extends at least partially into said proximal and distal ends of said first member, said tubular portion having said bore with said non-circular cross section.

8. A surgical instrument according to claim 7, wherein:

said tubular portion of said second member extends beyond said proximal and distal ends of said first member.

9. A surgical instrument according to claim 1,

wherein said second means for longitudinally moving said shaft relative to said sheath includes a first member having a throughbore and a distal end coupled to said proximal end of said tubular member, and a second member coupled to said shaft and movable relative to said first member to cause said shaft to move longitudinally relative to said sheath.

10. A surgical instrument according to claim 9, wherein:

said second member is longitudinally slidable relative to said first member.

WO 01/10321

PCT/US00/21411

11. A surgical instrument according to claim 1, wherein:

said shaft comprises a first element extending from said end effector to a location proximal said first means, and a second element extending from said location to said second member of said second means, said first and second elements being freely axially rotatable relative to each other.

12. A surgical instrument according to claim 11, wherein:

said first and second elements are coupled by a swivel joint.

13. A surgical instrument according to claim 11, wherein

said first element of said shaft is camber-free.

14. A surgical instrument according to claim 1, wherein:

said shaft is freely axially rotatable relative to said second means.

15. A surgical instrument according to claim 14, wherein:

said shaft is camber-free.

WO 01/10321

PCT/US00/21411

16. A surgical instrument according to claim 1, further comprising:

g) a first stiffening sleeve, wherein said sheath is coupled to said first means and said stiffening sleeve is provided over a portion of said sheath at or adjacent a coupling of said sheath to said first means.

17. A surgical instrument according to claim 16, further comprising:

h) a second stiffening sleeve provided over a portion of said tubular member at or adjacent a coupling of said tubular member to said first means.

18. A surgical instrument according to claim 1, further comprising:

g) means for providing a cautery current to said shaft.

19. A surgical instrument according to claim 1, further comprising:

g) mounting means for mounting said first means relative to the handle of the endoscope such that said sheath of said surgical instrument extends through the working channel of the endoscope.

WO 01/10321

PCT/US00/21411

20. A surgical instrument according to claim 18, wherein:

said mounting means is adapted to adjustably fix said distal end of said sheath relative to a distal end of the endoscope.

21. A surgical instrument for insertion through an endoscope having a handle and a working channel, said surgical instrument comprising:

a) a elongate flexible tubular sheath having proximal and distal ends;

b) a flexible shaft extending through and axially movable relative to the sheath, said shaft having proximal and distal ends;

c) an end effector coupled to or formed at said distal end of said shaft, said end effector capable of being positioned in open and closed positions; and

d) a handle including coupling means for coupling said handle to the endoscope handle, and further including,

i) first means for longitudinally moving said sheath relative said working channel of the endoscope,

ii) second means for longitudinally moving said shaft relative to said sheath such that said end effector is movable between open and closed positions determined by relative positions of said sheath and said shaft, and

iii) third means for axially rotating said shaft relative to said sheath.

WO 01/10321

PCT/US00/21411

22. A surgical instrument according to claim 21, wherein:
said end effector is a snare.
23. A surgical instrument according to claim 21, wherein:
said shaft is freely axially rotatable relative to said
second means.
24. A surgical instrument according to claim 21, wherein:
said shaft includes a key portion provided with a non-
circular cross section, and said third means includes means for
engaging said key portion.
25. A surgical instrument according to claim 21, wherein:
said third means is located distal said second means, and
said shaft comprises a first element extending from said end
effector to a location proximal said third means, and a second
element extending from said location to said second means, said
first and second elements being freely axially rotatable relative
to each other.
26. A surgical instrument according to claim 25, wherein:
said first and second elements are coupled by a swivel joint.
27. A surgical instrument according to claim 25, wherein
said first element of said shaft is camber-free.

WO 01/10321

PCT/US00/21411

28. A surgical instrument according to claim 21, wherein:

said shaft is freely axially rotatable relative to said third means.

29. A surgical instrument according to claim 28, wherein:

said shaft is camber-free.

30. A surgical instrument according to claim 21, further comprising:

e) means for providing a cautery current to said shaft.

31. A surgical instrument for insertion through an endoscope having a handle and a working channel, said surgical instrument comprising:

a) a elongate flexible tubular sheath having proximal and distal ends;

b) a flexible shaft extending through and axially movable relative to the sheath, said shaft having proximal and distal ends;

c) an end effector coupled to or formed at said distal end of said shaft;

d) a first means for rotating said shaft relative to said sheath;

e) a second means for longitudinally moving said shaft relative to said sheath; and

f) a means for fixedly coupling said surgical instrument relative to the handle of the endoscope.

32. A surgical instrument according to claim 31, wherein:
said end effector is a snare.

33. A surgical instrument according to claim 31, wherein:
said means for fixedly coupling includes a first portion couplable to the endoscope and a second portion coupled to said sheath and longitudinally adjustably fixable relative to said first portion, such that said sheath may be longitudinally adjusted relative to the working channel.

34. A surgical instrument according to claim 31, wherein:
said shaft is freely axially rotatable relative to said second means.

35. A surgical instrument according to claim 31, wherein:
said shaft includes a key portion provided with a non-circular cross section, and said first means includes means for engaging said key portion.

WO 01/10321

PCT/US00/21411

36. A surgical instrument according to claim 31, wherein:

said first means is located distal said second means, and said shaft comprises a first element extending from said end effector to a location proximal said first means, and a second element extending from said location to said second means, said first and second elements being freely axially rotatable relative to each other.

37. A surgical instrument according to claim 36, wherein:

said first and second elements are coupled by a swivel joint.

38. A surgical instrument according to claim 36, wherein

said first element of said shaft is camber-free.

39. A surgical instrument according to claim 31, wherein:




said shaft is freely axially rotatable relative to said second means.




40. A surgical instrument according to claim 39, wherein:



said shaft is camber-free.

41. A surgical instrument according to claim 31, further comprising:

e) means for providing a cautery current to said shaft.

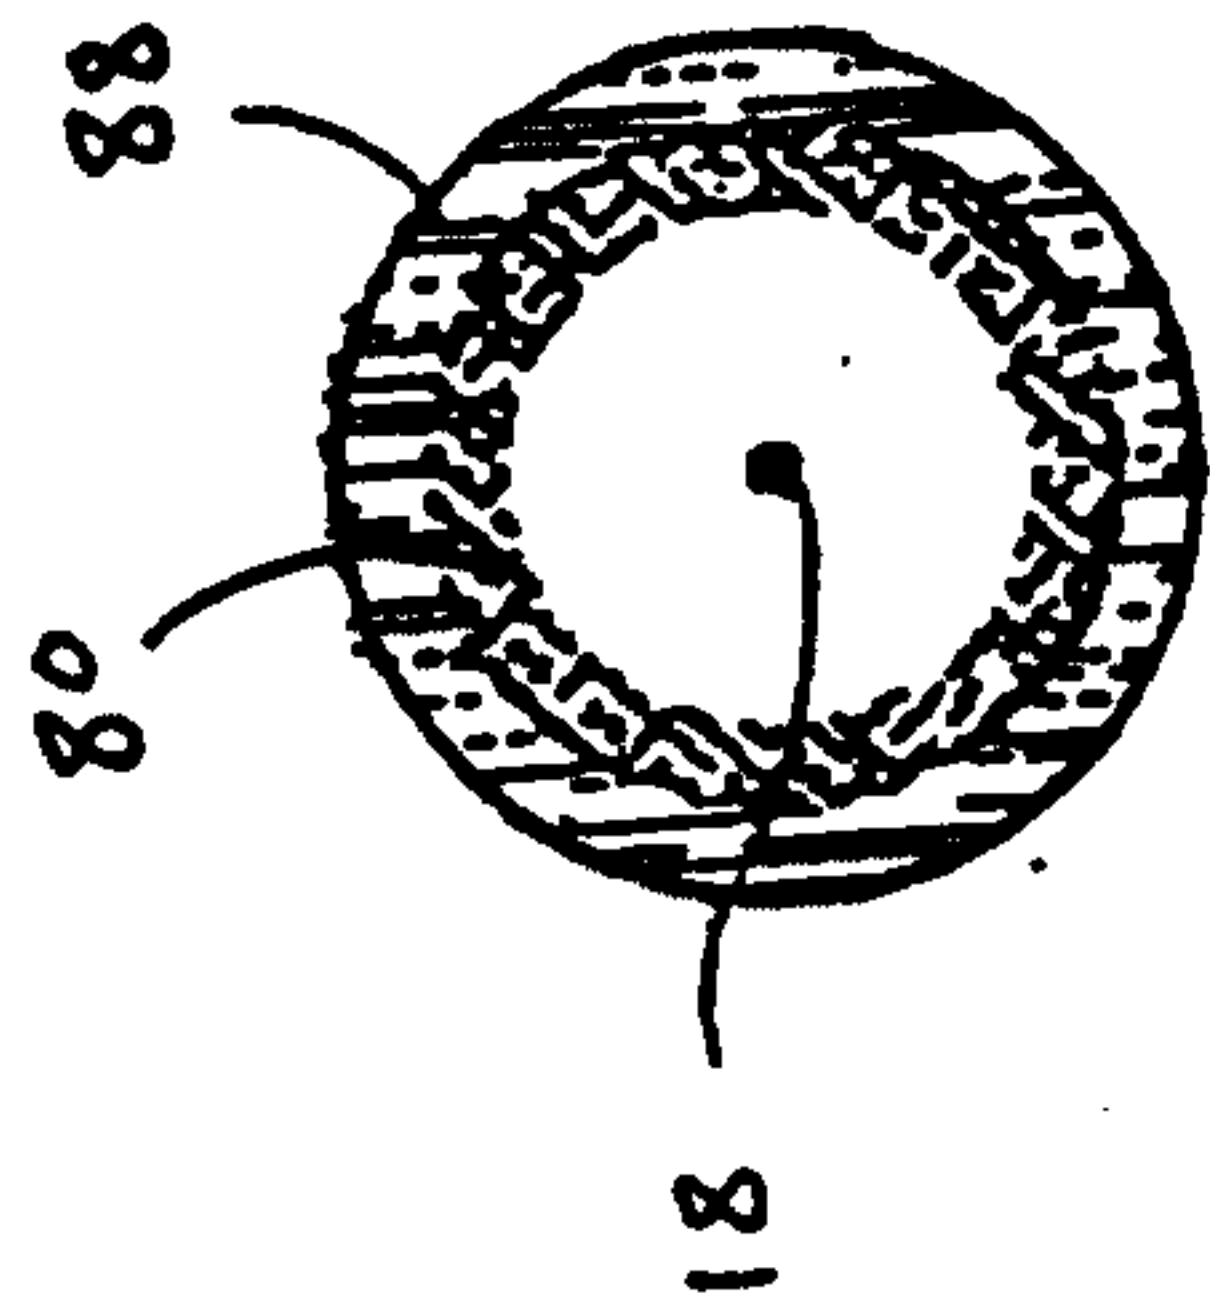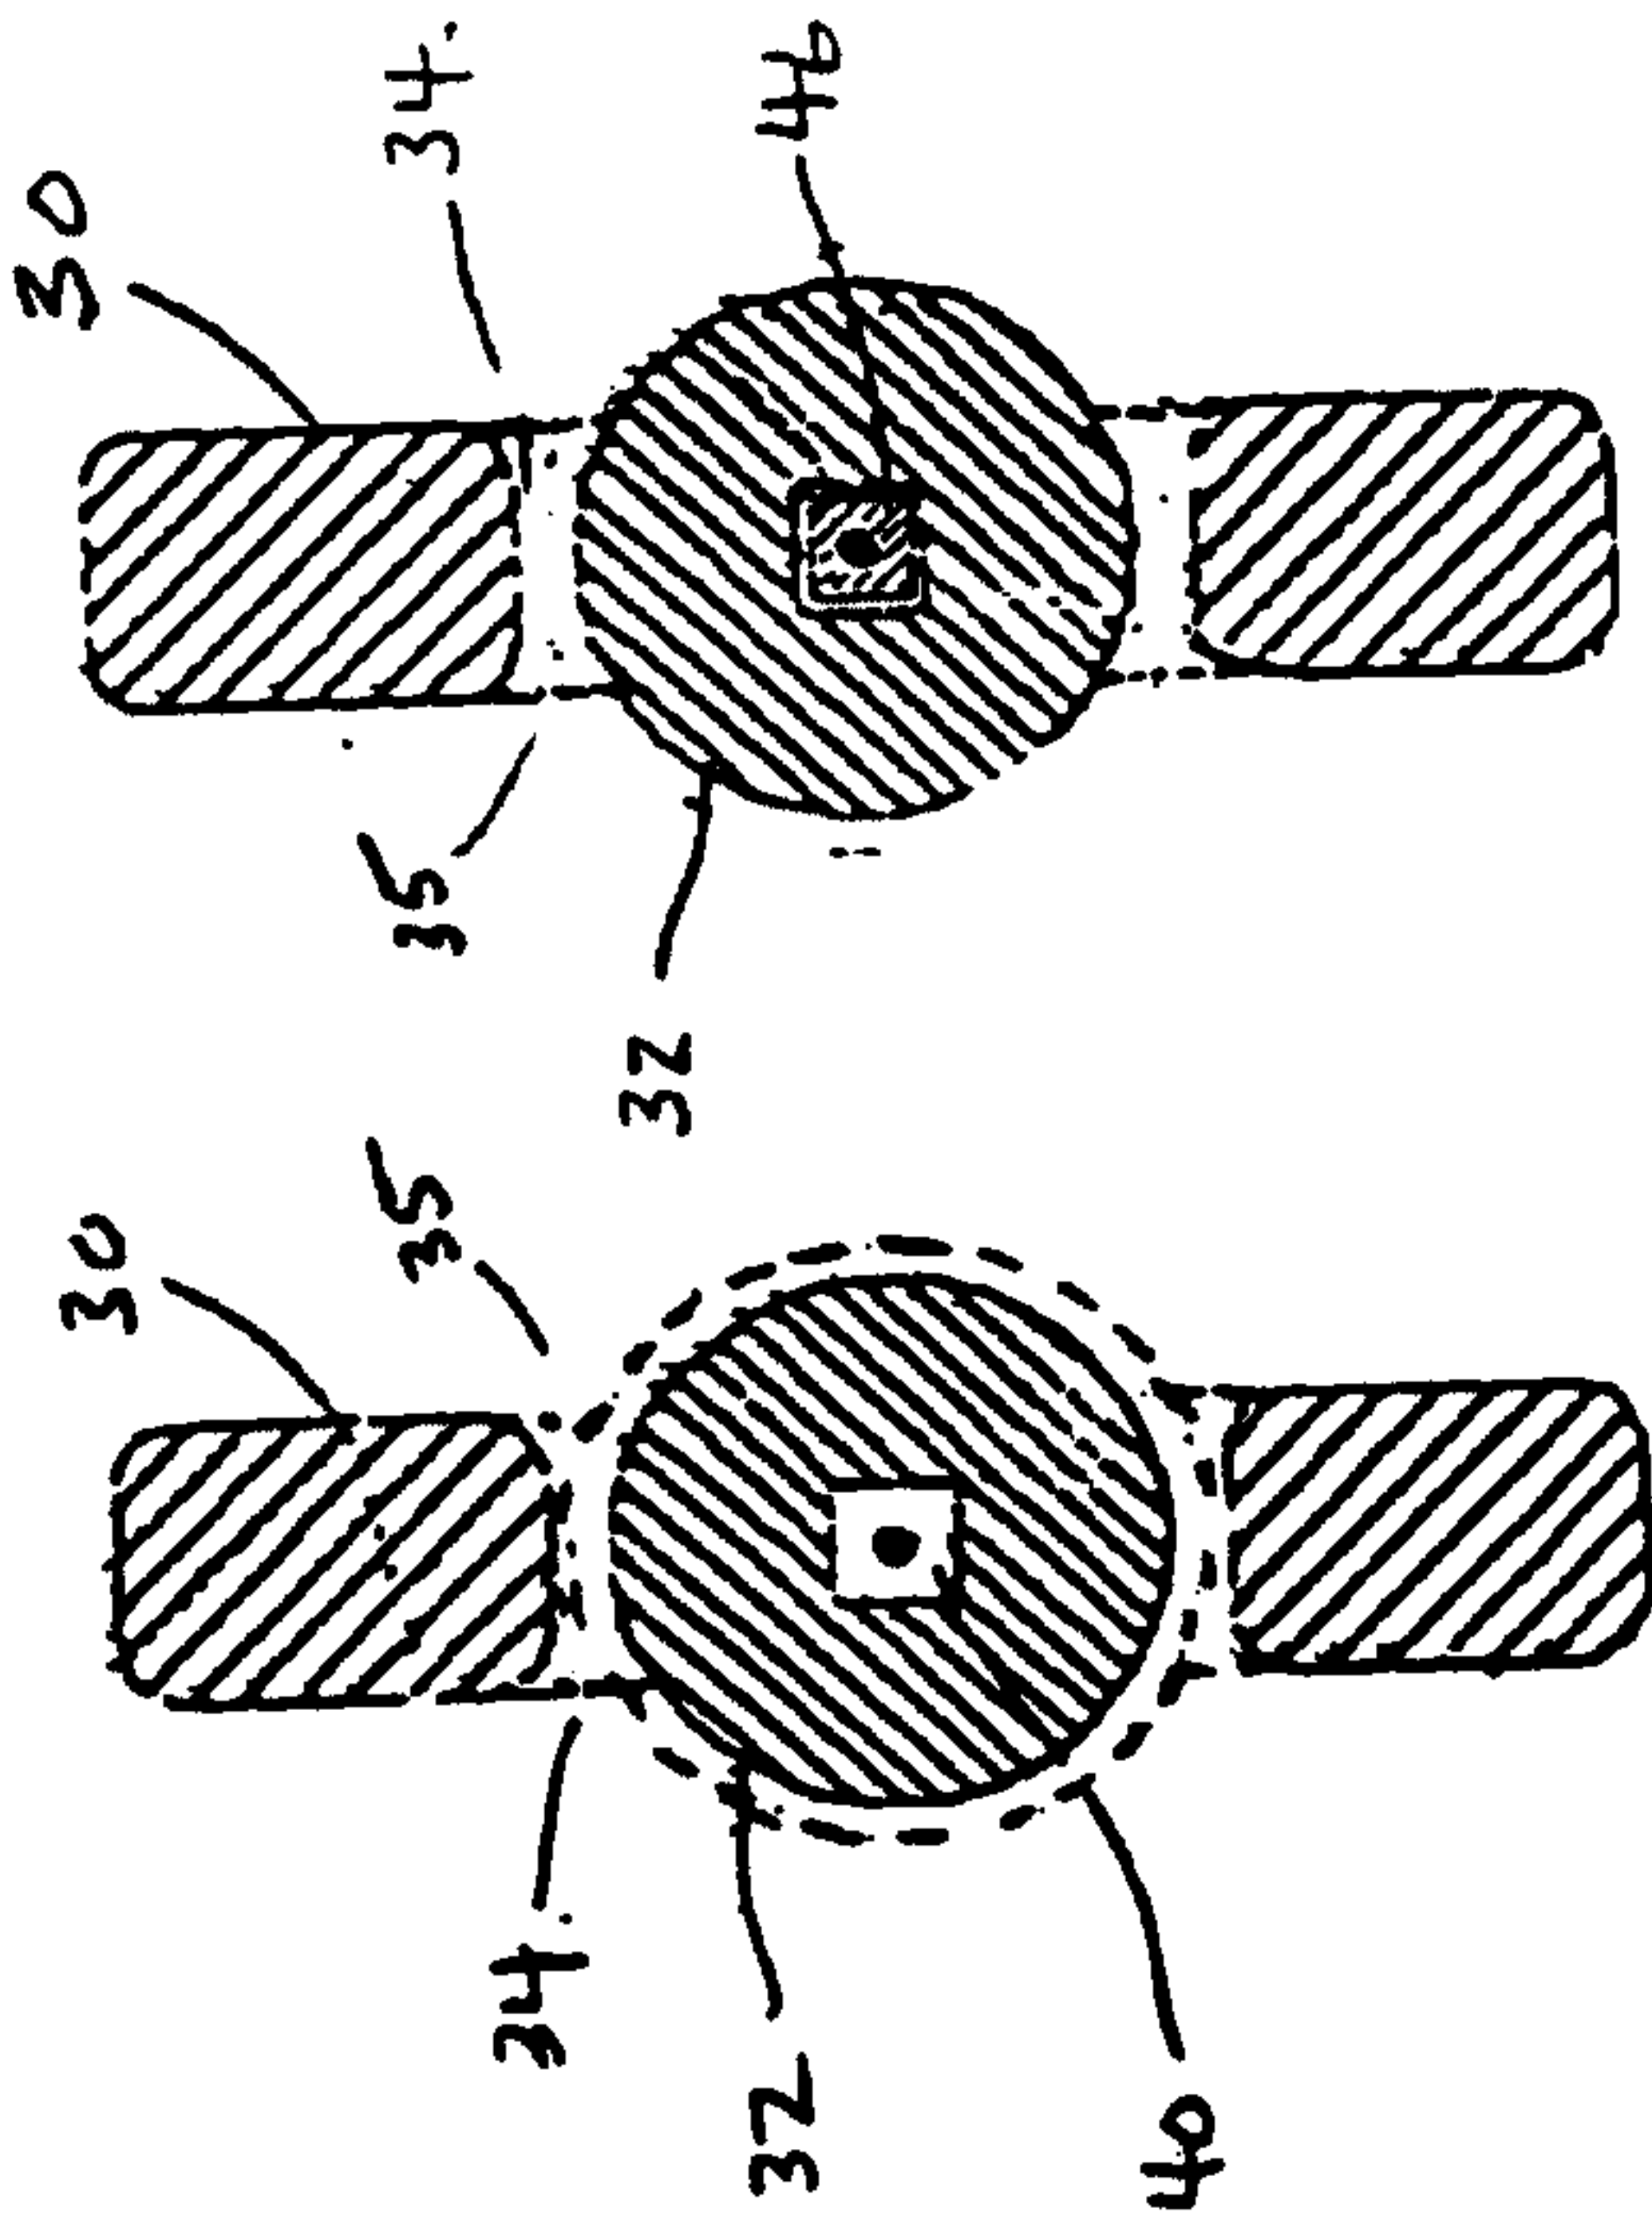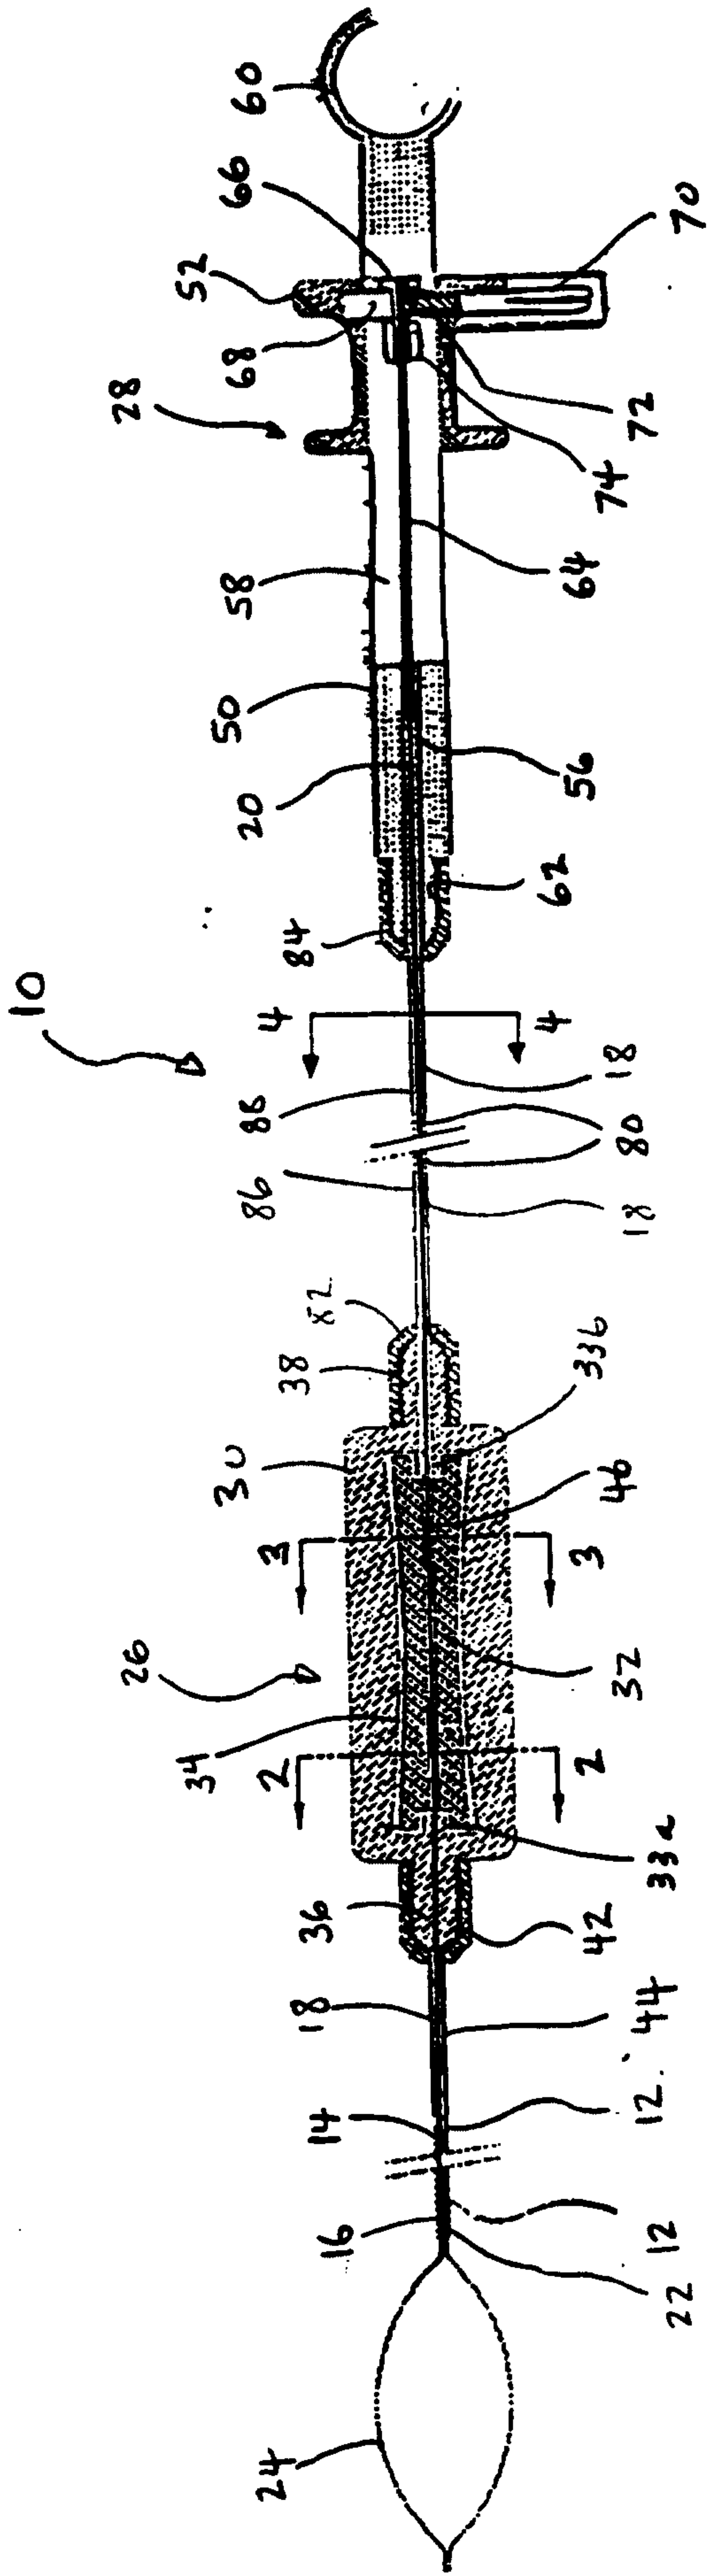

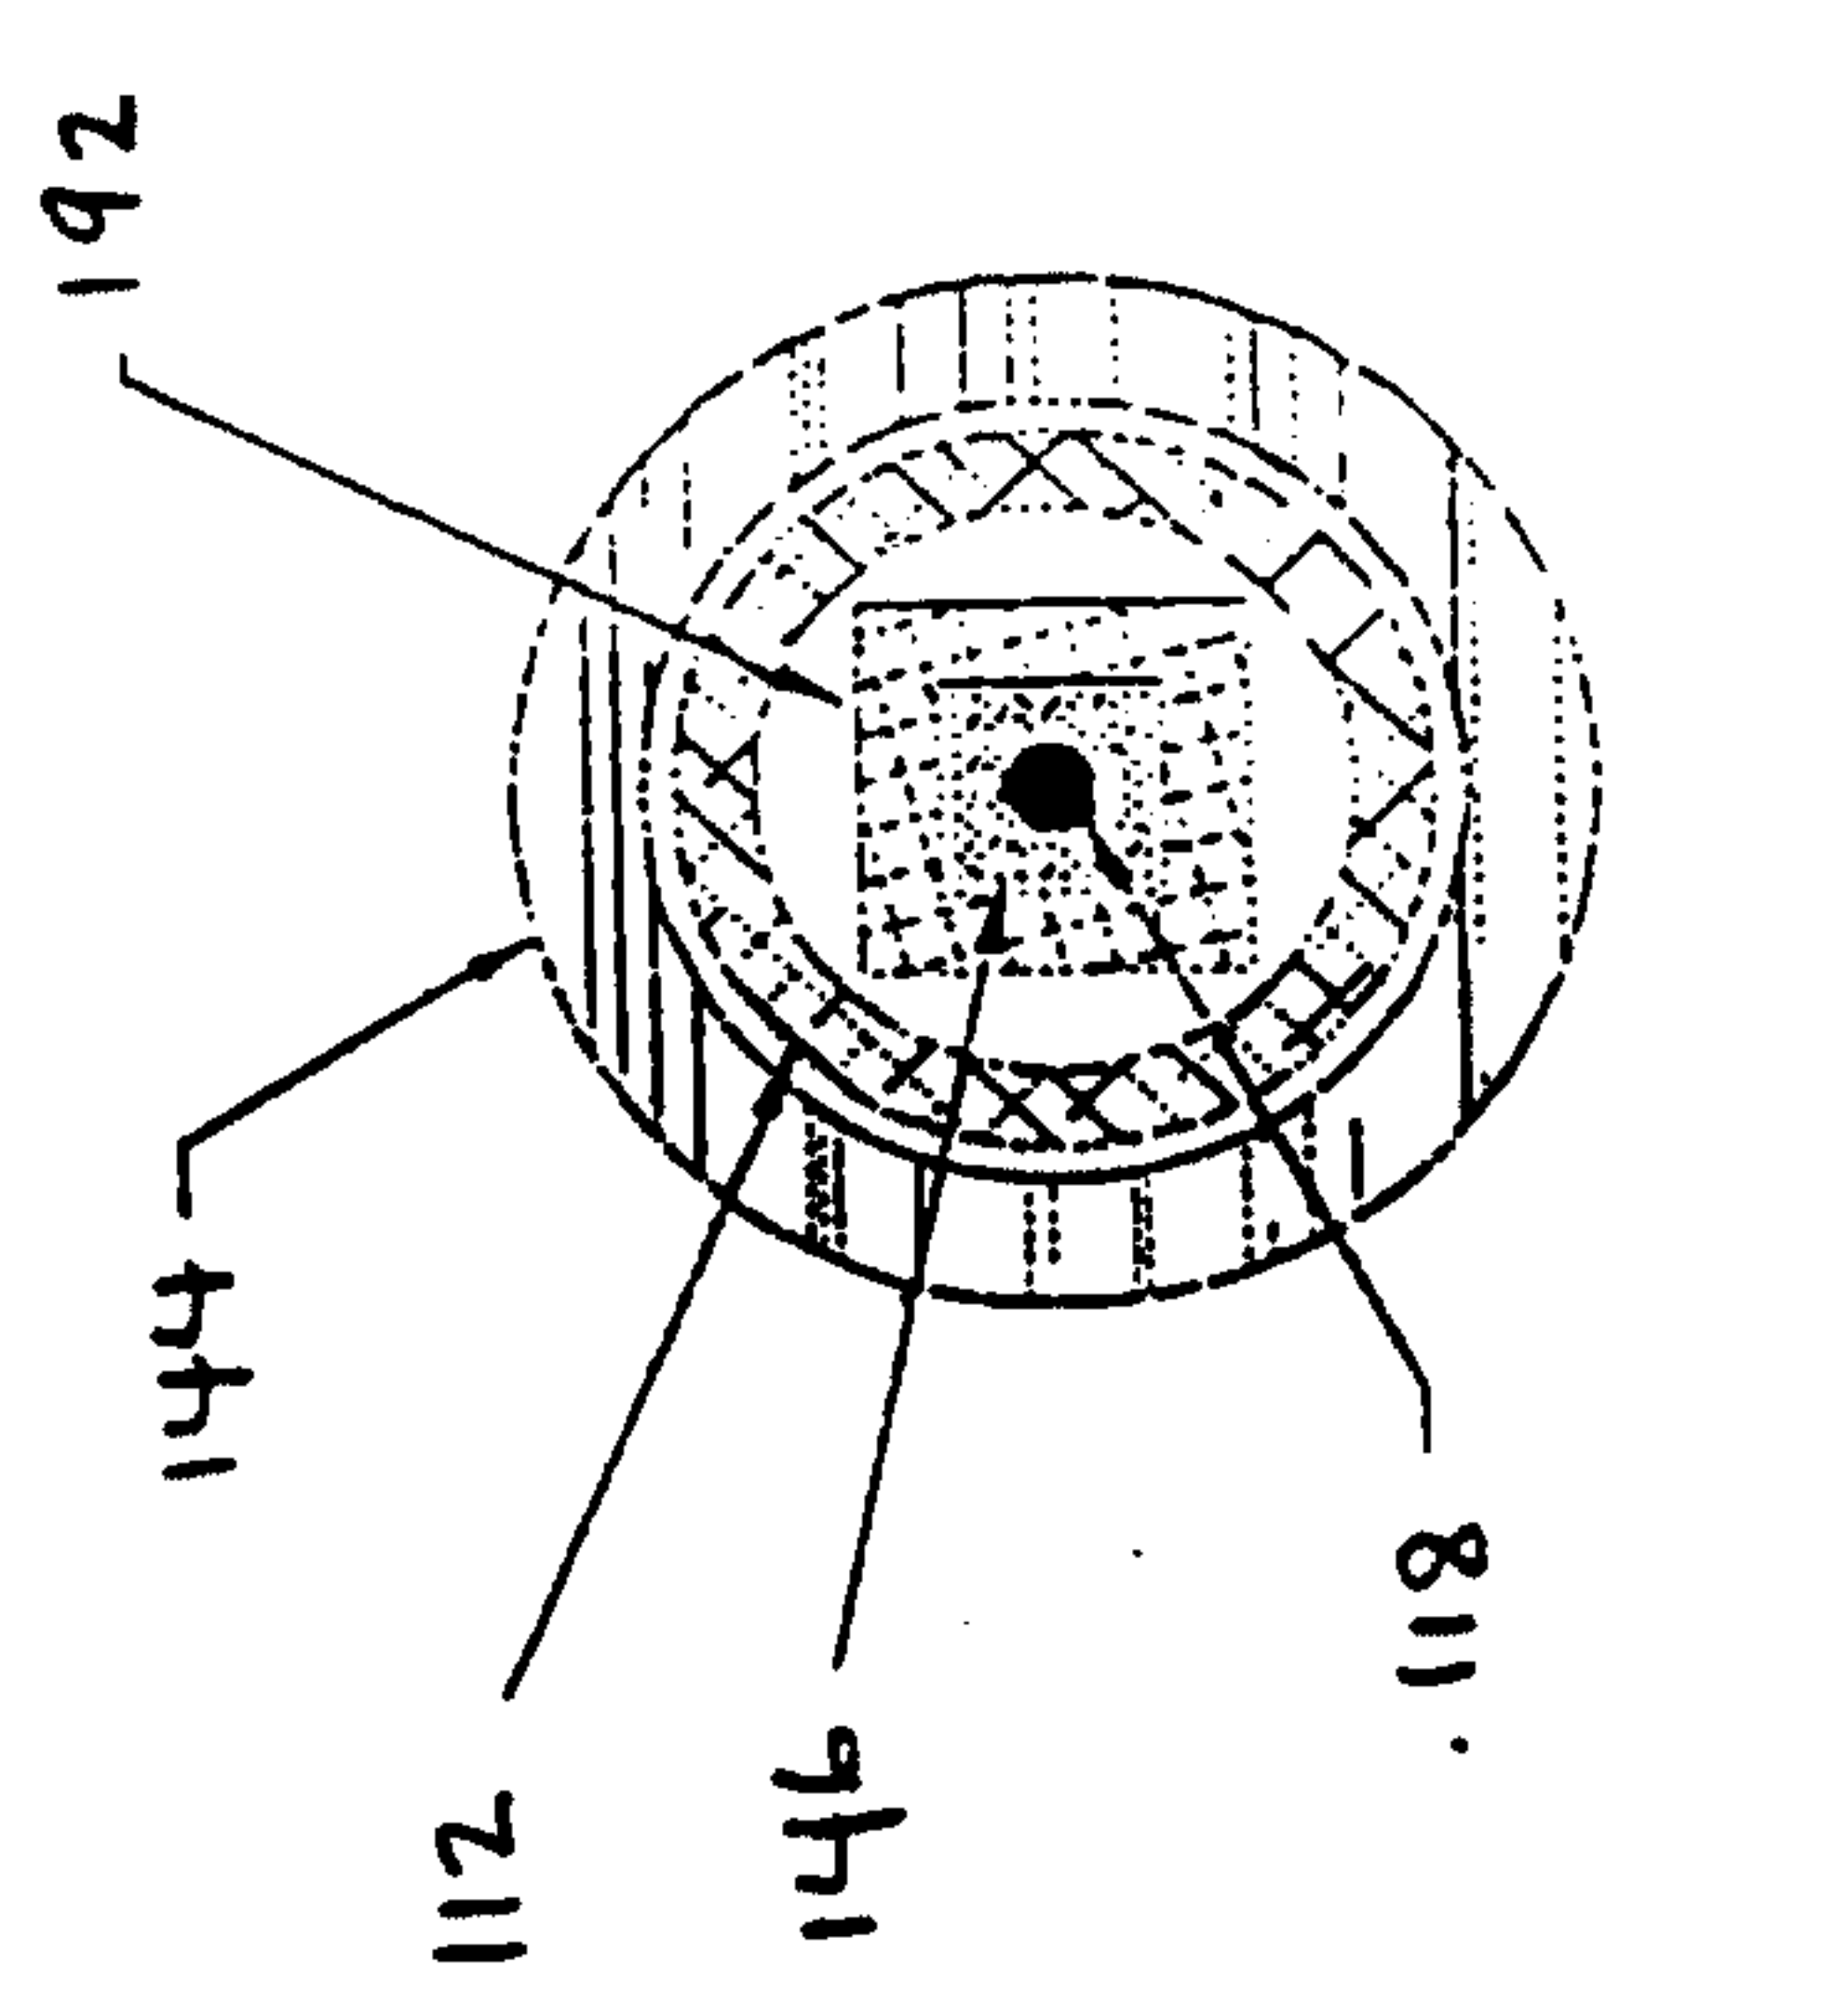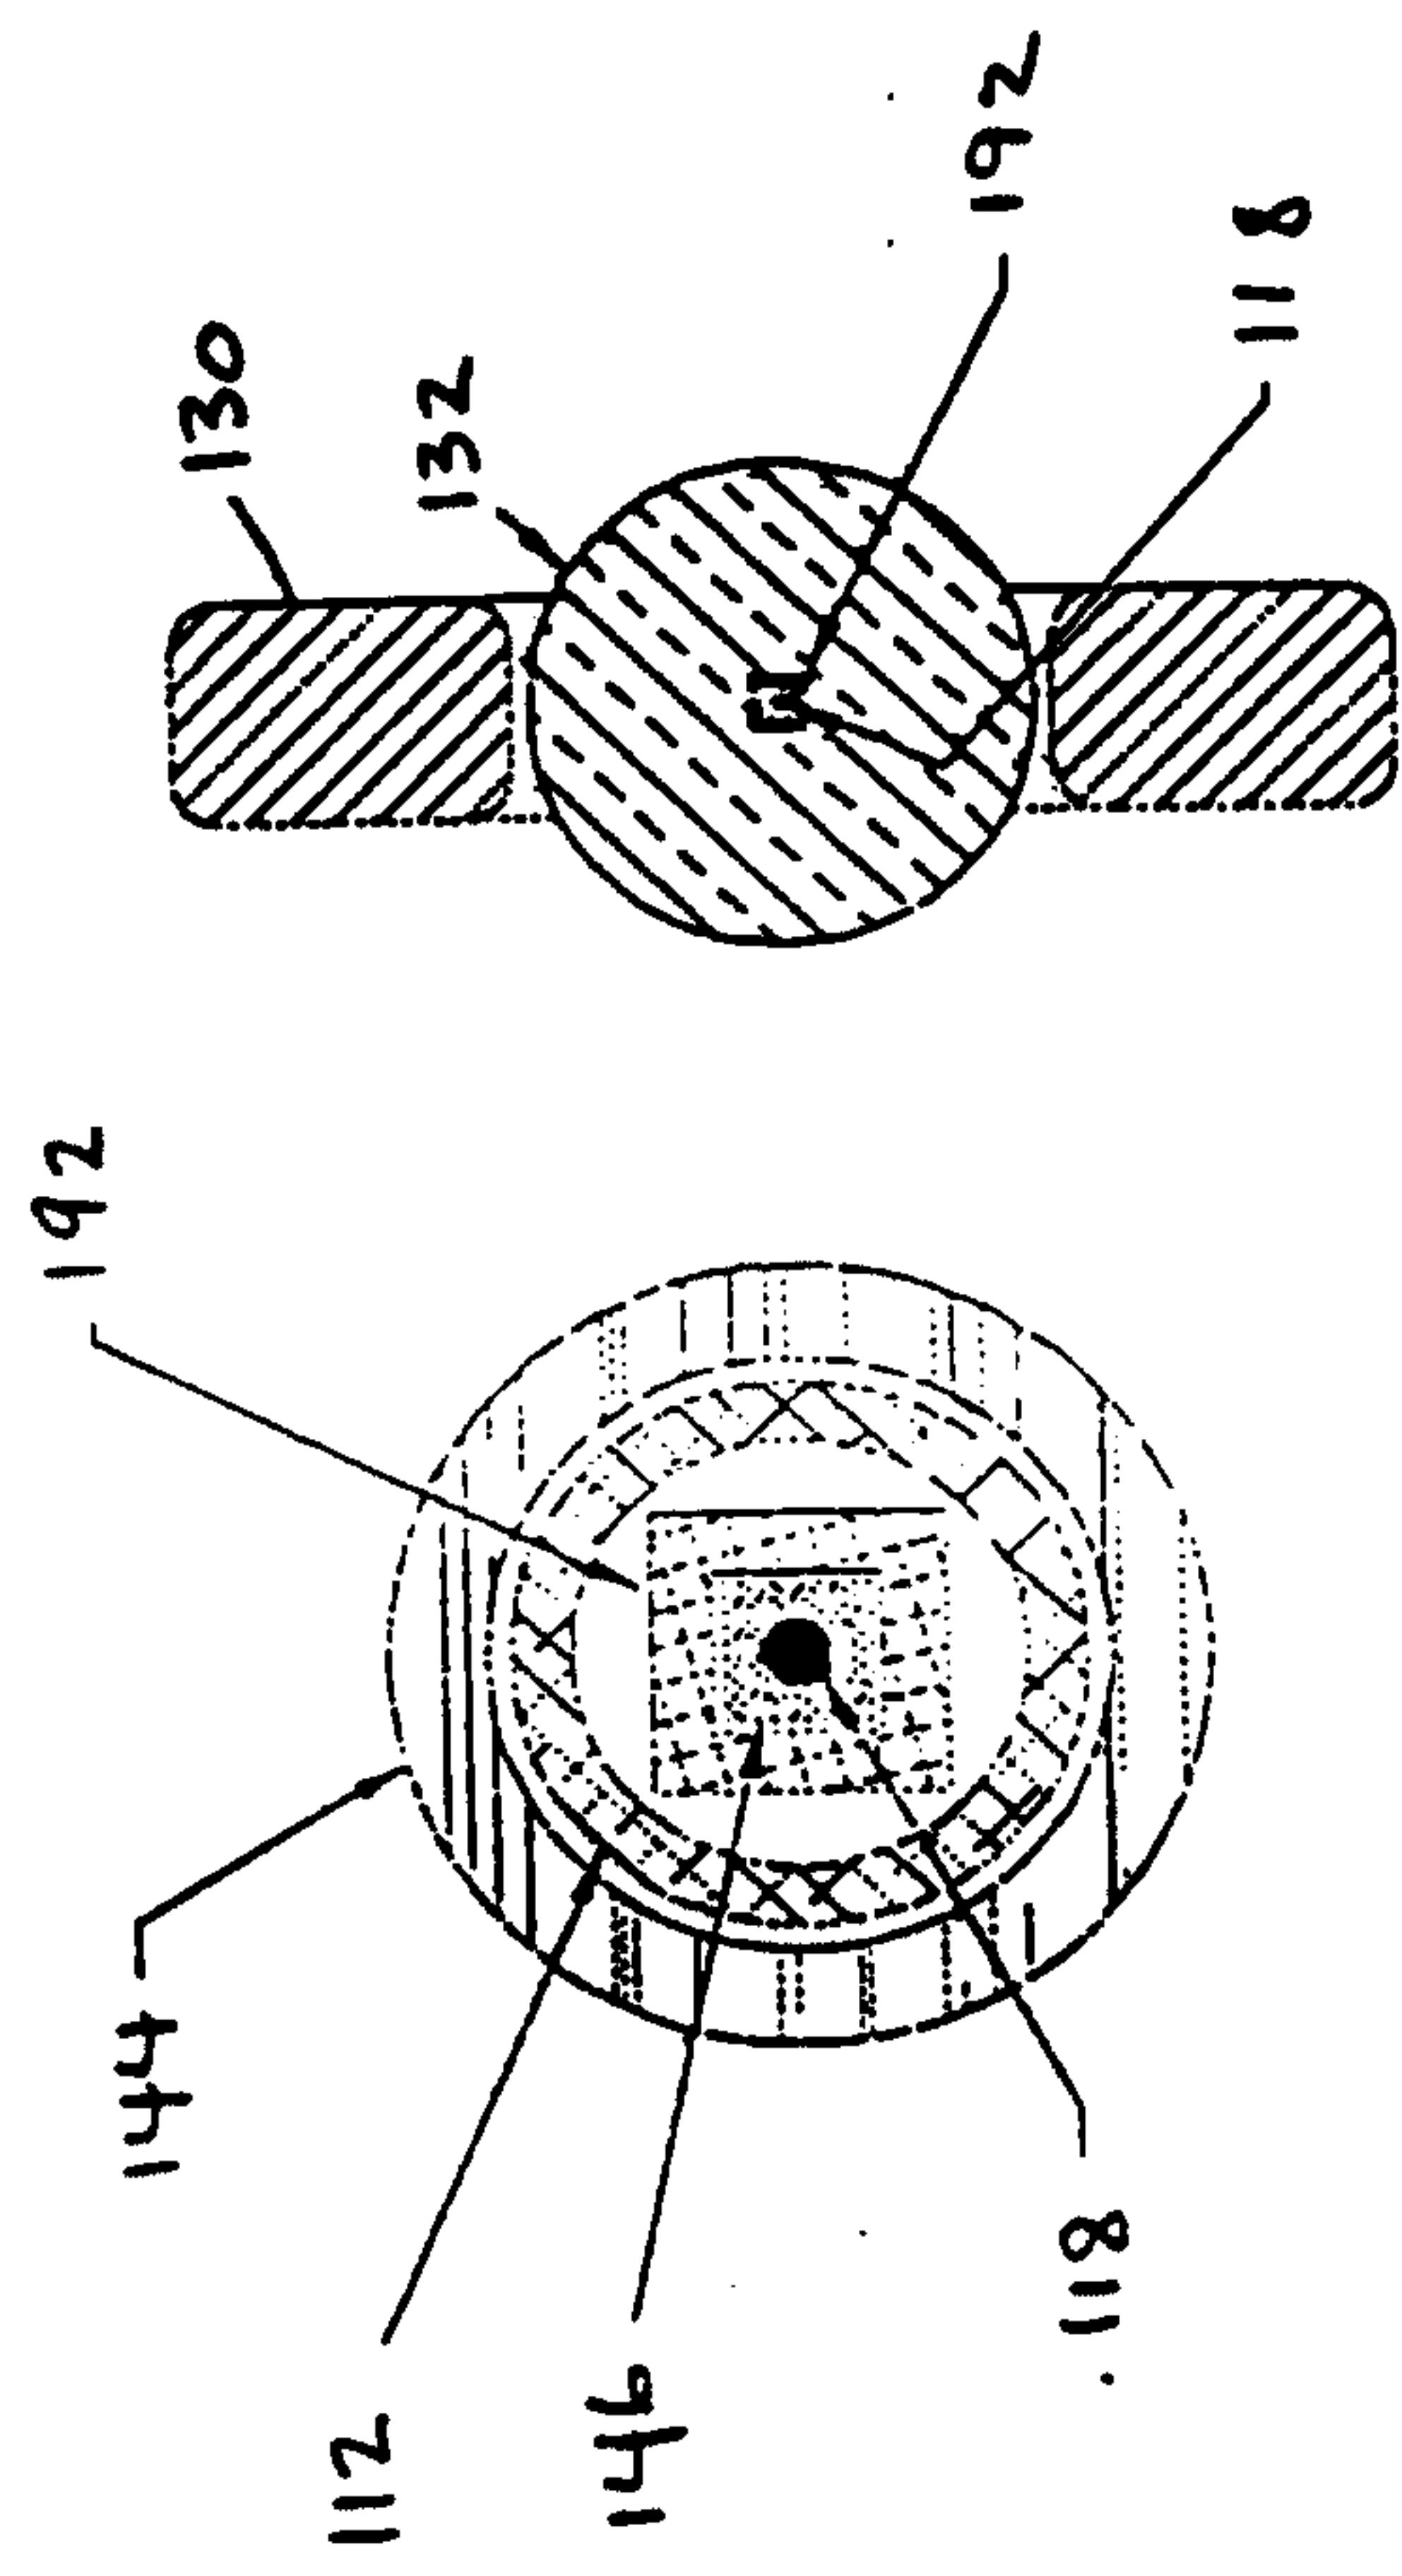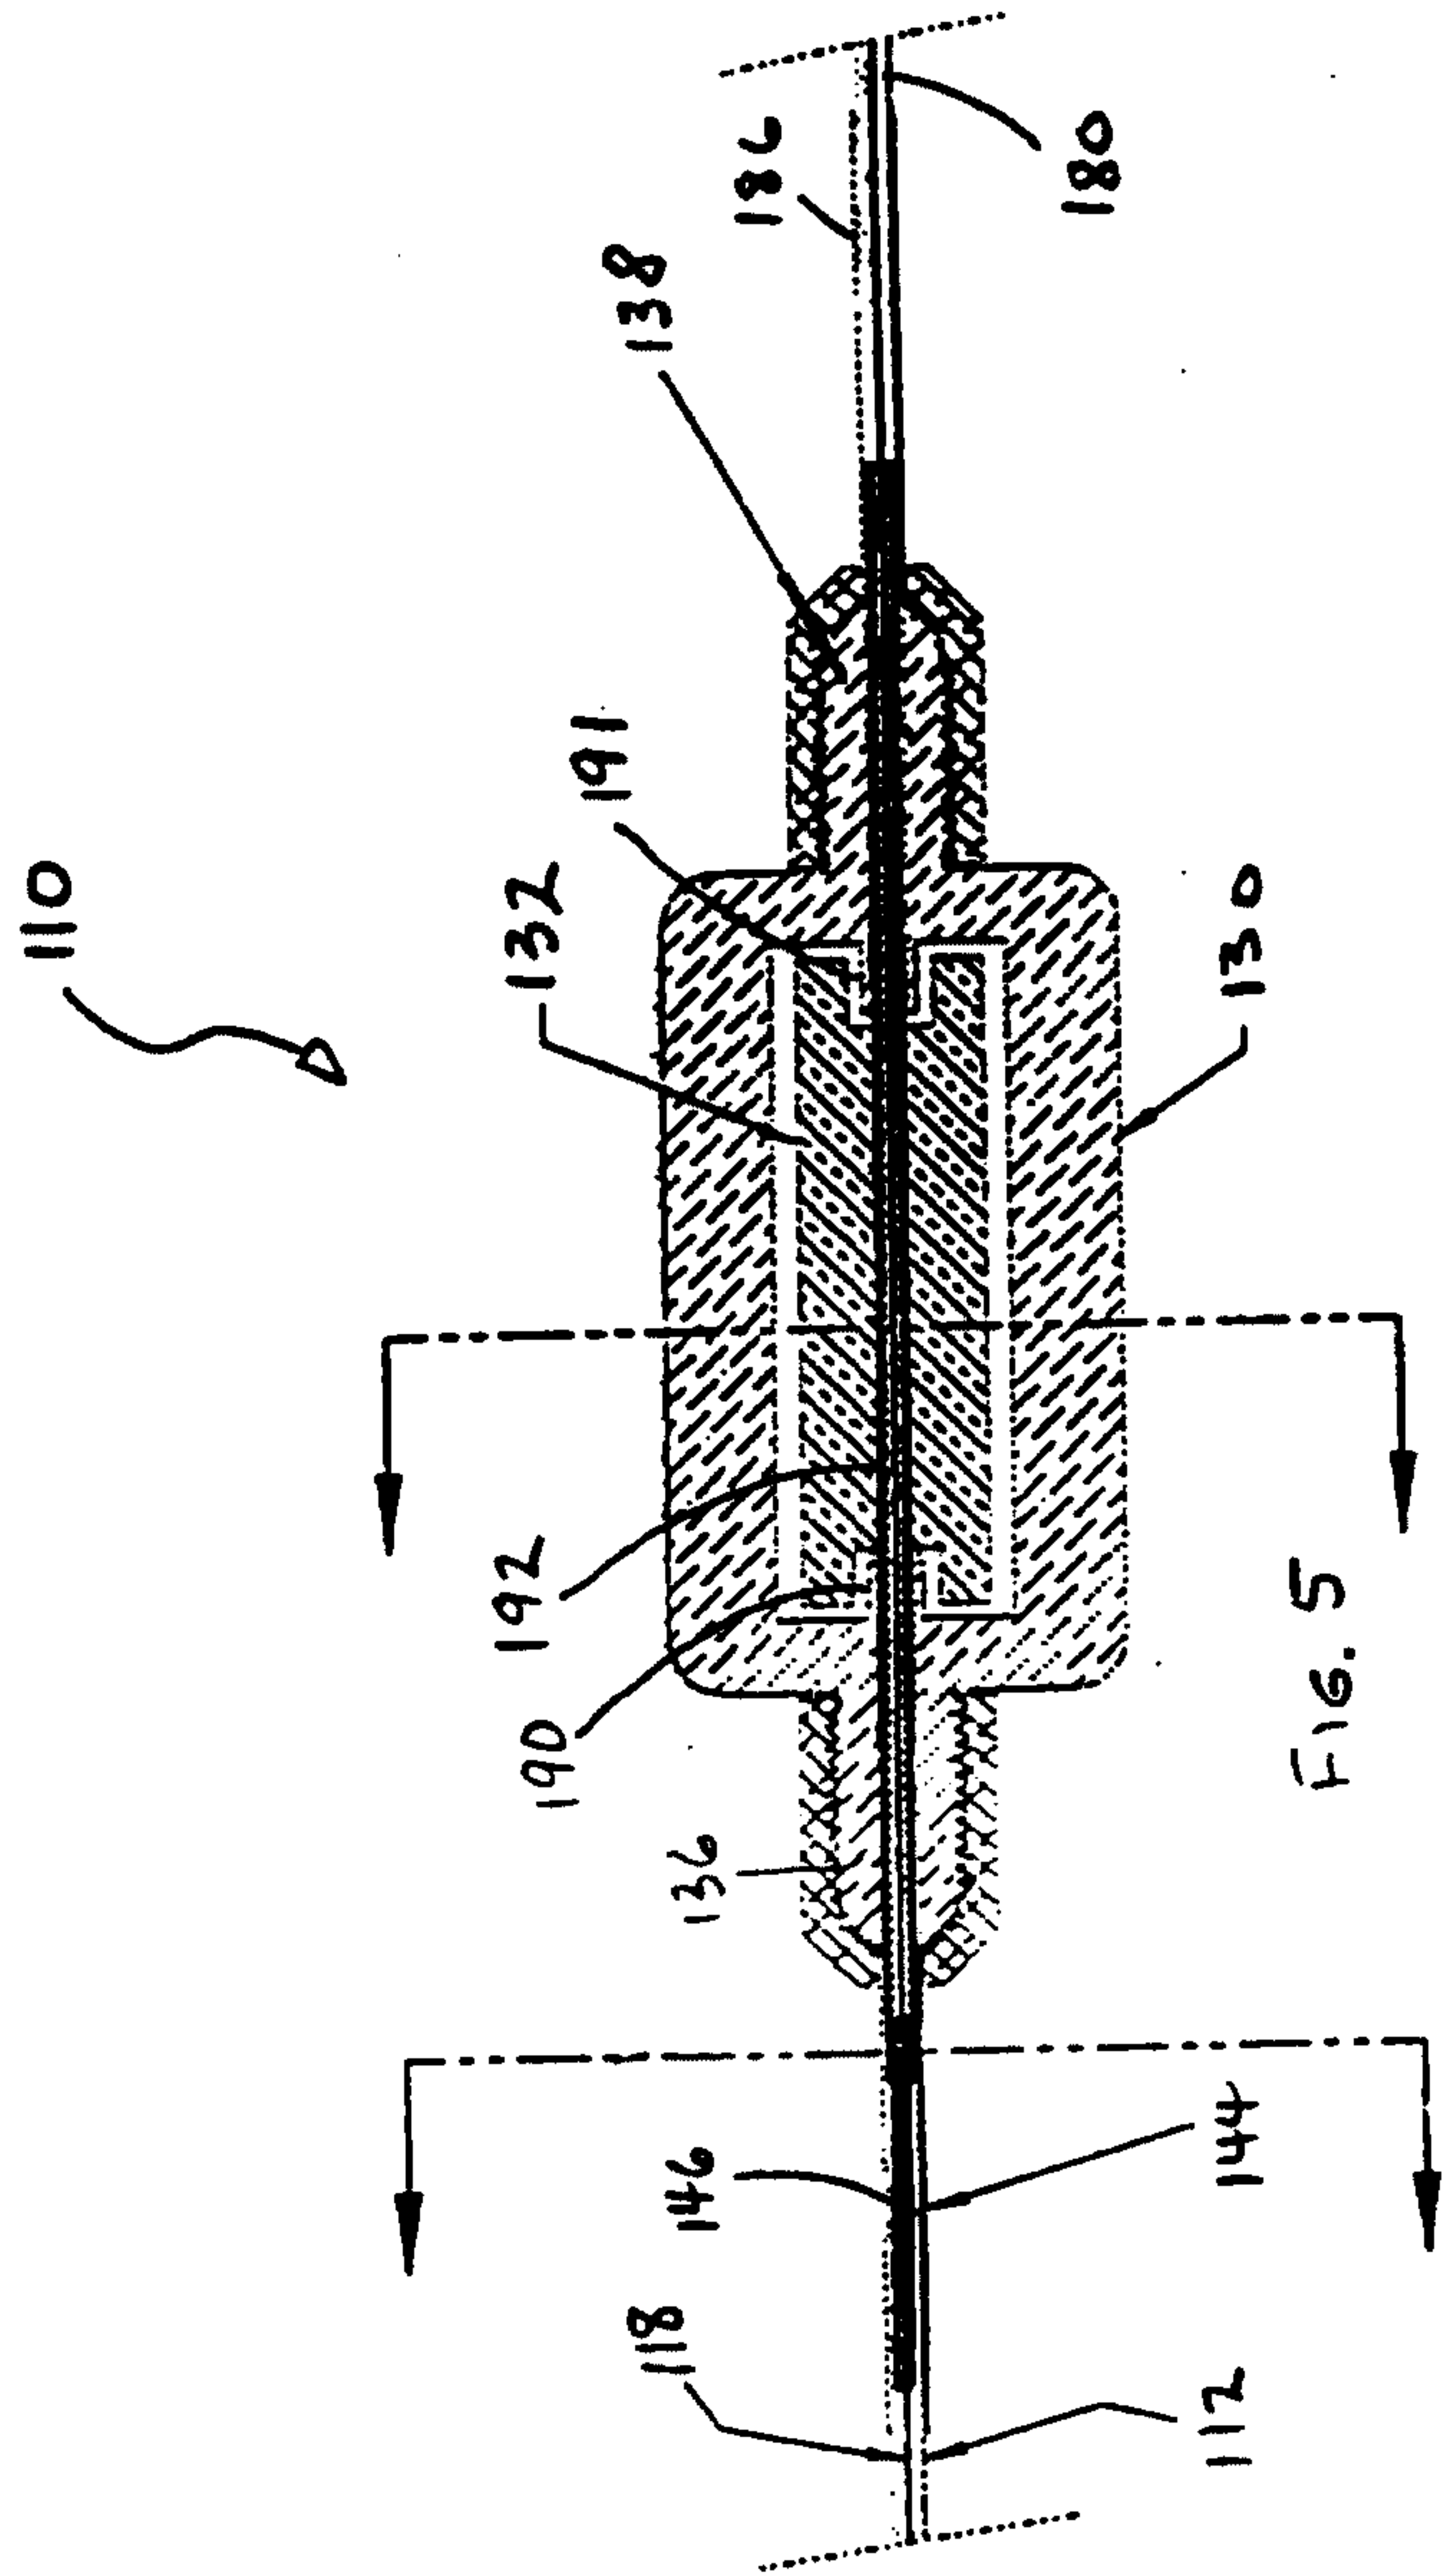

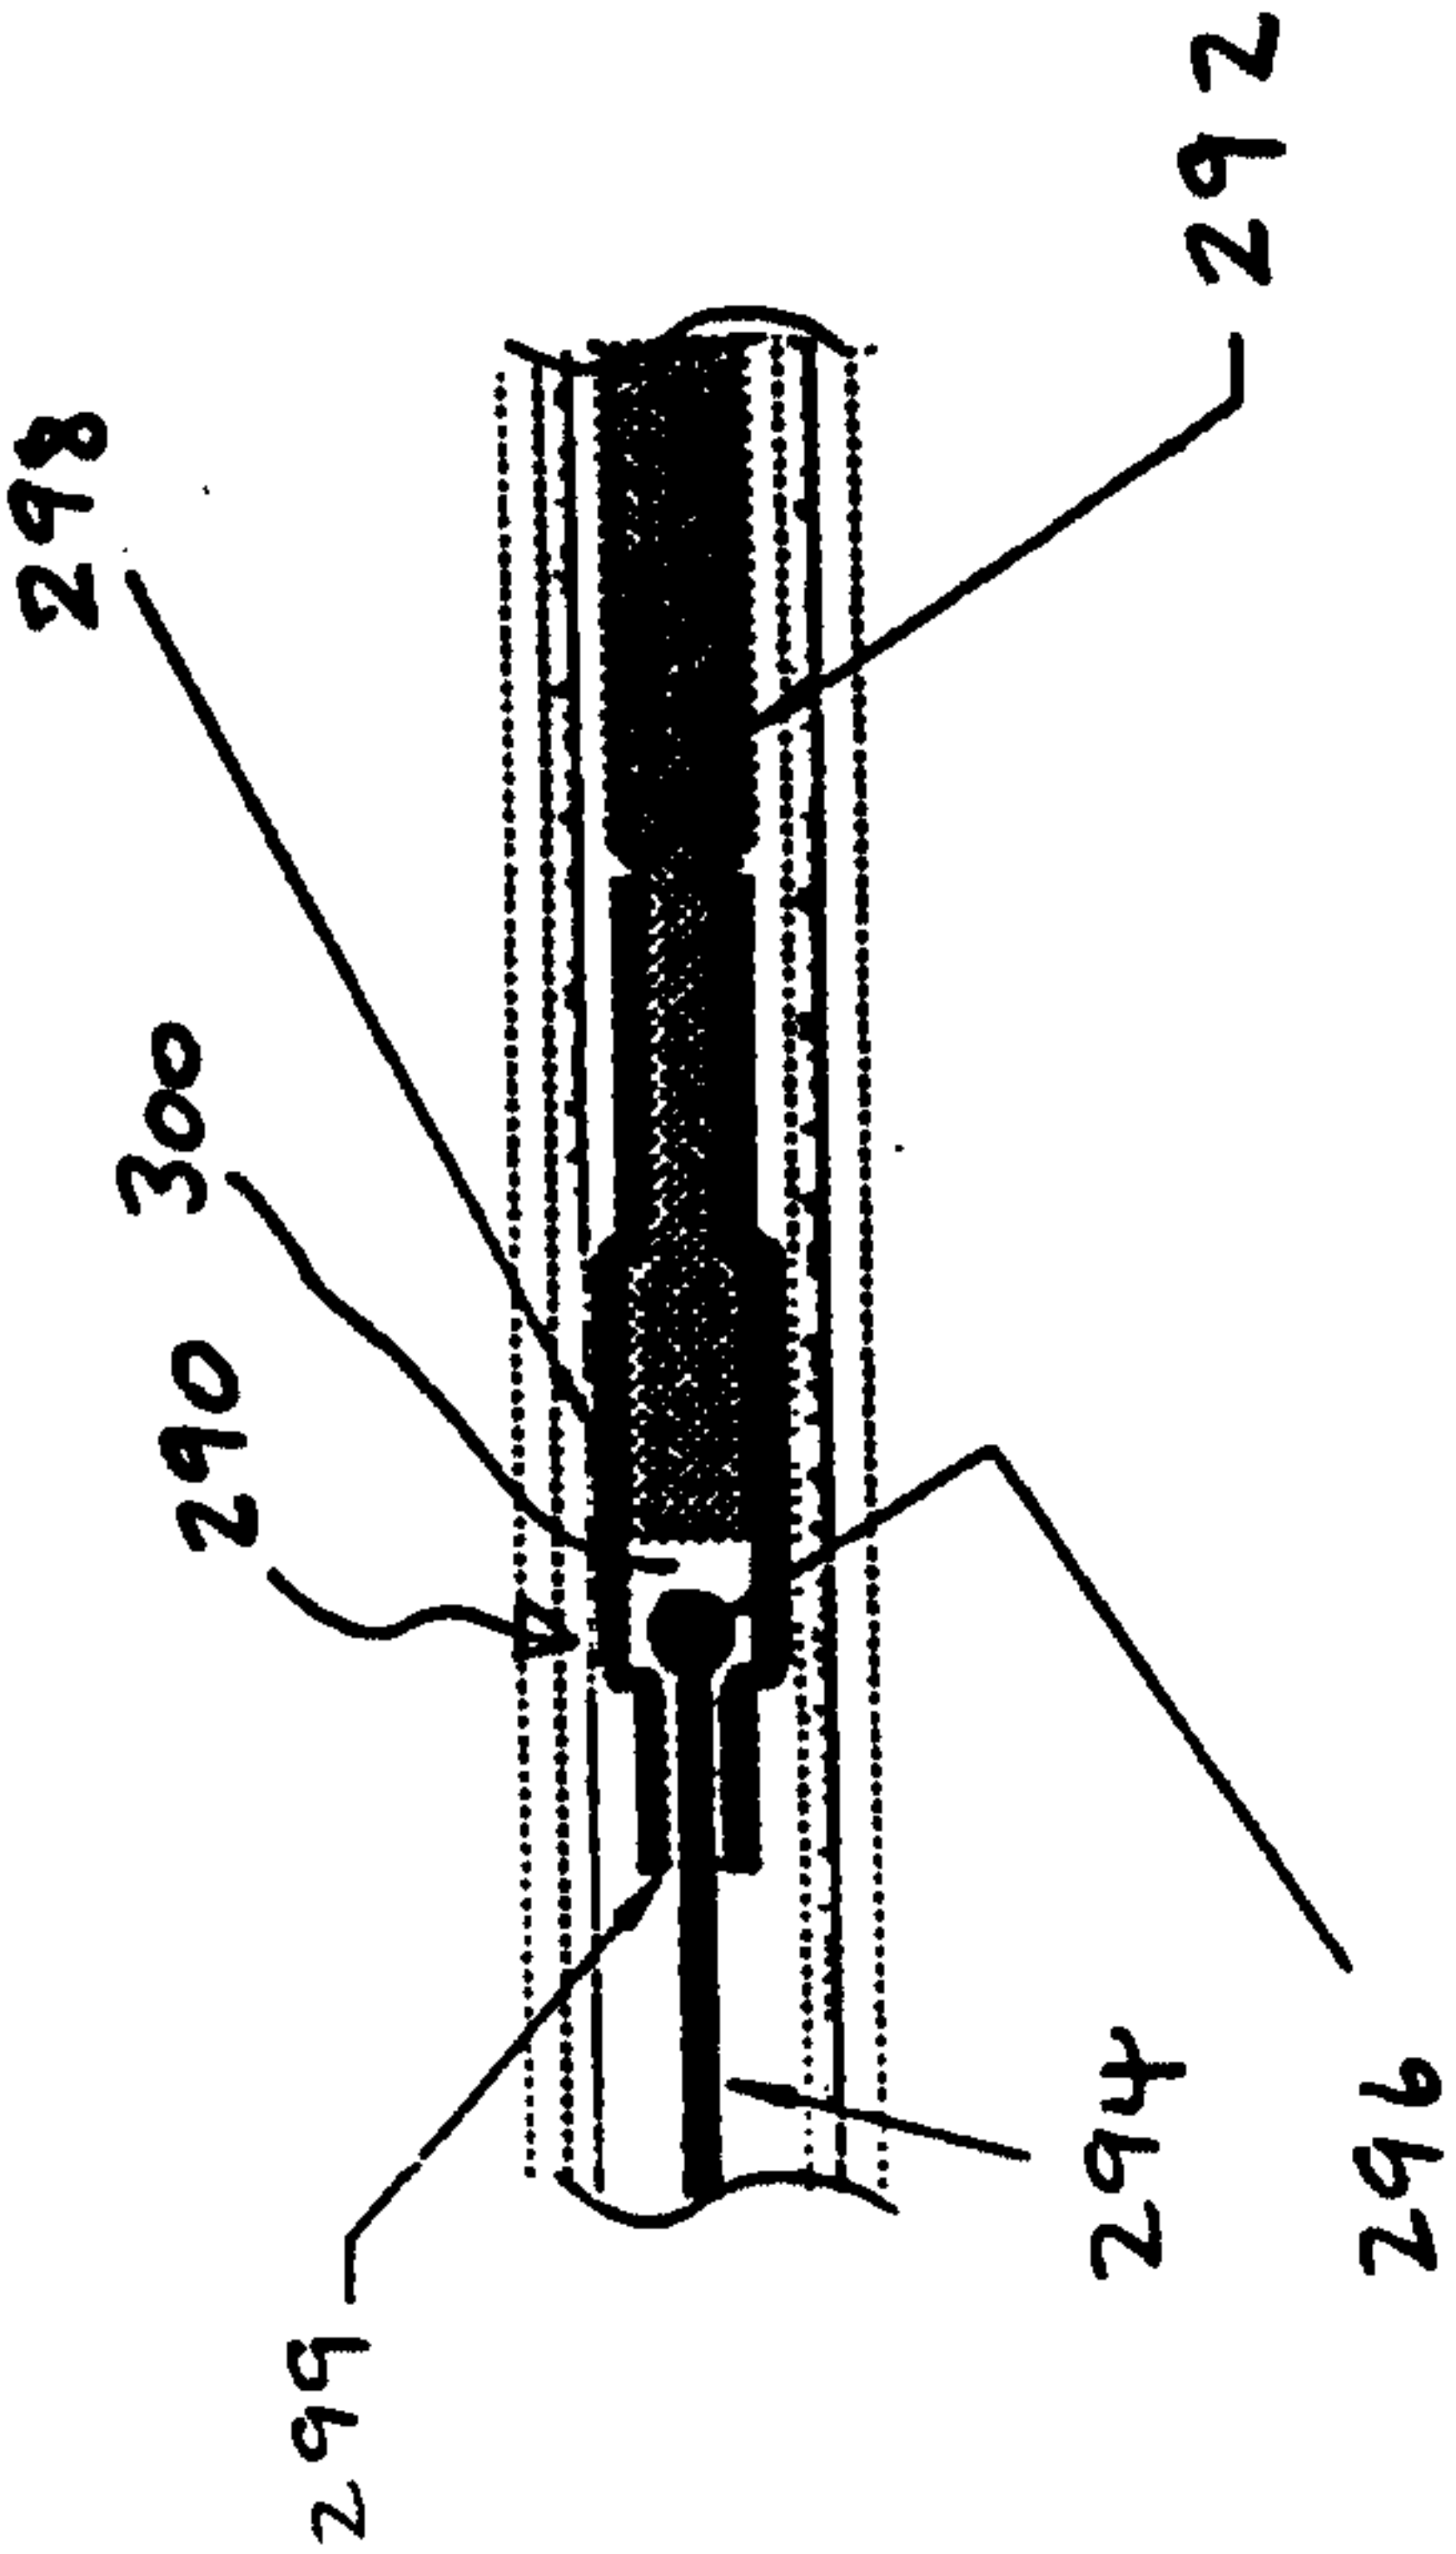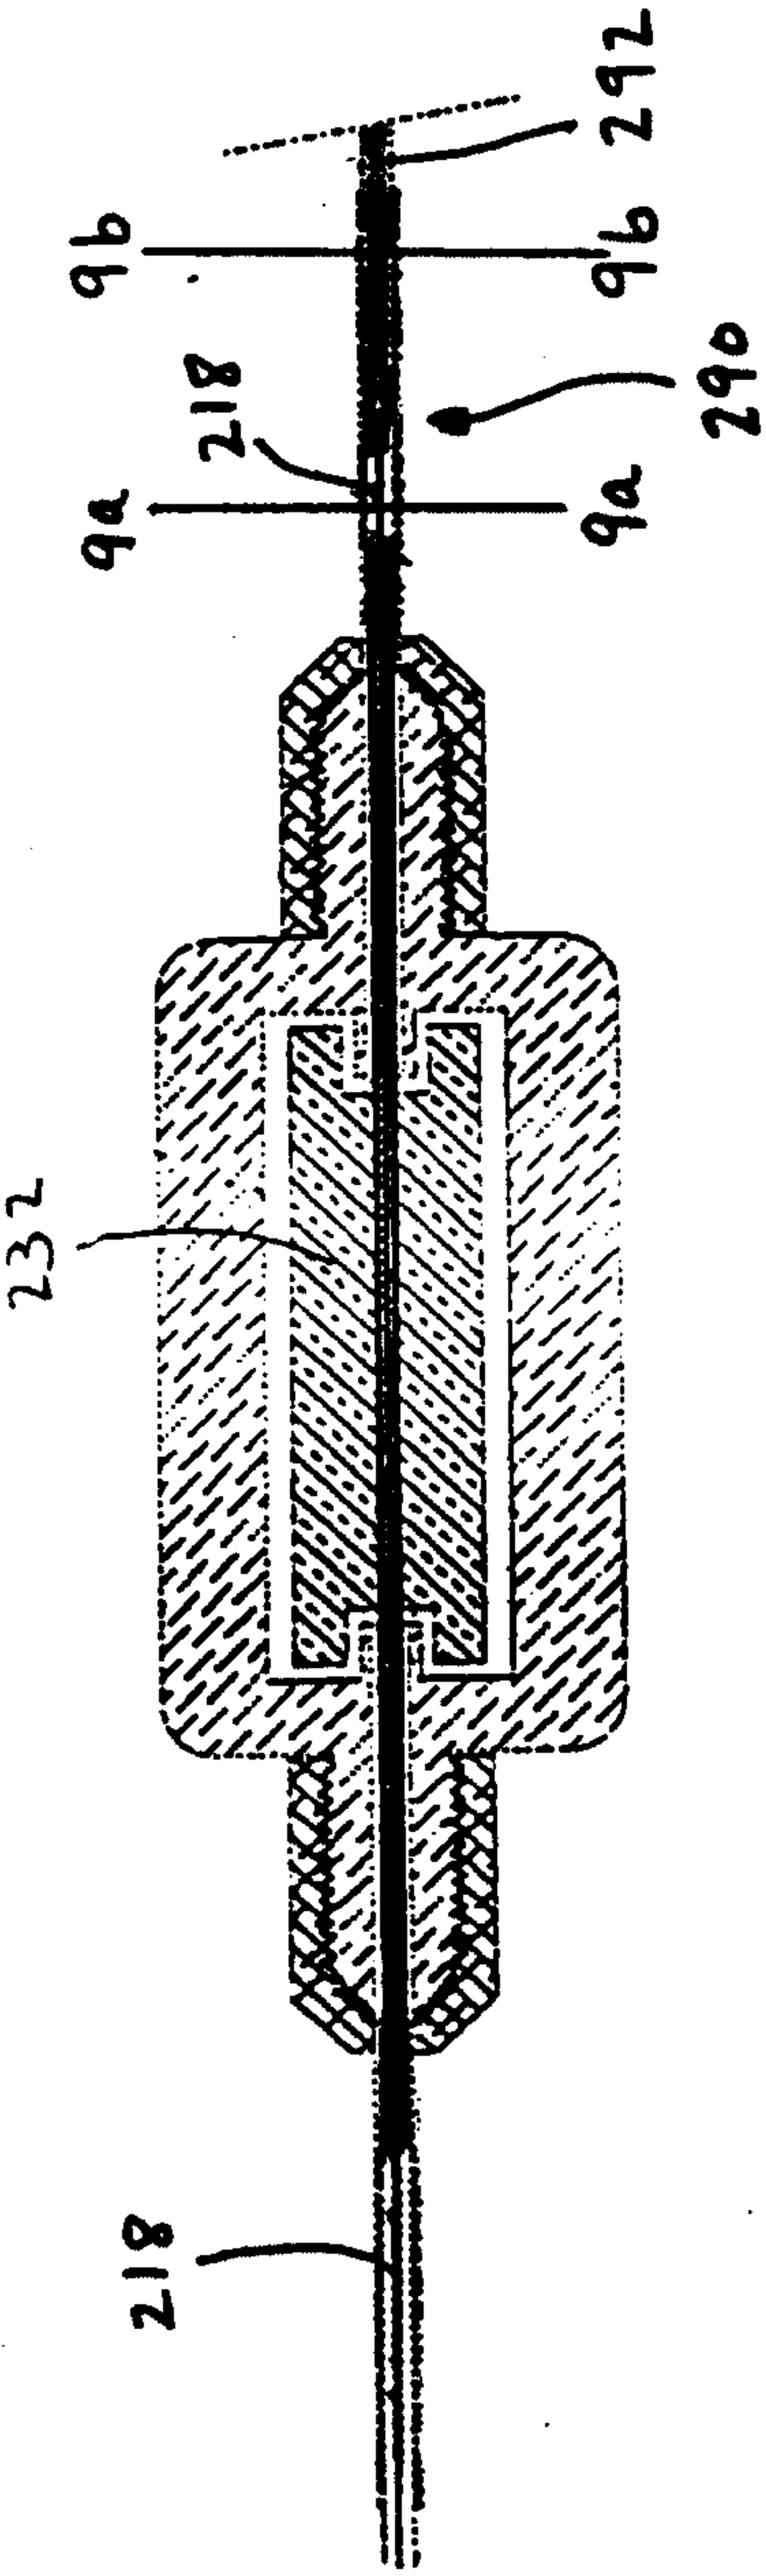

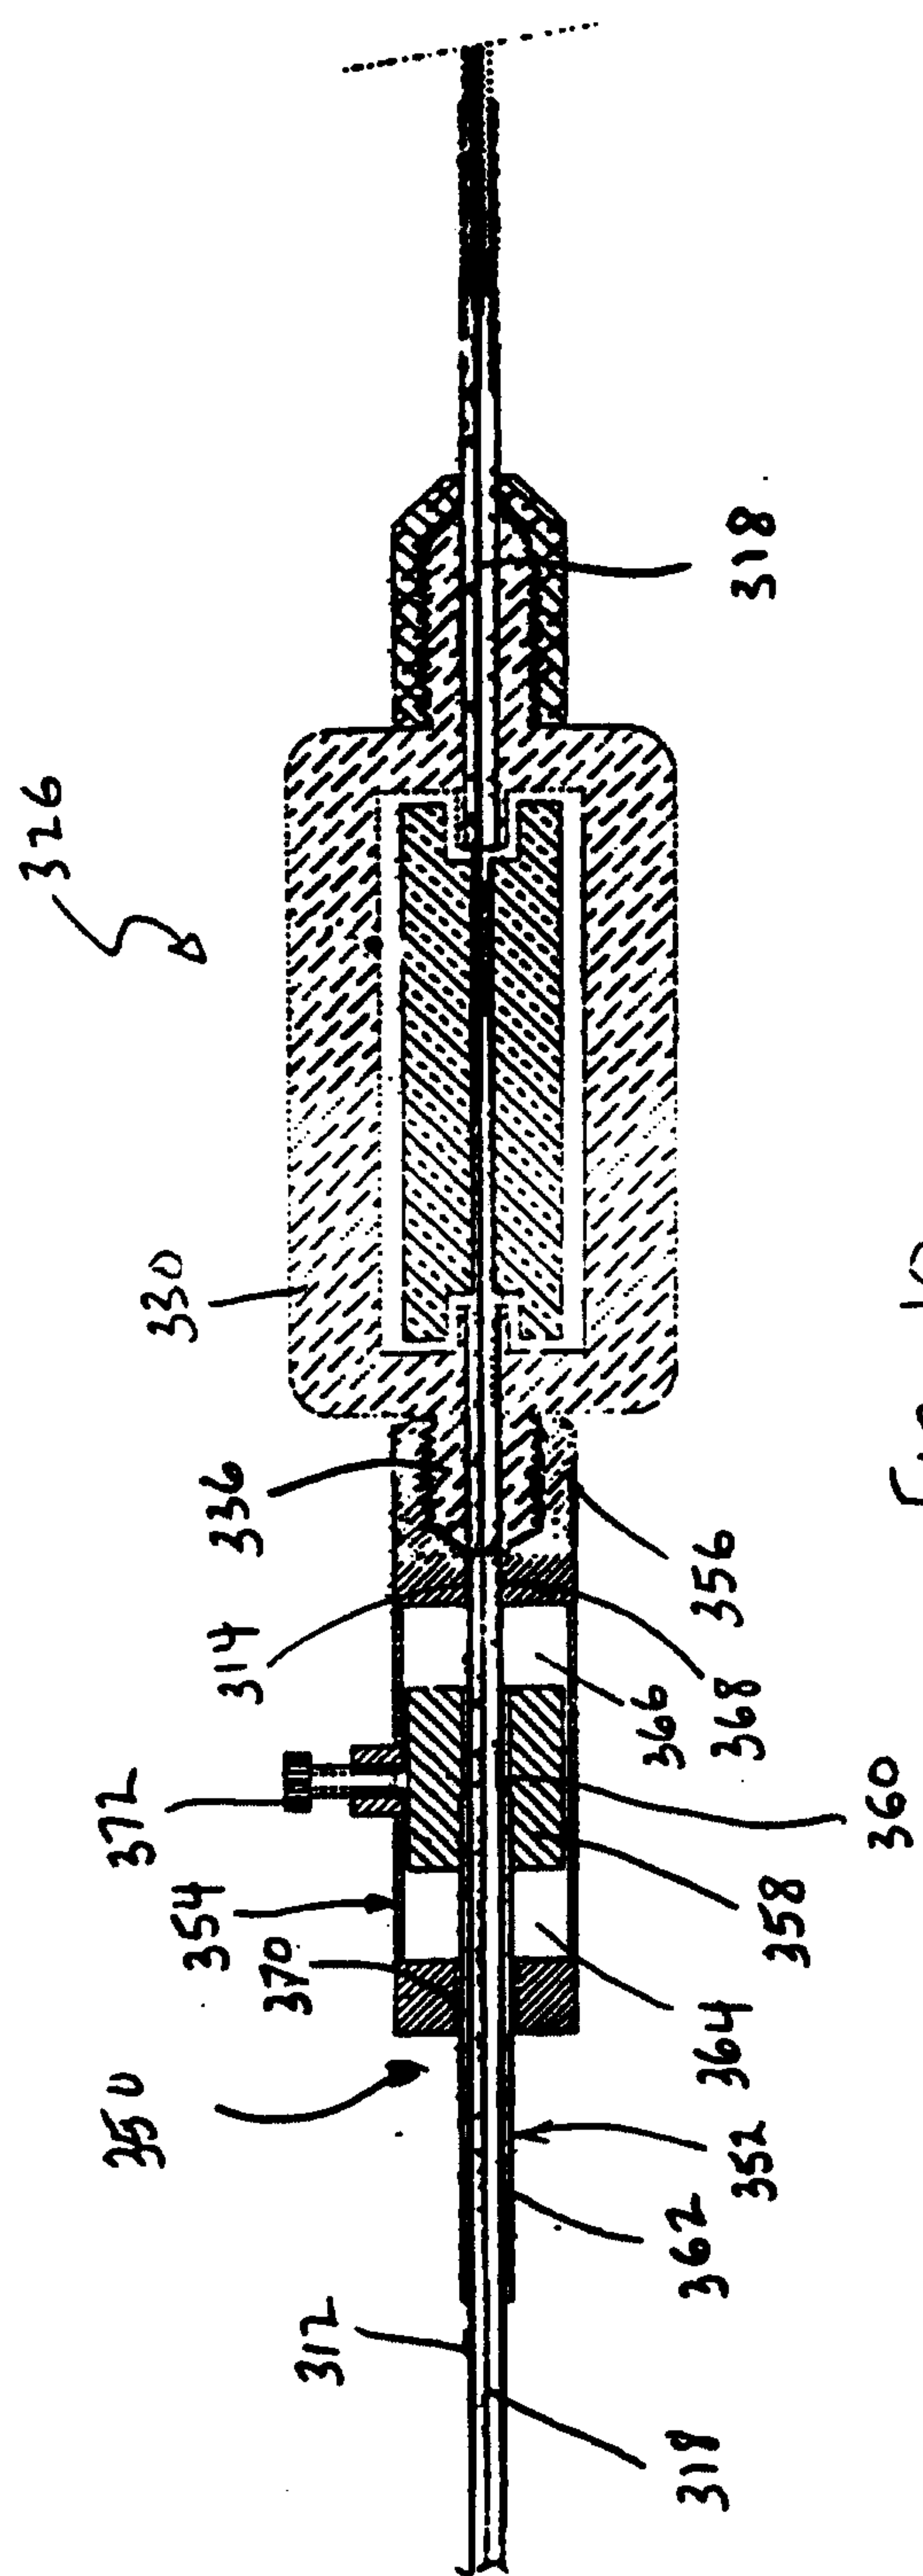


Fig. 10

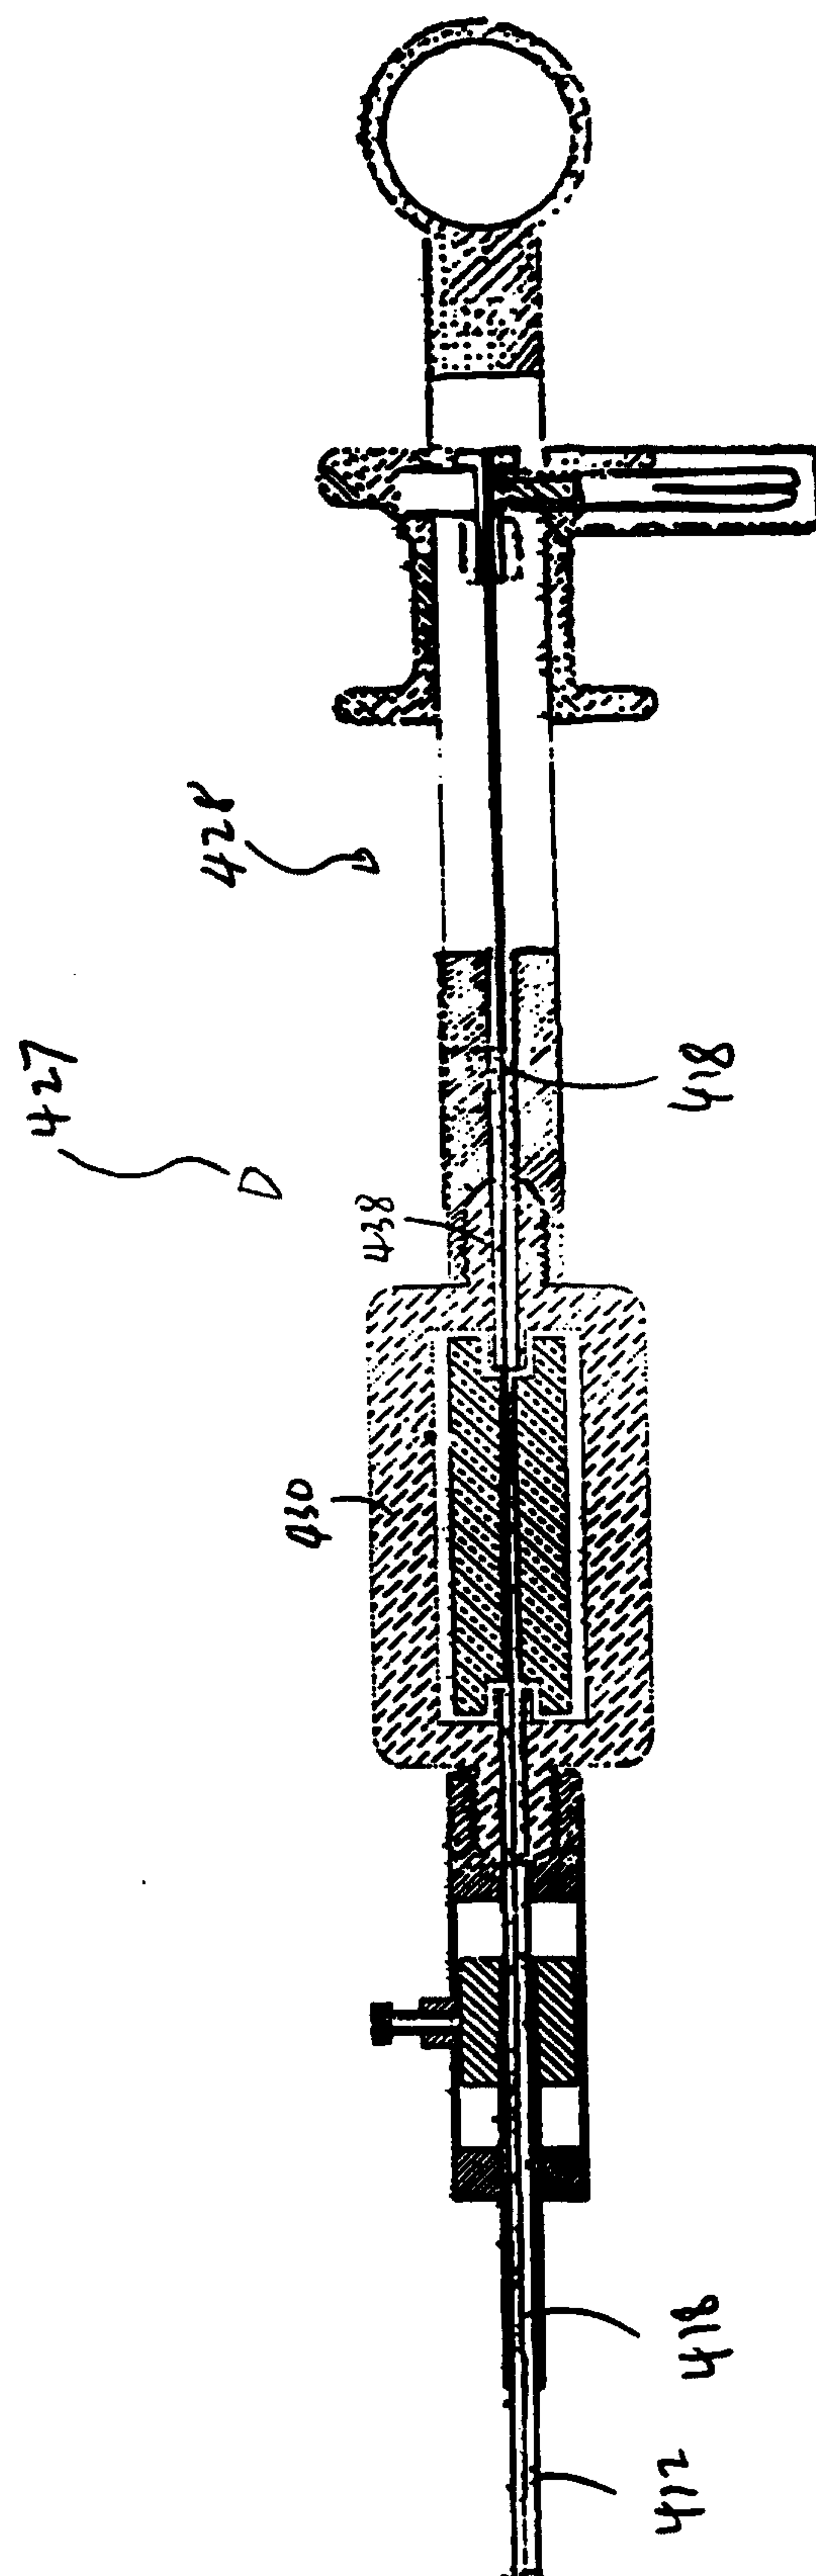


Fig. 11

