



(86) Date de dépôt PCT/PCT Filing Date: 2003/04/24
 (87) Date publication PCT/PCT Publication Date: 2003/11/06
 (45) Date de délivrance/Issue Date: 2012/07/10
 (85) Entrée phase nationale/National Entry: 2004/10/21
 (86) N° demande PCT/PCT Application No.: GB 2003/001747
 (87) N° publication PCT/PCT Publication No.: 2003/090715
 (30) Priorités/Priorities: 2002/04/25 (GB0209402.7);
 2002/05/03 (GB0210174.9); 2002/05/07 (GB0210268.9);
 2002/05/15 (GB0211086.4); 2002/07/17 (GB0216562.9)

(51) Cl.Int./Int.Cl. *A61K 9/14* (2006.01),
A61K 9/16 (2006.01), *A61K 9/72* (2006.01),
A61K 9/00 (2006.01)

(72) Inventeurs/Inventors:
 YORK, PETER, GB;
 SHEKUNOV, BORIS YU, US;
 REHMAN, MAHBOOB UR, GB;
 FEELEY, JANE CATHERINE, GB

(73) Propriétaire/Owner:
 NEKTAR THERAPEUTICS UK LTD, GB

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : **MATERIAUX PARTICULAIRES**
 (54) Title: **PARTICULATE MATERIALS**

(57) **Abrégé/Abstract:**

The present invention relates to active substances in particulate form, to methods for preparing them and to their uses. The present invention provides particulate powders, such as might be of use for delivery using a dry powder inhaler (DPI) or similar delivery device, having properties which may be beneficial to the DPI delivery process.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number
WO 2003/090715 A3

- (51) International Patent Classification⁷: **A61K 9/14, 9/72**
- (21) International Application Number:
PCT/GB2003/001747
- (22) International Filing Date: 24 April 2003 (24.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|-----------|----------------------------|----|
| 0209402.7 | 25 April 2002 (25.04.2002) | GB |
| 0210174.9 | 3 May 2002 (03.05.2002) | GB |
| 0210268.9 | 7 May 2002 (07.05.2002) | GB |
| 0211086.4 | 15 May 2002 (15.05.2002) | GB |
| 0216562.9 | 17 July 2002 (17.07.2002) | GB |
- (71) Applicant (for all designated States except US): **NEKTAR THERAPEUTICS UK LTD** [GB/GB]; 69 Listerhills Science Park, Campus Road, Bradford BD7 1HR (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **YORK, Peter** [GB/GB]; 47 Parish Ghyll Drive, Ilkley LS29 9PR (GB). **SHEKUNOV, Boris, Yu** [GB/US]; 115 Woodland Trace, Aurora, Ohio, OH 44202 (US). **REHMAN, Mahboob, Ur** [GB/GB]; 311 Spen Lane, West Park, Leeds LS16 5BD (GB). **FEELEY, Jane, Catherine** [GB/GB]; 446 Bradford Road, Sandy Lane, Bradford BD15 9LL (GB).
- (74) Agent: **EVANS, Jacqueline, Gail, Victoria**; Greaves Brewster, Indigo House, Cheddar Business Park, Wedmore Road, Cheddar, Somerset BS27 3EB (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report:
11 March 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2003/090715 A3

(54) Title: PARTICULATE MATERIALS

(57) Abstract: The present invention relates to active substances in particulate form, to methods for preparing them and to their uses. The present invention provides particulate powders, such as might be of use for delivery using a dry powder inhaler (DPI) or similar delivery device, having properties which may be beneficial to the DPI delivery process.

Particulate materials

Field of the invention

The present invention relates to active substances in particulate form, to methods for preparing them and to their uses.

5 Background to the invention

Certain pharmaceuticals may be delivered to the nose and/or lungs of a patient by inhalation, using an inhaler device of which there are several known types. Pulmonary delivery by aerosol inhalation has received much attention as an attractive alternative to intravenous, intramuscular, and subcutaneous injection, since this approach eliminates the necessity for injection syringes and needles. Pulmonary
10 delivery also limits irritation to the skin and body mucosa which are common side effects of transdermally, iontophoretically and intranasally delivered drugs, eliminates the need for nasal and skin penetration enhancers (typical components of intranasal and transdermal systems often cause skin irritation/dermatitis), is economically attractive, is amenable to patient self-administration and is often preferred by patients over alternative modes of administration.

15 Of particular interest in the context of the present invention are pulmonary delivery techniques which rely on the inhalation of a pharmaceutical formulation by a patient so that the active drug within the dispersion can reach the distal (alveolar) regions of the lung.

A variety of aerosolization systems have been proposed to disperse pharmaceutical formulations. For example, US patents nos. 5,785,049 and 5,740,794 describe exemplary active powder
20 dispersion devices which utilize a compressed gas to aerosolize a powder. Other types of aerosolization systems include metered dose inhalers (MDIs), which typically have a drug that is stored in a propellant, and nebulizers (which aerosolize liquids using a compressed gas, usually air).

An alternative type of inhaler is known as a dry powder inhaler (DPI) and delivers the drug (or a
25 composition containing the drug, for instance together with a pharmaceutically acceptable excipient) in the form of a dry air-borne particulate powder. DPIs include single use inhalers such as those disclosed in US patents nos. 4,069,819, 4,995,385, 3,991,761 and 6,230,707, and in WO-99/45986, WO-99/45987, WO-97/27892 and GB-1 122 284; multi-single dose inhalers such as those disclosed in

US patents nos. 6,032,666 and 5,873,360 and in WO-97/25086; and multi-dose inhalers containing powder in a bulk powder reservoir such as those disclosed in US patent no. 4,524,769.

Particulate active substances, such as drugs, may be produced by a variety of known methods, including for example crystallisation from solution, anti-solvent precipitation from solution, milling, micronisation, spray drying, freeze drying or combinations of such processes. Also known are particle formation processes which make use of supercritical or near-critical fluids, either as solvents for the substance of interest – as in the process known as RESS (Rapid Expansion of Supercritical Solution – see Tom & DeBenedetti, *J. Aerosol. Sci.*, 22 (5), 555-584 (1991)) – or as anti-solvents to cause the substance to precipitate from another solution – as in the process known as GAS (Gas Anti-Solvent) precipitation – see Gallagher et al, *ACS Symp. Ser.*, 406, p334 (1989).

In general, however, known processes for producing inhalable drugs can often yield particles which give less than satisfactory performance in DPI and similar delivery devices. For example, the dispersion of many prior art dry powder formulations from inhalation devices exhibits a flow rate dependence such that dispersion of the powder from the device increases with the patient's inspiratory effort. Alternatively, many formulations require mixing or blending with larger carrier particles such as lactose in order to deliver the particles effectively to the deep lung.

It would therefore be desirable to provide particulate drugs, and indeed other active substances which may need to be delivered as dry (ie, without a fluid carrier) powders using a DPI or analogous mechanism, which can demonstrate improved performance in such a context, in particular improved dispersibility and aerosol performance in fluids and especially in gases such as air.

Summary of the invention

In one aspect, the present invention provides an active substance in particulate form suitable for administration via a dry powder inhaler, said particulates comprising:

- (a) a volume mean aerodynamic diameter of less than 7 microns;
- (b) a bulk powder density within a range from about 0.1 g/cm³ to about 0.5 g/cm³; and
- (c) a surface-to-volume ratio of at least 2.5 times that of spherical particles of the same volume diameter, wherein the particulates are solid, non-hollow, non-porous particles and the active substance is selected from the group consisting of insulin, pro-insulin, mono-acylated insulin, insulinotropin, and insulin-like growth factor.

The particulate powders might be of use for delivery using a DPI or similar delivery device, having properties which may be beneficial to the DPI delivery process. These properties are illustrated in the examples below.

5 The active substance preferably is prepared using a SEDS™ particle formation process as defined below, which exhibits one or more (preferably two or more, more preferably at least three) of the following characteristics:

10 a) the particles have a low surface energy. In particular, they preferably exhibit a low value for the surface energy related parameter γ_s^D (the dispersive component of surface free energy, as defined

15

20

25

30

in the examples below, which reflects non-polar surface interactions) and/or for the parameter ΔG_A (the specific component of surface free energy of adsorption, again as defined in the examples, which reflects polar surface interactions), for instance when compared to particles of the same active substance prepared using a non-SEDSTM particle formation process and preferably having the same or a smaller volume mean diameter. In the case of the parameter ΔG_A , the value for the active substance of the present invention, for any given polar solvent, is preferably lower by a factor of at least 1.2, preferably at least 1.4 or 1.5, than that for the corresponding non-SEDSTM-produced substance.

b) the particles exhibit a low surface adhesion and/or cohesiveness (which may be related to their surface energy). In particular, they may exhibit lower adhesiveness than those of the same active substance produced by a non-SEDSTM particle formation process.

c) the particles show little or no tendency for aggregation (again this may be related to their surface properties such as surface energy and adhesiveness), or at least form less stable aggregates than those of the same active substance produced by a non-SEDSTM particle formation process.

d) the particles have a volume mean aerodynamic diameter of 7 μm or less, preferably 5 μm or less, more preferably 4 μm or 3 μm or less, such as from 1 to 5 μm , from 1 to 4 μm or from 1 to 2 μm .

e) the particles have a volume mean geometric diameter of 5 μm or less, preferably 4 μm or less, more preferably from 1 to 5 μm , most preferably from 1 to 4 or from 2 to 4 μm .

f) the particles have a particle size distribution (x_{90}) of 10 μm or less, preferably also a value for (x_{98}) of 10 μm or less, preferably also a value for (x_{99}) of 10 μm or less. Typically each of these values will be from 0.5 to 10 μm .

g) when measured using a cascade impactor technique (at low turbulence), the particles have a particle size spread, defined as $(x_{90} - x_{10}) / x_{50}$, of 1.3 or less, preferably of 1.25 or 1.2 or less, and/or a volume mean diameter of 6 μm or less, preferably of 5.5 μm or less, more preferably of 5.2 μm or less. Their particle size spread under these conditions is preferably at least 5 %, more preferably at least 10 %, still more preferably at least 12 %, smaller than that of the same active substance produced by a non-SEDSTM particle formation process, and their volume mean diameter preferably at least 10 %, more preferably at least 15 %, still more preferably at least 20 %, smaller than that of the non-SEDSTM substance.

h) the particles are crystalline, or substantially so, and in particular are more crystalline than those of the same active substance produced by a non-SEDSTM particle formation process. Their X-

ray diffraction patterns thus preferably exhibit reduced diffraction line broadening and/or a higher signal-to-noise ratio than the X-ray diffraction patterns for the same active substance produced by a non-SEDS™ process. The crystalline particles may exhibit reduced crystal lattice imperfections such as strain defects (point defects and/or dislocations) and/or size effects (grains, small-angle boundaries and/or stacking faults), as compared to crystals of the same active substance produced by a non-SEDS™ process – such imperfections tend to be associated with increased line broadening in the X-ray diffraction patterns. In particular, the particles may exhibit a lower crystal strain, and/or a higher crystal domain size, than crystals of the same active substance produced by a non-SEDS™ particle formation process.

- 5
- 10 i) where the active substance is capable of existing in two or more different polymorphic forms, the particles consist of only one such form, with a purity of 99.5 % w/w or greater, preferably of 99.8 % w/w or greater, with respect to the other polymorphic forms. More preferably, the active substance has a higher activation energy for conversion to one or more other polymorphic forms than does a sample of the same active substance prepared using a non-SEDS™ particle formation process.
- 15 j) the particles have a lower surface charge (for instance, mean specific charge) than those of the same active substance produced by a non-SEDS™ particle formation process.
- k) the particles exhibit superior powder flow properties (which may be related to lower surface charge and/or adhesiveness) as compared to those of the same active substance produced by a non-SEDS™ particle formation process; for instance, they may be more free-flowing and/or they may
- 20 deaggregate more efficiently when dispersed in a fluid such as in a DPI device, particularly at low turbulence and/or shear stress levels.
- l) the particles have a bulk powder density which is lower than that of the same active substance produced by a non-SEDS™ particle formation process. They preferably have a bulk powder density of less than 0.5 g/cm³, more preferably of 0.4 g/cm³ or less, most preferably of 0.2 g/cm³ or less.
- 25 m) the particles have a specific surface area which is higher than that of the same active substance produced by a non-SEDS™ particle formation process.
- n) the “shape factor” of the particles, by which is meant the ratio of (a) their measured specific surface area (ie, surface area per unit volume) to (b) their theoretical specific surface area as calculated from their measured diameters assuming spherical particles, is higher than that of the same active
- 30 substance produced by a non-SEDS™ particle formation process. Preferably this shape factor is at least 2, more preferably at least 3, most preferably at least 3.5.

o) the "shape coefficient", $\alpha_{S,V}$, of the particles, determined from image (eg, SEM) analysis and as defined in the following equation:

$$\alpha_{S,V} \cong 6d_s^3 / d_v^3$$

where the mean projected diameter, d_s , is given by:

$$d_s = (4S/\pi)^{1/2} = ((2/\pi)(ab+bc+ca))^{1/2} \text{ and}$$

the volume particle diameter, d_v , is given by

$$d_v = (6V/\pi)^{1/3} = (6abc / \pi)^{1/3}$$

is higher than that of the same active substance produced by a non-SEDS™ particle formation process, preferably at least 1.5 times as great, more preferably at least twice as great. Preferably this shape coefficient is at least 10, more preferably at least 15, most preferably at least 18 or at least 20. It may alternatively be calculated from specific surface area measurements, laser diffraction particle size measurements and the theoretical crystal density, as defined in the following equation :

$$S_v = \alpha_{S,V} / \rho \int_{x_{\min}}^{x_{\max}} x^{-1} q_3(x) dx$$

p) the "aerodynamic shape factor" of the particles, χ , is greater than that for the same active substance produced by a non-SEDS™ particle formation process, preferably at least 20 % greater, more preferably at least 30 % or at least 40 % greater. χ is the ratio of the drag force on a particle to the drag force on the particle volume-equivalent sphere at the same velocity, and may be calculated as described in the following equation:

$$\chi \cong ((C_d(d_s) C_c(d_v)) / (C_d(d_v) C_c(d_s))) (d_s / d_v)^2$$

For a product according to the invention it may be 1.4 or greater, preferably 1.5 or greater, most preferably 1.7 or 1.8 or greater.

q) the particles have reduced surface roughness compared to those of the same active substance produced by a non-SEDS™ particle formation process.

By "non-SEDS™ particle formation process" is meant a particle formation process other than the SEDS™ process defined below, for example one involving micronisation, granulation and/or solvent

crystallisation under sub-critical conditions, and in particular one involving micronisation. In general, comparisons between substances according to the invention and those made by non-SEDS™ techniques are suitably made using in each case particles of the same or a comparable size (eg, no more than 30 % or even than 20 % different in size) and/or shape.

5 Brief description of the drawings

Fig. 1 depicts the percentage dissolution against time for particles processed according to the invention compared to micronised.

Fig. 2 depicts an AFM analysis of material process according to this invention.

10 Fig. 3 is a graph showing RMS surface roughness data for materials processed according to the invention.

Fig. 4 is a schematic of the SEDS process.

Figs. 5 a-f are SEMs of particles produces according to the invention.

Figs. 6 a - c depict X-ray powder patterns illustrating the crystallinity of micronised and samples produced according to the invention.

15 Fig. 7 depicts the heat flow (μW) for both micronised and SEDS™ powders of terbutaline sulphate.

Fig. 8 depicts the strange attractor plots for terbutaline supphate analysed at high (100 seconds per revolution) rotation speed.

Fig. 9 depicts the strange attractor plots for TBS analysed at medium (145 seconds per revolution) rotation speed.

20 Fig. 10 and 11 compare the *in vitro* performance of micronised and SEDS™ processed terbutaline sulphate analysed in a lactose blend as well as pure drug alone.

Detailed description of the invention

It has been found that particulate active substances having one or more of the above properties tend to exhibit improved performance, in particular good dispersibility, in delivery devices such as inhalers, especially dry powder inhalers and more especially passive dry powder inhalers. In particular a correlation has been found between lower particle surface energy and improved DPI performance.

5 Similarly, lower strain, higher crystallinity and higher polymorphic purity have been associated with reduced agglomeration and particle adhesion, and with lower electrostatic charge, again properties which lead to improved DPI performance. Higher specific surface areas, and higher shape factors, have also been found to accompany improved DPI performance. For a given particle size, products according to the invention can demonstrate significantly better performance in passive dry powder
10 inhalers than products made by conventional techniques such as spray drying, freeze drying, granulation and in particular micronisation.

Thus, the active substance of the invention, when used in a passive dry powder inhaler or analogous delivery device (for example the commercially available Clickhaler™), preferably yields a fine particle fraction in the emitted dose of 20 % or greater, preferably 26 % or greater, more preferably 31
15 % or greater, in cases 35 % or 40 % or 50 % or even 55 % or greater. Instead or in addition, its fine particle fraction may be at least 20 % greater, preferably at least 25 % or 30 % or 40 % or 50 % or 60 % or 80 % or 100 % greater, more preferably at least 110 % or 120 % or 130 % or 140 % greater, than that of the same active substance produced by a non-SEDS™ particle formation process and having the same or a smaller volume mean diameter.

20 The active substance is preferably in a substantially (eg, 95 % w/w, preferably 98 % or 99 % w/w or greater) pure form. It preferably contains low levels of residual solvent, for example less than 500 ppm, more preferably less than 200 ppm, most preferably less than 150 or 100 ppm residual solvent, by which is meant solvent(s) which were present at the point of particle formation. Still more preferably the substance contains no detectable residual solvent, or at least only levels below the
25 relevant quantification limit(s). In particular residual solvent levels in the bulk particles, as opposed to merely at their surfaces, are likely to be lower than in particles of the same active substance produced by a non-SEDS™ process.

In cases, the fine particle fraction yielded by an active substance according to the invention, for instance in an Andersen™ cascade impactor, may be up to 150 % or 175 % or even 200 % or 250 % or
30 280 % of that of the same active substance produced by a non-SEDS™ process. Such improvements may often be exhibited even if the particle size of the substance of the invention is significantly greater (eg, at least 30 % or 50 % or 75 % or 90 % greater) than that of the non-SEDS™-produced substance. They can also be exhibited in the absence of dispersion enhancing additives such as surfactants, in the absence of excipient/carrier materials and/or in unimodal (with respect to particle size) systems.

Particular improvements (with respect to substances made by non-SEDS™ processes) may be seen where the active substance is used alone as opposed to in a blend with an excipient such as lactose.

The total emitted dose for a substance according to the invention may also, in this context, be at least 10 % greater, preferably at least 15 % greater, more preferably at least 20 % or 25 % or 30 % greater, than that for the same active substance made by a non-SEDS™ process, either with or without excipient(s). Generally the substances of the invention may deposit on the impactor stages with a narrower distribution (typically weighted more to the lower stages such as 1 to 3) than for those made by non-SEDS™ processes.

At relatively low dispersing pressures, for instance 2 bar or less, an active substance according to the invention has been found capable of yielding a significantly higher proportion of primary particles in the respirable size range than the same active substance produced by a non-SEDS™ process, the latter often tending to form stable (ie, not dispersible at these pressures) agglomerates above the preferred 5 µm limit. This again indicates reduced particle cohesiveness and/or reduced inter-particulate contact area in an active substance according to the invention. The volume mean particle diameter $d_{4,3}$ of the particles of the invention (calculated from cascade impactor data) may thus appear larger than that for non-SEDS™-produced particles when dispersed at pressures of 2 bar and above, but smaller at pressures below 2 bar, for instance 1.8 bar or below, where the dispersion (or deaggregation) ability of the particles plays a more dominant role.

Since the viscous shear stress within the impactor will affect the dispersion behaviour of the particles and hence their apparent volume mean diameter, particles according to the invention exhibit volume mean diameters lower than those of their non-SEDS™ equivalents at lower viscous shear stresses, for instance below 20 Nm⁻² or even up to 30 or 40 Nm⁻².

At such low shear stress levels, particles according to the invention appear to undergo significantly less aggregation, or to form significantly less stable aggregates, than those produced by a non-SEDS™ process which may produce stable aggregates well outside the 5 µm respirable limit. The particles of the invention, at these shear stress levels (or at least at shear stress levels between 5 and 30 Nm⁻² or between 10 and 30 Nm⁻²) can produce a large fraction of primary particles in the respiratory size range, preferably having a volume mean diameter of less than 6 or more preferably less than 5 µm.

Thus, the volume mean particle diameter of an active substance according to the invention, derived from cascade impactor data in the manner defined in the Examples below, may be at least 10 % smaller, preferably at least 15 % or at least 20 % smaller, than that of the same active substance produced by a non-SEDS™ particle formation technique, even where its volume mean diameter

measured at higher dispersions using another technique such as laser diffraction or time-of-flight is greater than (for instance, up to 30 % or 50 % or even 100 % greater than) that of the non-SEDS™ substance. This indicates that for a given size, particles according to the invention can give superior performance on aerosolisation.

- 5 Accordingly, particulate active substances of the present invention may be particularly advantageous for use with passive dry powder inhalers which operate in the lower region of turbulent stresses when dispersing the powder they contain.

In the context of the present invention, a passive dry powder inhaler is a device for use in delivering a powdered active substance to a patient, in which the patient's inspiratory effort is used as the sole
10 powder dispersing means. In other words, the powder is not delivered in a pressurised fluid as in many metered dose inhalers, and nor does its delivery require the use of a rotating impeller or other mechanical means.

A second aspect of the present invention provides a method for selecting a particulate active substance for use in a dry powder inhaler, in particular a passive dry powder inhaler, which method involves the
15 assessment of, and selection on the basis of, one or more (preferably two or more, more preferably three or more) of the above described properties of active substances according to the first aspect of the invention.

A third aspect provides the use of an active substance according to the first aspect, in a dry powder inhaler and in particular in a passive dry powder inhaler, for the purpose of achieving improved active
20 substance delivery. Improved delivery in this context may involve improved powder dispersion, more accurate dosage delivery, more consistent dosage delivery and/or a higher fine particle fraction in the emitted dose, in particular at relatively low dispersing pressures such as 2 bar or less or 1.8 bar or less.

Particle surface energies may be measured using inverse gas chromatography (IGC), for instance using a gas chromatograph from the Hewlett Packard™ series. Surface energy measurements ideally take
25 account of the dispersive component of the surface free energy, γ_s^D , the specific component of the surface free energy of adsorption, ΔG_A , the acid-base parameters and/or the total (Hildebrand) solubility parameter, which takes into account dispersive, polar and hydrogen-bonding interactions on particle surfaces and thus reflects the inter-particle adhesion. The dispersive component γ_s^D may be assessed using non-polar probes such as alkanes, and the specific component ΔG_A may be assessed
30 using data from both polar and non-polar probes, the former having both dispersive and specific components of surface free energy of adsorption.

Thus, gas chromatography measurements suitably involve the use of both non-polar and polar probes, examples of the former being alkanes such as pentane, hexane, heptane, octane and nonane and of the latter being diethyl ether, toluene, acetone, ethyl acetate, chloroform, dioxane, dichloromethane and tetrahydrofuran.

- 5 In the case of the dispersive component γ_s^D , the value for the active substance of the present invention is preferably at least 5 % lower, more preferably at least 10 % lower, most preferably at least 12 % or 15 % or 20 % or 30 % lower, than that for the same active substance made by a non-SEDS™ particle formation process.

- 10 In the case of the specific component ΔG_A , the value for the active substance of the present invention is preferably at least 10 % lower, more preferably at least 15 % lower, most preferably at least 20 % or 30 % or 50 % or 80 % lower, than that for the same active substance made by a non-SEDS™ particle formation process.

- 15 In the case of the Hildebrand solubility parameter δ , the value for the active substance of the present invention is preferably at least 5 % lower, more preferably at least 8 % lower, most preferably at least 10 % lower, than that for the same active substance made by a non-SEDS™ particle formation process.

- 20 Overall, particulate active substances according to the present invention tend to have lower surface activity (for example with respect to solvent adsorption) and greater surface stability than those produced by non-SEDS™ particle formation processes, with a more ordered surface structure. Their lower surface energy may be manifested by a lower value for K_A and/or K_D , for instance as measured in Example 2, indicative of weaker acidic and/or basic interactions respectively at the particle surfaces. For instance, their K_A may be at least 5 %, preferably at least 10 % or at least 12 %, lower than that of the same active substance made by a non-SEDS™ particle formation process, and/or their K_D may be at least 30 %, preferably at least 50 % or at least 60 % lower.

- 25 The specific surface energy E_s of a particulate active substance according to the invention, calculated as per the following equation:

$$E_s = 0.683 (\delta^2 / \alpha_{s,v}^{2/3}) \Omega^{1/3}$$

where δ is the Hildebrand solubility parameter, $\alpha_{s,v}$ is the shape coefficient, and Ω is the molecular volume

is preferably at least 10 %, more preferably at least 20 %, still more preferably at least 30 % or 40 %, lower than that of the same active substance produced by a non-SEDS™ particle formation process, and might typically be 100 mJ/m² or lower, more preferably 90 or 80 or 70 mJ/m² or lower.

A lower aggregation tendency in particles according to the invention may be reflected in a lower theoretical aggregate tensile strength σ , which may be calculated as described in the following equation:

$$\sigma \cong 15.6 (\rho_B / \rho_C)^4 W/d_s$$

where ρ_B and ρ_C are the bulk density and particle crystal density, respectively, and W is the work of adhesion. Preferably the ratio of σ for particles of the invention to that for particles of the same active substance produced by a non-SEDS™ process is 0.8 or lower, more preferably 0.5 or lower, most preferably 0.3 or 0.2 or 0.1 or lower, especially when polar interactions are taken into account.

Similarly, the aerodynamic stress required to disperse aggregates of particles according to the invention (for instance, calculated from cascade impactor measurements, as described in the Examples below) is typically lower than that required to disperse aggregates of the same active substance prepared by a non-SEDS™ particle formation process. Ideally the ratio of the two stresses (SEDS™ product : non-SEDS™ product) is 0.8 or lower, more preferably 0.5 or lower, most preferably 0.3 or 0.2 or lower. Inter-particle aggregation can be particularly relevant to DPI performance since such aggregates tend to survive the pre-separation stage. Aggregation tendencies can also be relevant when an active substance is blended with a carrier such as lactose, where dispersion may depend on the break-up of active-carrier aggregates – again, typically, substances according to the invention may tend to form less stable aggregates with carrier particles.

Particle sizes may be measured for instance using (a) an AeroSizer™ time-of-flight instrument (which gives a mass mean aerodynamic equivalent particle diameter, MMAD, measured at Reynolds numbers greater than 1) or (b) a laser diffraction sensor such as the Helos™ system (which provides a geometric projection equivalent mass median diameter). Volume mean aerodynamic and geometric diameters respectively may be obtained from these measurements using commercially available software packages.

The aerodynamic diameter d_A of a particulate active substance according to the invention, measured according to the examples below, is preferably 2 μm or below, more preferably 1.8 μm or below, most preferably 1.6 μm or below.

Particle size distributions may be measured using laser diffraction and/or time-of-flight measurements, for instance using an AeroSizer™ time-of-flight instrument equipped with an AeroDisperser™ (TSI Inc, Minneapolis, USA) and/or a Helos™ laser diffraction sensor with Rodos™ dry powder air dispersion system (Sympatec GmbH, Germany). Volume particle size distributions based on
5 aerodynamic equivalent particle diameters are preferred. Ideally time-of-flight measurements are gathered at high shear forces, high deaggregation levels and/or low feed rates, in order to facilitate production of primary aerosol particles.

Particle size distribution (PSD) data, in particular obtained by laser diffraction measurements, may also be used to calculate the shape coefficient $\alpha_{s,v}$ of particles in the manner described above.

10 An active substance according to the invention will suitably have a cumulative particle size distribution such that more than 98 % of the particles are within the respirable particle size range from 0.5 to 10 μm .

Scanning electron microscopy (SEM) may also be used to measure characteristic particle dimensions and thus characteristics such as particle aspect ratios and shape factors.

15 Crystallinity of a particulate material may be determined using X-ray powder diffraction, preferably high resolution X-ray powder diffraction such as using a synchrotron radiation source. Using commercially available software, X-ray diffraction data may be employed to assess the distribution of crystalline domain sizes and the degree of strain in the crystals.

20 X-ray diffraction line broadening can provide an indication of crystal lattice imperfections such as strain defects (point defects or dislocations) and size effects (grains, small-angle boundaries or stacking faults). Line broadening may be manifested for instance by an increased peak width (eg, full width at half maximum height, FWHM) and/or an increased integral breadth β^* (the width of rectangle having the same area A and height I as the observed line profile, ie, $\beta^* = A/I$), for one or more of the diffraction peaks.

25 Preferably, for at least one peak in its X-ray diffraction pattern (ideally for two or more, even three or more, peaks), the active substance of the invention exhibits a FWHM which is at least 20 % lower, more preferably at least 25 % lower, most preferably at least 30 % or 40 % or 50 % lower, than that of the corresponding peak (ie, the peak for the same crystal plane) in the X-ray diffraction pattern of the same substance produced by a non-SEDS™ particle formation process. The FWHM of at least one,
30 ideally of at least two or three or even of all, peaks is preferably 0.1° or less, more preferably 0.09° or less, most preferably 0.08° or less.

For at least one peak in its X-ray diffraction pattern (ideally for two or more, even three or more, peaks), the active substance of the invention preferably exhibits an integral breadth β^* which is at least 20 % lower, more preferably at least 25 % lower, most preferably at least 30 % or 40 % or 45 % lower, than that of the corresponding peak in the X-ray diffraction pattern of the same substance produced by a non-SEDSTM particle formation process. The integral breadth of at least one, ideally of at least two or three or even of all, peaks is preferably 0.11° or less, more preferably 0.1° or less.

A reduced level of crystal lattice imperfections, in a particulate product according to the invention, may also be manifested by a shift in position, towards higher 2θ values (typically a shift of 0.0005° or more, such as of from 0.0005 to 0.005 or from 0.001 to 0.003°, of one or more of the diffraction peaks. This may be associated with a decrease in crystal d -spacing ($\Delta d/d$) of 0.5 % or more, typically 1 % or more, such as from 1 to 2 %, in the product of the invention, and with a corresponding reduction in crystal volume, $\Delta V/V$, of 0.5 % or more, typically 1 % or more, such as from 1 to 2 %.

Levels of crystal lattice imperfections may also be assessed with reference to the crystal domain sizes and/or the crystal strain. Domain sizes are typically significantly greater for products according to the invention, compared to the same active substance produced using a non-SEDSTM particle formation process, and crystal strain is typically significantly lower. Such parameters may be calculated from X-ray diffraction patterns, for instance by analysing the diffraction peak profiles as a convolution of Cauchy and Gauss integral breadths containing size and strain (distortion) contributions, as known in the art. This allows calculation of for example surface-weighted (D_S) and/or volume weighted (D_V) domain sizes, and of a mean-square (Gaussian) strain, ϵ , which is the total strain averaged over infinite distance.

Preferably, the active substance of the invention exhibits a surface-weighted domain size D_S which is at least 15 % higher, more preferably at least 20 % higher, most preferably at least 30 % or 35 % higher, than that of the same substance produced by a non-SEDSTM particle formation process. It preferably exhibits a volume-weighted domain size D_V which is at least 10 % higher, more preferably at least 15 % higher, most preferably at least 20 % or 25 % higher, than that of the same substance produced by a non-SEDSTM particle formation process. D_S may for example be 400 Å or greater, and D_V may be 700 Å or greater, in an active substance according to the invention.

Preferably the active substance of the invention exhibits a total strain ϵ which is at least 30 % lower, more preferably at least 35 % lower, most preferably at least 40 % or 45 % lower, than that of the same substance produced by a non-SEDSTM particle formation process. Its total strain may for instance be 0.7×10^{-3} or lower, preferably 0.6×10^{-3} or lower, most preferably 0.5×10^{-3} or lower.

Domain size and strain may alternatively be calculated from the X-ray diffraction data by Le Bail diffraction profile fitting. Using such computational methods, an active substance according to the invention preferably exhibits a volume-weighted domain size which is at least 50 % higher, more preferably at least 80 % higher, most preferably at least 90 % higher, than that of the same substance produced by a non-SEDS™ particle formation process. It preferably exhibits a strain which is at least 40 % lower, more preferably at least 50 % lower, most preferably at least 60 % lower, than that of the same substance produced by a non-SEDS™ particle formation process.

An active substance according to the invention may have an amorphous content of less than 5 % w/w, preferably less than 2 % w/w, more preferably less than 1 or even than 0.5 or 0.2 % w/w. Ideally its amorphous phase content is at least 10 times, preferably at least 20 or even 40 or 50 times, lower than that of the same active substance produced by a non-SEDS™ particle formation process.

A higher bulk crystallinity, in an active substance according to the invention, may be manifested by a lower moisture uptake at any given temperature and humidity, and/or by a thermal activity profile with no exothermic or endothermic peaks, for instance as measured in the examples below.

Polymorphic purity may be assessed for instance using melting point data (eg, differential scanning calorimetry) or more preferably using X-ray powder diffraction (for instance the small-angle X-ray scattering (SAXS) technique) to detect polymorphic transitions during heating, based on the diffraction peaks characteristic of the polymorphs.

An active substance according to the invention is preferably more stable, with respect to polymorphic transitions, than a sample of the same active substance prepared using a non-SEDS™ particle formation process; it will thus typically have a higher activation energy for conversion to one or more other polymorphic forms than will the non-SEDS™ sample for the same polymorphic transition. More preferably, when heated at a rate of 10 °C per minute or greater at atmospheric pressure, the active substance of the invention will not alter its polymorphic form. Instead or in addition, the time required for formation of one or more other polymorphs of the active substance, calculated for instance from X-ray diffraction and thermal analysis data, is preferably 80 seconds or greater, more preferably 90 seconds or greater. The active substance preferably contains no detectable seed nuclei of polymorphic forms other than that desired to be present.

Enhanced crystallinity and/or polymorphic purity in active substances according to the invention are believed to contribute to an overall higher physical stability as compared to the same active substances prepared using non-SEDS™ particle formation techniques.

Surface electric charge may be assessed as specific charge. The electrostatic charge carried by a particulate material may be measured for instance in a Faraday well. Alternatively the particulate material may for instance be subjected to triboelectrification by agitating it against an electrically conductive contact surface, for example in a turbula mixer or cyclone separator, and its charge and mass determined both before and after triboelectrification, suitably using an electrometer, to give a value for specific charge. This process may also be used to give a measure of the adhesion properties of the particles, by measuring the mass of the original sample and that removable from the mixer/separator in which it was agitated and calculating the weight percentage of the sample lost by adhesion to the contact surface(s) of the vessel.

Adhesion may also be assessed using a simple test of the type described in Examples 3 below, in which a sample is agitated in a container, and the non-adhering material then removed from the container and weighed, to allow calculation of the percentage of the original sample adhering to the container surfaces.

By way of example, an active substance according to the invention preferably has a mean specific charge of from -5 to $+5$ nCg^{-1} , more preferably from -1 to $+1$ nCg^{-1} , and/or a mean specific charge which is at least 50 %, preferably at least 70 %, most preferably at least 80 % or 90 % or 95 %, lower than that of the same active substance produced by a non-SEDS™ particle formation process.

Following triboelectrification using a Turbula™ mixer, an active substance according to the invention preferably has a mean specific charge which is at least 30 % lower, more preferably at least 50 % lower, most preferably at least 75 % or 80 % or 90 % or 95 % lower, than that of the same active substance produced by a non-SEDS™ process. Following triboelectrification using a cyclone separator, an active substance according to the invention preferably has a mean specific charge which is at least 30 % lower, more preferably at least 50 % lower, most preferably at least 75 % or 80 % or 85 % lower, than that of the same active substance produced by a non-SEDS™ process.

The mean adhesion fraction (ie, the fraction of adhered material) assessed in the manner described above following triboelectrification in a turbula mixer, is preferably 20 % w/w or less, more preferably 10 % w/w or less, most preferably 5 % or 2 % w/w or less, for an active substance according to the invention. It is preferably at least 50 % lower, more preferably at least 75 % lower, most preferably at least 80 % or 90 % lower, for an active substance according to the invention than for the same active substance produced by a non-SEDS™ process.

The mean adhesion fraction, assessed in the manner described above following triboelectrification in a cyclone separator, is preferably 20 % w/w or less, more preferably 10 % w/w or less, most preferably

5 % w/w or less, for an active substance according to the invention. It is preferably at least 40 % lower, more preferably at least 50 % lower, most preferably at least 60 % or 65 % lower, for an active substance according to the invention than for the same active substance produced by a non-SEDS™ process.

- 5 In cases, an active substance produced by a non-SEDS™ process may exhibit at least 5 times as much adhesion as the same active substance produced by a SEDS™ process, preferably at least 8 times or at least 10 times or at least 15 times that of the SEDS™ substance.

10 The adhesion force per unit area to a highly oriented pyrolytic graphite substrate assessed using atomic force microscopy in the manner described above is preferably less than 60% of, more preferably less than 30% of, most preferably less than 15% of that for particles of the same active substance produced by a non-SEDS™ process.

Powder flow properties may be assessed by analysing the dynamic avalanching behaviour of a particulate product, such as using an Aeroflow™ powder avalanching apparatus (Amherst Process Instruments, Amherst, USA), for instance as described in the Examples below.

- 15 Superior powder flow properties, in an active substance according to the invention, may be manifested by a strange attractor plot which is closer to the origin and/or has a smaller spread than that for the same active substance produced by a non-SEDS™ process. A strange attractor plot may be obtained, again as described in the examples below, from powder avalanching data (in particular, time intervals between avalanches) using the method of Kaye et al, *Part. Charact.*, 12 (1995), 197-201. Substances
20 according to the invention tend to exhibit lower mean avalanche times (for example at least 5 % or even 8 % lower at 100 s/rev, at least 10 % or even 14 % lower at 145 s/rev) than corresponding products of non-SEDS™ processes. They may show a lower irregularity of flow (for example at least 5 % or even 8 % lower at 100 s/rev, at least 8 % or even 10 % lower at 145 s/rev) than corresponding non-SEDS™ products, irregularity of flow being assessed in terms of avalanche scatter.

- 25 The bulk powder density of an active substance according to the invention may be measured in conventional manner, for example using a volumetric cylinder, and is preferably at least 20 % lower, more preferably at least 50 % lower, most preferably at least 60 % or 70 % or 80 % lower, than that of the same active substance produced by a non-SEDS™ process. Its aerosolised powder bulk density is preferably at least 10 %, more preferably at least 20 %, lower. It has been found that active substances
30 according to the invention may, surprisingly, have both relatively low bulk powder densities yet also good powder flow properties in particular lower cohesiveness and adhesiveness and/or a lower tendency to accumulate static charge.

Specific surface area of particles may be determined by conventional surface area measuring techniques such as low temperature physical adsorption of nitrogen (eg, BET nitrogen adsorption using a Surface Area Analyser Coulter™ SA 3100 (Coulter Corp., Miami, USA)). Preferably the specific surface area of a particulate active substance according to the invention is at least 1.2 or 1.5 times, more preferably at least twice, still more preferably at least 3 times, most preferably at least 4 or 4.5 times, that of the same active substance produced by a non-SEDS™ process. Typically an active substance according to the invention might have a specific surface area of at least 10 m²/g, preferably at least 15 or 20 or 25 m²/g, and/or a surface-to-volume ratio of at least twice, preferably at least 2.5 times, that of spherical particles of the same volume diameter.

The shape factor f may suitably be calculated as $f = S_v / S_v^*$, where S_v is the experimentally determined (eg, by BET nitrogen adsorption) specific surface area and S_v^* the specific surface area calculated from particle size measurements (eg, those obtained by laser diffraction) assuming spherical particles. An active substance preferably has a shape factor f which is at least 20 %, more preferably at least 30 %, larger than that of the same active substance (suitably having the same or a comparable crystal shape and particle size) produced by a non-SEDS™ particle formation process. Thus, particles of an active substance according to the invention preferably have a higher available surface area than particles of the same active substance made by a non-SEDS™ process – where for instance the particles are in the form of platelets or needles, those of the present invention may thus be thinner than those produced by non-SEDS™ techniques.

A typical shape factor f for a particulate active substance according to the invention might for instance be 3 or greater, preferably 3.2 or greater, more preferably 3.5 or greater, most preferably 3.7 or greater.

A higher specific surface area and/or shape factor appears, in an active substance according to the invention, to accompany improved dissolution performance as compared to the same active substance produced by a non-SEDS™ particle formation process. In particular, a product according to the invention may dissolve more rapidly in any given solvent and with greater efficiency, for instance with at least 40 % higher dissolution, more preferably at least 50 % higher dissolution than the non-SEDS™ product after a period of 150 or even 300 minutes, ideally the SEDS™ product achieving complete dissolution after a period of 50 minutes or less. Such improved dissolution is particularly advantageous for poorly soluble (generally poorly aqueous soluble) materials.

Surface roughness may be assessed using AFM analysis; reduced roughness may be indicated for instance by a reduced RMS roughness. Particles of an active substance according to the invention preferably have a RMS roughness, measured using AFM, of 0.5 nm or less, preferably 0.3 or 0.2 nm

or less. Their RMS roughness is preferably at least 70 % lower, more preferably at least 80 % or 90 % lower, than that of the same active substance prepared by a non-SEDSTM particle formation process.

Deposition properties of an active substance, in particular fine particle fractions, may be measured using the cascade impactor technique, for instance using an AndersenTM-type cascade impactor
5 (Copley Scientific Ltd, Nottingham, UK). Such devices imitate particle deposition in the lungs from a dry powder inhaler. High fine particle fractions are preferred, with respect to delivery to stages 1 to 5 of the impactor. Thus, fine particle fractions are preferably measured as the mass of particles having an efficient cut-off diameter (ECD) of between 0.5 and 5 μm , for instance as described in the examples below. From the cascade impactor data, an apparent volume mean diameter may also be calculated as
10 known in the art.

HPLC may be used for quantitative analysis of the active substance content in the material deposited at each stage of the impactor and if applicable in associated apparatus such as pre-separator, throat or mouthpiece.

For the purpose of assessing fine particle fraction, the active substance of the invention may be
15 blended with a suitable excipient, preferably a pharmaceutically acceptable excipient suitable for delivery to the lung, a common example being lactose. Such a blend might typically contain from 1 to 10 % w/w of the active substance, preferably from 2 to 5 % w/w. Again because of the advantageous properties of the active substance of the invention, for instance its lower surface energy and adhesiveness, it tends to be better able to detach from the excipient, under these conditions, than the
20 same active substance prepared by a non-SEDSTM process; in other words, it forms less strong aggregates with the excipient.

The active substance of the invention is preferably in the form of solid (eg, as opposed to hollow, porous or at least partially fluid-containing) particles. It is preferably in a crystalline or semi-crystalline (as opposed to amorphous) form, more preferably crystalline.

25 In particular it preferably has a crystalline form which is significantly longer in one dimension than in at least one other dimension (ie, it has a relatively high aspect ratio); this embraces for example needle-like crystals and also, potentially, wafer-, blade- or plate-like crystals (which are longer in two dimensions than in the third) and elongate prism-shaped crystals. These have been found to show better DPI performance than correspondingly sized particles of other shapes. Needle-like (acicular) or
30 platelet-shaped crystals may be particularly preferred.

In the above discussion, "significantly" longer means at least 5 %, preferably at least 10 % or 20 % or 30 %, greater than the length of the lower of the two parameters being compared.

As discussed above, particles according to the invention if in the form of platelets or needles are typically thinner than those of the same active substance produced by a non-SEDS™ process (as reflected by for instance a difference in shape factors, shape coefficients and specific surface areas).
5 When examined for example by SEM, the particles of the invention can often be seen to have less rounded edges and corners and/or to be less fragmented than those of the non-SEDS™ substance in particular a micronised substance – this may be reflected in a lower surface energy, lower particle adhesion and/or lower tendency for aggregation in the product of the invention.

10 In general, the behaviour of an active substance according to the present invention on aerosolisation, which in turn affects its suitability for respiratory drug delivery and in particular for DPI delivery, may be assessed and characterised using the techniques outlined in the examples below. These can involve assessing the size, surface characteristics, aerodynamic properties, deagglomeration behaviour and/or solid state properties of the active substance particles. Such techniques may be used for instance in the
15 selection method of the second aspect of the invention.

By "active substance" is meant a substance capable of performing some useful function in an end product, whether pharmaceutical, pesticidal or whatever. The term is intended to embrace substances whose function may be as an excipient for another substance.

The active substance may be a single active substance or a mixture of two or more. It may be
20 monomeric, oligomeric or polymeric, organic (including organometallic) or inorganic, hydrophilic or hydrophobic. It may be a small molecule, for instance a synthetic drug like paracetamol, or a macromolecule such as a protein or peptide (including enzymes, hormones, antibodies and antigens), nucleotide, nucleoside or nucleic acid. Other potential active substances include vitamins, amino acids, lipids including phospholipids and aminolipids, carbohydrates such as polysaccharides, cells
25 and viruses.

The active substance preferably comprises (more preferably is) a pharmaceutically or nutraceutically active substance, or a pharmaceutically or nutraceutically acceptable excipient, or a mixture of two or more thereof. More preferably it is a pharmaceutically active substance or mixture thereof which is suitable for delivery by inhalation (which term includes nasal and/or oral inhalation), although in
30 general it may be any active substance which is deliverable as a dry powder, ideally using a passive dry powder inhaler. Many other active substances, whatever their intended function (for instance, herbicides, pesticides, foodstuffs, imaging agents, dyes, perfumes, cosmetics and toiletries, detergents,

coatings, products for use in the ceramics, photographic or explosives industries, etc..) are embraced by the present invention.

Of particular interest for delivery by inhalation are pharmaceutically active substances which need to be delivered systemically and require rapid onset of action. According to a preferred embodiment, formulations are provided which achieve a maximum concentration of a pharmaceutically active substance, C_{max} , within 1 hour of administration, preferably within 30 minutes, and most preferably within 15 minutes. This time to achieve maximum concentration of the active substance is referred to herein as T_{max} .

Examples of pharmaceutically active substances which may be delivered by inhalation include β_2 -agonists, steroids such as glucocorticosteroids (preferably anti-inflammatories), anti-cholinergics, leukotriene antagonists, leukotriene synthesis inhibitors, pain relief drugs generally such as analgesics and anti-inflammatories (including both steroidal and non-steroidal anti-inflammatories), cardiovascular agents such as cardiac glycosides, respiratory drugs, anti-asthma agents, bronchodilators, anti-cancer agents, alkaloids (eg, ergot alkaloids) or triptans such as can be used in the treatment of migraine, drugs (for instance sulphonyl ureas) useful in the treatment of diabetes and related disorders, sleep inducing drugs including sedatives and hypnotics, psychic energizers, appetite suppressants, anti-arthritis, anti-malarials, anti-epileptics, anti-thrombotics, anti-hypertensives, anti-arrhythmics, anti-oxidants, anti-depressants, anti-psychotics, anxiolytics, anti-convulsants, anti-emetics, anti-infectives, anti-histamines, anti-fungal and anti-viral agents, drugs for the treatment of neurological disorders such as Parkinson's disease (dopamine antagonists), drugs for the treatment of alcoholism and other forms of addiction, drugs such as vasodilators for use in the treatment of erectile dysfunction, muscle relaxants, muscle contractants, opioids, stimulants, tranquilizers, antibiotics such as macrolides, aminoglycosides, fluoroquinolones and beta-lactams, , vaccines, cytokines, growth factors, hormonal agents including contraceptives, sympathomimetics, diuretics, lipid regulating agents, antiandrogenic agents, antiparasitics, anticoagulants, neoplastics, antineoplastics, hypoglycemics, nutritional agents and supplements, growth supplements, antienteritis agents, vaccines, antibodies, diagnostic agents, and contrasting agents and mixtures of the above (for example the asthma combination treatment containing both steroid and β -agonist). More particularly, the active agent may fall into one of a number of structural classes, including but not limited to small molecules (preferably insoluble small molecules), peptides, polypeptides, proteins, polysaccharides, steroids, nucleotides, oligonucleotides, polynucleotides, fats, electrolytes, and the like.

Specific examples include the β_2 -agonists salbutamol (eg, salbutamol sulphate) and salmeterol (eg, salmeterol xinafoate), the steroids budesonide and fluticasone (eg, fluticasone propionate), the cardiac glycoside digoxin, the alkaloid anti-migraine drug dihydroergotamine mesylate and other alkaloid ergotamines, the alkaloid bromocriptine used in the treatment of Parkinson's disease, sumatriptan,

WO 03/090715

PCT/GB03/01747

rizatriptan, naratriptan, frovatriptan, almotriptan, zolmatriptan, morphine and the morphine analogue
 fentanyl (eg, fentanyl citrate), glibenclamide (a sulphonyl urea), benzodiazepines such as vallium,
 triazolam, alprazolam, midazolam and clonazepam (typically used as hypnotics, for example to treat
 insomnia or panic attacks), the anti-psychotic agent risperidone, apomorphine for use in the treatment
 5 of erectile dysfunction, the anti-infective amphotericin B, the antibiotics tobramycin, ciprofloxacin and
 moxifloxacin, nicotine, testosterone, the anti-cholenergic bronchodilator ipratropium bromide, the
 bronchodilator formoterol, monoclonal antibodies and the proteins LHRH, insulin, human growth
 hormone, calcitonin, interferon (eg, β - or γ -interferon), EPO and Factor VIII, as well as in each case
 pharmaceutically acceptable salts, esters, analogues and derivatives (for instance prodrug forms)
 10 thereof.

Additional examples of active agents suitable for practice with the present invention include
 but are not limited to aspariginase, amdoxovir (DAPD), antide, becaplermin, calcitonins, cyanovirin,
 denileukin diftitox, erythropoietin (EPO), EPO agonists (e.g., peptides from about 10-40 amino acids
 in length and comprising a particular core sequence as described in WO 96/40749), dornase alpha,
 15 erythropoiesis stimulating protein (NESP), coagulation factors such as Factor VIIa, Factor VIII, Factor
 IX, von Willebrand factor; ceredase, cerezyme, alpha-glucosidase, collagen, cyclosporin, alpha
 defensins, beta defensins, exedin-4, granulocyte colony stimulating factor (GCSF), thrombopoietin
 (TPO), alpha-1 proteinase inhibitor, elcatonin, granulocyte macrophage colony stimulating factor
 (GMCSF), fibrinogen, filgrastim, growth hormones, growth hormone releasing hormone (GHRH),
 20 GRO-beta, GRO-beta antibody, bone morphogenic proteins such as bone morphogenic protein-2, bone
 morphogenic protein-6, OP-1; acidic fibroblast growth factor, basic fibroblast growth factor, CD-40
 ligand, heparin, human serum albumin, low molecular weight heparin (LMWH), interferons such as
 interferon alpha, interferon beta, interferon gamma, interferon omega, interferon tau; interleukins and
 interleukin receptors such as interleukin-1 receptor, interleukin-2, interleukin-2 fusion proteins,
 25 interleukin-1 receptor antagonist, interleukin-3, interleukin-4, interleukin-4 receptor, interleukin-6,
 interleukin-8, interleukin-12, interleukin-13 receptor, interleukin-17 receptor; lactoferrin and
 lactoferrin fragments, luteinizing hormone releasing hormone (LHRH), insulin, pro-insulin, insulin
 analogues (e.g., mono-acylated insulin as described in U.S. Patent No. 5,922,675), amylin, C-peptide,
 somatostatin, somatostatin analogs including octreotide, vasopressin, follicle stimulating hormone
 30 (FSH), influenza vaccine, insulin-like growth factor (IGF), insulintropin, macrophage colony
 stimulating factor (M-CSF), plasminogen activators such as alteplase, urokinase, reteplase,
 streptokinase, pamiteplase, lanoteplase, and tenecteplase; nerve growth factor (NGF), osteoprotegerin,
 platelet-derived growth factor, tissue growth factors, transforming growth factor-1, vascular
 endothelial growth factor, leukemia inhibiting factor, keratinocyte growth factor (KGF), glial growth
 35 factor (GGF), T Cell receptors, CD molecules/antigens, tumor necrosis factor (TNF), monocyte
 chemoattractant protein-1, endothelial growth factors, parathyroid hormone (PTH), glucagon-like

peptide, somatotropin, thymosin alpha 1, thymosin alpha 1 IIb/IIIa inhibitor, thymosin beta 10, thymosin beta 9, thymosin beta 4, alpha-1 antitrypsin, phosphodiesterase (PDE) compounds, VLA-4 (very late antigen-4), VLA-4 inhibitors, bisphosphonates, respiratory syncytial virus antibody, cystic fibrosis transmembrane regulator (CFTR) gene, deoxyribonuclease (Dnase), bactericidal/permeability increasing protein (BPI), and anti-CMV antibody. Exemplary monoclonal antibodies include etanercept (a dimeric fusion protein consisting of the extracellular ligand-binding portion of the human 75 kD TNF receptor linked to the Fc portion of IgG1), abciximab, afeliomomab, basiliximab, daclizumab, infliximab, ibritumomab tiuexetan, mitumomab, muromonab-CD3, iodine 131 tositumomab conjugate, olizumab, rituximab, and trastuzumab (herceptin), amifostine, amiodarone, aminoglutethimide, amsacrine, anagrelide, anastrozole, asparaginase, anthracyclines, bexarotene, bicalutamide, bleomycin, buserelin, busulfan, cabergoline, capecitabine, carboplatin, carmustine, chlorambucin, cisplatin, cladribine, clodronate, cyclophosphamide, cyproterone, cytarabine, camptothecins, 13-cis retinoic acid, all trans retinoic acid; dacarbazine, dactinomycin, daunorubicin, dexamethasone, diclofenac, diethylstilbestrol, docetaxel, doxorubicin, epirubicin, estramustine, etoposide, exemestane, fexofenadine, fludarabine, fludrocortisone, fluorouracil, fluoxymesterone, flutamide, gemcitabine, epinephrine, L-Dopa, hydroxyurea, idarubicin, ifosfamide, imatinib, irinotecan, itraconazole, goserelin, letrozole, leucovorin, levamisole, lomustine, mechlorethamine, medroxyprogesterone, megestrol, melphalan, mercaptopurine, methotrexate, metoclopramide, mitomycin, mitotane, mitoxantrone, naloxone, nicotine, nilutamide, octreotide, oxaliplatin, pamidronate, pentostatin, pilcamycin, porfimer, prednisone, procarbazine, prochlorperazine, ondansetron, raltitrexed, sirolimus, streptozocin, tacrolimus, tamoxifen, temozolomide, teniposide, testosterone, tetrahydrocannabinol, thalidomide, thioguanine, thiotepa, topotecan, tretinoin, valrubicin, vinblastine, vincristine, vindesine, vinorelbine, dolasetron, granisetron; formoterol, fluticasone, leuprolide, midazolam, alprazolam, amphotericin B, podophylotoxins, nucleoside antivirals, aroyl hydrazones, sumatriptan; macrolides such as erythromycin, oleandomycin, troleandomycin, roxithromycin, clarithromycin, davercin, azithromycin, flurithromycin, dirithromycin, josamycin, spiramycin, midecamycin, leucomycin, miocamycin, rokitamycin, andazithromycin, and swinolide A; fluoroquinolones such as ciprofloxacin, ofloxacin, levofloxacin, trovafloxacin; alatrofloxacin, moxifloxacin, norfloxacin, enoxacin, grepafloxacin, gatifloxacin, lomefloxacin, sparfloxacin, temafloxacin, pefloxacin, amifloxacin, fleroxacin, tosufloxacin, prulifloxacin, irloxacin, pazufloxacin, clinafloxacin, and sitafloxacin; aminoglycosides such as gentamicin, netilmicin, paramecin, tobramycin, amikacin, kanamycin, neomycin, and streptomycin, vancomycin, teicoplanin, rampolanin, mideplanin, colistin, daptomycin, gramicidin, colistimethate; polymixins such as polymixin B, capreomycin, bacitracin, penems; penicillins including penicillinase-sensitive agents like penicillin G, penicillin V; penicillinase-resistant agents like methicillin, oxacillin, cloxacillin, dicloxacillin, floxacillin, nafcillin; gram negative microorganism active agents like ampicillin, amoxicillin, and hetacillin, cillin, and galampicillin; antipseudomonal penicillins like carbenicillin,

ticarcillin, azlocillin, mezlocillin, and piperacillin; cephalosporins like cefpodoxime, cefprozil, ceftbuten, ceftizoxime, ceftriaxone, cephalothin, cephalixin, cephradine, cefoxitin, cefamandole, cefazolin, cephaloridine, cefaclor, cefadroxil, cephaloglycin, cefuroxime, ceforanide, cefotaxime, cefatrizine, cephaetrile, cefepime, cefixime, cefonicid, cefoperazone, cefotetan, 5 cefmetazole, ceftazidime, loracarbef, and moxalactam, monobactams like aztreonam; and carbapenems such as imipenem, meropenem, pentamidine isethiouate, albuterol sulfate, lidocaine, metaproterenol sulfate, beclomethasone dipropionate, triamcinolone acetamide, budesonide acetone, fluticasone, ipratropium bromide, flunisolide, cromolyn sodium, and ergotamine tartrate; taxanes such as paclitaxel; SN-38, and tyrphostines.

10 The above exemplary biologically active agents are meant to encompass, where applicable, analogues, agonists, antagonists, inhibitors, isomers, and pharmaceutically acceptable salt forms thereof. In reference to peptides and proteins, the invention is intended to encompass synthetic, recombinant, native, glycosylated, non-glycosylated, and biologically active fragments and analogs thereof.

15

The active substance may comprise two or more active substances formulated together, such as one coated with another, or one dispersed within a matrix of another, or a physical mixture (blend) of two or more. Common examples of such formulations include two or more coformulated pharmaceutical 20 actives, or pharmaceutically active substances coated with excipients, or physical mixtures of pharmaceutically active substances with excipients such as in particular lactose, or solid dispersions of pharmaceutically active substances with excipients, the excipient often being present to modify the release rate and/or to target delivery of the pharmaceutical. However, in general the active substances of the invention will exhibit improved dispersibility and DPI performance in the absence of excipients, 25 ie, in the form of the active substance alone (for example in the form of a drug or drugs without excipients).

The improved dispersibility and DPI performance is preferably also exhibited in the absence of dispersion-enhancing or stabilising additives, such as surfactants or lubricants.

30 Preferably a particulate active substance according to the invention will exhibit improved dispersibility and DPI performance as compared to the same active substance, in particulate form, prepared by a non-SEDS™ particle formation process, in particular micronisation or granulation. By “micronisation” is meant a process involving mechanical means, for instance milling or grinding, to reduce particle size to the micrometer range. The non-SEDS™ substance may comprise particles

having the same or a smaller size (for instance, 90 % or less of the size of, or preferably 80 % or 70 % or 60 % or less of the size) than those of the active substance of the invention.

In certain cases, an active substance according to the present invention may be a pharmaceutically active substance or a pharmaceutically acceptable excipient (preferably a substance suitable for and/or intended for delivery by inhalation) other than salmeterol xinafoate (alone or coformulated with hydroxypropyl cellulose); α -lactose monohydrate; R-TEM β -lactamase; maltose; trehalose; sucrose; budesonide; salbutamol sulphate; nicotinic acid; paracetamol (alone or coformulated with salmeterol xinafoate, L-poly(lactic acid), ethyl cellulose (EC), hydroxypropyl methyl cellulose (HPMC) or poly vinyl pyrrolidone (PVP)); ibuprofen; ketoprofen (alone or coformulated with EC, HPMC or PVP); salicylic acid; either indomethacin, carbamazepine, theophylline, ascorbic acid or a COX-2 selective inhibitor coformulated with EC, HPMC or PVP; quinine sulphate coformulated with EC; fluticasone propionate; omeprazole magnesium tetrahydrate; (S)-omeprazole magnesium trihydrate; formoterol fumarate dihydrate; felodipine; candesartan cilexetil; lysozyme; albumin; insulin; terbutaline sulphate; fenoterol hydrobromide; dihydroergotamine mesylate; and/or risperidone-(9-hydroxy)-palmitate.

It has been found that particulate active substances which exhibit the improved DPI performance and other advantageous properties described above can be produced using the so-called SEDSTM ("Solution Enhanced Dispersion by Supercritical fluid") process, which is a version of the GAS process referred to above.

SEDSTM is a process for forming particles of a "target" substance. It involves contacting a solution or suspension of the target substance in a fluid vehicle (the "target solution/suspension") with an excess of a compressed fluid (generally a supercritical or near-critical fluid) anti-solvent under conditions which allow the anti-solvent to extract the vehicle from the target solution/suspension and to cause particles of the target substance to precipitate from it. The conditions are such that the fluid mixture thus formed between the anti-solvent and the extracted vehicle is still in a compressed or supercritical or near-critical state. The anti-solvent fluid should be a nonsolvent for the target substance and be miscible with the fluid vehicle.

Carrying out a SEDSTM process specifically involves using the anti-solvent fluid simultaneously both to extract the vehicle from, and to disperse, the target solution/suspension. In other words, the fluids are contacted with one another in such a manner that the mechanical (kinetic) energy of the anti-solvent can act to disperse the target solution/suspension at the same time as it extracts the vehicle. "Disperse" in this context refers generally to the transfer of kinetic energy from one fluid to another, usually implying the formation of droplets, or of other analogous fluid elements, of the fluid to which the kinetic energy is transferred.

Suitable SEDS™ processes are described in WO-95/01221, WO-96/00610, WO-98/36825, WO-99/44733 and WO-99/59710, WO-01/03821 and WO-01/15664, in our co-pending PCT patent application no. PCT/GB PCT/GB01/04873 and in our co-pending UK patent application no. 0117696.5. Other suitable SEDS™ processes are described in WO-99/52507, WO-99/52550, WO-00/30612, WO-00/30613 and WO-00/67892.

In SEDS™, the target solution/suspension and the anti-solvent are preferably contacted with one another in the manner described in WO-95/01221 and/or WO-96/00610, being co-introduced into a particle formation vessel using a fluid inlet means which allows the mechanical energy (typically the shearing action) of the anti-solvent flow to facilitate intimate mixing and dispersion of the fluids at the point where they meet. The target solution/suspension and the anti-solvent preferably meet and enter the particle formation vessel at substantially the same point, for instance via separate passages of a multi-passage coaxial nozzle.

A particulate active substance according to the first aspect of the present invention is preferably prepared using a SEDS™ process, such as one or a combination of those described in the above documents. Preferred features of the process may be as described below in connection with the fourth aspect of the invention. The active substance may thus be insoluble or only sparingly soluble in water. It is preferably insoluble or only sparingly soluble in compressed (eg, supercritical or near-critical) carbon dioxide. Such materials lend themselves particularly well to SEDS™ processing and indeed are often difficult to process using other particle formation techniques such as spray drying or freeze drying.

Thus, a fourth aspect of the present invention provides the use of a SEDS™ process (as described above) to produce an active substance in particulate form, for the purpose of improving the dispersibility of the substance and/or its performance in a passive dry powder delivery device, and/or for the purpose of achieving one or more of the characteristics (a) to (q), optionally in combination with one or more of the other preferred properties, listed above in connection with the first aspect of the invention.

The process is preferably carried out using supercritical or near-critical, more preferably supercritical, CO₂ as the anti-solvent. The choice of operating conditions such as temperature, pressure and fluid flow rates, and the choice of solvent and of anti-solvent modifier if necessary, will depend on the nature of the active substance, for instance its solubility in the fluids present and, if it can exist in different polymorphic forms, which form is to be precipitated. Generally, the conditions should be chosen to minimise or reduce particle sizes and/or size distributions – this will generally mean

WO 03/090715

PCT/GB03/01747

selecting a higher anti-solvent flow rate (eg, a target solution/suspension : anti-solvent flow rate ratio (at or immediately prior to the two fluids coming into contact with one another) of 0.03 or less, preferably 0.02 or less or even 0.01 or less), and/or a higher operating temperature (eg, from 50 to 100 °C, preferably from 70 to 90 °C, especially for a CO₂ anti-solvent), and/or a higher operating pressure
5 (eg, from 80 to 210 bar, preferably from 90 to 200 bar, again especially for a CO₂ anti-solvent).

The process conditions are also ideally chosen to maximise or enhance the purity (which may be the polymorphic or enantiomeric purity) of the product – this will involve the use of a vehicle, anti-solvent, temperature and pressure suitable to maximise or enhance selectivity of precipitation of the desired substance from those present in the target solution/suspension.

10 The operating conditions for the process (in particular the target solution/suspension concentration and the relative flow rates of the target solution/suspension and anti-solvent) are preferably selected, for any particular set of reagents (including the fluid vehicle and anti-solvent) and particle formation vessel and fluid inlet geometry, so as to maximise or enhance the degree of supersaturation in the target solution/suspension flow at its point of contact with the anti-solvent. This may be effected for
15 instance in the manner described in the examples below, using solubility measurements to determine the optimum operating conditions.

The product of the fourth aspect of the invention is preferably a particulate active substance according to the first aspect.

Improving the performance of a substance in a passive dry powder delivery device will typically mean
20 increasing the fine particle fraction in the emitted dose when the active substance is delivered using a passive dry powder inhaler. The improvement may for instance be as compared to the performance of the substance prior to the SEDS™ processing, and/or of the same substance (preferably having the same particle size or a particle size no more than 10 % or 20 % or 30 % or 40 % different) when produced using another particle formation process such as micronising, granulation or conventional
25 spray drying.

According to a fifth aspect of the present invention, there is provided an active substance for use in a method of surgery, therapy or diagnosis practised on a human or animal body, in which method the substance is delivered to a patient using a passive dry powder inhaler or analogous delivery device, wherein the substance has one or more of the properties described above in connection with the first to
30 the fourth aspects of the invention.

A sixth aspect of the invention provides the use of an active substance in the manufacture of a medicament for use in a passive dry powder inhaler or analogous delivery device, wherein the substance has one or more of the properties described above in connection with the first to the fourth aspects of the invention.

5 For the fifth and sixth aspects of the invention, the active substance is preferably an active substance according to the first aspect, and is preferably prepared using the method of the fourth aspect and/or selected using the method of the second aspect. It is preferably a pharmaceutically or nutraceutically active substance. Other preferred features of the fifth and sixth aspects of the invention may be as described in connection with the first to the fourth aspects.

10 A seventh aspect of the present invention provides a dosage formulation or collection thereof, for use in a drug delivery device such as in particular a dry powder inhaler, the dosage formulation containing a particulate active substance according to the first aspect of the invention. Preferably the formulation consists essentially of the active substance, ie, it contains 95 % w/w, preferably 98 % w/w or 99 % w/w, or more of the active substance. In particular, it may consist essentially of a pharmaceutically
15 active substance in the absence of excipients and/or of dispersion enhancing or stabilising additives.

An eighth aspect of the invention provides an active substance (eg, drug) delivery device, preferably an inhaler, which contains one or more dosage formulations of an active substance according to the first aspect. The delivery device is preferably of the type designed to deliver a predetermined dose of an active substance in a dry (ie, without a fluid carrier) particulate form, for instance a dry powder
20 inhaler and in particular a passive dry powder inhaler. It may contain one or more dosage formulations according to the seventh aspect of the invention.

According to a ninth aspect, the invention provides a method for delivering an active substance, the method involving charging a delivery device, in particular a device according to the eighth aspect of the invention, with an active substance and/or a formulation according to the invention and/or an
25 active substance selected in accordance with the second aspect of the invention.

A tenth aspect provides a method of treatment of a human or animal patient, which method involves administering to the patient, preferably using the method of the ninth aspect of the invention, an active substance and/or a formulation according to the invention and/or an active substance selected in accordance with the second aspect of the invention.

Both of these methods preferably involve the use of a delivery device such as an inhaler, more preferably a delivery device according to the eighth aspect of the invention. The active substance preferably comprises a pharmaceutically active substance suitable for inhalation therapy.

The present invention will now be illustrated with reference to the following examples, which show how a SEDS™ process may be used to prepare particulate active substances with advantageous properties for use in passive dry powder inhalers.

Examples

The system used to carry out the SEDS™ particle formation processes was of the general type shown schematically in the figures of WO-95/01221.

10

Example 1

The SEDS™ method described in WO 95/01221 was employed to prepare powders of salmeterol xinafoate (SX, GlaxoSmithKline), terbutaline sulphate (TBS, AstraZeneca) and fenoterol hydrobromide (FHBr, Boehringer Ingelheim). The particle formation vessel of 0.5 L volume was used in all cases. Several solvents including methanol, ethanol, acetone and tetrahydrofurane were tested. Typical flow rate of CO₂ was 5 kg/hour.

20 Analytical Methods

PSD measurements were performed using firstly, AeroSizer time-of-flight instrument equipped with AeroDisperser™ (TSI Inc., Minneapolis, USA) and secondly, laser diffraction sensor Helos with dry-powder air-dispersion system Rodos (Sympatec GmbH, Germany). The volume mean particle diameter, *VMD*, was obtained for both instruments using software options. In the general case of non-spherical particles, these instruments cannot provide the exact value of *VMD*, however, the time-of-flight technique gives an aerodynamic-equivalent particle diameter, whereas the laser diffraction method provides the geometric projection-equivalent diameter. These diameters afford the complementary information on PSD and therefore can be used for comparative size analysis.

30

For SX powders, inverse gas chromatography (IGC) was performed using a Hewlett Packard Series 5890 Gas Chromatograph equipped with an integrator and flame ionization detector. For TBS and FHBr powders, IGC was done using a Hewlett Packard Series 6890 instrument which was specifically

WO 03/090715

PCT/GB03/01747

modified for IGC measurements by Surface Measurement Systems Ltd (Manchester, UK). The IGC method is described in detail by Tong et al. 2001. (Tong H. H. Y., B. Y. Shekunov, P. York, A. H. L. Chow, 2001. Pharm. Res. 18, 852.) Triplicate measurements in separate packed columns were made. Differences in surface energetics were reflected in the calculated dispersive component of the surface free energy, γ_s^D , specific component of surface free energies of adsorption. ΔG_A ; the acid-base parameters, K_A and K_B and the total (Hildebrand) solubility parameter, δ , which reflects the adhesion work between particles. The γ_s^D and ΔG_A values were obtained at 303K.

The deposition behaviour of micronised and supercritically-produced powders were evaluated using an Andersen-type cascade impactor (Copley Scientific Limited, Nottingham. UK). This device is designed to imitate particle deposition in the lungs; the control criterion is that the high fine particle fraction (FPF) of a respirable drug to be delivered to the defined stages (from 1 to 5) of the cascade impactor. The drugs were blended with inhalation grade, DMV Pharmatose® 325M α - lactose monohydrate, with 3.8% w/w of drug typical for such formulation. The airflow through the apparatus measured at the inlet to the throat, was adjusted to produce a pressure drop of 4 kPa over the inhaler under test (Clickhaler™) according to compendial guidelines, consistent with the flow rate 49 L/min.

Several batches of particulate material of respirable size with cumulative PSD for all batches $X_{99} < 10 \mu\text{m}$ were consistently prepared, with batch quantities between 1 and 10 g. VMD of powders obtained using different techniques are shown in Table 1.

Table 1

Compound	VMD (μm) (Time of flight)	VMD (μm) (laser diffraction)	FPF (%)
SX Micronised	1.2	1.69	25.1
SX SEDS	1.6	3.56	57.8
TSB Micronised	2.7	3.04	30.7
TSB SEDS	3.4	3.43	38.6
FHBr Micronised	1.7	2.34	17.4
FHBr SEDS	1.7	3.55	41.7

These data indicate that although both the aerodynamic (time of flight) and geometric (laser diffraction) diameters for the micronised panicles are smaller than the correspondent VMD for supercritically- produced materials, the *FPF* deposited in the cascade impactor is significantly larger
 5 for the supercritically-produced powders. Therefore the powder dispersion rather than the particle size distribution defines the deposition profile of the drug particles in this aerosol test. Dispersability of powders in the air flow is defined by the balance of forces generated by the aerodynamic stresses and the inter-particulate forces. The theoretical tensile strength of the particle aggregate, required to separate primary particles, is proportional to the work of particle adhesion (Kendell and Stainton,
 10 Powder Technology, 121,223-229, 2001) and can be associated with the specific surface energy defined by the IGC method. Table 2 represents the surface-energy related parameters which reflect the interaction of the non- polar γ_s^D and polar ΔG_A nature.

Table 2

Substance	γ_s^D (mJ/m ²)	ΔG_A (kJ/mol)					
		Diethyl ether	toluene	acetone	ethyl acetate	chloroform	dioxane
SX Micronised	40.49	14.20		15.24	17.46	14.78	
SX SEDS	34.55	12.65		(0.08)	(0.06)	(0.24)	
TSB Micronised	58.61		3.42	12.57	16.01	1.79	15.96
TSB SEDS	55.05		2.85	10.42	13.76	1.21	14.20
FHBr Micronised	48.53		4.77			0.69	
FHBr SEDS	49.87		3.86	13.15	17.48	0.63	15.32

15

The reduced magnitude of γ_s^D for the supercritically-produced powders implies that the surfaces of these particles are less energetic for non-polar, dispersive surface interactions than the micronised materials. The largest changes are however observed for the polar interactions ΔG_A which are
 20 significantly smaller, by a factor of 1.5 on average, for the supercritically-produced powders. In

general, the enhanced powder dispersion always correlated well with the reduced surface energy of these materials.

Example 2

5

Salmeterol xinafoate (SX) (GlaxoWellcome, Ware UK) in the form of granulated material (G-SX) used for micronisation and micronised powder (M-SX). HPLC grade solvent was purchased from BDH Chemicals, Leicester, UK. All analytical grade liquid probes used in IGC studies were purchased from Labscan, Dublin, Ireland. Industrial grade (>99.95% pure) CO₂ was supplied by Air Products (Manchester, UK).

10

The SEDS™ method was employed to prepare powders of SX form I (S-SX). This technique is based on mixing between supercritical CO₂ antisolvent and a drug solution using a twin-fluid nozzle as more fully described in WO 95/01221 cited above. Methanol, acetone and tetrahydrofuran were tested in this work. The particle formation vessel (500 ml volume) with the nozzle was placed in an air-heated oven. The temperature in the vessel was monitored by a thermocouple with accuracy ± 0.1 °C and was kept constant at 40°C. Pressure in the vessel was controlled by an air-actuated back-pressure regulator (26-1761 with ER3000 electronic controller, Tescom, Elk River, MN, USA) and kept constant at 250 ± 1 bar. The difference in the inlet and outlet pressure was typically within 1% of its absolute value. The CO₂ flow rate, supplied by a water-cooled diaphragm pump Milton Roy B (Dosapro Milton Roy, Pont-Saint-Pierre, France) was typically between 25 and 50 NL/min as monitored after expansion using a gas flow meter (SHO-Meter 1355, Brooks Instruments B.V., Veenendal, Holland) and also controlled before expansion using high-pressure liquid flow meter (DK34, Krohne Messtechnik GmbH, Duisburg, Germany). Solution concentration of SX varied between 1 and 10% w/v. Solution flow rate was provided by a metering pump PU-980 (Jasco Co, Tokyo, Japan) and varied from 0.5 to 10 ml/min.

15

20

25

Several batches were prepared with batch quantities between 1 and 10g. The obtained cumulative PSD for all batches had $X_{90} \approx 10 \mu\text{m}$ and volume-moment mean particle diameter, $d_{4,3} \approx 5 \mu\text{m}$, as determined using the laser diffraction (LD) method.

30

Inverse gas chromatography (IGC) was performed on a Hewlett Packard Series II 5890 Gas Chromatograph (Hewlett Packard, Wilmington, DE, USA) equipped with an integrator and flame ionization detector. Injector and detector temperatures were maintained at 100 and 150°C respectively. Glass columns (60 cm long and 3.5 mm i.d.) were deactivated with 5% solution of dimethyldichlorosilane in toluene before being packed with SX powder. The columns were plugged with silanised glass wool at both ends and maintained at 40°C. Data were obtained for a known

35

weight and surface area of the sample using a nitrogen gas (purity > 99.995%) flow at 20.0 ml/min. The column was weighed before and after the experiment to ensure no loss of materials during the run. Trace amount of vapour from non-polar and polar probes was injected. The retention times and volumes of the injected probes were measured at infinite dilution and thus were independent of the quantity of probes injected. The non-polar probes employed were pentane, hexane, heptane, octane and nonane: the polar probes were dichloromethane, chloroform, acetone, ethyl acetate, tetrahydrofuran and diethyl ether. Triplicate measurements in separate columns were made for G-SX, M-SX and S-SX powders. Differences in surface energetics were reflected in the calculated dispersive component of the surface free energy, γ_s^D ; specific component of surface free energies of adsorption, $-\Delta G_A^{sp}$, and the acid-base parameters, K_A , and K_D .

Data on specific surface areas required for IGC studies were determined by BET nitrogen

adsorption using a Surface Area Analyzer Coulter SA 3100 (Coulter Corp., Miami, FL, USA).

Samples were placed in glass sample holders and out-gassed with helium (purity > 99.999%) at 40°C for 16 hours before analysis. Nitrogen (purity > 99.999%) was used as adsorbate and BET surface area was recorded as specific surface area of the samples. All measurements were performed in triplicate using the same batch of each material.

Electric charge and adhesion measurements

Triboelectrification was undertaken against a stainless steel contact surface using either a turbula

mixer or a cyclone separator. Triboelectrification in a turbula mixer (Glen Creston, UK) was carried out by agitating a powder sample for 5 minutes at 30 rpm in a 100 ml stainless steel vessel at ambient temperature and relative humidity. A sample was poured in a reproducible manner into a Faraday well connected to an electrometer (Keithley 610, Keithley Instruments, Reading, UK). Charge and mass of sample was then recorded to give specific charge before and after triboelectrification. %w/w adhesion to the inner surface of the mixing vessel was calculated from the original mass of sample and the mass of sample poured into the Faraday well. During triboelectrification in a cyclone separator, a powder was fed from a steel vibratory table into a venturi funnel. Compressed air (velocity 8 m/s. relative humidity below 10%, ambient temperature) was used to convey the powder from the venturi along a horizontal pipe into the cyclone separator. The Faraday well and force compensation load cell was fitted at the base of the cyclone and used to collect charged particles. Final specific charge was recorded for non-adhered powder residing in the Faraday well and, where possible, powder adhering to the cyclone wall was dislodged by a stream of air and its charge and mass recorded. In both cases, the results were obtained from triplicate measurements.

The instrument consisted of laser diffraction sensor HELOS and dry-powder air-dispersion system
 5 RODOS (Sympatec GmbH, Germany) with WINDOX OS computer interface. The dispersion process
 was controlled by means of adjusting pressure of the compressed air flow between 0.5 and 5 bar. The
 pressure of 2 bar was found to be sufficient to disperse most of the agglomerates avoiding, at the same
 10 time, attrition of the primary particles. All measurements were performed in triplicate. The particle
 shape factor, f , was calculated as $f = S_v/S_v^*$, where S_v is the experimental specific surface area and S_v^*
 is the specific surface area determined using the LD instrument assuming the particle sphericity.

15 Results and discussion : Surface free energy and specific surface area

The fundamental quantity of inverse gas chromatography is the net retention volume, V_N ,
 20 determined from the retention time of a given solvent. Adsorption of the probe molecules on solid
 surfaces can be considered in terms of both dispersive and specific components of surface free energy,
 corresponding to non-polar and polar properties of the surface. By virtue of their chemical nature, non-
 25 polar probes of the alkane series only have dispersive component of surface free energy, which can be
 determined from the slope of the plot based the following equation:

$$30 \quad RT \ln V_N = 2a N_A (\gamma_S^D)^{1/2} (\gamma_L^D)^{1/2} + const$$

where R is the gas constant. T is the column's absolute temperature, a is the probe's surface area. N_A is
 the Avogadro's number, γ_s^D is the dispersive component of surface free energy of a SX powder and
 35 γ_L^D is the dispersive component of surface free energy of the solvent probes. Polar probes have both
 dispersive and specific components of surface free energy of adsorption. The specific component of
 surface free energy of adsorption (ΔG_A^{SP}) can be estimated from the vertical distance between the
 alkane reference line and the polar probes of interest. This free energy term can be related to the donor
 number (DN) and acceptor number (AN^*) of the polar solvent by the following equation:

$$40 \quad \Delta G_A^{SP} = K_A DN + K_D AN^*$$

DN describes the basicity or electron donor ability of a probe whilst AN^* defines the acidity or
 45 electron acceptor ability. Here, AN^* denotes a correction for the contribution of the dispersive
 component and the entropy contribution into the surface energy is assumed negligible. Thus plotting -

WO 03/090715 PCT/GB03/01747
 $\Delta G_A^{SP} / AN^*$ versus DN / AN^* yields a straight line where K_A and K_D correspond to the slope and intercept respectively.

The IGC data for the various SX samples analysed by the above approach are summarized in Tables 3 and 4. Comparison between different materials shows that the magnitude of γ_s^D is 15% smaller for S-SX compounds than for both M-SX and G-SX compounds. In addition, ΔG_A^{SP} for all polar probes used reduced by at least half for S-SX compound compared to the other two materials. Comparison between M-SX and G-SX materials indicates that, although the γ_s^D are almost equal within the experimental error, ΔG_A^{SP} for all the polar probes is larger for the granulated material. The specific surface area, a , is twice as small for the S-SX compound compared with both M-SX and G-SX materials indicating that the mean surface -equivalent particle diameter for these compounds is smaller than for S-SX compound.

The reduced magnitude of γ_s^D for S-SX compound implies that the surfaces of these particles are less energetic for non-polar, dispersive surface interactions than the other two compounds. The overall strength of the polar interactions ΔG_A^{SP} is also the smallest for S-SX compound. Comparison between the K_A and K_D values of the three samples indicate that the acidity constant has the following trend: $K_A(S-SX) < K_A(M-SX) < K_A(G-SX)$. The basicity constants follows the reverse order with $K_D(S-SX)$ being the largest. Thus S-SX sample which has the weakest acidic property exhibits the strongest basic interactions with respect to its exposed polar groups at the interface. This suggests that S-SX crystal surfaces have, in relative terms, more exposed basic groups but fewer exposed acidic groups than both G-SX and M-SX compounds. Particles of all three compounds have a similar platelet shape with the dominant $\{001\}$ crystal faces. However, S-SX particles have the largest shape factor, f (see Table 3), which means that platelets of G-SX and M-SX are thicker. The other materials have more energetic lateral crystal surfaces as a result of the solution crystallisation procedure (G-SX) and particle breakage on micronisation (M-SX). Therefore the observed differences in K_A and K_D , combined with the smallest magnitude of ΔG_A^{SP} and γ_s^D for S-SX compound, suggests a combination of three different factors affecting the specific surface energy: (a) difference in the crystal habit. *i.e.* the $\{001\}$ crystal faces have stronger basic and weaker acidic interactions than the lateral crystal faces, (b) smaller overall specific surface energy of the $\{001\}$ crystal planes as compared to any other crystallographic planes and (c) disturbances of the crystal structure which also contribute to the higher surface energy of G-SX and M-SX compounds.

It is clear that solvent adsorption progress more rapidly with the M-SX and G-SX samples than with S-SX material. This fact indicates that supercritical fluid process of the invention produces particles with lower surface activity (and greater surface stability) than powders produced by solution

40

Table 3

Compound	γ_s^D (mJ/m ²)	K_A	K_D	S_v	f
S-SX	32.476	0.110	0.356	7.040	3.78
M-SX	38.285	0.172	0.298	9.243	2.80
G-SX	36.972	0.233	0.157	10.699	-

5

Table 4

	$-\Delta G_A^{SP}$ (kJ/mol)					
	Dichloromethane	Chloroform	Acetone	Ethyl acetate	Diethyl ether	tetrahydrofuran
S-SX	2.808	0.153	3.797	2.705	1.488	2.446
M-SX	-	0.810	4.560	3.995	2.774	3.609
G-SX	-	1.885	5.454	4.739	2.958	4.854

Electrostatic charge and adhesion

10

Table 5 presents results on the charge, Q , and fraction of adhered material, AD . S-SX particles exhibited significantly less (between one and two orders of magnitude) accumulated charge than the micronised powder before and after turbula mixing and also for the non-adhered drug in cyclone separator. Correspondingly, the fraction of adhered material is several times smaller for S-SX powder than for M-SX powder in both the turbula mixing and cyclone separator tests.

15

20

These results are consistent with the superior powder flow properties of S-SX material. Although the bulk powder density of S-SX material is very low (about 0.1 g/cm³ vs. 0.5 g/cm³ for M-SX) it flows well and does not adhere to the container walls.

25

Table 5

	Turbula Mixer			Cyclone Separator		
	Q (nCg ⁻¹) Before mixing	Q (nCg ⁻¹) After mixing	AD (% w/w)	Q (nCg ⁻¹) Before mixing	Q (nCg ⁻¹) After mixing	AD (% w/w)
S-SX	-0.52	-0.17	1.5	4.9	-34.6	5.5
M-SX	-12.1	-42.6	27	-48.4	-49.7	16.7

30 Particle size and powder dispersability

The difference in PSD of S-SX and M-SX powders is reflected in the magnitude of the mean particle sizes $d_{4,3} = 3.5 \mu\text{m}$ (S-SX) and $1.8 \mu\text{m}$ (M-SX) and as measured using the LD technique. For both materials the cumulative PSD >98% within respirable particle size range $0.5 < x < 10 \mu\text{m}$.

35

However, a significant difference was observed between the dispersion behavior of micronised and supercritically- processed powders. At high dispersing pressures above ≈ 2 bar, $d_{4,3}$ is smaller for M-

WO 03/090715 **PCT/GB03/01747**
SX powder, as indicated by the primary PSD for this compound. This situation changes dramatically at dispersing pressures below 2 bar. At low pressures, S-SX powders consistently produce a large fraction of primary particles in the respiratory size range, whereas M-SX powders form stable agglomerates outside the 5 μm range which cannot be dispersed at such pressures.

5

The enhanced dispersability of S-SX powders means a decrease of the inter-particulate contact area and/or reduction of the cohesive forces leading to better performance of S-SX compound in the inhalation devices. Despite a larger geometric (and volume) diameter for S-SX particles, the Andersen cascade impactor measurements indicated a greater than two-fold increase (from 25.15 to 57.80%) of FPF for S-SX powder compared with FPF of M-SX powder.

10

15

Example 3

5 This example measured the surface charge and adhesiveness of particles of the drug salbutamol sulphate produced using a SEDS™ process as compared to that of both the unprocessed starting material and a micronised sample of the drug.

Surface charge was examined by placing weighed portions of the samples in a Faraday well to measure their electrostatic charge.

10

A simple adhesion test was devised to examine the observation that the ultra-fine powders prepared by the SEDS™ process exhibited low adhesion to containers and vessel walls, and low adhesive interaction with surfaces in general. In this test, a small quantity of powder was weighed into a screw topped glass jar and the jar rotated for 5 minutes. The non-adhering powder was then tipped from the jar and weighed and the percentage powder adhering to the walls of the jar calculated.

15

The results of both the charge and the adhesion tests are shown in Table 6 below. It can be seen that both the unprocessed and the micronised materials exhibited relatively high surface charge, whilst the figure for the SEDS™ sample was dramatically reduced. Further, in the adhesion tests, there was minimal adhesion of the SEDS™-processed material, whilst significant amounts of the micronised form of the same material adhered to the surfaces of the jar.

20

These findings are consistent with the surprisingly observed easy flowing nature of SEDS™ products, being different from the generally observed highly charged, cohesive and non-free flowing nature of micronised materials of a similar particle size.

25

Table 6

Sample	Electrostatic Charge (nC/g)	Relative Powder Adhesion (to container walls)
Unprocessed	-23.1	8.6
Micronised	-42.6	18.6
SEDS	-0.2	1.0

30

5 This example measured the specific surface area (by low temperature physical adsorption of nitrogen) of a poorly aqueous soluble drug produced using a SEDS™ process, as compared to a micronised sample of the same drug.

10 The specific surface area of the micronised sample was 5.6 m²/g, whereas that of the SEDS™ sample was 27.8 m²/g.

Example 5

15 These examples assessed the dissolution performance of an aqueous soluble compound produced using a SEDS™ process and also in a micronised form. A conventional test method was used, as described in the current pharmacopoeia and compendia (eg, BP and USP). Three SEDS™- produced samples were tested.

20 The results are shown in Fig. 1, which plots the percentage dissolution against time. The ultra-fine particulate products of the invention clearly dissolves much more rapidly and efficiently than the micronised version of the same substance, exhibiting much faster dissolution profiles to complete dissolution. A further advantage of the SEDS™ products is the consistency of their dissolution profiles between repeat batches.

25 Examples 6

These examples assessed the surface roughness of a SEDS™-produced material as compared to that of (a) the crystallised starting material and (b) the same compound in a micronised form. Conventional AFM analysis was used for the assessments.

30

The results are shown in Figs. 2 (AFM analysis of the SEDS™-processed material) and 3 (graph showing RMS surface roughness data for the three samples) below. The SEDS™ sample clearly had a smoother topographical character.

Example 7

35 The properties of a micronised sample of salbutamol sulphate were compared with those of a SEDS™- processed sample of the same drug. The SEDS™ sample was prepared from a 10 % w/v solution of salbutamol sulphate in acetone, using a 568 ml particle formation vessel, a two-passage concentric nozzle with a 0.1 mm internal diameter orifice, a processing temperature of 50 °C and pressure of 150

bar, a drug solution flow rate of 0.04 ml/min and a supercritical carbon dioxide anti-solvent flowing at 18 ml/min.

The mean amorphous content of the micronised sample, determined by the dynamic moisture sorption method, was 6.92 % w/w (standard deviation 1.10). That of the SEDS™ sample in contrast was only 0.13 % w/w (SD 0.05).

The mean value for γ_s^D (the dispersive component of surface free energy, determined by IGC) was 58.57 mJm⁻² (SD 2.19) for the micronised sample but only 38.45 mJm⁻² (SD 1.50) for the SEDS™ sample.

The mean specific charge of both samples was + 4.00 nCg⁻¹ before mixing. After triboelectrification by Turbula™ mixing this value had increased to + 25.9 nCg⁻¹ for the micronised sample but only + 16.4 nCg⁻¹ for the SEDS™-produced sample.

Further, blends of salbutamol sulphate with lactose (both a micronised and a SEDS™-produced sample) were tested in an Andersen-type cascade impactor with a Clickhaler™ DPI device. The fine particle fraction of the emitted dose was measured as 11.86 % for the micronised sample and 33.57 % for the SEDS™ one.

Example 8

The respiratory drug terbutaline sulphate (TBS) was prepared by SEDS™ process and its properties and DPI performance compared to those of a micronised sample of the same drug. The DPI performance of blends of TBS with the carrier alpha-lactose monohydrate was also investigated, since the drug-carrier adhesion and hence the particulate (especially surface) properties of the drug and carrier, can significantly influence their dispersibility in DPI systems.

PRODUCTION OF POWDERS

Materials

The material studied was supplied as micronised powder of terbutaline sulphate (AstraZeneca R & D, Lund, Sweden), α -lactose monohydrate (Pharmatose 325 M inhalation grade DMV International, Veghel, The Netherlands) was used as a carrier for the cascade impaction studies. Carbon dioxide (BOC Ltd, UK) was 99.9 % pure and methanol, ethanol and water were of HPLC grade (Fischer Scientific Limited, Loughborough, UK). Chloroform, toluene, ethyl acetate, acetone and 1,4-dioxane, of HPLC grade (99+% purity) were used as polar probes whereas a series of n-alkanes from

WO 03/090715
hexane (n=6) to decane (n=10) of HPLC grade (99+ % purity) were used as non-polar probes for IGC analysis. PCT/GB03/01747

Solution Enhanced Dispersion by Supercritical Fluids (SEDS™) Process

5 For experiments that used ethanol as a solvent, the SEDS™ process was modified in such a way that an additional extraction vessel packed with TBS powder was placed in an oven and pure ethanol was pumped through the vessel. This enhanced extraction of TBS and resulted in product yield > 85 %w/w (see Figure 4, vessel position indicated by dotted lines). All other experiments were conducted in a SEDS™ apparatus as disclosed in WO 95/01221 consisting of a stainless steel
10 particle formation vessel (50 ml) positioned in an air assisted heated oven with a specially designed two flow coaxial nozzle capable of withstanding a pressure of 500 bar. Pressure in the system was maintained within ± 1 bar by an automated back-pressure regulator (Tescom, Japan). Drug solution (2 % w/v) was delivered by a separate reciprocating HPLC pump (Jasco PU-980, Japan) and varied between 0.1 and 4.8 ml/min. Liquid CO₂ (-10 °C) was pumped by a water-cooled Dosapro Milton
15 Roy pump (Type: MB 112S (L) 10M 480/J VV2, Pont-Saint-Pierre, France) and flow was varied between 4.5 and 80 ml/min. The CO₂ passed through a heat exchanger to ensure that it was supercritical before entering the nozzle, which consisted of two concentric tubes and a small premixing chamber. Two nozzle diameters, 0.1 and 0.2 mm were used in the study. The powder (typically about 200 mg a batch) was collected from the vessel and analysed. A range of operating
20 temperatures (35 – 80 °C) and pressures (80 – 250 bar) were applied to produce drug powder using the SEDS™ process.

PHYSICAL CHARACTERISATION OF POWDERS

25 Particle Size Analysis

Laser Diffraction

A small amount of TBS powder was analysed using a laser diffraction RODOS/VIBRI dispersing system (HELOS/RODOS, Sympatec GmbH, Clausthal-Zellerfeld, Germany). The instrument
30 consisted of a laser sensor HELOS and a RODOS dry-powder air-dispersion system (Sympatec GmbH, Clausthal-Zellerfeld, Germany). Different measurement ranges of the laser sensor were provided by interchangeable objectives R1 (0.1 – 35 µm) and R2 (0.25 – 87.5 µm). The rate of powder dispersion was controlled by adjusting the pressure of the compressed air flow. A pressure of 2 bar was sufficient to achieve deagglomeration of primary particles without attrition.

35

Time-of-flight Measurements

The TBS samples were also analysed using an AeroSizer™ (Amherst Process Instruments, Amherst, MA, USA), provided with pulse jet disperser, the AeroDisperser™, to introduce the powders to the instrument. The measurement range of the AeroSizer™ is nominally from 0.2 to 200 µm of
5 aerodynamic diameter with the standard 750 µm diameter tapered nozzle. The micronised and
SEDS™ TBS samples were analysed for 300 seconds in triplicate using normal deagglomeration
conditions, feed rate (5000 particles per second) and medium shear force (0.5 psi).

Scanning Electron Microscopy (SEM)

10 A small amount of powder was manually dispersed onto a carbon tab adhered to an aluminium stub,
(Agar Scientific, UK). The sample stubs were coated with a thin layer (200 Å) of gold by
employing an Emitech K550 sputter coater (Texas, USA). The samples were examined by SEM
(Hitachi S-520, Tokyo, Japan) and photographed under various magnifications with direct data
capture of the images onto a personal computer.

15

Solid State Analysis**X-Ray Powder Diffraction (XRPD)**

Structural analysis of the samples was performed using an X-ray powder diffractometer (Siemens,
20 D5000, Karlsruhe, Germany), fitted with a rotating sample holder, a scintillation counter detector
and a divergent beam utilising a CuK α source of X-rays ($\lambda = 1.5418 \text{ \AA}$). Each sample was placed in
the cavity of an aluminium sample holder flattened with a glass slide to present a good surface
texture and inserted into the sample holder. In order to measure the powder pattern, the sample
holder and detector were moved in a circular path to determine the angles of scattered radiation and
25 to reduce preferred sample orientation. All samples were measured in the 2θ angle range between
 1.5° and 45° with a scan rate of 3 seconds/step and a step size of 0.05° . Samples were analysed in
duplicate.

Differential Scanning Calorimetry (DSC)

30 Prior to sample analysis, a baseline was obtained which was used as a background. DSC analyses of
terbutaline sulphate samples were carried out on a Perkin Elmer 7 Series differential scanning
calorimeter thermal analysis system (Perkin Elmer Ltd., Beaconsfield, UK). Temperature and
enthalpy were calibrated with the standard materials indium (melting point = 156.6°C) and zinc
(melting point = 419.5°C). Samples (1-10 mg) were accurately weighed into pierced, crimped
35 aluminium pans and heated at $10^\circ\text{C min}^{-1}$ over a heating range of $25\text{-}290^\circ\text{C}$ under a nitrogen purge.
A chiller unit was used in conjunction with the calorimeter to attain the lower temperatures.

The moisture sorption isotherm of each powder at 25 °C was measured using a dynamic vapour sorption (DVS) instrument made by Surface Measurement Systems, UK. This instrument gravimetrically measures uptake and loss of water vapour on a substrate by means of a recording
5 microbalance with a resolution of $\pm 0.1 \mu\text{g}$. In the first step of the experimental run, the sample was dried at 25 °C and 0 % relative humidity (RH) for at least 600 minutes to bring the sample to near zero wt % H₂O. Then, the instrument was programmed to increase the RH in steps of 5 % RH from 0 % to 90 % RH and decrease the RH in steps of 10 % RH from 90 % to 0 % RH. A criterion of $dm/dt = 0.005 \text{ \%}/\text{min}$ was chosen for the system to hold at each RH step before proceeding to the
10 next RH step. Sample masses between 30 and 100 mg were used in this study. The change in mass (%) is expressed in terms of g H₂O per 100 g of dry substance.

Isothermal Microcalorimetry

A Thermal Activity Monitor (TAM, model 2277; Thermometric AB, Järfälla, Sweden) was used to
15 measure the calorimetric heat flow (μW) vs. % RH profile of each sample. A RH-perfusion cell (Model 2255-120) accessory for the TAM was used to control RH within the sample vessel. The carrier gas, dry N₂, was flowed at a constant rate ($1.48 \text{ cm}^3/\text{min}$). All experiments were performed at 25 °C. About 100 to 105 mg accurately weighed of each powder were placed in a stainless steel ampoule, attached to the RH perfusion cell, and then dried under 0 % RH until a stable heat flow
20 signal was reached (*e.g.*, a signal within the range of -1 to $+1 \mu\text{W}$). The RH was then increased in a linear ramp from 0 to 90 % over the following 30 hours (*i.e.*, 3 % RH/hr). The heat flow arising from interactions of water vapour with the solid sample was measured as a function of time. Since RH changed with time in a linear fashion, the heat flow was also known as a function of RH.

25 The TAM measures the total heat flow in power, P , produced from either a physical or chemical reaction. In this study the calorimetric power is proportional to the rate of moisture sorption or desorption, crystallization, and/or other processes. Exothermic events are measured as a deflection in the positive y-axis direction. Although crystallization is an exothermic process, it can be observed as a net endothermic process. During crystallization, there is an exotherm due to
30 crystallization and a simultaneous endotherm due to desorption of previously sorbed moisture. The TAM profile gives the resultant of these processes. Hence, for crystallization, the TAM profile can be an exothermic peak only, an endothermic peak only or a sequential combination of both exothermic and endothermic peaks.

35 Inverse Gas Chromatography (IGC)

An empty GC column was uniformly packed with the powder of interest (TBS). Pre-silanised commercially available straight glass columns of 30 cm length with a 3 mm internal diameter were

WO 03/090715 PCT/GB03/01747
used in this investigation. The silanation procedure was necessary to minimize active sites on the inner glass surfaces, which strongly interact with polar probes. Each column was packed at the detector end with a small amount of silanised glass wool, was clipped to a stand and powder was added through a glass funnel with the aid of a mechanical column packer (tapping) to improve powder flow and remove any air gaps. Once the column had been filled, the injector end of the column was also packed with silanised glass wool and attached to a separate, purpose built column oven that controls the sample (column) temperature between room temperature and 90 °C. A Hewlett Packard 6890 Series Gas Chromatograph (GC) (Hewlett Packard, Penna, USA) oven equipped with an autosampler was used to control the solvent temperature. The 6890 GC data acquisition system was used to record data from a thermal conductivity detector (TCD) and flame ionisation detector (FID) with the instrument modified for IGC by Surface Measurement Systems (SMS), Manchester, UK. The combination of detectors allowed sensitive analysis of both organic vapour elution and water (although RH was not raised above 0 % for these experiments).

The whole system was fully automated by control software (SMS iGC Controller v1.3) and the data analysed using SMS iGC Analysis macros. Prior to analysis, each column was equilibrated at 30 °C and 0 % relative humidity (RH) for 5 hours by passing dry helium gas through the column. Helium gas was also used as the carrier gas. Hydrogen and compressed air flow rates were set at 40 and 450 ml min⁻¹ respectively for the FID. The chromatograph injection port was maintained at 80 °C, TCD detector at 150 °C and the FID detector at 150 °C. Column temperature was set at 30 °C throughout analysis. Data were obtained by flowing helium gas at 10 ml min⁻¹ through the silanised glass column packed with a known weight of powdered material and injecting small amounts (concentration P/P₀ = 0.05) of a range of probe vapours with different polarities. The retention times of the probes were measured using SMS iGC Controller v1.3 software, at infinite dilution or near zero surface coverage (equivalent to 10⁻⁴ – 10⁻⁷ µl of liquid) where retention is independent of the quantity of probe injected. For each sample, two columns were prepared and analysed by employing a method based on standard settings, which allows the precise control and measurement of experimental variables. This is essential in producing meaningful results. The data were used to calculate the dispersive and non-dispersive forces acting at TBS particle surfaces using the method developed by Schultz and co-workers (J. Schultz, L. Lavielle and C. Martin. The role of the interface in carbon fibre-epoxy composites, *J. Adhesion*, 23, 45-60 (1987)).

Powder Analysis

Aeroflow Method

An AeroflowTM powder avalanching apparatus (Amherst Process Instruments, API, Amherst, USA) was employed to analyse the dynamic avalanching behaviour of micronised and SC processed TBS

5 samples. The Aeroflow apparatus consists of a transparent rotating drum with a port at the front. A white light source is positioned in front of the drum and a masked array of photocells is behind the drum. To measure avalanching, 50ml of the drug powder was added to the drum, which is about 15 % of its total volume to ensure good powder mixing during the operation. As the drum rotates, the powder bed is carried upwards until an unstable state is reached and an avalanche occurs.

10 The time between successive avalanches was recorded by the projection of the light beam through the drum onto the photocell array. The photocells generated a voltage dependent on the amount of light falling on the cells and the area of unmasked photocells shielded from the light source by the powder. The voltage output (transmitted light intensity) was recorded by a computer, which translates the output as powder movement using a technique disclosed in B.H. Kaye. Characterising the flowability of a powder using the concepts of fractal geometry and chaos theory, Part. Part. Charact. 14: 53-66 (1997). Each TBS sample was tested in duplicate and mean avalanche time and irregularity (scatter) of avalanches were recorded.

15

Powder Dispersion by Cascade Impaction

20 An Andersen Cascade Impactor (1 ACFM Eight Stage Non Viable Andersen Cascade Impactor, Copley Ltd, Nottingham, UK) was used to determine the dispersability and fine particle fraction (FPF) of each powder/carrier blend and pure drug alone through a dry powder inhaler device (Clickhaler®, Innovata Biomed, St. Albans, UK). To prevent particles from bouncing off the plates and becoming re-entrained in the air stream prior to each analysis, the eight metal plates of the impactor were coated with a thin layer of silicone spray and left to dry for 30 minutes. A pre-separator was attached to the top of the impactor to prevent large particles or aggregates from reaching the stages. The air flow through the apparatus, measured at the inlet to the throat, was adjusted to generate a pressure drop of 4 kPa over the inhaler under test and a duration consistent with the flow of 4 litres min⁻¹ according to compendial guidelines (Pharm Forum, 22: 3049-3095 (1996). These conditions are consistent with a flow rate of 49 l min⁻¹ and 4.9 s duration. A blend containing 3.8 % w/w of compound, hand-filled into the reservoir of a Clickhaler® device, which is capable of delivering 200 µg of drug per actuation, was used. Ten doses were discharged into the apparatus and each determination was carried out at least twice. After each determination, the powder on each impaction stage was collected by rinsing with mobile phase and the resulting solutions were analysed by HPLC. The amount of drug deposited in the throat piece and the pre-separator was also determined.

30

35 The Andersen cascade impactor is traditionally calibrated at 28.3 l min⁻¹ but may be operated at higher flow rates, which are thought to more closely approximate a patient's capabilities (F. Podczek. Optimisation of the operation conditions of an Andersen-Cascade impactor and the

relationship to centrifugal adhesion measurements to aid the development of dry powder inhalations, Int. J. Pharm., 149: 51-61 (1997)). Using a variation of the Stokes' equation, effective cut-off diameters (ECDs) at the higher flow rate can be calculated from the equation given below (M.M. Van Oort, B. Downey, and W. Roberts. Verification of operating the Andersen Cascade Impactor at different flow rates, Pharm. Forum, 22: 2211-2215 (1996).

$$ECD_{F2} = ECD_{28.3} (28.3/F2)^{1/2}$$

where ECD_{F2} is the ECD at the alternative flow rate, $ECD_{28.3}$ is the manufacturer's flow rate (28.3 l min^{-1}) and F2 is the alternative flow rate in l min^{-1} . The alternative flow rate used in this study was 49 l min^{-1} . Particles collected on the filter were smaller than 0.32 μm . The percentage of the total dose collected on the stages 1 through 5 represented particles with the aerodynamic diameters less than 4.36 μm , and was considered as the fine particle fraction (FPF).

15 RESULTS AND DISCUSSION

Powder Preparation and Optimisation

TBS was produced using the SEDSTM process. Different solvents such as pure methanol, methanol/water, pure water and pure ethanol were used to dissolve drug material between 1-10 % w/v in concentration. To optimise the particle properties (crystallinity, shape, size, size distribution) a number of parameters such as concentration of the drug, drug solution flow rate, CO₂ flow rate, temperature and pressure of the system were manipulated. A wide range of SEDSTM products such as a hydrated crystal, amorphous material, and two previously reported polymorphs A and B were produced using different solvents and experimental conditions, as seen in Figures 5 a-f. For example, the clear difference in morphology and crystallinity (determined by XRPD which was based on diffraction peaks area and DSC by measuring change in enthalpy of fusion) of TBS1 (127.12 J/g) and TBS2 (88.68 J/g) may be attributed primarily to the different residence time for particle formation and mixing in vessels which is defined as $\tau = V/f$, where V is the volume of the vessel and f is the volumetric flow rates of ethanol and CO₂ at given temperature and pressure respectively. Particles in the smaller 50 ml vessel were exposed to partially mixed ethanol-rich phase which exist in the core of high velocity jet (B.Y. Shekunov, J. Baldyga, and P. York. Particle formation by mixing with supercritical antisolvent at high Reynolds numbers, Chem. Eng. Sci., 56: 2421-2433 (2001)), whereas the particles in the large 500 ml vessel were accumulated in well mixed CO₂ -rich phase.

SEM photomicrographs of a typical micronised and SCF processed batches of TBS are shown in Figures 5 a-f. The use of different solvents such as pure methanol and methanol/water resulted in

WO 03/090715 PCT/GB03/01747
 needle-like as well as spherical amorphous particles respectively. Particles obtained using pure
 methanol, pure ethanol and pure water have revealed well-defined crystal edges compared to
 micronised particles.

5 Particle Size

The average particle size by volume determined by laser diffraction for a typical batch of TBS1 and
 TBS2 was between 3.2 and 3.4 μm with 90 % less than 7 μm in comparison to 3.0 μm
 microparticles of micronised terbutaline sulphate with 90 % less than 5 μm . This method showed
 good reproducibility and therefore, was used for the quality control assessment.

10

The samples were also analysed with the AeroSizer™. Micronised, TBS1 and TBS2 samples have
 similar aerodynamic diameters to those obtained by the Sympatec™ laser diffraction instrument.
 However, TBS3, TBS4 and TBS5 showed larger mean diameters by AeroSizer™ in comparison to
 laser diffraction analysis. These results are depicted in Table 7 below. The AeroSizer™ gives an
 aerodynamic equivalent diameter, which is smaller than geometric volume diameter for non-
 spherical primary particles. Therefore, the results here likely indicate insufficient dispersion by
 AeroDisperser™ of the agglomerated particles of both batches TBS4 and TBS5 (Figure 5 e,f). In
 addition, the sampling procedures in the AeroSizer™ nozzle may produce discrepancies in time-of-
 flight measurements at large particle number densities, which is the case of small amorphous
 particles in Figure 5e. Therefore, the reproducibility of results for this technique was lower than for
 the laser diffraction method.

15

20

TABLE 7

Sample	Sympatec D _{4,3} (μm)	Aerosizer D _{4,3} (μm)
Micronised	3.04	2.69
TBS 1	3.22	3.31
TBS 2	3.43	3.44
TBS 3	1.99	6.69
TBS 4	4.75	15.53
TBS 5	4.84	11.44

25 X-Ray Diffraction and DSC Profiles

The X-ray powder patterns in Figures 6 a - c illustrate the crystallinity of micronised and TBS1 and
 TBS2 samples, which is assessed on the basis of the sharpness of the major diffraction peaks. From
 the results it can be seen that there is no significant difference in the XRPD profiles of micronised

and TBS1 samples. However, based on XRPD data, the TBS2 sample has shown lower bulk crystallinity in comparison to the micronised sample. The DSC profiles (Table 8) confirm this conclusion; the fusion enthalpy for TBS2 batch is considerably lower than for both micronised and TBS1 batches, thus the crystallinity for TBS1 being higher than that for the micronised material.

5

Table 8

Sample	Melting Point (°C)	Enthalpy of Fusion (J/g)	Identification
Micronised	266.3	121.76	Form B
TBS 1	267.1	127.12	Form B
TBS 2	266.3	88.68	Form B
TBS 3	266.3	31.35	Amorphous
TBS 4	274.5	40.98	Hydrate
TBS 5	272.7	57.69	Form A

Interactions of Water with Micronised and SEDS™ Powders

The sorption and desorption isotherms of micronised and SC processed TBS show that at 25 °C, the equilibrium moisture content ("moisture uptake") of all TBS samples in this study is very low (< 0.4 %) at any RH value. The low moisture uptake indicates that each powder is crystalline. However, TBS2 sample showed slightly higher moisture uptake than the micronised sample, which is consistent with its lower bulk crystallinity indicated by DSC and X-ray diffraction (see Figure 6 and Table 8). Typically, an amorphous or partially crystalline material will take up more moisture than a highly crystalline material. TBS2 also takes up more moisture at relative humidities beyond 90 % RH. Under these conditions, the sample may be deliquescing at high RH.

In Figure 7, the heat flow (μW) for both micronised and SEDS™ powders of TBS are normalised to 1 mg for comparison. The endothermic peak for micronised TBS is most likely due to crystallisation of the amorphous fraction that was previously induced by micronisation. The TAM profile for TBS2 sample of TBS has an incomplete exothermic peak between 85 and 90 % RH because the RH ramping experiment (3 % RH/hr from 0 % to 90 % RH) ended before the event was completed. No exothermic or endothermic peaks were observed in the TAM profile of TBS1 sample of TBS, which is typical for a highly crystalline material. The TAM results show that the micronised TBS has an event at about 79% RH, probably due to crystallisation. The results also show that TBS2 sample has an exothermic event at about 85 % RH.

Surface Energetics Properties

Micronised and supercritically processed TBS1 materials show very similar surface energetics with marginally lower non-polar, dispersive surface interaction (γ_s^d) and slightly higher specific interaction ($-\Delta G_A^{SP}$) for polar, amphoteric and basic probes. In contrast, the TBS2 sample indicated significantly less energetic, both dispersive and specific, interactions (Table 9). In addition, comparison of the K_A and K_D values of TBS2 and micronised samples (Table 10) indicates the weakest, both acidic and basic interactions for this supercritically processed material. Thus, the SEDS™ material has less exposed energetic acidic and basic groups. This also indicates that the surface of TBS2 particles may have a more ordered structure than that for micronised material, despite the fact that the bulk structure determined using X-ray diffraction and DSC techniques appeared more ordered for the micronised particles. Micronised material is sometimes conditioned before being used for a DPI formulation, by passing a saturated ethanol vapour through the powder bed. Similarly, TBS1 material was produced with an excess of ethanol solvent. Therefore, it is possible that the surface structure was modified after particle formation for micronised and TBS1 materials and disorganised compared to the crystal structure in the bulk.

Table 9

Sample	γ_s^D mJm ⁻²	$-\Delta G_A^{SP}$ (kJ/mol)				
		Toluene	Acetone	Ethyl acetate	Chloroform	Dioxane
Micronised	58.61	3.42	12.57	16.01	1.79	15.96
TBS 1	57.37	3.66	13.41	16.65	1.68	-
TBS 2	55.05	2.85	10.42	13.76	1.21	14.20

Table 10

Sample	K_A	K_D
Micronised	0.892	0.051
TBS 1	0.761	0.020
TBS 2	0.778	0.032

Powder Flow Properties

For data obtained using the Aeroflow™ powder avalanching analyser, interval times between avalanches were plotted as discrete phase maps known as strange attractor plots (B.H. Kaye, J. Gratton-Liimatainen, and N. Faddis. Studying the avalanching behaviour of a powder in a rotating disc, Part. Part. Charact. 12: 197-201 (1995). Free-flowing powders produce strange attractor plots close to the origin with small spread, whilst, in contrast, cohesive powders give plots with a larger

spread and a centroid positioned further from the origin. The strange attractor plots for TBS analysed at high (100 seconds per revolution) and medium (145 seconds per revolution) rotation speed are shown in Figure 8 and Figure 9, respectively.

5 Examination of the strange attractor plots provides a clear, visual display of the difference in flow behaviour between the micronised and TBS2. The SEDS™ sample has a lower irregularity and a lower mean avalanche time (see Table 11 and Figures 8 and 9) compared to micronised TBS. Therefore, micronised TBS exhibits poorer flow behaviour than TBS2 material. Since a relatively large quantity (≈ 10 g) of powder is required to perform powder flow behaviour study, no
10 comparison was made between TBS1 and micronised samples.

Table 11

Sample	Mean time to avalanche (s)	Irregularity of flow (s)
Micronised (100 sec/rev)	3.62	1.28
Micronised (145 sec/rev)	5.72	2.39
TBS 2 (100 sec/rev)	3.30	1.17
TBS 2 (145 sec/rev)	4.91	2.12

Enhanced flow properties of TBS2 sample are consistent with lower energetics and lower
15 cohesiveness of this material as indicated by the IGC measurements and the following ACI studies.

Aerosol Performance of Micronised vs SEDS™ Powders

Figures 10 and 11 compare the *in vitro* performance of micronised and SEDS™ processed TBS analysed in a lactose blend as well as pure drug alone. The ACI measurements demonstrated that
20 the TBS2 batch in both cases produced a significantly higher FPF in comparison to both micronised and TBS1 material. For this material, a high proportion of fine particle mass with a narrow distribution was collected on stage 1-3 in contrast to the broad distribution across stages 1-5 for the micronised material. The SC processed TBS2 material also demonstrated an increased fine particle fraction (FPF) in both lactose blend and drug alone compared to micronised powders (38.6 % vs
25 30.7 %, and 29.6 % vs 17.7 %) and increased emitted dose (see Table 12). Since the lactose particles are large and cannot penetrate beyond the pre-separator stage, this indicates that dispersion between pure drug particles and formation of loose aggregates plays a major role in defining the deposition profile.

Table 12

Sample	Total Emitted Dose ($\mu\text{g} / \text{dose}$)		Fine Particle Fraction (%)	
	Drug and Lactose Blend	Drug Alone	Drug and Lactose Blend	Drug Alone
Micronised	80.6	84.2	30.7	17.7
TBS 1	71.6	83.7	11.4	9.4
TBS 2	104.8	98.8	38.6	29.6

5 The main factor responsible for better performance of supercritically processed TBS powder in the ACI is possibly related to the dispersibility of this powder at low air flow rates. The enhanced dispersibility is particularly significant for DPI devices where the performance strongly depends on powder deaggregation at relatively low dispersion forces. Clearly, high turbulence is favourable for dispersion but it inevitably leads to high pressure differentials which may be unacceptable for correct functioning of many devices.

10

Example 10

15 The example assessed the force of adhesion of particles of salbutamol sulphate produced using a SEDS™ processes compared to the same compound in micronised form. Conventional AFM analysis was used. Particles of the samples were mounted onto AFM probes and the adhesion force per unit area to a freshly cleaved highly oriented pyrolytic graphite substrate (HOP G, Agar Scientific, Essex, UK) in a liquid (2H 3H perfluoropentane) environment was determined. The contact area involved in the interaction was assessed and related to the force measurements.

20 The initial forces for individual particles of the micronised and SEDS™ produced materials were 15.77nN (SD 4.55nN) and 4.21nN (SD 0.71nN) respectively.

25 Following correction for surface area, the forces per unit area were 100.91nN/ μm^2 (SD 29.15nN/ μm^2) for the micronised material and 13.52 nN/ μm^2 (SD 2.27 nN/ μm^2) for the non-micronised SEDS™ process produced material. The particulate product of the invention clearly demonstrates lower adhesiveness than the micronised version of the same substance.

Example 11

The aerosol performance of a SEDS™ processed sample of bromocriptine mesylate was assessed in a unit-dose passive inhaler device (Turbospin PH & T (Italy)), at a peak inspiratory flow rate (PFIR) of 28.3 LPM and 60 LPM.

Table 13

Emitted dose performance with relative standard deviations of SEDS bromocriptine using Turbospin. Errors correspond to RSDs.

Fill Weight (mg)	Flow Rate (LPM)	ED (%)	Left in Capsules (%)
8.0	28.3	67.7 ± 14.7	10.5 ± 118
	60	87.5 ± 3.4	-0.1 ± -2320
4.0	28.3	75.4 ± 3.9	-1.5 ± -134
	60	83.8 ± 4.0	0.5 ± 347

10

The aerosol analysis (performed @ 60 LPM) indicated that bromocriptine yielded aerosol particles within respirable range with an aerodynamic diameter of 4.2 µm (4.3 %RSD) and an improved FPF (42% of ED).

15

Bromocriptine dispersed well at high flow rates (ED>80%) regardless of full weight. Moreover, it exhibited minimal flow rate dependence, as ED drops were minimal (8-20%) following emptying of the capsules.

20

CLAIMS

1. An active substance in particulate form suitable for administration via a dry powder inhaler, said particulates comprising:
 - (a) a volume mean aerodynamic diameter of less than 7 microns;
 - (b) a bulk powder density within a range from about 0.1 g/cm³ to about 0.5 g/cm³; and
 - (c) a surface-to-volume ratio of at least 2.5 times that of spherical particles of the same volume diameter, wherein the particulates are solid, non-hollow, non-porous particles and the active substance is selected from the group consisting of insulin, pro-insulin, mono-acylated insulin, insulinotropin, and insulin-like growth factor.
2. An active substance according to claim 1 wherein the surface-to-volume ratio is at least 2.5 times that of spherical particles of the same volume diameter.
3. An active substance according to claim 1 or 2 further comprising a shape factor of at least 2.
4. An active substance according to any one of claims 1 to 3 further comprising a shape coefficient of greater than 10.
5. An active substance according to any one of claims 1 to 4 further comprising an aerodynamic shape factor of at least 1.4.
6. An active substance according to any one of claims 1 to 5 further comprising a specific surface area of at least 10 m²/g.
7. An active substance according to any one of claims 1 to 6 further comprising a specific surface area of at least 15 m²/g.
8. An active substance according to any one of claims 1 to 7 further comprising a specific surface area of at least 20 m²/g.

9. An active substance according to any one of claims 1 to 8 further comprising a specific surface area of at least $25 \text{ m}^2/\text{g}$.
10. An active substance according to any one of claims 1 to 9 further comprising a volume mean diameter of less than 6 microns.
11. An active substance according to any one of claims 1 to 10 further comprising a specific surface energy of less than $100 \text{ mJ}/\text{m}^2$.
12. An active substance according to any one of claims 1 to 11 further comprising a specific surface energy of less than $70 \text{ mJ}/\text{m}^2$.
13. An active substance according to any one of claims 1 to 12 further comprising an aggregate tensile strength less than 0.8.
14. An active substance according to any one of claims 1 to 13 further comprising a surface weighted domain size of at least 400 \AA .
15. An active substance according to any one of claims 1 to 14 further comprising a volume weighted domain size of at least 700 \AA .
16. An active substance according to any one of claims 1 to 15 further comprising a total strain less than 0.7×10^{-3} .
17. An active substance according to any one of claims 1 to 16 further comprising a mean specific charge from -5 to $+5 \text{ nCg}^{-1}$.
18. An active substance according to any one of claims 1 to 17 further comprising a RMS roughness, measured using AFM, of 0.5 nm or less.
19. An active substance according to any one of claims 1 to 18 further comprising a dispersive component of surface free energy, γ_s^D , which is at least 5% lower than for the corresponding active substance made by micronisation, granulation, or solvent crystallization.

20. An active substance according to any one of claims 1 to 19 comprising a specific component of free surface energy of absorption, ΔG_A , which is at least 10% lower than for the corresponding active substance made by micronisation, granulation, or solvent crystallization.
21. An active substance according to any one of claims 1 to 20 further comprising a mean adhesion fraction following triboelectrification in a turbula mixer which is 50% or less of that for the same active substance made by micronisation, granulation, or solvent crystallization.
22. An active substance according to any one of claims 1 to 21 further comprising a theoretical aggregate tensile strength, σ , which is no more than 0.8 times that for particles of the same active substance made by a micronisation, granulation, or solvent crystallization.
23. An active substance according to any one of claims 1 to 22 further comprising a particle size distribution (X_{90}) of from 0.5 to 10 μ m.
24. An active substance according to any one of claims 1 to 23 further comprising a particle size spread, measured using a cascade impacted technique at low turbulence, which is at least 5% smaller and with a mean diameter which is at least 10% smaller than that of the corresponding active substance made by micronisation, granulation, or solvent crystallization.
25. An active substance according to any one of claims 1 to 24 further comprising a total crystal strain, ϵ , which is at least 30% lower than that for particles of the same active substance made by micronisation, granulation, or solvent crystallization.
26. An active substance according to any one of claims 1 to 25 further comprising an amorphous phase content which is at least 10 times lower than that for particles of the same active substance made by micronisation, granulation, or solvent crystallization.

27. An active substance according to any one of claims 1 to 26 further comprising a mean specific charge following triboelectrification which is at least 50% lower than for the corresponding active substance made by micronisation, granulation, or solvent crystallization.
28. An active substance according to any one of claims 1 to 27 further comprising a mean avalanche time as determined using a powder avalanching apparatus which is at least 5% lower at 100 s/rev than for the corresponding active substance made by micronisation, granulation, or solvent crystallization.
29. An active substance according to any one of claims 1 to 28 further comprising a mean avalanche time as determined using a powder avalanching apparatus which is at least 10% lower at 145 s/rev than for the corresponding active substance made by micronisation, granulation, or solvent crystallization.
30. An active substance according to any one of claims 1 to 29 further comprising an amorphous phase content of less than 1% w/w.
31. An active substance according to any one of claims 1 to 30 further comprising a bulk powder density of 0.2 g/cm^3 or less.
32. An active substance according to any one of claims 1 to 31 further comprising a shape factor of at least 3.5.
33. An active substance according to any one of claims 1 to 32 further comprising a RMS roughness, measured using atomic force microscopy, of 0.2 nm or less.
34. An active substance according to any one of claims 1 to 33 which when delivered using a passive dry powder inhaler yields a fine particle fraction in the emitted dose of 20% or greater.
35. An active substance according to claim 34 which yields a fine particle fraction in the emitted dose of 31% or greater.

36. An active substance according to claim 34 which yields a fine particle fraction in the emitted dose of 55% or greater.
37. An active substance according to any one of claims 1 to 36 comprising a pharmaceutically or nutraceutically active substance.
38. An active substance according to claim 37 wherein the active substance is a pharmaceutically active substance or a mixture thereof.
39. An active substance according to claim 38 wherein the active substance is selected from the group consisting of salbutamol, terbutalene, salmeterol, fenoterol, bromocriptine or a pharmaceutically acceptable salt or mixture thereof.
40. A dry powder inhaler comprising an active substance in particulate form according to any one of claims 1 to 39.
41. A dry powder inhaler according to claim 40 comprising an active substance in the absence of excipient.
42. Use of an active substance according to any one of claims 1 to 39 in the manufacture of a medicament for use in a passive dry powder inhaler.
43. Method for selecting a particulate active substance for use in a dry powder inhaler comprising assessing the active substance on the basis of the properties (a) to (c) of claim 1 and selecting an active substance having all of said properties.
44. Method according to claim 43 comprising further assessing the active substance on the basis of any of the properties of claims 2 to 36 and selecting an active substance having one or more of said properties.

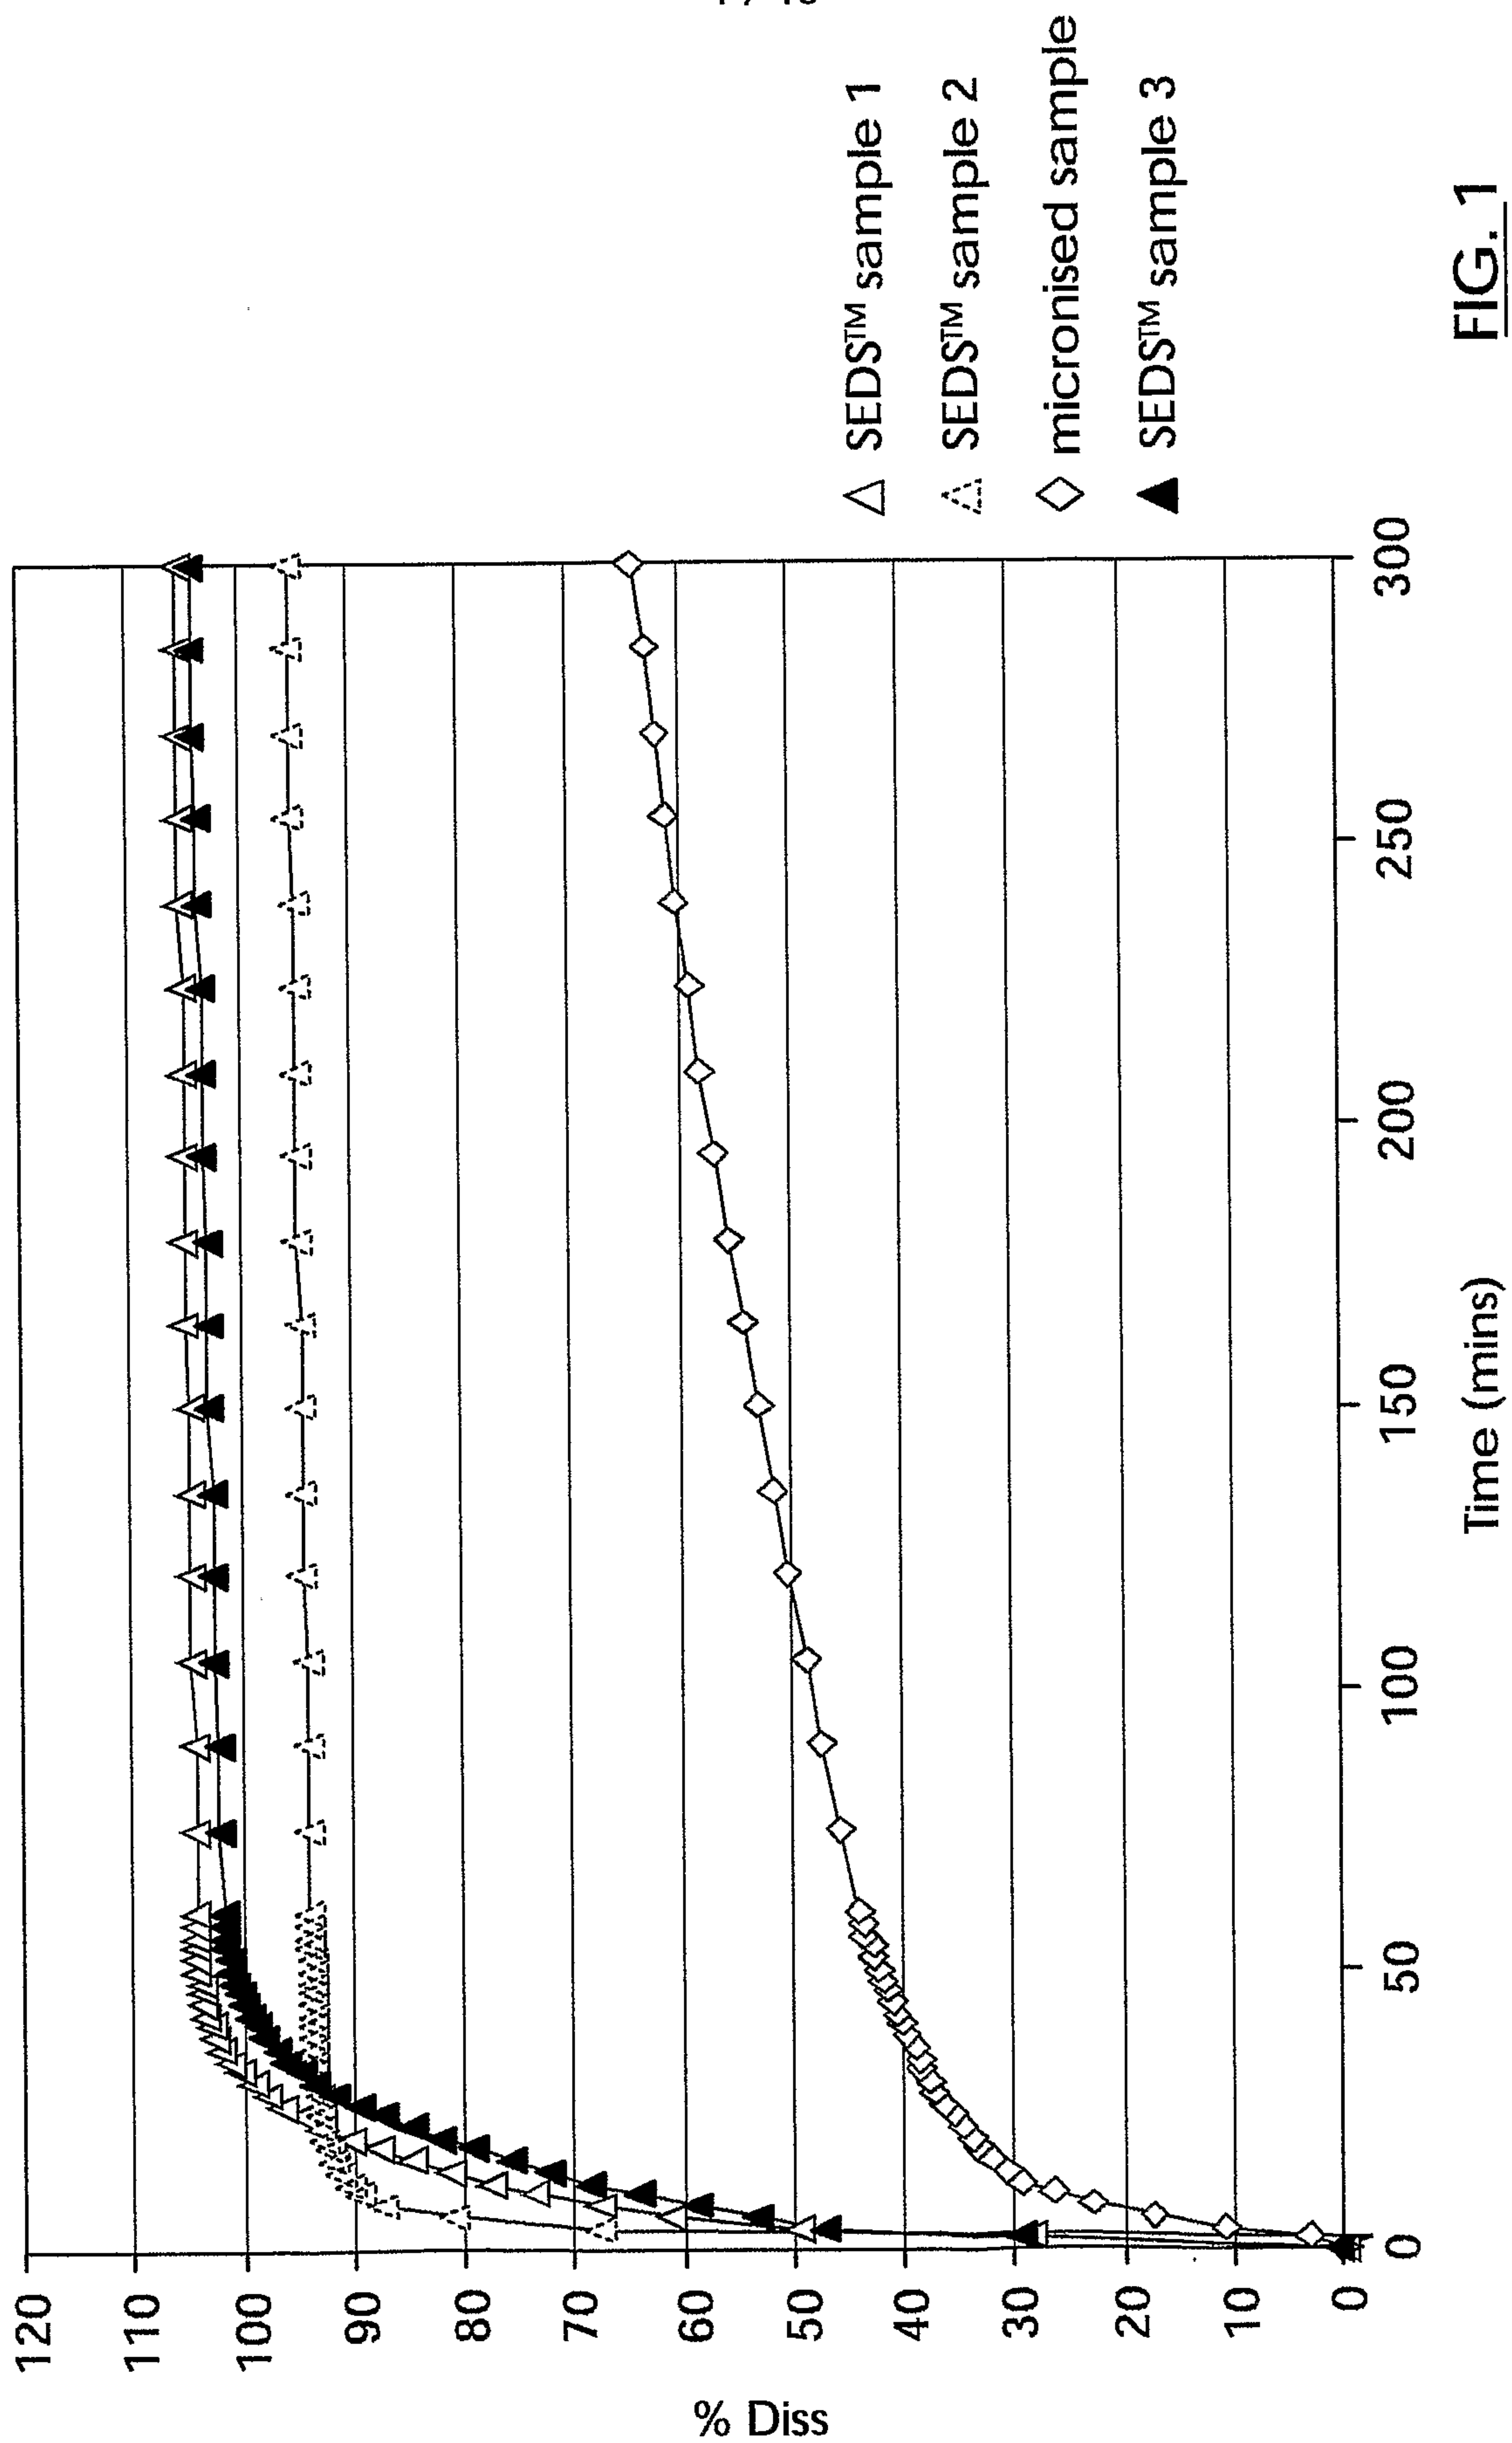


FIG. 1

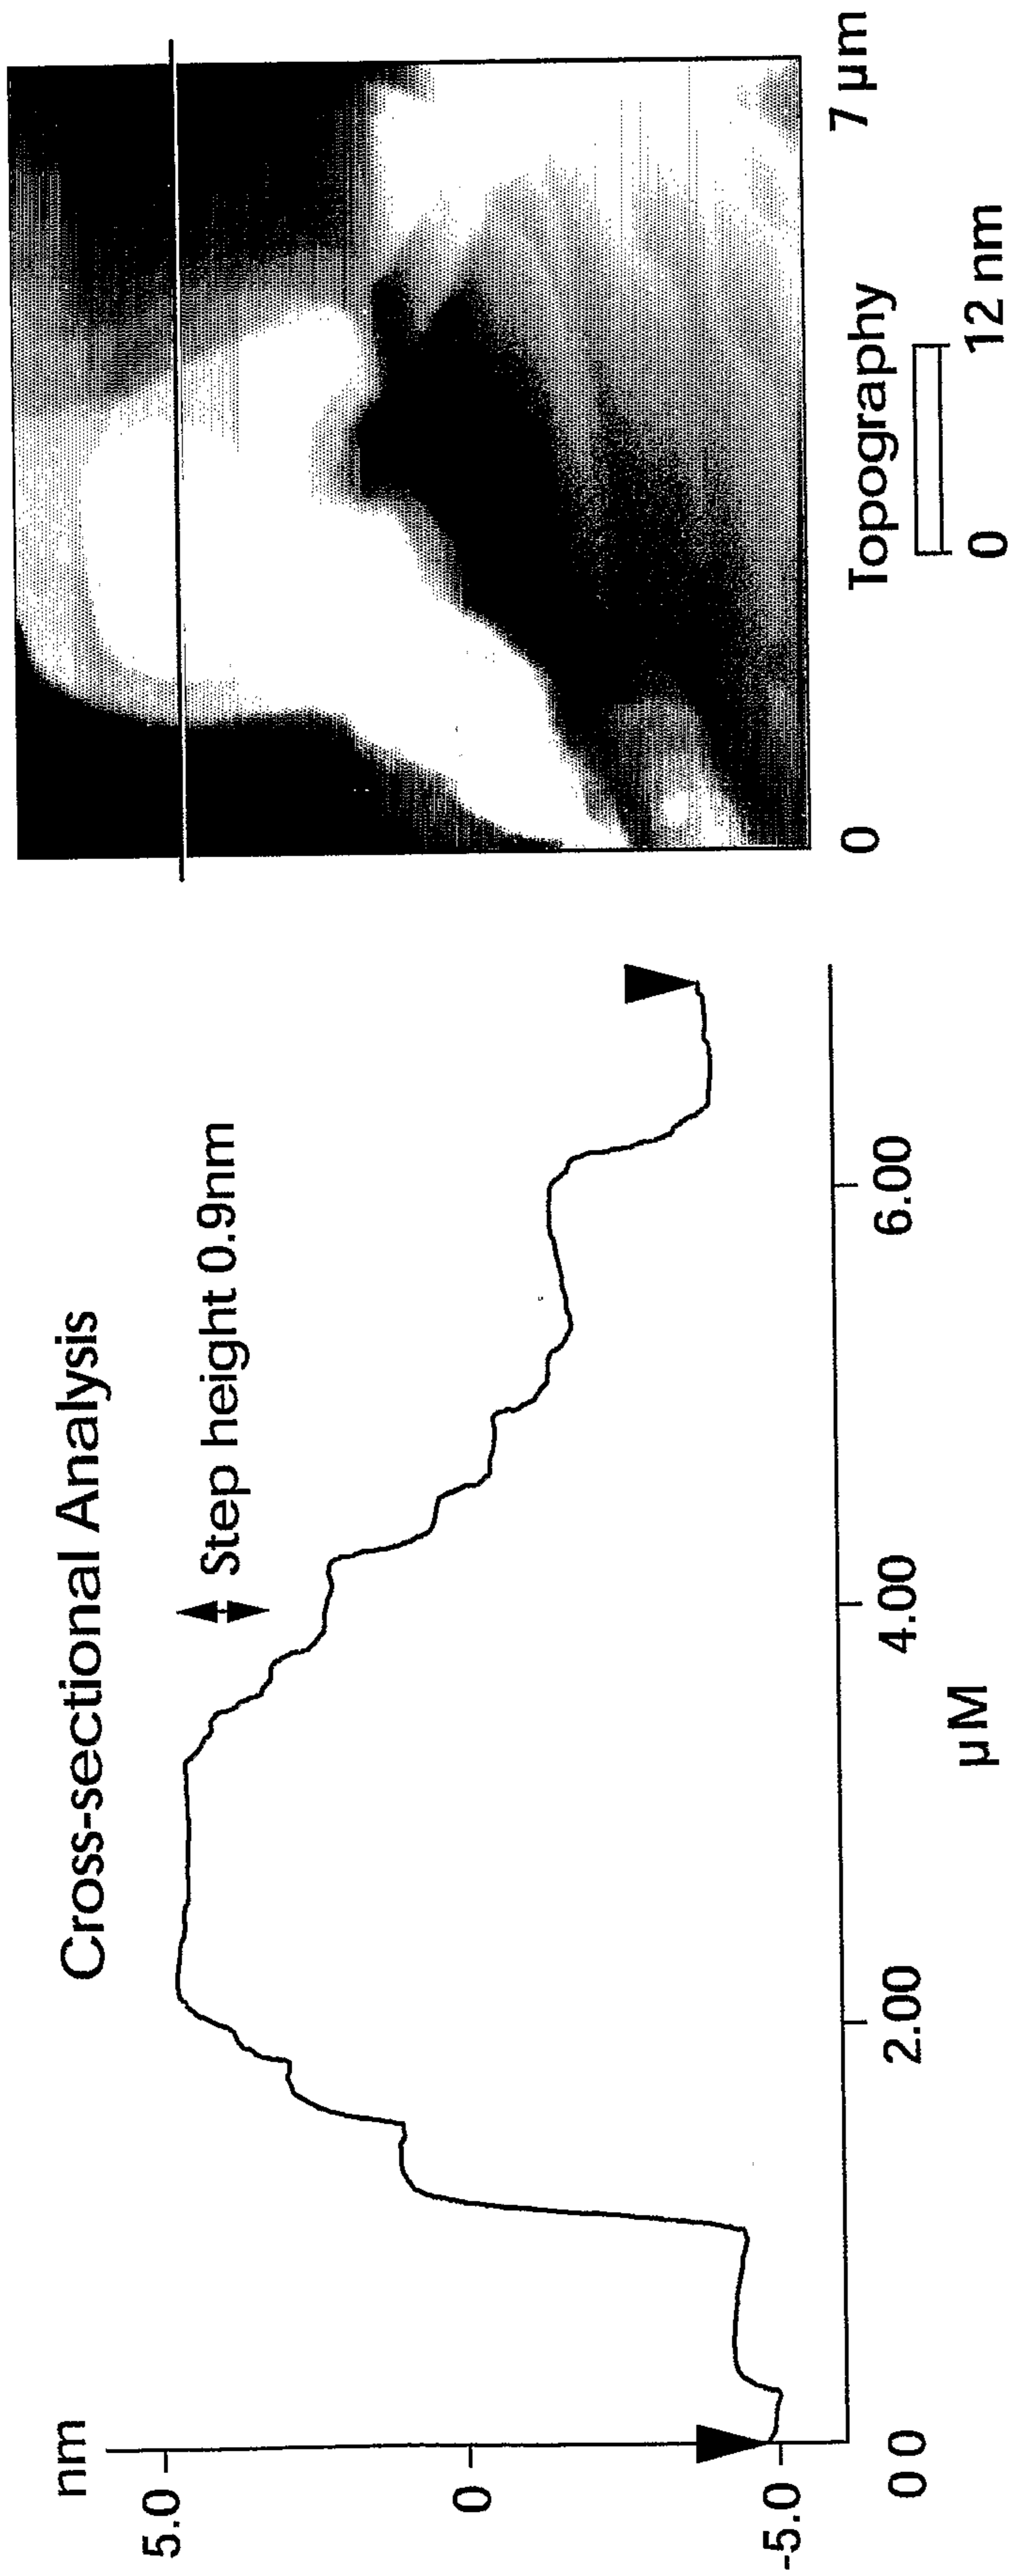


FIG. 2

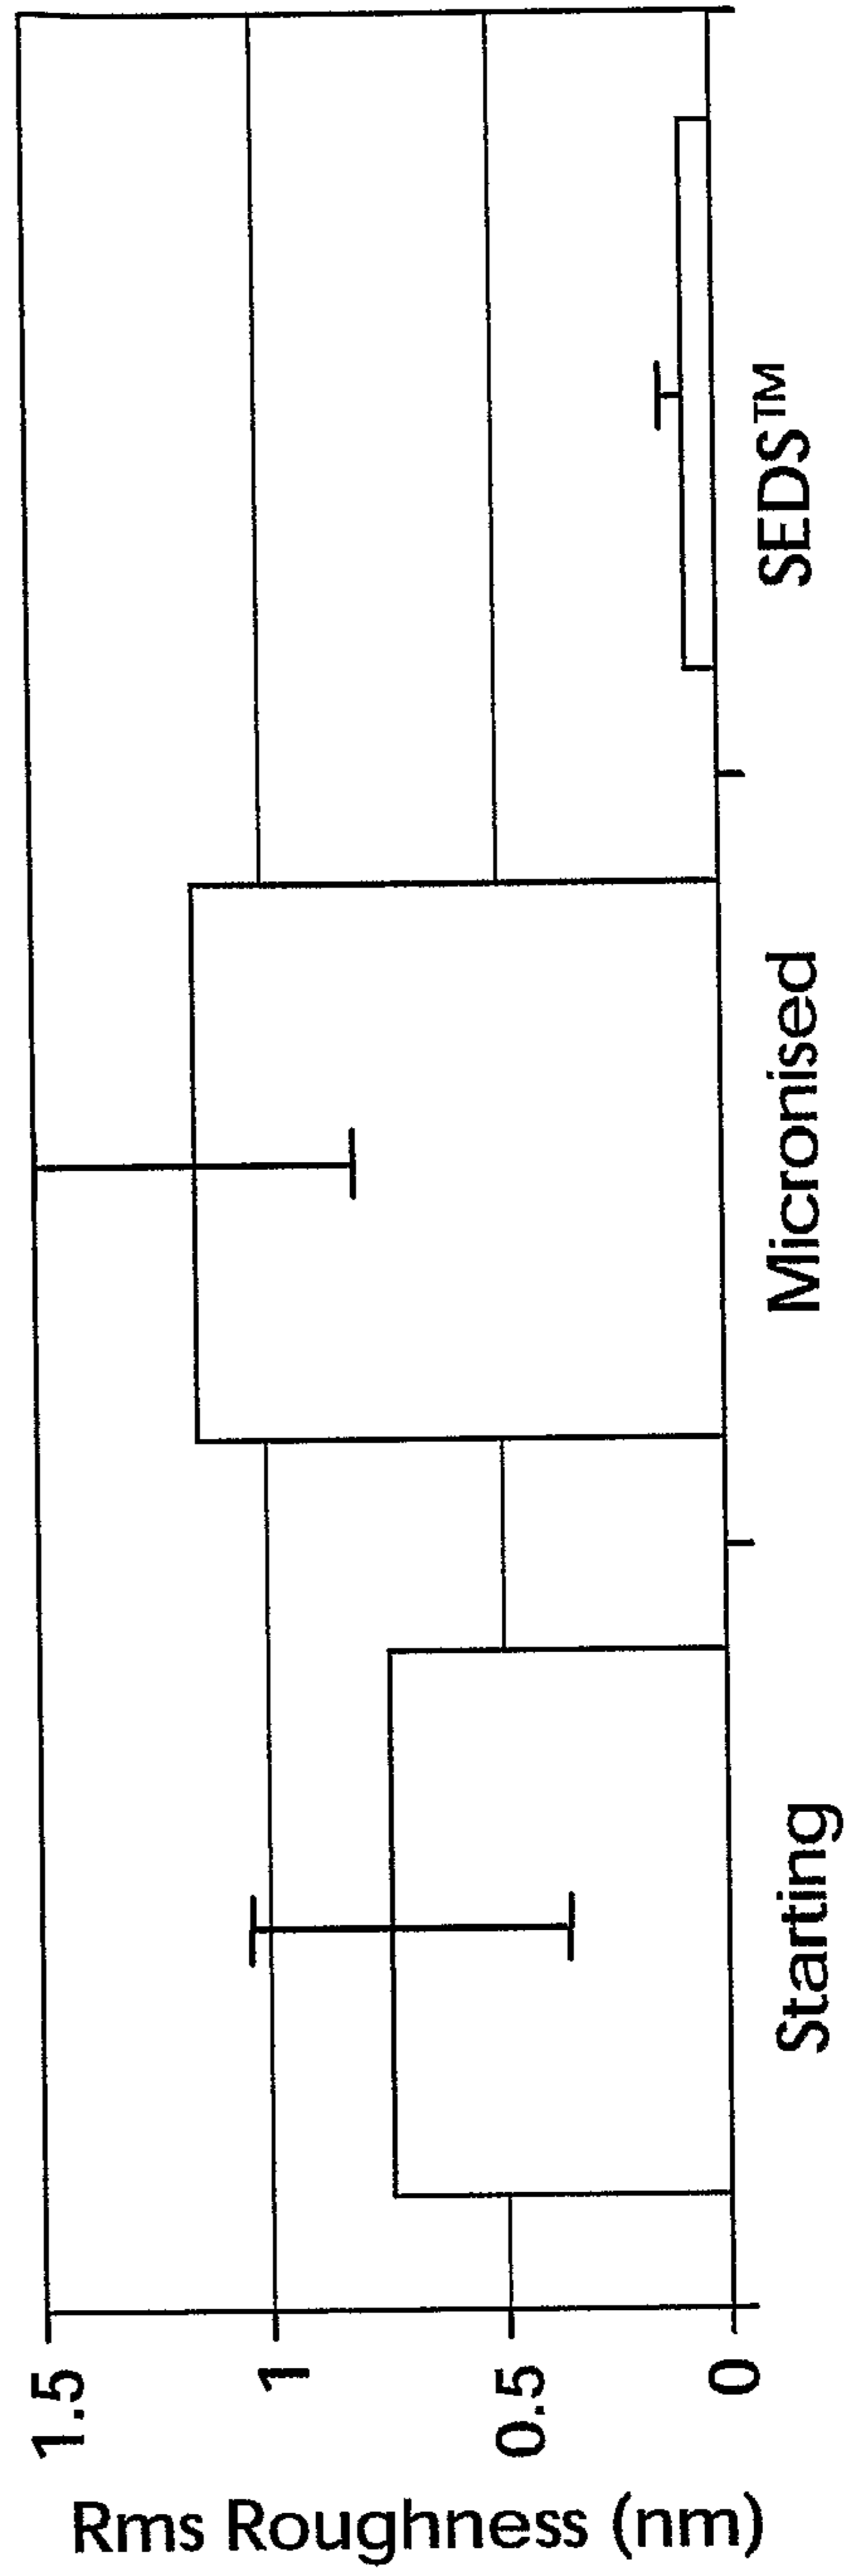


FIG. 3


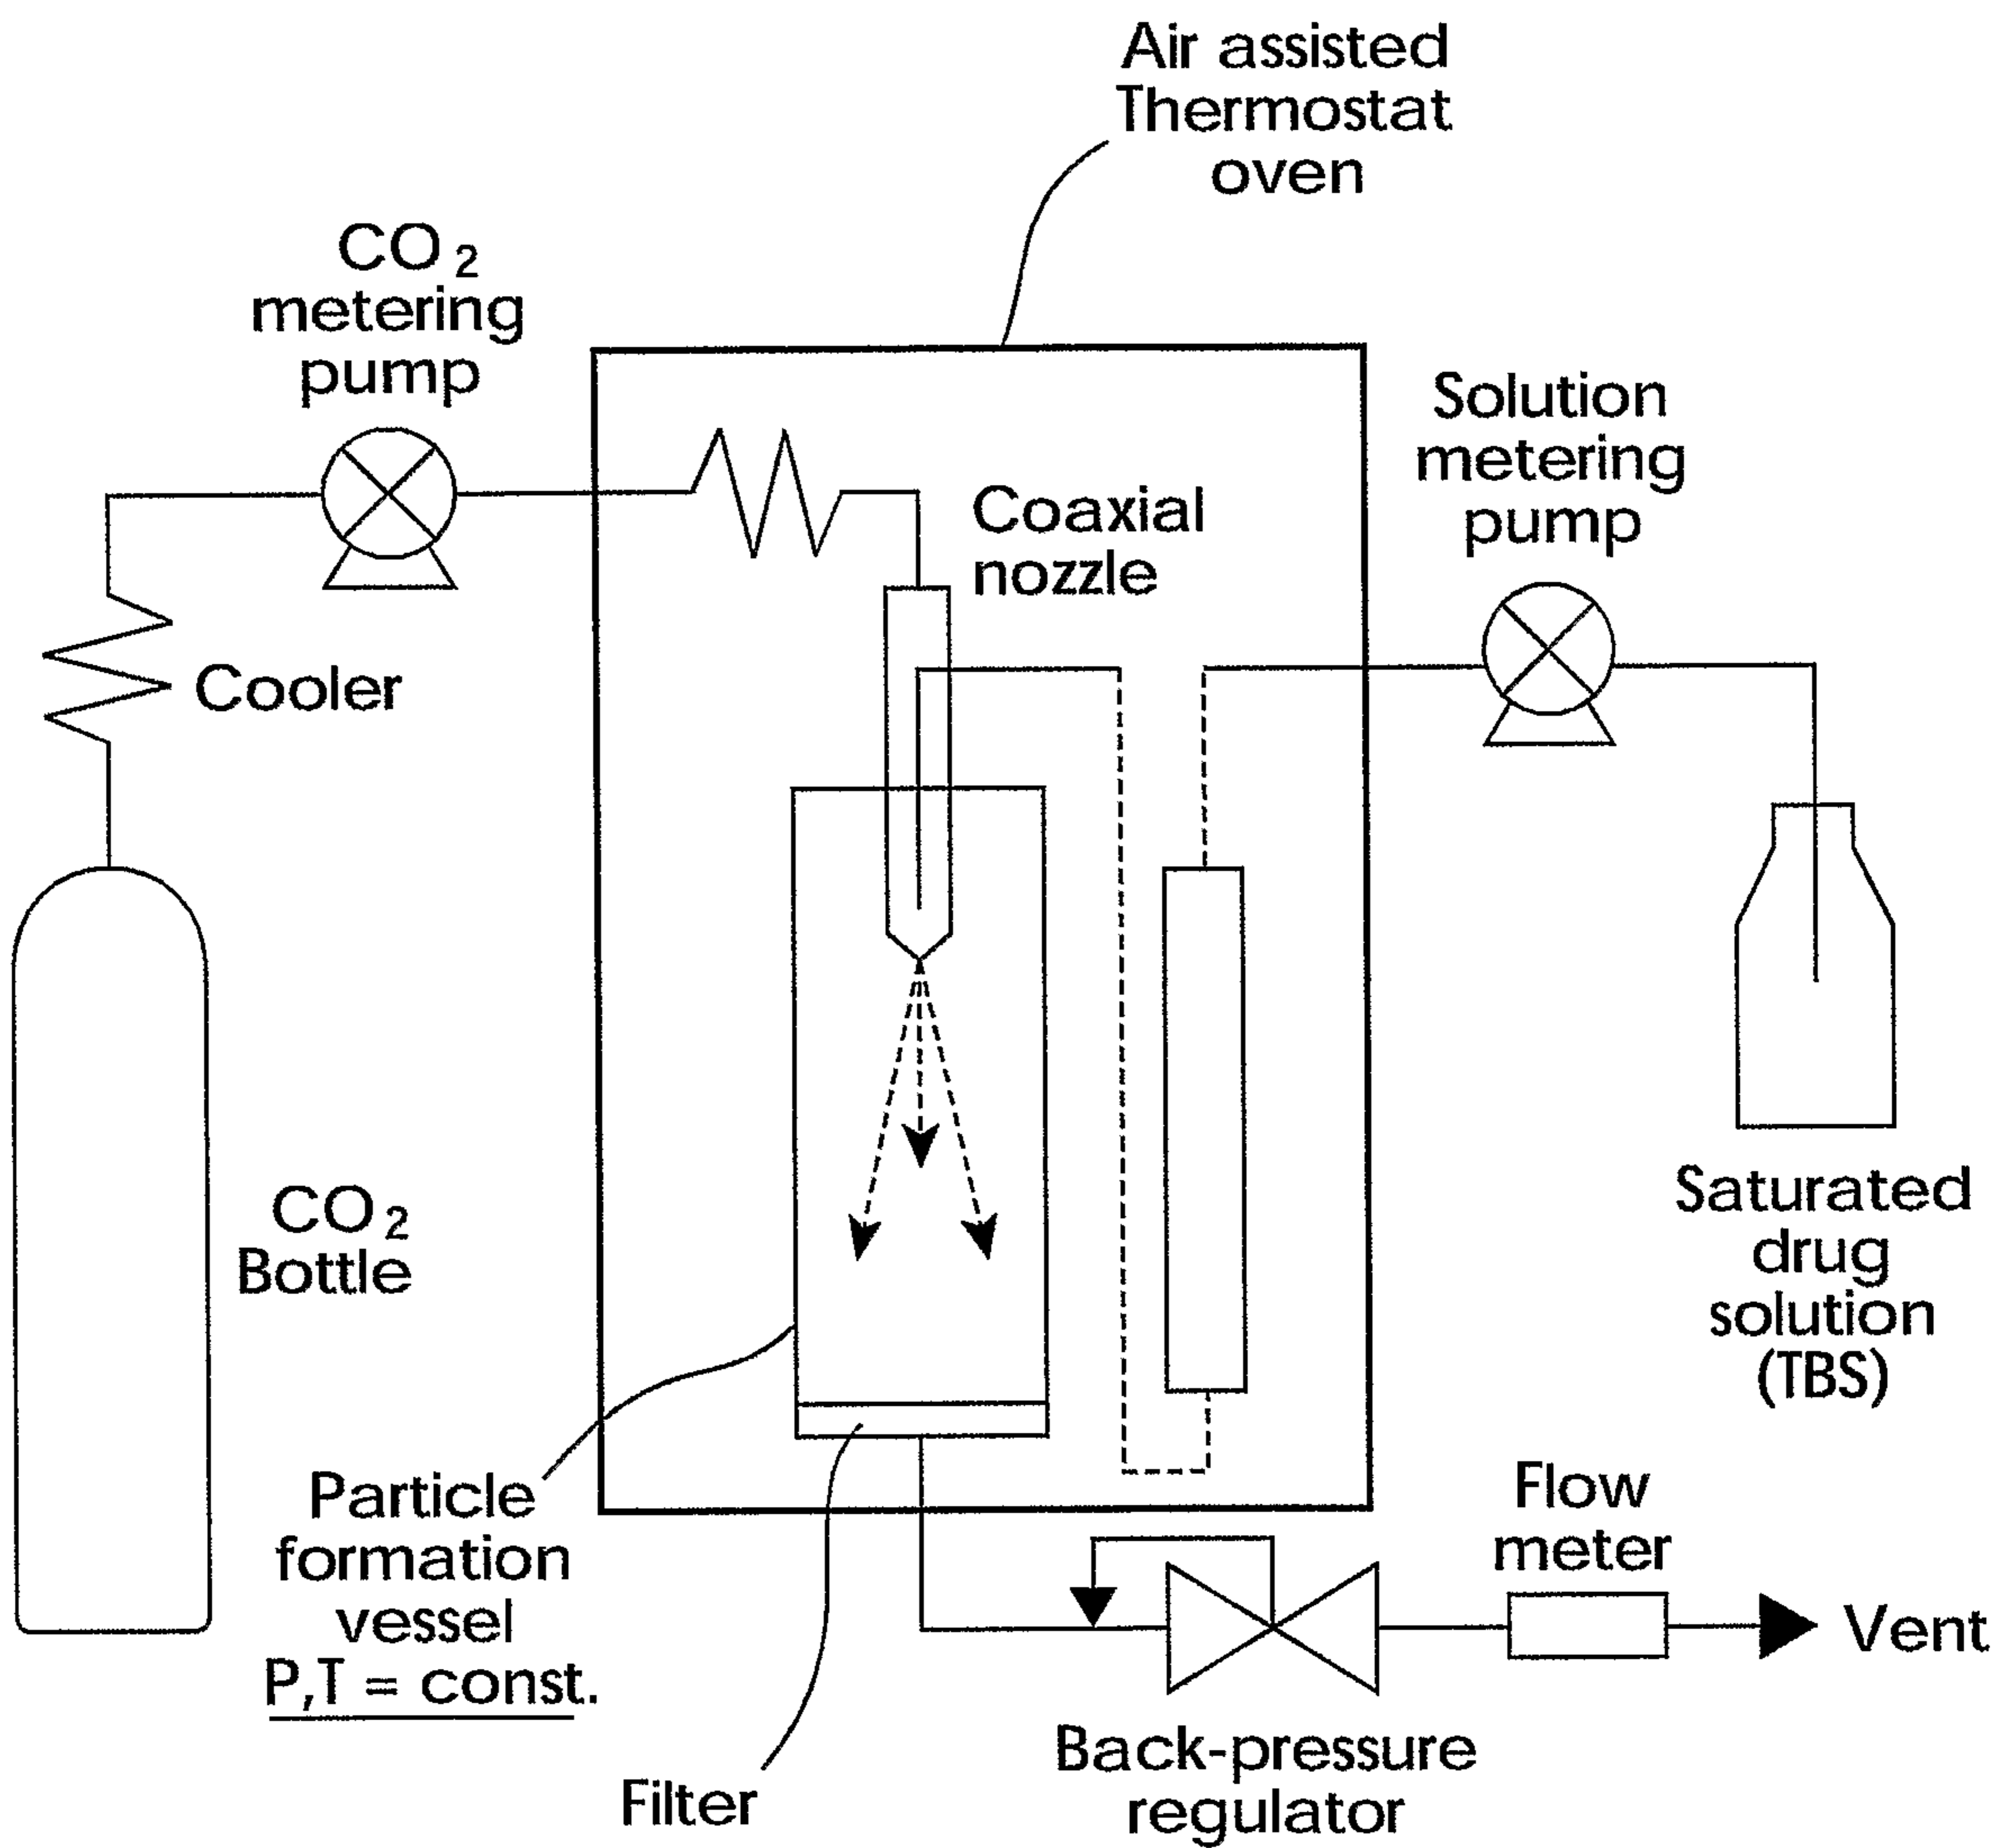


FIG. 4




x 7,000

(a)

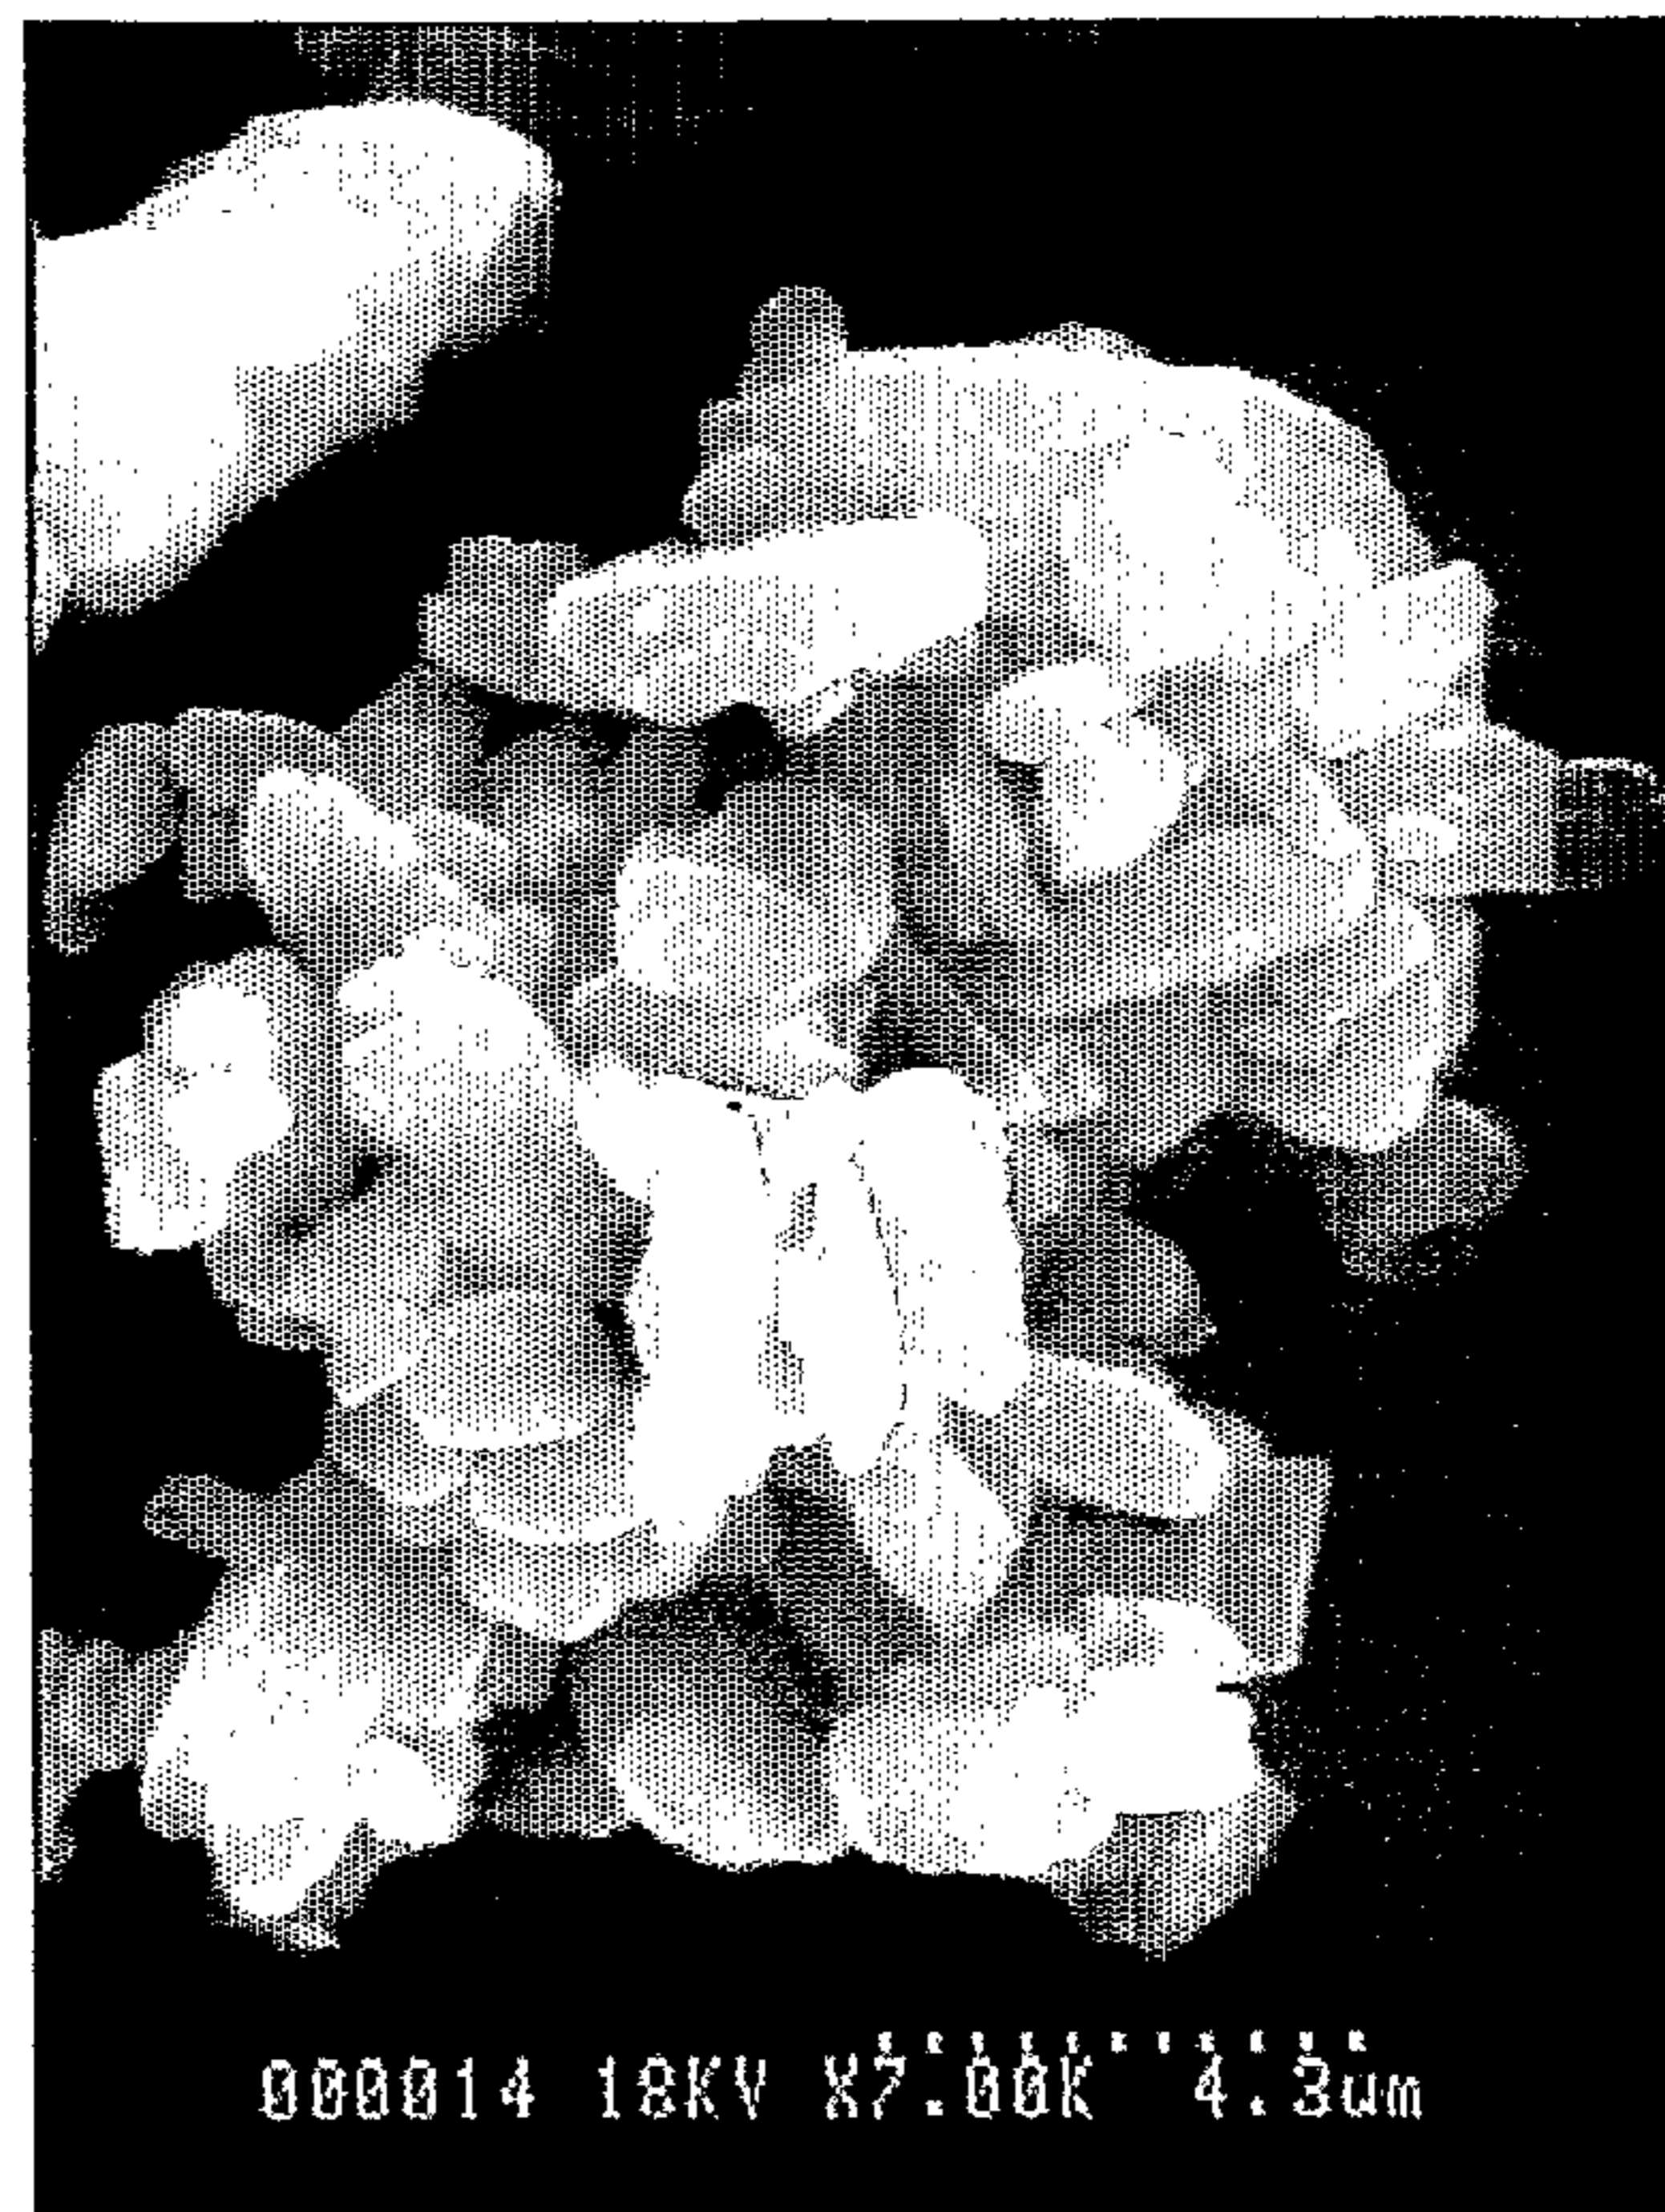


(b)

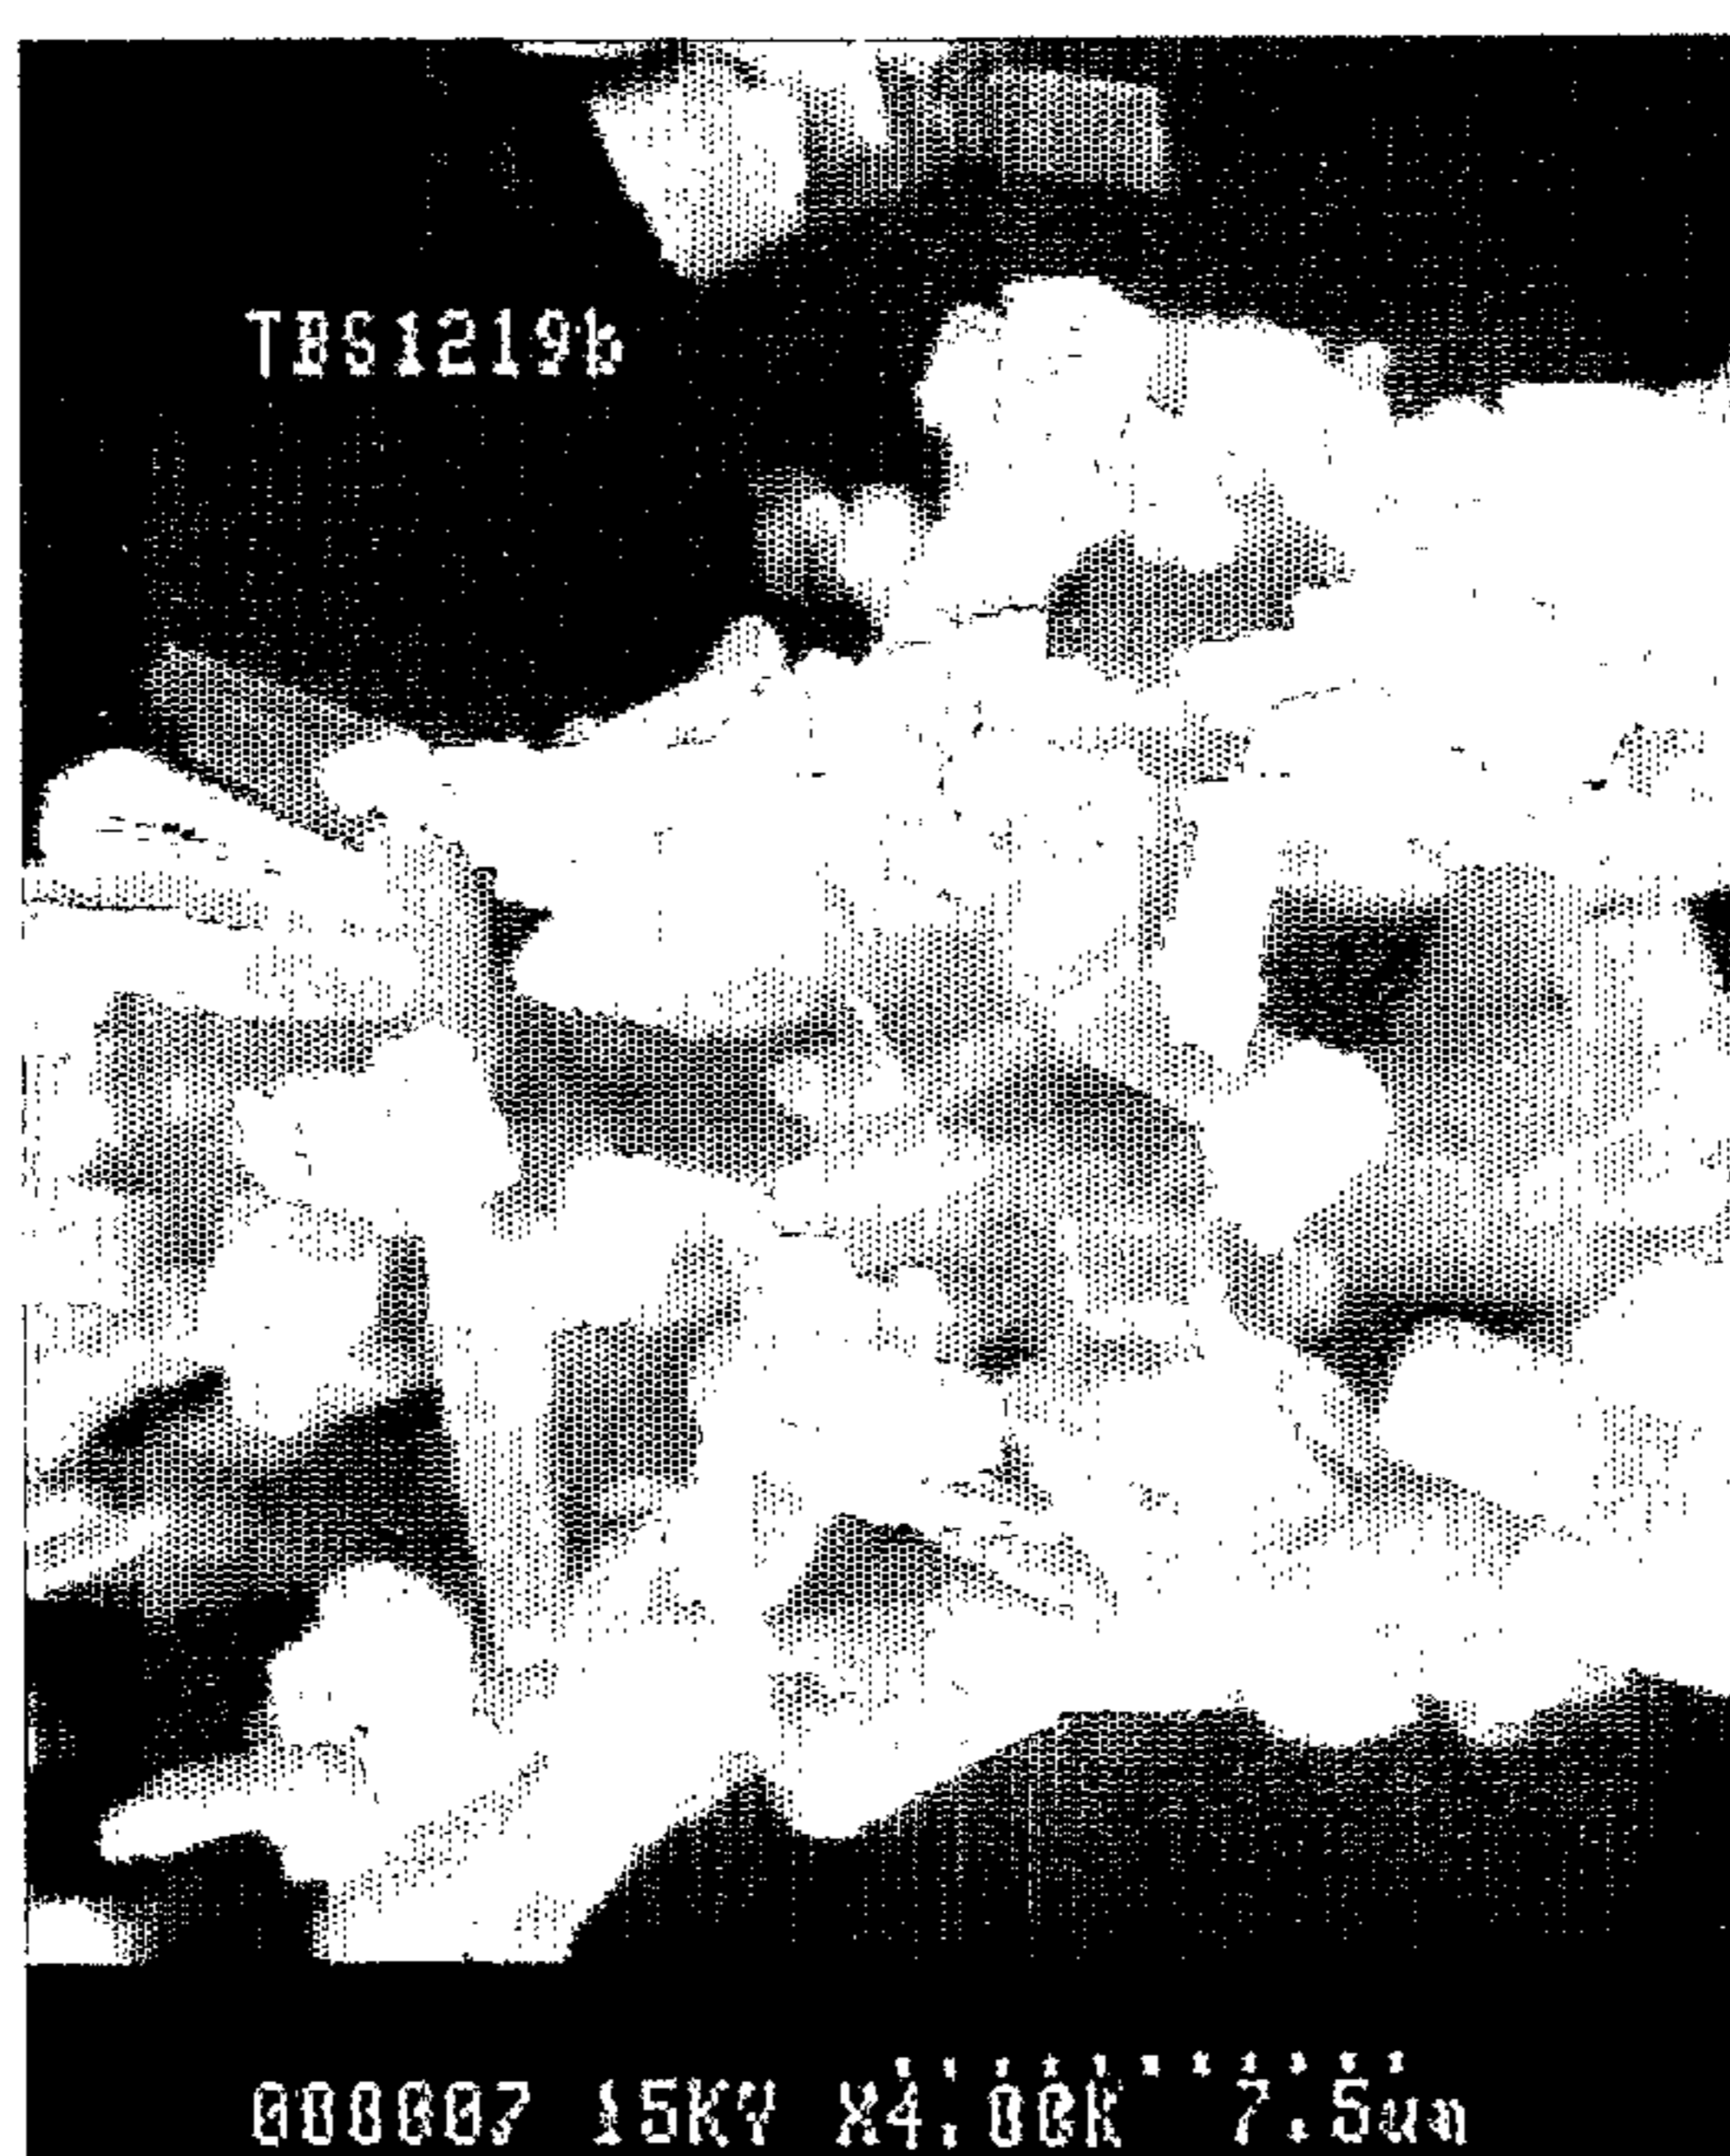


(c)


FIG. 5

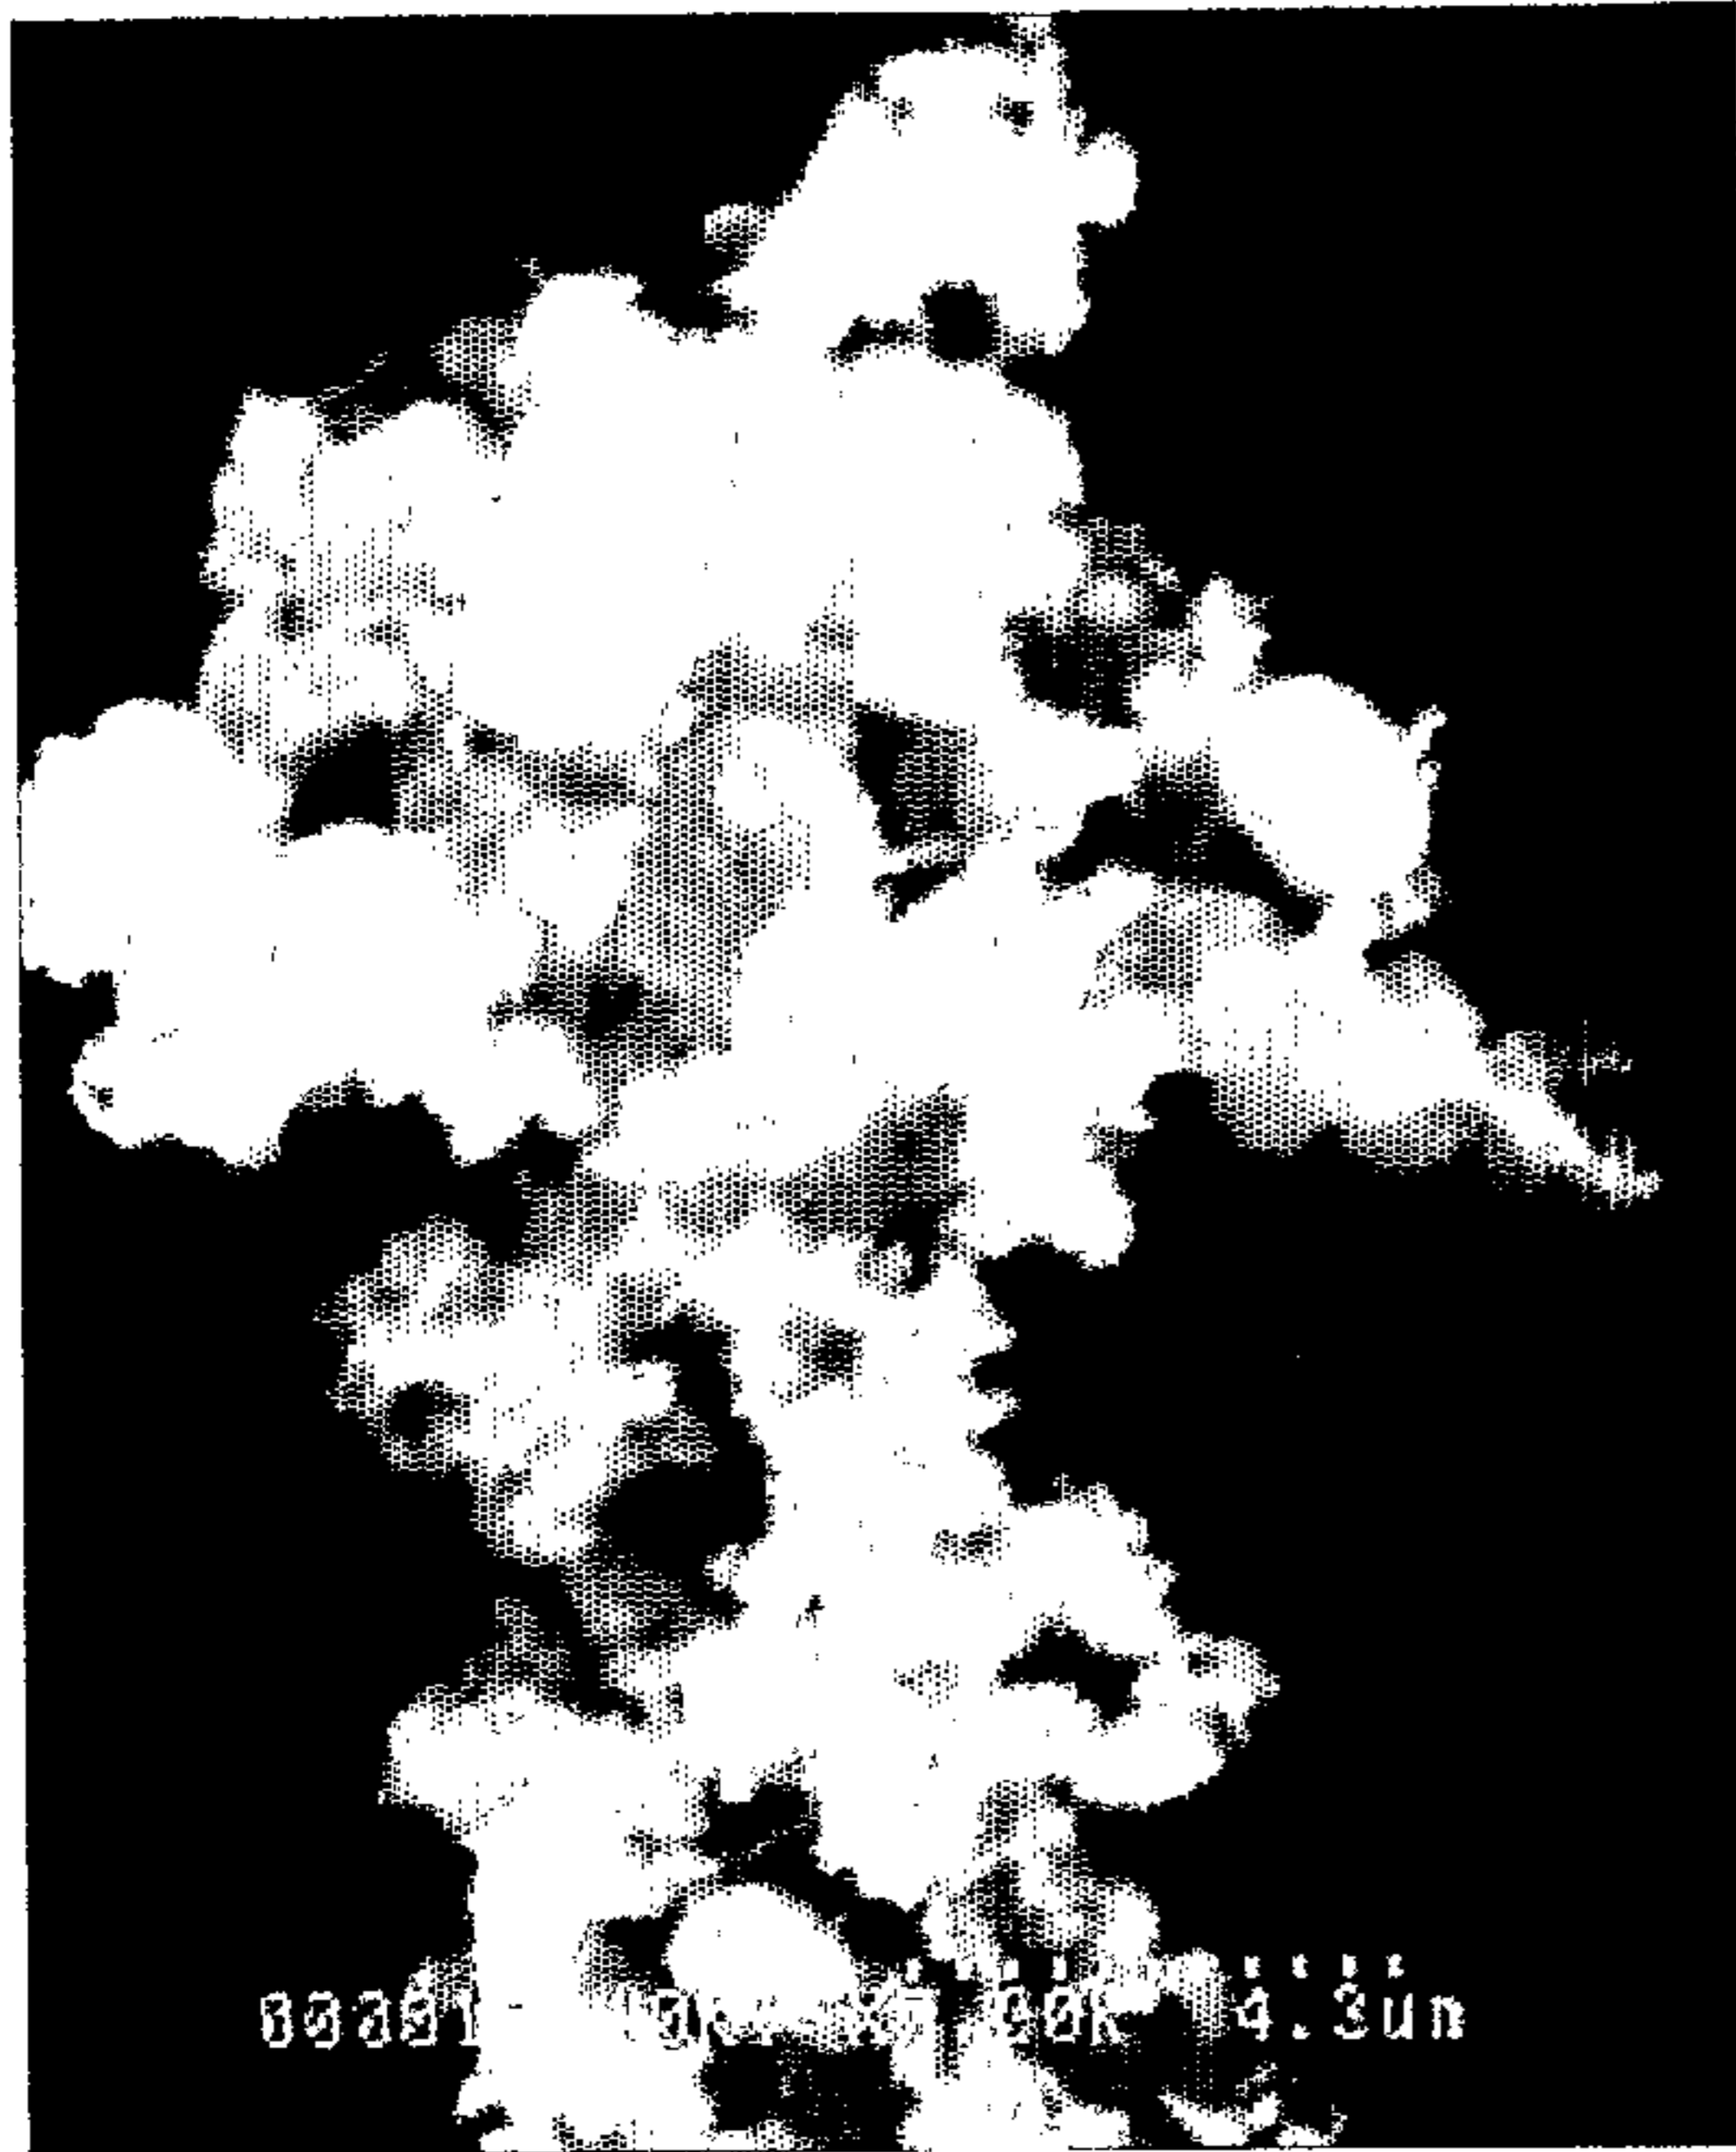

(d)

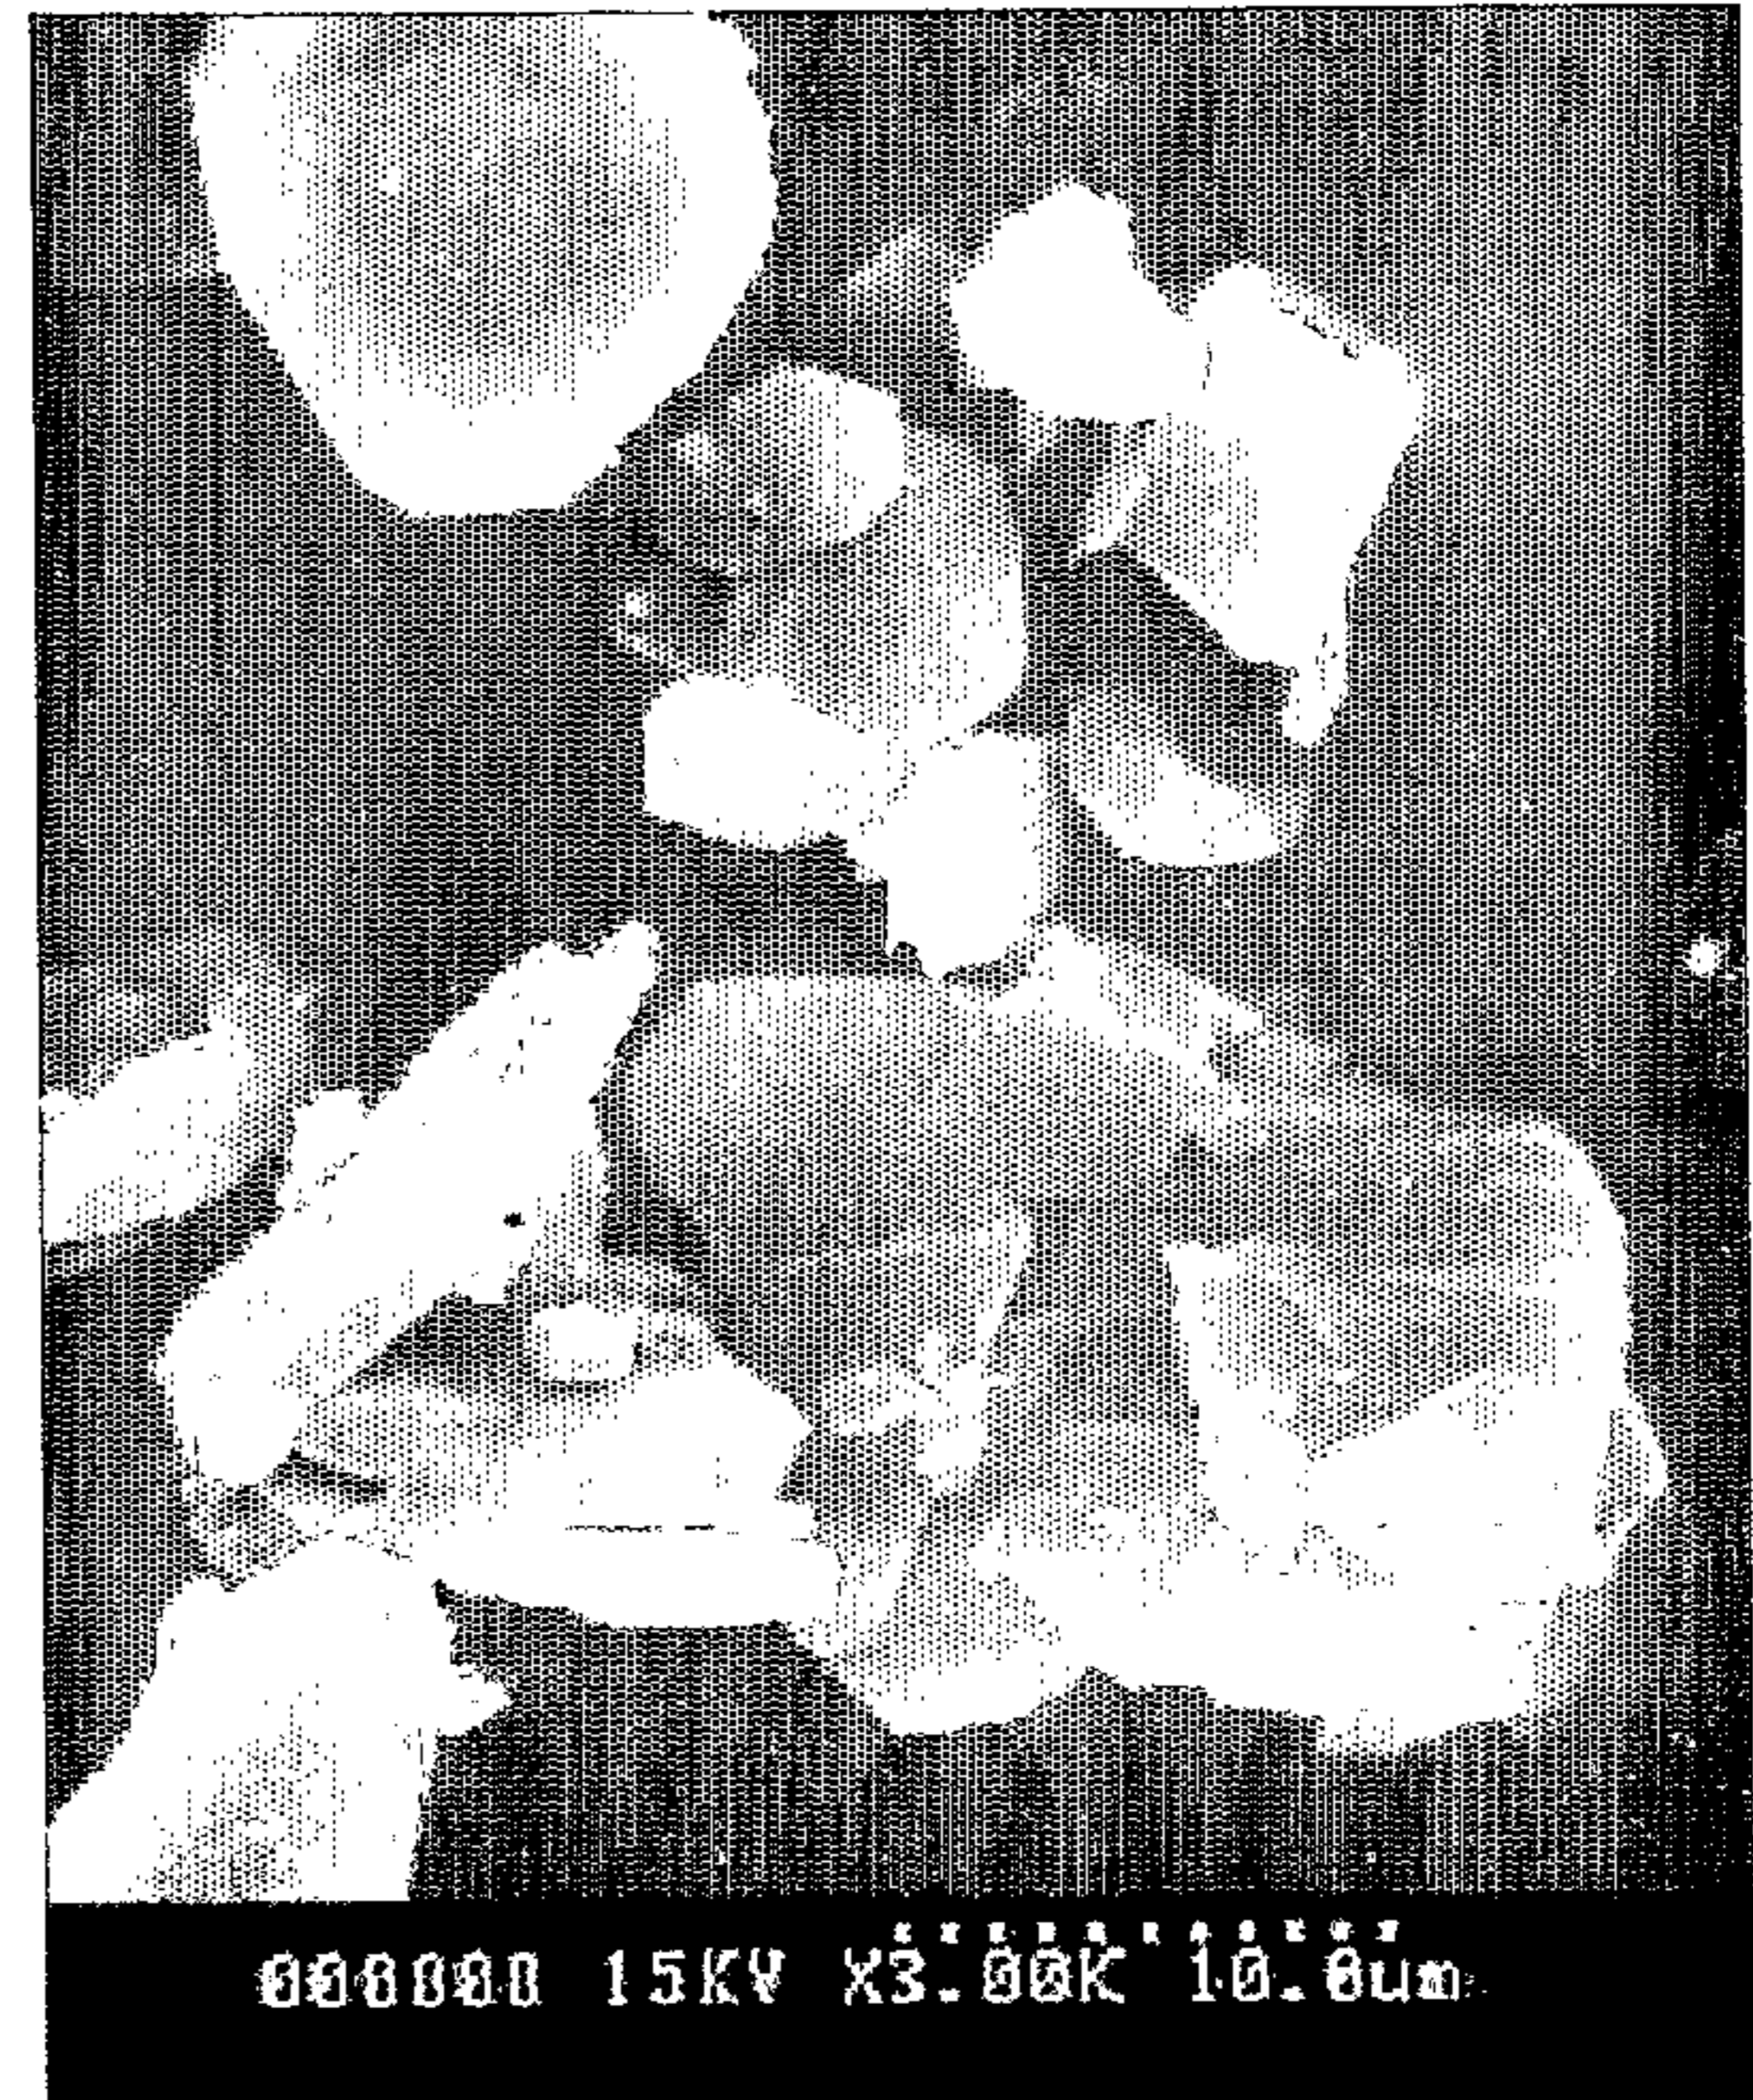


(e)

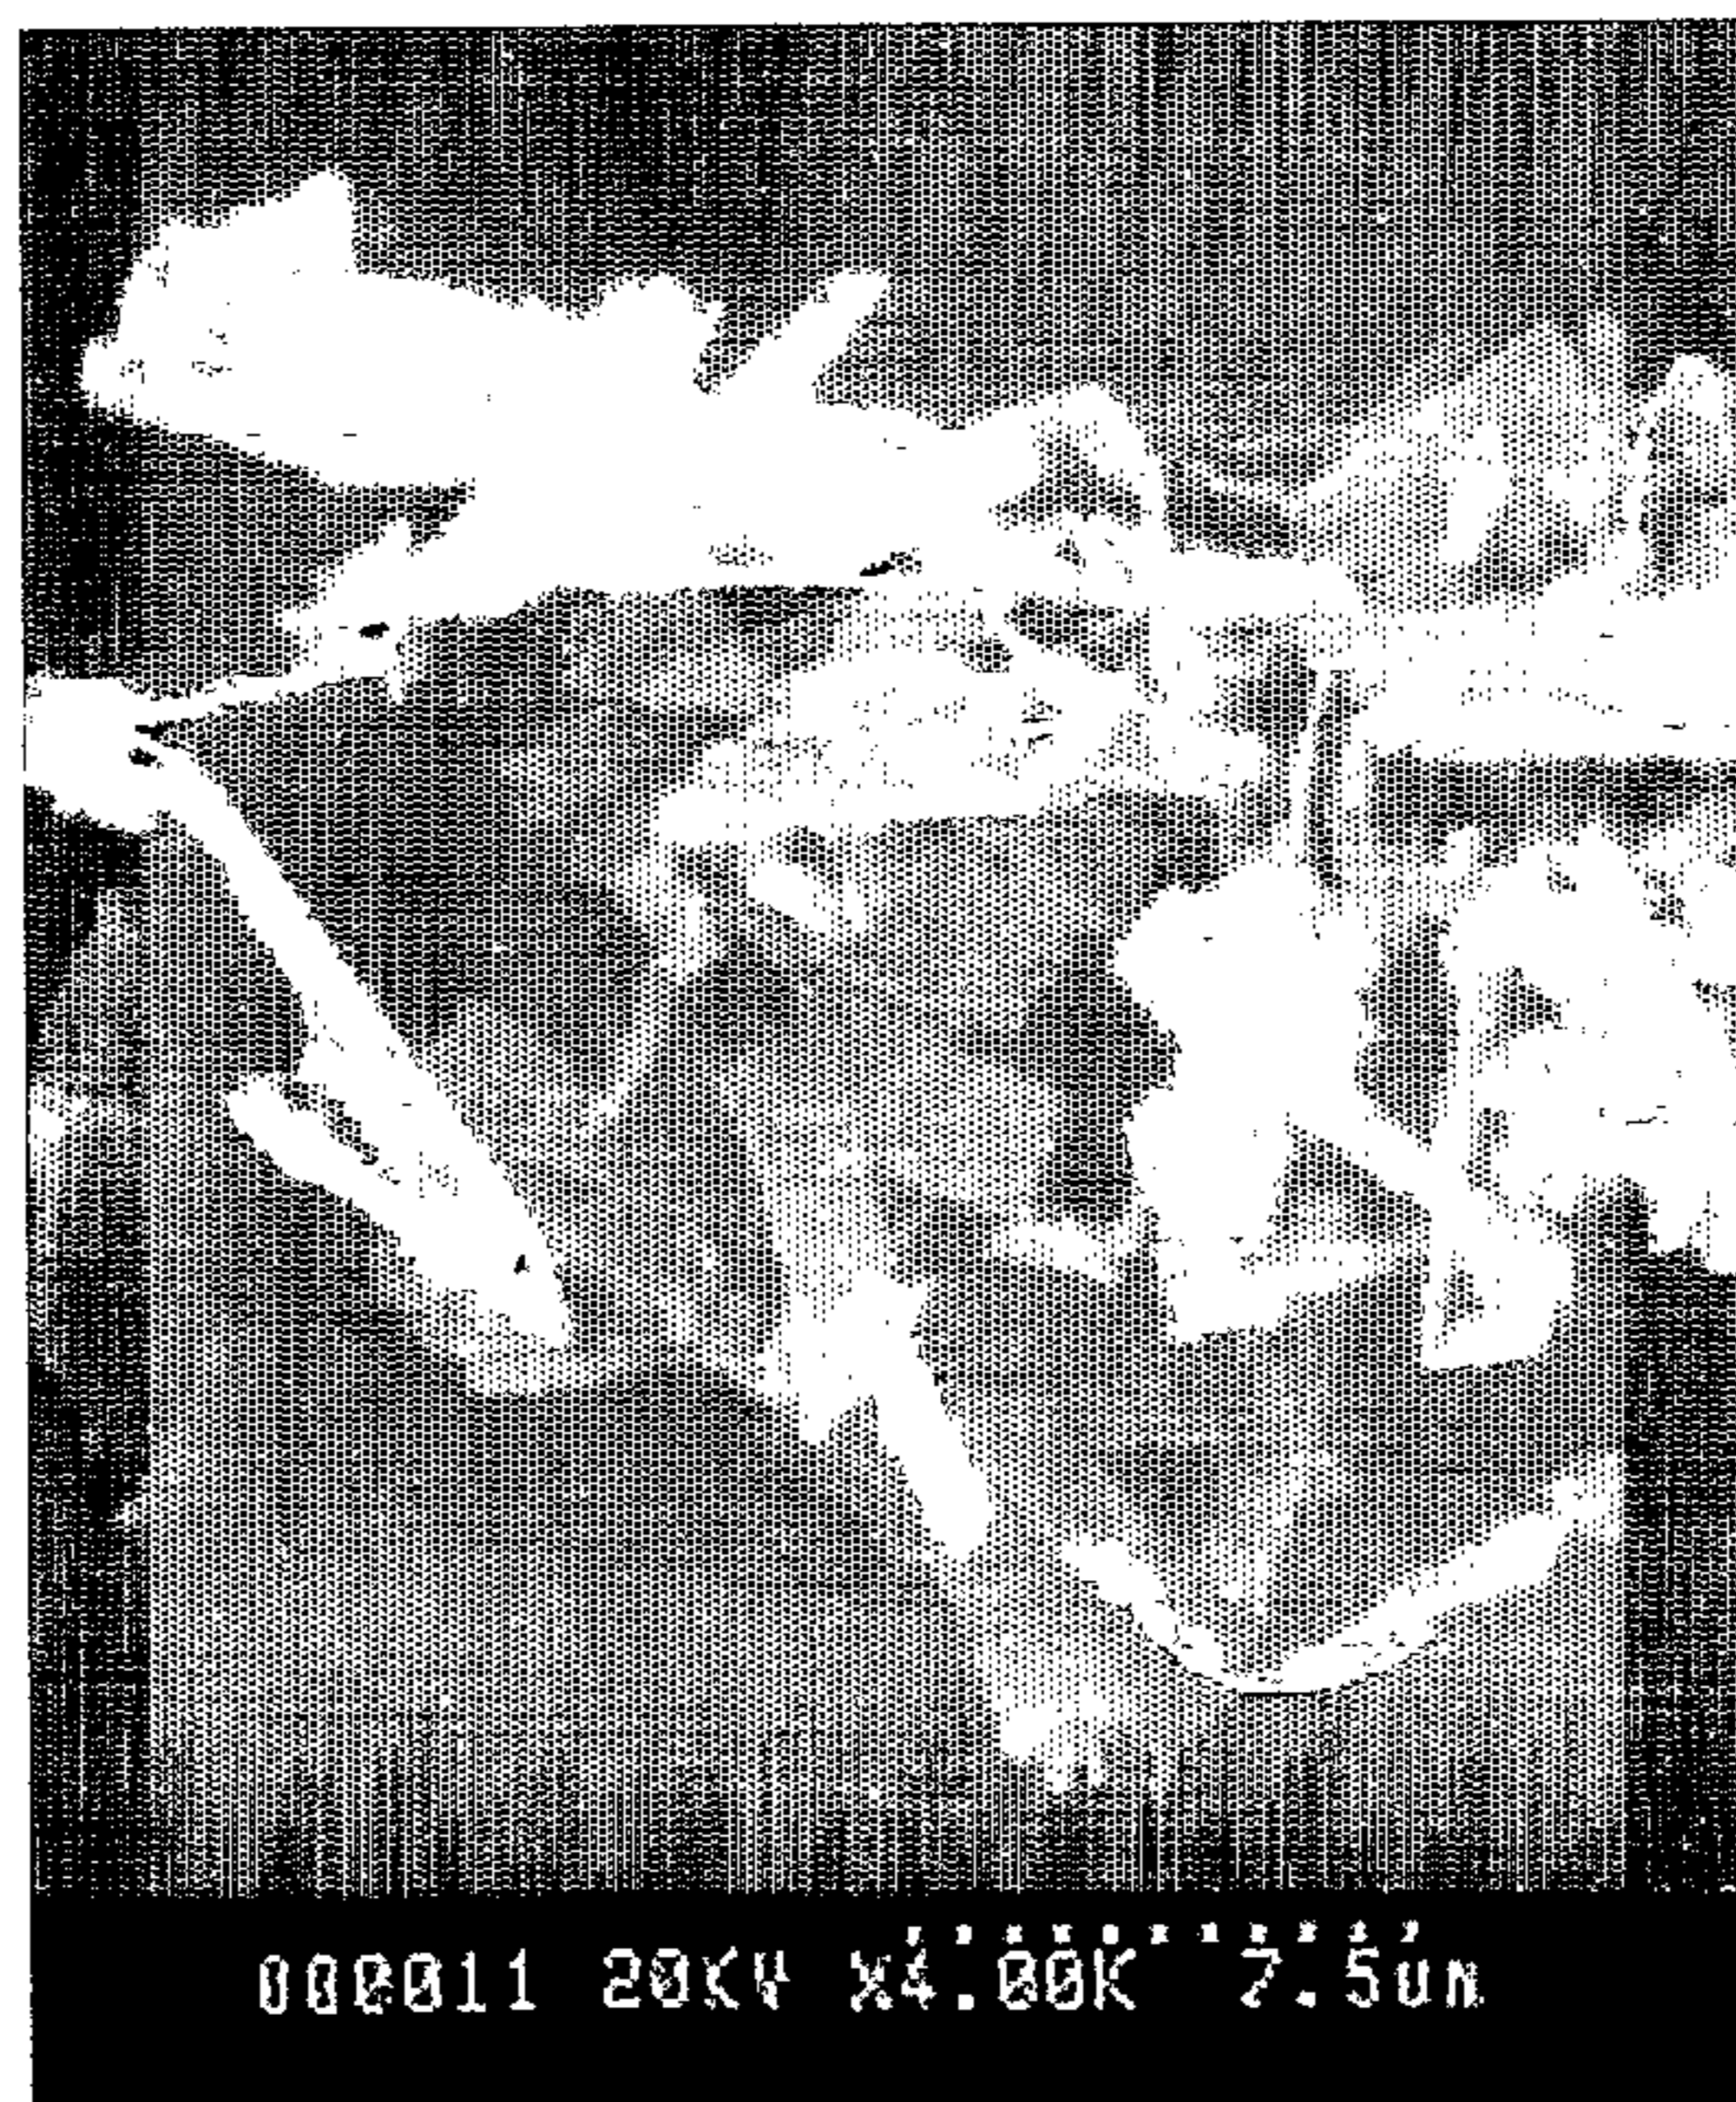


(f)

FIG. 5

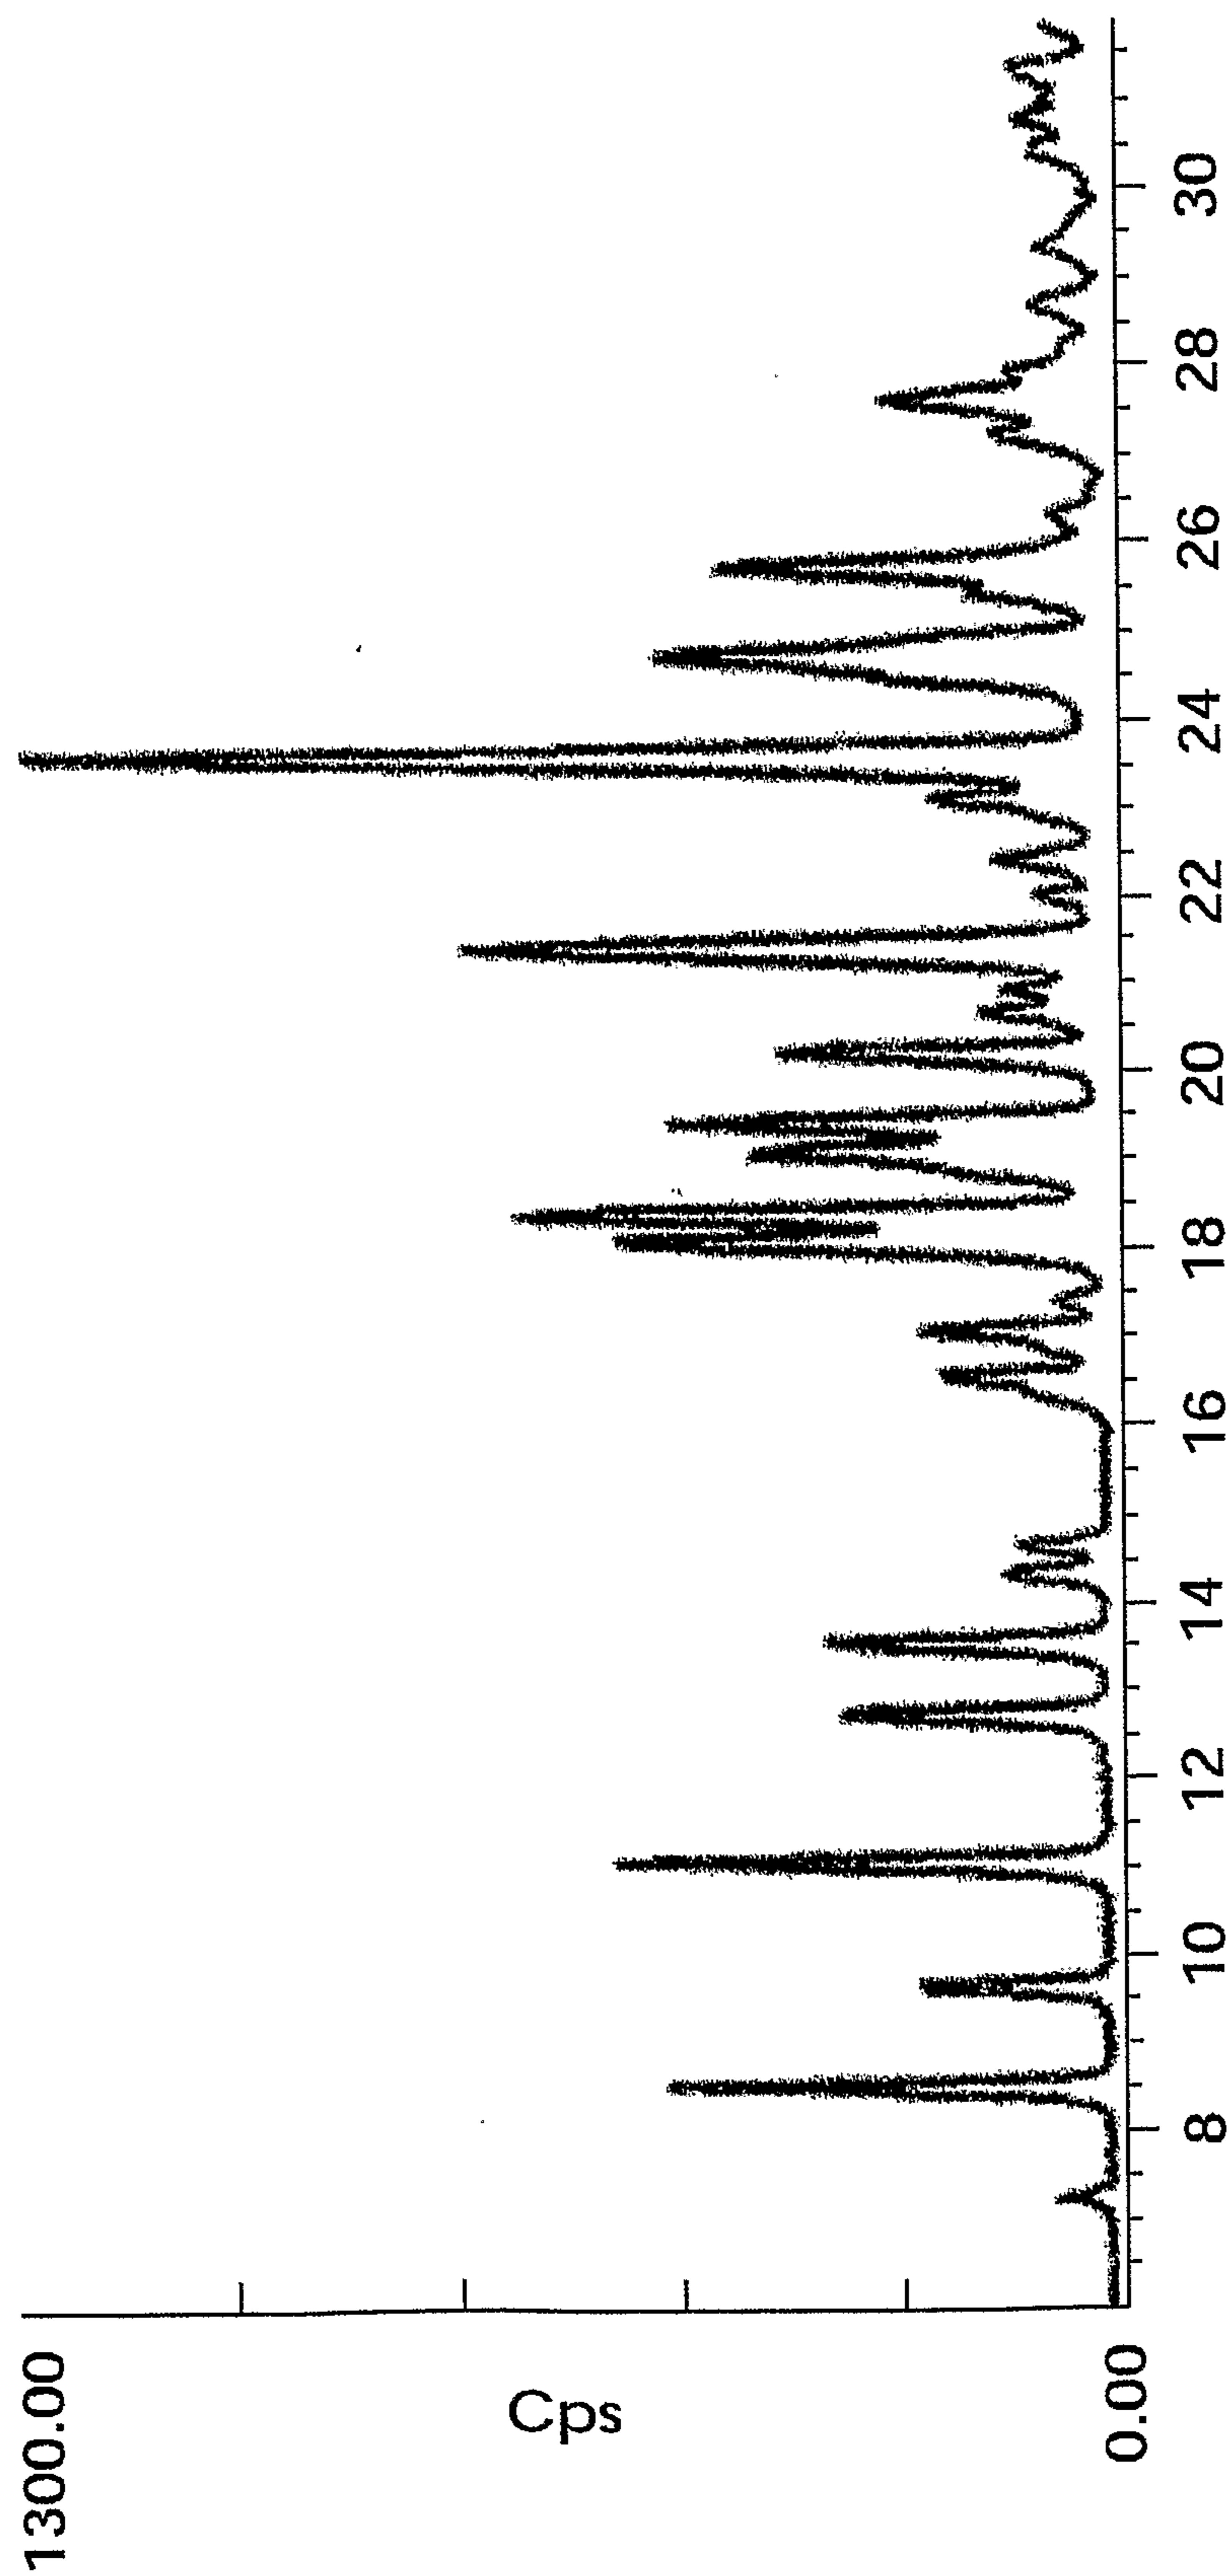


(a)

FIG. 6

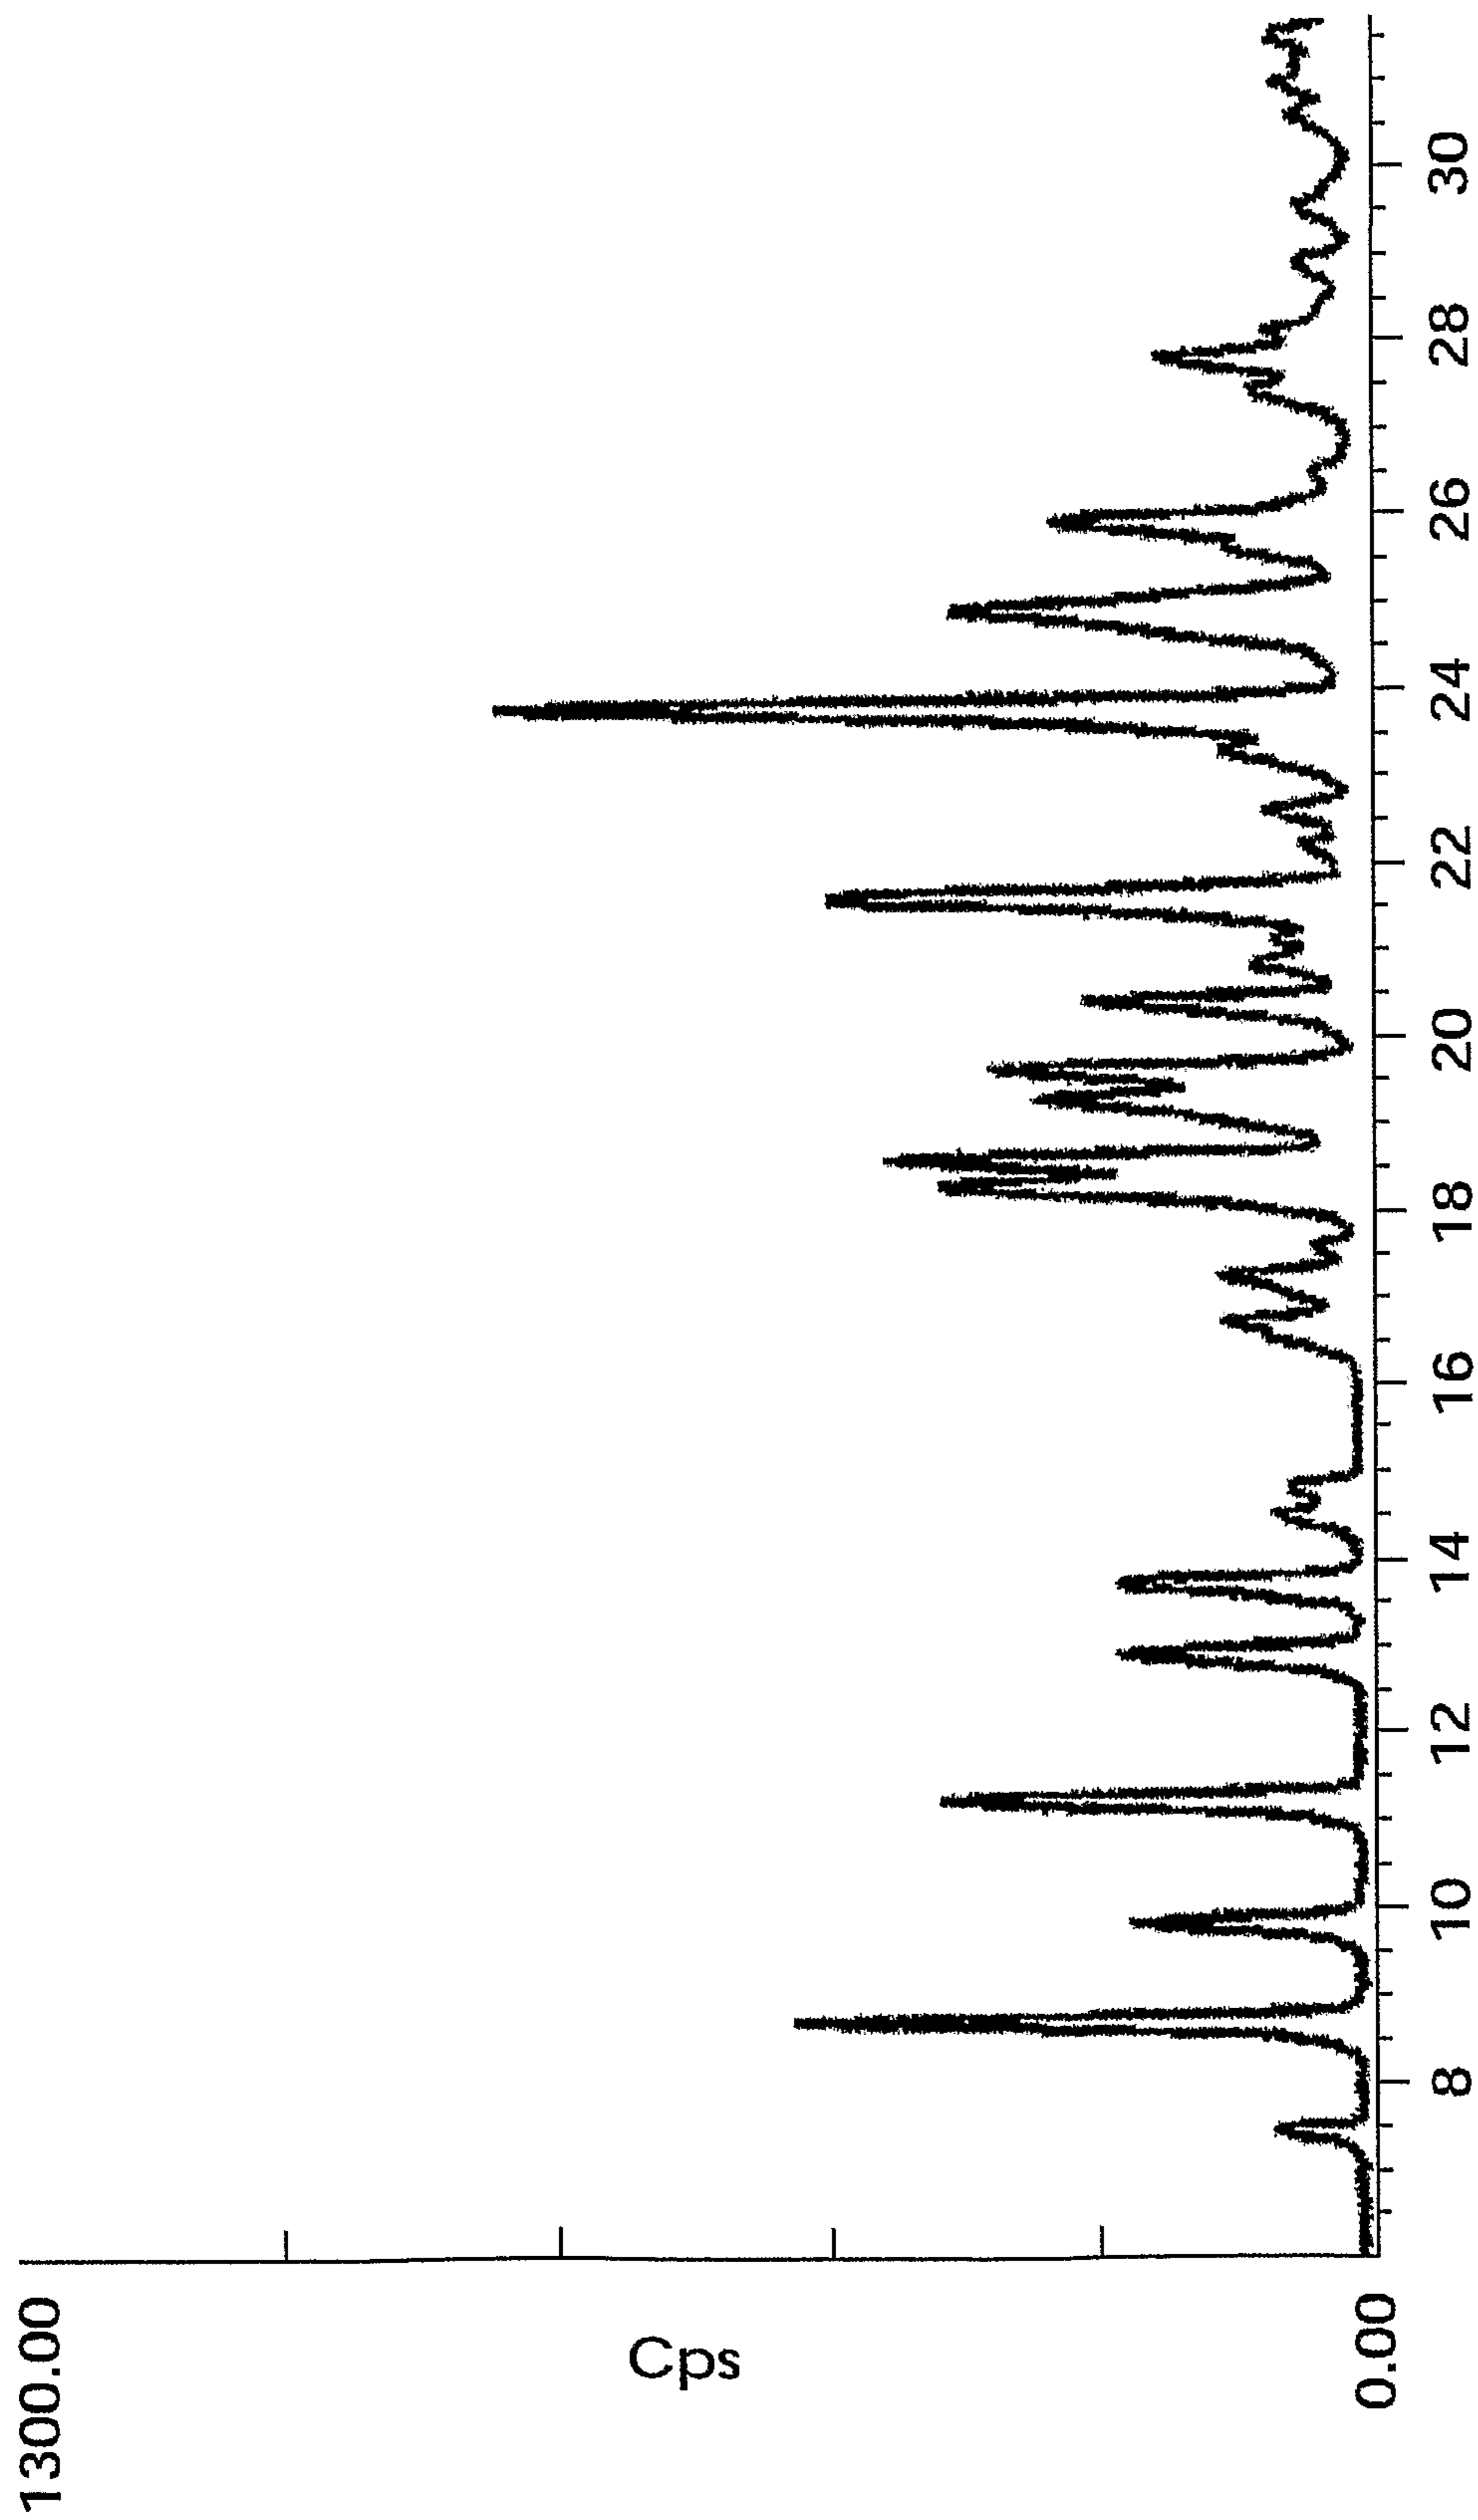

(b)

FIG. 6

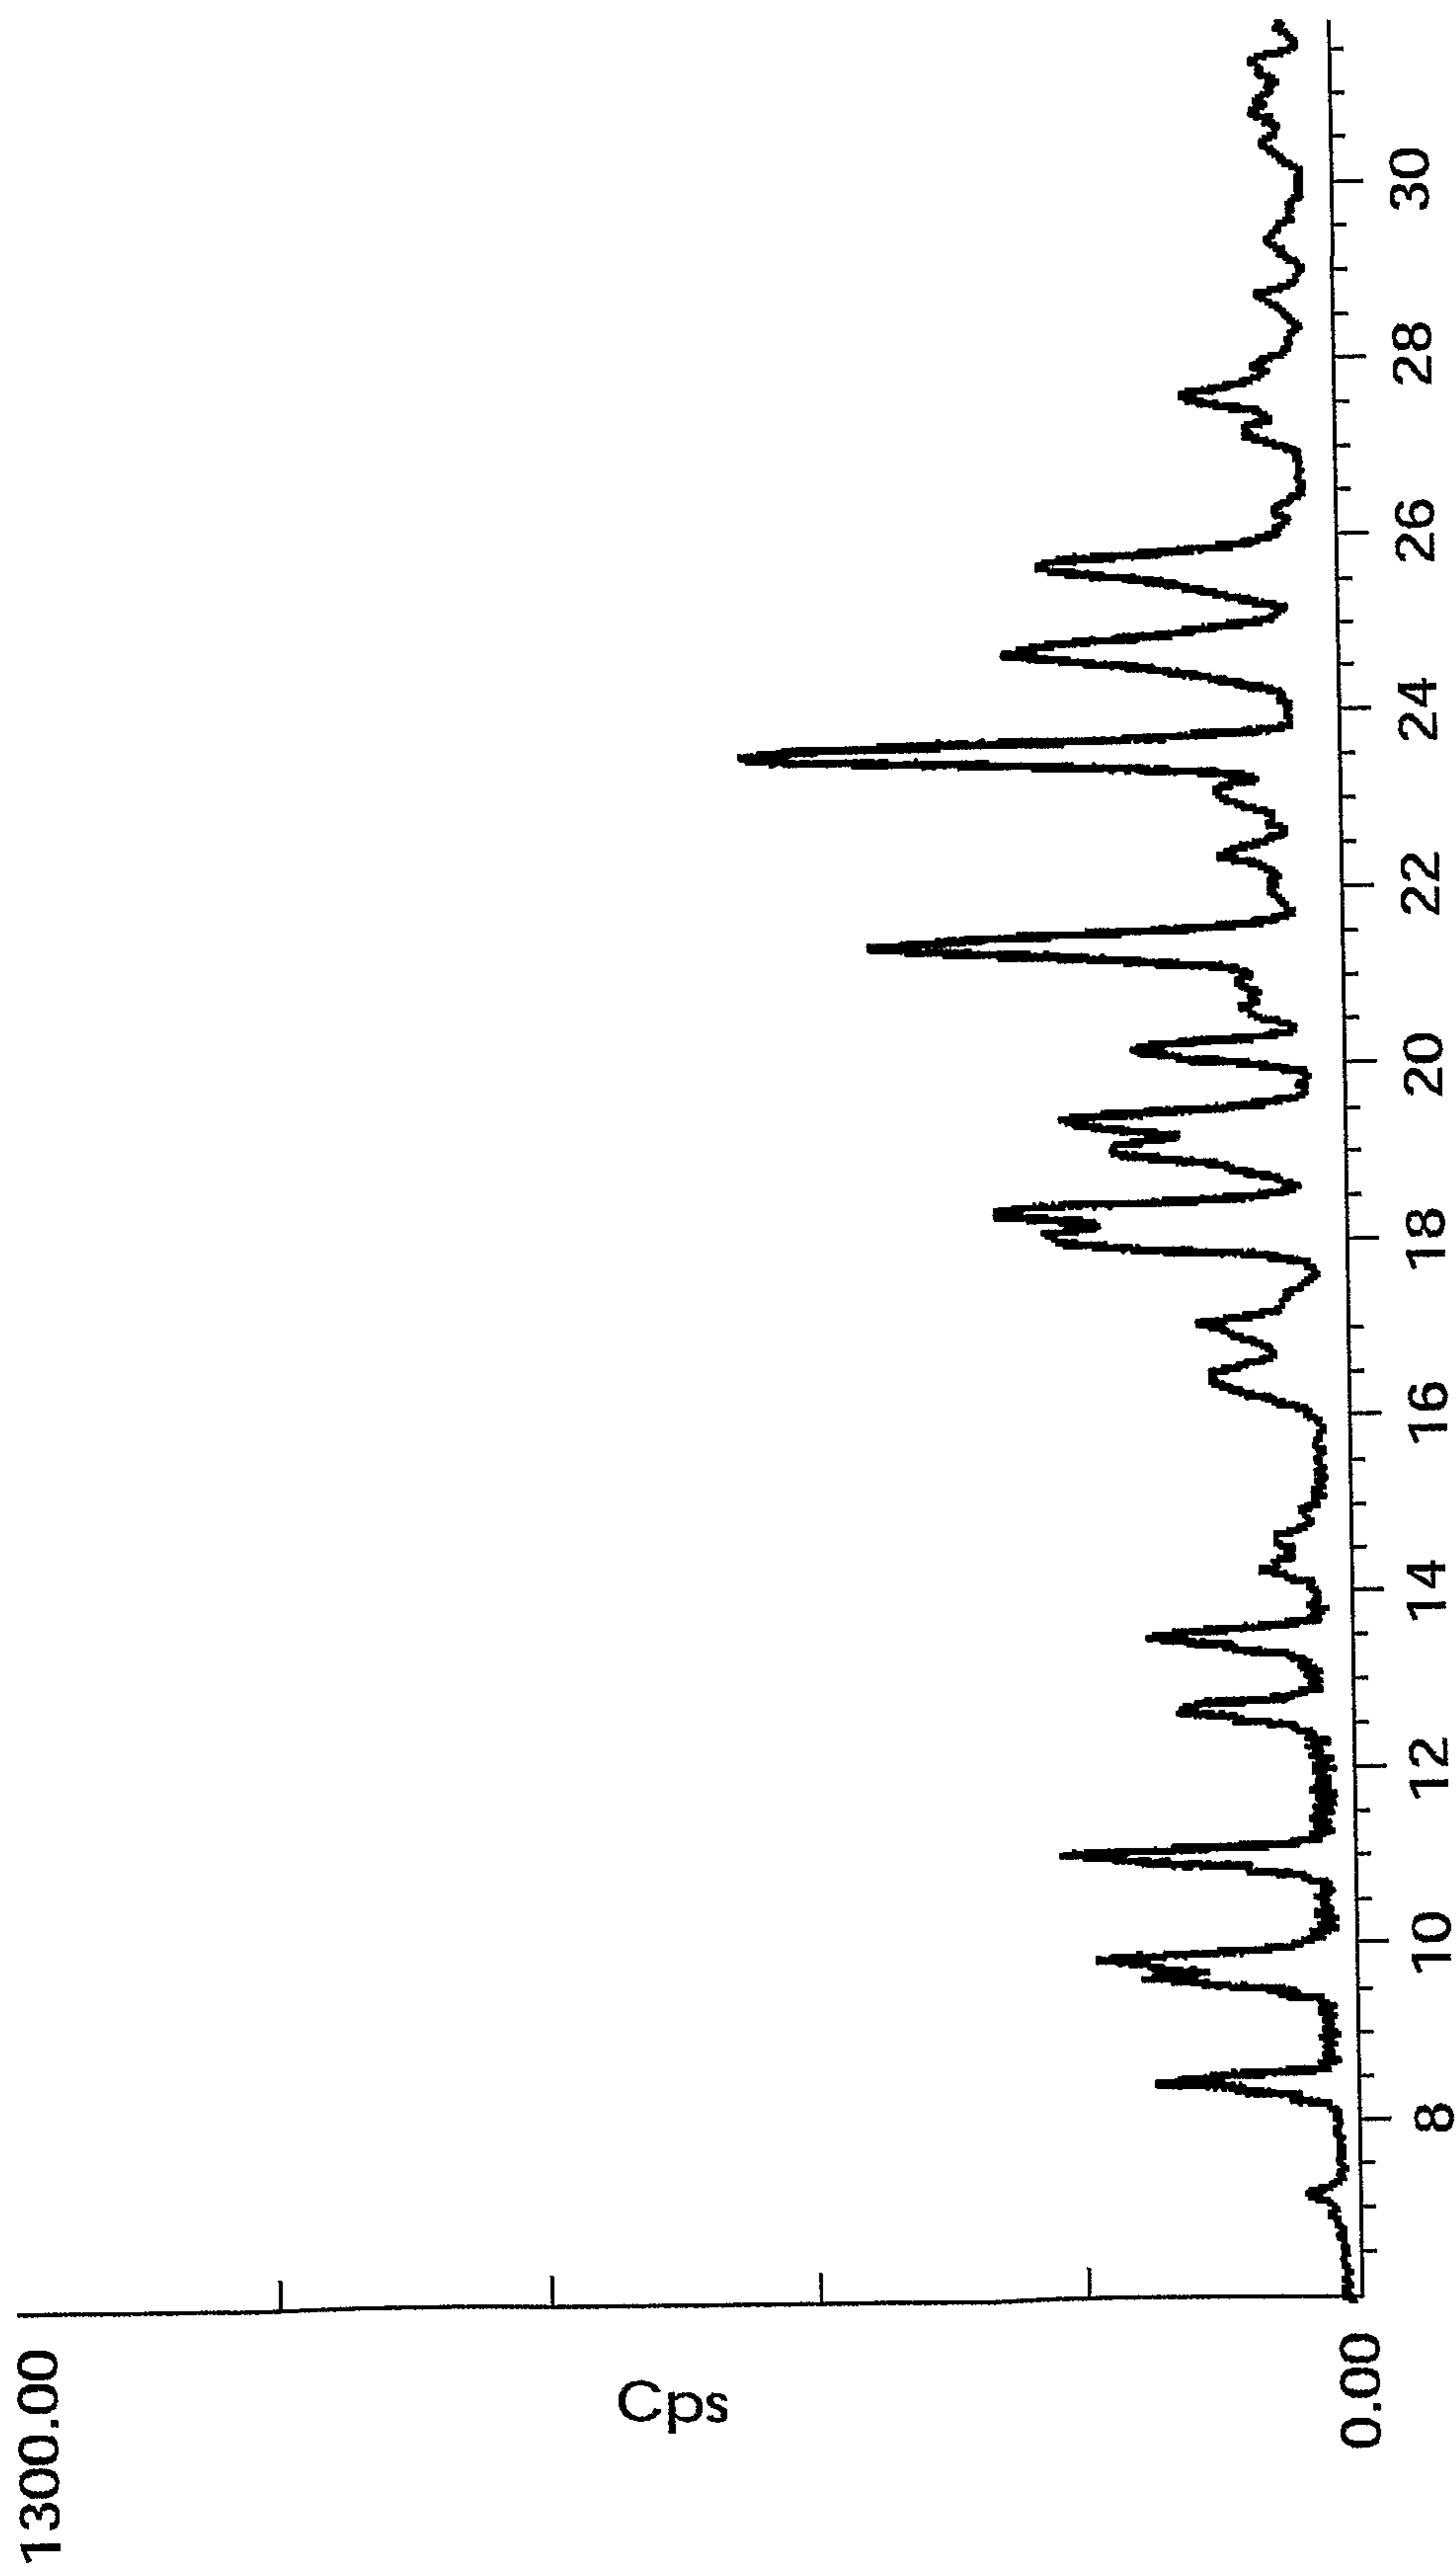

(c)

FIG. 6



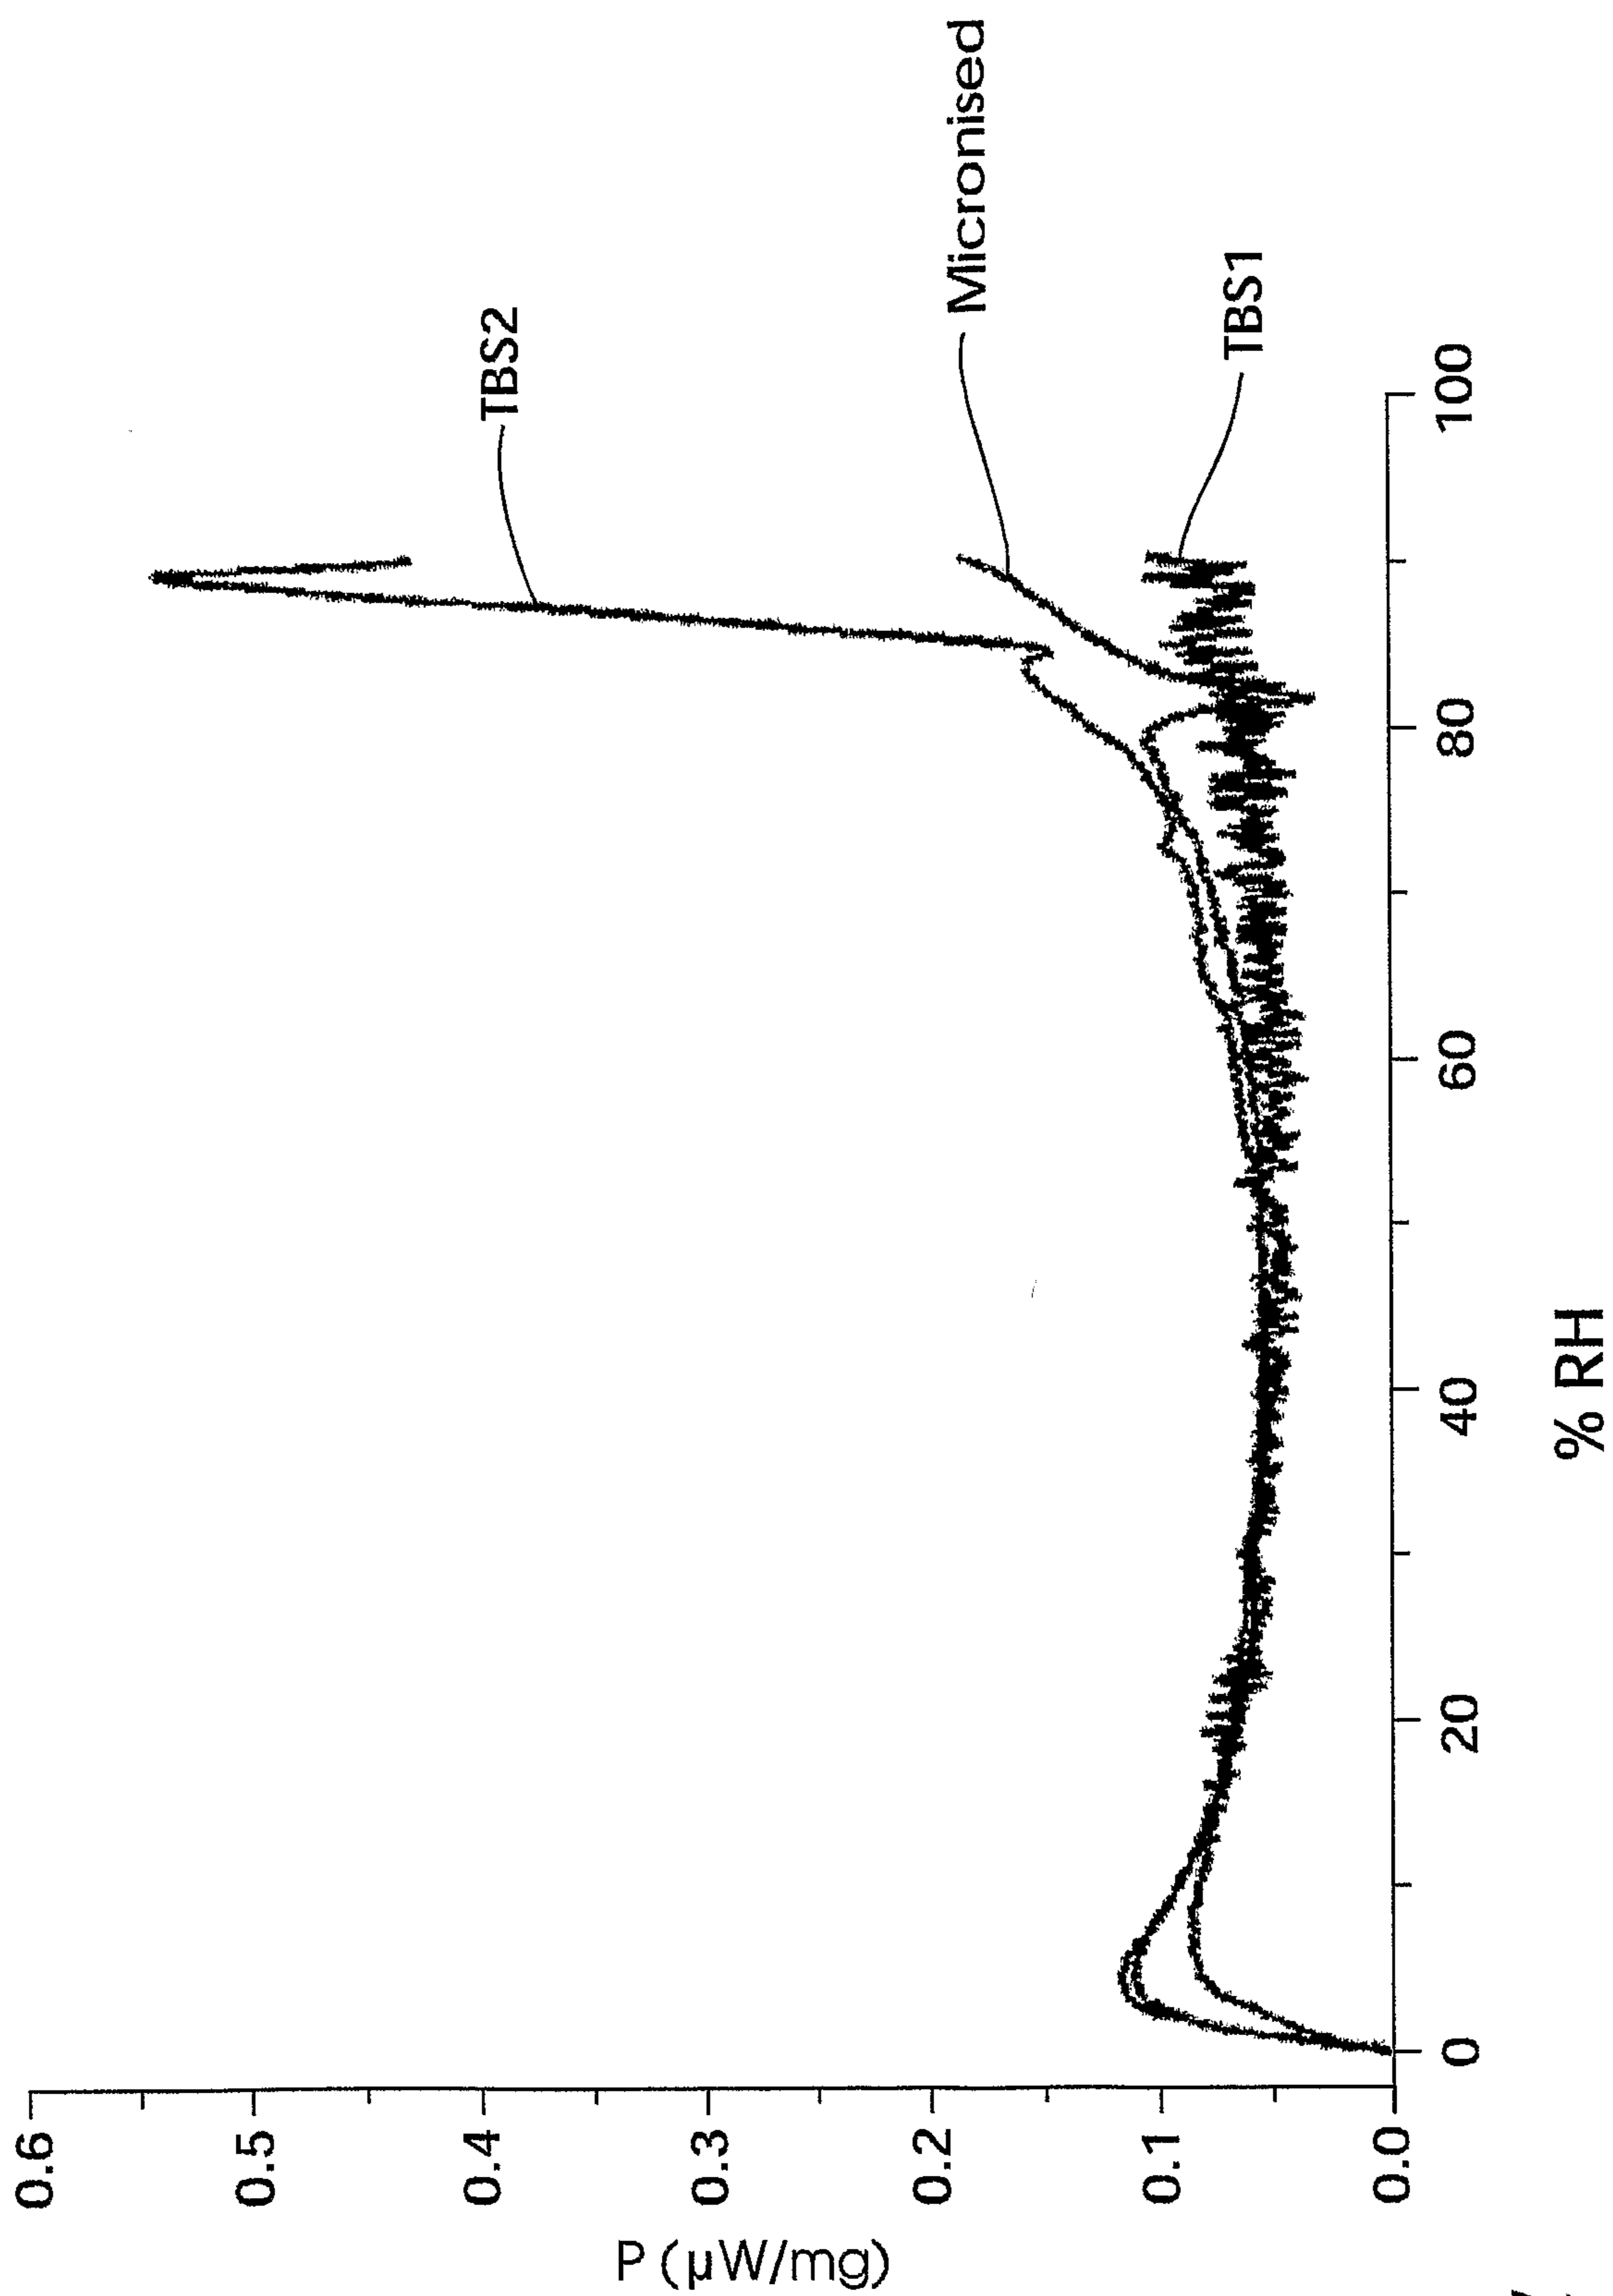


FIG. 7

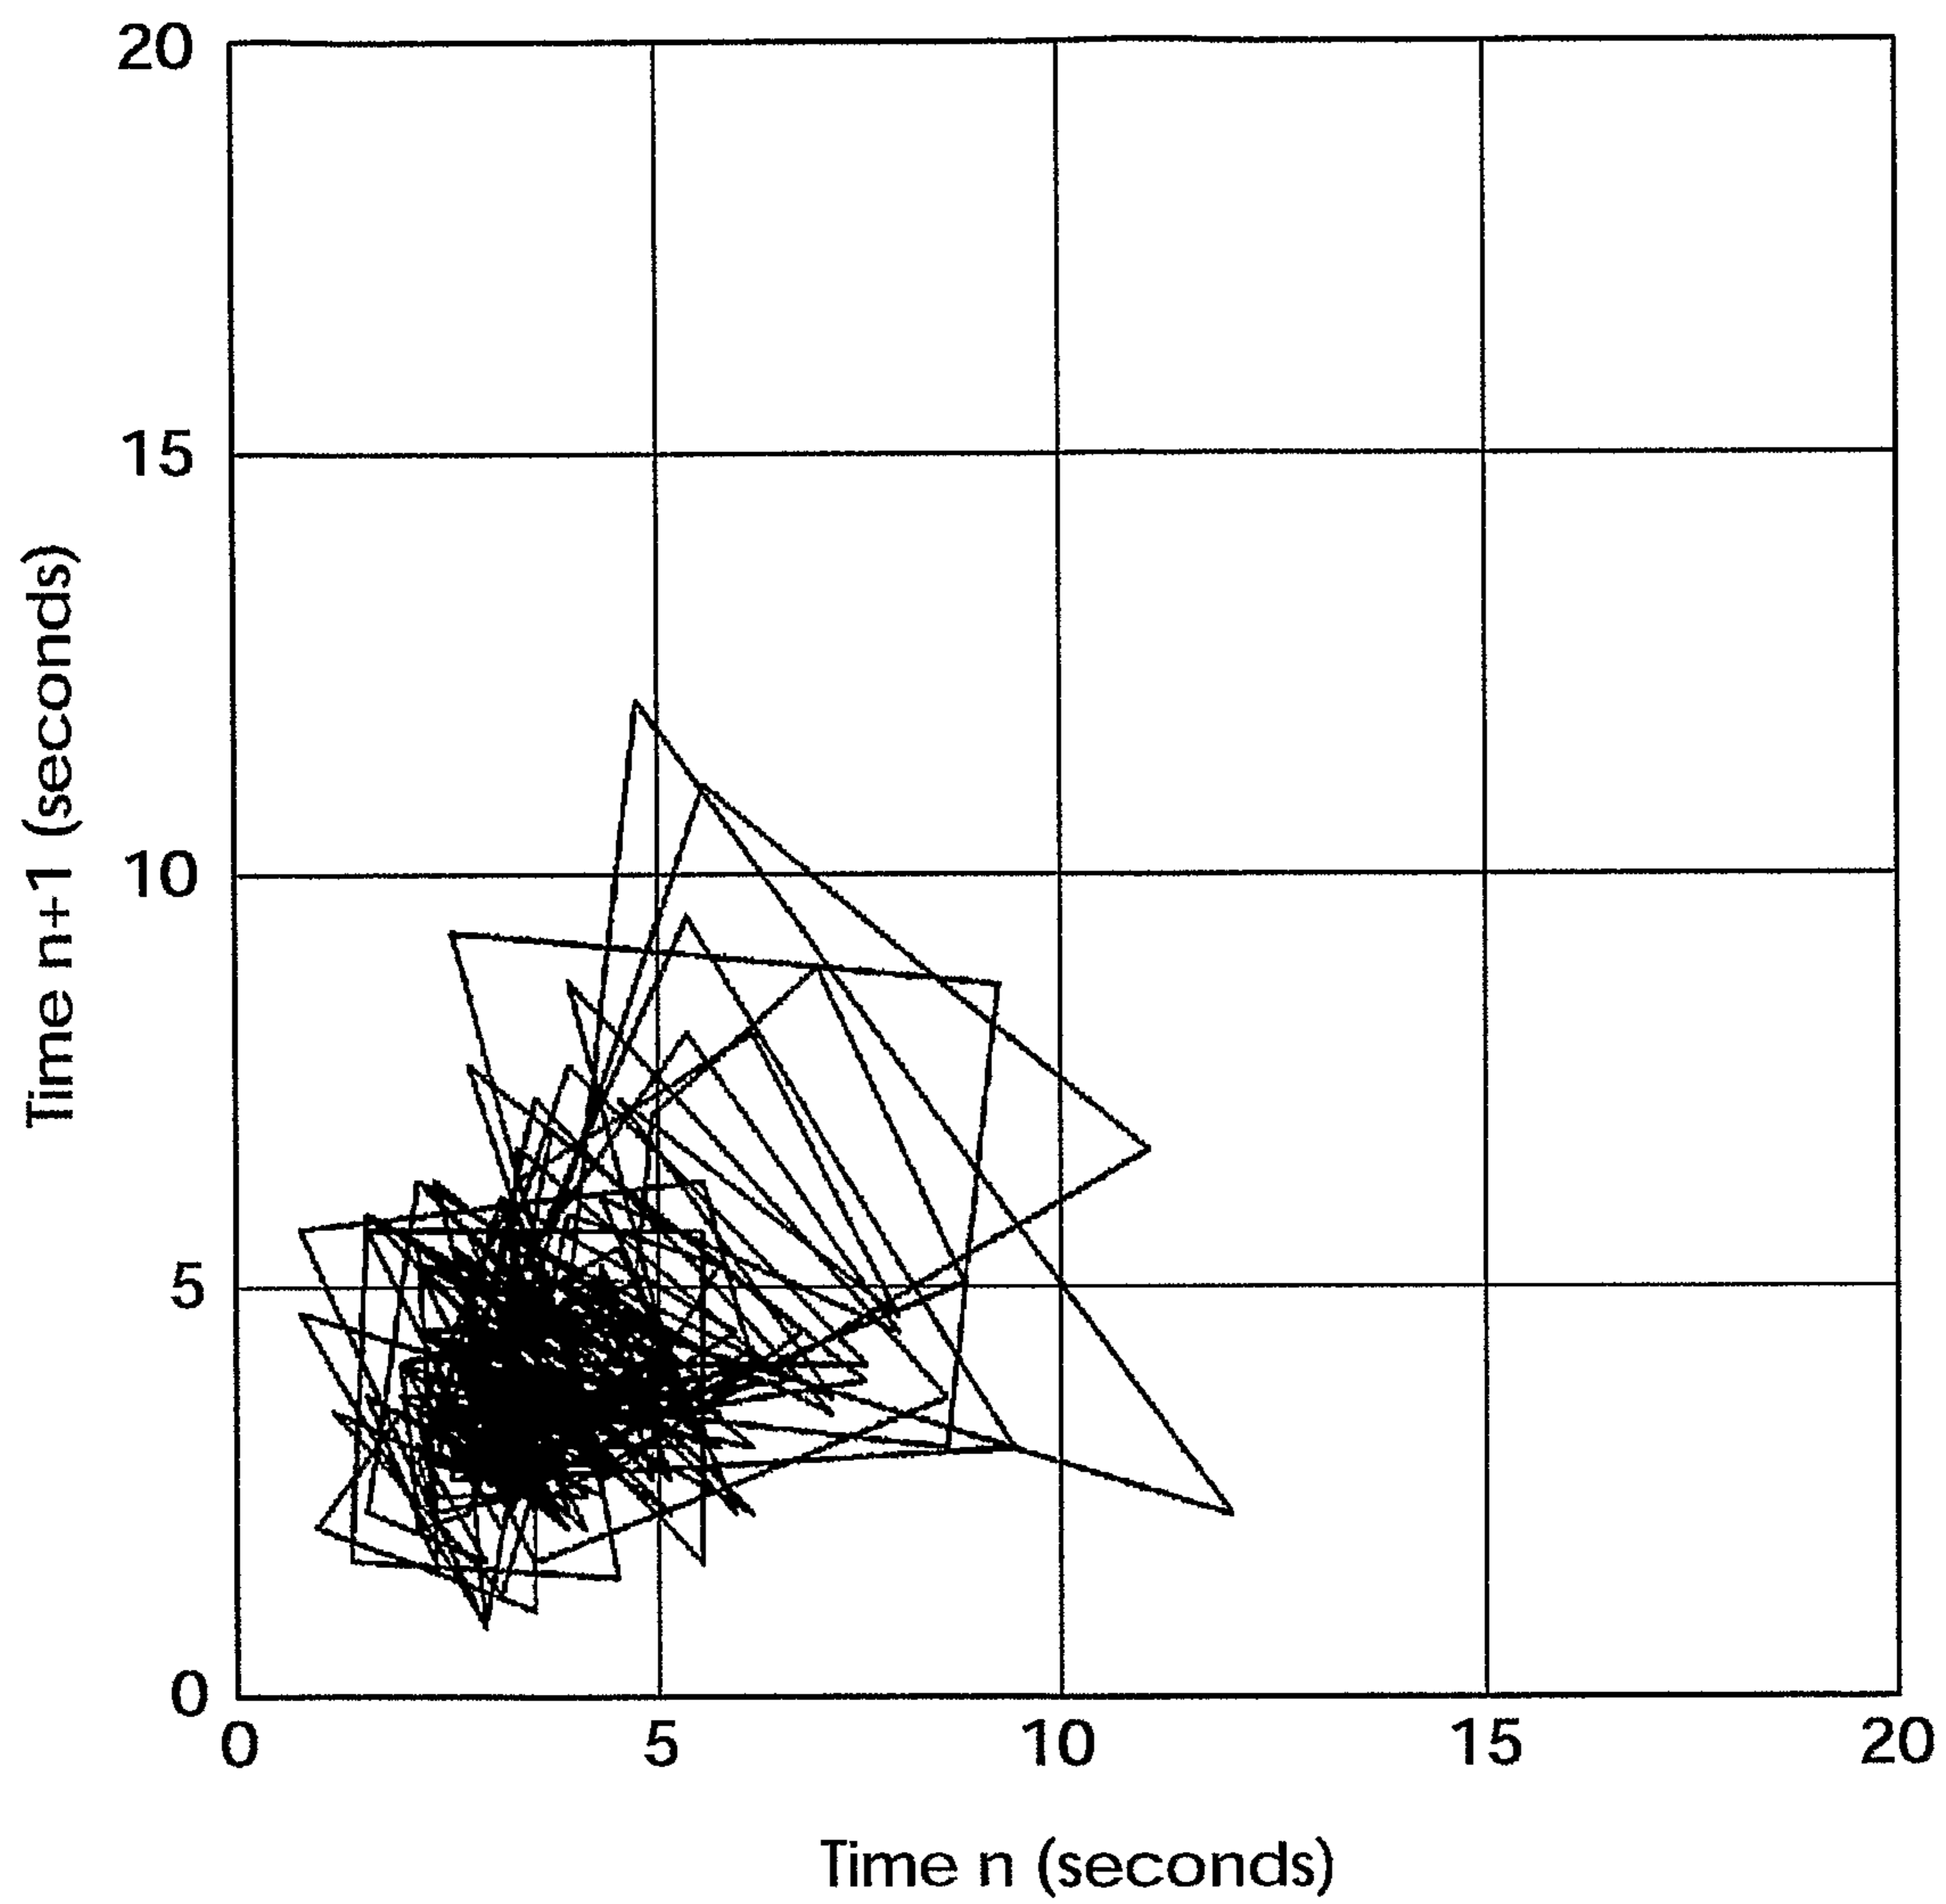


(a) Micronised

FIG. 8

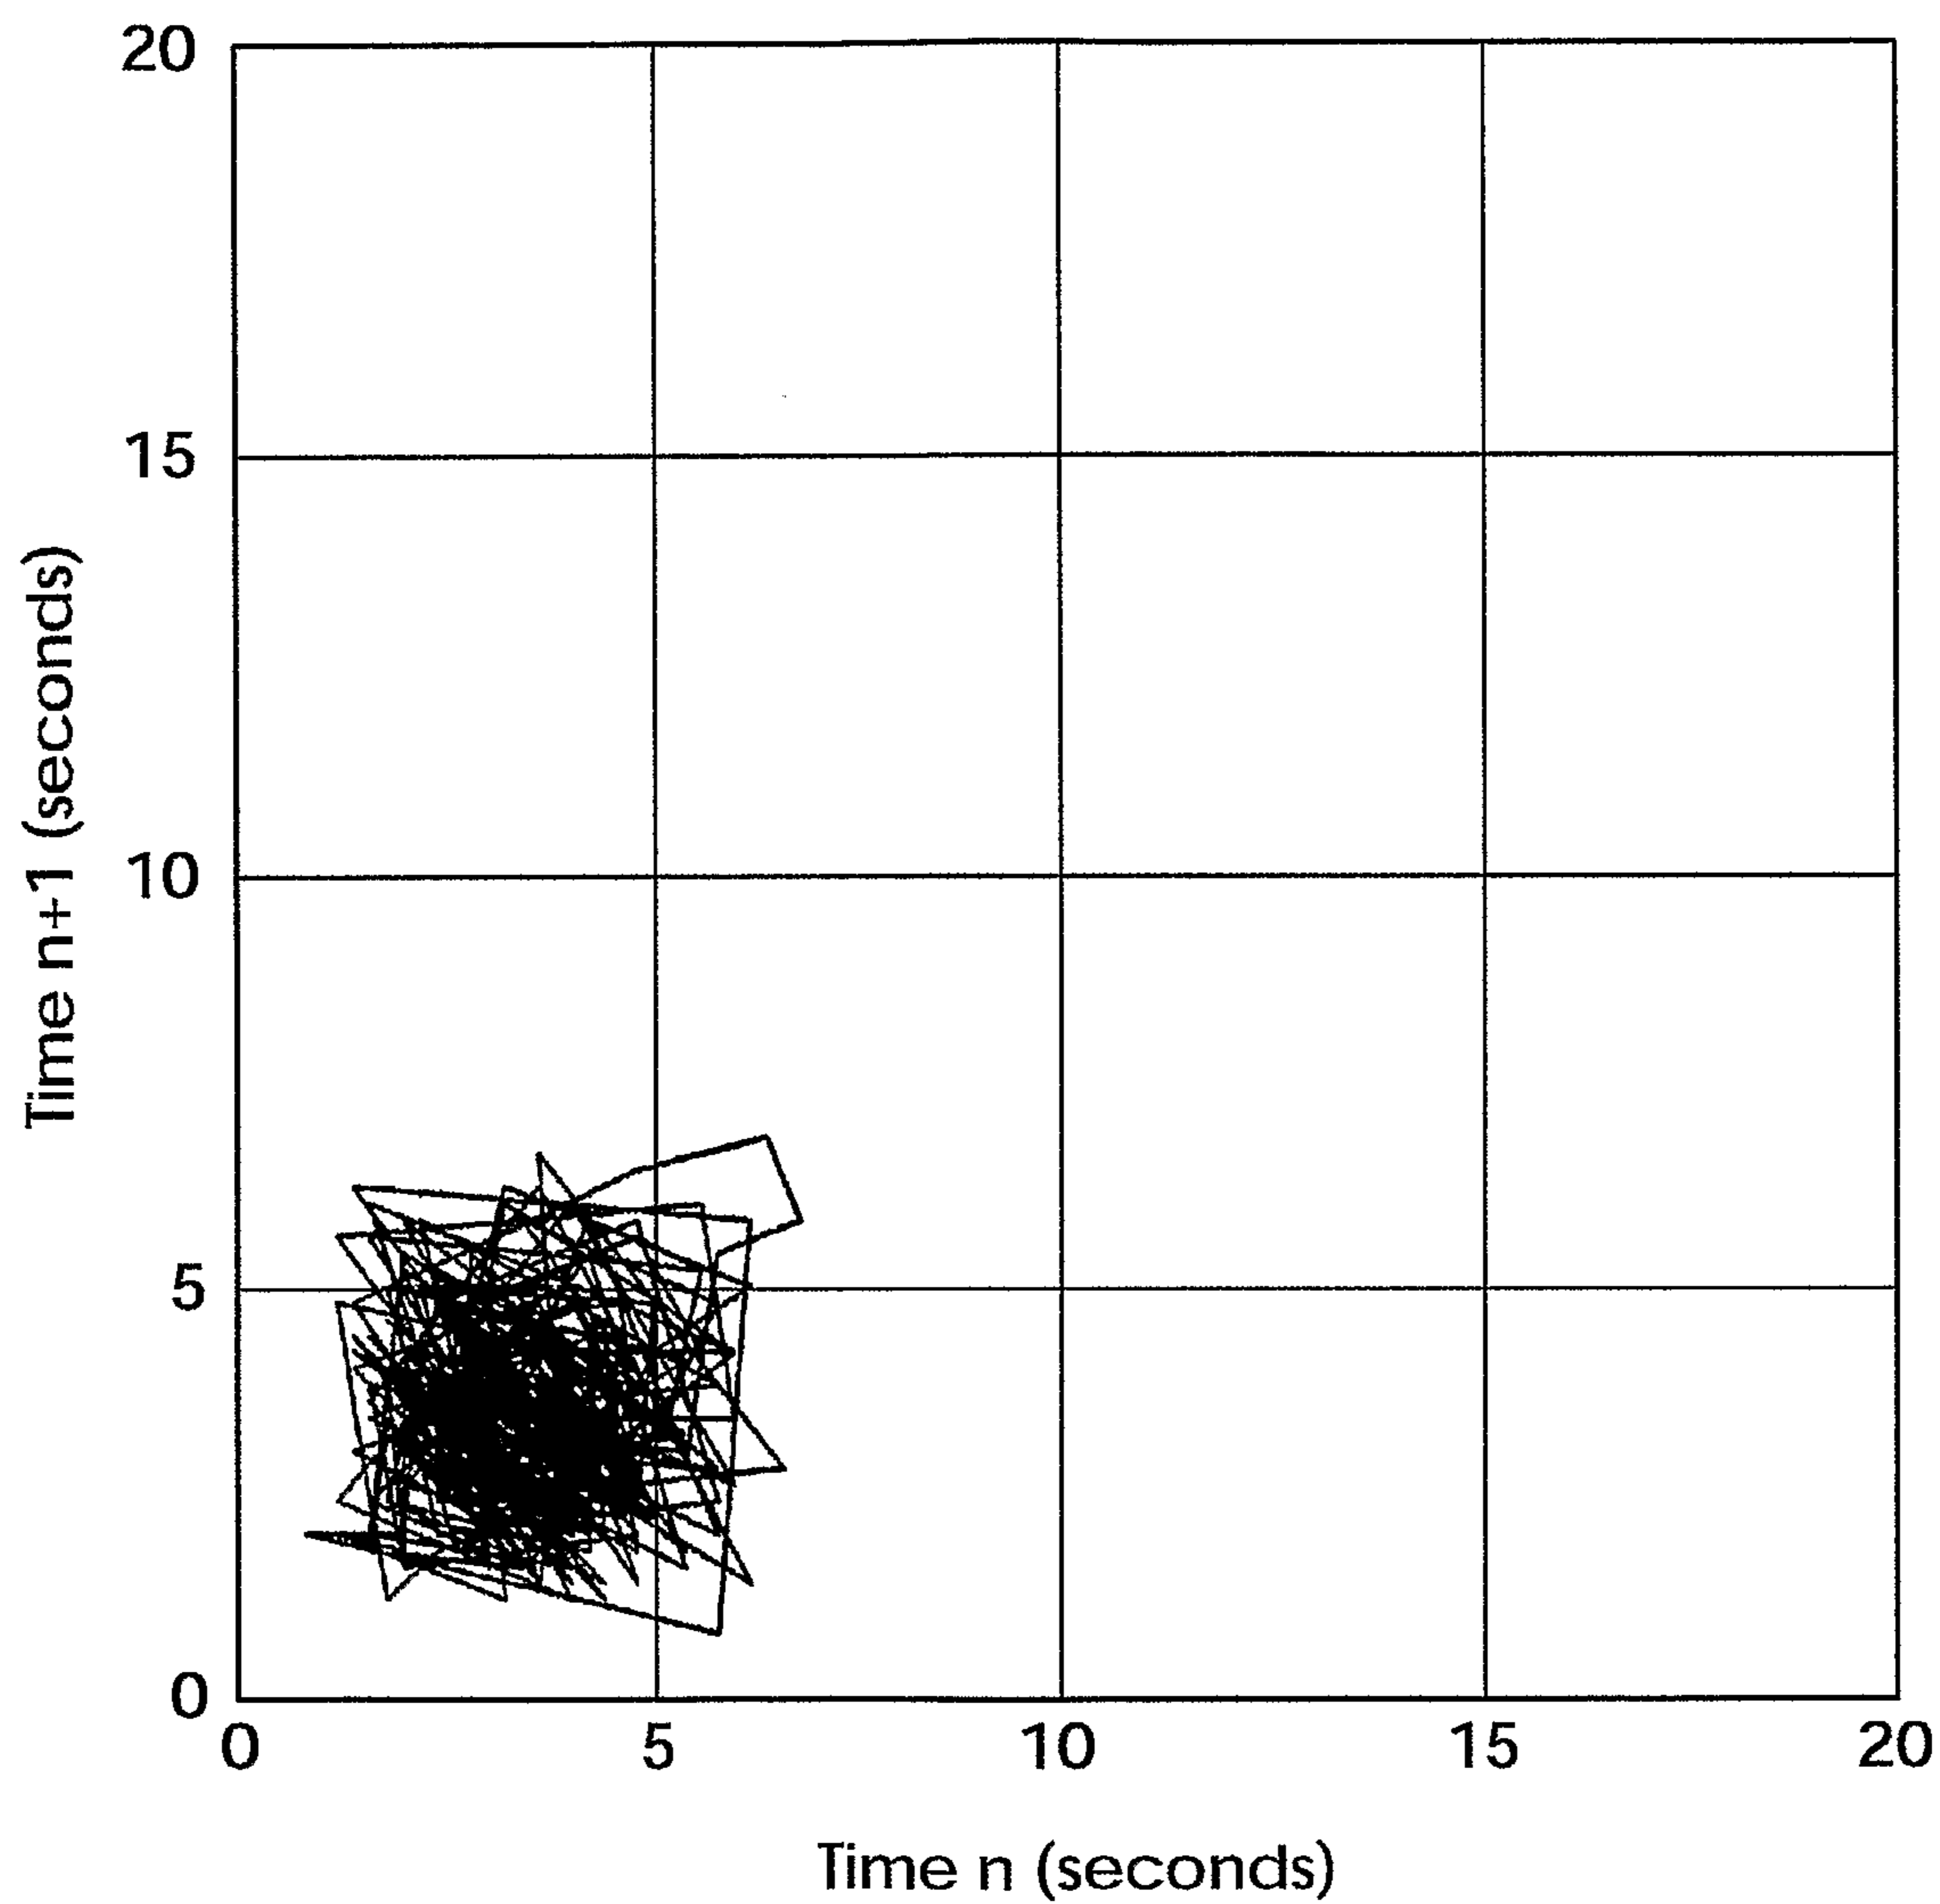


(b) TBS2

FIG. 8

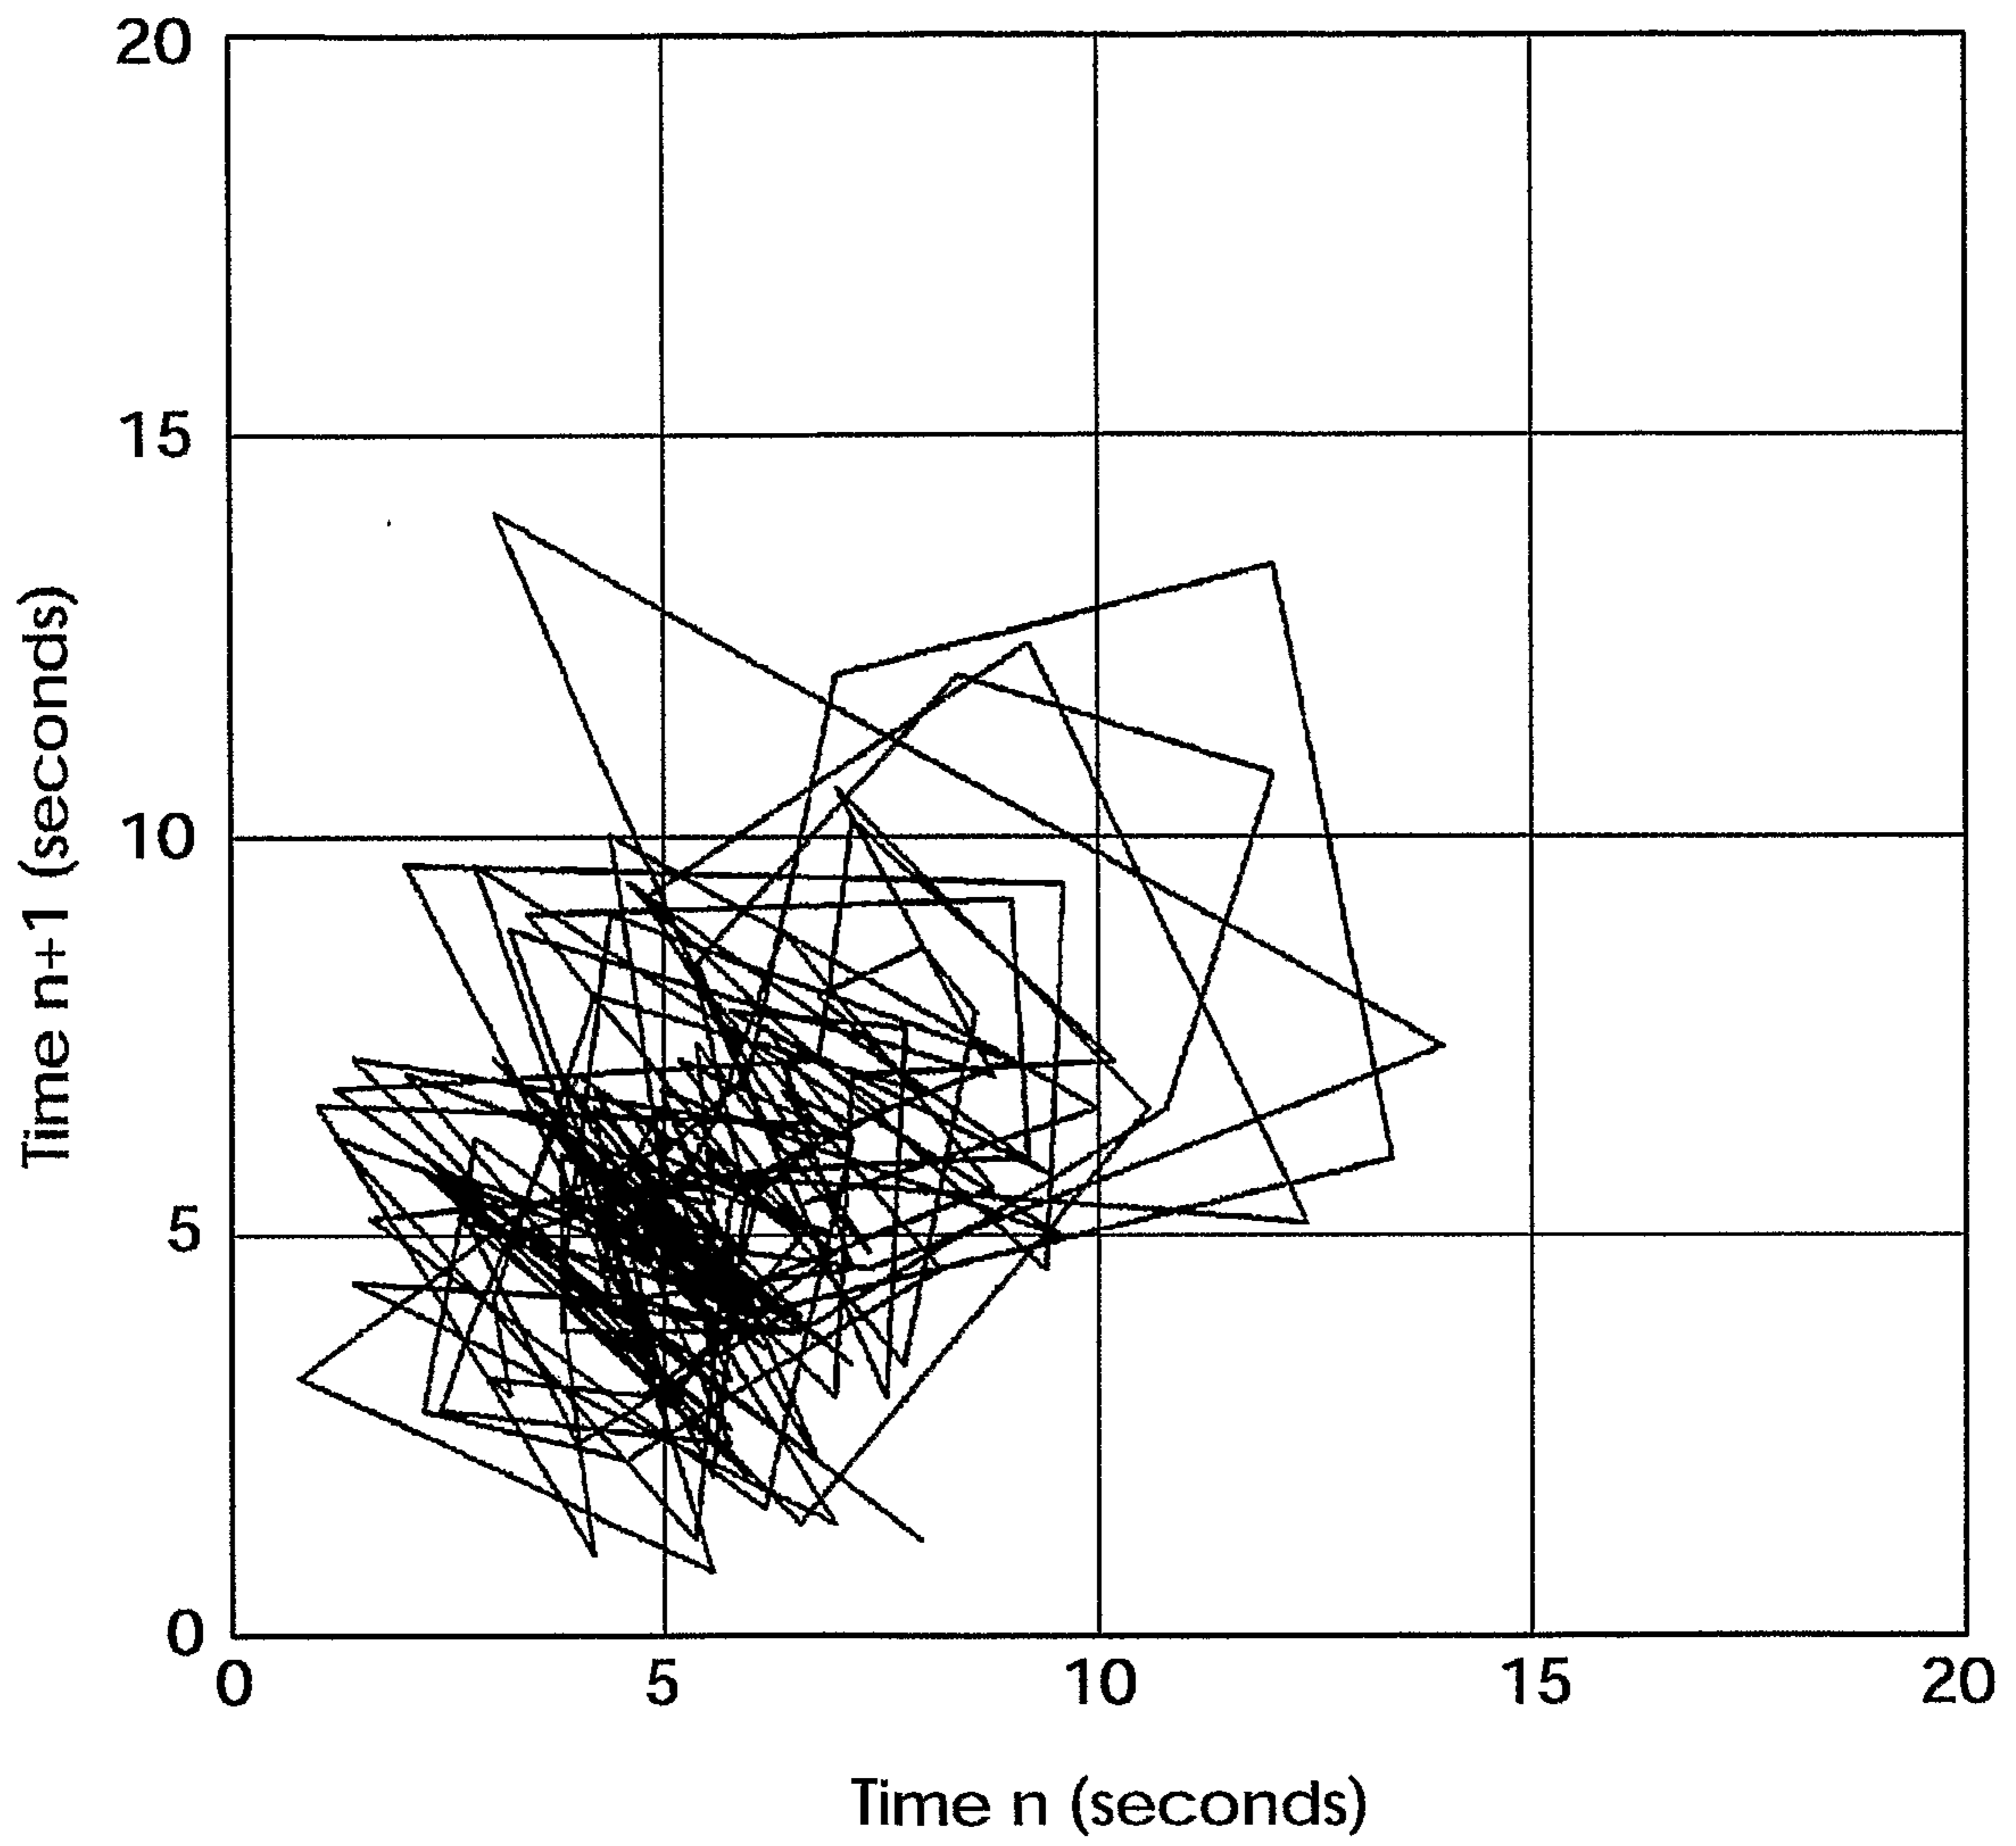

(a)

FIG. 9

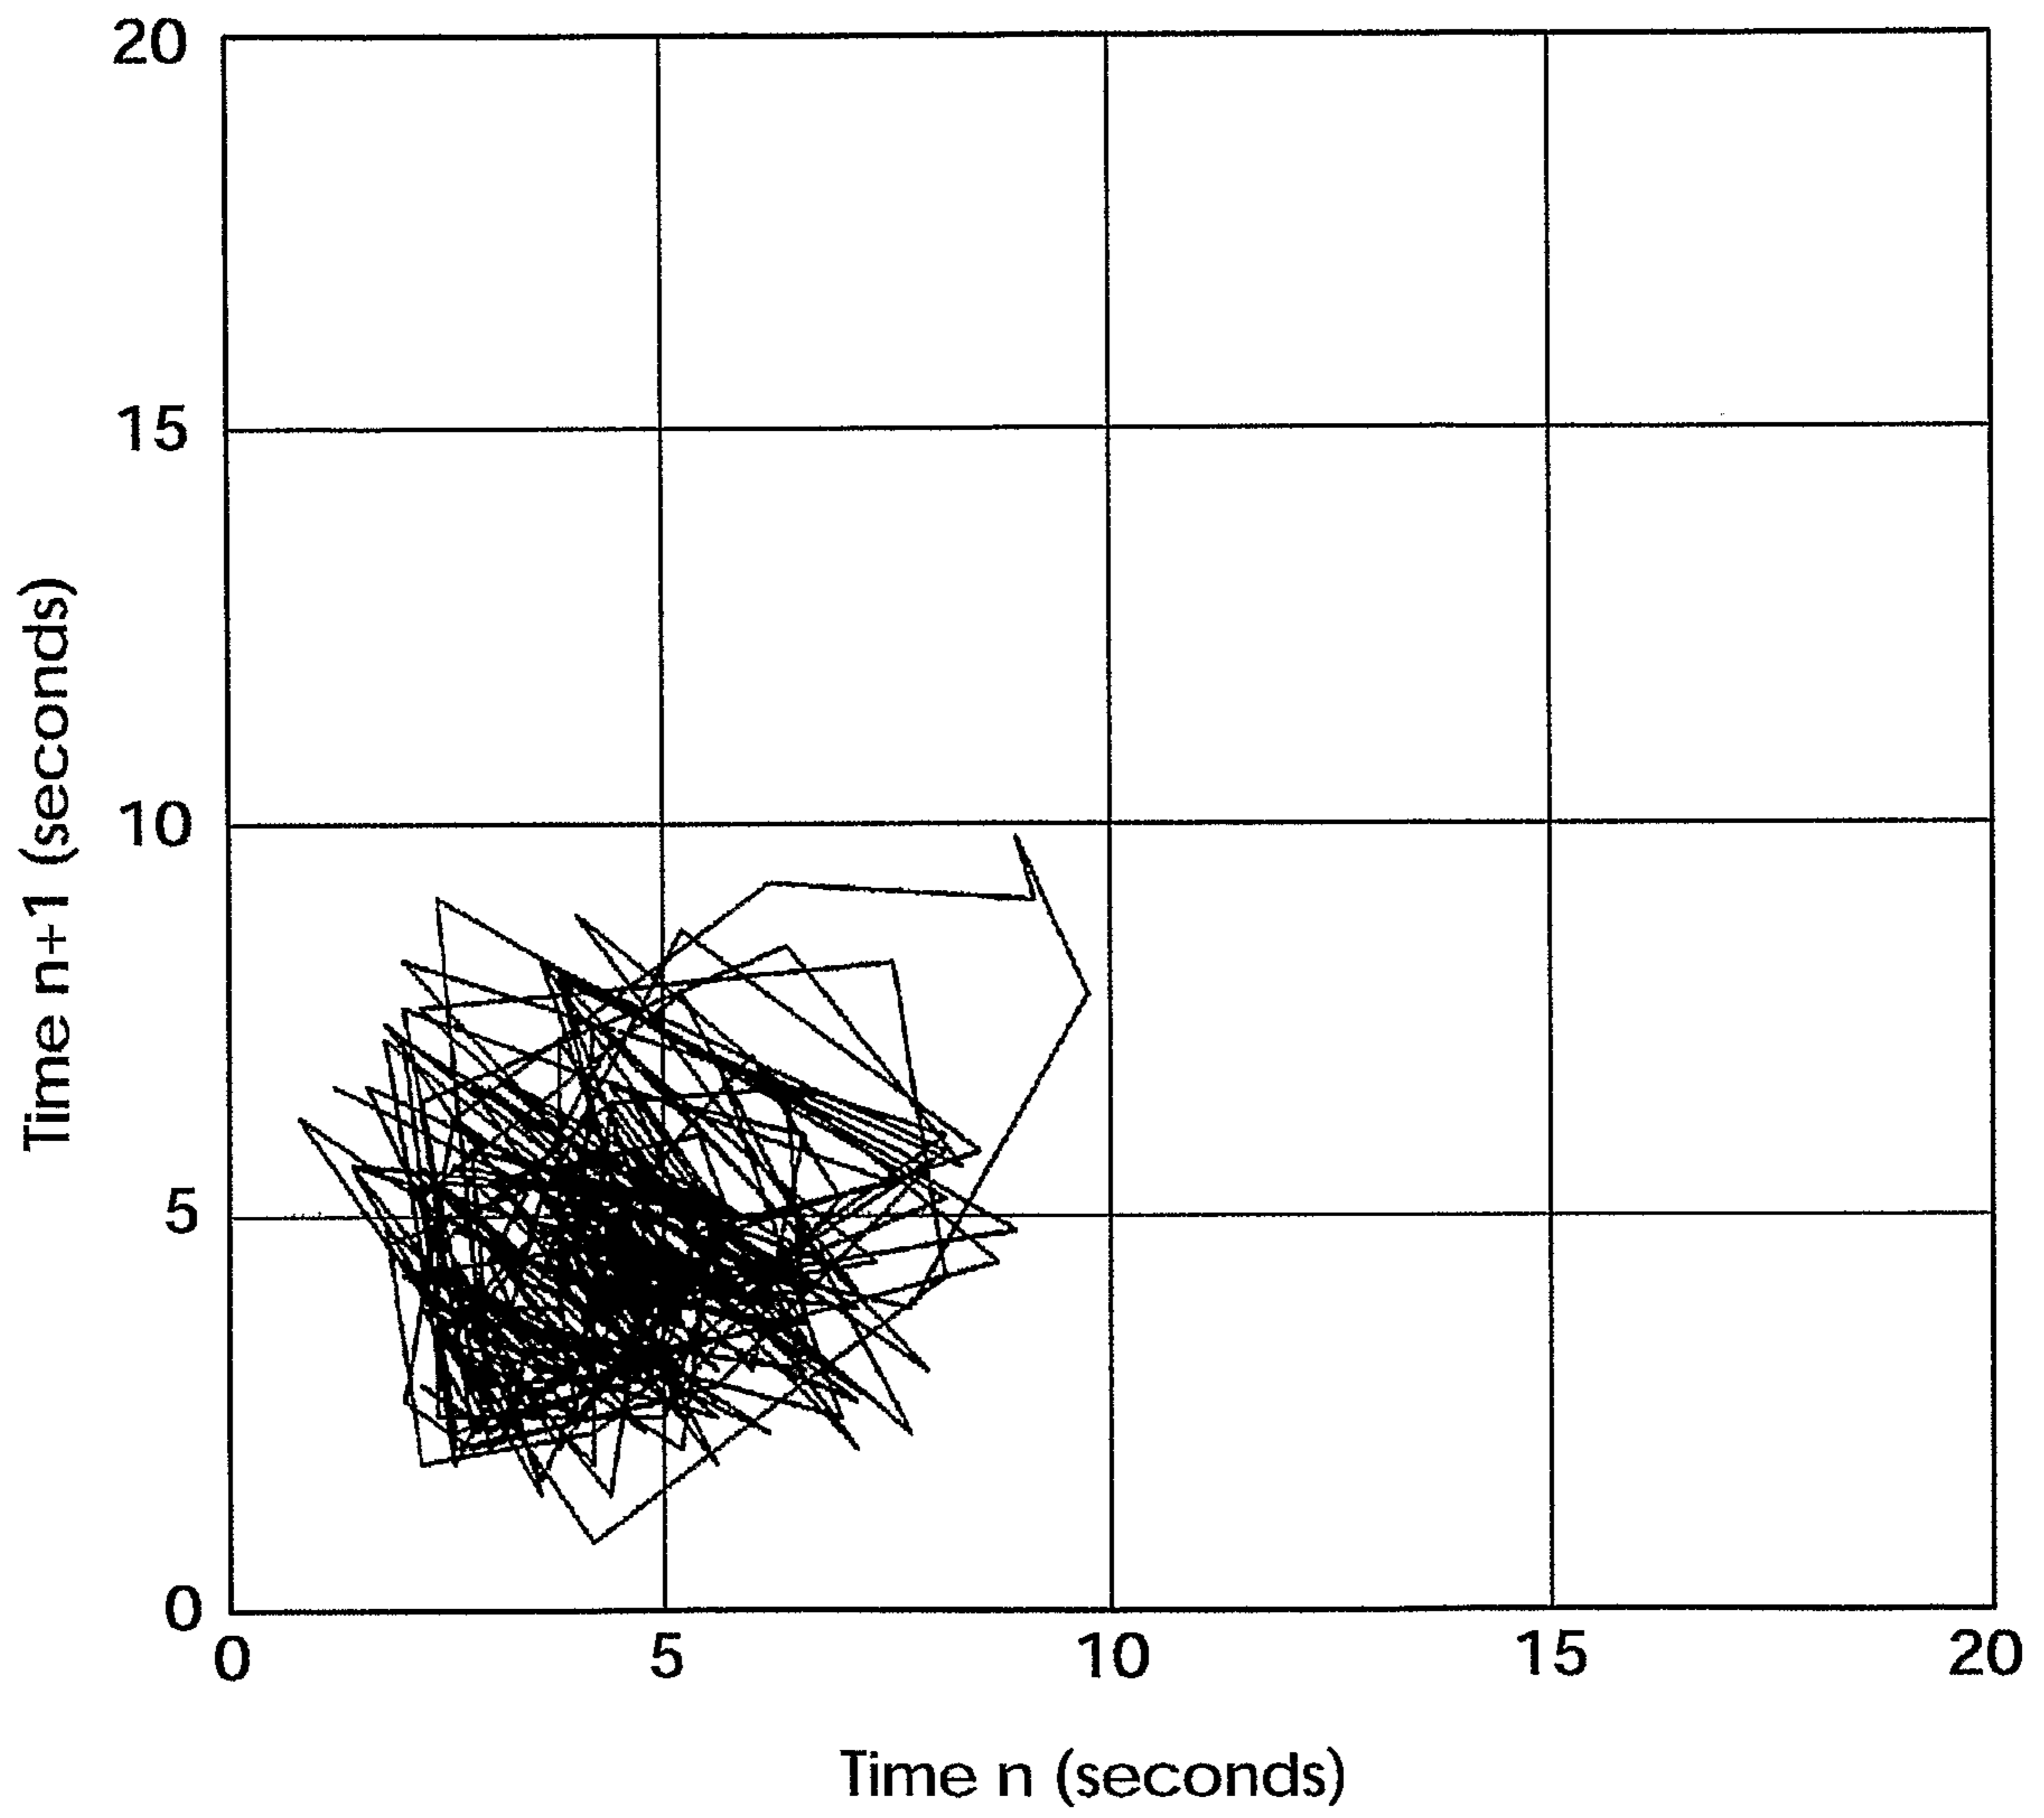

(b)

FIG. 9

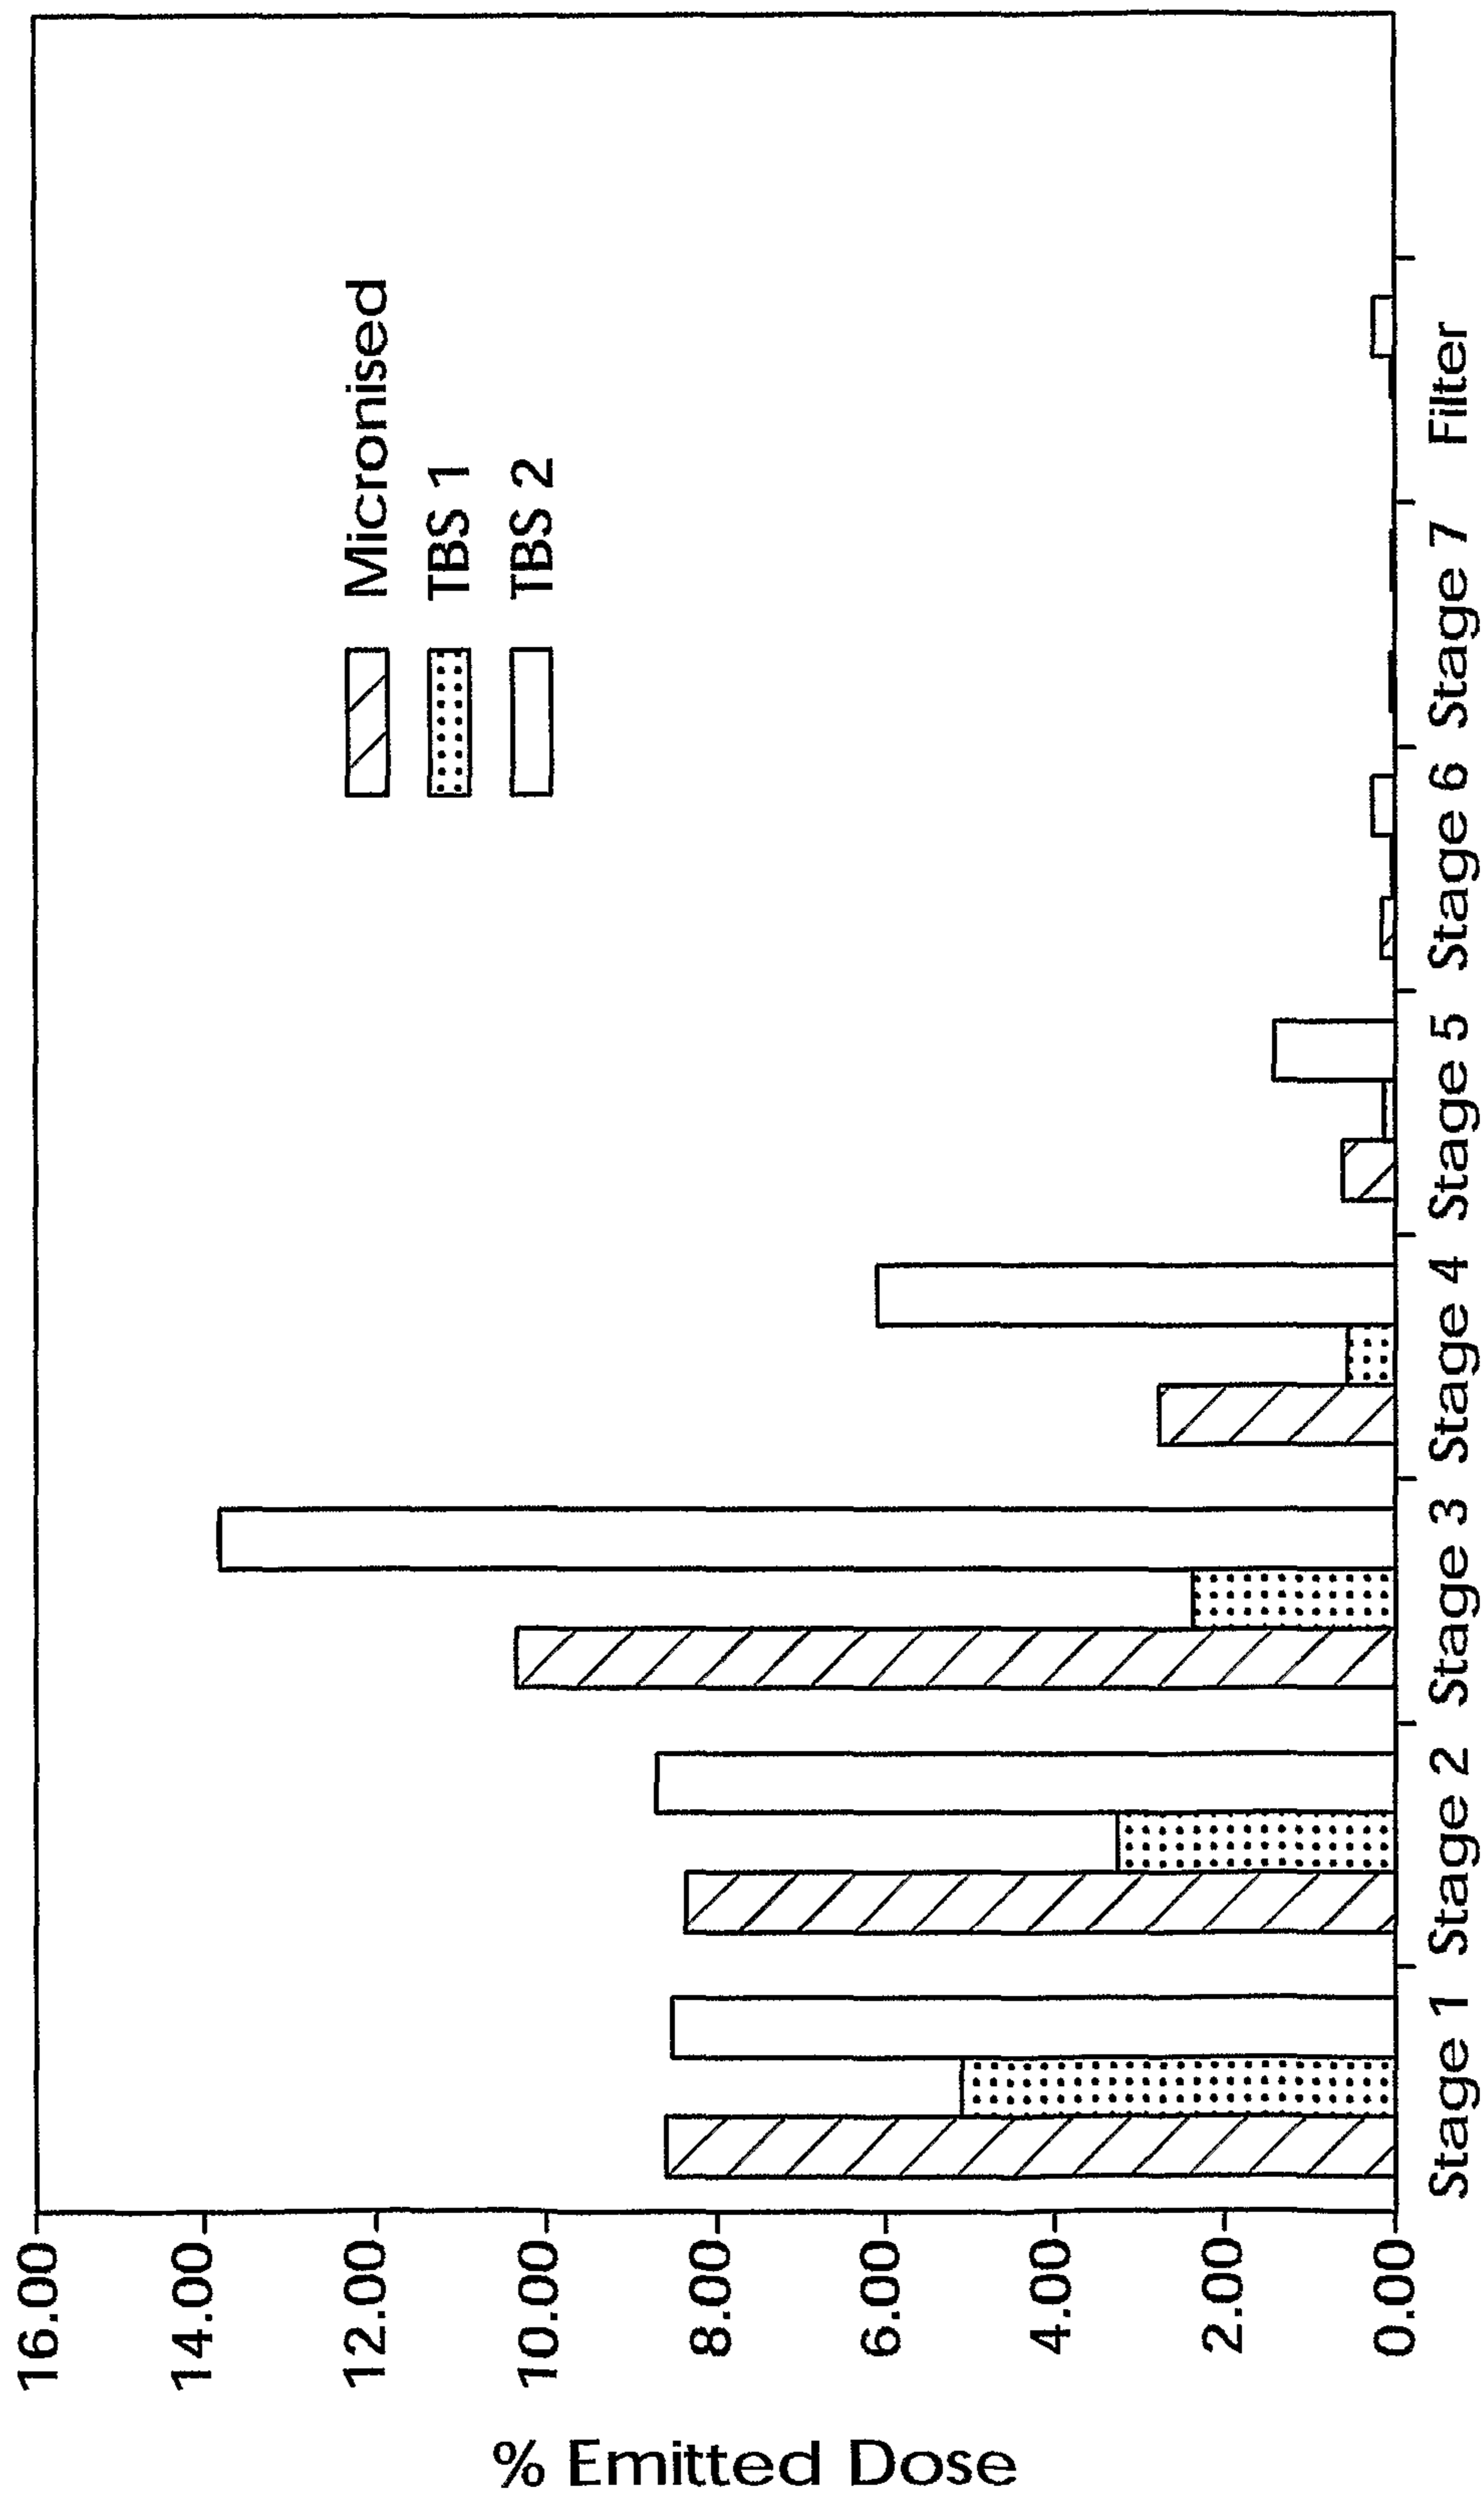


FIG. 10

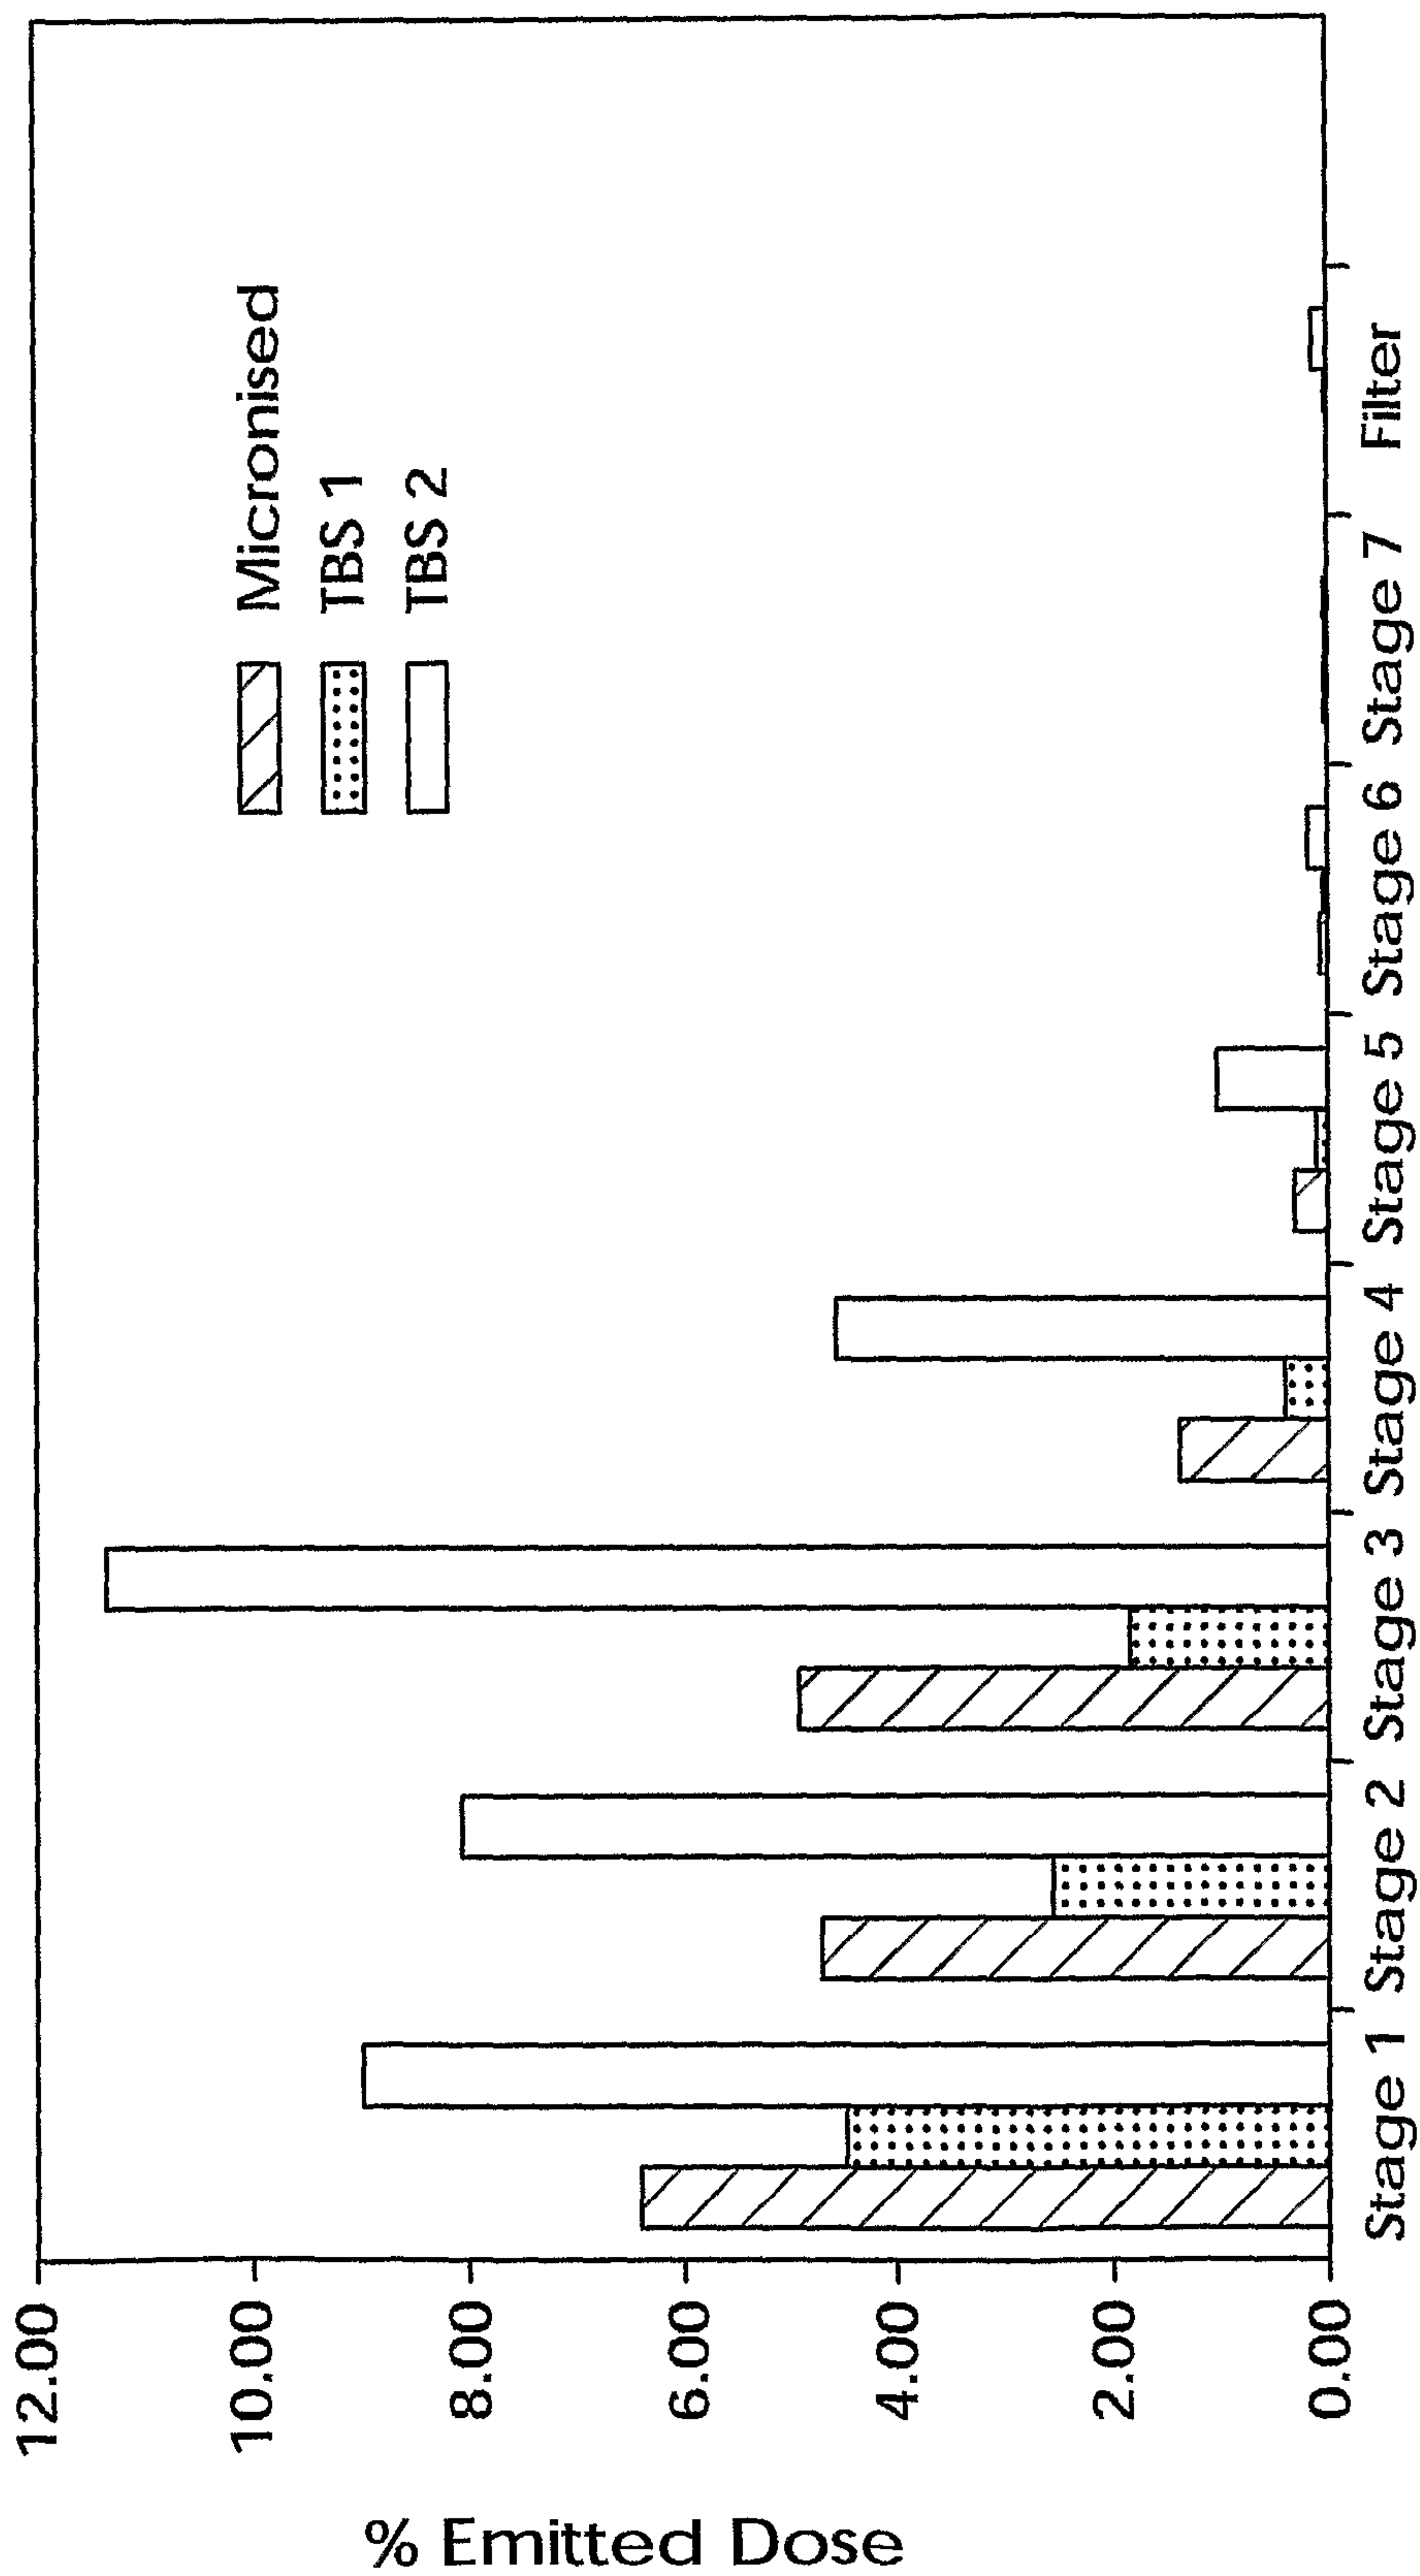


FIG. 11