

(72) Hanes, Charles F., US

(72) Mick, Colin K., US


(73) Cadence Design Systems, Inc., US

(51) Int.Cl.⁵ G06F 13/38

(30) 1992/10/27 (07/967,636) US

(54) **METHODE DE SIMULATION DE TRAFIC DE DONNEES SUR
RESEAU CONFORMEMENT A UN PARADIGME CLIENT-
SERVEUR**

(54) **METHOD SIMULATING DATA TRAFFIC ON NETWORK IN
ACCORDANCE WITH A CLIENT/SERVER PARADIGM**

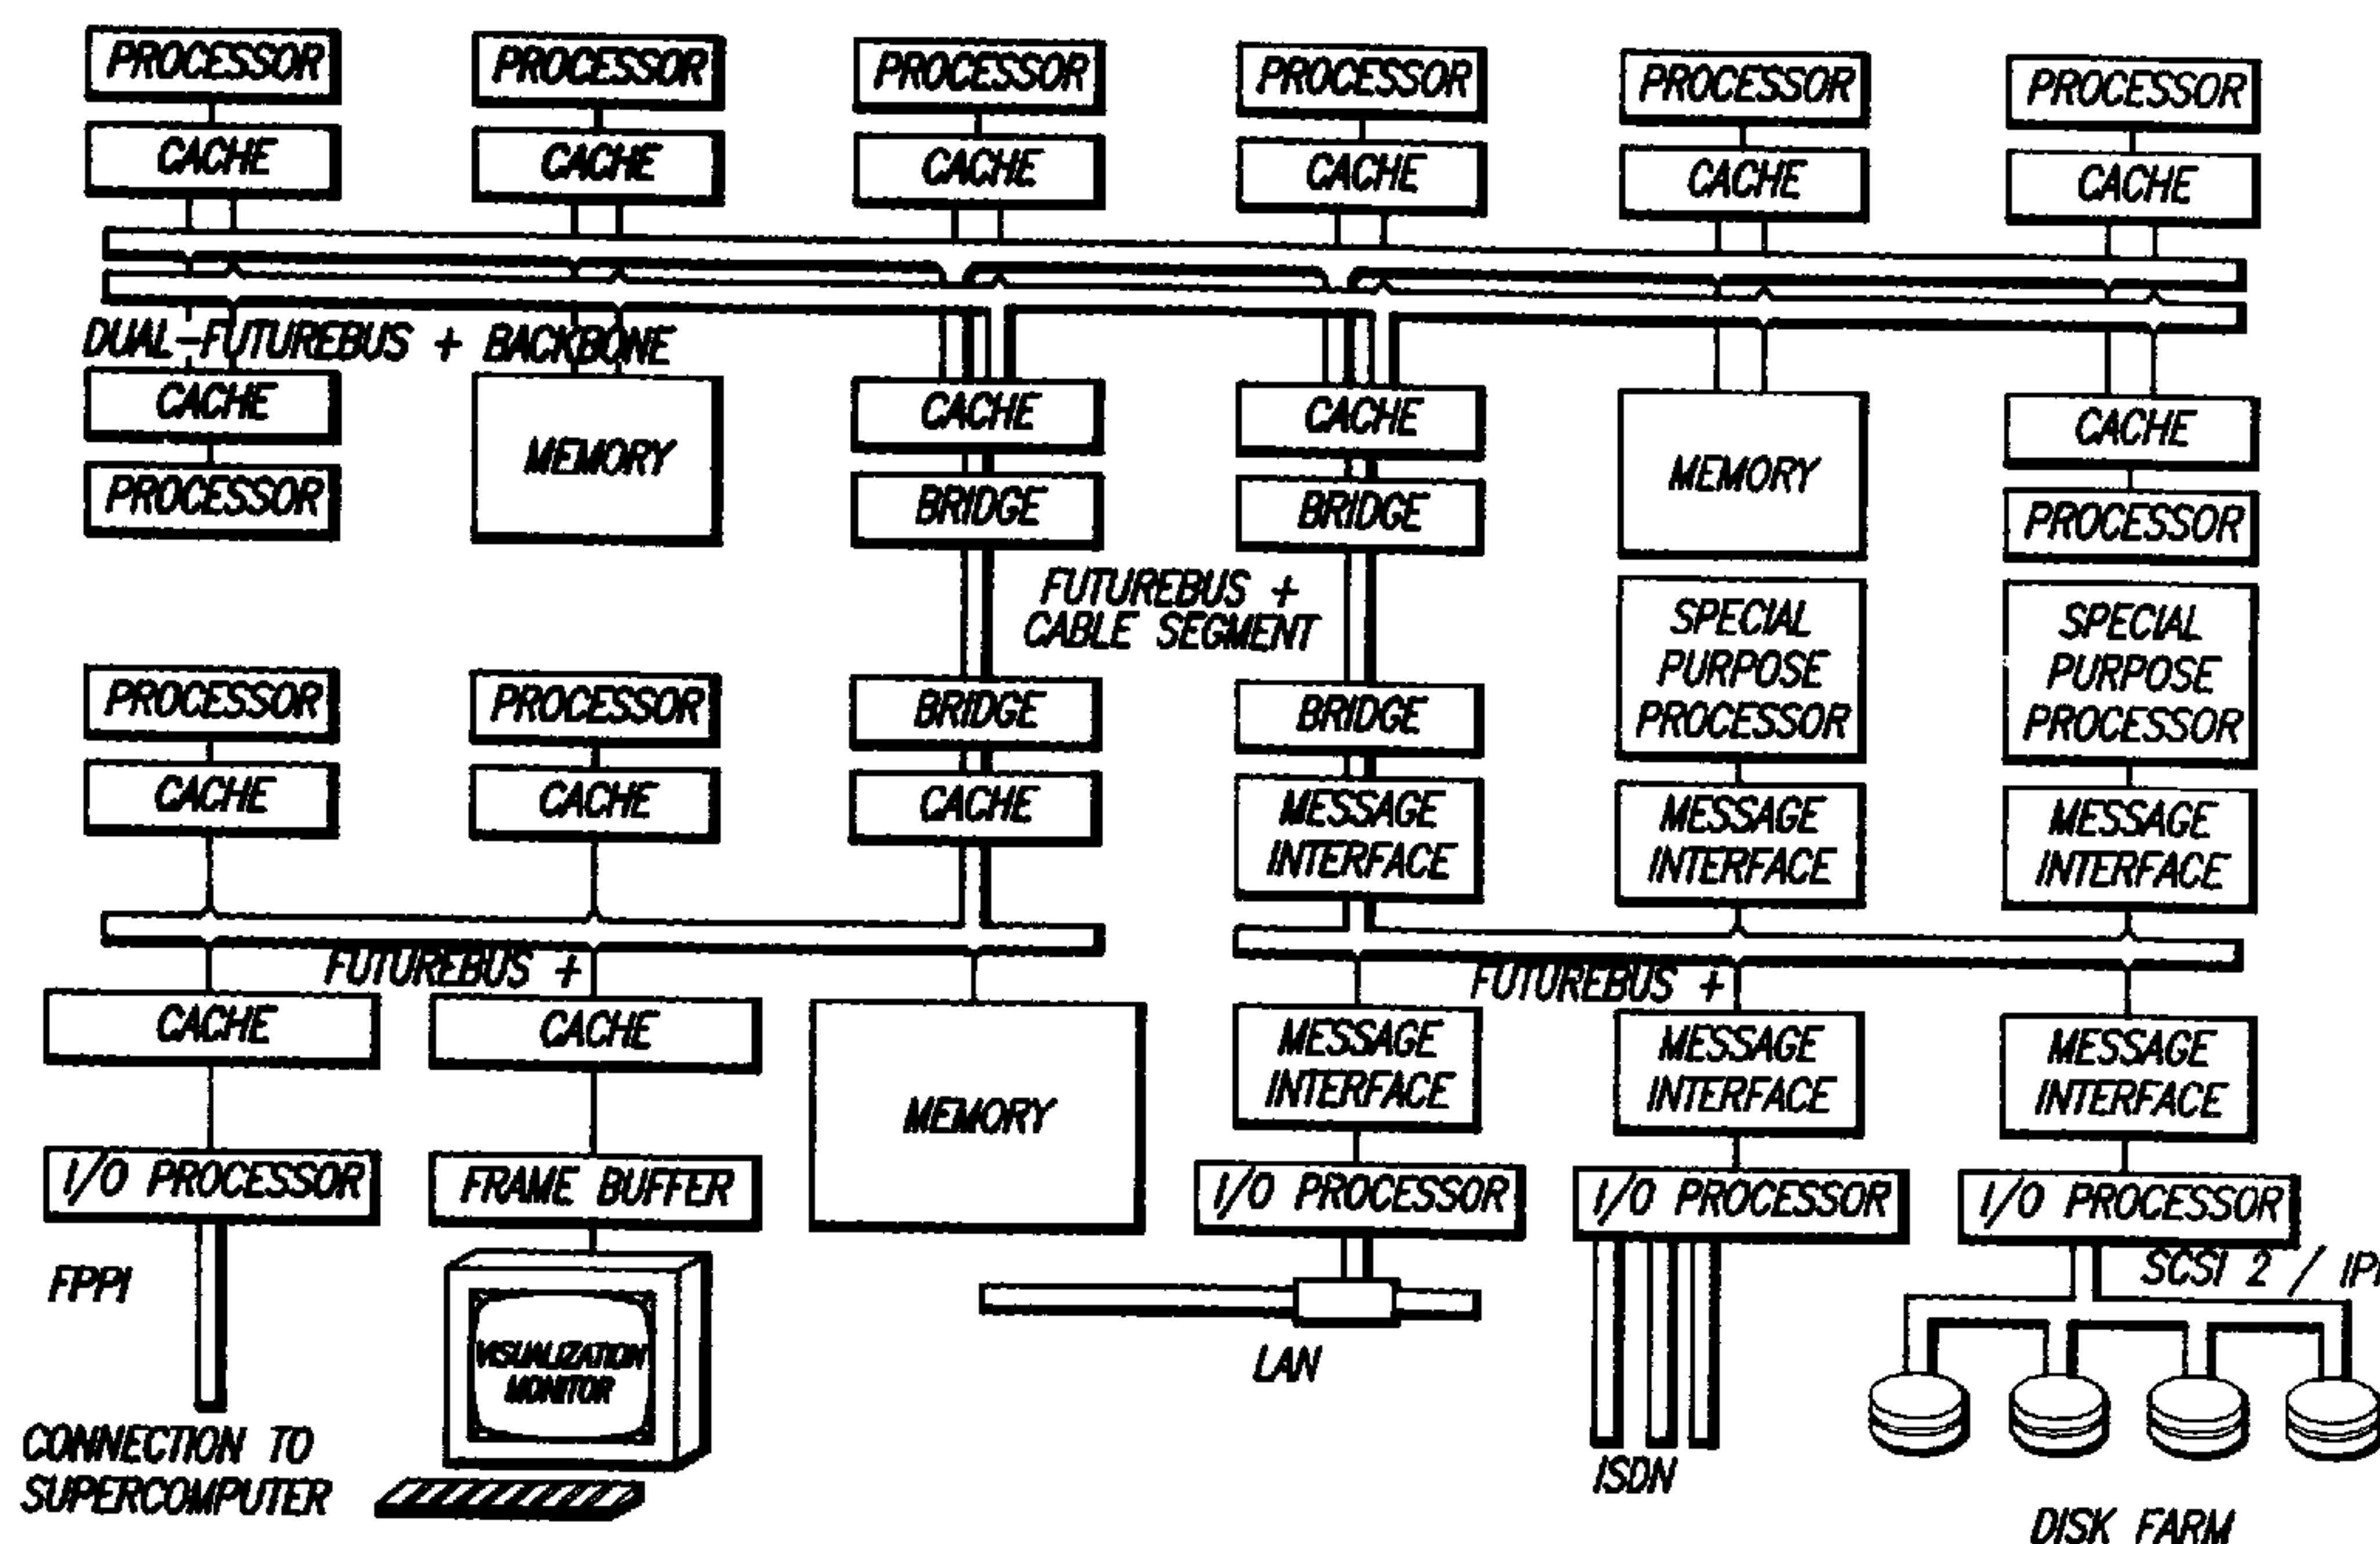

(57) A method for modeling traffic on a network according to a Client/Server paradigm is disclosed. The method includes the steps of extracting the model parameters from known or measured interactions between a client node running a particular application and a server node with no other activity on the network. The method is repeated for each nodal configuration and for each application until the traffic for each node-application combination has, been modeled with no other load on the network. Scripts are created from the Paradigm parameters and are used in conjunction with a traffic generator to create discreet events mimicking the traffic which would be generated from each node. The model will insure that the traffic generated by each traffic source will be adjusted as a function of the response of the network under the load created by all of the traffic loading the network.

2107141

*
Client ID
131839/0013
PATENT
10/23/92

ABSTRACT

A method for modeling traffic on a network according to a Client/Server paradigm is disclosed. The method includes the steps of extracting the model parameters from known or measured interactions between a client node running a particular application and a server node with no other activity on the network. The method is repeated for each nodal configuration and for each application until the traffic for each node-application combination has been modeled with no other load on the network. Scripts are created from the Paradigm parameters and are used in conjunction with a traffic generator to create discreet events mimicking the traffic which would be generated from each node. The model will insure that the traffic generated by each traffic source will be adjusted as a function of the response of the network under the load created by all of the traffic loading the network.

Client ID
131839/0013
PATENT
10/23/92

- 1 -

METHOD SIMULATING DATA TRAFFIC ON NETWORK IN
ACCORDANCE WITH A CLIENT/SERVER PARADIGM

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates generally to modeling
and simulating the operation and performance of
communications networks and distributed processing
systems, and more particularly to methods for modeling
the data traffic generated by the nodes of such networks
10 and systems which improve the accuracy of the
simulations.

2. Description of Related Art

15 The merging of computers and communications during
the past two decades has led to explosive growth in
computer communication networks and distributed
processing systems. While the size and complexity of
today's communication networks vary broadly, from
networks of multiple processors on circuit boards or
chips to global networks with thousands of users, the
20 basic function of all communication networks is the
same: namely, the transmission of information through a
shared facility composed of switches, multiplexers,
concentrators, processors and communication links. The
sharing of resources among network users is governed by
25 protocols, as well as management and control strategies.

 The central issues in the design, implementation,
and operation of communication networks are performance
evaluation and trade-off analysis. The performance
measures used to evaluate communication networks vary,

depending on the type of network being analyzed and the application (e.g., military or commercial, voice or data, etc.). For military communication systems, the major performance requirements include network vulnerability and survivability in a stressed environment. For commercial communication networks, the most common performance measures for circuit-switched networks include probability of blocking, grade of service, throughput, and network efficiency. Throughput, delay, and resource utilization are the most important performance measures for store-and-forward-type commercial networks. Similar performance concerns govern the design of distributed processing systems.

There are a number of different types of network protocols and configurations for interconnecting computers with which those skilled in the computer networking art will be familiar. As an example of a computer network, one of the most popular distributed system architectures has at its core a hierarchical communication network structure like that shown in Fig. 1. This hierarchical network structure, called a Campus Area Network (CAN), consists of a high-speed (100 Mbps or greater) backbone, for example, Fiber Distributed Data Interface (FDDI), which connects to a number of lower-speed workgroup networks. Each of these workgroup networks, in turn, can be formed by hierarchically interconnecting a number of Local Area Networks (LANs), for example, 10 Mbps Ethernet or IEEE 802.3. Each workgroup network is used to interconnect the computers, workstations, and so on for a given workgroup. The backbone, then, allows data sharing and communication between the various workgroups.

This example of a CAN is configured to serve a very large and diverse community of engineering and administrative users. The network could eventually consist of a number of hierarchically connected LANs, each with a tree-shaped topology, as is illustrated in Fig. 3. These LANs can be, in turn, interconnected by an FDDI LAN. As can be seen from Figs. 2 and 3, each station on the FDDI ring is an IEEE 802.3 bridge which is connected to either a Multiport Transceiver (MPT), a 10-Base-T hub or an ethernet backbone. Any of these ethernet subnets supports up to ten connections to devices such as engineering work stations (ESW, W/S), personal computers (PC), and file servers (FS, F/S), and so on - several hundred devices growing eventually to a few thousand.

There are also a number of protocols for interconnecting lower level processing functions of which those skilled in the art will be familiar, including the IEEE Futurebus+ P896.1. An example of a multiprocessing system based on the Futurebus+ protocol is illustrated in Fig. 4. It can be seen from the figure that such a system can in turn form the node for a larger communications network through a connection to a Local Area Network (LAN).

It is not difficult for those skilled in the art of computer networking to appreciate the magnitude of the problem of configuring an actual working system of the types described in Figs. 1 and 4. The cost of complex communication network hardware and software, and of configuring an operational network, is not insignificant. In the past, unproven designs have frequently lead to unnecessary procurement and to the disruption of day-to-day network operations.

Current methods for evaluating the performance of networks include the use of direct measurement techniques, analysis through the use of mathematical models and actual simulation of the network. Direct measurement through the use of monitoring equipment attached to the network is time consuming and indicates performance for the existing network only. Predicting the impact on performance of the network when adding nodes or applications is unreliable in most instances. These tools can be used, however, for providing statistical data to construct simulation models.

Analysis of a network based on mathematical models can require many restrictive assumptions to develop manageable models; it is generally impossible to develop closed-form solutions except in idealized and often oversimplified cases.

Simulation of the operation of a particular network, however, can more easily incorporate empirical models and measured data and can be used to more accurately predict actual network performance, analyze trade-offs, and evaluate alternatives.

Network simulation can play an important role in the design, analysis and management of communication networks. Simulation results can be used to evaluate and optimize network performance. Typical performance measures computed via simulations are system throughput, average response time, resource utilization, blocking and loss probabilities, recovery time after failures and other parameters associated with the transient response of networks. These results can be used to evaluate network design alternatives at component and architectural levels, predict performance before purchasing and trying components, and generate

configuration and performance specifications for procurement.

Simulation can also play an important role in network management. A network manager needs tools to predict changes in network performance due to changes in network traffic, topology, hardware and software. The manager needs a tool to provide answers to "what if" scenarios, assist in planning for capacity changes, load balancing, building network survivability scenarios, and anomaly investigation. Rather than experimenting with the actual network, the manager can use simulation tools to evaluate alternate strategies for network management.

To simulate the operation of a network architecture such as the CAN example shown pictorially in Fig. 2 and schematically in Fig. 3, a model must be specified which represents this network in its entirety. Some level of abstraction and aggregation of constituents is typically incorporated where possible to reduce complexity of the model. The simulation then actually exercises the model through the imposition of discrete events to which the model reacts.

The simulation technique typically used to evaluate network performance is discrete-event simulation. In discrete-event simulation, various components of the actual network under study (communication links, buffers, access strategies, network control structures) are represented by models in a computer program. The events that would occur during the actual operation of the network (arrival, transmission, routing and departure of messages; error conditions such as message loss or corruption; link/node failures and recovery) are mimicked during the execution of the program to actually exercise the models.

The functions of the simulation program are to generate events to which the models respond. The response of the models simulate the network's response. The simulation program also gathers data during the simulation and computes performance measures. Clearly, the more accurately the models mirror the constituents of the network, the more accurately they will model the response of the actual network to the above-listed events. It should also be clear, however, that the accuracy of the simulation also depends upon how accurately the events of the real network are mimicked in exercising the models.

The fundamental approach to modeling distributed processing systems and communication networks is essentially the same. A network engineer is concerned with the flow of "packets" of information, and network performance is usually measured in terms of delay, throughput, and utilization of communication resources such as trunks. The designer of a distributed processing system, on the other hand, is concerned with the flow of "jobs" or "transactions" in the system, and the performance of the system is measured by throughput, average time for completion, and utilization of computer resources such as CPU's, disks, and printers. In both cases, the designer is clearly dealing with a discrete-event system, and the focus is on allocating resources (trunks, CPU's, etc.) to multiple entities (users, processes, jobs, or transactions) in such a way that performance objectives are met within the resource constraints. Thus, although the description of the present invention will be provided in its application to higher level communications networks, those skilled in the art will readily recognize the equal applicability of

Client ID
131839/0013
PATENT
10/23/92

- 7 -

the present invention to distributed processing systems

Network simulation tools, such as BONEs® (Block
Oriented Network Simulator) sold by Comdisco Systems,
Inc., are commercially available for use in network
5 design, analysis, and management in order to minimize
the risk of deploying such a network.

These simulators provide standard and user-defined
models of the behavior of the various constituents of a
network such as the one illustrated in Figs. 1-3,
10 including models of data traffic which are produced at
discreet events that drive the simulation.

The BONEs product also models the physical form
(i.e. data structure) in which the data travels through
the network. The data in a network typically travels
15 from one node to another in the form of packets. Data
packets include the binary data comprising the actual
message being sent, but typically include additional
overhead data added to the packet by the network to
facilitate message routing, addressing and error
20 detection. The exact structure of a packet will vary
according to the particular network protocol being
employed.

Network protocols vary according to particular
suppliers, but most are structured as a layered set of
25 protocol functions, with well-defined interfaces between
layers. Each layer performs a distinct function and the
implementation details for any layer are transparent to
layers immediately above and below, and each layer
communicates across the network only with its
30 corresponding peer layer at other nodes.

The Open System Interconnection (OSI) model was developed in 1984 by the International Standards Organization (ISO) to provide a framework for the standardization of network protocols (Document Reference ISO 7498-1984). A description of this seven layer model is shown in Fig. 5. Each packet originates in the Application layer (Layer 7) and the original message is further encapsulated with additional data to accomplish the function of the next layer.

The BONEs® Designer™ model of a network is specified by a hierarchical block diagram, which represents the flow of packets, messages, jobs, or transactions. Fig. 6a shows a simple BONEs® Designer™ block diagram of a two-node communication system, consisting of four blocks: two Traffic Sources, a Transmission System, and a Destination Node. This is a simple example intended to illustrate the use of such a simulation product. The Voice Traffic Source is a hierarchical block, composed of several component blocks as shown in Fig. 6b. The blocks in Figure 6b generate packets with a uniform arrival rate and then set the Time Created field of the packet to the current simulation time, the Length field to the value of the Voice Packet Length parameter, and the Priority field to a value of 1. The packets which exit the voice source represent the packets which would be generated by a synchronous source such as digitized voice. The Data Traffic Source, shown in Fig. 6c generates traffic with Poisson arrivals and exponentially distributed lengths, representing a statistical model for data traffic produced by a particular node on the network. Outputs from the two sources is merged and passed on by the Transmission System.

The data structure representing the packet can be tailored for each type of data traffic produced (i.e. priority, length of packet, etc.). The data packets can be stamped with the time they are created by the source and with the time received by the packet destination. By comparing time stamps, delays can be computed. By adding the packet lengths of all packets transmitted by the system, throughput can be calculated. The values for the time the packet was created, priority and packet length are inserted into the data structure by the middle blocks in Fig. 6b, and the other time stamps (e.g. arrival time) are inserted as the packet passes through various points in the system.

It should be pointed out that the data structures of packets flowing through an actual network do not have fields for time stamps, and have actual lengths and therefore do not require a field to represent message length. The time stamp fields of the data structure are used for purposes of creating a record of the flow of the packet through the system during the simulation. The network protocol is modeled through use of the message length, which accounts for any encapsulation of packets as they move through the system.

The middle block in Fig. 6a represents the Transmission System. It queues up the packets coming out of the source, allocates trunks for transmission on a priority basis, and releases packets to the destination node after a time delay, which represents transmission time. The Transmission System block is hierarchical, built with BONES® Designer™ library models for queues and resource allocation.

The total transmission delay is computed within the Transmission System block as the sum of the propagation

time and the transmission time, which is equal to packet length in bits divided by trunk capacity in bits per second. Note that it is not necessary to actually generate the individual bits that are transmitted over the link. It is necessary only to compute the time required for transmitting a packet, which is a function of only the packet length and not the content.

The Destination Node time-stamps the received packets and puts them into a sink. By averaging the difference between the time at which the packet was received and the time at which the packet was created, the average overall delay can be computed. By repeating these simulations for different traffic loads, a typical delay vs. load performance plot for the network can be produced.

Additional traffic sources, representing additional nodes, can be added by simply adding additional traffic source blocks to the system block diagram shown in Fig. 6a. Alternatively, traffic characteristics can be modified by changing parameter values or by creating completely new traffic source blocks.

Further specific information regarding the BONEs® network simulator may be found in the BONEs® Designer™ Introductory Overview, the BONEs® Designer™ User's Guide, and the BONEs® Designer™ Modeling Guide. All of the publicly available products, manuals and supporting documentation are hereby incorporated herein by reference and are available through Comdisco Systems, Inc., 919 East Hillsdale Boulevard, Foster City, California 94404.

Traffic Models used in simulators, such as the two models employed for the Voice Traffic Source and Data Traffic Source in the above example, are typically based

on some statistical model for the message size and the time between generated packets. In the example above, the Voice Traffic Source model specifies a uniform arrival rate and a fixed packet length. The Data Traffic Source model specifies traffic with Poisson arrivals and packet lengths which are exponentially distributed. The problem with these models is that they are at best gross approximations of the kind of data packets which will be generated by a particular node at any particular time under particular network load conditions.

Each network node can be comprised of a different computer system configuration, having its own resources and running its own designated applications programs. For example, one node can be a personal computer (PC) which has a 20 Megabyte hard drive, an 80386 CPU, disk drive and various other resources. This node may be dedicated to running various applications such as spreadsheets, wordprocessing, document administration, etc. Another node may be comprised of an engineering workstation, capable of running powerful circuit simulation applications which may involve traffic intensive video or graphics display functions. Still other nodes may be dedicated as file servers and could be large IBM or DEC minicomputers with large disc storage, or they could just comprise a personal computer.

The data traffic generated by each of these nodes will be radically different and will be a function of the application programs being executed by the node, the quality and quantity of the resources available at the node, the current demand on the node resources and the response times of other nodes from which they may request data. As previously discussed, the accuracy of any simulation will critically depend not only on the

accuracy of its models for network constituents, but also on the models for the generation of the discrete events which exercise those network models.

5 In order to render more accurate models of the traffic generated by the nodes of a particular physical network, traffic analyzers have been employed to record actual data traffic on the network. Long samples can be used to create statistical models for the traffic characteristics of the particular network, and these
10 models are then used in simulators to drive network models. Short samples have also been used to create traces which are used to recreate the exact pattern of traffic as recorded from the physical network. These traces are read by traffic generators to generate a
15 repetitive output, used to drive the network models in simulation, which mimics the recorded traffic pattern.

There are still many accuracy problems associated with these approaches. First, a snapshot of data traffic on a network at any particular time will vary widely from
20 a snapshot taken at any other time. Thus, generating a small, repetitive segment of measured traffic remains extremely inaccurate. Further, although statistical data gathering over a long period of time may be relatively more accurate, the peaks and valleys of activity on the
25 network will be lost and thus those combinations of activities which may cause problems temporarily may not be ascertained.

Most importantly, the traffic models developed in the above-described manner are only for a particular
30 physical network configuration as sampled; the characteristics of the traffic generated by each node on a network will change as the load on the network increases or decreases, as resources are altered at a

particular node, or new applications are installed at existing nodes. Thus, if the reason for running a simulation is to determine what would happen to network performance if the number of nodes is increased from the existing ten nodes to twenty, the emulation of traffic using samples from the actual network with ten nodes no longer is valid.

Although one could attempt to extrapolate the relationship between each additional node and the resulting impact on performance, this would be inaccurate and is exactly what one is attempting to determine accurately through simulation in the first place. Thus the most attractive and beneficial reason to use simulation products, the desire to evaluate and predict performance of the network as load, resources or applications are varied without the need to actually configure the system, is defeated by the inability of current traffic models based on an existing network to alter their characteristics as a function of these variables.

The present invention provides a method for modeling traffic which is based on sampled traffic for an existing network but is not fixed as the number of nodes, nodal processing resources and applications run by each node are altered. Rather, the method of the present invention provides traffic models which are based on sampled traffic for a real system but which alter their characteristics as a function of the above-described variables and thereby render more accurate predictions of network performance.

The method of the present invention recognizes that networks and distributed processing systems operate in a mode which typically involves a request message generated

by, and transmitted over the network from, a node connected to the network to another node residing somewhere else on the network. The receiving node then processes the request and issues a response, transmitted over the network and back to the requesting node. Quite often, the requesting node's next request is dependent on receiving the response and may also possibly depend on the nature of the response. Of course, some messages may not be in the form of a request or a response to a request, but they may initiate action by other nodes once received or they may be completely uncorrelated to any other messages.

Most networks today comprise a series of client nodes and a relatively smaller number of server nodes. The client nodes are those which run applications programs locally and must access large data bases for the data on which to operate. The server nodes are designed to maintain the data bases to which the clients desire access and provide the clients with copies of portions of these data bases in response to their requests.

The time necessary for a client node to formulate a request will depend upon a number of factors, such as the type of application(s) being run, the contention for the local node's processing resources, the speed of those resources, the time to receive the response to a previous request if the current request is correlated to the response, and even the time for an operator to think and type.

Likewise, the time for a server node to formulate a response once a request has been received will depend on the demand and contention for its resources (which is often directly a function of the number of client nodes it must serve), the types of applications that the client

nodes are running (which will govern the size, complexity and frequency of required responses), and the speed and power of its available resources.

5 Of course, the size of the packets which comprise the requests and responses will also impact request and response times because the network topology and protocols will impose limitations on the network with respect to transmission time between nodes. This aspect of the system will be reflected in the models of the network
10 topology (i.e. the number of nodes and links), the network data structures, the network resources (i.e. buffers, trunks, buses, CPU's and switches) and the network protocol functions (i.e. which govern the flow of packets in the protocol layers and allocation of
15 resources).

Thus, it is the object of the present invention to model the characteristics of traffic generated by each client node which vary as function of the applications run by the node, the resources available to the node and
20 the contention for those resources, the response times which govern the initiation of its requests and the processing time required to issue such a request.

The method of the present invention accomplishes this objective by modeling the traffic generated by a
25 client node in accordance with the Client/Server Paradigm illustrated in Fig. 7. This model is specified using the four basic parameters described in Fig. 7: Client Waiting Time, Client Request Size, Server Response Time and Server Response Size.

30 As illustrated in Fig. 7, the Client Waiting Time is the time between the arrival of the last server node response packet and the transmission of the next client request packet. This time represents operator thinking

time, typing time, and the time necessary for the local processor at the client node to evaluate the server response (if the response and the next request are correlated) and to process the next client request for transmission. The local processing time will be a function of the speed of and contention for its resources. The Client Waiting Time will also be a function of the application(s) being run on the client node and the particular operation of that application involving the request.

The Client Request Size is the size of the request packet and will also be a function of the application and the particular operation being executed. The Server Response Time is the time between the arrival of the client request packet at its destination node, and the time the server node transmits a packet in response to the client request. The Server Response Time is a function of the resource contention, application and operational circumstances as previously discussed. The Server Response Size is the response packet size and is also a function of application and operation.

It will be obvious to one of ordinary skill in the art that the method of the present invention can be applied to modeling the transaction traffic of distributed processing systems as well. Distributed processing systems are similar in that usually a number of local processors with their own local memory run local programs and operate on data imported from a few large memory sources. The processors run their programs until they require data which they don't have locally and initiate a transaction out over a shared bus to request the data from the shared memory source. The shared memory then issues a response to the local processor's

2107141

Client ID
131839/0013
PATENT
10/23/92

-17-

5 request. Access to the bus, the size and form of the transactions, as well as data consistency are governed by the bus protocol and impact request and response time. The speed of requests and responses will also be impacted by the speed and contention for the associated processing resources, as well as the type of applications being run on the local processors.

SUMMARY OF THE INVENTION

5 The present invention is a method for modeling the traffic generated by the nodes of a communications network or distributed processing system, based on the known or measured request/response interactions between a client node and a server node as the client node runs a particular application or multiple applications with no other load on the network. A simulation model of this interaction is created as a function of four parameters comprising a Client/Server Paradigm. Using the model, 10 discreet events mimicking the data traffic which flows over the network between the client and server nodes with no other traffic on the network can be generated. The constituent resources of the network can be modeled, and 15 the response of the network can be predicted by simulating the model with the traffic generated by the model.

The response of the network to increasing the number of client nodes can be predicted by increasing the number of sources generating the modeled traffic for the 20 simulation. The nature of the traffic model is such that as the overall response predicted by the network model during simulation changes as a function of the change in the amount of traffic competing for the network resources, the change in network response is fed back to 25 the traffic sources which alter the characteristics of the traffic they are generating in response thereto. Thus, the model for the traffic between a node running an application on a network and a server node may be developed with no other load on the network, and the 30 model will automatically alter the traffic it generates so that the appropriate traffic will be generated under

various load conditions. The change in load can be the result of increased traffic, but can also be the result of changes in the amount or quality of the network resources available to handle the traffic load.

5 The traffic models developed in accordance with the method of the present invention produce more accurate network simulation results because as the number of client nodes on a physical network increase, the time between packets generated by the client nodes would begin
10 to increase as the overall response by the network to their requests slows down.

 Nodal traffic modeled after the Client/Server Paradigm not only predicts the increase in request packet interarrival times as the network response slows, but
15 also accounts for contention for both client and server node resources; as the number of client node requests increases, the resources of the server node can eventually be exceeded and the requests must be queued. For the client node, the demand for resources can vary as
20 a function of the application it is running. In a addition, client nodes running multiple applications will experience contention for resources in a manner similar to the server node. All of these variables are accounted for and their effects predicted by the traffic model
25 produced according to the present invention.

 Of course, simulations may be run which specify networks with multiple nodes running different applications by simply modeling each node configuration running a different application or applications in the
30 manner described above, and simply provide traffic source models in the simulation for each different node on the network to be simulated.

Thus, the method of the present invention greatly improves the accuracy of simulations of the operation and performance of a network as the number of nodes, the quantity or quality of processing resources resident at each node, the quantity or quality of network resources and/or applications run by each node vary. The method is fully adaptable to currently available network simulation products.

The traffic generated at each client node is modeled after a Client/Server Paradigm. That is, the traffic is modeled as a request and an ensuing response. This model is specified using four basic parameters: Client Waiting Time, Client Request Size, Server Response Time and Server Response Size.

The Client/Server Paradigm is applied to model the traffic conversation generated between each network client node and server node according to the application run at the node and the resources used to run it. If more than one client node runs the same application(s) using identical resources, only one model need be created which can then be duplicated for the simulation according to the number of identical client nodes.

The model can be created through known characteristics of the client/server interaction for a particular application. It can also be developed by first, applying a network analyzer or network management system to an actual network. Traces are taken of the network traffic generated by the client node while running the application of interest, with the server node running on the same segment of the network. No other nodes should be accessing the server and a minimum of background activity should be present on the network.

The resulting trace should be examined to determine the pattern of request/response traffic between the client and server over the network. Information indicating Client Waiting Time, Client Request Size, Server Response Time and Server Response Size should be extracted from the trace for each request-response step of the traffic pattern to be modeled.

Finally, the four parameters can be incorporated into a script format which can be converted by a commercially available traffic generator into discrete events which will drive the network models of the simulator. The script developed according to the method of the present invention will cause the traffic generator to delay generating a client request packet which is dependent upon or correlated to receiving a response packet from a remote node. Thus, as response time increases as a function of network load and performance, the traffic generated by the traffic sources is adjusted accordingly.

The script developed in accordance with the present invention will also take into account the speed and contention for server resources through the Server Response Time parameter, and takes into account the speed and demand for client node resources through the specification of the Client Waiting Time parameter.

Thus, the present invention provides a model for network traffic which is viewed from a client node and which automatically adjusts the model when variations are introduced with respect to the particular applications being run by the client nodes, the demand on resources local to each node which can create contention, the speed with which those local resources can operate, the time

necessary for operators to respond to previous responses and the demand for those server node resources.

5 These models will therefore alter the characteristics of "conversations" between nodes over the network not only based on the characteristics of the network itself, but also as a function of the particular applications currently run at each node, the resources available to run them and the demand on those resources as the number of nodes or the applications running on
10 those nodes are varied. The present invention therefore provides a more accurate picture to a network designer or manager attempting to simulate the effects on performance of a given network when the number of nodes are increased or decreased, or when the addition or substitution of
15 computing resources or the introduction of different or additional applications is made.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an example of a general distributed system architecture.

20 FIG. 2 is a pictorial representation of a Campus Network.

FIG. 3 is a schematic representation of the a Campus Network of Fig. 2.

25 FIG. 4 is a high level block diagram of a distributed processing system.

FIG. 5 is a description of the ISO Open System Interconnection Model.

FIG. 6a is a block diagram of a transmission system simulation.

30 FIG. 6b is a block diagram of the Voice Traffic Source block in FIG 6a.

FIG. 6c is a block diagram of the Data Traffic Source block in FIG. 6a.

FIG. 7 is a conceptual drawing of the Client/Server Paradigm.

5 FIG. 8 is a flow diagram illustrating the procedure for modeling traffic for a network to be simulated.

FIG. 9 is a flow diagram illustrating the procedure of performing network analysis.

10 FIG. 10 is a flow diagram illustrating the procedure for modeling node traffic according to the Client/Server Paradigm.

FIG. 11 is a flow diagram illustrating the steps for cerating a script from the model parameters.

15 FIG. 12 is a flow diagram illustrating the procedure for providing scripts of common applications.

FIG. 13 is a flow diagram describing the procedure for using scripts in the simulation of a network model.

FIG. 14a is a script developed for the first example of how to apply the method of the present invention.

20 FIG. 14b is a script developed for the second example of how to apply the method of the present invention.

25 FIGS. 15a-15i illustrate the 177 packets captured in the trace of the first example.

FIGS. 16a-16i illustrate the 177 packets captured in the trace of the second example.

DETAILED DESCRIPTION OF THE INVENTION

As previously discussed, the object of the invention is to model the traffic generated by each client node, while running its particular application or applications, as a series of request/response interactions with a server node on the network. This modeling process should be performed without any other client nodes interacting with the server. The modeling process should also be performed for each node which either runs a different application or has a significantly different resource configuration. Once the Client Waiting Times, Client Request Sizes, Server Response Times and Server Response Sizes are determined for the series of operational client/server interactions of a particular application or set of applications run with a particular resource configuration comprising a network node, these Client/Server Paradigm parameters can be translated to scripts which can be translated by commercially available traffic generators to generate traffic in accordance therewith. One such traffic generator is the PlanNet Application Traffic Generator Module (ATG) available from Comdisco Systems, Inc. The ATG Module and the manuals available to the public are herein incorporated by reference. For further detail regarding the ATG, a detailed description of its use and operation is provided in Appendix A of this application. The discreet events from the traffic generators can then be used to exercise the network models in simulation thereof.

Traffic generated according to the Client/Server Paradigm of the present invention will behave in a manner which is more realistic than traffic generated by

conventional traffic models. For those client node requests which are dependent on a response from the server, two conditions must be met before a traffic source modeled in accordance with the present invention will generate the request packet. First, the response packet must be received at the traffic source and second, the Client Waiting Time must be satisfied. If ten nodes identical to the one modeled in accordance with the present invention are added to a network model to simulate the impact of this addition on network performance, the increased traffic will slow down the overall system response time from the server to the client in accordance with the model of the network. The overall system response to a client request includes the Client Request and Server Response Transmission Times, which will increase as the traffic from the additional ten traffic sources contend for the network resources. Additionally, the overall system response time will increase because of the increased demand for the server node resources; the increase in client requests will cause those requests to be queued up as the server resource capacity is exceeded, and the server cannot respond until a request packet has actually been received by the server and the Server Response Time has been met. This increase in overall system response is predicted by the network model during the simulation. Because the traffic source cannot issue its next request packet until the response packet, to which the next request packet is correlated, is received by the traffic source (and until the Client Waiting Time is then also met), the effects of the increased traffic on network performance are in essence fed back to the traffic sources. The traffic sources will in turn increase the time between generation

of client node packets. The traffic sources behavior models what would occur if ten nodes were added to a physical network.

5 Although it is possible to model every possible client/server interaction which arises in running a particular application in accordance with the present invention, this would be prohibitively time consuming and unnecessary. In determining network performance, the primary concern is with network operation under peak
10 demand. Thus, as a practical matter, the traffic on a node is best modeled while the network is experiencing peak demand. Further, only the most data intensive client/server interactions need be modeled and used as inputs for a simulation.

15 Commercially available network analyzers or network managers can be used to determine when peak activity occurs on the network, which network nodes are active during the peak activity and what applications are currently being run by the active nodes. One such
20 commercially available network analyzer is the Sniffer product line sold by Network General Corporation, 4200 Bohannon Drive, Menlo Park, California 94025. The Sniffer product and all manuals available to public are herein incorporated by reference. A detailed description
25 of the preferred embodiment of the invention is now discussed in conjunction with Figs. 8-16c. Fig. 8 illustrates a procedure 10 for modeling traffic for the nodes of a network to be simulated. In the first block 12, the times of peak activity on the network
30 system to be simulated should be determined. The number of active nodes (or stations) which are operating during these peak periods should be identified and should be

correlated with the applications they are running during these peak periods as illustrated by block 14.

5 If the network to be simulated physically exists, obtaining the above information can be easily accomplished using a network analyzer (i.e. a Network General Sniffer), or a network management system. If the network is a hypothetical one, the worst case can be assumed in that all nodes or stations are active and they are running the most traffic intensive of applications
10 concurrently.

Each different application should then be modeled according to the Client/Server Paradigm and represented in script format. As illustrated by decision 14, scripts can be developed, or if the application(s) run on a node
15 and the resources used to run the application comprises a popular combination, scripts modeling the traffic produced by such a node may be commercially available. If the scripts are to be developed, the node on the network can be analyzed in accordance with the
20 procedure 18.

Procedure 18 is illustrated in Fig. 9 as involving the following steps. Setup the network analyzer, the client station, and the server station on the same LAN segment, with no intervening bridges, routers, or
25 gateways between them (Blocks 30 and 32). This should be done even if some or all of the client stations running the application being modeled normally access the server through an intervening network node. The presence of intervening network repeaters or hubs may be ignored, as
30 their effects will be accounted for in the network model. Note that this may not be possible in all cases. One example might be if Apple Macintosh stations on AppleTalk access a file server on 10-Base-T, using a gateway node

to establish access. In this case, the workstation should be operated across the gateway in the normal fashion, and the minimum latency of the gateway (the delay forwarding network packets), if known, should be subtracted from the trace packet interarrival times (Block 42). The effects of the gateway are subtracted from the traffic model because the effects of the gateway will be modeled by the network model.

There should be no other activity on the server, and the level of other activity on the LAN segment should be minimized. This is important to make certain that the Client/Server Paradigm parameters measured from the analyzer trace are those of the client and server running the application, and not other network components or other unrelated network activity.

The network analyzer should be set up in trace capture mode 32. If the analyzer has a frame slicing feature to minimize the amount of information kept in the network trace buffer for each network packet, this may be used to maximize the length of the trace that may be saved and to maximize the trace performance of the analyzer. One must be certain to retain enough of the packet contents to preserve the protocol decoding of the packet, if the network analyzer performs packet decode.

Start the application program or function to be analyzed (Block 36). This may involve loading the application program, loading or saving a document file, copying files from one network station to another, sending retrieval or update requests to a network database server, sending communications messages to an asynchronous communications gateway, etc. The application operations producing the most network traffic at peak times should be modeled. If an application

operation produces minimum network activity, it need not be modeled. If this type of operation is a significant part of the system activity at peak network times then its presence can be accounted for by appropriately scaling the number of nodes represented in the simulation by traffic sources on each segment.

After the network activity completes, or the analyzer trace buffer fills up, the network analyzer capture should be stopped, and the trace buffer saved to a file (Block 36). The trace may then be reviewed on the analyzer display screen or printed. Note that on most network analyzers, the trace buffer acts as a First In First Out (FIFO) queue, meaning that once the trace buffer fills up, network packets are saved and the packets at the beginning of the trace are discarded. If it is important to preserve the beginning of the trace just after the application operation was started, the trace capture should be stopped just before the buffer fills up.

The network analyzer display options should be set (Block 34) to display packet interarrival time, packet size, source and destination station (i.e. node) addresses, and protocol decode information, if available. For ease of review, if the network analyzer allows network addresses to be given mnemonic names, the MAC level addresses of the client station and server station may be defined as new names to make the trace easier to understand. If packets traveling to or from other network stations appear in the trace, they should be removed using the display filter operation, if available.

As indicated by Block 38, the trace should be reviewed, examining the pattern of traffic between the client and server stations. Normally, unless a message

is being sent which is larger than the network topology can transmit in a single packet, there will be one client request packet followed by one server response packet. The implementation packet size limits for 10-Base-T or Ethernet will be 1000 to 1500 bytes, for Token Ring 4000+ bytes, and for FDDI about 4000 bytes. If a larger message is being sent, for example an 8192 byte file block read from a Sun NFS server on a 10-Base-T network, the network transport layer, in this case UDP, will fragment the packet into five 1514 byte packets and a sixth 934 byte packet. For our purposes, these six packets should be combined into one, and accorded the timing parameters of the first packet. The timing of the continuation packets will be determined by the transmission rate of the topology, which is taken into account by the network model.

The important information in the trace is the time the client takes to send a request after the previous response (Request Packet Waiting Time), the size of the request packet (Request Packet Size), the time the server takes to send a response (Response Packet Waiting Time) and the size of the server response packet (Response Packet Size).

One or more typical client/server-request/response interactions, preferably among the most traffic intensive, should be selected for modeling (Block 38). The exact characteristics will vary greatly depending on the type of operation being modeled. In a typical network trace of several hundred to several thousand packets, only a few need be defined by a script, which can be repeated over and over during the simulation. Thus, those operations which are most often repeated throughout the trace are the most appropriate for

modeling. To ascertain those operations, obvious patterns in the size of the packets being sent or received, or in the timing of the packets, should be identified. As previously discussed, all of the actual request/response interactions could be modeled in accordance with the present invention. This level of accuracy, however, is not required of the traffic models to achieve the level of accuracy desired of the network simulation.

10 Once an exemplary pattern of client/server activity has been identified, the following numbers should be extracted from each of the client/server-request/response interactions as indicated by Block 48 as follows:

15 Request Packet Waiting Time, seconds
 Request Packet Size, bytes
 Response Packet Waiting Time, seconds
 Response Packet Size, bytes

20 One more modification of the packet size values may be required to create the script steps from the Paradigm values. The packet size values derived from the network analyzer trace may include the data link layer overhead and the network layer overhead. These overhead bits encapsulating the actual message data as previously described. For 10-Base-T and IP, the overhead totals 34 bytes, which must be subtracted from the Client Request Packet Size and the Server Response Packet Size to produce the Client Request Size and the Server Response Size. These overhead bits are already taken into account by the models of the network itself, and would therefore create inaccurate results if not removed from the traffic model. This step is represented by Block 50 in Fig. 10.

30 In some circumstances, the messages being transmitted by the requesting client node or the

responding server node will exceed the size of the packets by the network protocol. If this is the case, the network protocol will break up the packet into submessages which meet the maximum packet size limitation. The trace taken by the analyzer will record such a message as the series of submessages.

For purposes of modeling a request/response interaction of this nature, the submessages should be recombined (after the subtraction of any modeled overhead from each submission) to create the message packet as it would have been generated in the application layer of the network protocol. This process is reflected in Blocks 52, 58 and 62. In addition, the Request or Response Packet Waiting Time associated with the recombined Request or Response Packet should be the Request or Response Packet Waiting Time of the first submessage packet comprising the recombined packet. The network model will simulate the protocol of the network which involves the additional overhead required to break up the message and transmit the message as submessage packets. This process is illustrated by blocks 60 and 64 of Fig. 10.

In accordance with Block 54, the numbers extracted as described above are then equated to the Client/Server Paradigm parameters as follows:

Request Packet Size = Client Request Size
Request Packet Waiting Time = Client Waiting Time
Response Packet Size = Server Response Size
Response Waiting Time = Server Response Time.

Once modeled in accordance with the Client/Server Paradigm, the request/response interactions can then be converted to a script form which can be used by the Comdisco ATG to generate discreet simulation events

mimicking the modeled request/response interactions. The modeled interactions are converted to script form as described by the Create Script 22 procedure of Fig. 11.

5 The Client/Server Paradigm parameters are converted to ATG script parameters as follows:

Client Waiting Time	=>	Thinking time
Client Request Size * 8	=>	Outgoing message length
Server Response Size * 8	=>	Incoming message length
Server Response Time * 10**7	=>	Remote CPU access time

10 Note that the two size values are multiplied by 8 to convert bytes to bits, because the network model represents throughput in bits/time (Block 68). The Server Response Time is multiplied by 10 MIPS to convert to CPU instructions (Of course, other CPU access rates
15 may be specified, depending upon the server which is actually used in the network) (Block 70). The rest of the ATG script values will be set to zero except Forced step time, which will be set to a timeout value 0.2 seconds. A timeout value is needed to model the
20 behavior of the transport protocol layer of the network, which insures that the process will proceed if a packet is lost in transit. If a packet is lost in a physical network, the physical network will retransmit the packet. If the Forced step were not available for the simulation,
25 however, a lost packet could mean the simulation would stall; the next packet can not be generated until a response is received. Thus, the traffic source might otherwise remain suspended without the timeout function. As indicated by Block 74 of Fig. 11, the Forced Step
30 value should be greater than the Thinking Time or the Thinking Time parameter is negated.

It is important to understand that by assigning the Client Waiting Time parameter to the ATG script Thinking time parameter, the assumption is made that each client

request is matched by a server response, and that succeeding client requests wait for the previous server response. If a step should be specified which is not correlated with a server response, the Thinking time
5 number in the script for that step should be specified as a number greater than the Forced Step time. The further assumption is made that the client node is not itself shared on a machine with other applications.

If a client node is running multiple applications,
10 then the conversion of Client Waiting Time to the ATG script parameter "Thinking Time" should be from seconds to CPU instructions and specified as the ATG parameter "local CPU Access Time."

The resulting values are finally placed into a
15 script format which can be recognized by a commercially available traffic model generator, such as the Automatic Traffic Generator (ATG) supplied by Comdisco Systems, Inc. The format can specify the parameters as a Fixed, Uniform or Exponential distribution for each value. One
20 ATG script step is created for each client/server-request/response interaction being modeled. A RESTART step is typically included at the end of the script to indicate that the script is to be repeated during the simulation. Examples of scripts are provided in
25 Figs. 14a and 14b.

The script is read by the ATG to produce traffic which emanates from a traffic source connected to the modeled network to drive a simulation of the network model. If multiple client nodes, running the same
30 application and configured with the same resources are to be modeled, the simulation need only specify identical traffic sources driven by the identical script. Although the server is specified and modeled as part of the

network, it does not require a script as its traffic is already modeled as part of the client node traffic sources.

5 The following examples further illustrate the
extraction of parameters, from actual network traffic
traces, with which to model the traffic generated by a
node in accordance with the present invention. The first
example examines a department of 40 users operating DOS
workstations using a word processing application, loading
10 their programs and files from a Novel NetWare 386 file
server. All of the stations and the server are on the
same 10-Base-T LAN segment. All of the stations operate
during the day, but there are variations in the level of
usage. The manager of the department estimates that at
15 most 20 stations are loading programs or files at any one
time, and that this is probably the peak activity level
on this network segment. After confirming this with a
network monitor (Blocks 12 and 14, Fig. 8), the modeling
of this application operation in accordance with the
20 present invention is performed as follows.

Using a Network General Sniffer, a trace is recorded
of a program load of the Microsoft Word application by a
386sx DOS PC client station from a NetWare 386 server
station. The resource configuration of this station or
25 node is typical of the client stations in the department.
A portion of this recorded trace appears in Figs. 15a,
15b and 15c. The DOS PC client station and the Novell
NetWare server station were the only two stations
operating on the network segment besides the Sniffer
30 (i.e. network analyzer) when the trace was recorded. The
normal capture trace mode of the Sniffer was used, and a
trace of 597 frames was obtained covering approximately

5.4 seconds. This process is illustrated by Blocks 18, 30, 32, 34 and 36 of Fig. 9.

5 To examine this trace, the Bytes and Delta Time values in the Summary Display options for the Sniffer were enabled. The Display Filters Station Address From/To option was also enabled to remove packets from or to other stations on the network. Using the Display Manage Names option, the client station and server station MAC addresses are defined to be "NetWare Clnt" and "NetWare Srvr", respectively. These settings produce the display needed to construct the ATG script.

15 To read the trace printout of Figs. 15a, 15b and 15c, it should be remembered that each line in the trace typically represents one packet captured on the network by the Sniffer. The values for each packet, left to right, are packet number (generated by the Sniffer) 100, packet interarrival time in seconds 102, packet size including headers but excluding packet checksum 104 (in bytes), the destination MAC address 106, the source MAC address 108, the protocol type of the highest level protocol in the packet 110, and then protocol dependent description fields 112.

25 In accordance with Block 38 of Fig. 9, an examination of this trace reveals that there is an obvious and exemplary pattern in the server response times during the program load file reads. From packet number 15 (Fig. 15a) to packet number 110 (Fig. 15b) for example, there are 48 client/server request/response interactions. Each client request packet is 64 bytes long, and each server response packet is 1078 bytes long. It should be pointed out that there may be other exemplary patterns of client/service interactions in the trace of Figs. 15a, 15b and 15c which will produce

accurate results if used in accordance with present invention. During this sequence of 96 network packets, most are sent with a delay of about 1.6 to 2.0 ms. However, every eighth packet, which represents every fourth server response, takes a much longer time, from about 25 ms to 50 ms. Those of ordinary skill will appreciate that a program load is a serial file read and that the Novell NetWare server caches file blocks read from disk. Thus, it may be inferred that the additional time for every fourth file read request represents the time to read another block from disk, which is large enough to satisfy four network requests.

To model this program load file read sequence, four steps will be required which will represent the pattern of three short server responses followed by a longer one. The values extracted from the network trace sequence in accordance with Blocks 44, 46 and 48 are as follows:

Request Packet Waiting Time	=	0.0017 s
Request Packet Size	=	64 bytes
Response Packet Waiting Time	=	3 at 0.0018 s 1 at 0.0350 s
Response Packet Size	=	1078 bytes

One more modification of the packet size values (as illustrated by Block 50) is necessary before the model of this application activity can be scripted. One of ordinary skill will appreciate that the packet size values above include the data link layer overhead for Ethernet or 10-Base-T, and the network layer overhead for IPX. Therefore, 34 bytes must be subtracted from each packet size because any overhead data required as a function of network protocol will be accounted for by the network simulation models. This protocol overhead includes the LAN data link overhead of 14 bytes and IP

network overhead of 20 bytes. If any of such overhead data is not accounted for in the network simulation models, those bits unaccounted for can simply be left as part of the Request Packet or Response Packet Size parameters. Thus, the resulting values for the Client/Server Paradigm as output from Block 54 are:

Client Waiting Time = 0.0017 s
Client Request Size = 30 bytes
Server Response Time = 3 at 0.0018 s
1 at 0.0350 s
Server Response Size = 1044 bytes

It should be understood that the above parameters represent the recorded traffic as modeled in accordance with the method of the present invention. Once this model is created, it can be converted to any form for purposes of creating discreet events in accordance with the model for simulation purposes. For purposes of creating a script input, in accordance with the Create Script 22 process of Fig. 11 and recognized by the Application Traffic Generator Module (ATG) available from Comdisco Systems, Inc., the two size values are multiplied by 8 to convert bytes to bits (Block 68), and the Server Response Time is multiplied by the server CPU access rate (e.g. 10 MIPS) to convert time to CPU instructions (Block 70). Client Waiting Time is specified as the "Thinking Time" parameter (Block 72). The model is thus converted to the four steps in the script from which the ATG can generate the discreet events which mimic the traffic characteristic of a client request leading to a server response requiring a disk read followed by three client requests leading to faster server responses using disk blocks already read. The resulting ATG script, including the RESTART step to

indicate that the script is to be repeated during the simulation, is shown in Fig. 14a.

5 To simulate the network of the example, the Simulate Network procedure 28 of Fig. 13 is followed. The ATG is programmed to provide ten sources of traffic in accordance with model as represented by the script (Block 86), which are in turn connected to the model of a 10-Base-T segment (Block 90). Also connected to the 10-Base-T segment is a traffic destination node which models
10 the operation of the server node.

Unlike the prior art traffic sources such as those shown in Figs. 6a, 6b and 6c, or those which simply play back a trace which was previously recorded from the network, the traffic sources generating packets in
15 accordance with the model created through the application of the present invention will automatically vary the rate at which packets are generated as a function of the demand on server and network resources as predicted by the network model during simulation.

20 With previous methods of modeling traffic sources, on the other hand, even if the number of client nodes comprising the simulated network increases, resulting in a corresponding increase in the demand on the server resources, the previous traffic models continue to put
25 out packets at the same rate because there is no feedback to the model regarding the slower overall response times of the network. This lack of feedback results in an inaccurate simulation because for a physical network the rate at which packets are generated by the client nodes
30 will decrease (client requests that are correlated with server responses must wait for arrival of the response).

A second example of the application of the present invention involves a department of 10 design engineers

operating Sun SPARC stations executing CAD applications,
and loading their programs and files from a Sun SPARC
station acting as a Sun NFS server. All of the stations
(i.e. nodes) and the server node are on the same 10-Base-
5 T LAN segment. All of the stations operate during the
day, but there are variations in the level of usage. The
manager of the department estimates that at most four
stations are loading programs or files at any one time,
and that this is probably the peak activity level on this
10 network segment. After confirming this with a network
monitor (Blocks 12 and 14, Fig. 8), the modeling of this
application operation in accordance with the present
invention continues as follows.

Using a Network General Sniffer, a trace is recorded
15 of a program load of the BONES® Designer™ 2.0 application
program by a Sun SPARC station 2 with 32 MB of RAM from a
Sun SPARC Station 2 NFS server station. This station is
typical of the client stations (i.e. nodes) in the
department. A portion of this trace appears in
20 Figs. 16a, 16b and 16c. Although other activity was
minimized on the server and the network during the trace,
other activity was present during the time the trace was
recorded. The normal capture trace mode of the Sniffer
was used, and a trace of 6247 frames was obtained
25 covering approximately 242 seconds (Blocks 18, 30, 32, 34
and 36 of Fig. 9).

To examine this trace, the Bytes and Delta Time
values in the Summary Display options are enabled for the
Sniffer. The Display Filters Station Address From/To
30 option is also enabled to remove packets from or to other
stations on the network. Using the Display Manage Names
option, the client stations and server station MAC
addresses are defined to be "zeus" and "corky",

respectively. These settings produce the display needed to construct the ATG script (Block 34).

5 To analyze the trace printout, it should be remembered that each line in the trace represents one packet captured on the network by the Sniffer. The values for each packet, left to right, are packet number 100 (generated by the Sniffer), packet interarrival time in seconds 102, packet size including headers but excluding packet checksum 104 (in bytes), the
10 destination MAC address 106, the source MAC address 108, the protocol type of the highest level protocol incorporated in the packet 110, and then protocol dependent description fields 112.

15 A review of the trace reveals that the most traffic intensive network activity is represented by the large 4K or 8K block reads by the client node from the server node, as seen in packets 1 through 58 on Fig. 16a, for example. Note that the server response messages are broken up by the UDP transport protocol. In packet 37, a
20 request to read 8192 bytes is sent from the client node to the server node. Packets 38 through 43 are the response message, which is over 8K in size, but which is sent as five 1514 byte packets and one 934 byte packet due to the packet size limitation of 10-Base-T. It is
25 also observed that this file read activity is periodically interrupted by a request to look up another file, such as shown in packets 59 (Fig. 16a) through 64 (Fig. 16b). A reasonable approach is to model the activity as a cycle of looking up a file and then reading
30 the contents of the file. A script which is derived from the model of the activity in accordance with the present invention, repeating during a simulation of the example network, will realistically model the traffic

characteristic of a program load in progress. Further, as the number of nodes increases and the network response slows, in accordance with Block 38 the script will realistically model the traffic characteristic of a program load with the network more heavily loaded.

Choosing the packet sequence cycle from packet 59 (Fig. 16a) to packet 109 (Fig. 16b), there are 10 client/server - request/response interactions, with the station "zeus" being the client node and the station "corky" being the server node. The client station first looks up the file name "P00005" on the server, does not find it. It then tries again while adding the file extension "sbin", finds the file and gets a file handle. The client then reads the attributes for the file handle, and in packet 65, issues a 4K byte read request for the file. The server responds with a response message containing the 1761 total bytes of the file, which still takes two packets, numbers 67 and 68, as the message size still exceeds the maximum transmit size for 10-Base-T. The client then proceeds to issue 8K byte read requests to another previously open file, completing the sequence. In each case the server response message is broken up by the UDP transport layer protocol (characteristic of the LAN protocol in use) into five 1514 byte response packets and one 934 byte response packet. One who is familiar with the application program being executed will know that the file "P00005 sbin" is one of the release patch files for the BONEs® Designer™ 2.0 application. Thus it can be surmised that this sequence is a program load operation reading a large file, and the relatively small patch files are being opened and read as needed. Thus, this data intensive sequence of client/server

interactions will appropriately exemplify the data traffic for this application.

5 To mimic this sequence, 10 steps will be modeled and converted to an appropriate ATG script. Note that for the seven server response messages larger than 1500 bytes, the multiple packets representing one server response should be aggregated into one message as illustrated by Blocks 58, 60, 62 and 64. This is because the model of the traffic created by the present invention
10 models packets created at the application layer of the network protocol. The ATG will model the process of breaking apart the application message into appropriately sized packets according to the protocol of the network being simulated. The ATG therefore recreates the UDP
15 continuation frames while adding back the network layer and data link layer overhead bytes in the process of generating the discreet events representing traffic sourced from the node being modeled.

To calculate the correct message size for the six
20 server 8K byte block reads, the 34 bytes of data link overhead and IP network overhead are first subtracted from the lengths of each of the six packets (Block 50, Fig. 10). This yields five Response submessage packets of 1480 bytes and one Request message sub packet of 900
25 bytes. The total recombined single Request Packet length is therefore $5 * 1480 + 900 = 8300$ bytes, which reflects the 8192 bytes of data read plus 108 bytes of transport layer overhead in the first packet. This transport layer overhead is not modeled by the ATG or the Network model.
30 The one 4K byte block read, whose response is only 1761 bytes of data, requires a Single Response Packet size of 1872 bytes.

The next issue for the Single Response Packets is what Response Packet Waiting Time to assign to them. Note from the trace that the repeated UDP continuation frames of 1514 bytes are transmitted at intervals of about 1.1 to 1.3ms. Calculating the transmission time for 1514 bytes, a value of 1.2 ms is obtained (i.e. $1514 * 8 / 10^{**7} = 0.00121$). It can be concluded that the delay on the continuation frames is simply a matter of transmission time and media contention, which the 10-Base-T model will take into account. Thus, the correct Response Packet Waiting Time for the Single Response Packet is therefore the interarrival time for the first Submessage Packet in the response (Illustrated by Blocks 60 and 64).

After also subtracting the 34 bytes from the length of the other Request and Response Packet Sizes, a 10 step sequence in the form of the Client/Server Paradigm in accordance with the method of the present invention is as follows:

20	1.	Client Waiting Time	=	0.0296 s
		Client Request Size	=	120 bytes
		Server Response Time	=	0.0016 s
		Server Response Size	=	36 bytes
25	2.	Client Waiting Time	=	0.0256 s
		Client Request Size	=	124 bytes
		Server Response Time	=	0.0016 s
		Server Response Size	=	136 bytes
30	3.	Client Waiting Time	=	0.3606 s
		Client Request Size	=	108 bytes
		Server Response Time	=	0.0012 s
		Server Response Size	=	104 bytes
35	4.	Client Waiting Time	=	0.0274 s
		Client Request Size	=	120 bytes
		Server Response Time	=	0.0143 s
		Server Response Size	=	1872 bytes
	5.	Client Waiting Time	=	0.0103 s

	Client Request Size	=	120 bytes
	Server Response Time	=	0.0028 s
	Server Response Size	=	8300 bytes
5	6. Client Waiting Time	=	0.0128 s
	Client Request Size	=	120 bytes
	Server Response Time	=	0.0026 s
	Server Response Size	=	8300 bytes
10	7. Client Waiting Time	=	0.0029 s
	Client Request Size	=	120 bytes
	Server Response Time	=	0.0026 s
	Server Response Size	=	8300 bytes
15	8. Client Waiting Time	=	0.0042 s
	Client Request Size	=	120 bytes
	Server Response Time	=	0.0026 s
	Server Response Size	=	8300 bytes
	9. Client Waiting Time	=	0.0084 s
	Client Request Size	=	120 bytes
	Server Response Time	=	0.0028 s
	Server Response Size	=	8300 bytes
20	10. Client Waiting Time	=	0.0049 s
	Client Request Size	=	120 bytes
	Server Response Time	=	0.0028 s
	Server Response Size	=	8300 bytes

25 To convert the Paradigm parameters according to the
Create Script procedure 22 of Fig. 11, the two size
values in each step are multiplied by 8 to convert bytes
to bits, and the Server Response Time in each step is
multiplied by 10 MIPS to convert to CPU instructions to
create 10 step ATG script to represent the sequence of a
30 server file lookup followed by a series of large block
file reads. The resulting script, including the RESTART
step to indicate that the script is to be repeated during
the simulation, is shown in Fig. 146.

35 Note that in the third step the Forced timeout 94 is
0.4 seconds so that it is longer than the required Client
Waiting Time of 0.3606 seconds (Block 74).

The model of the network for simulation purposes is created according to the Simulate Network procedure 28 of Fig. 13 by connecting a 10-Base-T segment to the ATG which is programmed to provide four traffic sources in accordance with the model created by the method of the present invention. Thus, four nodes will create discreet events as directed by the above script to drive the simulation. A traffic destination parameter is also specified and connected to the network model.

In addition, common nodal configurations running common applications programs may be modeled in accordance with the present invention and the resulting scripts be made commercially available to users of network simulation products. This is illustrated in Fig. 12 by the procedure called Off The Shelf Scripts 26. Clearly, this would save users from recharacterizing the traffic generated by commonly encountered network nodes.

This invention has been described in an exemplary and preferred embodiment, but is not limited thereto. Those skilled in the art will recognize that a number of additional modifications and improvements can be made to the invention without departure from the essential spirit and scope. For example, the method of the present invention is applicable to any other network protocol not embodied in any of the examples, even though minor modifications to the process of extracting model parameters or converting model parameters to scripts may be required based on differences in protocols.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method of simulating data traffic being transmitted over a network among a plurality of nodes interconnected by the network, the data traffic comprising a plurality of conversations among the plurality of nodes, one or more of the plurality of nodes being a client node and one or more of the plurality of nodes being a server node, said method comprising the steps of:

providing a model representative of the network;

characterizing one or more of the plurality of conversations as a series of one or more request/response interactions, each of the one or more interactions comprising transmission of a request message from one of the one or more client nodes to one of the one or more server nodes, and wherein none, some or all of the one or more interactions further comprise transmission of a response message associated with the request message, the associated response message transmitted from the one server node back to the one client node in response to receiving the request message; and

generating data representative of the one or more interactions of each of the characterized conversations, said step of generating further comprising the steps of:

inputting the generated data for each of the interactions into the network model to determine when the associated response message of each of the interactions having one are received by the one client; and

when the request message of one of the interactions is dependent on the one client node's receipt of the response message associated with a previously generated

request message, delaying the inputting of the data representative of the dependent interaction into the network model until the response message associated with the previously generated request message is received by the one client node as determined by the network model.

2. The method of claim 1 wherein said step of characterizing one or more of the plurality of conversations further comprises the steps of:

determining a peak level of data traffic over the network; and

defining the one or more of the plurality of conversations to characterize as those which are active when the network is at the peak traffic level.

3. The method of claim 2 wherein said step of characterizing further comprises the step of limiting the series of one or more request/response interactions for each of the characterized conversations to those interactions which are the most data intensive and the most exemplary of the conversation.

4. The method of claim 3 wherein said step of limiting is performed for each characterized conversation assuming no other of the plurality of conversations are present on the network.

5. The method of claim 3 wherein said step of limiting is performed using output from a network analyzer connected to the network, the output measured for each of the characterized conversations with minimal presence of other of the plurality of conversations present on the network.

6. The method of claim 4 wherein the extracted parameters are converted to scripts, the scripts capable of being read by a traffic generator to generate data traffic in accordance therewith.

7. The method of claim 11 wherein the extracted parameters are converted to scripts, the scripts capable of being read by a traffic generator to generate data traffic in accordance therewith.

8. The method of claim 2 wherein said step of determining the peak level of data traffic is performed by a network analyzer.

9. The method of claim 2 wherein said step of defining the one or more of the plurality of conversations is performed by a network analyzer.

10. The method of claim 1 wherein said step of inputting data to the network model further comprises the steps of:
determining when the request message arrives at the one server node for processing; and
determining when the associated response message is generated by the one server node.

11. The method of claim 10 wherein said characterizing step further comprises the step of extracting from each of the one or more request/response interactions a set of interaction parameters including a Client Waiting Time, a Client Request Size, a Server Response Time and a Server Response Size.

12. The method of claim 11 wherein said step of determining when the request message arrives further comprises the steps of using the network model to determine the time necessary for the request message to traverse the network from the one client node to the one server node based on the Client Request Size.

13. The method of claim 12 wherein said step of determining when the request message arrives further comprises the step of using the network model to account for time associated with contention for access to the one server node.

14. The method of claim 11 wherein said step of inputting the generated data further comprises the step of using the network model to determine the time for the associated response message to traverse the network from the one server node to the one client node as a function of the Server Response Size.

15. The method of claim 11 wherein the one server node represents remote data processing resources and wherein the Server Response Time is a function of the throughput of the remote data processing resources.

16. The method of claim 11 wherein said step of generating further comprises the steps of:

for each of the one or more interactions, scheduling the generation of the request message upon expiration of the Client Waiting Time;

when transmission of the request message is dependent upon the receipt by the one client node of the response message associated with a previously generated request message, triggering the Client Waiting Time upon receipt; and

when transmission is not dependent, triggering the Client Waiting Time upon generation of the previous request message.

17. The method of claim 16 wherein the one client node represents local data processing resources and the Client Waiting Time is a function of the throughput of the local data processing resources and thinking time attributable to a user.

18. The method of claim 11 wherein the network model includes a model of the one server node, said step of determining when the associated response message is generated further comprises said step of using the one server node model to determine the time necessary to generate the associated response message based on the Server Response Time.

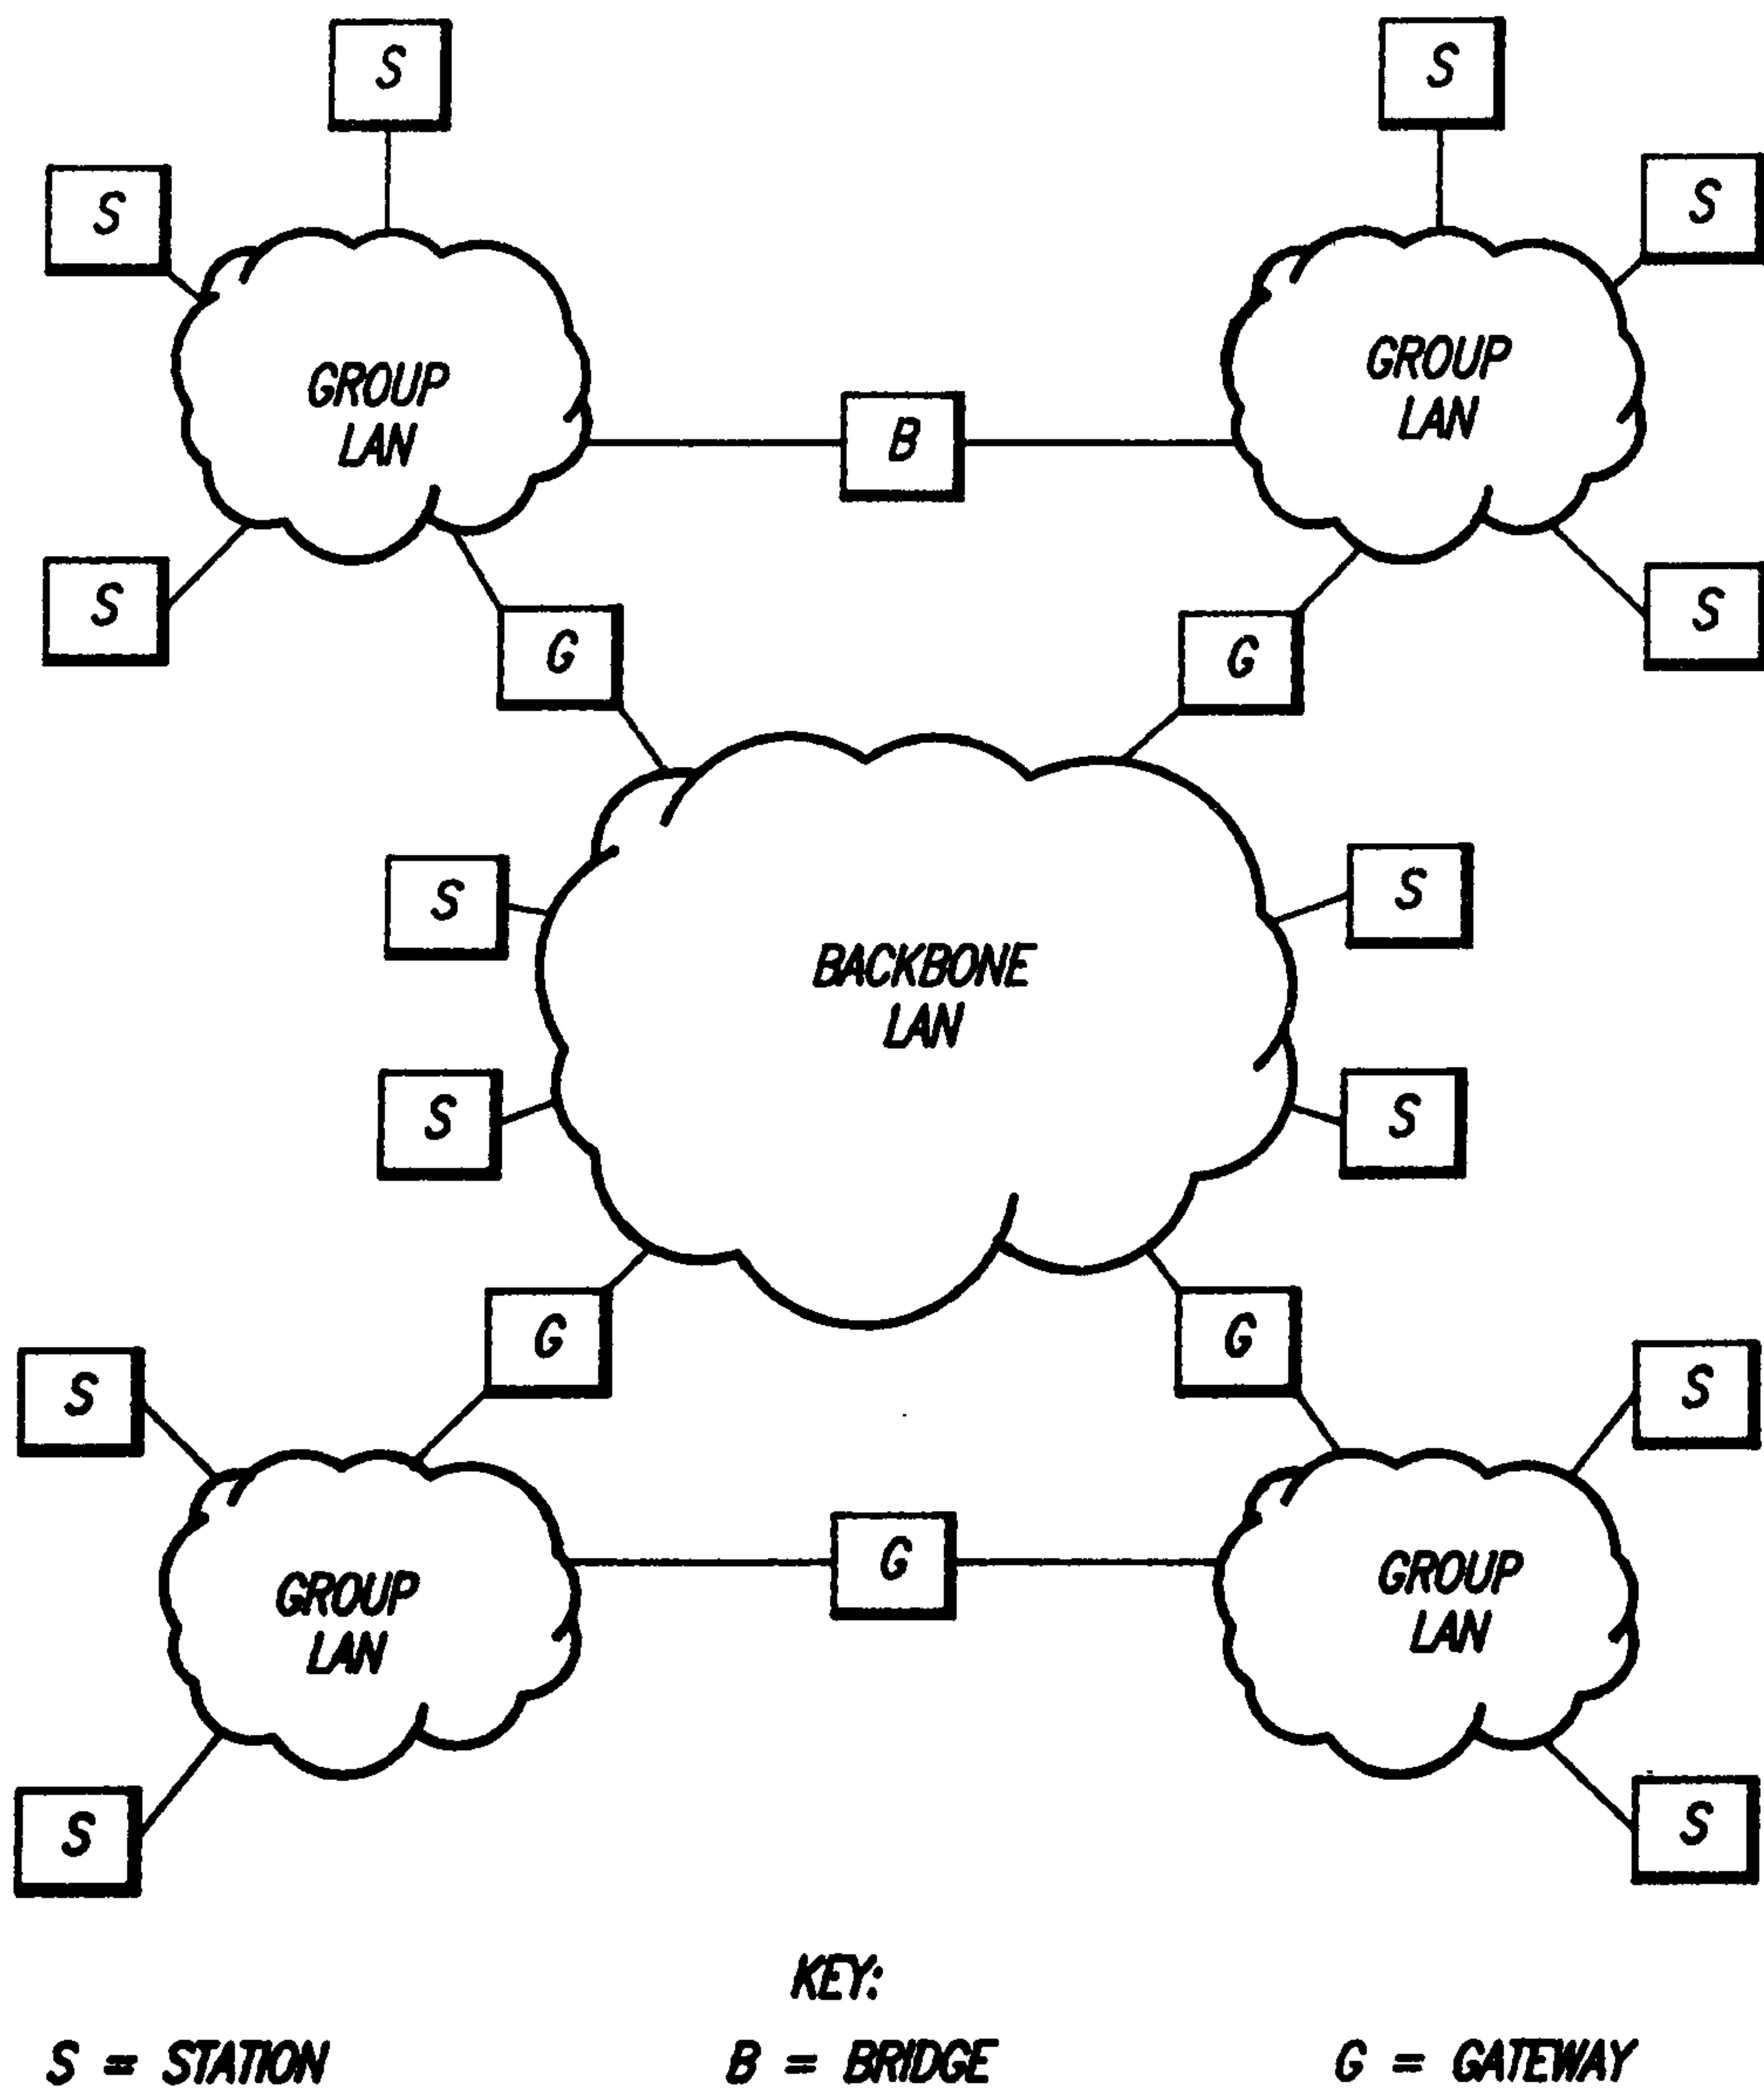
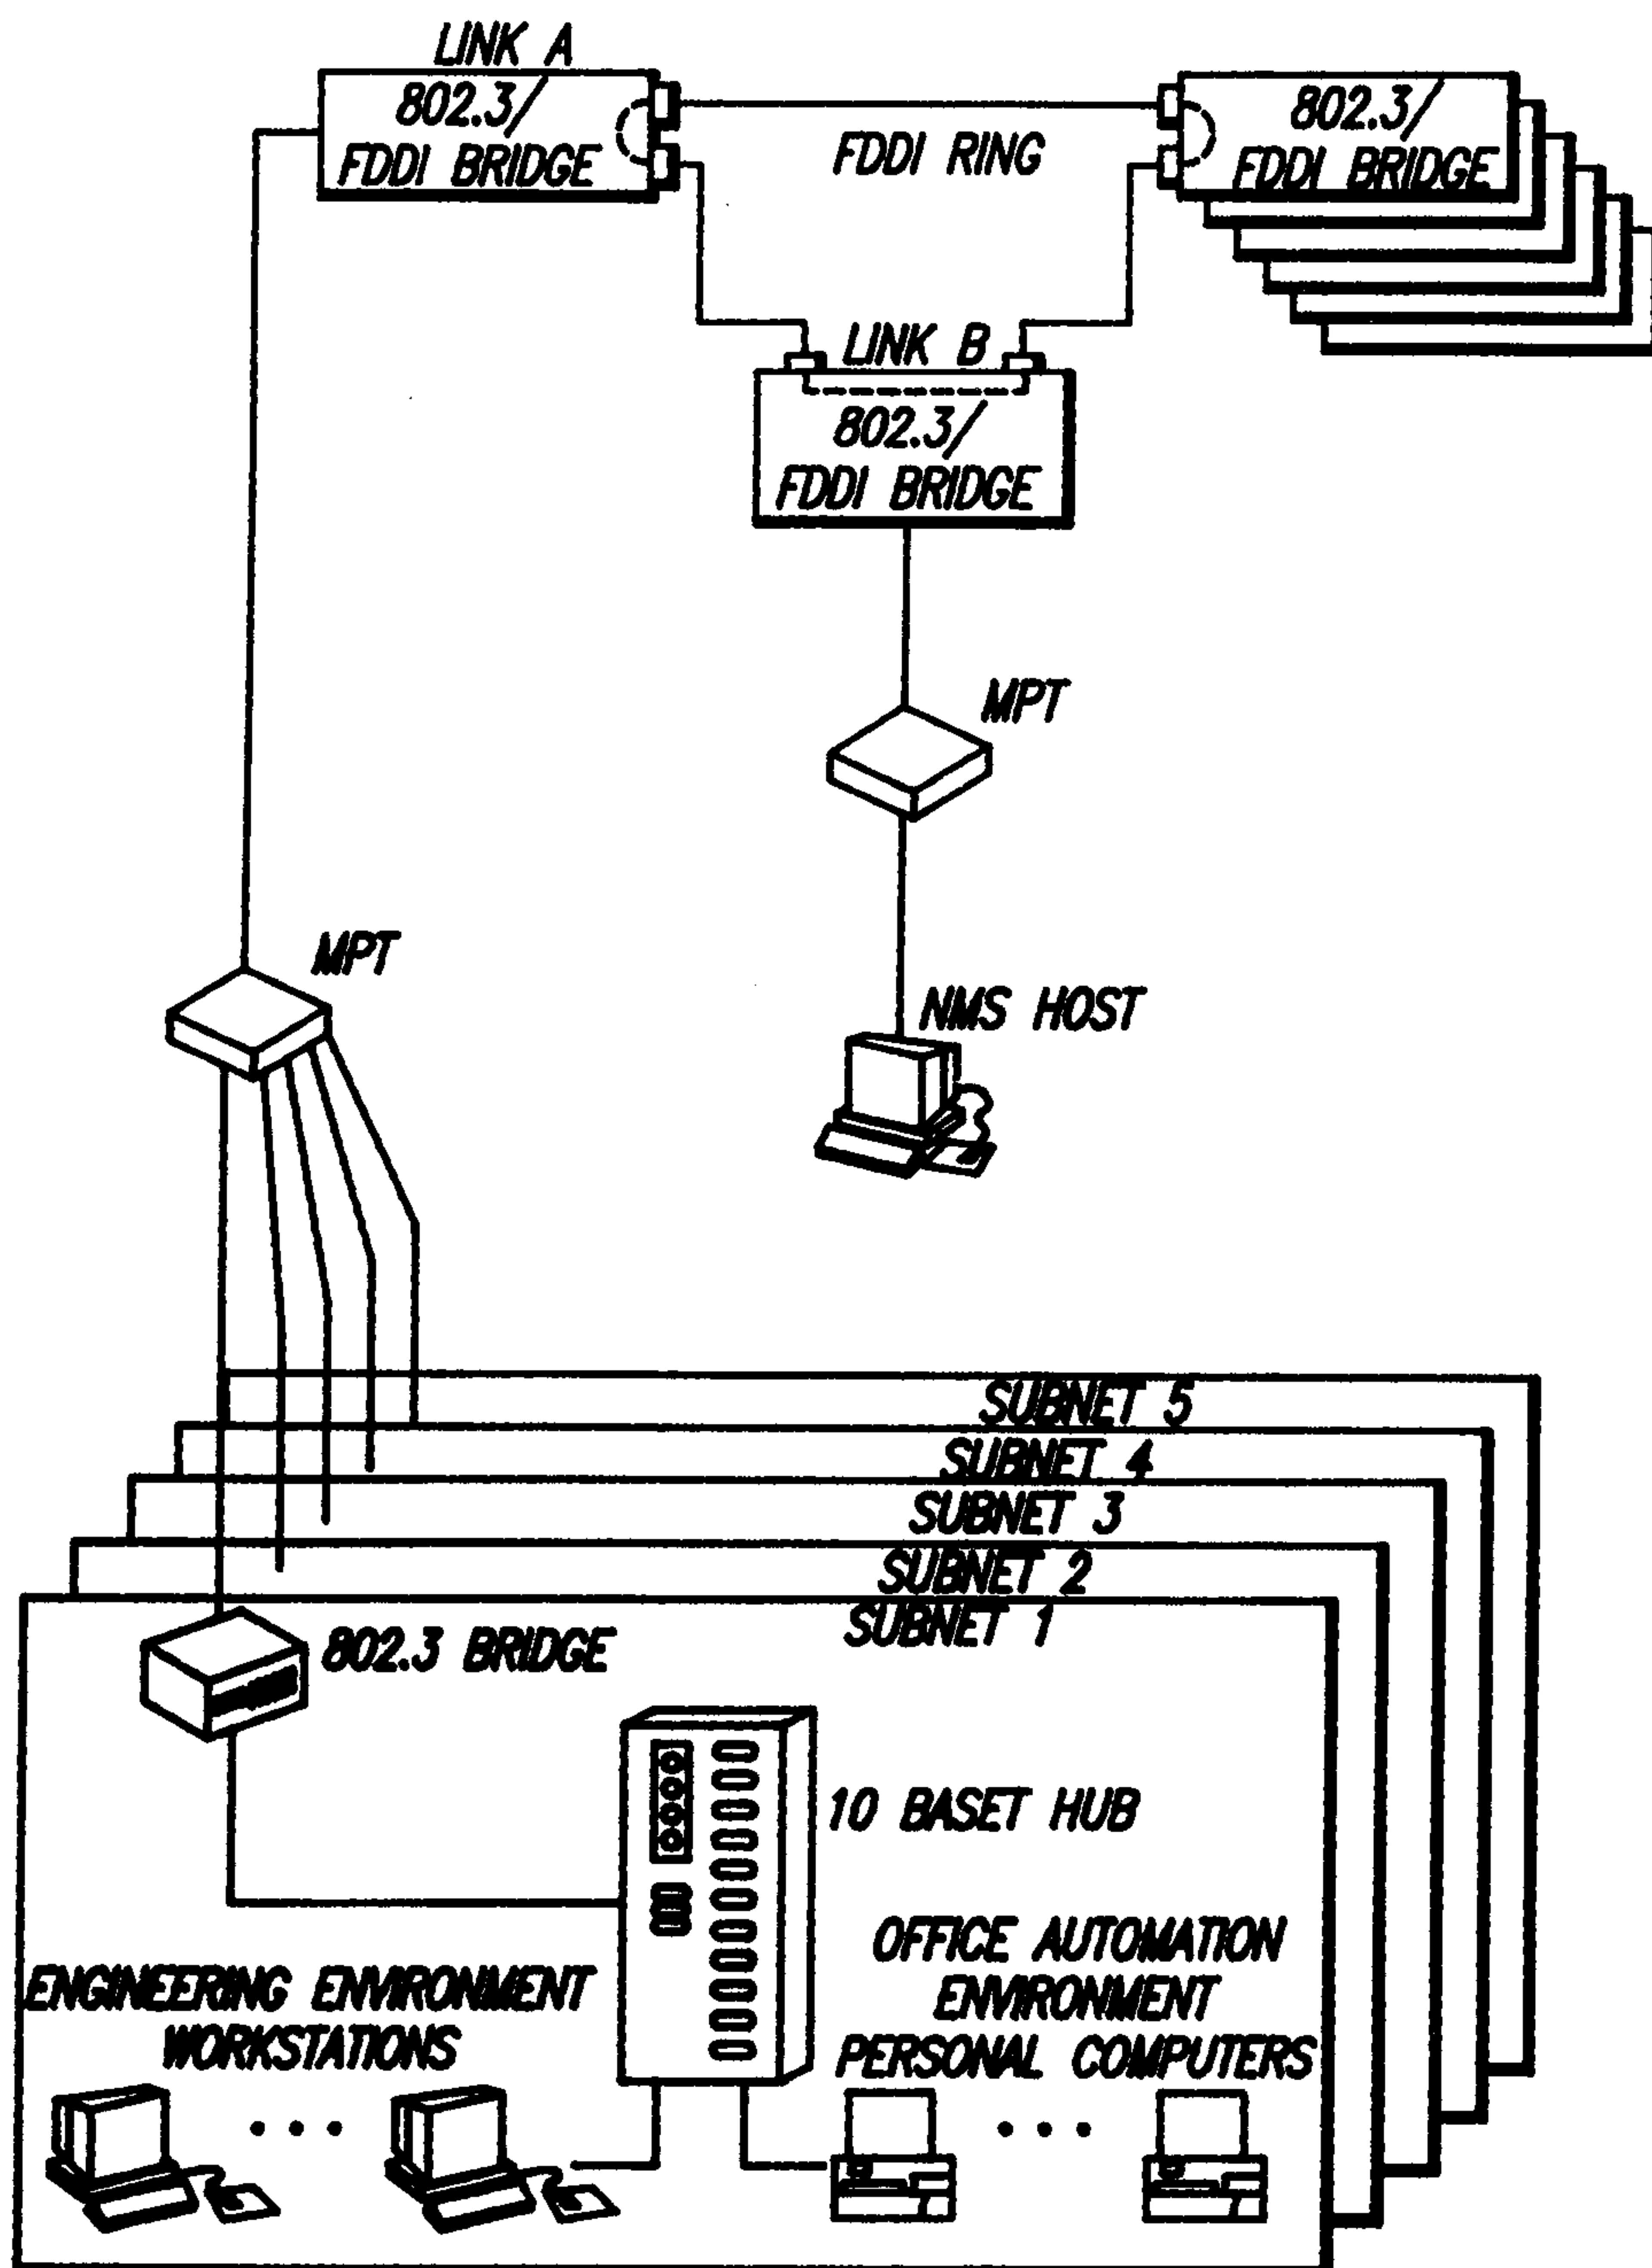
**FIG. 1**

FIG. 2

KEY:
 MPT = MULTIPOINT TRANSCIVER
 FDDI = FIBER DISTRIBUTED DATA
 INTERFACE
 NMS = NETWORK MANAGEMENT
 SYSTEM




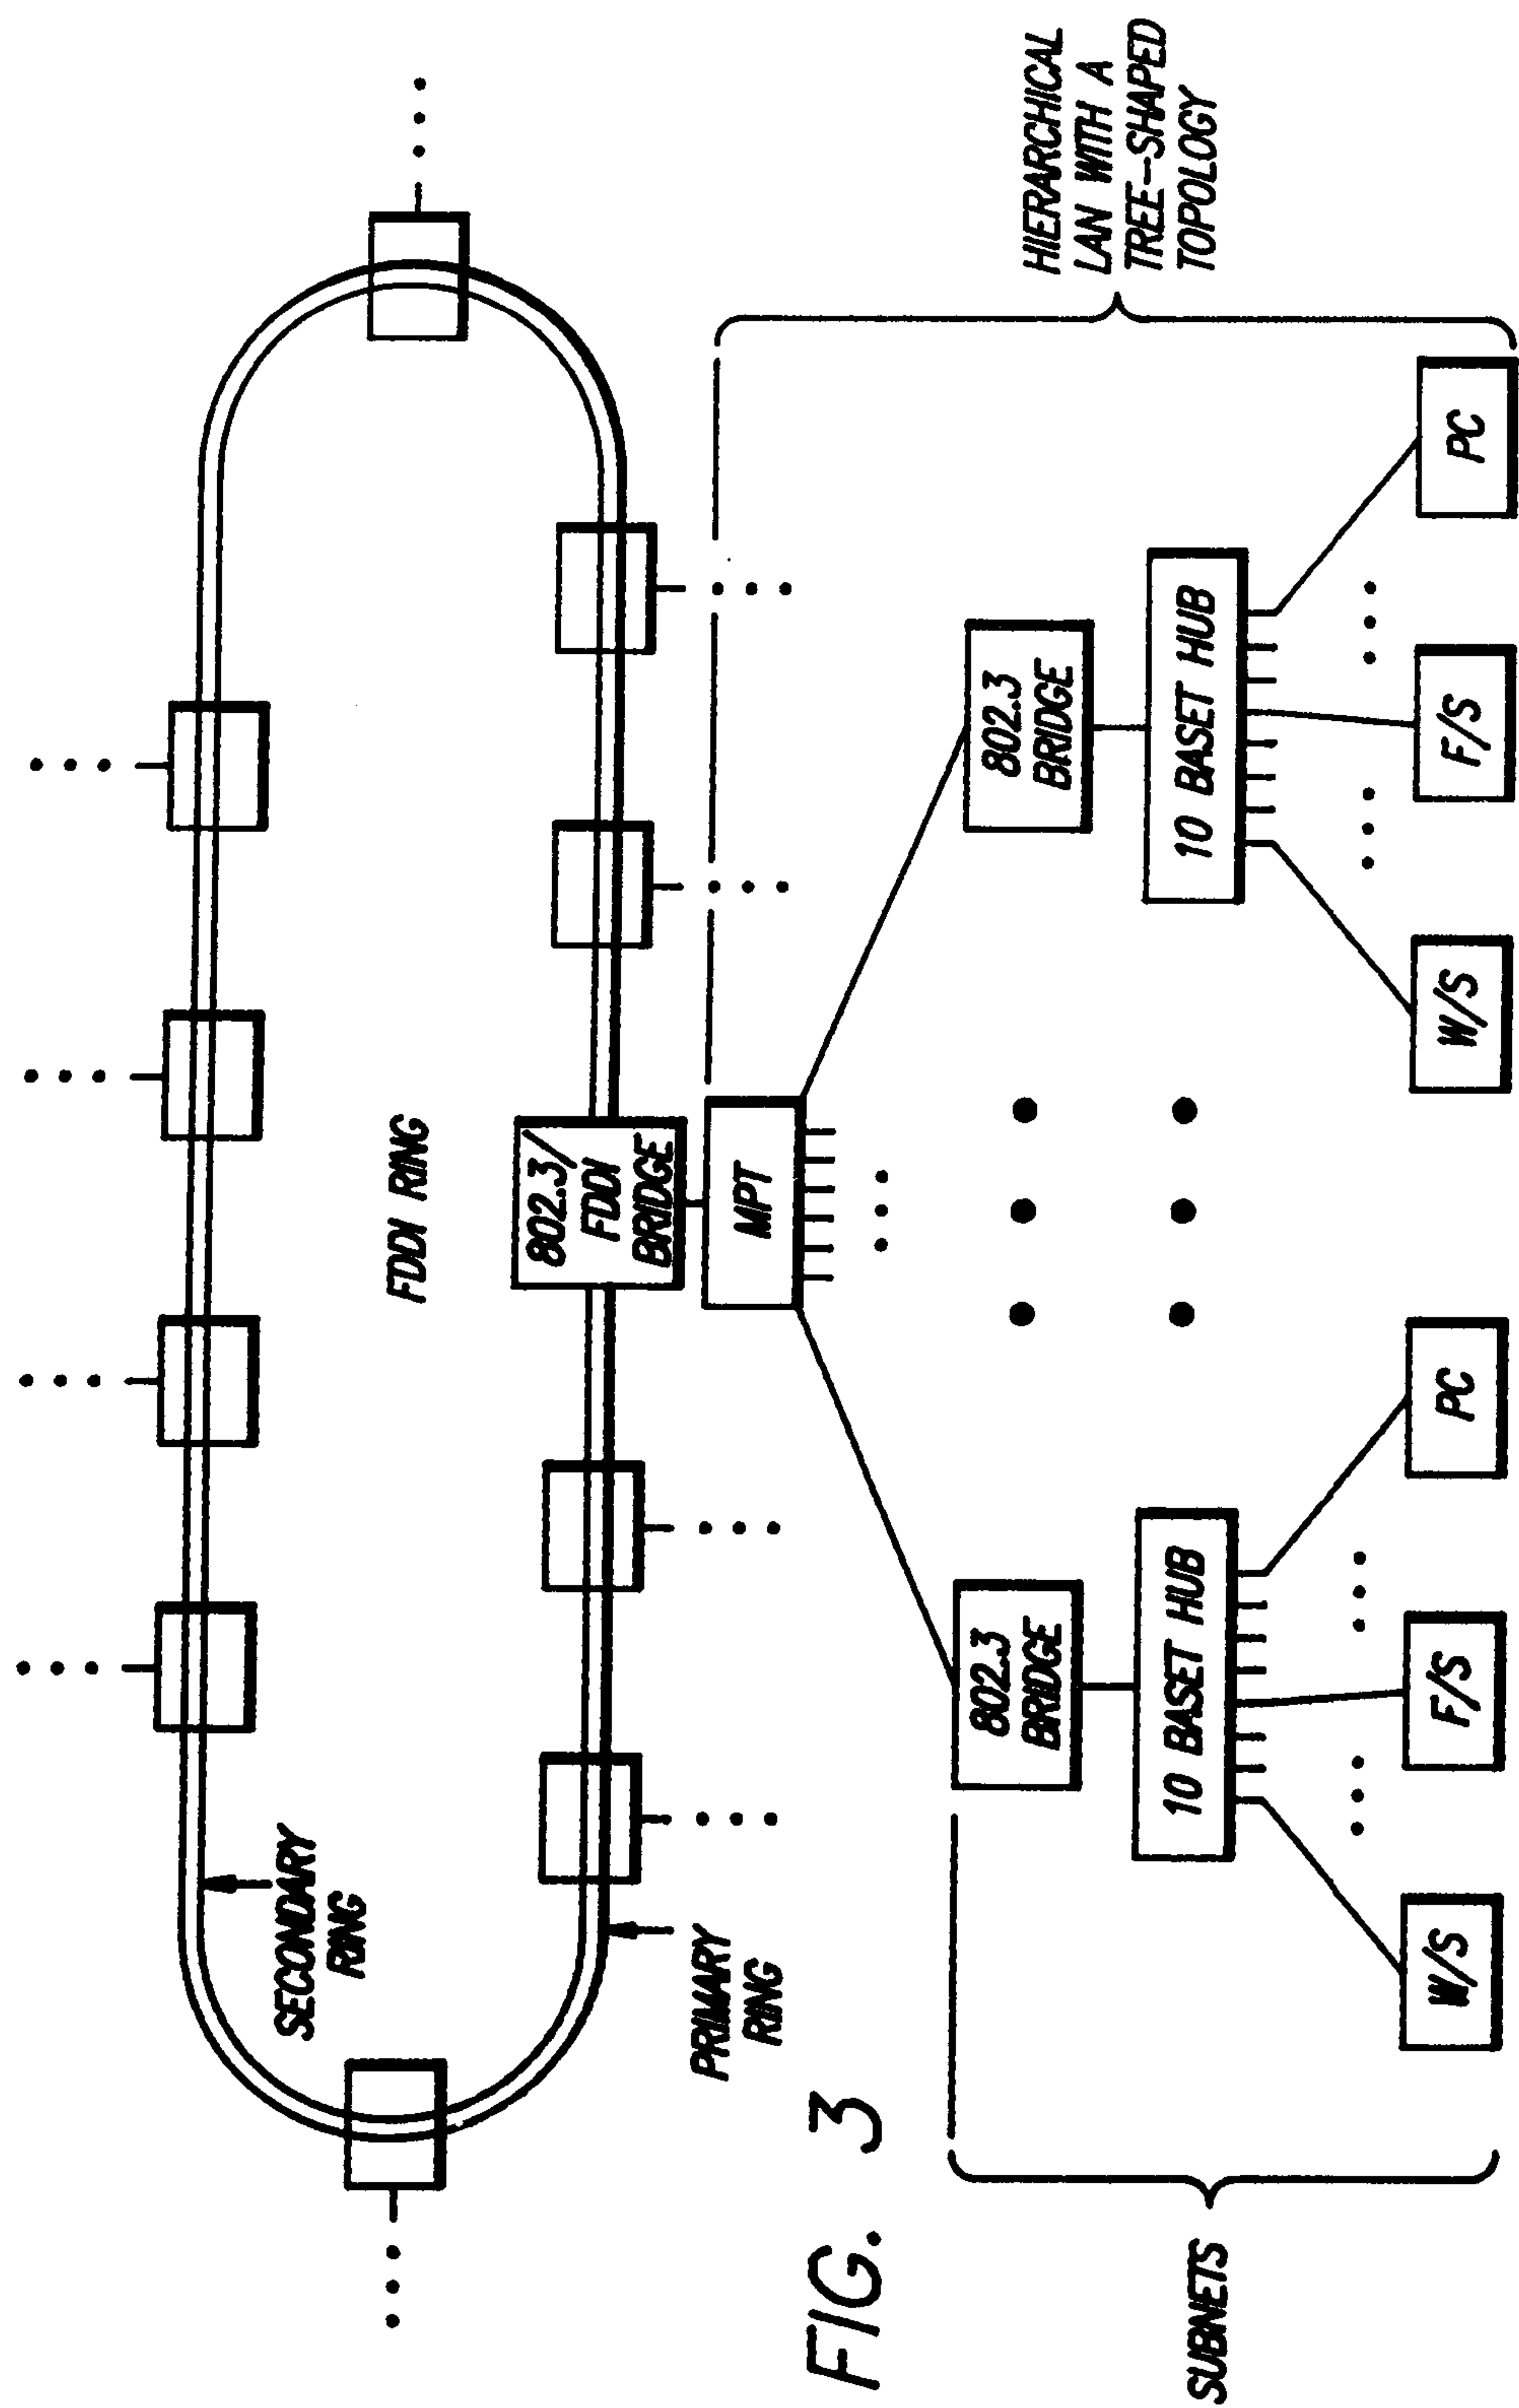


FIG. 3

Gowling, Strathy & Henderson

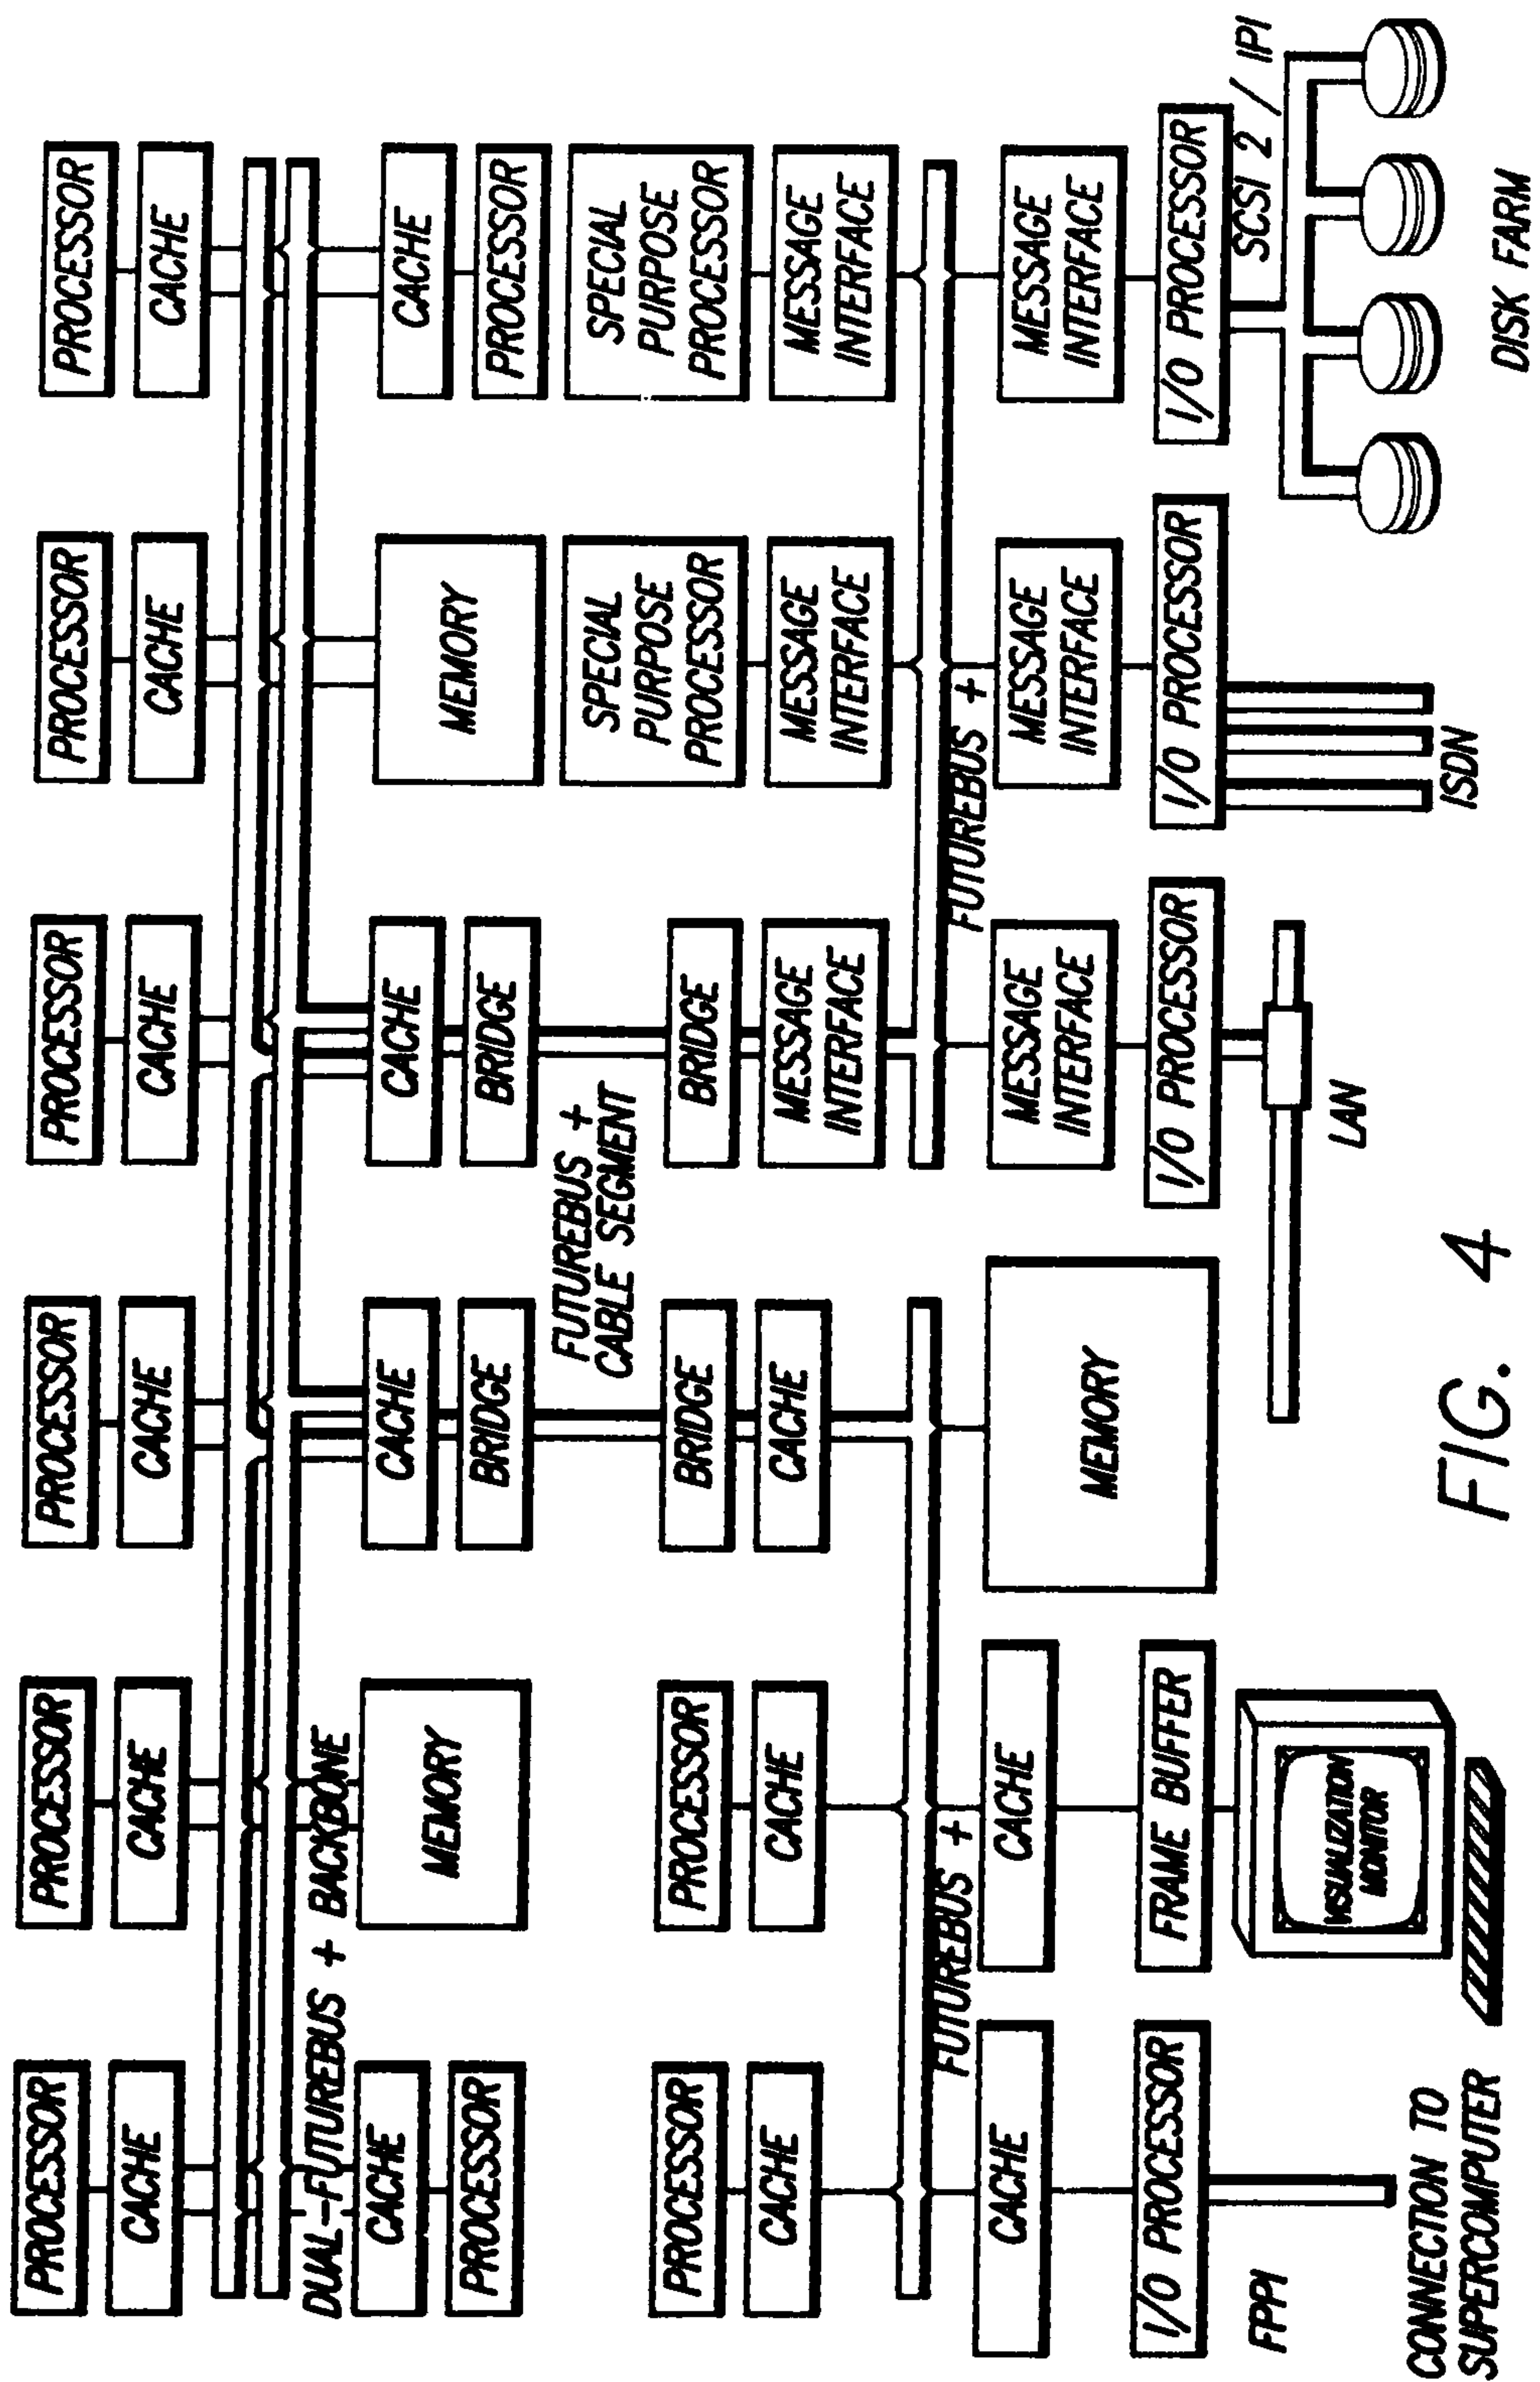

ISO OPEN SYSTEM INTERCONNECTION MODEL

LAYER 7	APPLICATION	ALL USER APPLICATION AND OPERATING SYSTEM FUNCTIONS
LAYER 6	PRESENTATION	DATA FORMAT CONVERSION
LAYER 5	SESSION	ESTABLISHMENT, MAINTENANCE, AND RELEASE OF END-TO-END DATA TRANSFER STATION
LAYER 4	TRANSPORT	RELIABLE TRANSMISSION OF MESSAGES USING ACKNOWLEDGMENTS, AND FRAGMENTING MESSAGES INTO PACKETS ACCORDING TO MAXIMUM TRANSMIT UNIT SIZE
LAYER 3	NETWORK	ROUTING OF PACKETS ON AN END-TO-END BASIS USING MULTIPLE POINT-TO-POINT DATA LINK CONNECTIONS
LAYER 2	DATA LINK	ADDRESSING AND TRANSMISSION OF PACKETS ON A POINT-TO-POINT BASIS
LAYER 1	PHYSICAL	ELECTRONIC ENCODING, DECODING AND TRANSMISSION OF BITS, INCLUDING ERROR DETECTION

FIG. 5

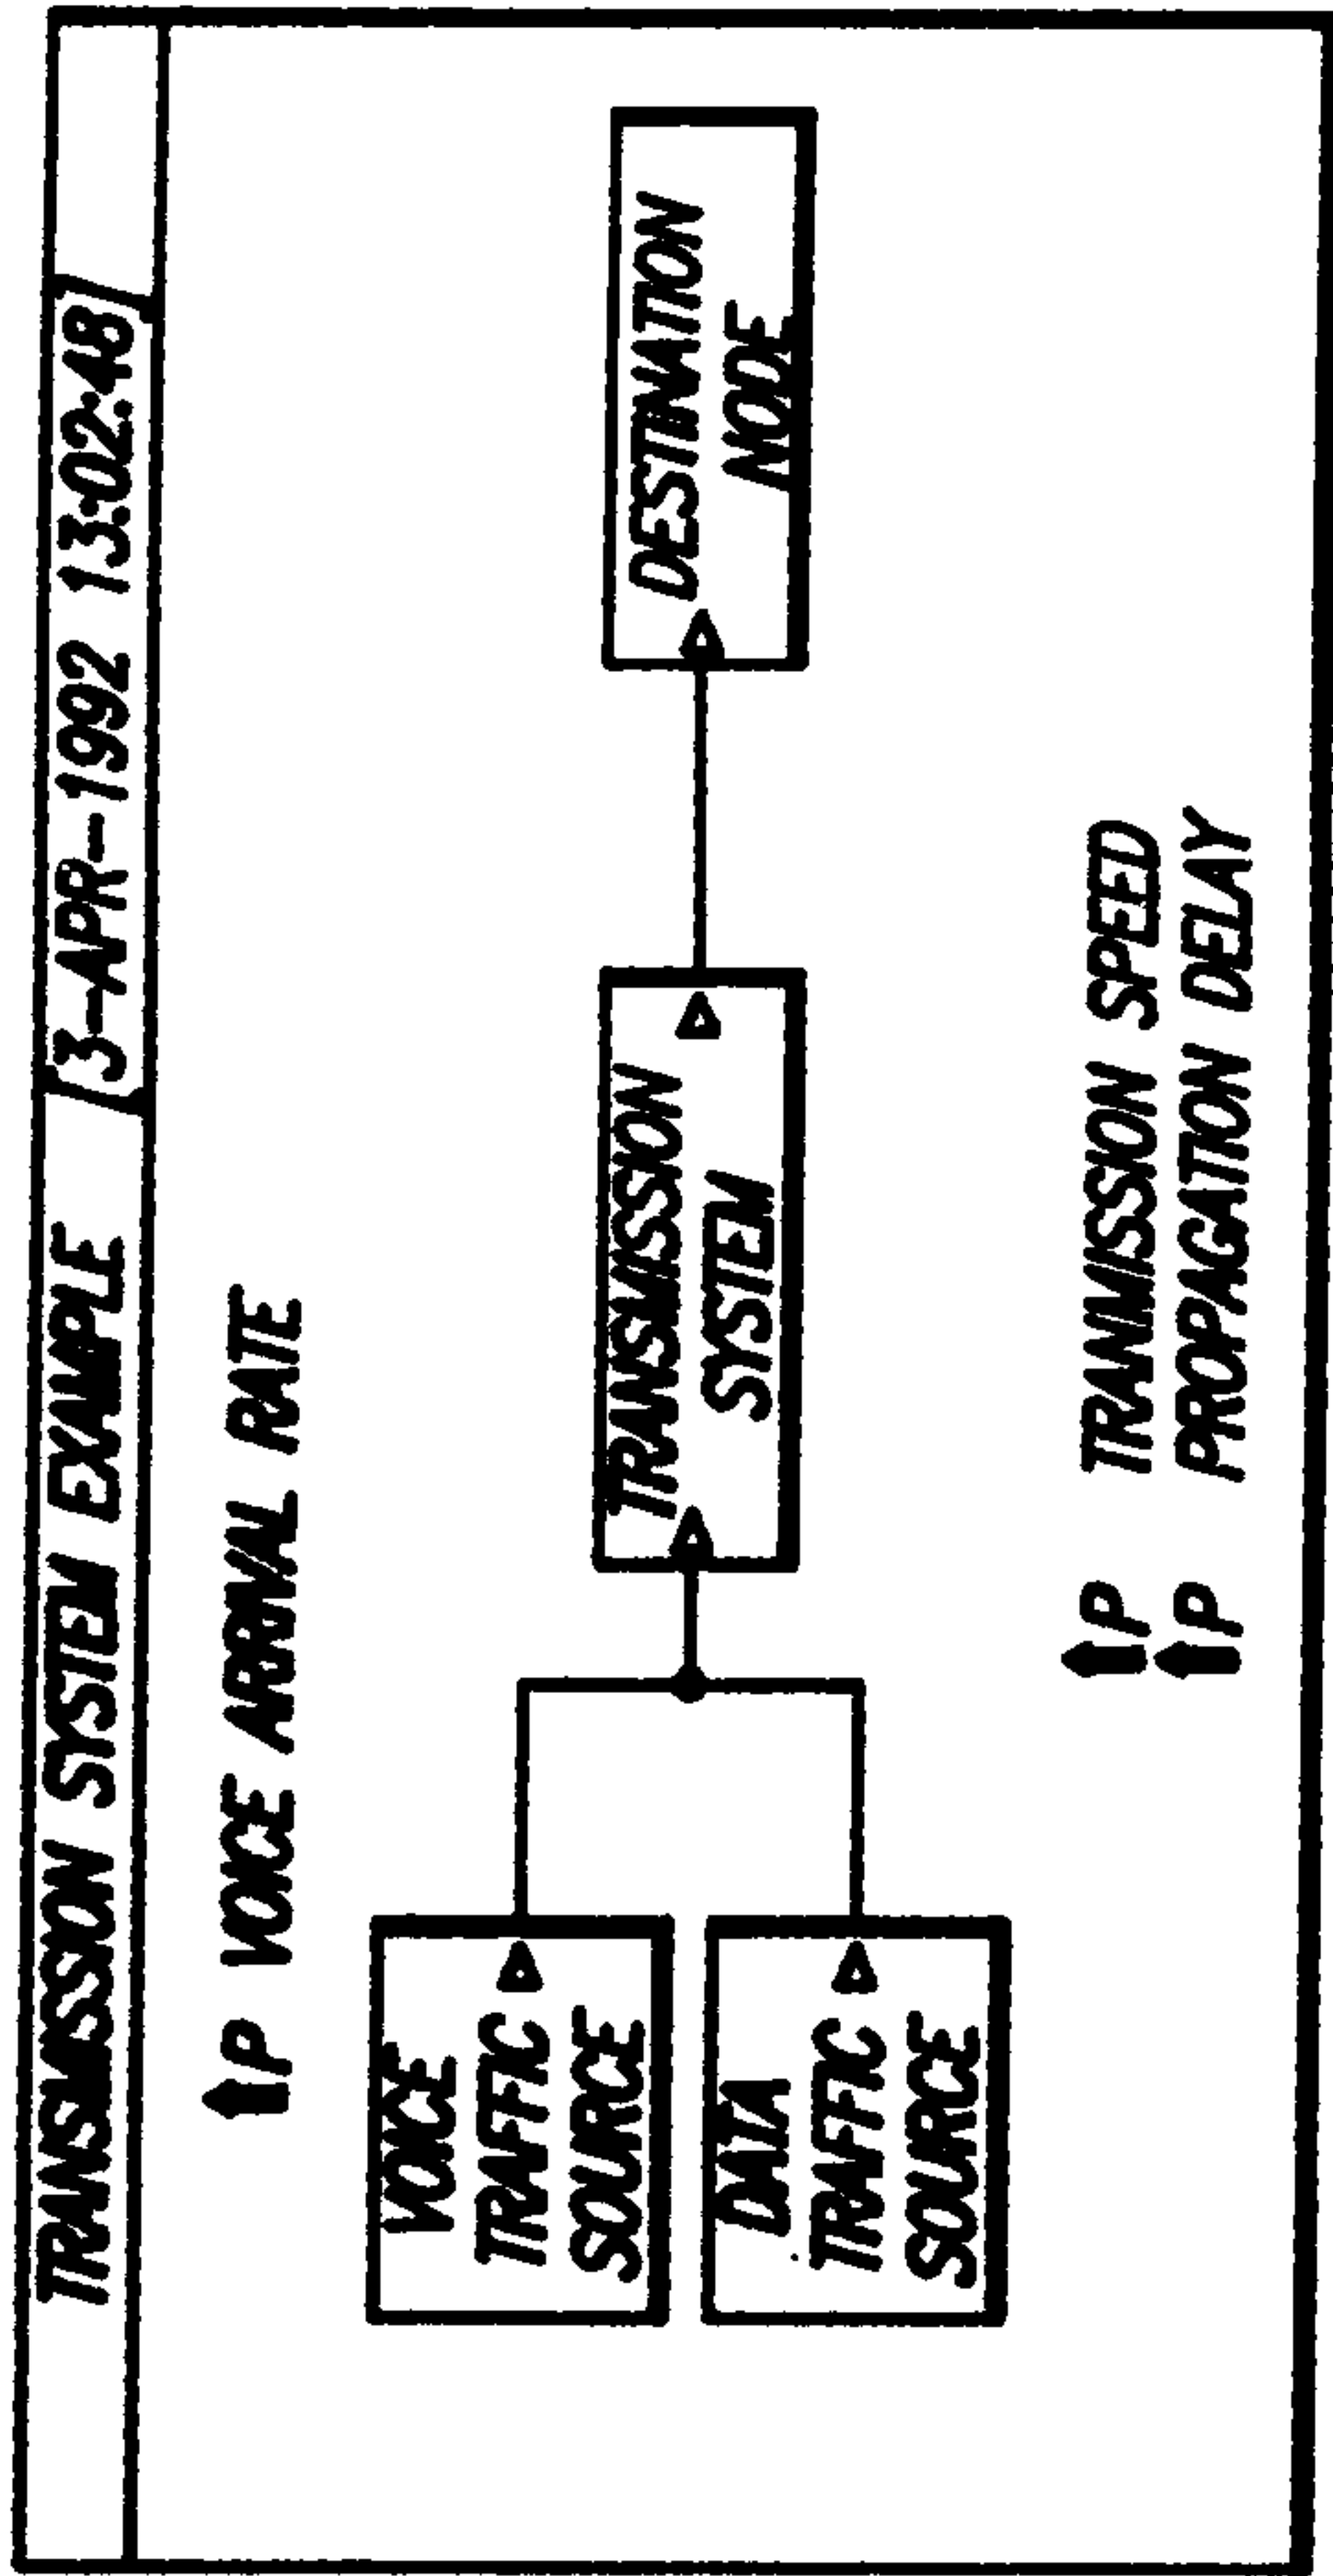


FIG. 6(a)

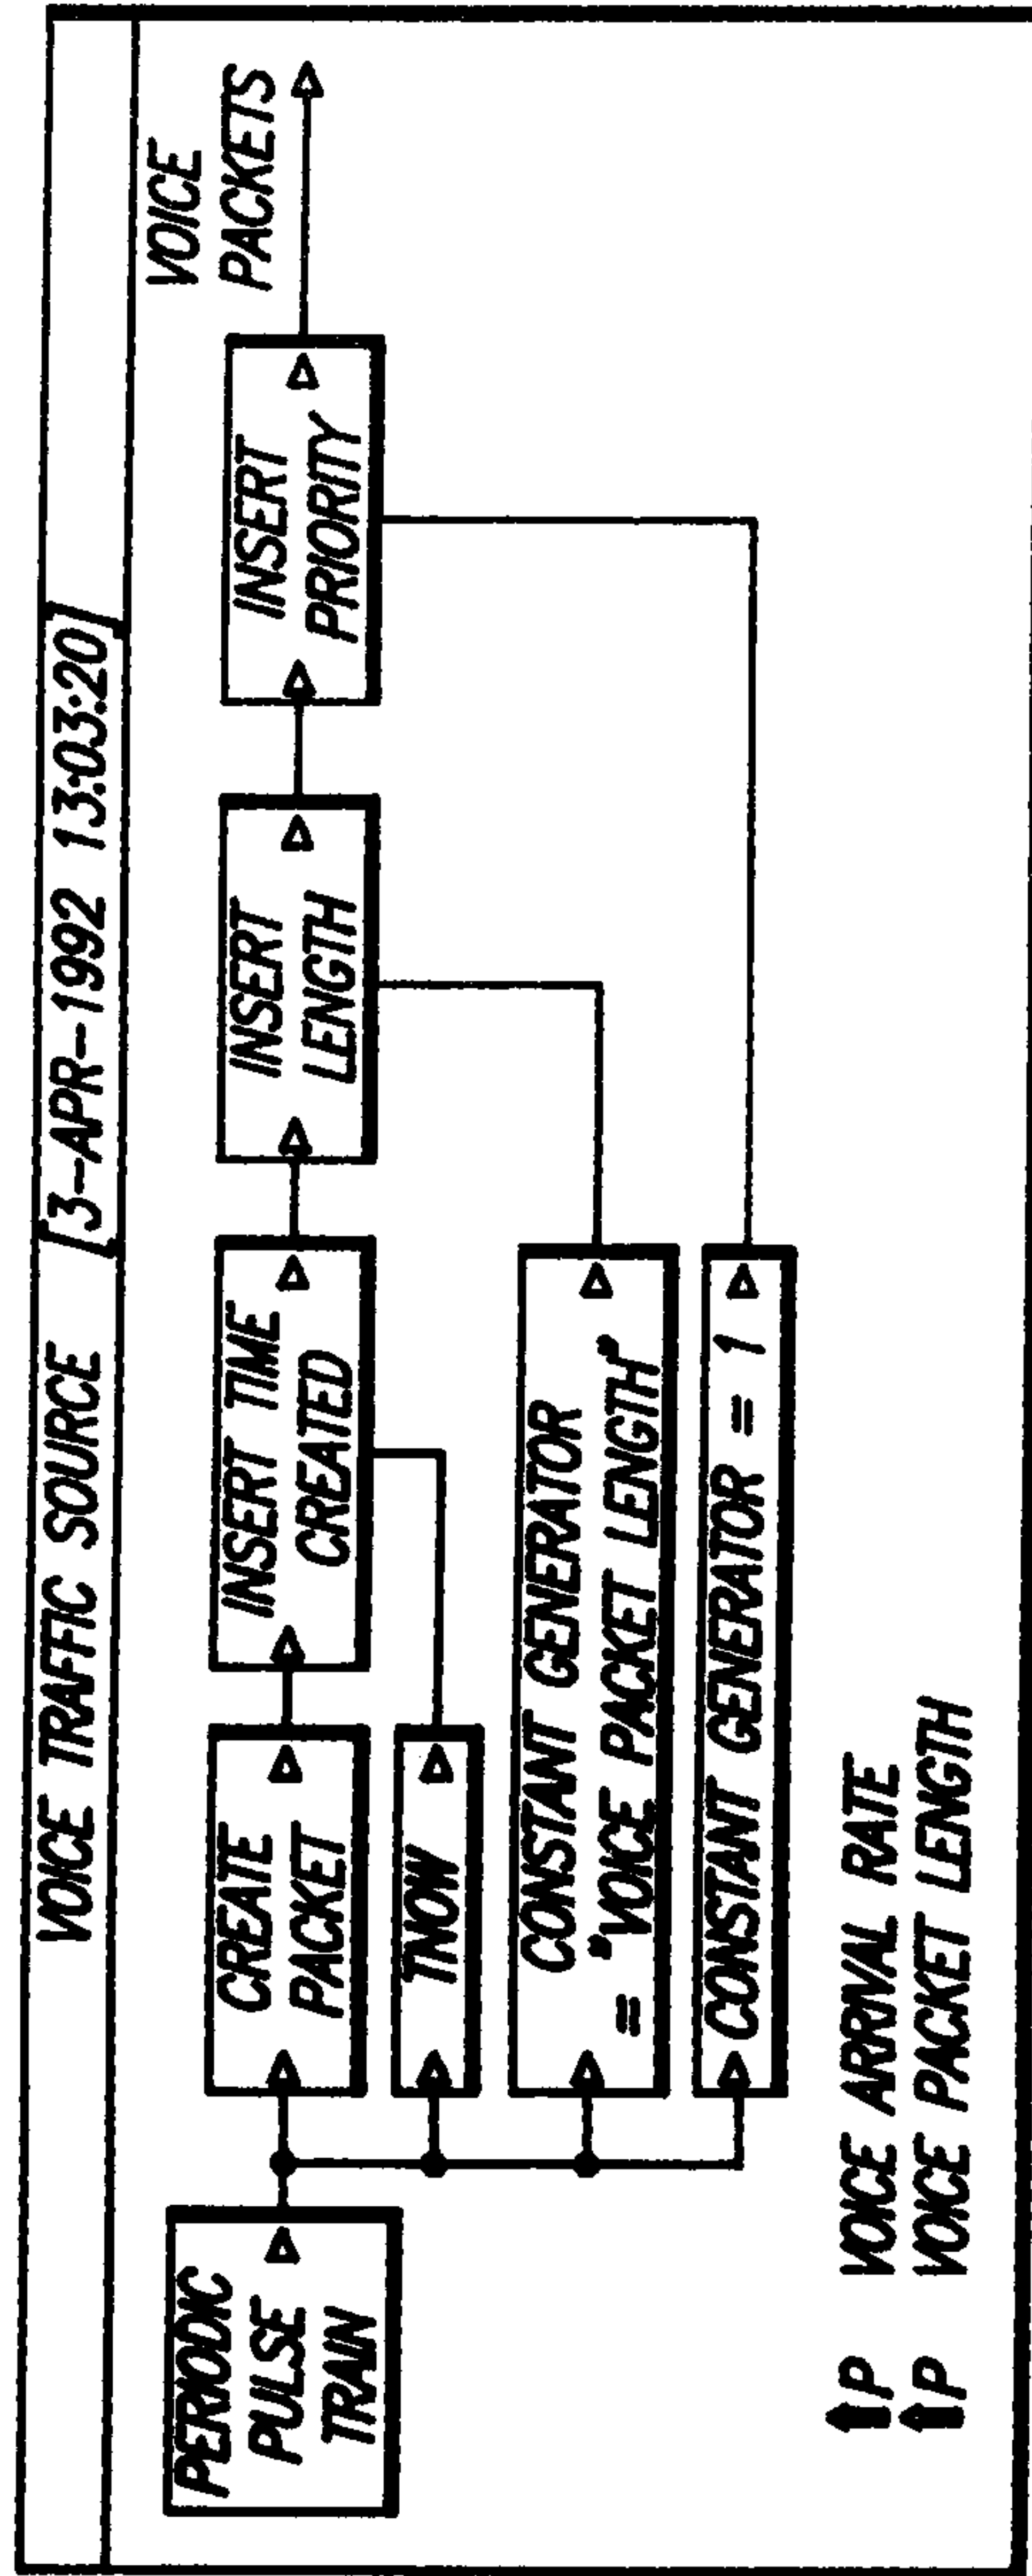


FIG. 6(b)

FIG. 6(c)

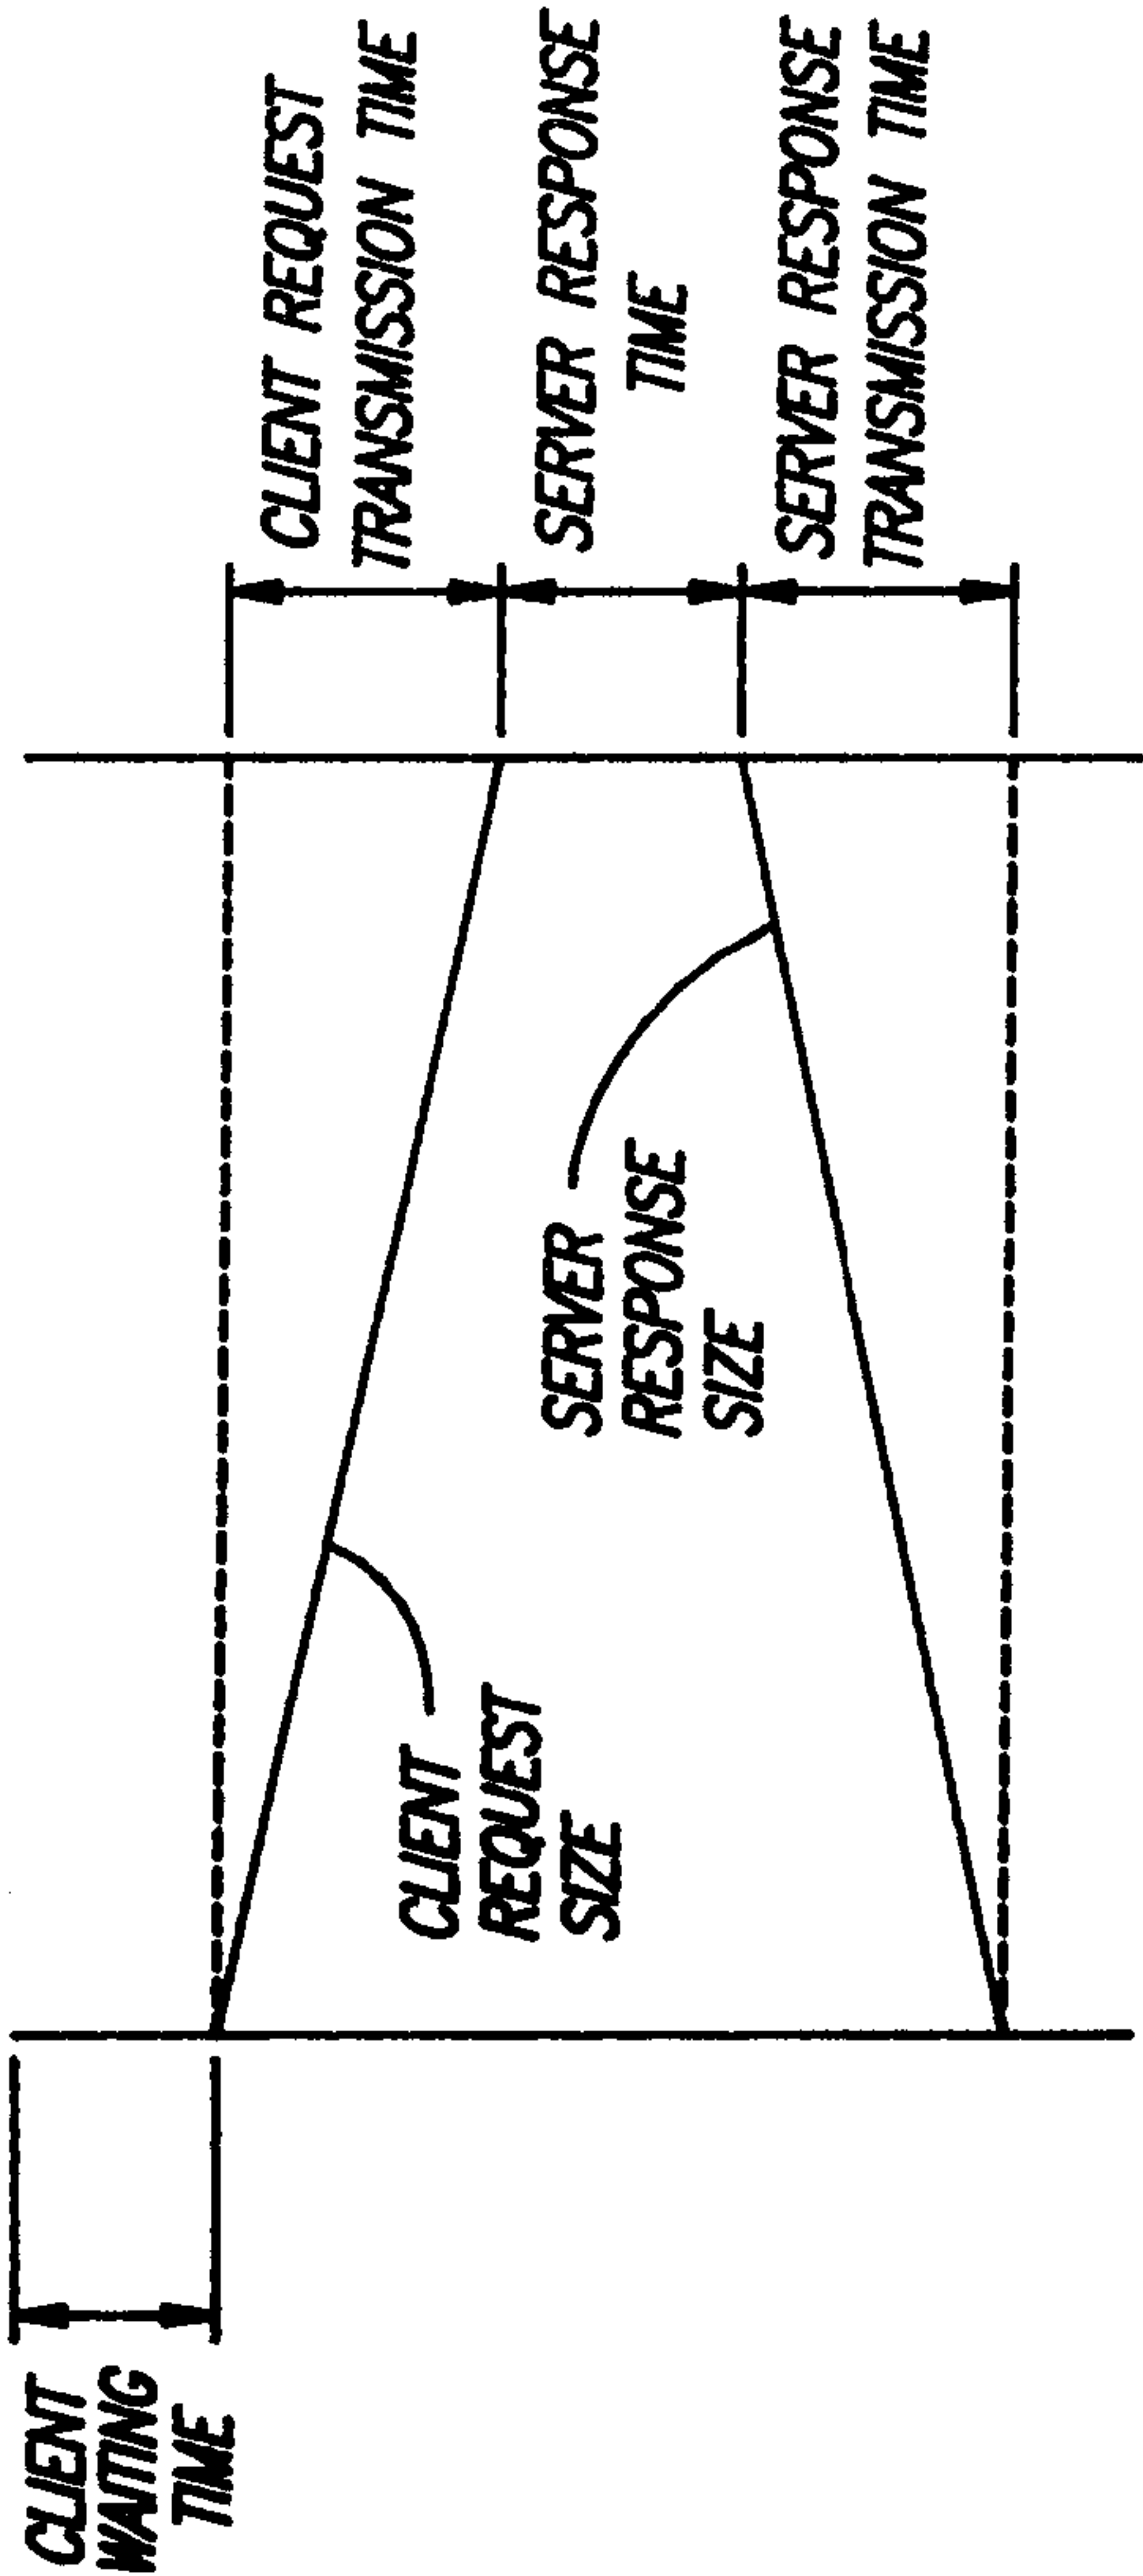
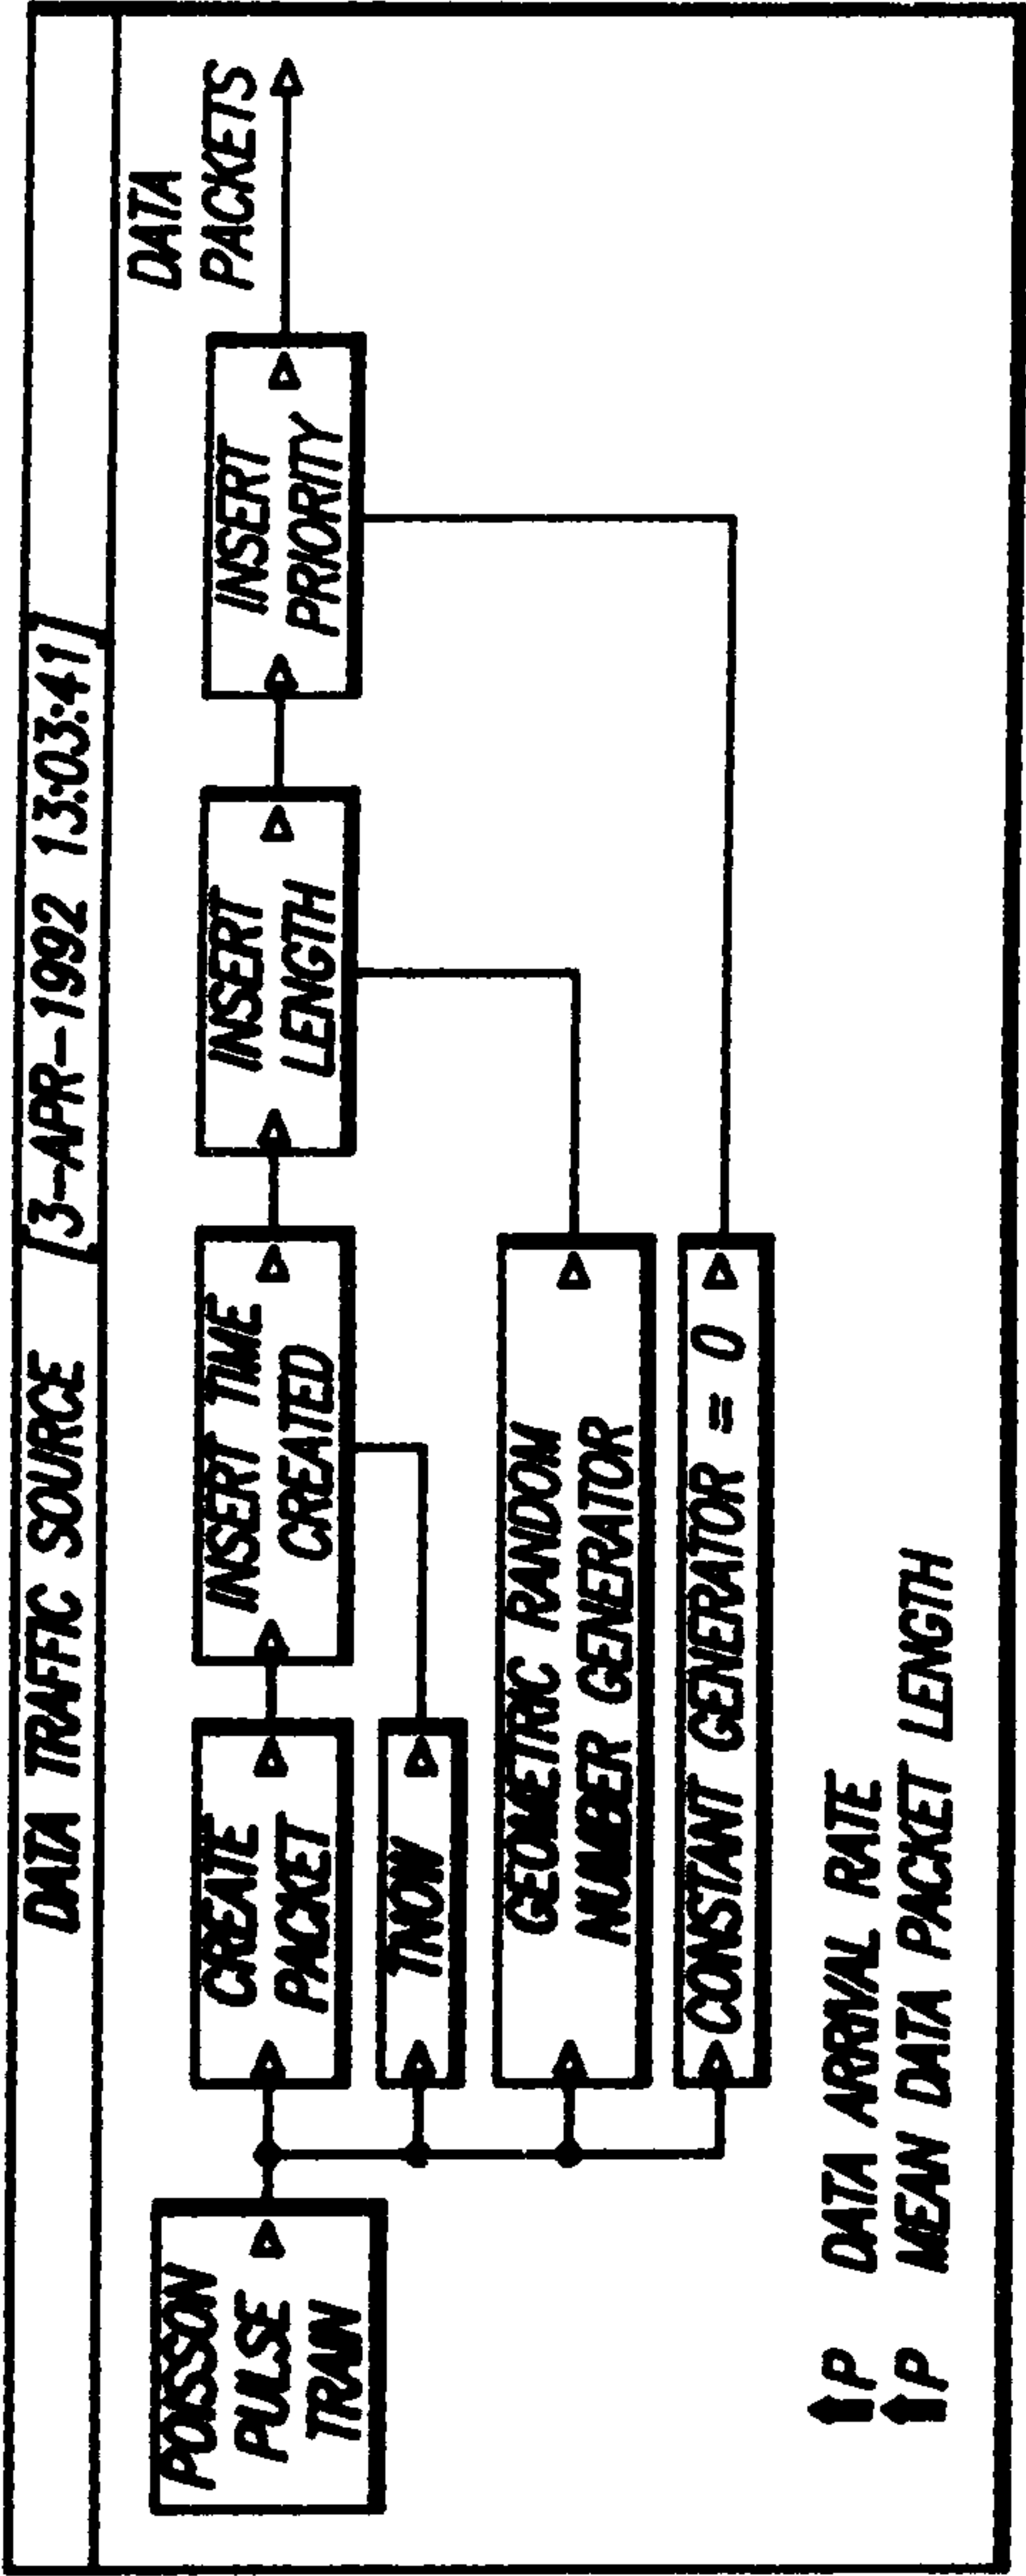
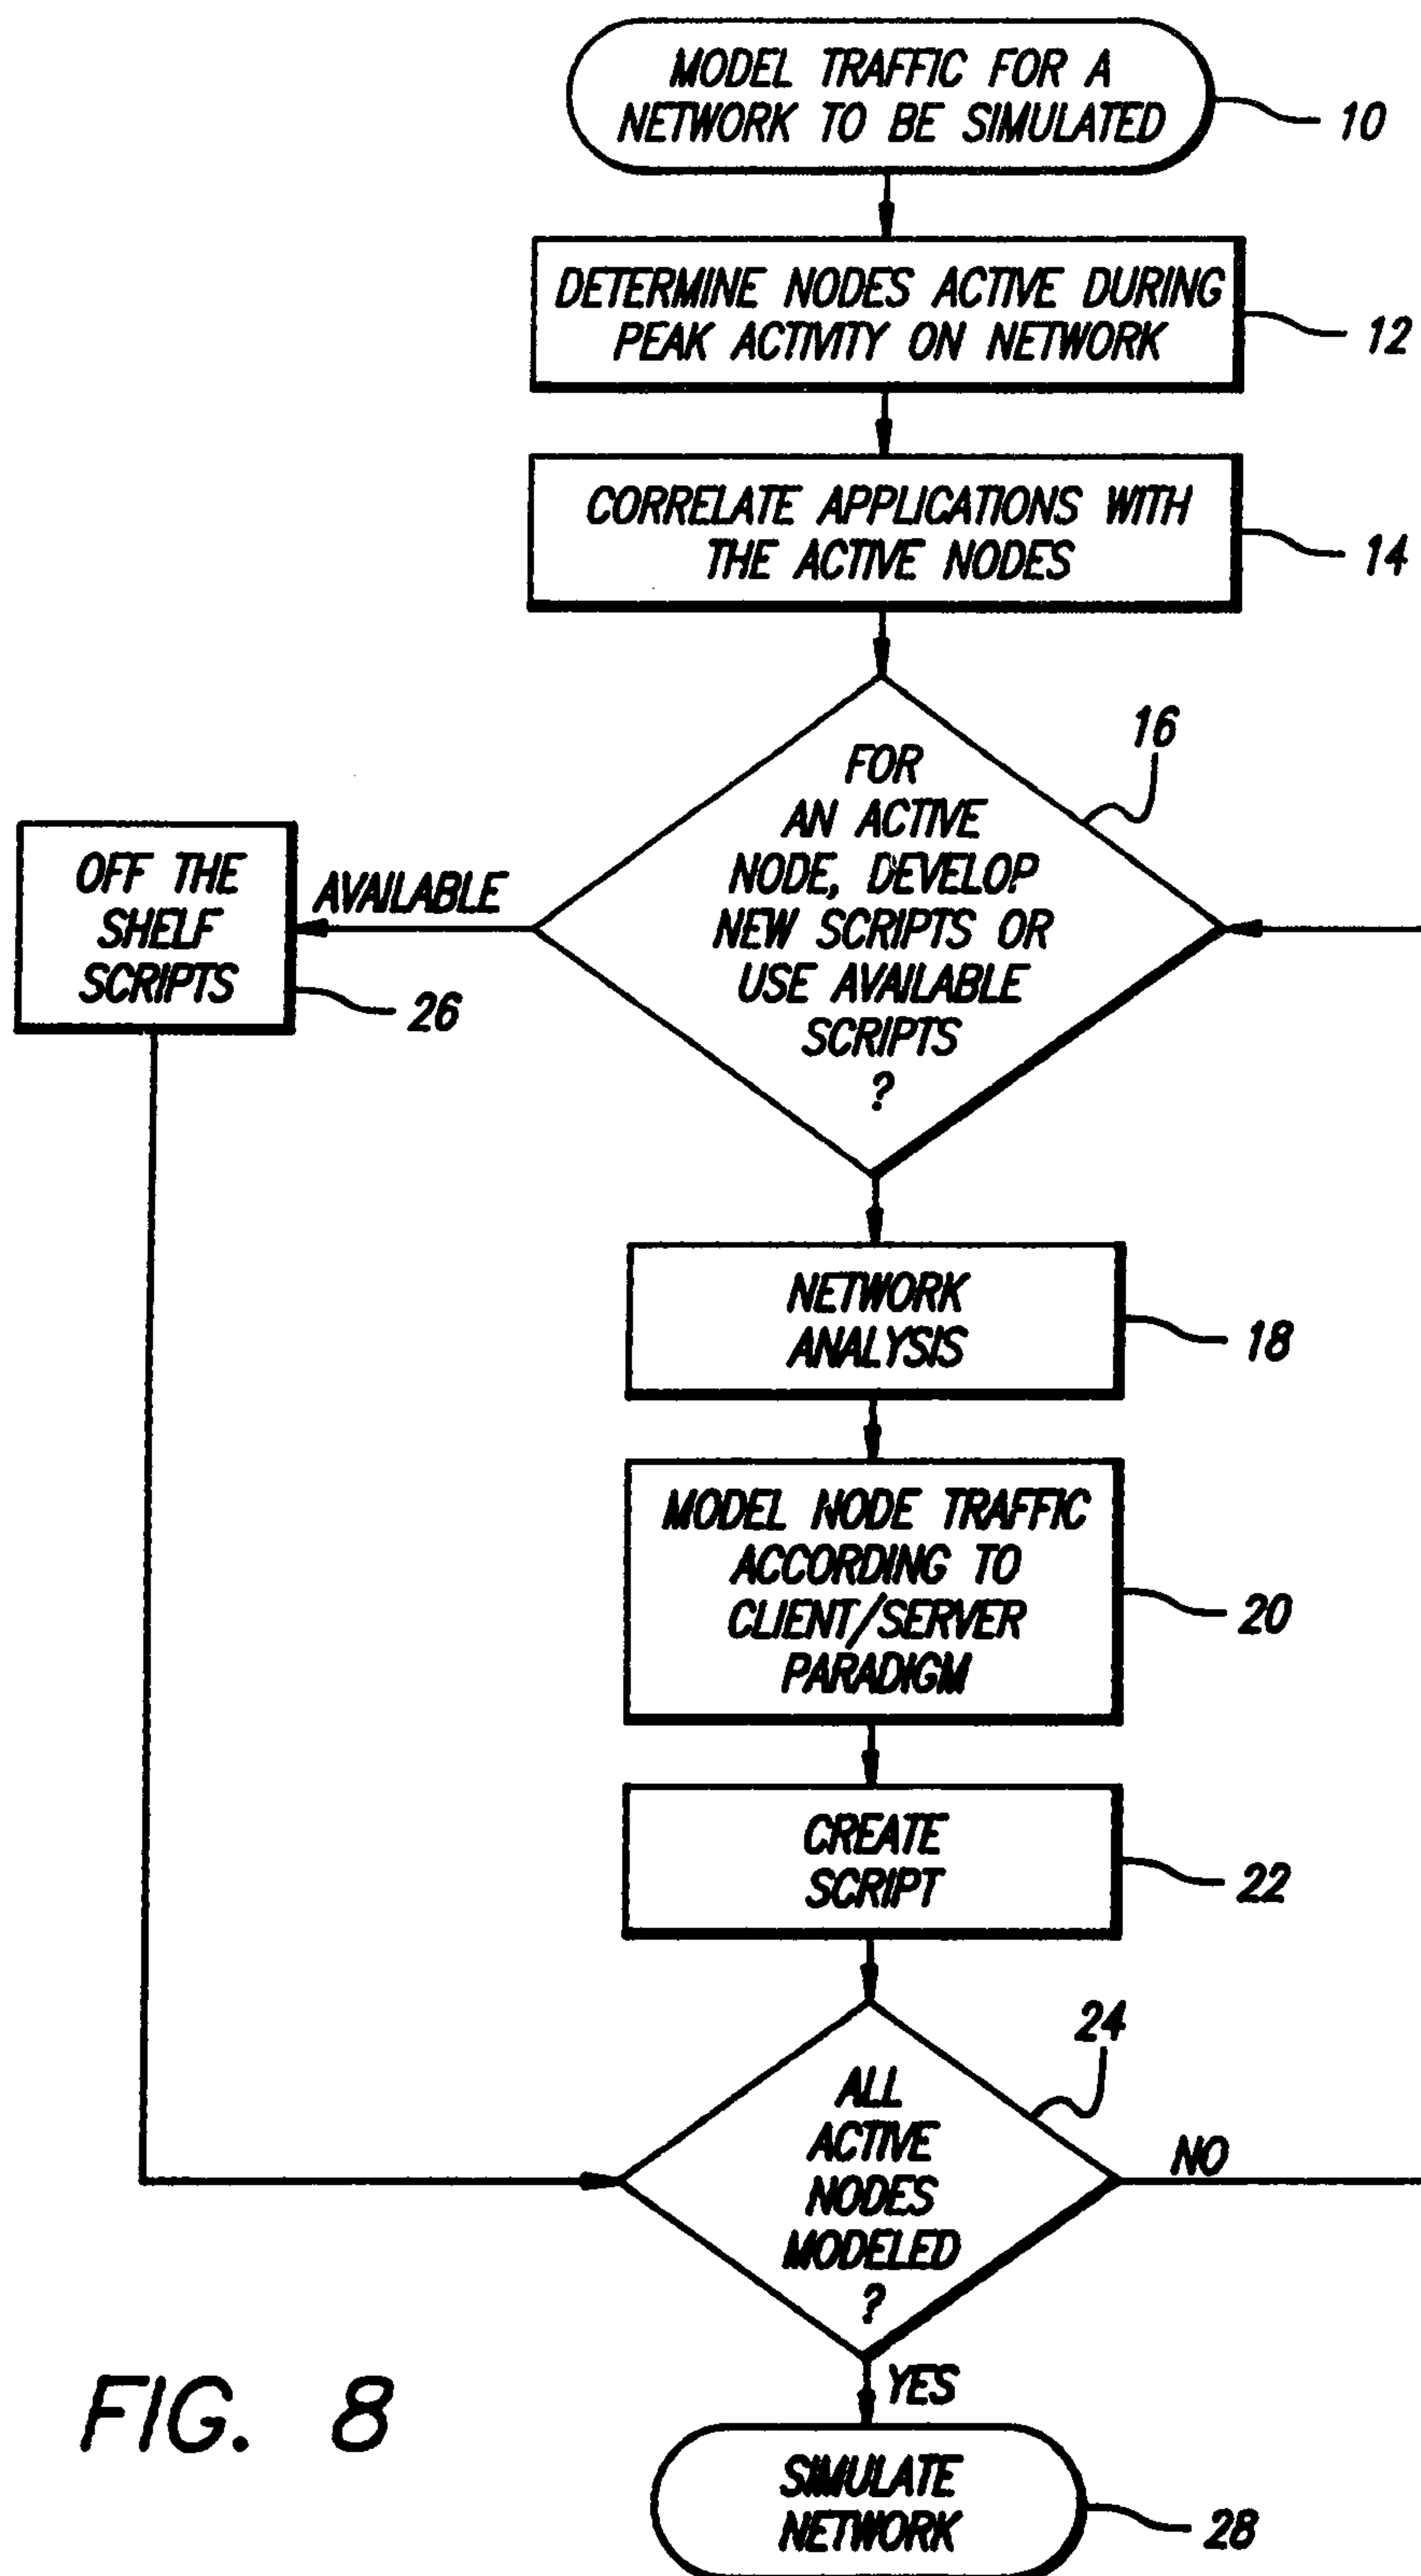


FIG. 7



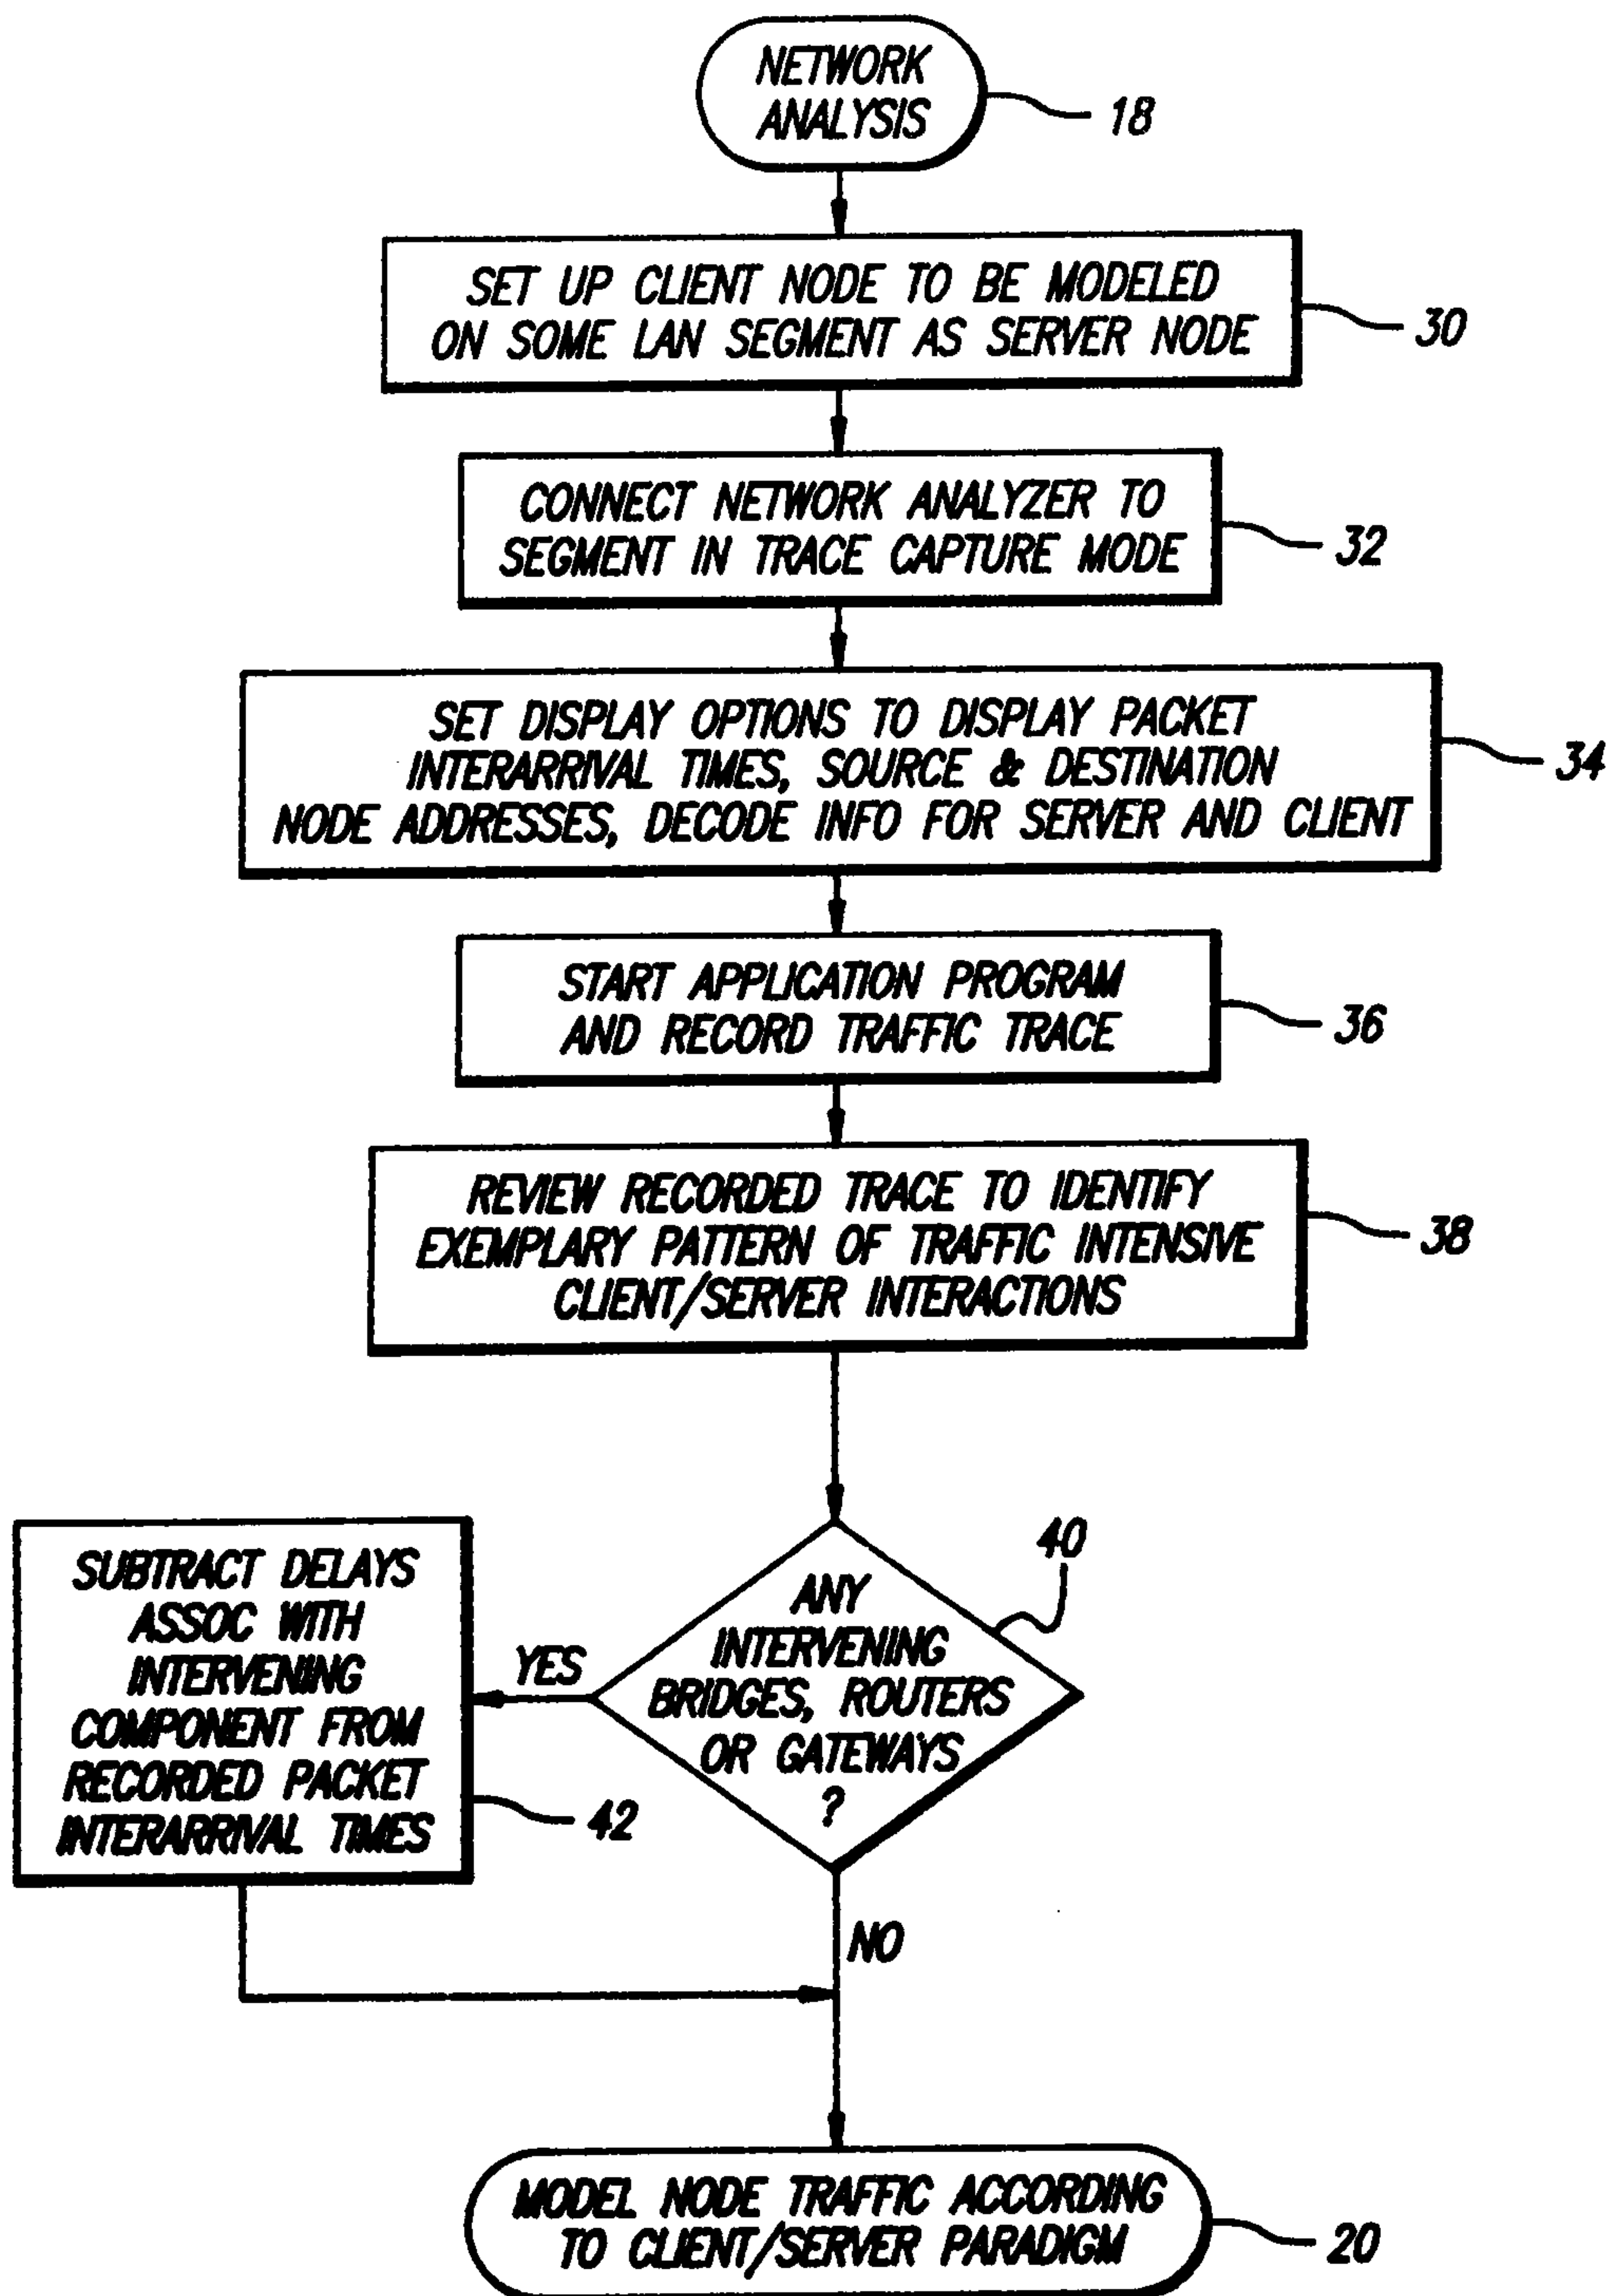


FIG. 9

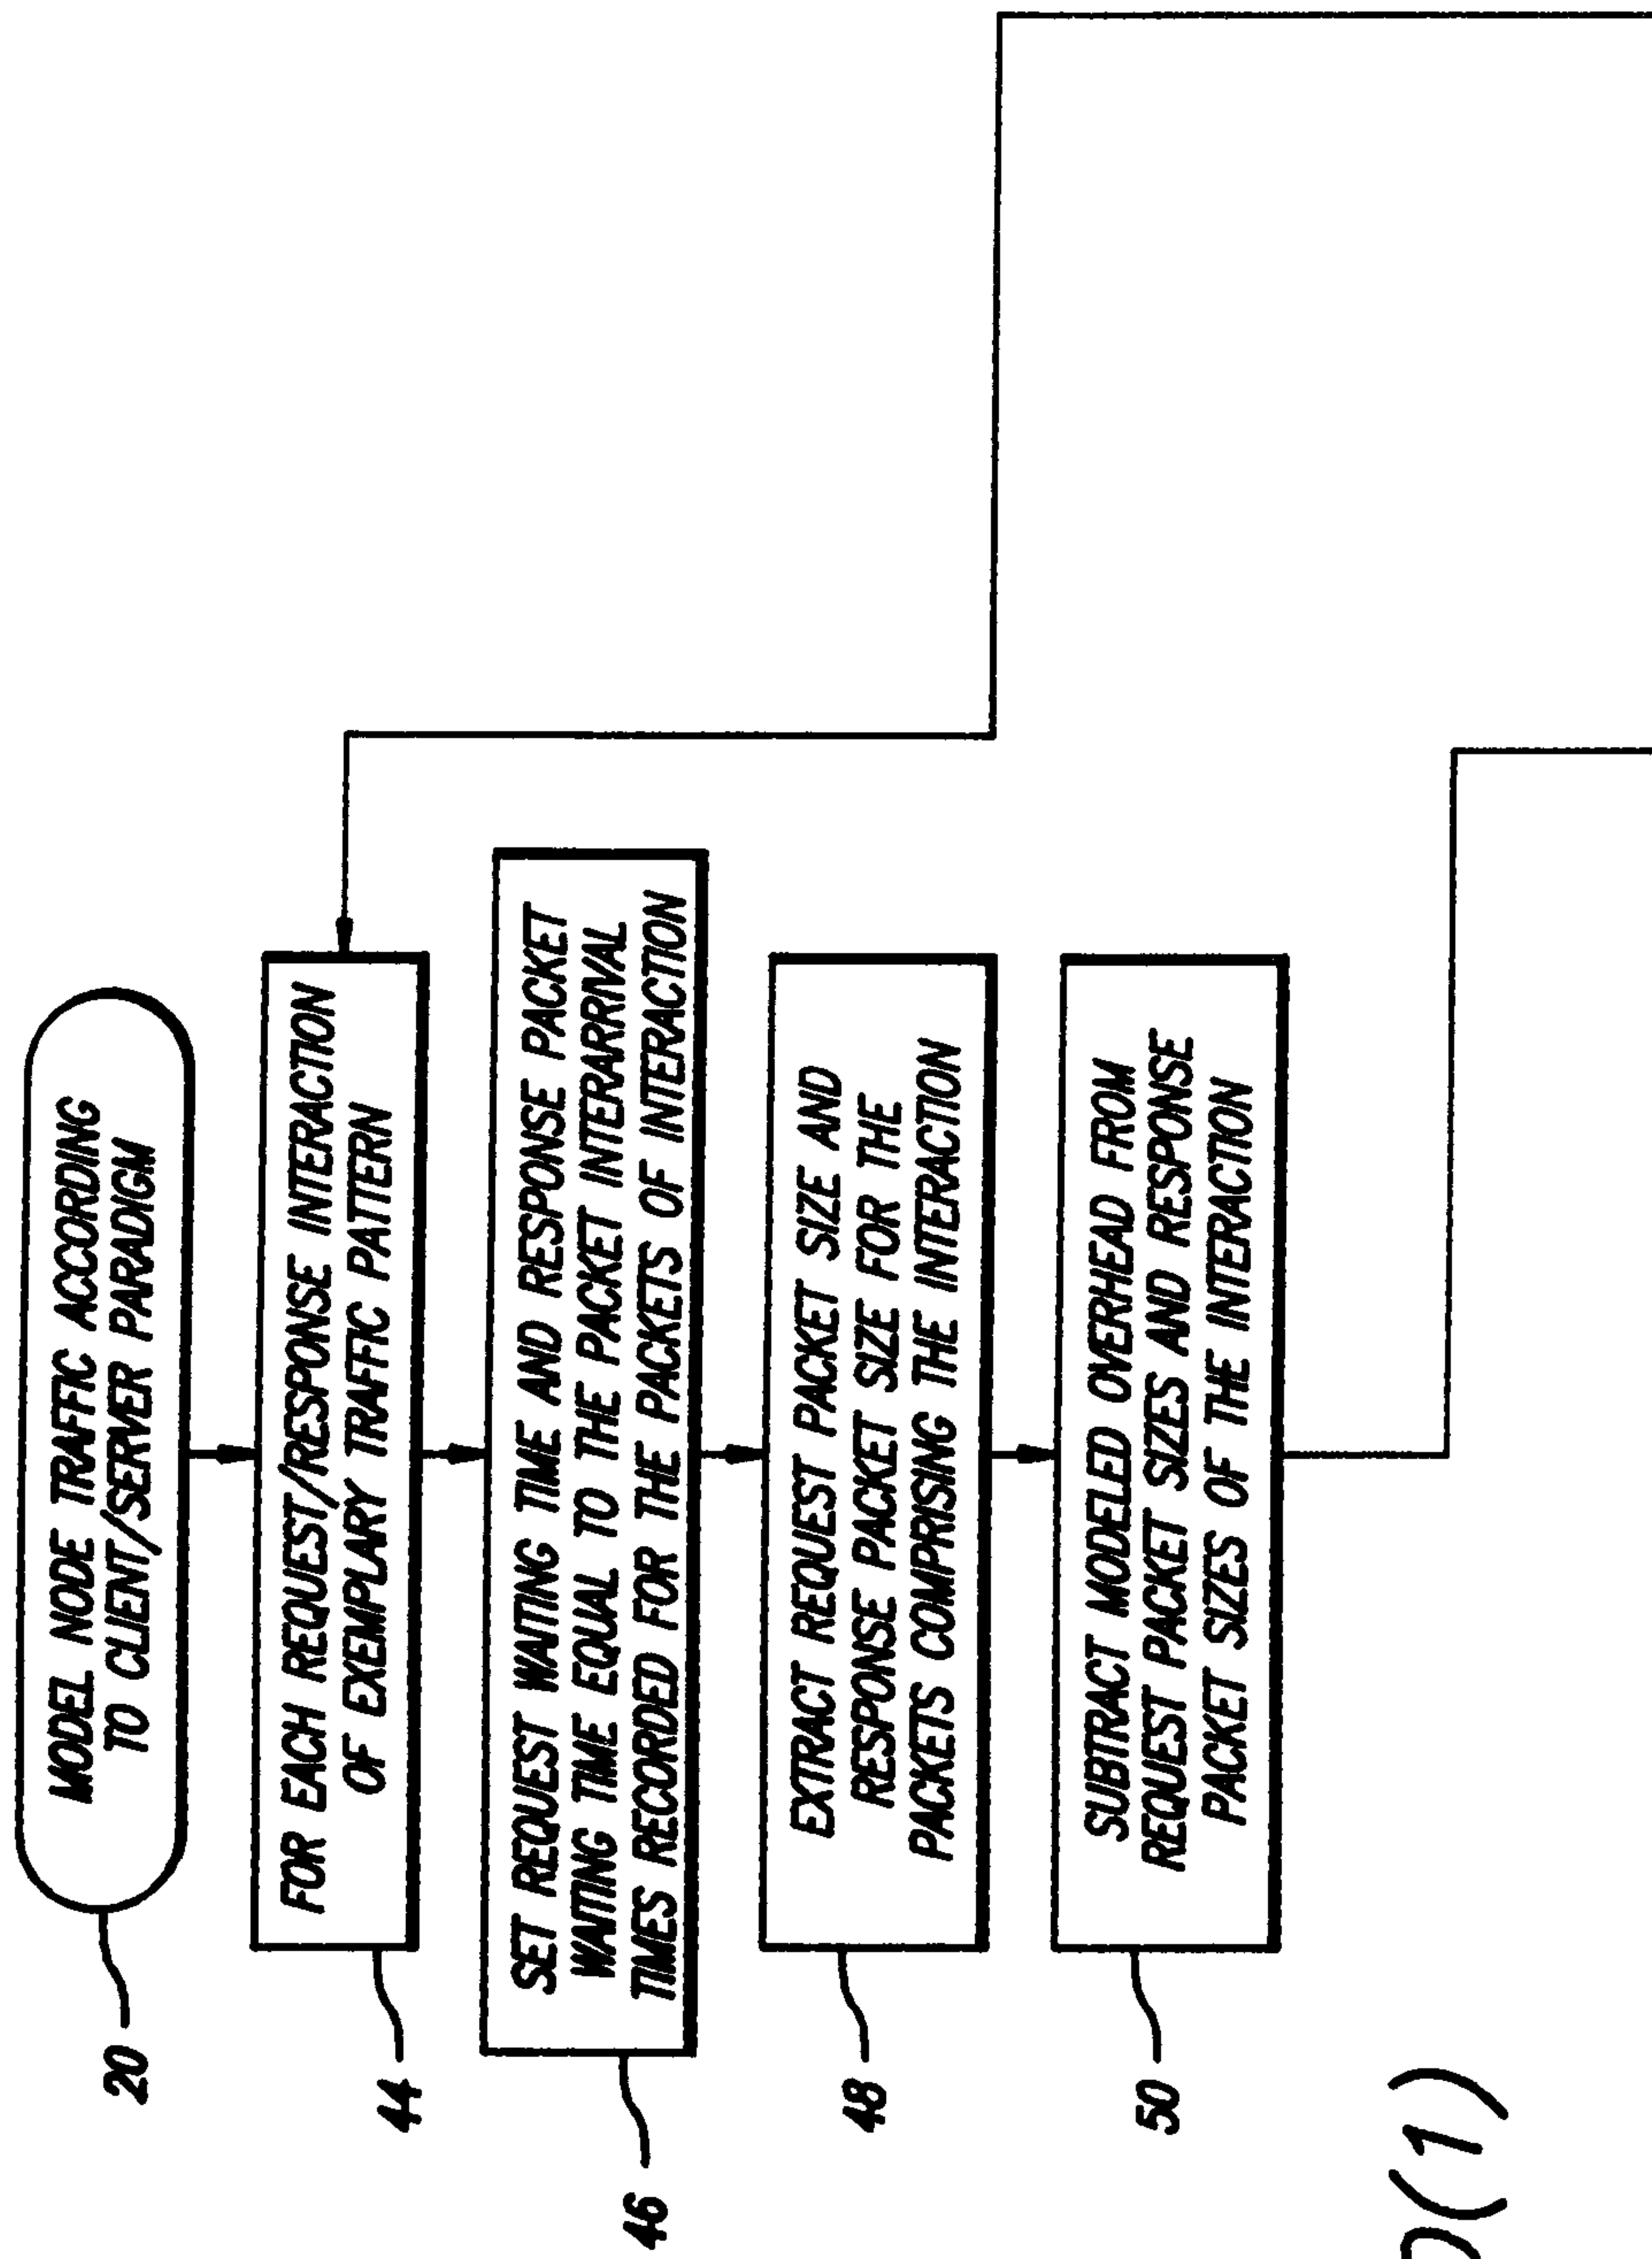
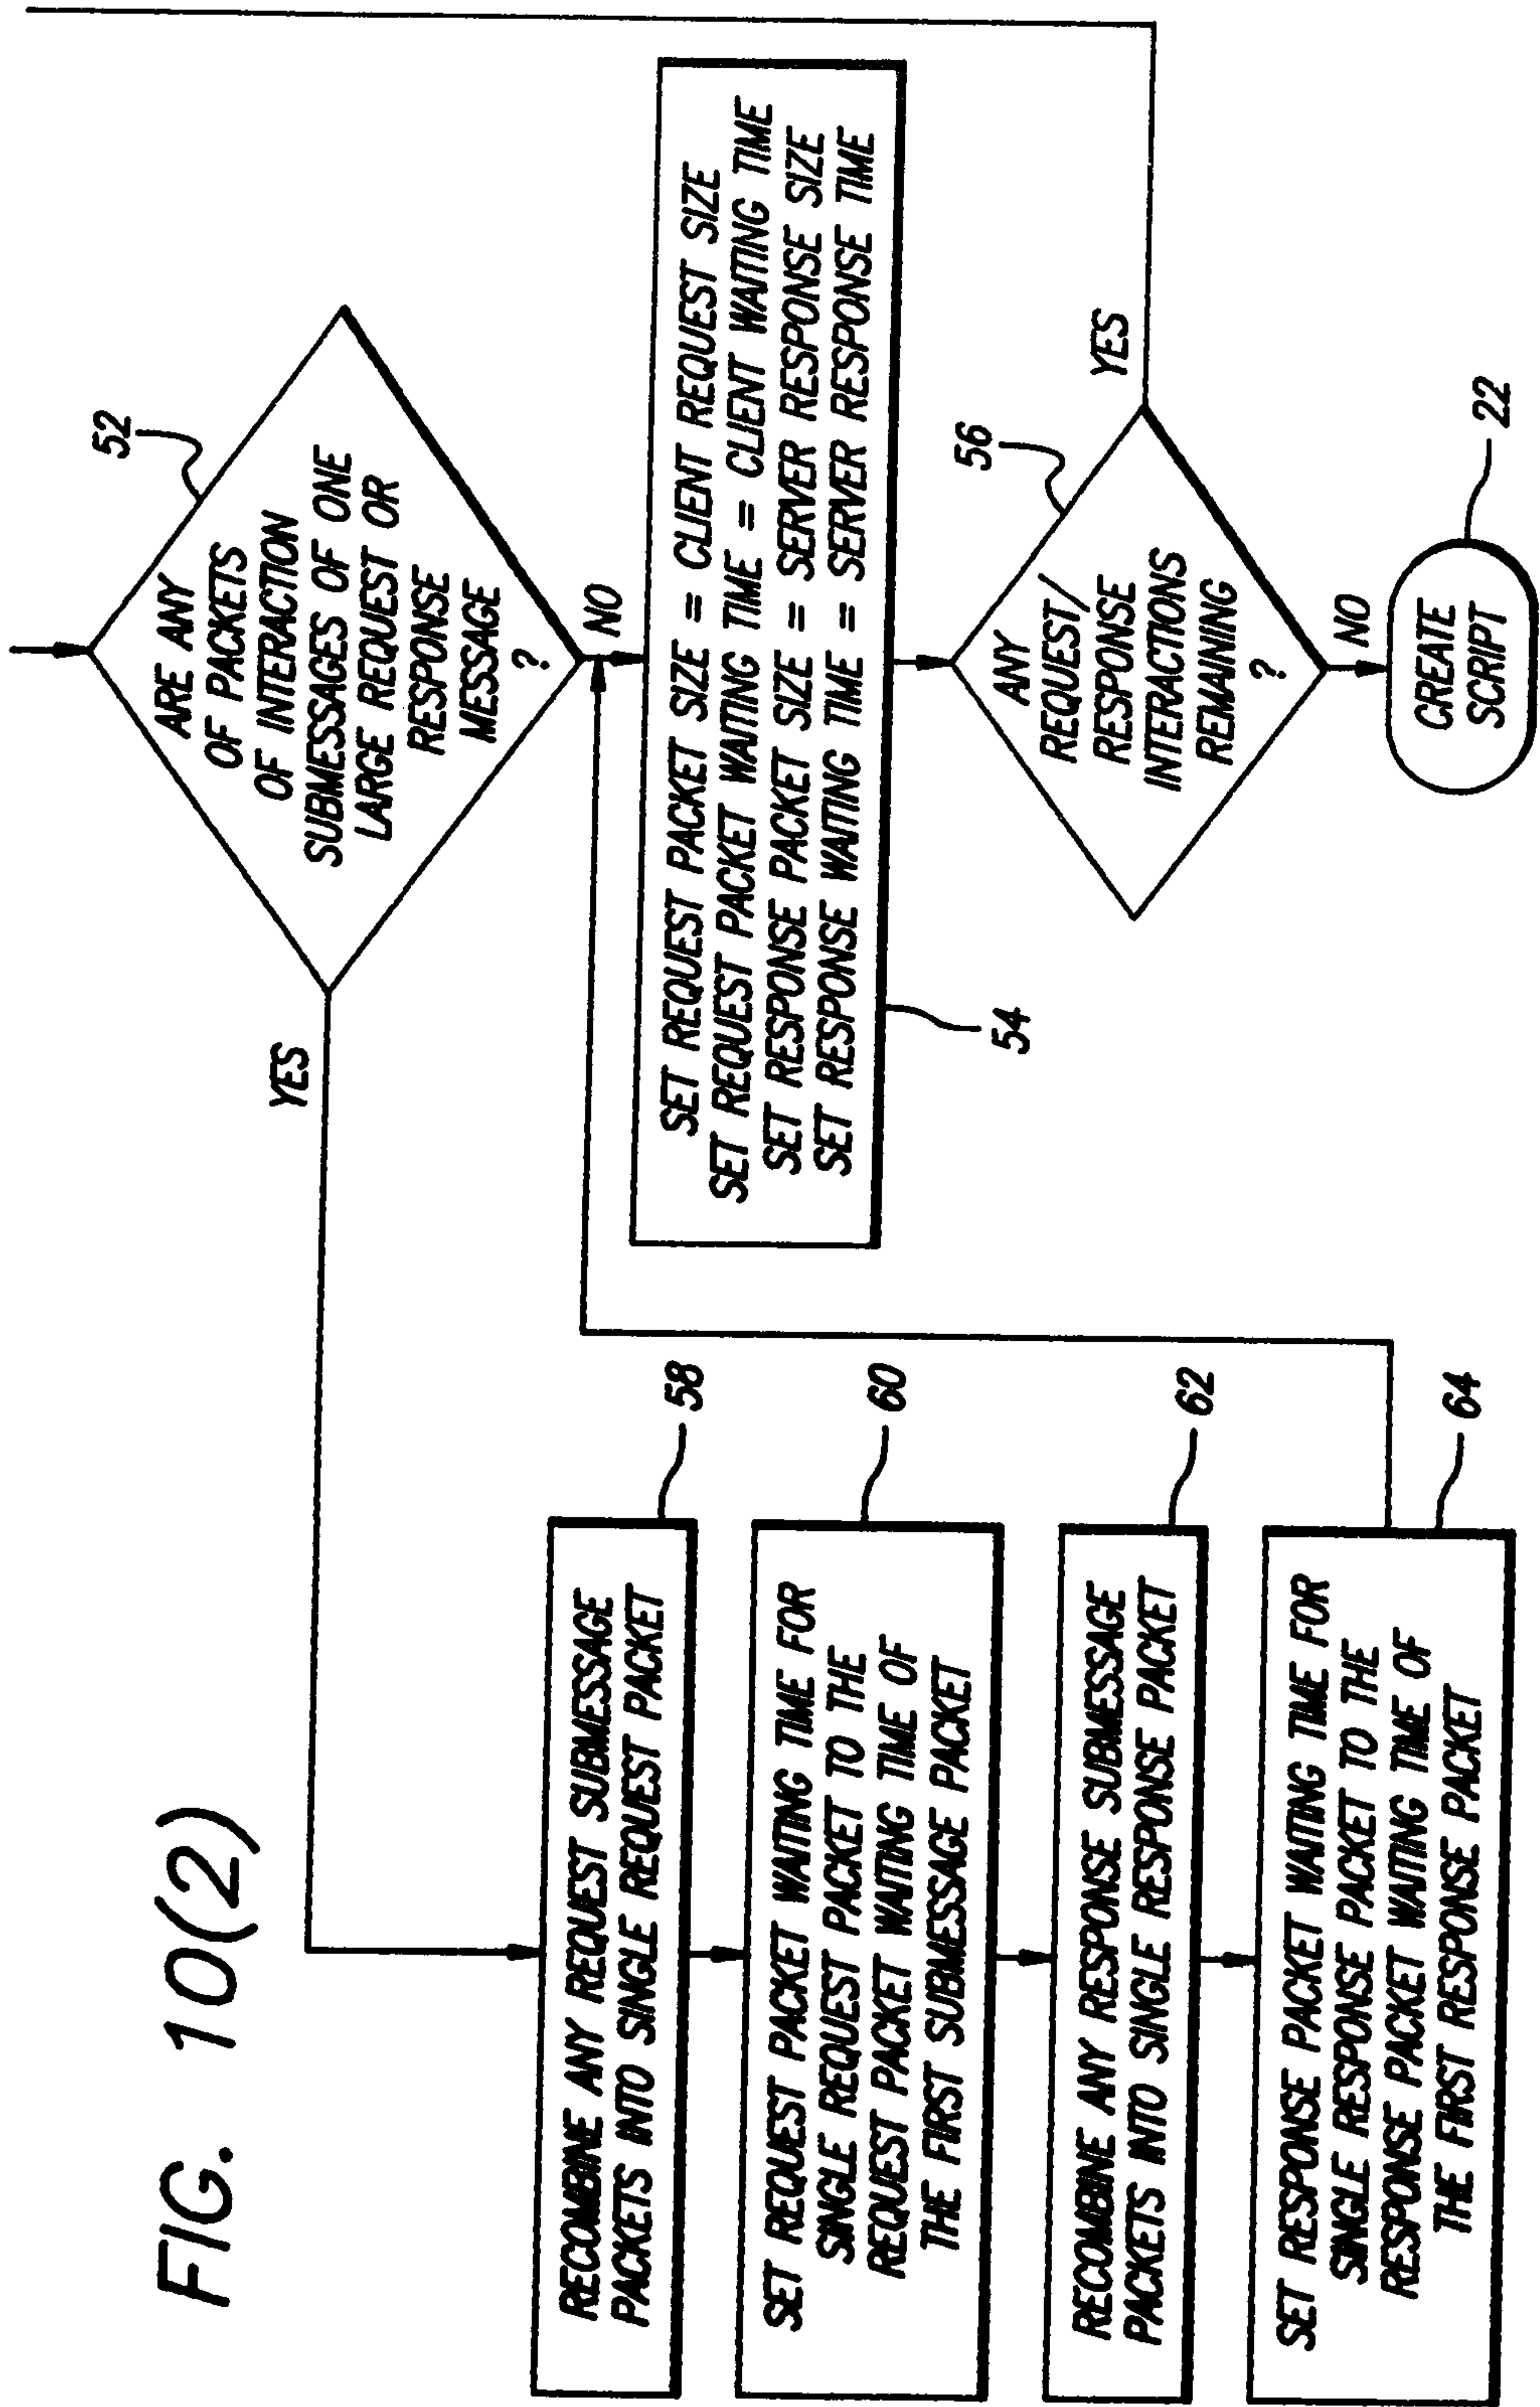


FIG. 10(1)





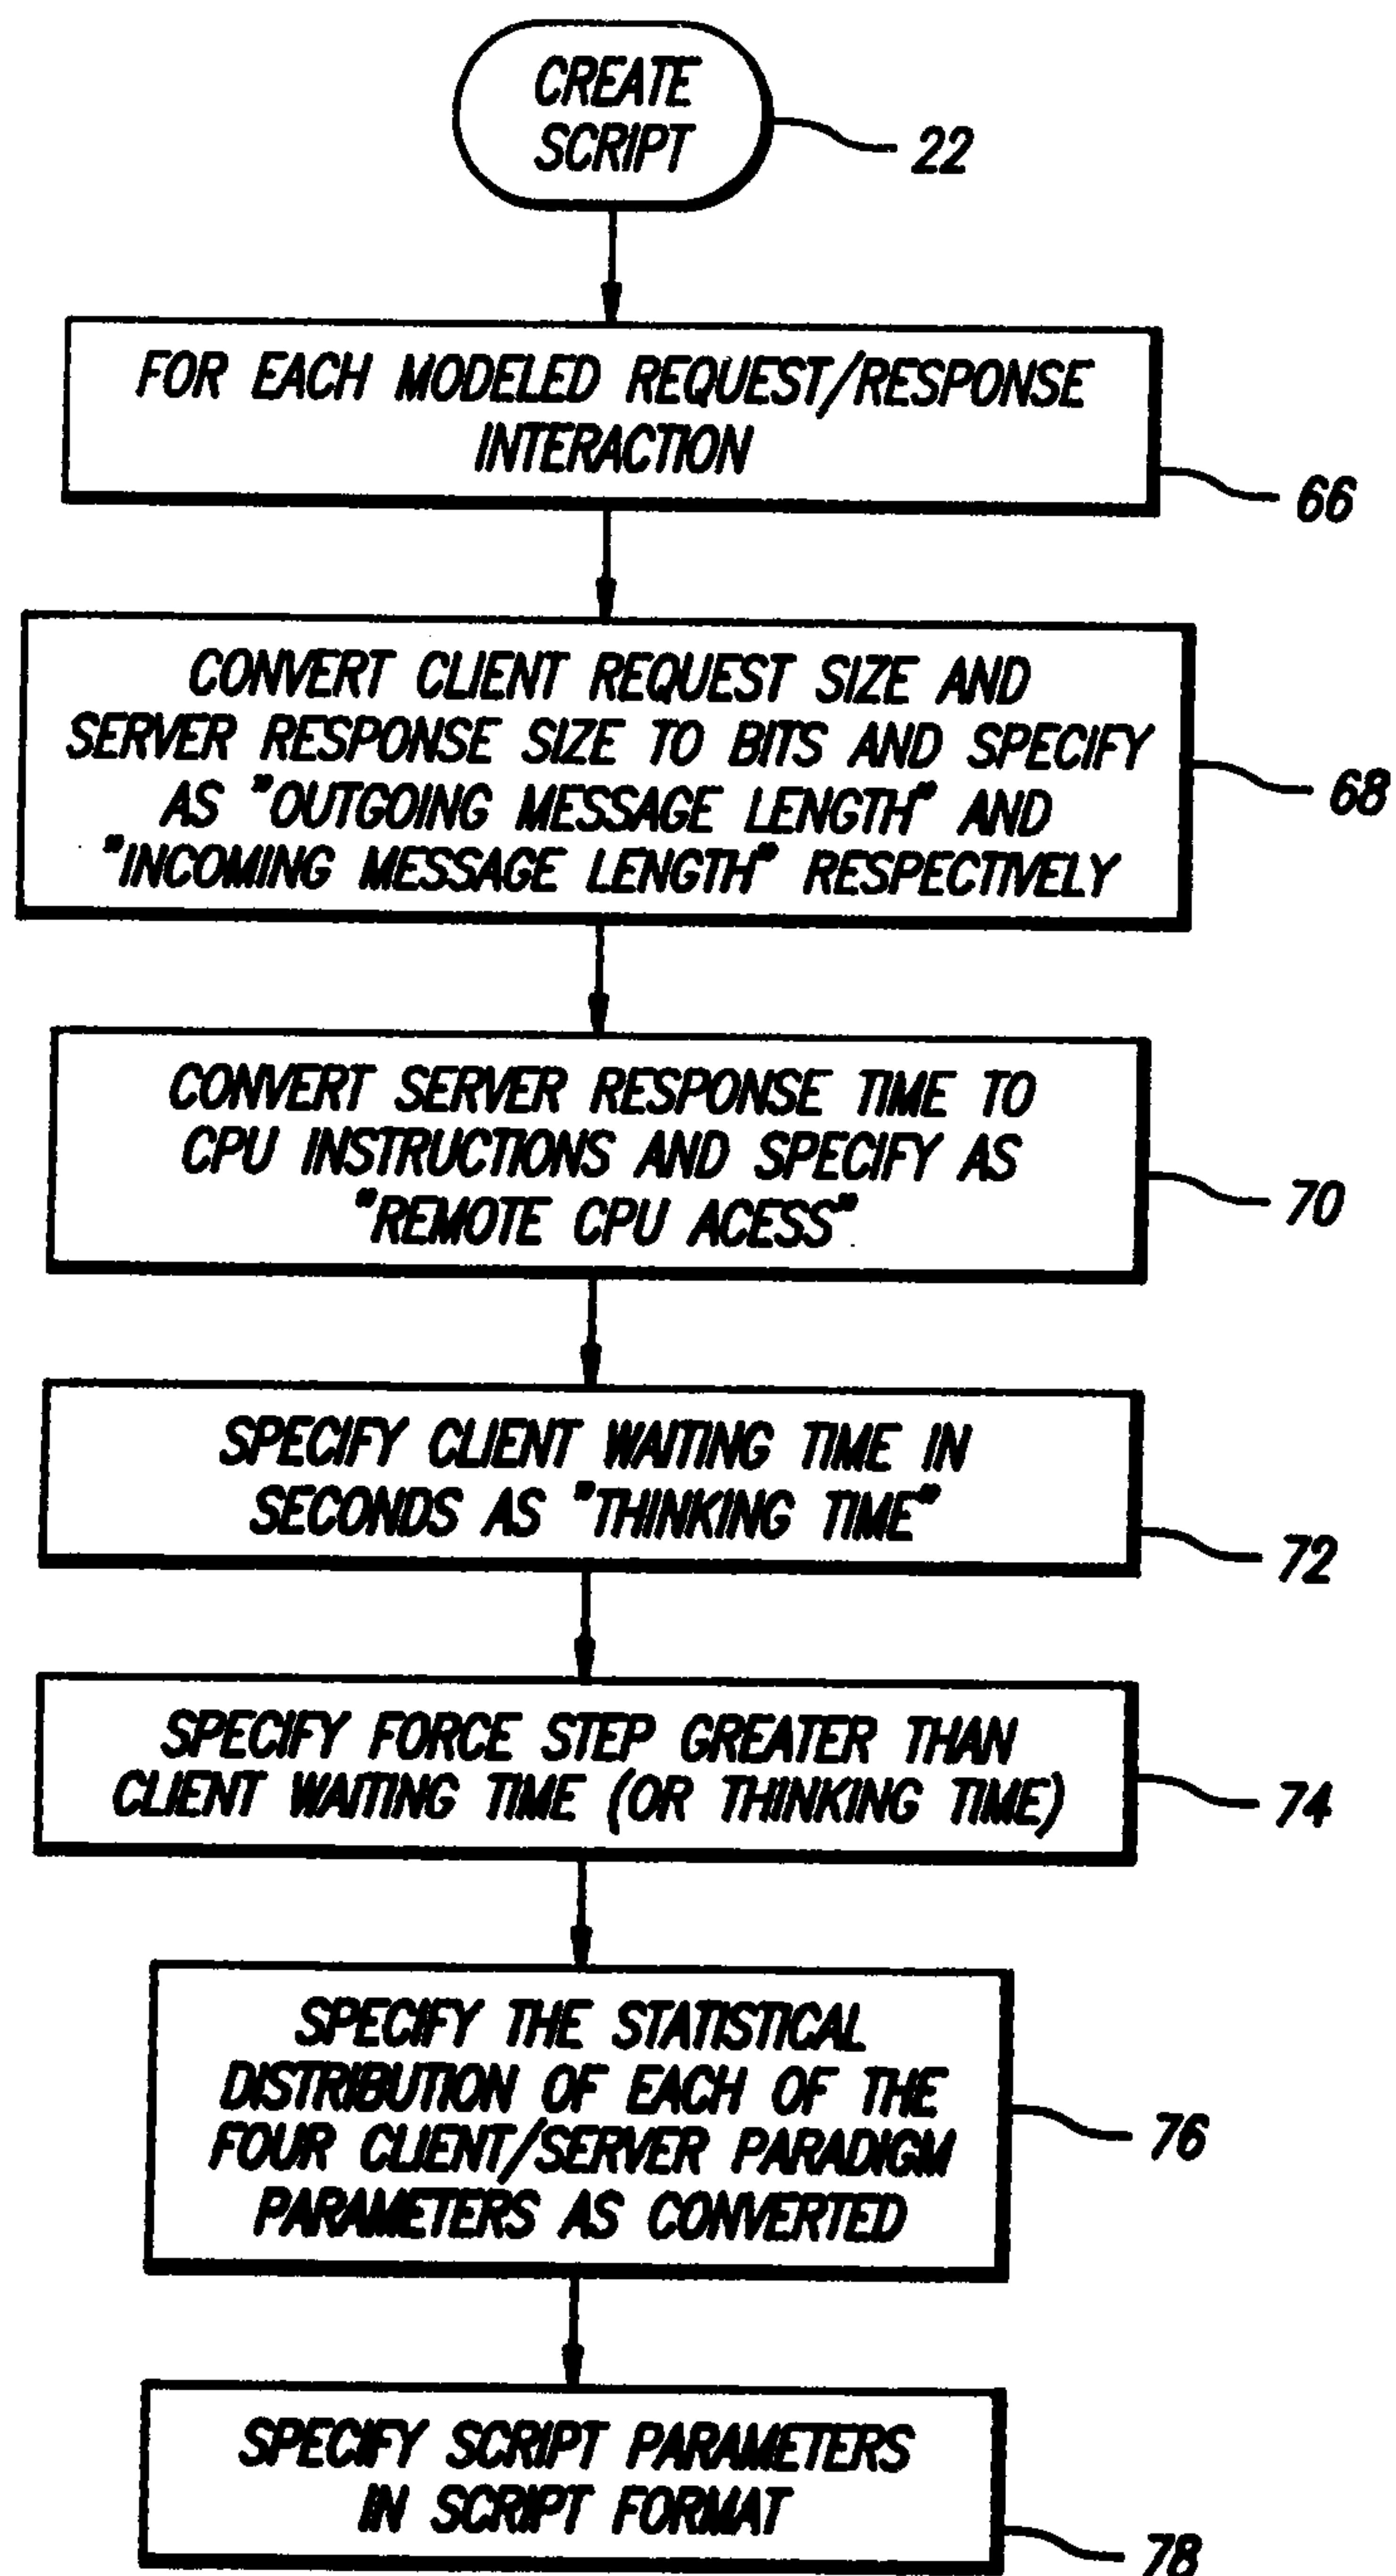


FIG. 11

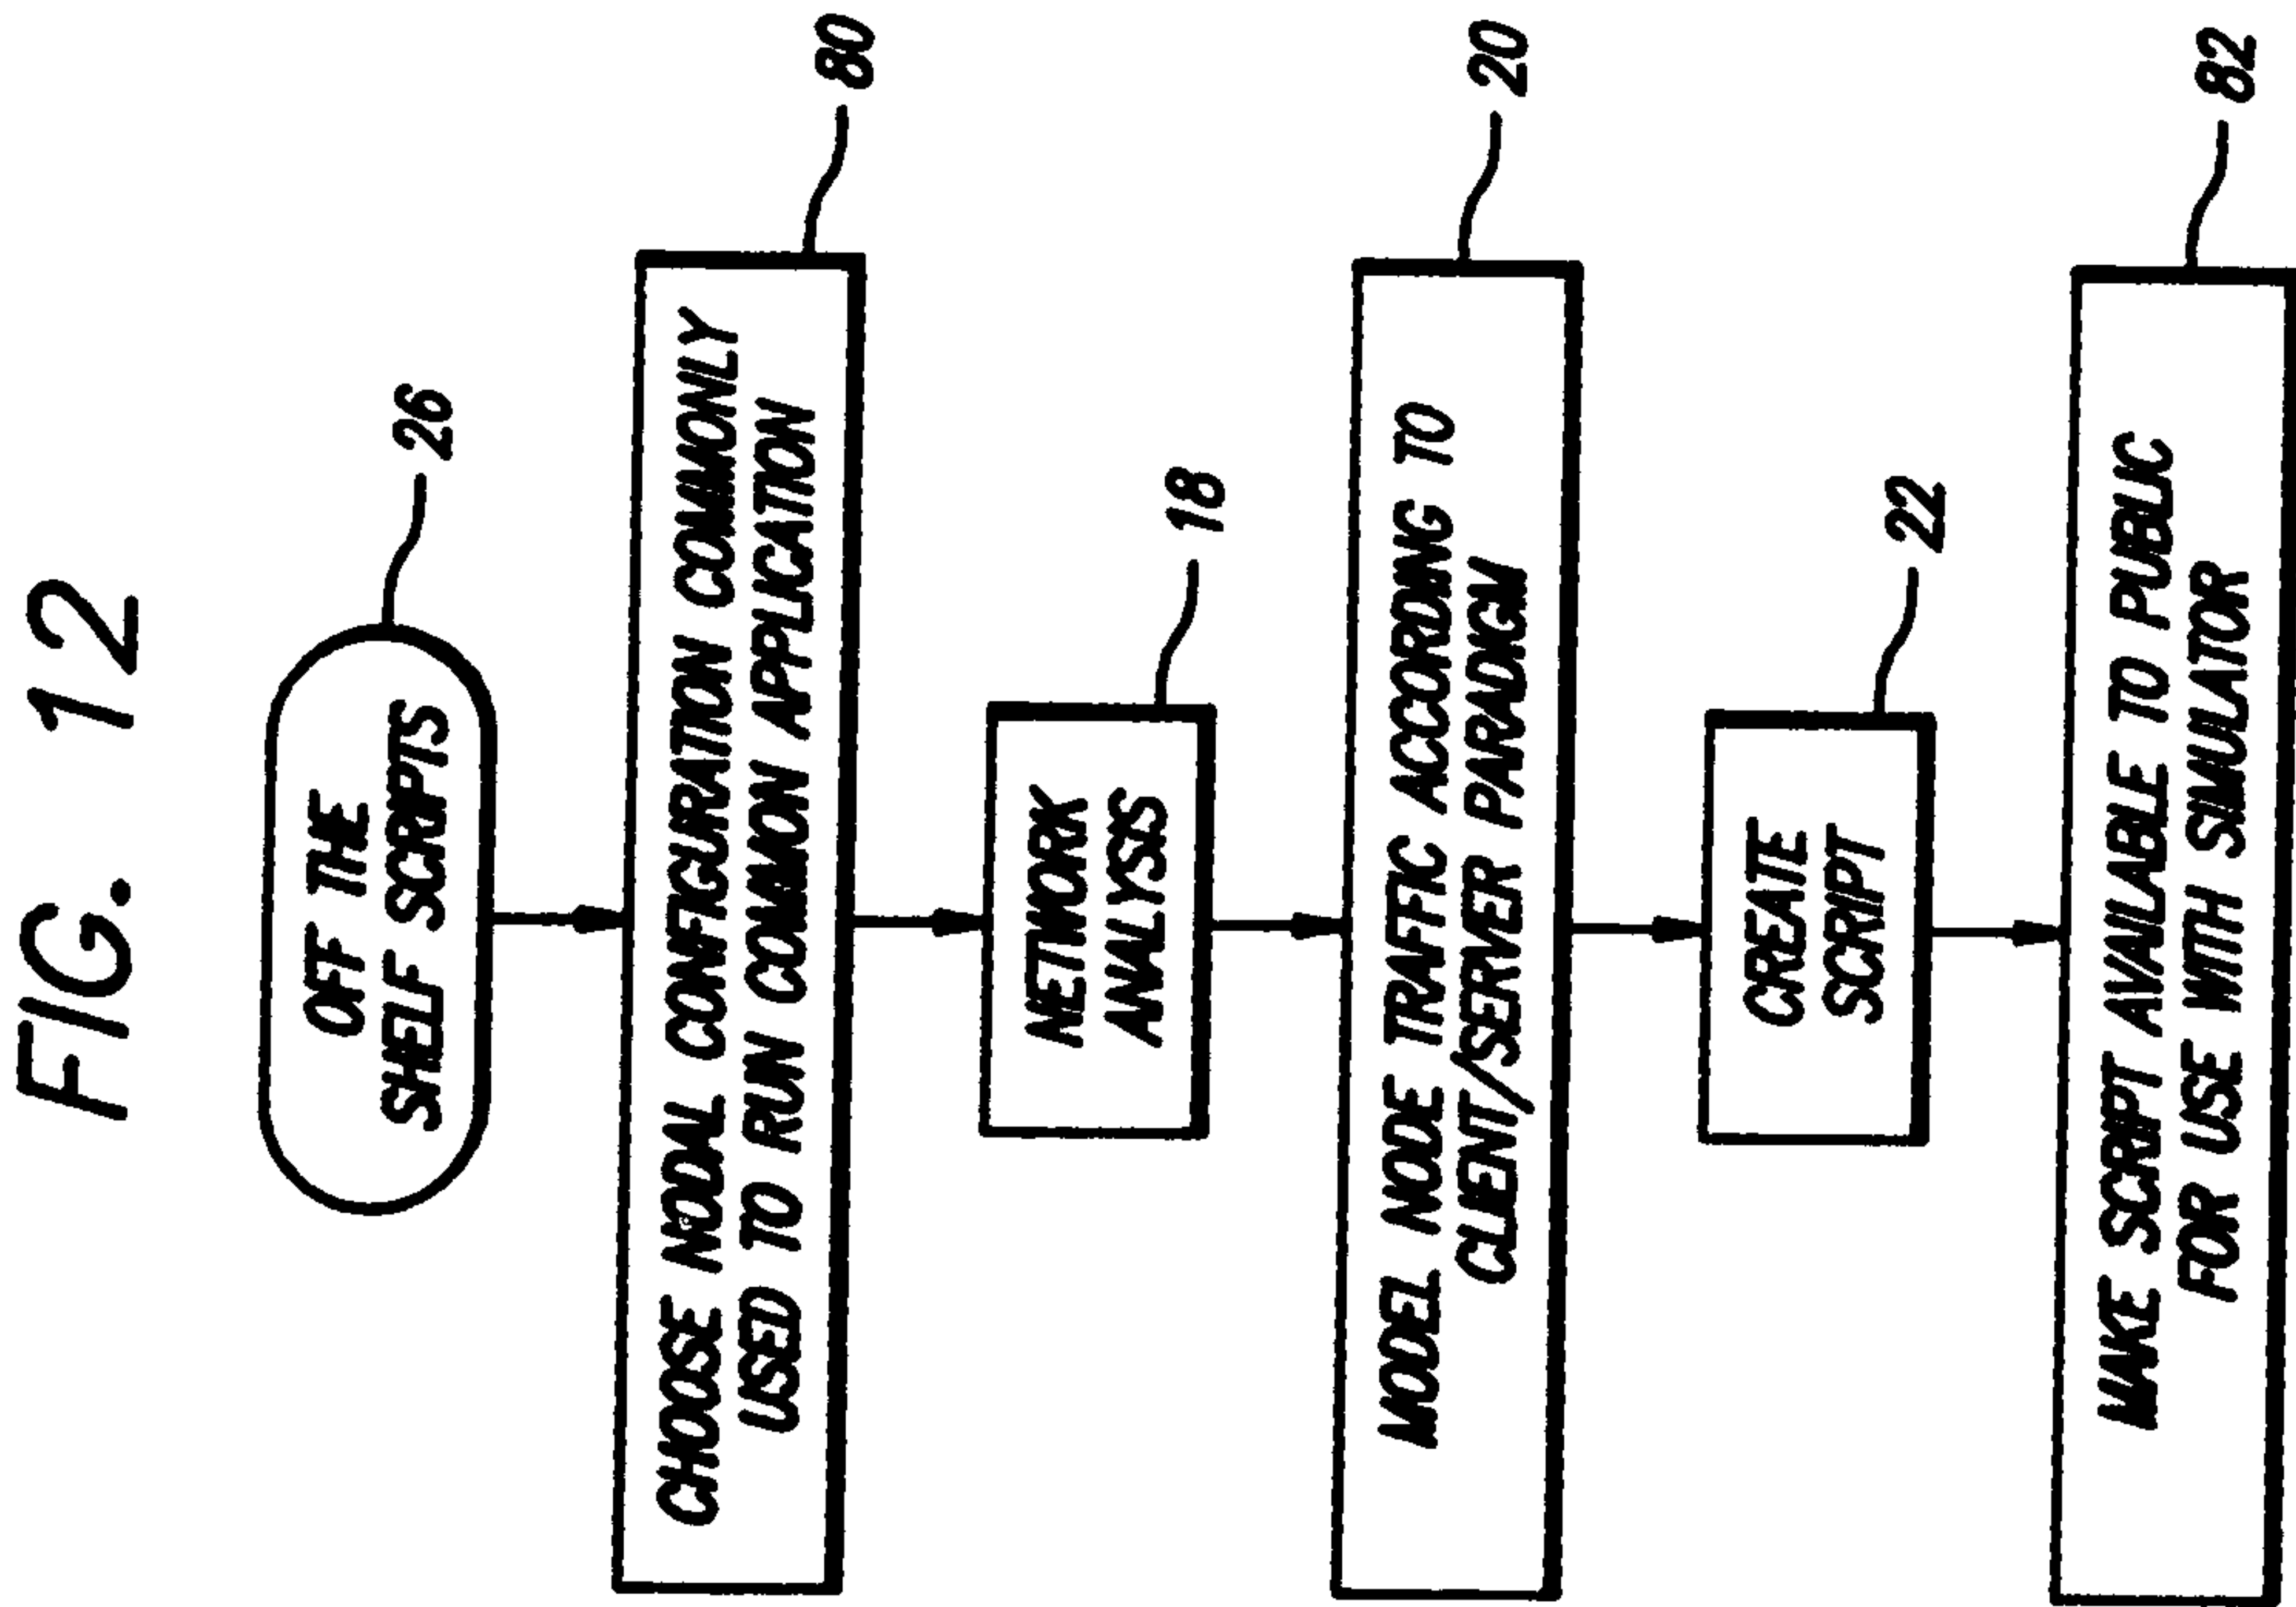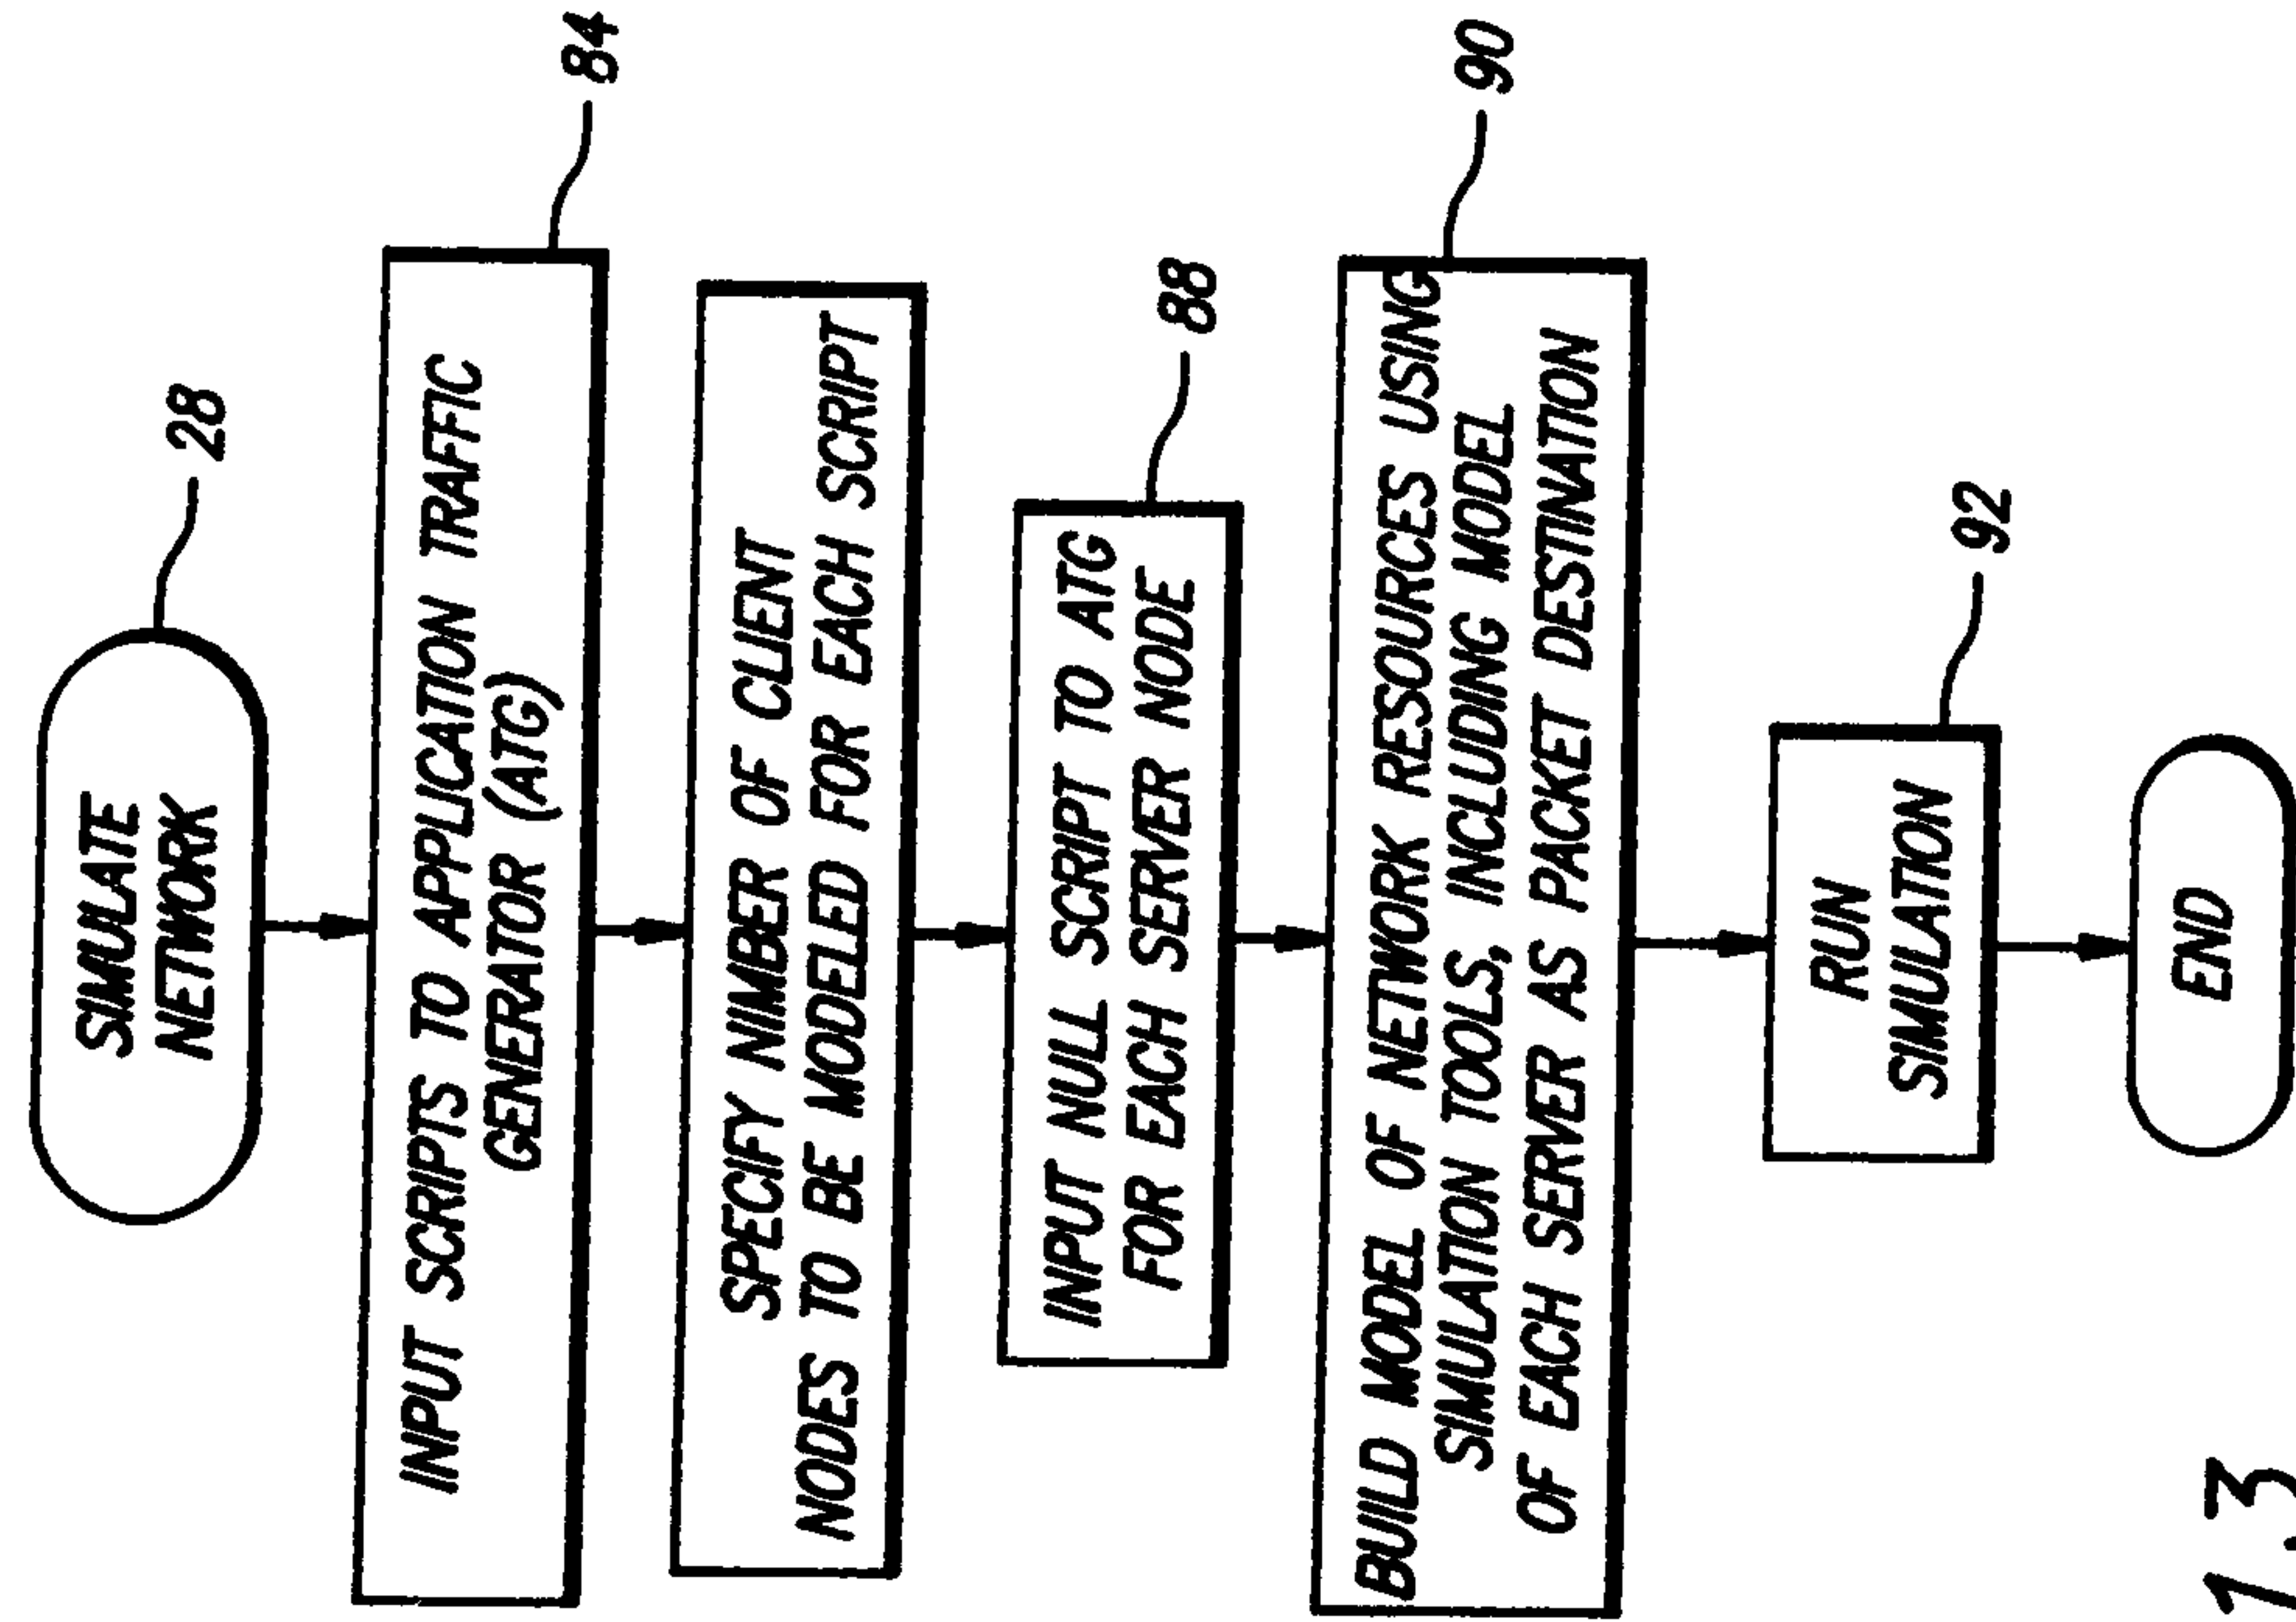

E (0.0017, 0, 1E34) F(0.2) F(240) F(8352) F(0) F(0) F(3.5E5) F(0) ;
 E (0.0017, 0, 1E34) F(0.2) F(240) F(8352) F(0) F(0) F(1.8E4) F(0) ;
 E (0.0017, 0, 1E34) F(0.2) F(240) F(8352) F(0) F(0) F(1.8E4) F(0) ;
 E (0.0017, 0, 1E34) F(0.2) F(240) F(8352) F(0) F(0) F(1.8E4) F(0) ;
 RESTART

FIG. 14a

E (0.0296, 0, 1E34) F(0.2) F(960) F(288) F(0) F(0) F(1.60E4) F(0) ;
 E (0.0256, 0, 1E34) F(0.2) F(992) F(1088) F(0) F(0) F(1.60E4) F(0) ;
 E (0.3606, 0, 1E34) F(0.4) F(864) F(832) F(0) F(0) F(1.20E4) F(0) ;
 E (0.0274, 0, 1E34) F(0.2) F(960) F(1.50E4) F(0) F(0) F(1.40E4) F(0) ;
 E (0.0028, 0, 1E34) F(0.2) F(960) F(6.64E4) F(0) F(0) F(2.60E4) F(0) ;
 E (0.0028, 0, 1E34) F(0.2) F(960) F(6.64E4) F(0) F(0) F(2.60E4) F(0) ;
 E (0.0028, 0, 1E34) F(0.2) F(960) F(6.64E4) F(0) F(0) F(2.60E4) F(0) ;
 E (0.0028, 0, 1E34) F(0.2) F(960) F(6.64E4) F(0) F(0) F(2.80E4) F(0) ;
 E (0.0028, 0, 1E34) F(0.2) F(960) F(6.64E4) F(0) F(0) F(2.80E4) F(0) ;
 RESTART

FIG. 14b

SUMMARY

DELTA T

SIZE

DESTINATION

SOURCE

SUMMARY

FIG. 15a

M	1	100	102	104	106	108	110	112
	1				NETWARE SRVR	NETWARE CLNT	NCP C GET DIR PATH OF HANDLE 07	
	2		0.0008	64	NETWARE CLNT	NETWARE SRVR	NCP R OK PATH=SYS:MSWORD	
	3		0.0010	60	NETWARE SRVR	NETWARE CLNT	NCP C DIR SEARCH PARMS FOR [NULL]	
	4		0.0005	60	NETWARE CLNT	NETWARE SRVR	NCP R OK NEXT= -1	
	5		0.0006	68	NETWARE SRVR	NETWARE CLNT	NCP C DIR SEARCH WORD . ???	
	6		0.0009	84	NETWARE CLNT	NETWARE SRVR	NCP R OK FILE=WORD.COM	
	7		0.0007	60	NETWARE SRVR	NETWARE CLNT	NCP C GET DIR PATH OF HANDLE 07	
	8		0.0008	64	NETWARE CLNT	NETWARE SRVR	NCP R OK PATH=SYS:MSWORD	
	9		0.0014	72	NETWARE SRVR	NETWARE CLNT	NCP C OPEN FILE /MSWORD/WORD.COM	
	10		0.0036	88	NETWARE CLNT	NETWARE SRVR	NCP R F=3B14 OK OPENED	
	11		0.0011	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 512 AT 0	
	12		0.0276	566	NETWARE CLNT	NETWARE SRVR	NCP R OK 512 BYTES READ	
	13		0.0021	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 512 AT 512	
	14		0.0011	566	NETWARE CLNT	NETWARE SRVR	NCP R OK 512 BYTES READ	
	15		0.0012	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 1024	
	16		0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ	
	17		0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 2048	
	18		0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ	
	19		0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 3072	
	20		0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ	
	21		0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 4096	

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 15b
22	0.0262	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
23	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 5120		
24	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
25	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 6144		
26	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
27	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 7168		
28	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
29	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 8192		
30	0.0285	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
31	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 9216		
32	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
33	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 10240		
34	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
35	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 11264		
36	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
37	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 12288		
38	0.0285	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
39	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 13312		
40	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
41	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 14336		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 15c
42	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
43	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 15360		
44	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
45	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 16384		
46	0.0287	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
47	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 17408		
48	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
49	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 18432		
50	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
51	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 19456		
52	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
53	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 20480		
54	0.0502	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
55	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 21504		
56	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
57	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 22528		
58	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
59	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 23552		
60	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
61	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 24576		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	
62	0.0281	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
63	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 25600		
64	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
65	0.0019	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 26624		
66	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
67	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 27648		
68	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
69	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 28672		
70	0.0286	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
71	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 29696		
72	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
73	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 30720		
74	0.0020	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
75	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 31744		
76	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
77	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 32768		
78	0.0282	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
79	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 33792		
80	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
81	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 34816		

FIG. 15e

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	
82	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
83	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 35840		
84	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
85	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 36864		
86	0.0371	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
87	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 37888		
88	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
89	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 38912		
90	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
91	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 39936		
92	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
93	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 40960		
94	0.0285	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
95	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 41984		
96	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
97	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 43008		
98	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
99	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 44032		
100	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
101	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3B14 READ 1024 AT 45056		

SUMMARY			DELTA T			SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 15f			
102	0.0291	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ					
103	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 46080					
104	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ					
105	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 47104					
106	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ					
107	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 48128					
108	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ					
109	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 49152					
110	0.0278	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ					
111	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 READ 1024 AT 50176					
112	0.0009	424	NETWARE CLNT	NETWARE SRVR	NCP R OK 370 BYTES READ					
113	0.0011	60	NETWARE SRVR	NETWARE CLNT	NCP C F=3814 CLOSE FILE					
114	0.0012	60	NETWARE CLNT	NETWARE SRVR	NCP R OK					
115	0.0050	60	NETWARE SRVR	NETWARE CLNT	NCP C GET DIR PATH OF HANDLE 07					
116	0.0009	64	NETWARE CLNT	NETWARE SRVR	NCP R OK PATH=SYS:MSWORD					
117	1.3459	60	NETWARE SRVR	NETWARE CLNT	NCP C GET DIR PATH OF HANDLE 07					
118	0.0009	64	NETWARE CLNT	NETWARE SRVR	NCP R OK PATH=SYS:MSWORD					
119	0.0010	70	NETWARE SRVR	NETWARE CLNT	NCP C SEARCH FOR FILE /MSWORD/MW.PGM					
120	0.0030	84	NETWARE CLNT	NETWARE SRVR	NCP R OK FILE=MW.PGM					
121	0.0011	70	NETWARE SRVR	NETWARE CLNT	NCP C OPEN FILE /MSWORD/MW.PGM					

Gewling, Strathy & Henderson

FIG. 15g

SUMMARY	DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY
100	102	104	106	108	110
					112
122	0.0037	88	NETWARE CLNT	NETWARE SRVR	NCP R F=B026 OK OPENED
123	0.0007	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 512 AT 0
124	0.0423	566	NETWARE CLNT	NETWARE SRVR	NCP R OK 512 BYTES READ
125	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 608 AT 21920
126	0.0202	662	NETWARE CLNT	NETWARE SRVR	NCP R OK 608 BYTES READ
127	0.0013	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 22528
128	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
129	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 23552
130	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
131	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 24576
132	0.0161	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
133	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 25600
134	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
135	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 26624
136	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
137	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 27648
138	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
139	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 28672
140	0.0286	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ
141	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 29696

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 15h
142	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
143	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 30720		
144	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
145	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 31744		
146	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
147	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 32768		
148	0.0283	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
149	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 33792		
150	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
151	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 34816		
152	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
153	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 35840		
154	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
155	0.0016	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 36864		
156	0.0285	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
157	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 37888		
158	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
159	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 38912		
160	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
161	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 39936		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 15i
162	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
163	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 40960		
164	0.0285	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
165	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 41984		
166	0.0017	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
167	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 43008		
168	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
169	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 44032		
170	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
171	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 45056		
172	0.0287	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
173	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 46080		
174	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
175	0.0017	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 47104		
176	0.0018	1078	NETWARE CLNT	NETWARE SRVR	NCP R OK 1024 BYTES READ		
177	0.0018	64	NETWARE SRVR	NETWARE CLNT	NCP C F=B026 READ 1024 AT 48128		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
M	100	102	104	106	108	110	112
	1		154	CORKY	ZEUS	FIG. 16a	
	2	0.0027	1514	ZEUS	CORKY	NFS C F=E113 READ 8192 AT 12525568	
	3	0.0012	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)	
	4	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28462	
	5	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28462	
	6	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28462	
	7	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28462	
	8	0.0027	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 10199040	
	9	0.0030	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)	
	10	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28463	
	11	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28463	
	12	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28463	
	13	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28463	
	14	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28463	
	15	0.0038	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 7888896	
	16	0.0025	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)	
	17	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28464	
	18	0.0009	1278	ZEUS	CORKY	UDP CONTINUATION ID=28464	
	19	0.0048	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 14409728	
	20	0.0025	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)	
	21	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28465	

SUMMARY		DELTA T	SIZE	DESTINATION		SOURCE	SUMMARY	
100	102	104	106	108	110	112	110	112
22	0.0009	1278	ZEUS	CORKY	UDP CONTINUATION ID=28465	UDP CONTINUATION ID=28465		
23	0.0047	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 13246464	NFS C F=E113 READ 8192 AT 13246464		
24	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)	NFS R OK (8192 BYTES)		
25	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28466	UDP CONTINUATION ID=28466		
26	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28466	UDP CONTINUATION ID=28466		
27	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28466	UDP CONTINUATION ID=28466		
28	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28466	UDP CONTINUATION ID=28466		
29	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28466	UDP CONTINUATION ID=28466		
30	0.0040	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 3383296	NFS C F=E113 READ 8192 AT 3383296		
31	0.0025	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)	NFS R OK (8192 BYTES)		
32	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28467	UDP CONTINUATION ID=28467		
33	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28467	UDP CONTINUATION ID=28467		
34	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28467	UDP CONTINUATION ID=28467		
35	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28467	UDP CONTINUATION ID=28467		
36	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28467	UDP CONTINUATION ID=28467		
37	0.0037	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 12247040	NFS C F=E113 READ 8192 AT 12247040		
38	0.0025	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)	NFS R OK (8192 BYTES)		
39	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28468	UDP CONTINUATION ID=28468		
40	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28468	UDP CONTINUATION ID=28468		
41	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28468	UDP CONTINUATION ID=28468		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 16c
42	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28468		
43	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28468		
44	0.0032	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 16281600		
45	0.0024	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)		
46	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28469		
47	0.0010	1278	ZEUS	CORKY	UDP CONTINUATION ID=28469		
48	0.0043	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 8560640		
49	0.0025	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)		
50	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28470		
51	0.0009	1278	ZEUS	CORKY	UDP CONTINUATION ID=28470		
52	0.0001	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 14876672		
53	0.0027	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
54	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28471		
55	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28471		
56	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28471		
57	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28471		
58	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28471		
59	0.0296	154	CORKY	ZEUS	NFS C LOOKUP P00005 IN F=3E65		
60	0.0016	70	ZEUS	CORKY	NFS R NO SUCH FILE		
61	0.0256	158	CORKY	ZEUS	NFS C LOOKUP P00005.SBIN IN F=3E65		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 16d
62	0.0016	170	ZEUS	CORKY	NFS R OK F=DA73		
63	0.3606	142	CORKY	ZEUS	NFS C F=DA73 GET ATTRIBUTES		
64	0.0012	138	ZEUS	CORKY	NFS R OK		
65	0.0274	154	CORKY	ZEUS	NFS C F=DA73 READ 4096 AT 0		
66	0.0143	1514	ZEUS	CORKY	NFS R OK (1761 BYTES)		
67	0.0004	426	ZEUS	CORKY	UDP CONTINUATION ID=28475		
68	0.0103	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16670720		
69	0.0028	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
70	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28476		
71	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28476		
72	0.0010	1514	ZEUS	CORKY	UDP CONTINUATION ID=28476		
73	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28476		
74	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28476		
75	0.0128	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16703488		
76	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
77	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28477		
78	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28477		
79	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28477		
80	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28477		
81	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28477		

SUMMARY		DELTA T		SIZE	DESTINATION		SOURCE		SUMMARY	
100	102	104	106	108	110	112	FIG. 16e			
82	0.0029	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 4063232					
83	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)					
84	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28478					
85	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28478					
86	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28478					
87	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28478					
88	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28478					
89	0.0042	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 6619136					
90	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)					
91	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28479					
92	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28479					
93	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28479					
94	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28479					
95	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28479					
96	0.0084	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16719872					
97	0.0028	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)					
97	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28480					
99	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28480					
100	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28480					
101	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28480					

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106	108	110	112	FIG. 16f
102	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28480		
103	0.0049	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16695296		
104	0.0028	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
105	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28481		
106	0.0014	1514	ZEUS	CORKY	UDP CONTINUATION ID=28481		
107	0.0010	1514	ZEUS	CORKY	UDP CONTINUATION ID=28481		
108	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28481		
109	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28481		
110	0.0328	154	CORKY	ZEUS	NFS C LOOKUP P00006 IN F=3E65		
111	0.0018	70	ZEUS	CORKY	NFS R NO SUCH FILE		
112	0.0254	158	CORKY	ZEUS	NFS C LOOKUP P00006.SBIN IN F=3E65		
113	0.0017	170	ZEUS	CORKY	NFS R OK F=290B		
114	0.3282	142	CORKY	ZEUS	NFS C F=290B GET ATTRIBUTES		
115	0.0011	138	ZEUS	CORKY	NFS R OK		
116	0.0229	154	CORKY	ZEUS	NFS C F=290B READ 4096 AT 0		
117	0.0182	1514	ZEUS	CORKY	NFS R OK (3039 BYTES)		
118	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28485		
119	0.0002	222	ZEUS	CORKY	UDP CONTINUATION ID=28485		
120	0.0094	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16834560		
121	0.0027	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106		108	110	112
122	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28486		
123	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28486		
124	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28486		
125	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28486		
126	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28486		
127	0.0031	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 13488128		
128	0.0025	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)		
129	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28487		
130	0.0009	1278	ZEUS	CORKY	UDP CONTINUATION ID=28487		
131	0.0022	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 5603328		
132	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
133	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28488		
134	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28488		
135	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28488		
136	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28488		
137	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28488		
138	0.0057	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 13664256		
139	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
140	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28489		
141	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28489		

FIG. 16h

SUMMARY	DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY
100	102	104	106	108	110
142	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28489
143	0.0010	1514	ZEUS	CORKY	UDP CONTINUATION ID=28489
144	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28489
145	0.0055	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 8429568
146	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)
147	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28490
148	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28490
149	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28490
150	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28490
151	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28490
152	0.0032	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 8437760
153	0.0027	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)
154	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28491
155	0.0014	1514	ZEUS	CORKY	UDP CONTINUATION ID=28491
156	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28491
157	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28491
158	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28491
159	0.0034	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 5586944
160	0.0025	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)
161	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28492

SUMMARY		DELTA T	SIZE	DESTINATION	SOURCE	SUMMARY	
100	102	104	106		108	110	112
162	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28492		
163	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28492		
164	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28492		
165	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28492		
166	0.0041	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 10211328		
167	0.0024	1514	ZEUS	CORKY	NFS R OK (4096 BYTES)		
168	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28493		
169	0.0009	1278	ZEUS	CORKY	UDP CONTINUATION ID=28493		
170	0.0036	154	CORKY	ZEUS	NFS C F=E113 READ 8192 AT 16736256		
171	0.0026	1514	ZEUS	CORKY	NFS R OK (8192 BYTES)		
172	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28494		
173	0.0013	1514	ZEUS	CORKY	UDP CONTINUATION ID=28494		
174	0.0011	1514	ZEUS	CORKY	UDP CONTINUATION ID=28494		
175	0.0012	1514	ZEUS	CORKY	UDP CONTINUATION ID=28494		
176	0.0007	934	ZEUS	CORKY	UDP CONTINUATION ID=28494		
177	0.0027	154	CORKY	ZEUS	NFS C F=E113 READ 4096 AT 16752640		

FIG. 16i

