



(43) International Publication Date
15 June 2017 (15.06.2017)

- (51) **International Patent Classification:**
E05B 49/00 (2006.01) *E05B 67/00* (2006.01)
- (21) **International Application Number:**
PCT/CN2016/108711
- (22) **International Filing Date:**
6 December 2016 (06.12.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/266,052 11 December 2015 (11.12.2015) US
15/351,708 15 November 2016 (15.11.2016) US
- (71) **Applicant: THE SUN LOCK COMPANY LTD.**
[CN/CN]; Room 5, Block 6, 16/F Hang Wai Industrial
Center, 6 Kin Tai Street, Tuen Mun, New Territories, Hong
Kong (CN).
- (72) **Inventor: LAI, Karl;** House 20, Constellation Cove, 1
Hung Lam Drive, Tai Po, New Territories, Hong Kong
(CN).


(74) **Agent: JIAQUAN IP LAW FIRM;** ZHANG, Ping, No. 910, Building A, Winner Plaza, No. 100, West Huangpu Avenue, Tianhe District, Guangzhou, Guangdong 510627 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: ELECTRONIC COMBINATION LOCK WITH DIFFERENT LEVELS OF ACCESS CONTROL

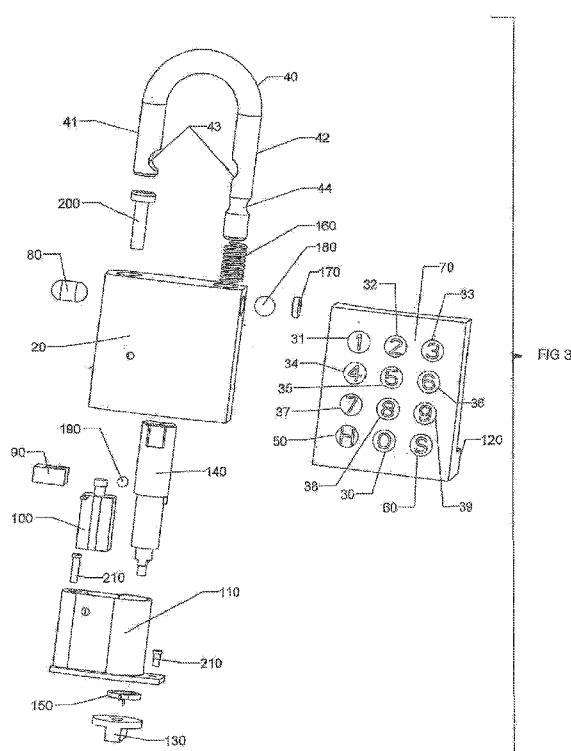

(57) Abstract: An electronic combination lock (10) has a shackle (40), a lock body (20), a locking mechanism (80, 180), an electromechanical device (100), and a touch panel (70) for combination code entry. If the combination code matches a pre-set code, a solenoid (100) is energized to unlock the lock, allowing a user to pull up the shackle (40) to open the lock (10). The user can be a master user, a regular user or a temporary user with each type of users having different level of access. The master user can have unlimited number of times to use the master combination code, while a temporary user has only a limited number of times to use its temporary code as designated by the master user. The lock can be opened with a key. The user can enter the combination code from a detached electronic device.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

— *with amended claims (Art. 19(1))*

Declarations under Rule 4.17:

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Description

Title of Invention: Electronic Combination Lock with Different Levels of Access Control

[1] CROSS REFERENCE TO RELATED PATENT APPLICATION

[2] This application claims priority under 35 USC §119 to U.S. Provisional Patent Application No. 62/266,052, filed December 11, 2015, whose entire contents are hereby incorporated by reference.

[3] Background of the Invention

[4] In today's market, there are many electronic locking devices. Many of those locking devices require a user to use an electronic device to send an electronic signal for controlling the access of the locking device. In order to gain access of the locking device, the user must have such an electronic device. With an electronic combination lock, however, all a user needs is the combination code. The combination code can be shared with another person to allow that person to gain access to the electronic combination lock.

[5] Summary of the Invention

[6] The present invention provides an electronic combination lock that can be unlocked by a combination code entry. According to some embodiments of the present invention, the access of combination lock can have different levels. For example, the homeowner can allow a temporary user to have limited access to the homeowner's property by issuing a temporary code. Once such temporary code has been used for the designated number of times, the code will become invalidated. The combination code can be entered using a touch panel on the combination lock or it can be entered by a detached electronic device. In some embodiments of the present invention, the combination lock has an overriding mechanism using a key to open the lock.

[7] Thus, the electronic combination lock, according to embodiments of the present invention, comprise

[8] a shackle having a short leg and a long leg,

[9] a lock body comprising a long-leg channel dimensioned to receive the long leg of the shackle, the shackle locatable in a first shackle position in relationship to the lock body when the combination lock is operated at least in a locked mode and in a second shackle position when the combination lock is operated in an opened mode;

[10] a locking mechanism configured to engage with the shackle for securing the shackle in the first shackle position when the combination lock is operated in the locked mode;

[11] an electromechanical device coupled to the locking mechanism;

[12] an electronic keypad configured to receive a combination code; and

- [13] an electronic processor configured to control the electromechanical device based on the combination code, such that when the combination code matches a preset code, the locking mechanism is caused to disengage from the shackle, causing the combination lock to operate in an unlocked mode, wherein when the combination lock is operated in the unlocked mode, the shackle can be caused to change from the first shackle position to the second shackle position so as to operate the combination lock in the opened mode, and wherein the preset code is indicative of an access level of the combination lock, the access level comprising a first level, a second level and a third level, such that a combination lock user of the first level is allowed to change the preset code for the first level, the preset code for the second level and the preset code of the third level, whereas
- [14] a combination lock user of the third level is prohibited from changing the preset code, and
- [15] whether a combination lock user of the second level is allowed to change the preset code of the second level is pre-determined by the combination lock user of the first level, and wherein the electronic processor is configured to determine the access level based on the combination code.
- [16] According to an embodiment of the present invention, the electronic keypad further comprises a reset button configured to provide to the electronic processor an electronic signal indicative of a procedure to change the preset code.
- [17] According to an embodiment of the present invention, the combination lock user of the first level has unlimited number of access times to open the combination lock, whereas a combination lock user of the third level has a limited number of access times, and whether the combination user of the second level has unlimited number of access times or limited number of access times is determined by the combination lock user of the first level.
- [18] According to an embodiment of the present invention, the combination lock further comprises:
- [19] a cylinder,
- [20] a rotatable cam coupled to the cylinder;
- [21] a fixed cam positioned in relationship to the rotatable cam for providing the locking hole; and
- [22] a blocking plate movably attached to the rotatable cam, the blocking plate locatable in a first plate position for blocking the locking hole and in a second plate position for unblocking the locking hole, such that when the cylinder is caused to rotate by a matching key, the rotatable cam is configured to move the blocking plate from the first plate position to the second plate position so as to operate the combination lock in the unlocked mode.

- [23] According to an embodiment of the present invention, the combination lock further comprises:
- [24] an electronic signal receiver configured to receive an electronic signal indicative of the combination code and to provide the combination code to the electronic processor so as to allow the electronic processor to determine whether the combination code matches the preset code.
- [25] The present invention will become apparent upon reading the description taken in conjunction with Figures 1 to 32.
- [26] Brief Description of the Drawings
- [27] Figure 1 shows an electronic combination lock, according to an embodiment of the present invention.
- [28] Figure 2 shows the electronic combination lock in an opened mode as the shackle has been released.
- [29] Figure 3 is an exploded view of the combination lock showing various mechanical components of the lock.
- [30] Figure 3A is a cross sectional view of the combination lock in a locked mode.
- [31] Figure 3B is a cross sectional view of the combination lock in an unlocked mode.
- [32] Figure 4A is a cross sectional view of the combination lock in an opened mode.
- [33] Figure 4B is a bottom view of the combination lock.
- [34] Figure 5 is a cross sectional view of the lock body.
- [35] Figure 6 is an isometric view of the shackle.
- [36] Figure 7 is an isometric view of the solenoid-tip guide slot.
- [37] Figure 8 shows an example of a solenoid.
- [38] Figure 9A shows a top view of the solenoid base.
- [39] Figure 9B shows a bottom view of the solenoid base.
- [40] Figure 10A shows a top view of the panel base.
- [41] Figure 10B shows a bottom view of the panel base.
- [42] Figures 11A and 11B show different views of the cam.
- [43] Figure 12 shows a bottom view of the turn knob.
- [44] Figure 13 is an isometric view of the cam spring.
- [45] Figure 14A is a cross sectional view of the combination lock in a locked mode, according to a different embodiment of the present invention.
- [46] Figure 14B is a bottom view of the combination lock of Figure 14A.
- [47] Figure 15 is a front view of the combination lock of Figure 14A.
- [48] Figure 16 is a cross sectional view of the combination lock of Figure 14A when the lock is operated in an opened mode.
- [49] Figures 17A and 17B show different views of a first half of the lock body.
- [50] Figure 18 is an isometric view of the shackle.

- [51] Figures 19A and 19B show different views of the latch.
- [52] Figures 20A and 20B show different views of the locking ring.
- [53] Figure 21 shows a solenoid.
- [54] Figure 22 shows a cross sectional view of a second half of the lock body.
- [55] Figures 23A and 23B show different view of a panel base.
- [56] Figure 24 is an isometric view of the cylinder.
- [57] Figure 25 is an isometric view of the cam.
- [58] Figure 26 is an isometric view of the fixed cam.
- [59] Figure 27 shows a view of the blocking plate.
- [60] Figure 28 shows a view of a screw.
- [61] Figure 29A shows a cross sectional view of the lock opened by a key.
- [62] Figure 29B shows a bottom view of the lock opened by a key.
- [63] Figure 30 is an exploded view of the lock showing various components of the lock.
- [64] Figure 31 is a block diagram showing some of the electronic components in the lock.
- [65] Figure 32 is a flowchart illustrating a mode of operation, according to an embodiment of the present invention.

[66] Description of the Invention

- [67] As seen in Figures 1 - 13, the electronic combination lock 10, according to an embodiment of the present invention, has a lock body 20, a shackle 40 and a touch panel 70. The touch panel 70 has a plurality of numerical keys or keypads 30-39, a home button 50 and a reset button 60. The shackle 40 has a short leg 41 and a long leg 42. The lock body 20 has a lock hole 21 dimensioned to receive the short leg 41 and a long-leg channel 22 dimensioned to receive the long leg 42 of shackle 40. The long-leg channel 22 defines a longitudinal axis for rotation. Each of the short leg 41 and the long leg 42 has a cutout 43 as part of the locking mechanism. The locking mechanism includes a locking bolt 80 and a locking ball 180 engaging with the cutout 43 on the short leg 41 and the cutout 43 on the long leg 42 when the combination lock 10 is operated in the locked mode and in the unlocked mode (Figure 1). The position of locking bolt 80 and locking ball 180 is controlled by a rotatable cam 140. The cam 140 has a bolt slot 144 and a bolt slot 145 positioned such that when the cam 140 is rotated by a certain angle, the locking bolt 80 and the locking ball 180 are allowed to move away from the cutouts 43. As such, the shackle 40 can be pushed upward by a shackle spring 160 to release the short leg 41 of shackle 40 from the lock hole 21 of lock body 20 to operate the combination lock in the opened mode (Figure 2). The shackle 40 can now be rotated along the long leg 42 as a rotation axis. The cam 140 has a groove 146 (see Figure 11B) with a groove indent 141 having an engaging relationship with a cam ball 90. The position of the cam ball 90 is controlled by a solenoid 100 having a slug or tip 101 (see Figure 8). When the combination lock 10 is operated in the locked mode,

the tip 101 or solenoid 100 is arranged to push the cam ball 90 against the groove indent 141 such that the cam 140 cannot be rotated to release the shackle 40 as illustrated in Figure 3A.

[68] When a user uses the touch panel 70 to key in the correct combination code using keypads 30-39, the solenoid 100 is energized to cause the tip 101 to move inward toward the solenoid body 102 and the combination lock is in the unlocked mode as illustrated in Figure 3B. As such, the cam ball 90 can move away from the groove indent 141, allowing the user to rotate the cam 140 to release the shackle 40 to operate the combination lock in the opened mode as illustrated in Figure 4A. As seen in Figure 4A and 4B, the combination lock 10 has a panel base 120 connected to the lock body 20. The panel base 120 has a base support 128 connected to a panel support 129. The panel support 129 is arranged to support the touch panel 70. As seen in Figure 12, the base support 128 has a base opening 121 to place a turn knob 130. The turn knob 130 has a slot 131 fixedly attached to flat surfaces 143 of the cam 140 such that when the cam ball 90 has moved away from the groove indent 141, the user can use the turn knob 130 to rotate the cam 140 to release the shackle 40 in order to operate the lock 10 in the opened mode.

[69] It should be understood that some of the components of the electronic combination lock 10 are not shown in the drawings as shown in Figures 1-30. For example, the electronic combination lock 10 has a non-transitory memory unit to store combination codes; an electronic processor to determine whether a keypad entry by a user matches a stored combination code; an electronic driving circuit to drive the solenoid; a power source or battery to provide electrical power to various electronic and electro-mechanical components and a battery charger. These components are presented in the block diagram of Figure 31. Furthermore, the touch panel 70 can be any type of touch panel or touchscreen. For illustration purposes only, in the touch panel 70 described herein, the numerical keypad with keys 30-39, the home button 50 and the set button 60 appears on the touch panel 70 only long enough for keypad entry. According to an embodiment of the present invention, the battery, the electronic processor and other electronic circuits are housed in the panel base 120, for example.

[70] As seen in Figure 4B which shows the bottom view of the combination lock 10, the panel base 120 has a charging slot 122 arranged for charging the battery in the panel base 120.

[71] As seen in Figure 5, the lock body 20 has a lock hole 21 dimensioned to receive the short leg 41 of shackle 40; a long-leg channel 22 dimensioned to receive a shackle spring 160 and the long leg 42 of shackle 40; a bolt hole 23 for placing the locking bolt 80 and the locking ball 180 inside the lock body 20; a cam hole 24 for placing the cam 140; an open area 26 to receive part of a solenoid base 110; and a screw hole 25 below

the lock hole 21 to allow a screw 200 to fasten the lock body 20 to the solenoid base 110.

[72] As seen in Figure 6, the shackle 40 also has a retaining groove 44, together with the locking ball 180, arranged to prevent the long leg 42 of shackle 40 from completely moving away from the long-leg channel 22 of lock body 20.

[73] As seen in Figures 11A and 11B, the cam 140 has a larger cylindrical body 148 and a smaller cylindrical body 149. The upper part of the larger cylindrical body 148 has a bolt slot 144 and a ball slot 145. The lower part of the larger cylindrical body 148 has a fin 142 extended over the upper part of the smaller cylindrical body 149. The lower part of the smaller cylindrical body 149 has a reduced end 147 with two opposing flat surfaces 143. The lower part of the larger cylindrical body 148 also has a groove 146 and an indent 141 at one end of the groove 146. The groove 146 is used to keep the cam ball 90 on track while the cam 140 is rotated.

[74] As seen in Figure 9A, the solenoid base 110 has an outer cylindrical wall 111 and an inner cylindrical wall 117. The an inner diameter of outer cylindrical wall 111 is dimensioned to receive the large cylindrical body 148 of cam 140, whereas the inner diameter of the inner cylindrical wall 117 is dimensioned to receive the smaller cylindrical body 149 of cam 140. The inner wall 117 has an edge 118 arranged to stop the fin 142 of cam 140 in order to limit the rotation of cam 140. The solenoid base 110 also has an opening 119 dimensioned to receive the solenoid 100.

[75] As seen in Figures 9B and 13, the solenoid base 110 has a base recess 112 to receive a cam spring 150 which has a knob-side tail 151 and a base-side tail 152. In the periphery of the base recess 112 there is a slot 113 arranged to receive the base-side tail 152 of cam spring 150.

[76] Figure 7 shows a solenoid-tip guide 90 positioned on top of solenoid 100. The solenoid-tip guide 90 has an opening 91 dimensioned to receive tip 101 of solenoid 100. The placement of the solenoid guiding unit 90 limits the lateral movement of the cam ball 190 when the tip 101 of solenoid 100 is retrieved inward toward the solenoid body 102 to allow lock 10 to operate in the opened mode.

[77] Figures 10A and 10B show different views of the panel base 120 which has a panel support 129 attached a base support 128. The panel support 128 is arranged to mount a touch panel 170. As seen in Figure 10A, the base support 128 has a recessed area 123 dimensioned to receive the base of the solenoid base 110. In the recessed area 123 there are two screw holes 124, 125 arranged for fastening the solenoid base 110 to the panel base 120 with screws 210 (see Figure 4A). With the solenoid base 110 securely fastened to the panel base 120, the solenoid base 110 can be inserted into the open area 26 of lock body 20 with the lock body 20 located next to panel support 129.

[78] It should be understood that the electrical power provided to the solenoid 100 can be

made through electrical contacts in the solenoid base 110 and the panel base 120, for example. The electrical power provided to the touch panel 70, the electronic processor and other electronic circuit components can be made through electrical connectors in the panel base 120, for example. A power source such as a rechargeable battery required for powering the electronic and electro-mechanical components of the electronic combination lock 10 can be recharged through the charging slot 122 on the panel base 120.

[79] Classification of Users

[80] The electronic combination lock 10, according to an embodiment of the present invention, can be used by a number of users with different access levels. For example, there can be three access levels and the combination lock users can be classified as master users, regular users and temporary users, associated with different combination codes. According to an embodiment of the present invention, the master users have the highest level of access; the regular users have a second level of access and the temporary users have a third level of access.

[81] As disclosed herein, the terms “permanent user” and “regular user” are used interchangeably.

[82] Master user:

[83] There can be one master code or more than one master code. A user with a master code has an unlimited number of access times (that is, an unlimited number of times to unlock the lock) and can use the reset mode 1) to change the master code, 2) to change or disable a temporary code or a permanent code; and 3) to assign the number of access times for the temporary code user.

[84] Permanent or regular user:

[85] There can be one or more permanent or regular codes. A user with a permanent code has an unlimited number of access times. However, the permanent users cannot use the reset mode, according to one embodiment of the present invention. In another embodiment of the present invention, a permanent code user is allowed to use the reset mode but only to change his/her own code.

[86] Temporary user:

[87] There can be one or more temporary codes. A user with a temporary code has a limited number of access times. A temporary user is not allowed to use the reset mode.

[88] According to an embodiment of the present invention, the use of a code to operate the padlock is described as follows:

[89] Unlocking procedure by any user (master user, permanent user or temporary user, with a valid user code as validated by a code storage in the padlock)

[90] 1. Touch anywhere on the screen to cause the keypad to appear on the screen.

[91] 2. On the keypad, enter a combination code and then press the home-key to set the

padlock in the unlocked mode.

[92] 3. Manually release the shackle in order to mechanically open the padlock.

[93] In one embodiment, the shackle must be manually released within a predetermined period of time. When the predetermined period of time has expired, the padlock automatically returns to the locked state. If the user wants to open the lock again, the user can follow the same procedure.

[94] For demonstration purposes, assuming the padlock is configured to store a total of 9 users. User 1 has the master code, and Users 2-6 are regular users which can have unlimited number of access times. Users 7-9 are temporary users having only a limited number of access times to use a code to access to the lock.

[95] Reset procedure for resetting a master code (the user must have a master code as validated by the code storage in the padlock)

[96] 1. Touch anywhere on the screen to cause the keypad to appear on the screen.

[97] 2. On the keypad, enter a master code and then press the home-key to set the padlock in the unlocked mode.

[98] 3. Press the set button and then the home-key to enter the "reset mode"

[99] 4. Enter the same master code the then press the home-key (optional in one embodiment).

[100] 5. Press 1 to select the type of code to be changed.

[101] 6. Enter a new (master) code and then press the home-key to set the padlock in the lock mode.

[102] Reset procedure for resetting a permanent code (the user must have a master code as validated by the code storage in the padlock)

[103] 1. Touch anywhere on the screen to cause the keypad to appear on the screen.

[104] 2. On the keypad, enter a master code and then press the home-key to set the padlock in the unlocked mode.

[105] 3. Press the set button and then the home-key to enter the "reset mode".

[106] 4. Enter the same master code and then press the home-key (optional in one embodiment)

[107] 5. Press 2-6 to select the type of code to be changed.

[108] 6. Enter a new (permanent) code and then press the home-key to set the padlock in the lock mode.

[109] Reset procedure for resetting a temporary code (the user must have a master code as validated by the code storage in the padlock)

[110] 1. Touch anywhere on the screen to cause the keypad to appear on the screen.

[111] 2. On the keypad, enter a master code and then press the home-key to set the padlock in the unlocked mode.

[112] 3. Press the set button and then the home-key to enter the "reset mode".

- [113] 4. Enter the same master code and then press the home-key (optional in one embodiment).
- [114] 5. Press 7-9 to select the type of code to be changed.
- [115] 6. Enter a new (permanent) code and then press the home-key.
- [116] 7. Enter a number between 1 and 9 to set the number of access times and then press the home-key to set the padlock in the locked mode.
- [117] Reset procedure for resetting a permanent code by the permanent user (the user must have a permanent code as validated by the code storage in the padlock)
- [118] 1. Touch anywhere on the screen to cause the keypad to appear on the screen.
- [119] 2. On the keypad, enter a master code and then press the home-key to set the padlock in the unlock mode.
- [120] 3. Press the set button and then the home-key to enter the "reset mode".
- [121] 4. Enter the same permanent code and then press the home-key (optional in one embodiment).
- [122] 5. Enter a new (permanent) code and then press the home-key to set the padlock in the lock mode.
- [123] Unlocking and Locking the Combination Lock
- [124] When the user wants to operate the electronic combination lock 10 in the opened mode, the user can touch the panel 70 to cause the keypads 30-39, home button 50, and set button 60 to be displayed on the panel. The user can type in a predetermined combination code and then press the home button 50. The electrical power is transferred to the solenoid 100 in a short period of time, about 10 seconds, for example. As the solenoid 100 is activated, the tip 101 of the solenoid 100 moves downward toward the solenoid body 102. As the tip 101 of the solenoid 100 moves downward, the cam ball 190 is able to move away from the groove indent 141 in groove 146 of cam 140. Because the cam 140 is fixedly attached to the turn knob 130, the cam 140 can be rotated by turning the turn knob 130 in order to release the shackle 40. As the cam 140 turns away from its locking position, the locking bolt 80 and locking ball 180 can move into the bolt slot 144 and the ball slot 145. As such, the locking bolt 80 and locking ball 180 are disengaged from the cutouts 43 on the short leg 41 and the long leg 42 of shackle 40. The shackle 40 is now allowed to move upward under the urging force of the shackle spring 160 to release the short leg 41 from the lock hole 21 of lock body 20.
- [125] According to some embodiments of the present invention, after the user keys in the correct combination code, there is a period of 10 seconds or so to allow the solenoid to acquire sufficient electrical power in order to attract the tip 101 of solenoid 100 into the downward position. The cam ball 190 is now allowed to move away from the groove 141 indent of cam 140 and the user can now turn the turn knob 130 and the

cam 140 to open the lock. With the urge of the shackle spring 160, the shackle 40 moves upward until the locking ball 180 moves into the retaining groove 44 of shackle 40. The groove 44 is arranged to prevent the long leg 42 of shackle 40 from completely moving away from the long-leg channel 22 of lock body 20. After about 10 seconds, the electrical power to the solenoid 100 can be cut off so as to allow the tip 101 of solenoid 100 to move upward. It should be noted that, although the lock 10 is in the opened position, the cam ball 190 is still located on the track 146 of cam 140.

- [126] To return the lock 10 to the locked mode, the user simply pushes the shackle 40 downward and the cam 140 is caused to rotate back to its locking position by a cam spring 150 which has a knob-side tail 151 lodged in the spring-tail slot 132 on turn knob 130 and a base-side tail 152 lodged in the spring-tail slot 113 on solenoid base 110 (see Figure 12). The locking bolt 80 and the locking ball 180 are pushed by the cam 140 into the cutouts 43 of the shackle 40. The cam ball 190 is also caused to move back to the groove indent 141 of cam 140, preventing the cam 140 from rotation relative to the lock body 20.
- [127] The solenoid base 110 has a threaded-hole 114 which allows a screw 200 to be fastened through the hole 25 on lock body 20. Once the screw 200 is fastened, the solenoid base 110 cannot be removed from the lock 10. The panel base 120 has two screws holes 124 and 125 which allow screws 210 to be fastened via holes 115 and 116 on solenoid base 110. As such, the solenoid-base 110 and the panel-base 120 are securely fastened to the lock body 20. The panel base 120 also has an opening 121 to allow the user to touch the knob 130. The panel base 120 also has a charging slot 122 to allow the user to charge the battery embedded in the panel base 120 if needed.
- [128] As seen in Figure 3, the combination lock 10 has a sealing plug 170 dimensioned for insertion into the lock body 20 to conceal the bolt hole 23 of the lock body 20.
- [129] User Instruction to unlock the padlock
- [130] 1. Touch the panel.
- [131] 2. Key in a combination code (or old master code, or any preset User Code) and then press the home key.
- [132] 3. Turn knob clockwise to release the shackle.
- [133] 4. To lock the lock, simply push the shackle back to the lock position and the lock will lock itself automatically.
- [134] Resetting Master Code for USER 1 (Master User Reset mode)
- [135] When the user wants to set a new Master code for the electronic combination padlock 10, the user can touch the touch panel 70 to cause the keypads 30-39, the home button 50, and the set button 60 to display on the panel. The user can now input a preset combination code (or existing Master code) and press the home key 50. The user can then press the set button 60 and then press the home key 50 again. The user can then press

digit 1 (keypad 31) in order to set a new master code. After inputting the new master code by pressing numerical keys 30-39, the user must press the home button 50. The lock can now be unlocked with the new master code which must have at least 4 digits but can have 15 digits.

[136] Resetting Permanent User code for USERS 2-6 with unlimited access time (Permanent User Reset Mode):

[137] When the Master user wants to set a permanent code for the electronic combination padlock 10, the user can touch the touch panel 70 to cause the keypads 30-39, the home button 50, and the set button 60 to display on the panel. The user can input a preset combination code (or existing Master code) and press the home button 50. The user can then press the set button 60 and then the home button 50 again. The user can press one of digits 2-6 (keypads 32-36) in order to set the user code for the selected user among users 2-6. After inputting the new user code for the selected user by pressing numeral keys 30-39, the user must press the home key 50. The lock can now be unlocked with the new permanent user code which must have at least 4 digits but can have 15 digits.

[138] Reset Temporary User code for USERS 7-9 with limited access time (Temporary User Reset Mode):

[139] When the Master user wants to set the temporary code for the electronic combination padlock 10, the user can touch the panel 70 to cause the keypads 30-39, the home button 50 and the set button 60 to display on the panel. The user can input a preset combination code (or existing Master code) and press the home button 50. The user can then press the set button 60 and then the home button 50 again. The user can press one of the numerical keys 7-9 (keypads 37-39) in order to set the temporary user code for the selected user among users 7-9. After inputting the new user code for the selected user by pressing numeral keys 30-39, the user must press the home button 50. The new temporary user code must have at least 4 digits but can have 15 digits. The user can select the number 1-9 (31-39) for the number of access times that can be used with this temporary code and then the home button 50. Typically, the access times for the temporary code can range from 1-9. The lock is now set with the temporary user code for a temporary user.

[140] Alternative embodiment

[141] According to a different embodiment of the present invention, the electronic combination lock includes an overriding key locking mechanism as disclosed in

[142] US patent number 7,140,209, which is assigned to The Sun Lock Company, Ltd., the assignee of the current application, and hereby incorporated by reference in its entirety.

[143] As seen in Figures 14A – 30, the electronic combination lock 420 has a lock body 220/310, a shackle 240 and a touch panel 270. The touch panel 270 has a plurality of

numerical keys or keypads 230-239, a home button 250 and a reset button 260. The shackle 240 has a short leg 241 and a long leg 242 with a protrusion 243 and a neck 244. The touch panel 270 has a green light 271 and a red light 272. The green light 271 is lit to indicate the input code is correct and the red light 272 is lit to indicate otherwise. As seen in Figures 17A and 22, the lock body 220/310 has a lock-ring cutout 221/231 to accommodate a lock ring 290; a solenoid-tip cutout 222/312 dimensioned to receive the tip 301 of a solenoid 300 (see Figure 21); a solenoid-body cutout 223/313 dimensioned to accommodate the solenoid body 303 of solenoid 300, and a latch cutout 224/314 to house a latch 280. The lock body 220/310 also has screw holes 225/315 to receive screws 270 and two holes 226 to receive screw caps 400 to conceal the screws 370 (see Figure 14B). The lock body 220/310 has a cam channel 227 for accommodating a rotatable cam 340, a fixed cam 350 and a blocking plate 360. The lock body 220/310 also has a cylinder cutout 228 for placing a cylinder 330 and a long-leg channel 229 dimensioned to receive the end of the long leg 242 of shackle 240. The cylinder 330 has two cylinder pins 331. The rotatable cam 340 has a larger cylindrical body 343 and a smaller body 344. The end of the larger cylindrical body 343 has two receiving slots 342 dimensioned to receive the cylinder pin 331 of cylinder 330. The smaller cylindrical body 344 has a cam slot 341. The latch 280 has a latch hole 281 dimensioned to receive the tip 301 of solenoid 300, and a latch fork 282 arranged to engage with the ring groove 292 of a locking ring 290 which has two groove slopes 293 near the ring groove 292. The latch 280 also has a fork slope 283 on the latch fork 282 arranged to contact with the groove slopes 293 of locking ring 290. The combination lock 420 also has a panel base 320 with a base support 328 and a panel support 329 to support the touch panel 270 (see Figures 23A and 23B). The panel base 320 also has screw holes 323 to receive screws 370 for fastening the lock body 222/312 to the panel support 329 on top of the base support 328. The base support 328 has an opening 321 to allow a key 410 to be inserted into the cylinder 330 and a charging slot 322. The fixed cam 350 has a locking hole 351 arranged to receive the short leg 241 of shackle 240. The fixed cam 350 has a gap 355 sufficiently wide to allow the short leg 241 of shackle 240 to move out of the locking hole 351 through the gap 355. The blocking plate 360 is positioned adjacent to the gap 355 of fixed cam 350 and has a width sufficient to block the locking hole 351 so as to prevent the short leg 241 from moving out of the locking hole 351 through the gap 355 while the short leg 241 is located in the locking hole 351. The blocking plate 360 has a locking pin 361 movably engaged with the cam slot 341 of rotatable cam 340.

[144] Locked Mode

[145] As seen in Figures 14A, 15, 18, 19, 20A and 20B, the shackle 240 has a short leg 241, a long leg 242, a protrusion 243 and a neck 244. The locking ring 290 has a ring

channel 294 dimensioned to receive the long leg 242 of shackle 240 such that the protrusion 243 of shackle 240 is placed on enlarged inner edge 291 of locking ring 20 with a C-clip 390 inserted in the neck 244 of shackle 240. As such, the long leg 242 can only have a rotational movement relative to the locking ring 290. When the lock 420 is operated in the locked mode, the tip 301 of solenoid 300 causes the latch fork 282 to engage with the ring groove 292 of locking ring 290, preventing the shackle 240 from moving upward relative to the lock body 220. With the solenoid 300 being inactive (not energized), the tip 301 is pushed upward by a solenoid spring 302, with the tip 301 of solenoid 300 engaged in the latch hole 281 of latch 280. In this arrangement, the shackle cannot be pulled upward to open the lock. Furthermore, the fixed cam 350 is fixedly attached to lock body 220/310. The fixed cam 350 has a locking hole 351 arranged to receive the short leg 241 of shackle 240. The fixed cam 350 is not an enclosed cylinder such that the short leg 241 can be swung out of locking hole 351 while the long leg 242 remains in the downward position. However, in the locked mode, the blocking plate 360 is positioned relative to the fixed cam 350 to prevent it from being swung out of the locking hole 350.

[146] The key-lock mechanism

[147] As seen in Figures 14A, 16, 24, 25, 26, 27 and 30, the cylinder pins 331 of cylinder 330 are inserted into the receiving slots 342 at the end of the larger cylindrical body 343 of rotatable cam 340 so that the cylinder 330 and the rotatable cam 340 can only rotate together by a key. The smaller cylindrical body 344 of rotatable cam 340 has a cam slot 341 to receive the locking pin 361 of blocking plate 360. If an incorrect key is used to unlock the padlock 420, the cylinder 330 and the rotatable cam 340 cannot be rotated. As the locking pin 361 of blocking plate 360 is engaged in the cam slot 341 of rotatable cam 340, the blocking plate 360 cannot move downward. As such, the short leg 241 of shackle 240 is prevented from being swung out of the locking hole 351 of fixed cam 350.

[148] Unlock by Combination Code (FIG. 16):

[149] When the user wants to operate the padlock 420, the user can touch the panel 270 to cause the keypad 230-239, the home button 250, and the set button 260 to be displayed on the panel. The user can type in a predetermined combination code and then press the home button 250. The electrical power is transferred to the solenoid 300 in a short period of time, about 10 seconds, for example. As the solenoid 300 is activated, the tip 301 of the solenoid 100 moves downward toward the solenoid body 3003. As the tip 301 of the solenoid 300 moves downward and out of the latch hole 281 of latch 280, the latch fork 282 is disengaged from the ring groove 292 of locking ring 290. As such, the user can pull the shackle 240 upward to release the short leg 241 out of the locking hole 351 of fixed cam 350 to operate the padlock in the opened mode. As the shackle

240 is pulled upward, the groove slope 293 of locking ring 290 also causes the latch 280 to move further way from the long leg 242 by pushing the fork slope 283 of latch 280. After about 10 seconds, the electrical power to the solenoid 300 can be cut off.

[150] When the user relocks the padlock, the short leg 241 is moved into the locking hole 351 of fixed cam 350. At the same time, the locking ring 290, along with the long leg 242, move downward such that the groove of 292 aligns with the latch fork 282 of latch 280. The latch 280 is pushed by the urging force of the spring 380 and the latch fork 282 is caused to engage with the groove 292 of locking ring 290. As the solenoid 300 is no longer energized, the tip 301 of solenoid 300 is pushed upward by the spring 302 into the latch hole 281 of latch 280.

[151] To Unlock by Key-lock mechanism (FIG. 29A and FIG. 29B):

[152] When the padlock 420 is in the locked mode as the protrusion 243 is engaged with the groove 292 of the locking ring 290, the shackle 240 cannot be pushed upward to unlock the padlock 420. However, if a correct key 410 is inserted into the cylinder 330, the cylinder 330 can be rotated along with the rotatable cam 340. As the rotatable cam 340 is rotated, the cam slot 341 in the smaller cylindrical body 344 causes the locking pin 361 along with the blocking plate 360 to move downward to unblock the locking hole 351. As such, the short leg 241 of shackle 240 can be swung out of the locking hole 351 of fixed cam 350. This allows a key-lock user or a security officer to inspect a piece of luggage. To relock the padlock, simply rotate the short leg 241 of shackle 240 back into the locking hole 351 of fixed cam 350 and rotate the cylinder 330 in the opposite direction to remove the key 410. As the cylinder 300 is rotated in the opposite direction, the pin 361 is caused to move upward along with the blocking plate 360. As such, the blocking plate 360 prevents the short leg 241 of shackle 240 from being swung out of the locking hole 351. At all times, the long leg 342 of shackle 240 and the locking ring 290 remain in the downward position.

[153] As with the embodiment as described and illustrated in Figures 1-13, various users can key in a combination code to unlock the combination lock and to reset the combination codes. The differences in the operating procedures with the embodiment as described and illustrated in Figures 14-30 are the green and red lights. The green light can be used to indicate the key entry is correct. The green light can also be arranged to flash during the reset mode.

[154] Exemplary Padlock Components

[155] In an embodiment of the present invention, the padlock has various components as shown in Figure 31. As shown in Figure 31, the electronic padlock 10 includes:

[156] a padlock housing or lock body 20; a keypad 70 for keypad entry; a processor 520 for receiving the keypad entry - the processor is programmed to carry out the mode of operation as shown in Figure 32, for example; a memory 500 having a code storage to

store codes and types of codes (the memory is a non-transitory for storing codes readable by the processor or a computer); a battery 510 to provide power to all the electronic components and electro-mechanical control; a driving electronic circuit 530 for driving the electro-mechanical mechanism or control 540 such as a solenoid which can change the positions of a mechanical latching device 550, such that when the mechanical latching device 550 is engaged in a notch or the like on the shackle 40, it prevents the shackle 40 from being pulled up to open the padlock. According to an embodiment of the present invention, the padlock housing 20 has an optional signal receiver 515 configured to receive an electronic signal from an electronic device indicative of a combination code and conveying the combination code to the processor 520.

[157] Exemplary Mode of Operation

[158] In an embodiment of the present invention, the electronic padlock can be operated according to processing steps as shown in Figure 32 and described as follows:

[159] Step 602: Upon receiving keypad entry from a user, if code is valid (as validated from the code storage) then the combination lock is in the unlocked state (state 604) and goes to step 620.

[160] Step 604: Padlock is set in unlocked state and the process goes to step 606

[161] Step 606: If shackle is pulled up, the process goes to step 608. If the shackle is pushed down at step 608, the padlock returns to locked state at step 612; if the shackle is not pulled up after a period of time as determined at step 610, the padlock returns to the locked state at step 612.

[162] Step 620: the code type is determined: 1) if the code is a permanent code, nothing happens. 2) if the code is a temporary code and it is for the last access as determined at step 622, the code will be erased at step 630 and the code storage is adjusted accordingly at step 660; if the code is a temporary code and it can still be used for two or more times, the number of access times is reduced at step 624 and the code storage is adjusted accordingly; 3) if the code is a master code, it is determined at step 640 whether the user wants to reset the code. If the user wants to reset to code, the process goes to step 642; if not, the process goes to step 606.

[163] Step 640: Upon receiving the reset entry from the user, the process goes to step 642.

[164] Step 642: The user selects the type of code to be reset: if the type is master code, then the process goes to step 650, otherwise the process goes to step 644.

[165] Step 644: If the type is a temporary code, the process goes to step 646. Otherwise the process goes to step 652.

[166] Step 646: After the new temporary code is entered, the process goes to step 648.

[167] Step 648: The user enters the number of access times for the temporary code, the code storage is adjusted accordingly at step 660.

- [168] Step 650: the user inputs a code as the new master code, the code storage is adjusted accordingly at step 660.
- [169] Step 652: the user inputs a code as the new permanent code, the code storage is adjusted accordingly at step 660.
- [170] Another embodiment of the present invention
- [171] According to another embodiment of the present invention, the use of a touch screen panel 70 is not required. Accordingly, the numerical keypad 30-39 is affixed onto the panel-base 120/320. In particular, the numerical pad is already on the panel-base 120/320 for a user to input the combination code.
- [172] Remote entry of combination code
- [173] In an embodiment of the present invention, the combination code can also be conveyed to the electronic processor 520 by an electronic device that is detached from the electronic combination lock. As seen in Figure 31, the padlock housing 20 has a signal receiver 515 electrically connected to the electronic processor 520. The signal receiver 515 is configured to receive an electronic signal indicative of a combination code and to convey the received combination code to the electronic processor 520 to determine if the combination code matches a preset code (stored code). The electronic signal can be a Bluetooth signal from an electronic device such as a cellphone, or a longer-range signal from a remote transmitter.
- [174] With the signal receiver, a user can open the electronic combination lock by entering the combination code through the touch panel or by sending an electronic signal indicative of the combination code from a detached electronic device.
- [175] Thus, although the present invention has been described with respect to one or more embodiments thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the scope of this invention.

Claims

[Claim 1]

An electronic combination lock, comprising:
a shackle having a short leg and a long leg,
a lock body comprising a long-leg channel dimensioned to receive the long leg of the shackle, the shackle locatable in a first shackle position in relationship to the lock body when the combination lock is operated at least in a locked mode and in a second shackle position when the combination lock is operated in an opened mode;
a locking mechanism configured to engage with the shackle for securing the shackle in the first shackle position when the combination lock is operated in the locked mode;
an electromechanical device coupled to the locking mechanism;
an electronic keypad configured to receive a combination code; and
an electronic processor configured to control the electromechanical device based on the combination code, such that when the combination code matches a preset code, the locking mechanism is caused to disengage from the shackle, causing the combination lock to operate in an unlocked mode, wherein when the combination lock is operated in the unlocked mode, the shackle can be caused to change from the first shackle position to the second shackle position so as to operate the combination lock in the opened mode, and wherein the preset code is indicative of an access level of the combination lock, the access level comprising a first level, a second level and a third level, such that a combination lock user of the first level is allowed to change the preset code for the first level, the preset code for the second level and the preset code of the third level, whereas
a combination lock user of the third level is prohibited from changing the preset code, and
whether a combination lock user of the second level is allowed to change the preset code of the second level is pre-determined by the combination lock user of the first level, and wherein the electronic processor is configured to determine the access level based on the combination code.

[Claim 2]

The electronic combination lock according to claim 1, wherein the electronic keypad further comprises a reset button configured to provide to the electronic processor an electronic signal indicative of a procedure to change the preset code.

- [Claim 3] The electronic combination lock according to claim 1, wherein the lock body further comprises a locking hole dimensioned to receive the short leg of the shackle, such that when the combination lock is operated in the locked mode and in the unlocked mode, the short leg of the shackle is engaged with locking hole, and when the combination lock is operated in the opened mode, the short leg of the shackle is disengaged from the locking hole.
- [Claim 4] The electronic combination lock according to claim 3, further comprising a locking ball and a locking bolt, the locking body further comprising a bolt hole dimensioned to receive the locking ball and the locking bolt, and wherein each of the short leg and the long leg of the shackle comprises a cutout, such that when the combination lock is operated in the locked mode, the locking mechanism is configured to engage the locking bolt with the cutout in the short leg and to engage the locking ball with the cutout in the long leg, preventing movement of the shackle from the first shackle position to the second shackle position.
- [Claim 5] The electronic combination lock according to claim 4, wherein the locking mechanism further comprises a rotatable cam operable in a first cam position and a second cam position, and wherein when the rotatable cam is operated in the first cam position, the rotatable cam is configured to prevent disengagement of the locking bolt from the cutout in the short leg and disengagement of the locking ball from the cutout in the long leg, and when the rotatable cam is operated in the second cam position, the rotatable cam is configured to allow the locking bolt to disengage from the cutout in the short leg and allow the locking ball to disengage from the cutout in the long leg so as to allow the shackle to move from the first shackle position to the second shackle position.
- [Claim 6] The electronic combination lock according to claim 5, wherein the locking mechanism further comprises a cam ball and the rotatable cam comprises an indent arranged to engage with the cam ball in order to keep the rotatable cam in the first cam position when the combination lock is operated in the locked mode.
- [Claim 7] The electronic combination lock according to claim 6, wherein when the combination code matches the preset code, the electromechanical device is configured to disengage the cam ball from the indent of the rotatable cam, allowing the rotatable cam to move from the first cam

position to the second cam position so as to operate the combination lock in the unlocked mode.

[Claim 8] The electronic combination lock according to claim 7, wherein the electromechanical device comprises a solenoid having a tip locatable in a first tip position to keep the rotatable cam in the first cam position and in a second tip position to allow the rotatable cam to move from the first cam position to the second cam position.

[Claim 9] The electronic combination lock according to claim 8, wherein when the combination code matches the preset code, the tip of the solenoid is caused to move from the first tip position to the second tip position.

[Claim 10] The electronic combination lock according to claim 3, wherein the locking mechanism comprises a latch and a locking ring, the latch having a latch fork, wherein the locking ring is dimensioned to rotatably attach to the long leg of the shackle and the locking ring comprises a circular groove dimensioned to receive the latch fork, such that when the combination lock is operated in the locked mode, the latch fork is engaged with the circular groove of the locking ring so as to prevent movement of the shackle from the first shackle position to the second shackle position.

[Claim 11] The electronic combination lock according to claim 10, wherein the long-leg channel comprises a longitudinal axis, and wherein the electromechanical device comprises a solenoid having a tip locatable in a first tip position to maintain engagement of the latch fork with the circular groove of the locking ring, and in a second tip position to disengage the latch fork from the locking ring so as to allow the shackle to move from the first shackle position to the second shackle position in a direction substantially parallel to the longitudinal axis of the long-leg channel.

[Claim 12] The electronic combination lock according to claim 11, wherein when the combination code matches the preset code, the tip of the solenoid is caused to move from the first tip position to the second tip position.

[Claim 13] The electronic combination lock according to claim 10, further comprising
a cylinder,
a rotatable cam coupled to the cylinder;
a fixed cam positioned in relationship to the rotatable cam for providing the locking hole; and
a blocking plate movably attached to the rotatable cam, the blocking

plate locatable in a first plate position for blocking the locking hole and in a second plate position for unblocking the locking hole, such that when the cylinder is caused to rotate by a matching key, the rotatable cam is configured to move the blocking plate from the first plate position to the second plate position so as to operate the combination lock in the unlocked mode.

[Claim 14] The electronic combination lock according to claim 13, wherein the long-leg channel comprises a longitudinal axis, and wherein when the blocking plate is located in the second plate position, the shackle is allowed to rotate about the long-leg in a direction substantially perpendicular to the longitudinal axis so as to operate the combination lock in the opened mode.

[Claim 15] The electronic combination lock according to claim 1, further comprising:
an electronic signal receiver configured to receive an electronic signal indicative of the combination code and to provide the combination code to the electronic processor so as to allow the electronic processor to determine whether the combination code matches the preset code.

[Claim 16] The electronic combination lock according to claim 1, wherein the combination lock user of the first level has unlimited number of access times to open the combination lock, whereas a combination lock user of the third level has a limited number of access times, and whether the combination user of the second level has unlimited number of access times or limited number of access times is determined by the combination lock user of the first level.

[Claim 17] A method for controlling an electronic combination lock operable in a locked mode, an unlocked mode and an opened mode, the electronic combination lock comprising a lock body, a shackle locatable in a first shackle position in relationship to the lock body when the combination lock is operated in the locked mode and in a second shackle position when the combination lock is operated in the opened mode, the shackle having a short leg and a long leg, said method comprising:
providing a long-leg channel in the lock body to receive the long leg of the shackle;
providing a locking mechanism in the lock body, the locking mechanism arranged to engage with the shackle for securing the shackle in the first shackle position when the combination mode is operated in the locked mode;

providing an electromechanical device in the lock body, coupled to the locking mechanism;

providing an electronic keypad on the lock body, configured to receive a combination code; and

providing an electronic processor in the lock body for controlling the electromechanical device based on the combination code, such that when the combination code matches a preset code, the electromechanical device is arranged to disengage the locking mechanism from the shackle, causing the combination lock to operate in the unlocked mode, and when the combination lock is operated in the unlocked mode, the shackle can be caused to change from the first shackle position to the second shackle position so as to operate the combination lock in the opened mode, and wherein the preset code is indicative of an access level of the combination lock, the access level comprising a first level, a second level and a third level, such that a combination lock user of the first level is allowed to change the preset code for the first level, the preset code for the second level and the preset code of the third level, whereas a combination lock user of the third level is prohibited from changing the preset code, and whether a combination lock user of the second level is allowed to change the preset code of the second level is pre-determined by the combination lock user of the first level, and wherein the electronic processor is configured to determine the access level based on the combination code.

[Claim 18]

The method according to claim 17, further comprising:

providing a reset button on the electronic keypad, the reset button configured to provide the electronic processor an electronic signal indicative of a procedure to change the preset code.

[Claim 19]

The method according to claim 17, wherein the combination lock user of the first level has unlimited number of access times to open the combination lock, whereas a combination lock user of the third level has a limited number of access times, and whether the combination user of the second level has unlimited number of access times or limited number of access times is determined by the combination lock user of the first level.

[Claim 20]

The method according to claim 17, further comprising:

providing an electronic signal receiver configured to receive an

electronic signal indicative of the combination code and to provide the combination code to the electronic processor so as to allow the electronic processor to determine whether the combination code matches the preset code.

AMENDED CLAIMS

received by the International Bureau on 23 March 2017 (23.03.2017)

[Claim 1]

An electronic combination lock, comprising:
a shackle having a short leg and a long leg,
a lock body comprising a long-leg channel dimensioned to receive the long leg of the shackle, the shackle locatable in a first shackle position in relationship to the lock body when the combination lock is operated at least in a locked mode and in a second shackle position when the combination lock is operated in an opened mode;
a locking mechanism configured to engage with the shackle for securing the shackle in the first shackle position when the combination lock is operated in the locked mode;
an electromechanical device coupled to the locking mechanism;
an electronic keypad configured to receive a combination code; and
an electronic processor configured to control the electromechanical device based on the combination code, such that when the combination code matches a preset code, the locking mechanism is caused to disengage from the shackle, causing the combination lock to operate in an unlocked mode, wherein when the combination lock is operated in the unlocked mode, the shackle can be caused to change from the first shackle position to the second shackle position so as to operate the combination lock in the opened mode, and wherein the preset code is indicative of an access level of the combination lock, the access level comprising a first level, a second level and a third level, such that a combination lock user of the first level is allowed to have an unlimited number of access times and to change the preset code for the first level, the preset code for the second level and the preset code of the third level,
a combination lock user of the second level is allowed to have an unlimited number of access times, and
a combination lock user of the third level is allowed to have a limited number of access times,
and wherein the electronic processor is configured to determine the access level based on the combination code.

[Claim 2]

The electronic combination lock according to claim 1, wherein the electronic keypad further comprises a reset button configured to provide to the electronic processor an electronic signal indicative of a procedure to change the preset code.

- [Claim 3] The electronic combination lock according to claim 1, wherein the lock body further comprises a locking hole dimensioned to receive the short leg of the shackle, such that when the combination lock is operated in the locked mode and in the unlocked mode, the short leg of the shackle is engaged with locking hole, and when the combination lock is operated in the opened mode, the short leg of the shackle is disengaged from the locking hole.
- [Claim 4] The electronic combination lock according to claim 3, further comprising a locking ball and a locking bolt, the locking body further comprising a bolt hole dimensioned to receive the locking ball and the locking bolt, and wherein each of the short leg and the long leg of the shackle comprises a cutout, such that when the combination lock is operated in the locked mode, the locking mechanism is configured to engage the locking bolt with the cutout in the short leg and to engage the locking ball with the cutout in the long leg, preventing movement of the shackle from the first shackle position to the second shackle position.
- [Claim 5] The electronic combination lock according to claim 4, wherein the locking mechanism further comprises a rotatable cam operable in a first cam position and a second cam position, and wherein when the rotatable cam is operated in the first cam position, the rotatable cam is configured to prevent disengagement of the locking bolt from the cutout in the short leg and disengagement of the locking ball from the cutout in the long leg, and when the rotatable cam is operated in the second cam position, the rotatable cam is configured to allow the locking bolt to disengage from the cutout in the short leg and allow the locking ball to disengage from the cutout in the long leg so as to allow the shackle to move from the first shackle position to the second shackle position.
- [Claim 6] The electronic combination lock according to claim 5, wherein the locking mechanism further comprises a cam ball and the rotatable cam comprises an indent arranged to engage with the cam ball in order to keep the rotatable cam in the first cam position when the combination lock is operated in the locked mode.
- [Claim 7] The electronic combination lock according to claim 6, wherein when the combination code matches the preset code, the electromechanical device is configured to disengage the cam ball from the indent of the rotatable cam, allowing the rotatable cam to move from the first cam

position to the second cam position so as to operate the combination lock in the unlocked mode.

[Claim 8] The electronic combination lock according to claim 7, wherein the electromechanical device comprises a solenoid having a tip locatable in a first tip position to keep the rotatable cam in the first cam position and in a second tip position to allow the rotatable cam to move from the first cam position to the second cam position.

[Claim 9] The electronic combination lock according to claim 8, wherein when the combination code matches the preset code, the tip of the solenoid is caused to move from the first tip position to the second tip position.

[Claim 10] The electronic combination lock according to claim 3, wherein the locking mechanism comprises a latch and a locking ring, the latch having a latch fork, wherein the locking ring is dimensioned to rotatably attach to the long leg of the shackle and the locking ring comprises a circular groove dimensioned to receive the latch fork, such that when the combination lock is operated in the locked mode, the latch fork is engaged with the circular groove of the locking ring so as to prevent movement of the shackle from the first shackle position to the second shackle position.

[Claim 11] The electronic combination lock according to claim 10, wherein the long-leg channel comprises a longitudinal axis, and wherein the electromechanical device comprises a solenoid having a tip locatable in a first tip position to maintain engagement of the latch fork with the circular groove of the locking ring, and in a second tip position to disengage the latch fork from the locking ring so as to allow the shackle to move from the first shackle position to the second shackle position in a direction substantially parallel to the longitudinal axis of the long-leg channel.

[Claim 12] The electronic combination lock according to claim 11, wherein when the combination code matches the preset code, the tip of the solenoid is caused to move from the first tip position to the second tip position.

[Claim 13] The electronic combination lock according to claim 10, further comprising
a cylinder,
a rotatable cam coupled to the cylinder;
a fixed cam positioned in relationship to the rotatable cam for providing the locking hole; and
a blocking plate movably attached to the rotatable cam, the blocking

plate locatable in a first plate position for blocking the locking hole and in a second plate position for unblocking the locking hole, such that when the cylinder is caused to rotate by a matching key, the rotatable cam is configured to move the blocking plate from the first plate position to the second plate position so as to operate the combination lock in the unlocked mode.

[Claim 14] The electronic combination lock according to claim 13, wherein the long-leg channel comprises a longitudinal axis, and wherein when the blocking plate is located in the second plate position, the shackle is allowed to rotate about the long-leg in a direction substantially perpendicular to the longitudinal axis so as to operate the combination lock in the opened mode.

[Claim 15] The electronic combination lock according to claim 1, further comprising:
an electronic signal receiver configured to receive an electronic signal indicative of the combination code and to provide the combination code to the electronic processor so as to allow the electronic processor to determine whether the combination code matches the preset code.

[Claim 16] The electronic combination lock according to claim 1, wherein the combination lock user of the first level has unlimited number of access times to open the combination lock, whereas a combination lock user of the third level has a limited number of access times, and whether the combination user of the second level has unlimited number of access times or limited number of access times is determined by the combination lock user of the first level.

[Claim 17] A method for controlling an electronic combination lock operable in a locked mode, an unlocked mode and an opened mode, the electronic combination lock comprising a lock body, a shackle locatable in a first shackle position in relationship to the lock body when the combination lock is operated in the locked mode and in a second shackle position when the combination lock is operated in the opened mode, the shackle having a short leg and a long leg, said method comprising:
providing a long-leg channel in the lock body to receive the long leg of the shackle;
providing a locking mechanism in the lock body, the locking mechanism arranged to engage with the shackle for securing the shackle in the first shackle position when the combination mode is operated in the locked mode;

providing an electromechanical device in the lock body, coupled to the locking mechanism;

providing an electronic keypad on the lock body, configured to receive a combination code; and

providing an electronic processor in the lock body for controlling the electromechanical device based on the combination code, such that when the combination code matches a preset code, the electromechanical device is arranged to disengage the locking mechanism from the shackle, causing the combination lock to operate in the unlocked mode, and when the combination lock is operated in the unlocked mode, the shackle can be caused to change from the first shackle position to the second shackle position so as to operate the combination lock in the opened mode, and wherein the preset code is indicative of an access level of the combination lock, the access level comprising a first level, a second level and a third level, such that a combination lock user of the first level is allowed to have unlimited number of access time and to change the preset code for the first level, the preset code for the second level and the preset code of the third level,

a combination lock user of the second level is allowed to have an unlimited number of access times, and

a combination lock user of the third level is allowed to have a limited number of access time prohibited from changing the preset code, wherein the electronic processor is configured to determine the access level based on the combination code.

[Claim 18]

The method according to claim 17, further comprising:

providing a reset button on the electronic keypad, the reset button configured to provide the electronic processor an electronic signal indicative of a procedure to change the preset code.

[Claim 19]

The method according to claim 17, wherein the combination lock user of the first level has unlimited number of access times to open the combination lock, whereas a combination lock user of the third level has a limited number of access times, and whether the combination user of the second level has unlimited number of access times or limited number of access times is determined by the combination lock user of the first level.


[Claim 20]

The method according to claim 17, further comprising:

providing an electronic signal receiver configured to receive an

electronic signal indicative of the combination code and to provide the combination code to the electronic processor so as to allow the electronic processor to determine whether the combination code matches the preset code.

FIG 2

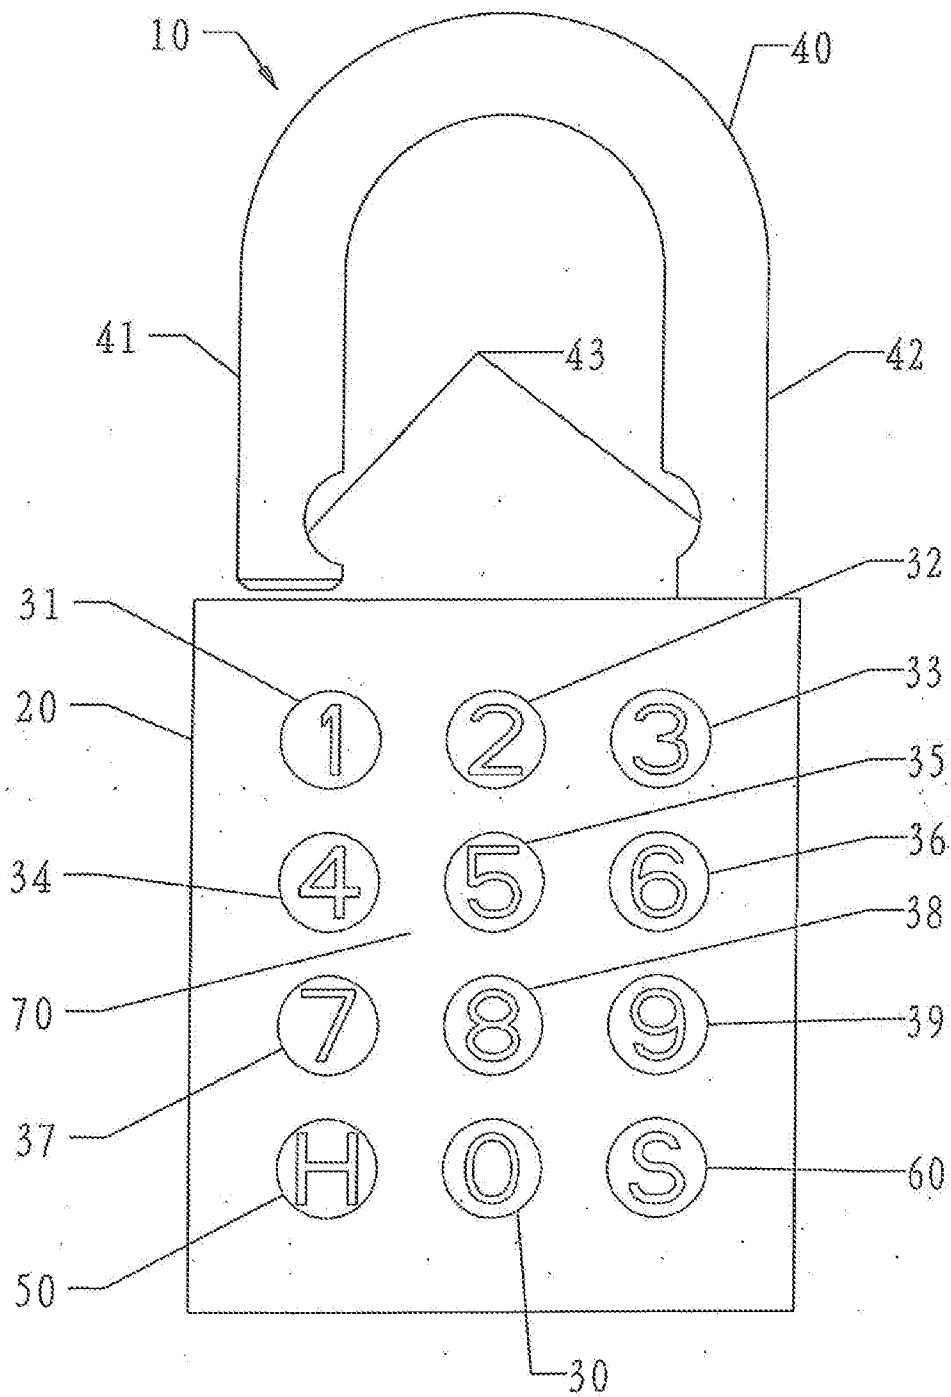

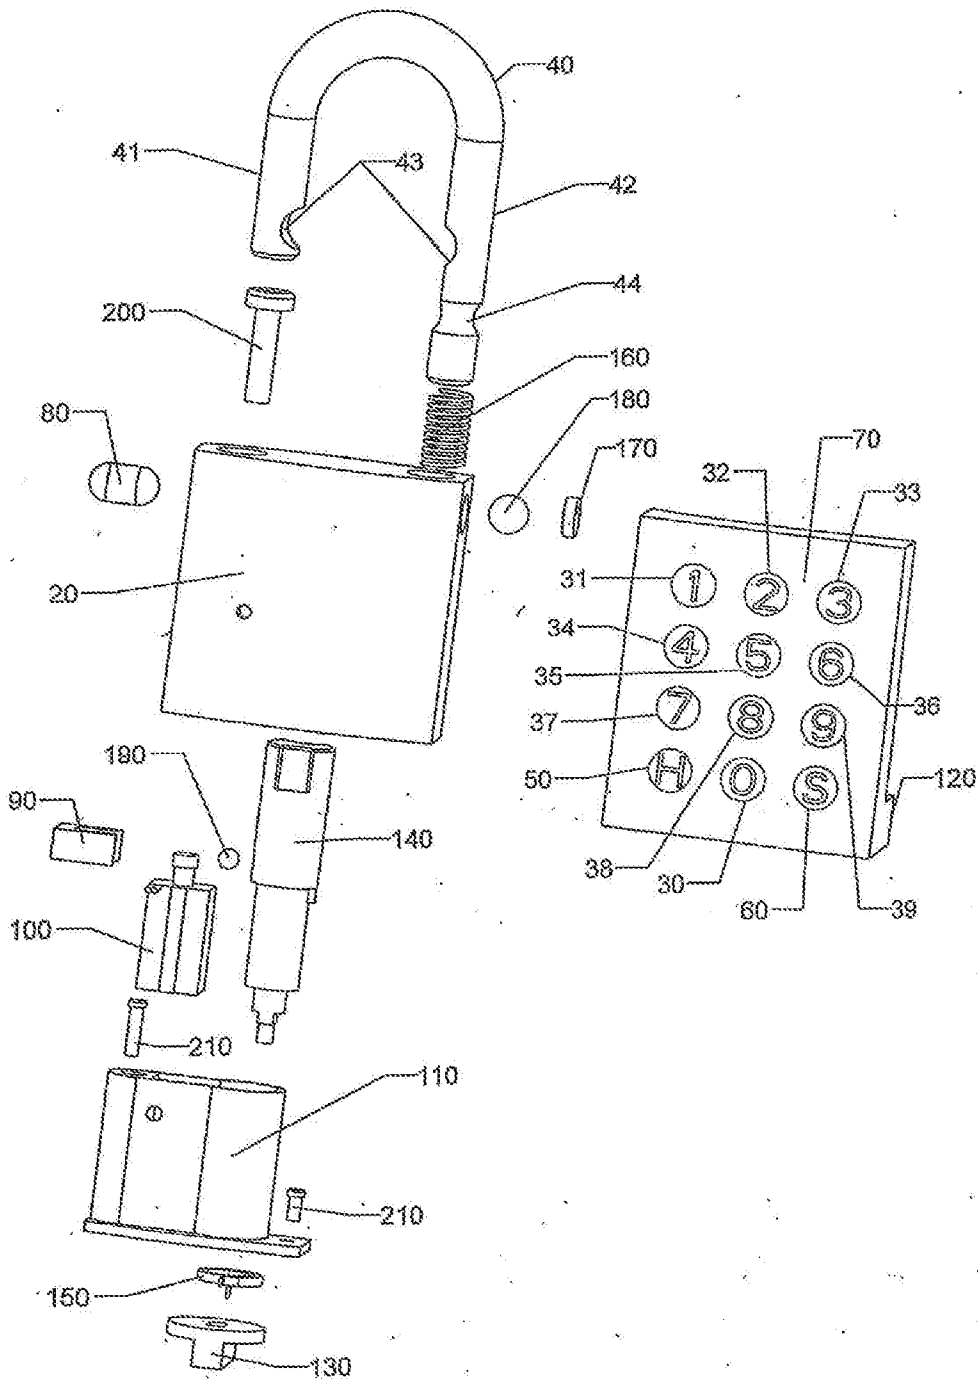


FIG 3

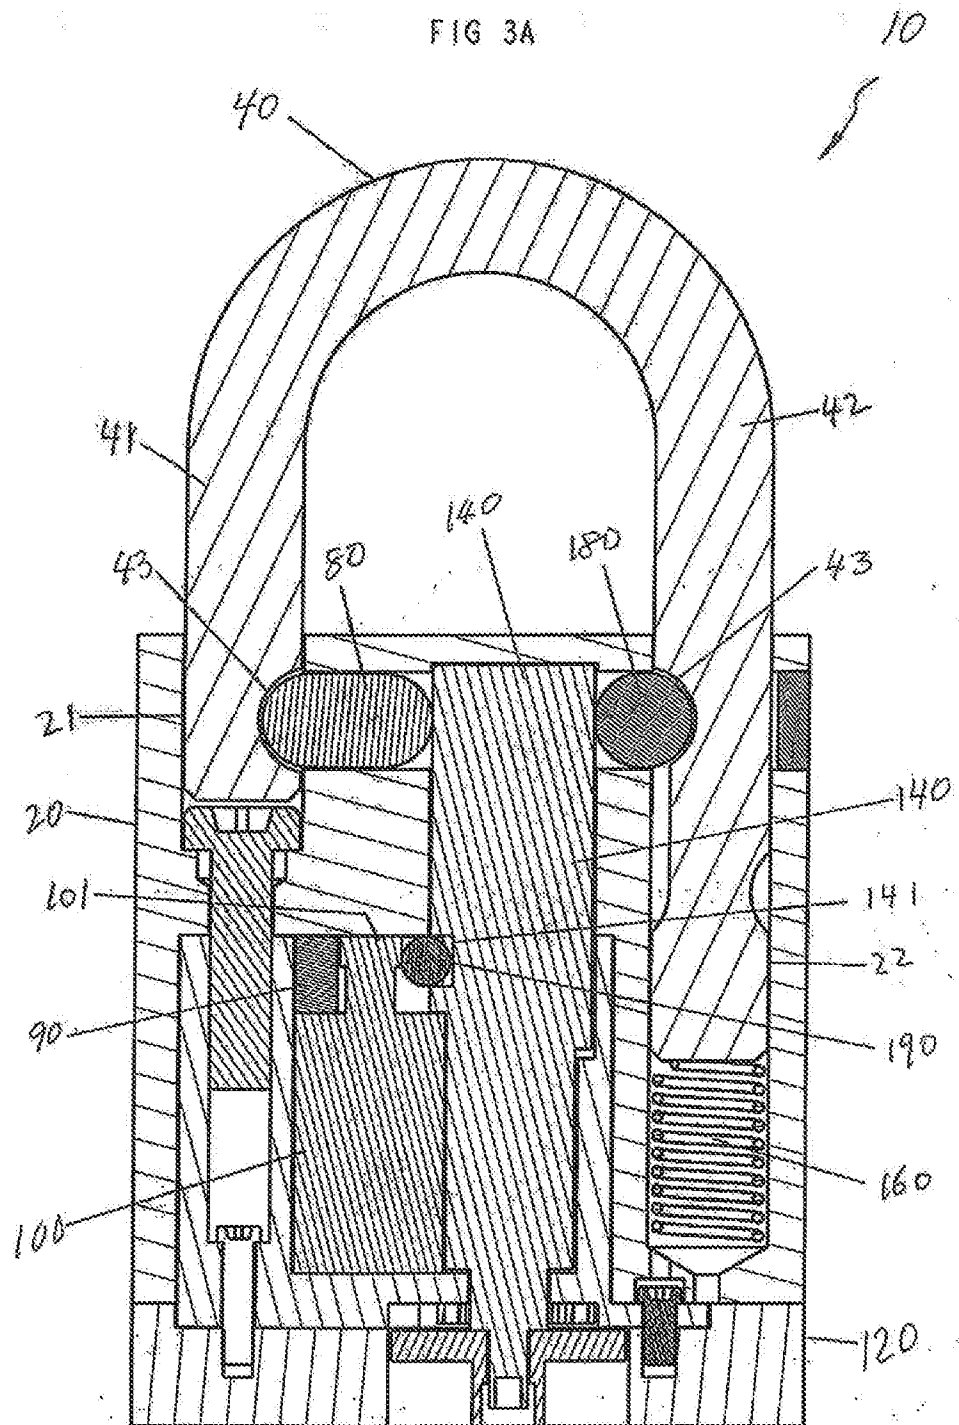
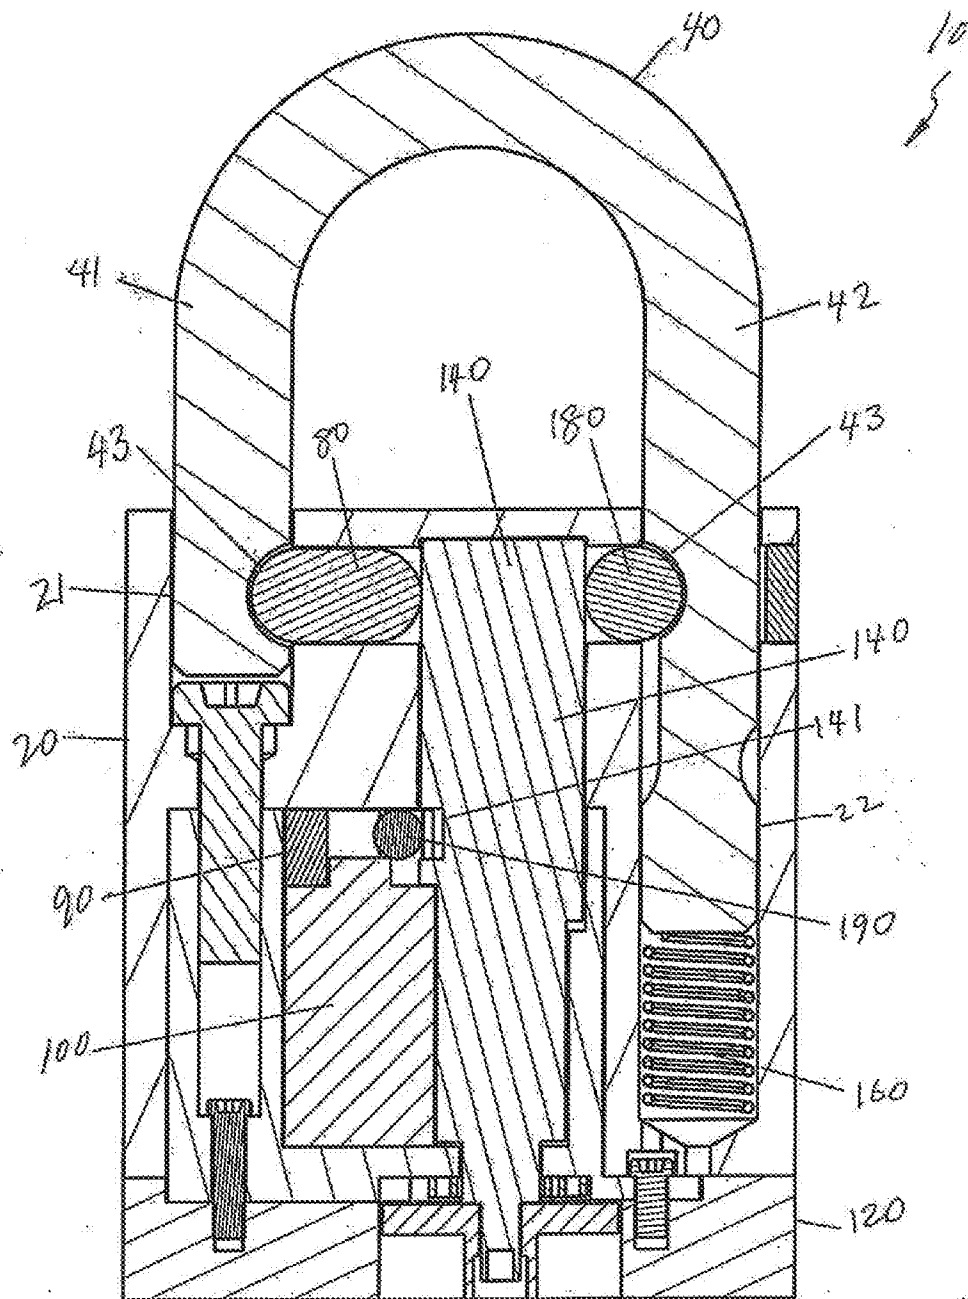


FIG 38



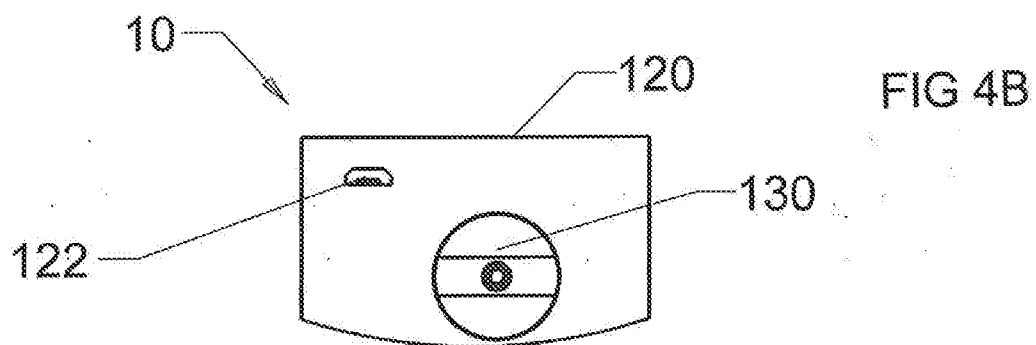
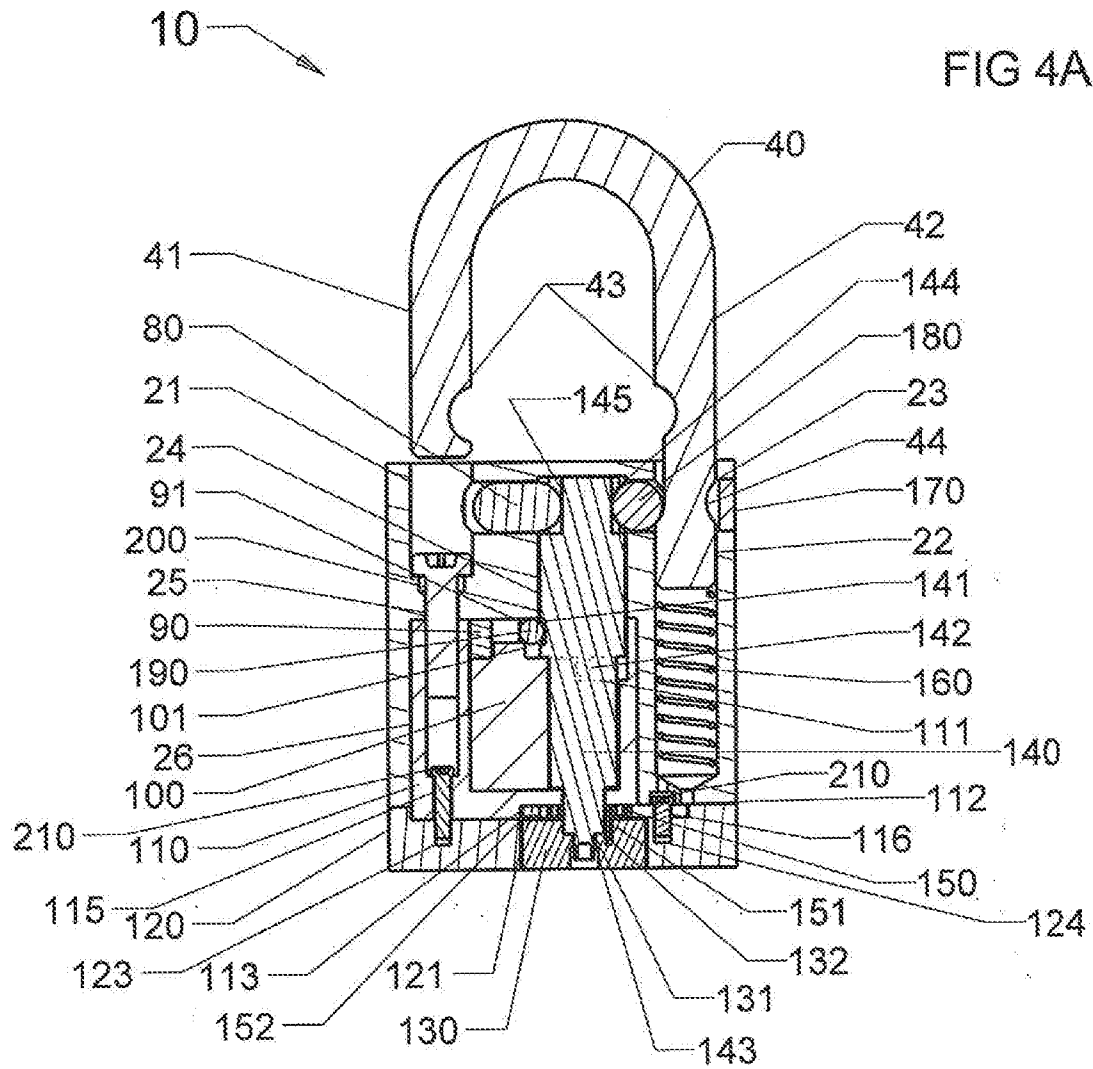


FIG 5

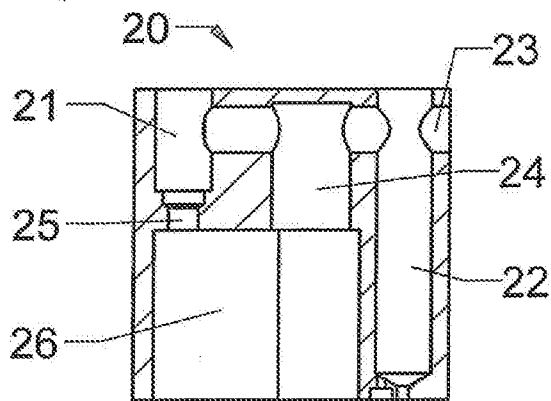


FIG 6

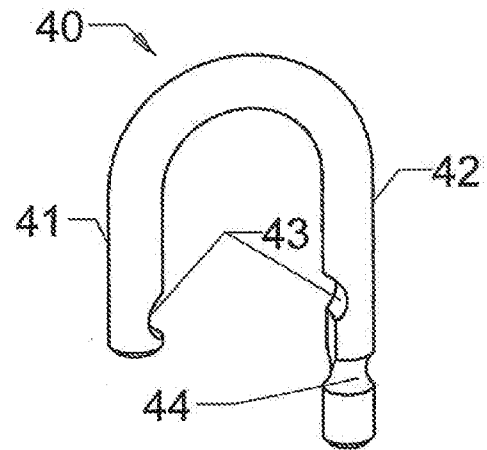


FIG 7




FIG 8

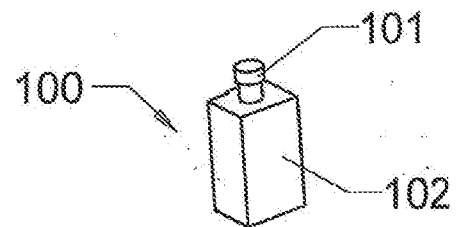


FIG 9A

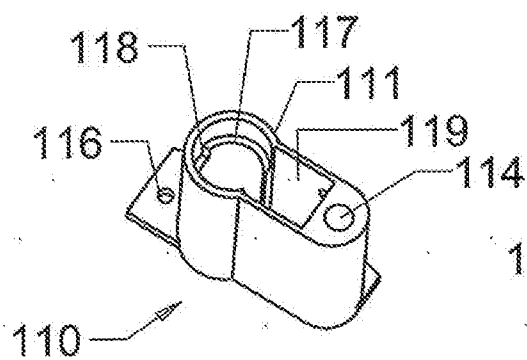


FIG 9B

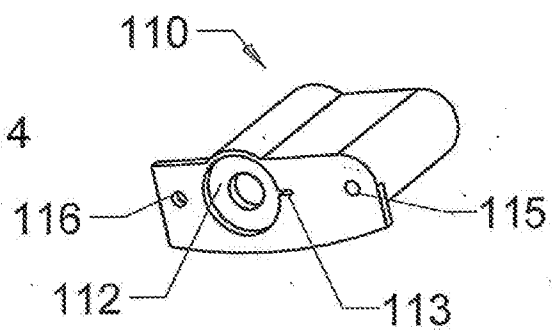


FIG 10A

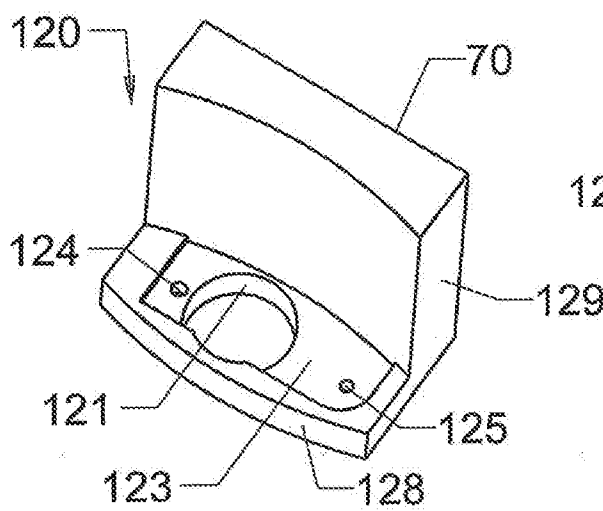


FIG 10B

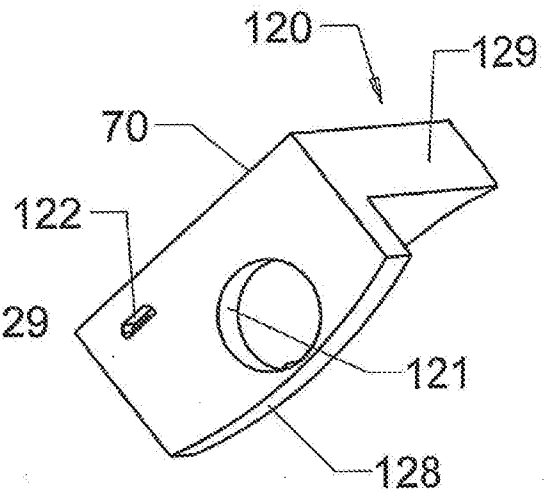


FIG 11A

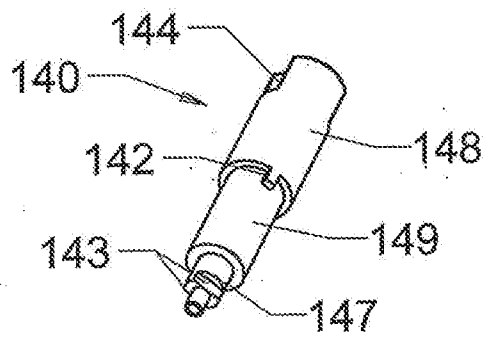


FIG 11B

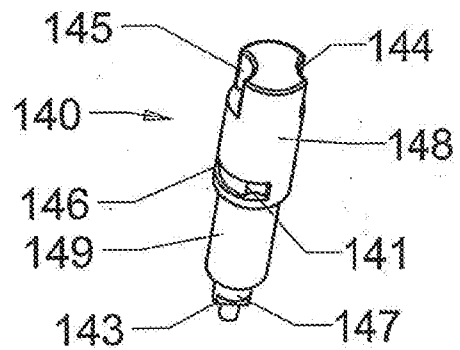


FIG 12

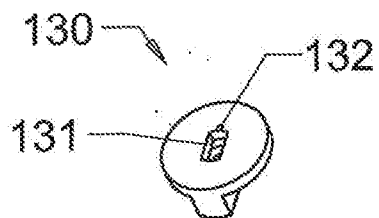
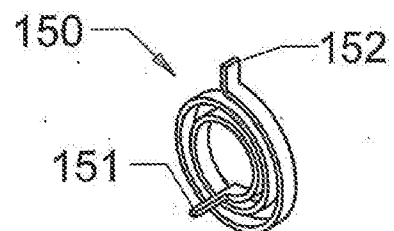


FIG 13



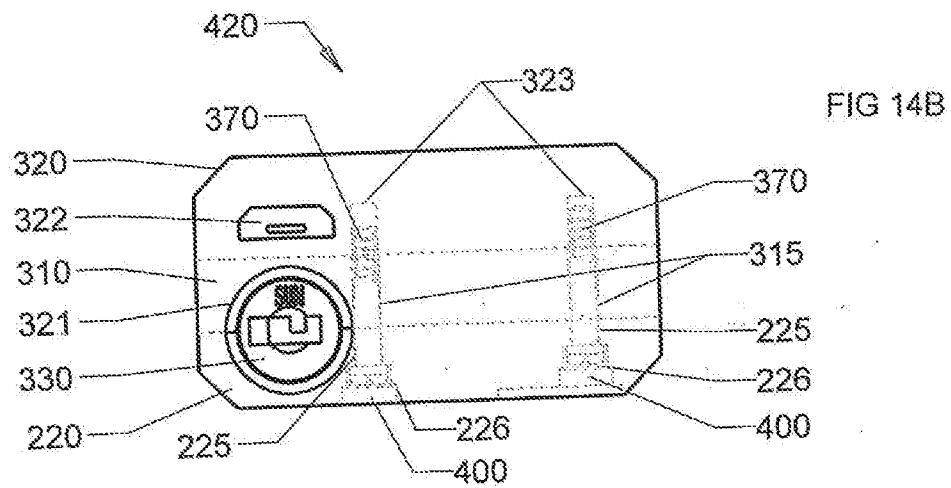
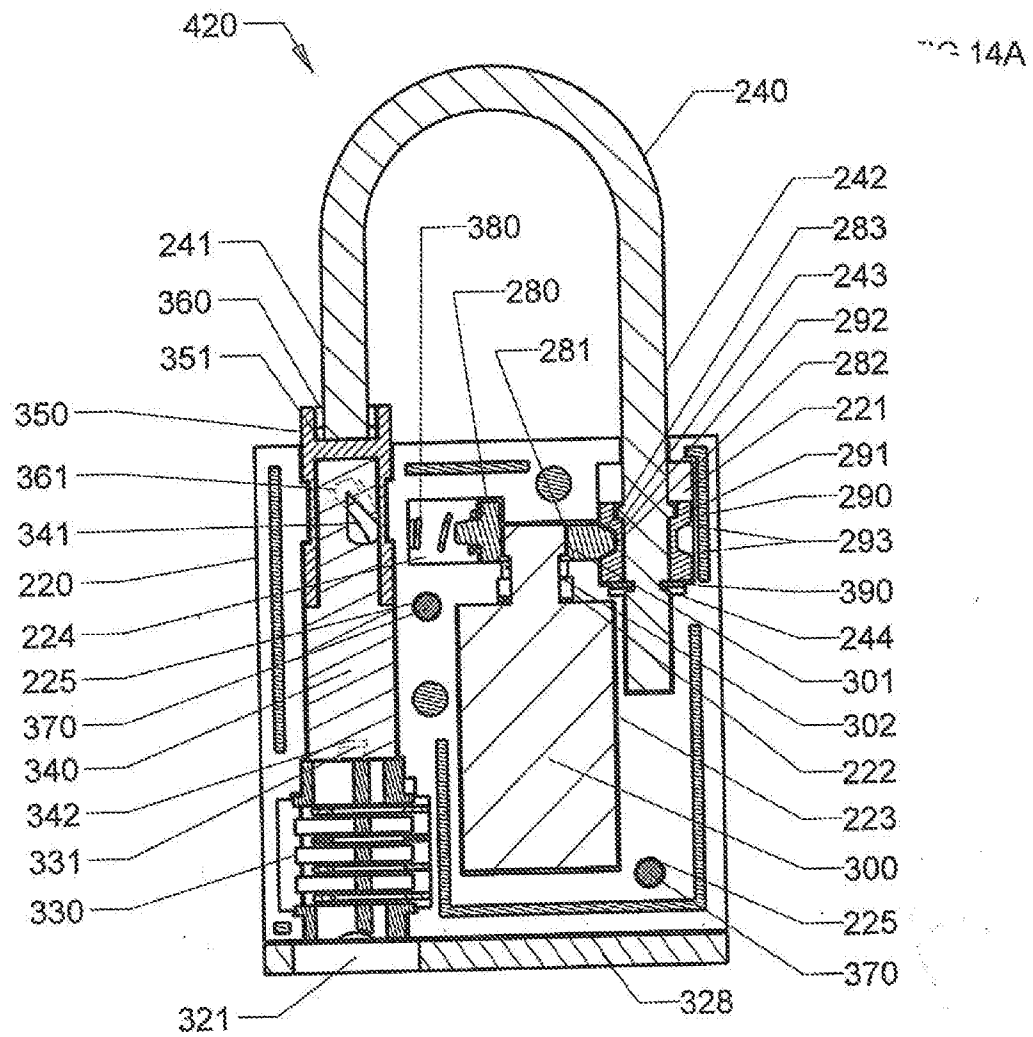


FIG 15

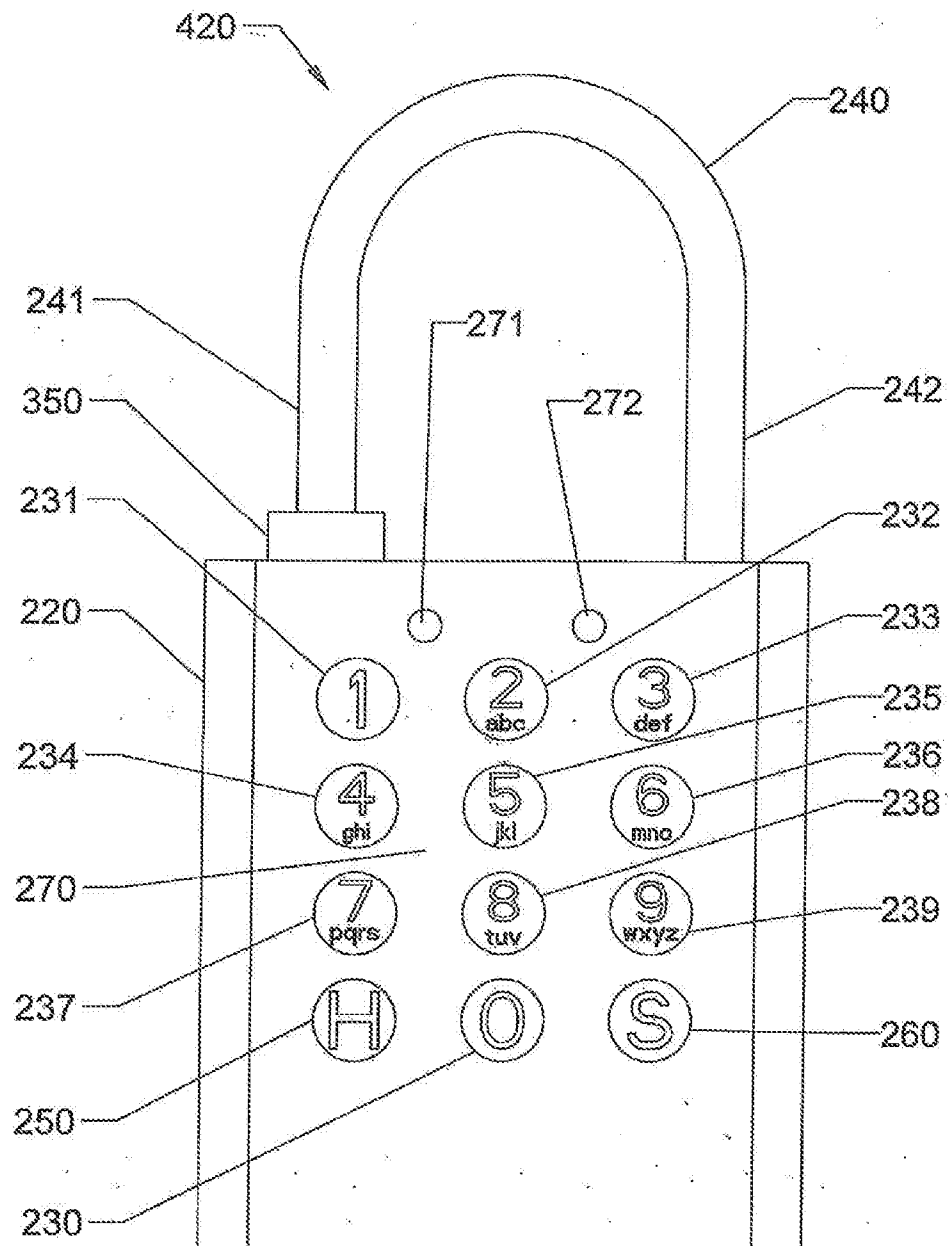


FIG 16

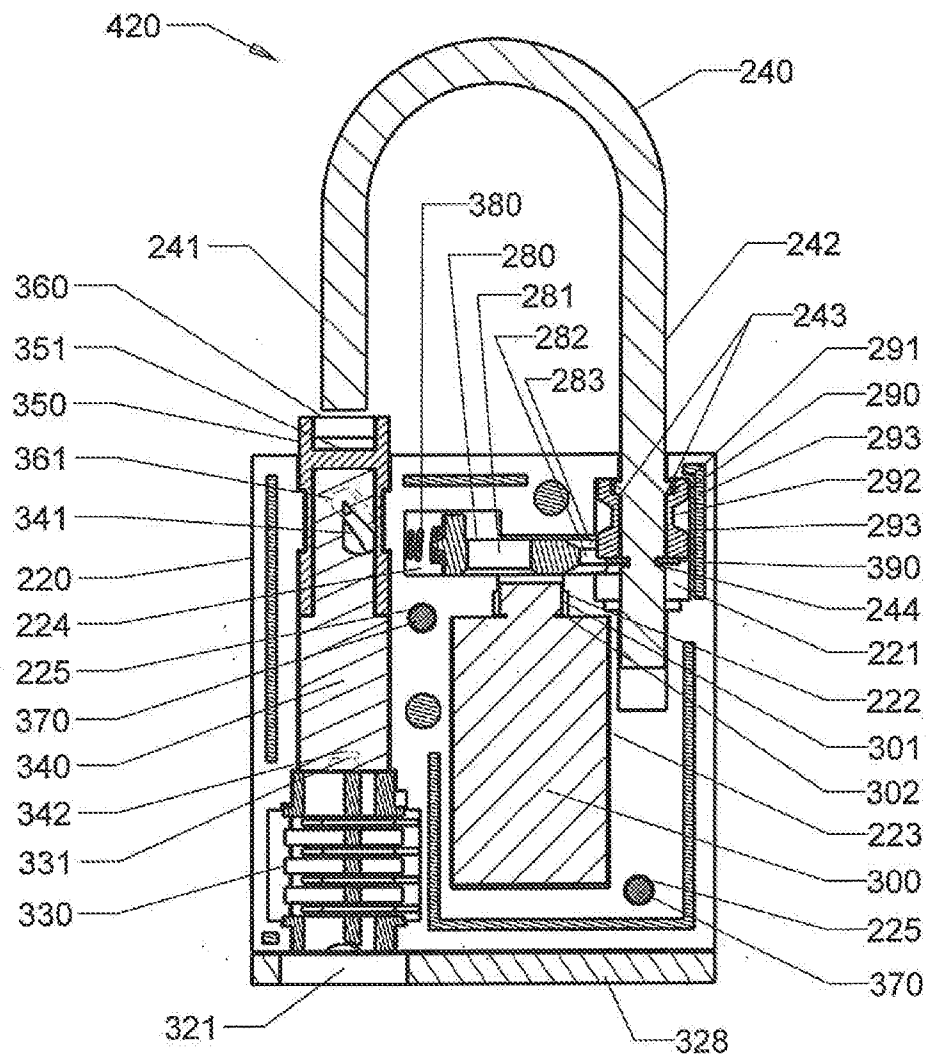


FIG 17A

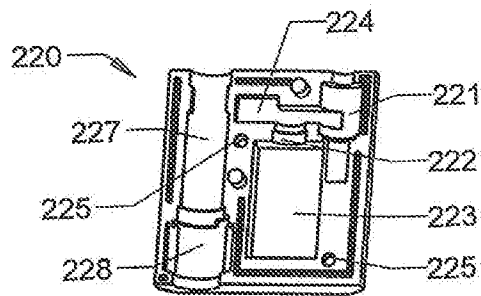


FIG 17B

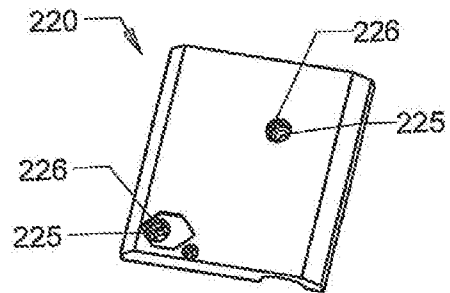


FIG 18

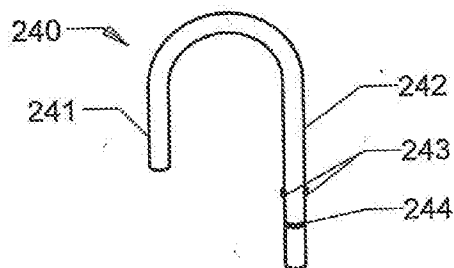


FIG 19A

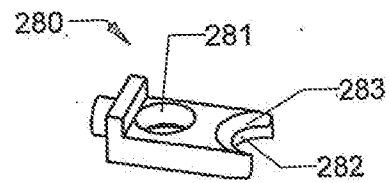


FIG 19B

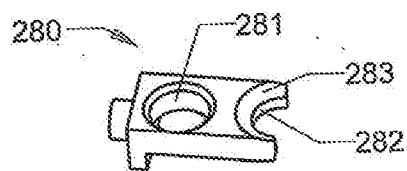


FIG 20A

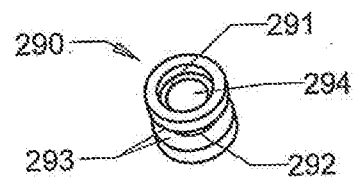


FIG 20B



FIG 21

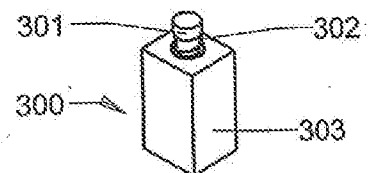


FIG 22

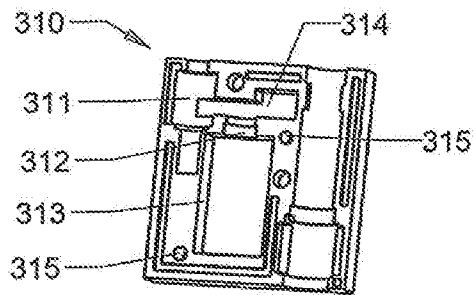


FIG 23A

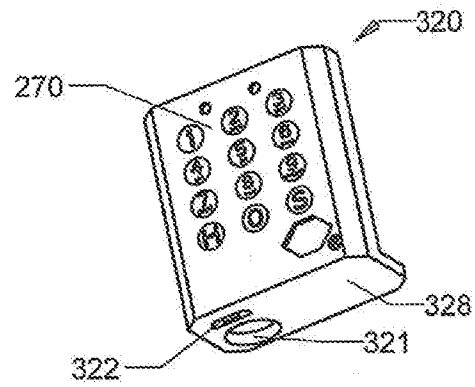


FIG 23B

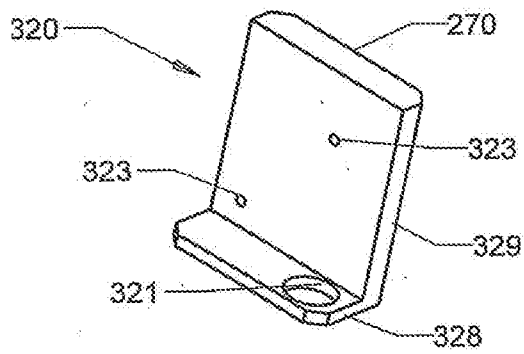


FIG 24

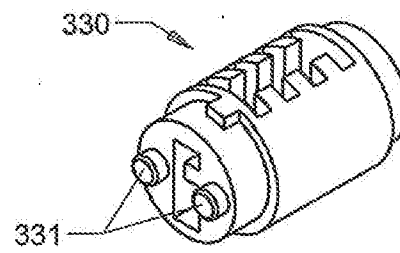


FIG 25

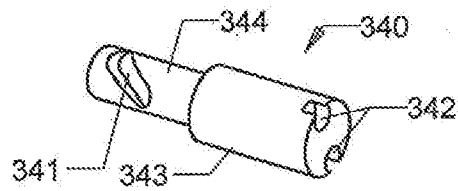


FIG 26

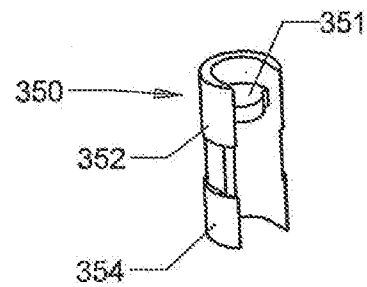


FIG 27

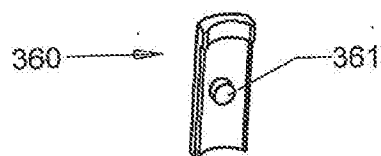



FIG 28



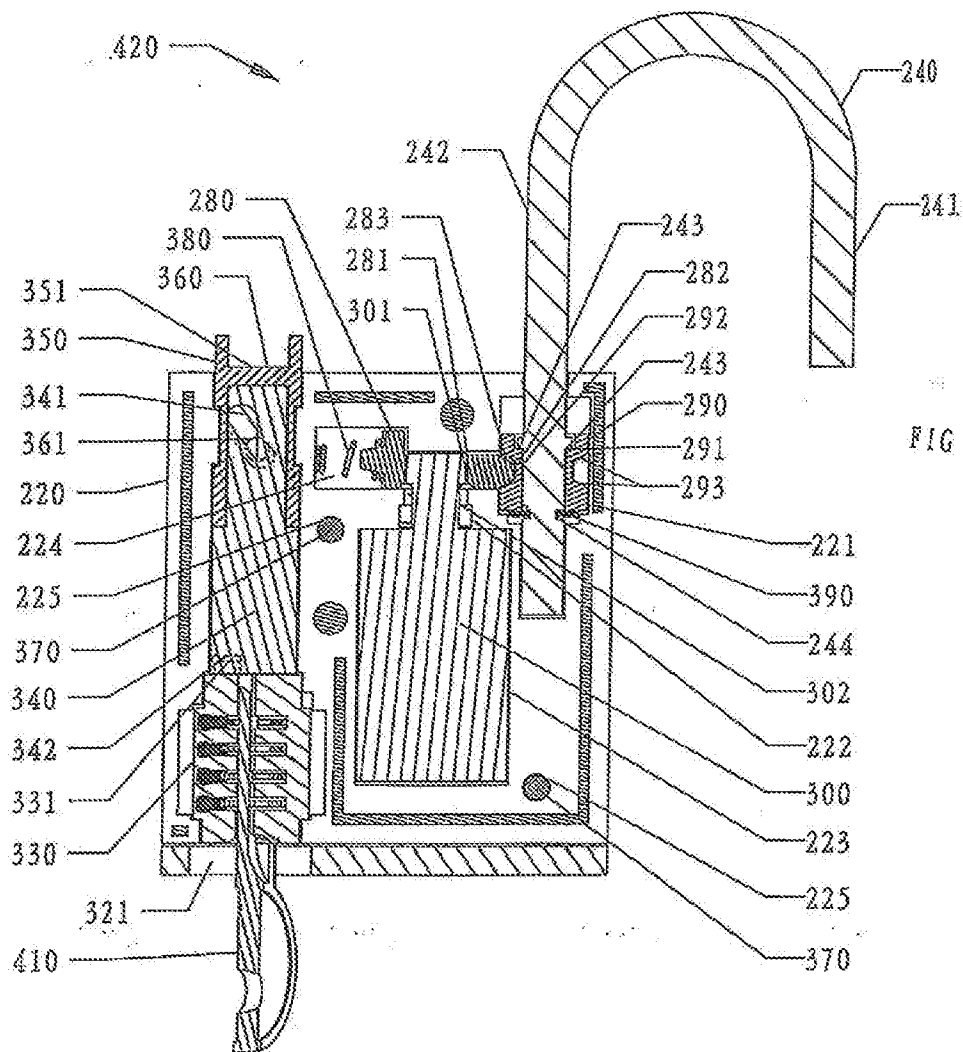


FIG 29A

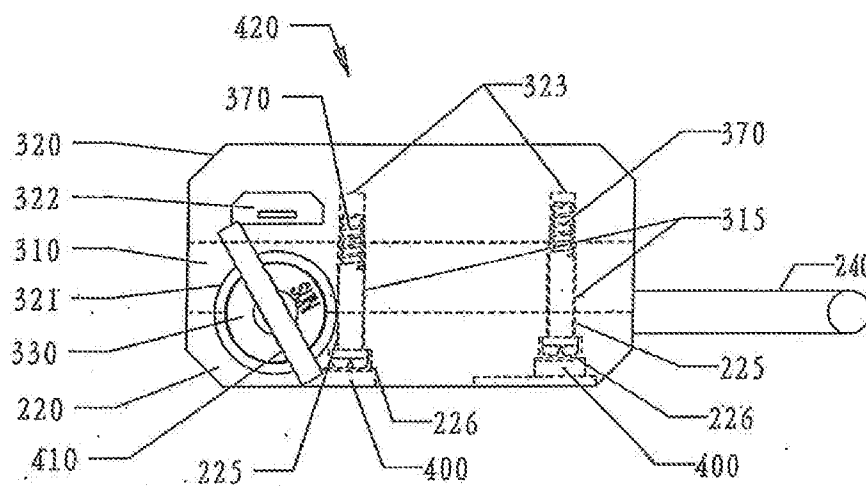
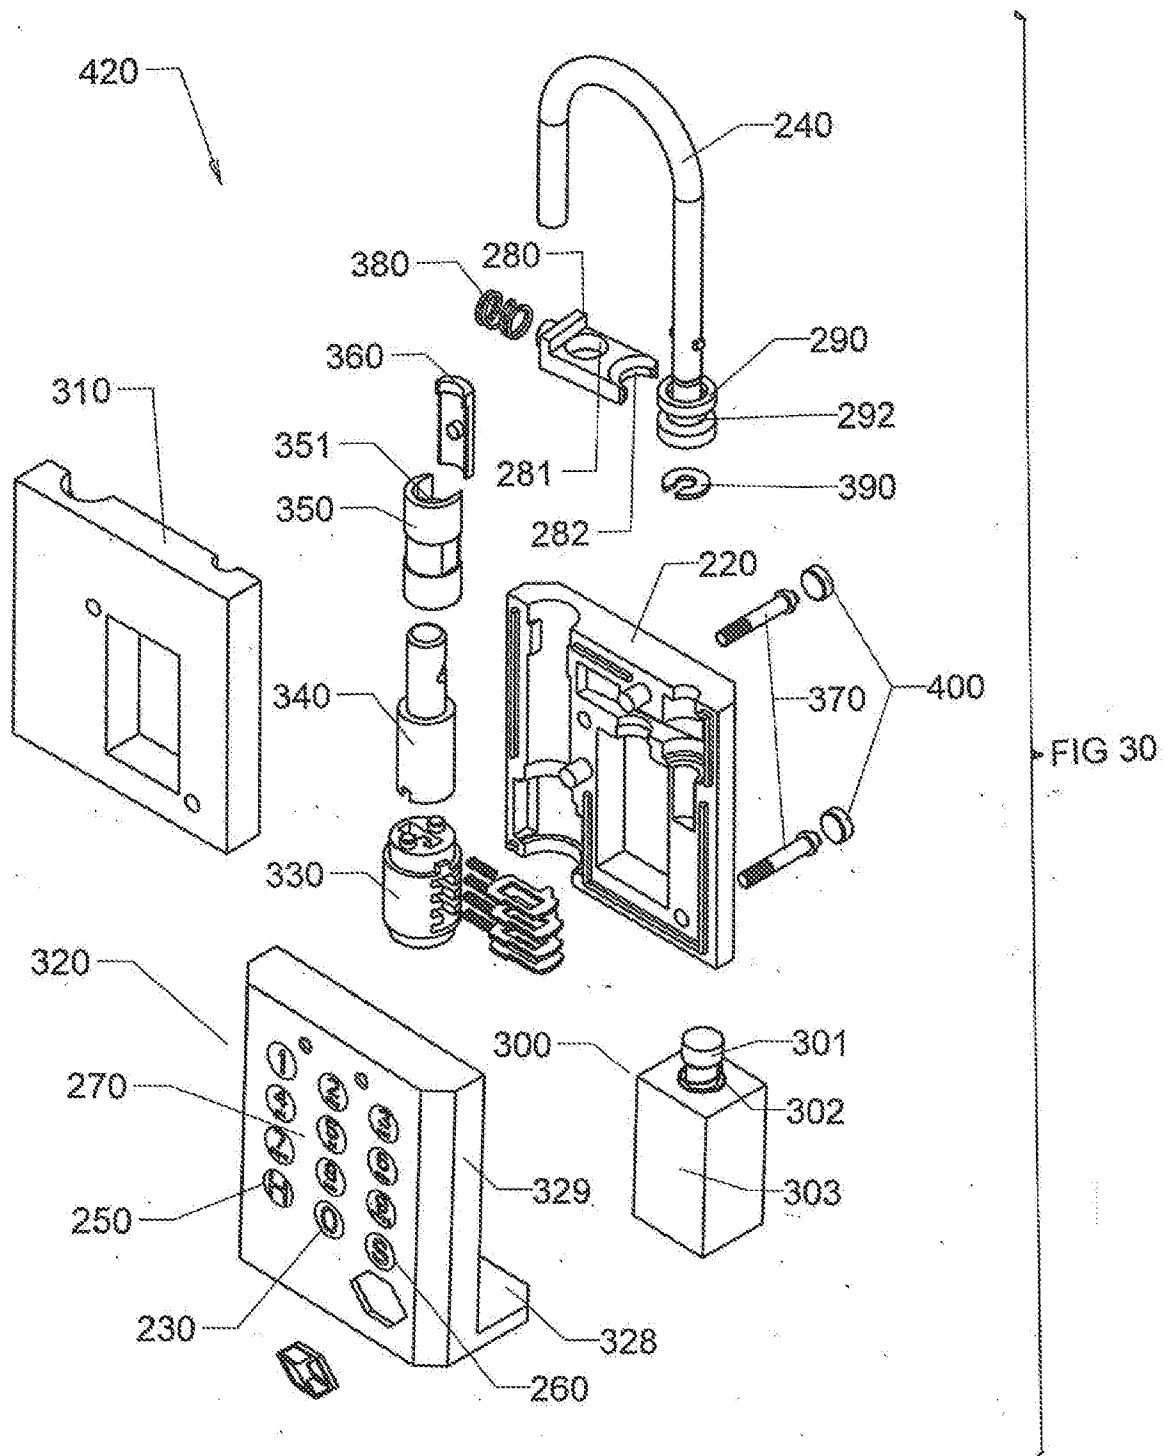


FIG 29B



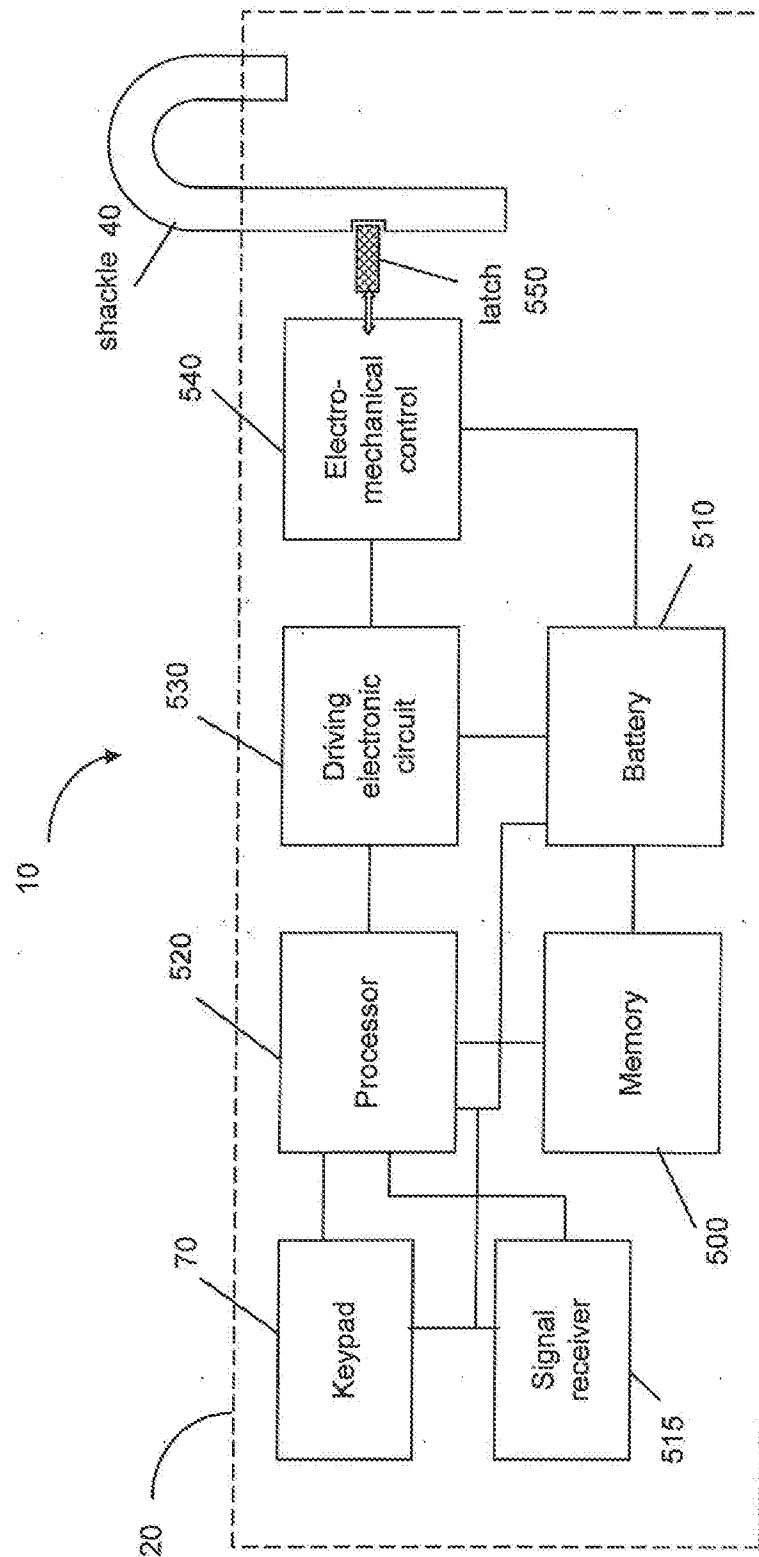


FIG. 31

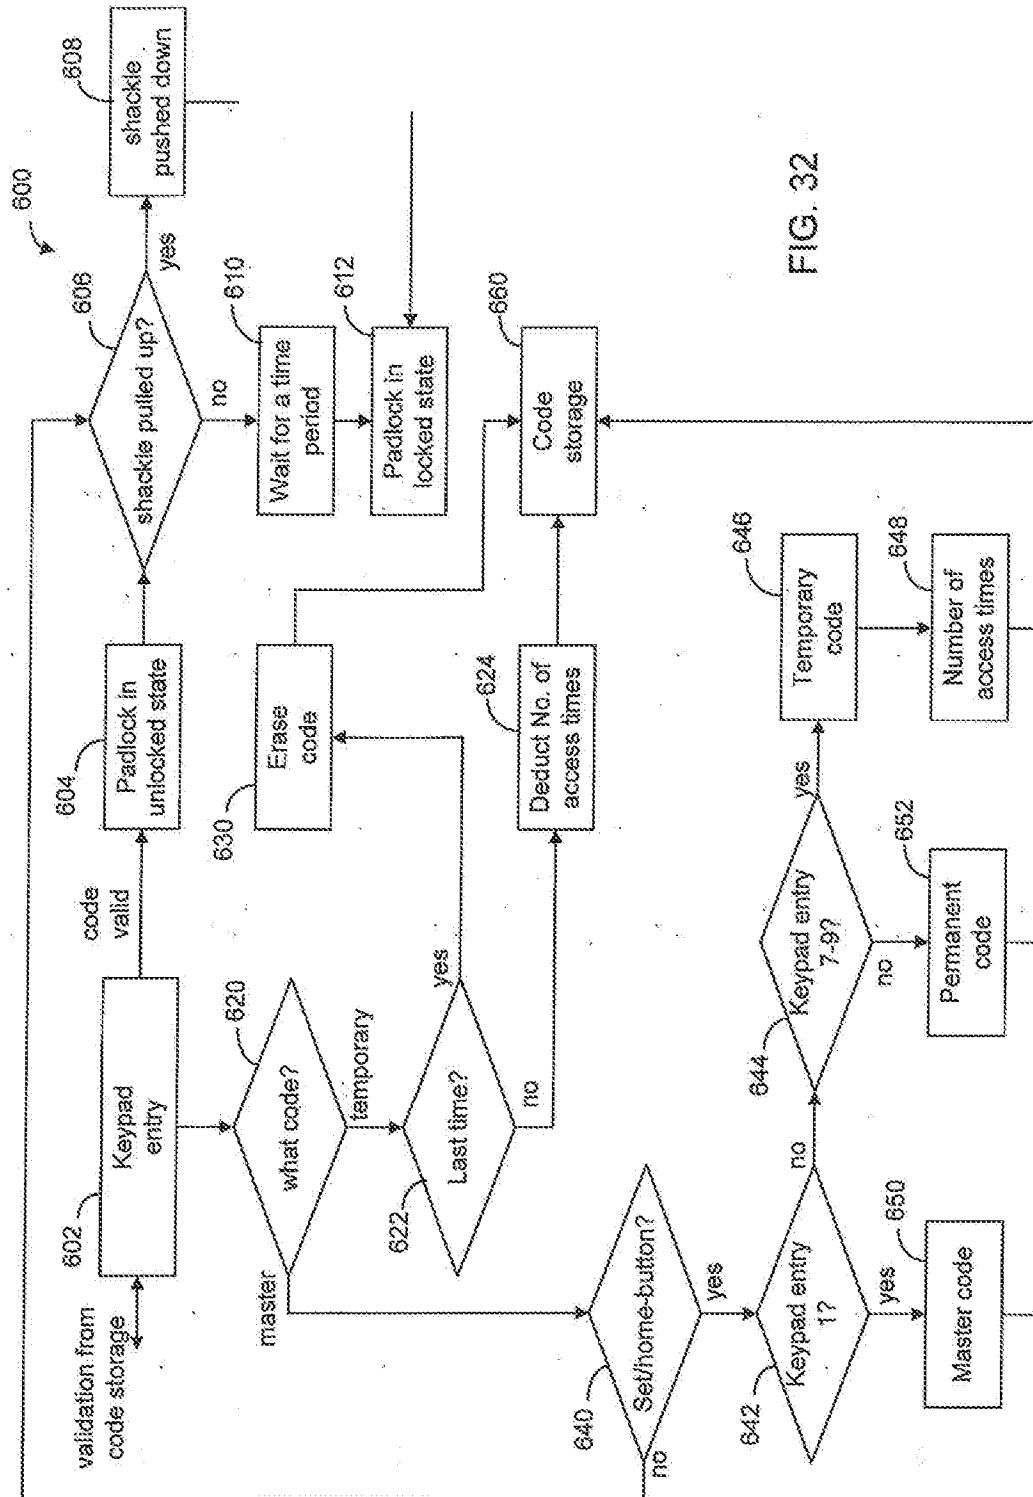


FIG. 32

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/108711

A. CLASSIFICATION OF SUBJECT MATTER

E05B 49/00(2006.01)i; E05B 67/00(2006.01)n

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E05B67; E05B49; E05B37

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, VEN: combination, lock, access, level, authorization

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 8225629 B2 (ZURASKI ROBERT D ET AL.) 24 July 2012 (2012-07-24) description, paragraphs [0043], [0052] to [0056], claims 1 and 17, and figures 12 to 16	1-20
A	US 4677284 A (GENEST LEONARD JOSEPH) 30 June 1987 (1987-06-30) the abstract	1-20
A	KR 20080001597 U (HWA S J) 05 June 2008 (2008-06-05) the whole document	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

24 January 2017

Date of mailing of the international search report

07 February 2017

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

WANG, Zhenhua

Facsimile No. (86-10)62019451

Telephone No. (86-10)62084885

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/108711

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	8225629	B2	24 July 2012	US	2009282876	A1	19 November 2009
US	4677284	A	30 June 1987	DE	3628525	A1	26 February 1987
				AU	579476	B2	24 November 1988
				AU	5839886	A	26 February 1987
				FR	2586447	B1	30 June 1989
				CA	1240768	A	16 August 1988
				BE	905006	A1	16 October 1986
				GB	2179394	B	18 January 1989
				GB	2179394	A	04 March 1987
				FR	2586447	A1	27 February 1987
KR	20080001597	U	05 June 2008	None			