



(22) Date de dépôt/Filing Date: 2004/09/01

(41) Mise à la disp. pub./Open to Public Insp.: 2006/03/01

(51) Cl.Int./Int.Cl. *G06F 17/40* (2006.01)


(71) Demandeur/Applicant:
HONDA MOTOR CO., LTD., JP

(72) Inventeurs/Inventors:
KIUCHI, YOICHI, CA;
FUKUDA, TAKASHI, JP;
YE, JEANETTE, CA

(74) Agent: GASTLE AND ASSOCIATES

(54) Titre : SYSTEME DE COMMANDE DE CHAÎNE DE MONTAGE, PROTOCOLE DE DONNÉES D'IMMOBILISATEUR
ET DEROULEMENT DES COMMUNICATIONS

(54) Title: ASSEMBLY LINE CONTROL SYSTEM AND IMMOBILIZER DATA PROTOCOL AND COMMUNICATION
PROCESS FLOW

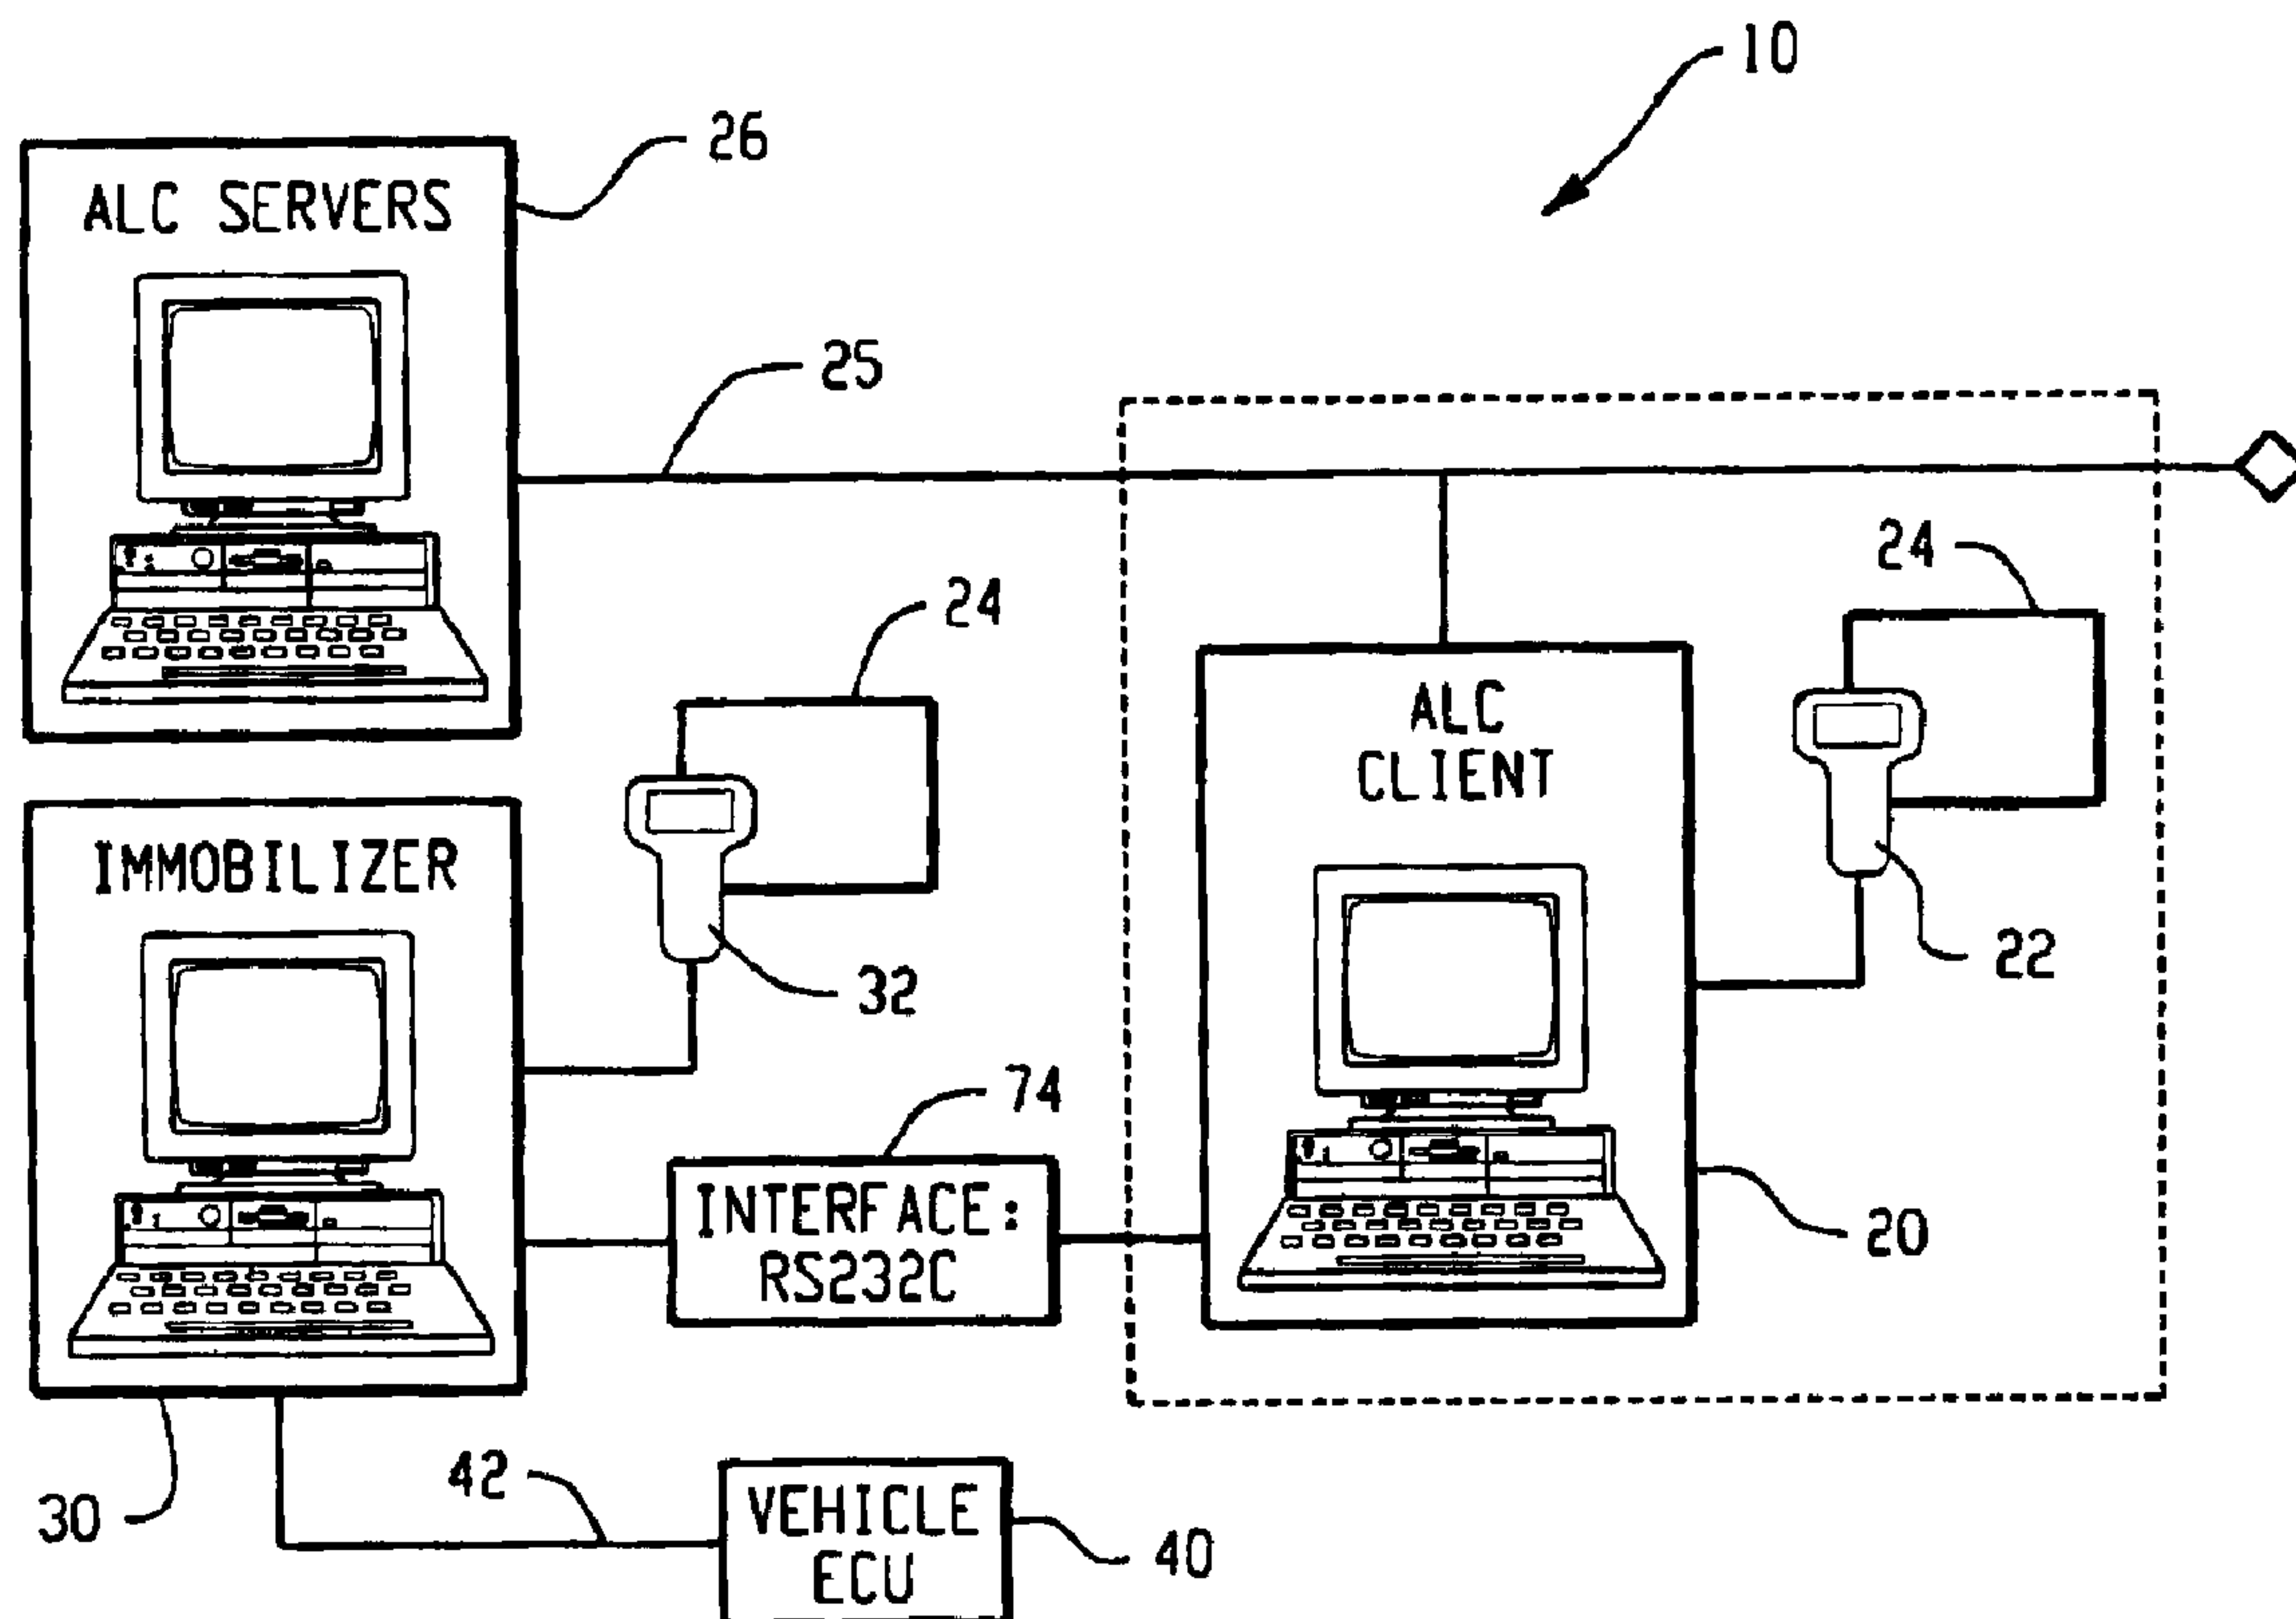

(57) Abrégé/Abstract:

A method and related apparatus are disclosed of guaranteeing VIN registration to a vehicle's ECU. A vehicle identifier is entered into a production control system connected to a network. The entered vehicle identifier is compared with an expected vehicle identifier. If a match is obtained between the entered and expected vehicle identifiers, the vehicle identifier is sent from the

(57) Abrégé(suite)/Abstract(continued):

production control system to a vehicle immobilizer. A vehicle identifier acknowledgement is received at the production control system from the vehicle immobilizer. The production control system verifies the vehicle identifier embedded in the acknowledgement. If a match is obtained, an information record associated with the vehicle identifier is sent from the production control system to the vehicle immobilizer. An information record acknowledgement is received at the production control system from the vehicle immobilizer. The production control system verifies the information record embedded in the acknowledgement. If a match is obtained; an authorization message is sent from the production control system to the vehicle immobilizer. The vehicle identifier and the associated information record from the vehicle immobilizer are written into an electronic control unit incorporated into the vehicle in response to the authorization message. The vehicle immobilizer then continues to write other data into the vehicle's ECU. After all the writing is complete, the vehicle immobilizer reads from the vehicle's ECU the vehicle identifier and the information record, and sends them back to the production control system for final verification. If the two pieces of information from the ECU match the two pieces of information held by the production control system, the production control system sends a complete message to the immobilizer and records the VIN registration record in the central database. Upon receiving the complete message, the immobilizer resumes to its ready state and the ECU data registration process is complete.

ABSTRACT OF THE DISCLOSURE

[0048] A method and related apparatus are disclosed of guaranteeing VIN registration to a vehicle's ECU. A vehicle identifier is entered into a production control system connected to a network. The entered vehicle identifier is compared with an expected vehicle identifier. If a match is obtained between the entered and expected vehicle identifiers, the vehicle identifier is sent from the production control system to a vehicle Immobilizer. A vehicle identifier acknowledgement is received at the production control system from the vehicle Immobilizer. The production control system verifies the vehicle identifier embedded in the acknowledgement. If a match is obtained, an information record associated with the vehicle identifier is sent from the production control system to the vehicle Immobilizer. An information record acknowledgement is received at the production control system from the vehicle Immobilizer. The production control system verifies the information record embedded in the acknowledgement. If a match is obtained, an authorization message is sent from the production control system to the vehicle Immobilizer. The vehicle identifier and the associated information record from the vehicle Immobilizer are written into an electronic control unit incorporated into the vehicle in response to the authorization message. The vehicle Immobilizer then continues to write other data into the vehicle's ECU. After all the writing is complete, the vehicle Immobilizer reads from the vehicle's ECU the vehicle identifier and the information record, and sends them back to the production control system for final verification. If the two pieces of information from the ECU match the two pieces of information held by the production control system, the production control system sends a complete message to the Immobilizer and records the VIN registration record in the

central database. Upon receiving the complete message, the Immobilizer resumes to its ready state and the ECU data registration process is complete.

ASSEMBLY LINE CONTROL SYSTEM AND IMMOBILIZER DATA PROTOCOL AND COMMUNICATION PROCESS FLOW

BACKGROUND OF THE INVENTION

[0001] In accordance with regulations established by CARB (California Air Resources Board), a vehicle's VIN (Vehicle Identification Number) must be registered to the vehicle's ECU (Electronic Control Unit). In known manufacturing processes, the VIN data for a particular vehicle is read from an external record, i.e. from a body assembly sheet or other hard copy attached to the vehicle. The VIN data is then read into an Immobilizer, a device that communicates with the vehicle ECU and writes to the ECU memory, which then writes the VIN to the ECU. In the event that an incorrect VIN is provided (i.e. vehicle assembly sheet error; improper scan; etc.) there is no procedure for detecting the error, or ensuring that the error does not occur in the first place. Thus, the Immobilizer has no capability of verifying the correct VIN data.

[0002] The manufacturing facility maintains records of information about a vehicle. Such information includes the factory vehicle specifications, specific components included in the vehicle, and a manufacturing history of the vehicle on the particular production shift. This information is collected by a computer-implemented production control system and stored in a central database. However, the known Immobilizer is not linked to the production control system, as generally indicated in Fig. 1D. Thus, there is no way to store the ECU VIN registration record in the central database.

SUMMARY OF THE INVENTION

[0003] The difficulties and drawbacks associated with previous-type systems are overcome in one aspect of the present method and related apparatus to guarantee correct ECU VIN data registration. A software application is added to the production control system. The Immobilizer is linked to the new software application. A data protocol and communication process flow are developed to allow the Immobilizer and the software application to talk to each other. With this new setup, the VIN registration process is as follows: a vehicle identifier is entered into the software application connected to the production control system on a network. The entered vehicle identifier is compared with an expected vehicle identifier. If a match is obtained between the entered and expected vehicle identifiers, the vehicle identifier is sent from the software application to the vehicle Immobilizer. A vehicle identifier acknowledgement is received at the software application from the vehicle Immobilizer. The software application verifies the vehicle identifier embedded in the acknowledgement. If a match is obtained, an information record associated with the vehicle identifier is sent from the software application to the vehicle Immobilizer. An information record acknowledgement is received at the software application from the vehicle Immobilizer. The software application verifies the information record embedded in the acknowledgement. If a match is obtained, an authorization message is sent from the software application to the vehicle Immobilizer. The vehicle identifier and the associated information record from the vehicle Immobilizer are written into an electronic control unit incorporated into the vehicle in response to the authorization message. The vehicle Immobilizer then continues to write other data into the vehicle's ECU. After all the writing is complete, the

vehicle Immobilizer reads from the vehicle's ECU the vehicle identifier and the information record, and sends them back to the software application for final verification. If the two pieces of information from the ECU match the two pieces of information held by the software application, the software application sends a complete message to the Immobilizer and notifies the production control system to record the VIN registration record in the central database. Upon receiving the complete message, the Immobilizer resumes to its ready state and the ECU data registration process is complete.

[0004] In another of its aspects, the present invention provides a method of registering data associated with a vehicle comprising the steps of: entering a vehicle identifier into a production control system connected to a network; sending the vehicle identifier and an associated information record from the production control system to a vehicle Immobilizer; and writing the vehicle identifier and the associated information record from the Immobilizer into an electronic control unit incorporated into the vehicle.

[0005] In another of its aspects, there is provided a method of registering data associated with a vehicle comprising the steps of: entering a vehicle identifier into a production control system connected to a network; comparing the entered vehicle identifier with an expected vehicle identifier; if a match is obtained between the entered and expected vehicle identifiers, sending the vehicle identifier from the production control system to a vehicle Immobilizer; receiving a vehicle identifier acknowledgement at the production control system from the vehicle Immobilizer; sending an information record associated with the vehicle identifier from the production control system to the vehicle Immobilizer; receiving an information record acknowledgement at the production control system from the vehicle Immobilizer; sending an authorization message from

the production control system to the vehicle Immobilizer; writing the vehicle identifier and the associated information record from the vehicle Immobilizer into an electronic control unit incorporated into the vehicle in response to the authorization message.

[0006] In still another of its aspects, the present invention provides a system for registering vehicle data comprising: a production control system connected to a network; a vehicle Immobilizer for encoding data into an electronic control unit incorporated into the vehicle; an entering implementation for entering a vehicle identifier into the production control system; a sending implementation, incorporated into the production system, for sending the vehicle identifier and an associated information record from the production control system to the vehicle Immobilizer; and a writing implementation, incorporated into the vehicle Immobilizer, for writing the vehicle identifier and the associated information record from the vehicle Immobilizer into the electronic control unit.

[0007] As will be realized, the invention is capable of other and different embodiments and its several details are capable of modifications in various respects, all without departing from the invention. Accordingly, the drawings and description are to be regarded as illustrative and not restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Figs. 1A, 1B, 1C and 1D are views showing a system configuration in accordance with a preferred embodiment.

[0009] Figs. 2A, 2B, 2C, 2D, 2E, 2F, 2G, 2H, 2I, 2J and 2K depict the data structure of various commands used in communicating between the software application and the Immobilizer in accordance with the preferred embodiment.

[0010] Figs. 3A, 3B, 3C, 3D, 3E, 3F, 3G, 3H, 3I, 3J, 3K, 3L, 3M, 3N, 3O and 3P show the display screens shown on the software application as used in implementing the method in accordance with the preferred embodiment.

[0011] Fig. 4 depicts of the operational flow of the method including the display screens as shown on the software application and the Immobilizer station, in accordance with the preferred embodiment.

[0012] Figs. 5A, 5B, 5C, 5D and 5E are flow charts illustrating the steps of the method on accordance with the preferred embodiment.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0013] Reference will now be made to the figures, where it is understood that like reference numerals refer to like elements. Figs. 1A, 1B and 1C depict a system 10 for registering vehicle data. A software application is provided, preferably a component of an Assembly Line Control System (ALC) called the ALC client 20 in an automotive manufacturing plant. The ALC client 20 is preferably connected to a network 25, which can be a local area network (LAN) or other suitable packet-switched network for communicating between various network systems and components. The ALC client

communicates with ALC servers 26 running in the same network. The servers connect to the ALC database 52. A vehicle Immobilizer 30 is provided for encoding VIN data into an electronic control unit (ECU) 40 incorporated into the vehicle. The ALC client 20 communicates with the Immobilizer, as described hereafter. A terminal server 76 can be provided as the link between the network and the Immobilizer. However, alternate embodiments can be contemplated that do not include a terminal server 76, but can be replaced by a suitable functional equivalent.

[0014] An entering implementation 22 is included for entering a vehicle identifier into the ALC client 20. The entering implementation 22 is preferably a bar code scanner for scanning the vehicle identifier from a bar code on an assembly sheet 24 attached to the vehicle as it comes down the assembly line. Of course, it is appreciated that the data can be entered manually with a keyboard or other such interface, or can be read automatically from the vehicle, e.g. with a pre-programmed radio frequency identification device (RFID) or other such device as is known in the art. The vehicle identifier is preferably a "vehicle identification number" (VIN) such as is commonly used in automobile manufacture.

[0015] The database 52 of the ALC system includes a pre-populated table of expected vehicle identifiers and associated information records. The associated information record includes information on the model, type and options (MTO) associated with the vehicle. This information can be written to the database table upstream in the manufacturing process, in order to "pre-populate" the table. Any other suitable vehicle information can also be included without departing from the invention. The database supplies the expected VINs for use in the comparing step. In the

preferred and illustrated embodiment, the ALC client 20 includes a software application that serves as an interface between the vehicle Immobilizer 30, the scanner 22 and the ALC servers 26.

[0016] In a preferred embodiment, as shown in Fig. 1C, the ALC servers 26 can include a primary object server 50 in communication with the database 52. An alert server 54 can also be used to trace the operation activity and in the event that an error with the operation occurs, as will be explained in detail below. Operation activity can be maintained on a local log 56 in the case of alert server failure. The ALC client 20 hardware can include a terminal/monitor/mouse/keyboard combination, as is known in the art. The ALC client software components can include a GUI (graphic user interface) 60 to display process messages, as will be set forth in detail below. A business controller 62 is used to coordinate the process and to handle messages between the system components. Other ALC client 20 software components include a “to object server interface” 64 for communicating with the primary object server 50, and a “to alert server interface” 66 for communicating with the alert server 54. A “to I/O server interface” 68 is provided for sending data to ALC client’s data handler 70 and out through the ALC client’s port manager 72.

[0017] As will be described more fully hereinafter, the ALC client 20 regulates or controls communication of data between the scanner 22, ALC servers 26 and the vehicle Immobilizer 30. For example, the ALC client 20 receives the VIN from the scanner 22 and following data verification, sends the VIN and an associated information record to the vehicle Immobilizer 30. These steps include: the ALC client 20 compares the entered or scanned VIN with an expected or stored VIN communicated from the

ALC servers 26 to determine if a match is obtained; the ALC client 20 finds from its pre-populated upcoming VIN list the associated information record corresponding to the verified VIN; the ALC client 20 sends the two pieces of information to the Immobilizer respectively; the ALC client 20 also verifies data packets during packet transmissions between itself and the Immobilizer, to ensure no data corruption or data loss. The above-indicated steps of verifying, sending and further verifying are preferably computer-implemented operations, and are performed internally by the ALC client 20. These steps are preferably software implementations, but can also be performed by firmware or through hardware circuitry, or any combination thereof, without departing from the invention.

[0018] After the VIN is verified and the associated information record is mapped from the pre-populated upcoming VIN list and the vehicle Immobilizer 30 receives both pieces of information from the ALC client 20 after multiple verifications, the vehicle Immobilizer 30 performs a computer-implemented step of writing the VIN and the associated information record into the electronic control unit 40. After the writing is complete, the VIN and the associated information record are read from the ECU and passed back to the ALC client 20 for final verification. If the verification is successful, the ALC client 20 notifies the ALC servers 26 to record the VIN registration record in the database. As depicted in Fig. 1B, the vehicle Immobilizer 30 includes a communications connection 42 to the electronic control unit 40, preferably a hard-wired connection such as a communications cable or the like. A wireless connection could also be used without departing from the invention. The communications connection 42

can also include a pushbutton actuator for actuating the Immobilizer 30 to initiate the step of writing.

[0019] The vehicle Immobilizer 30 also includes a scanner 32, so as to enable the Immobilizer 30 to read the data sheet 24 and operate in a “standalone” mode (as shown in Fig. 1D) in the event that the network connection is lost to the ALC client 20. In addition to the steps of writing the VIN and the information record to the ECU 40, the computer-implemented writing operation of the Immobilizer 30 also registers one or more vehicle keys to the electronic control unit 40, so as ensure that the vehicle ignition will not operate unless a properly activated key is used.

[0020] The above-described system is operable to regulate and coordinate data communication between the ALC servers 26, the ALC client 20, the vehicle Immobilizer 30 and, ultimately, the vehicle ECU 40. In the following section, the system and, more significantly, the method of using the system 10 are disclosed to insure accurate and complete information transfer.

[0021] The data preferably travels through an RS232C interface 74 from the Immobilizer 30 to the ALC client 20. In the preferred embodiment, the interface 74 operates at FULL DUPLEX, meaning that data can be sent and received at the same time, i.e. that data can be simultaneously exchanged between the ALC client 20 and the Immobilizer 30. In the preferred embodiment, the ALC client 20 operates over a TCP/IP network and the Immobilizer 30 uses the RS232C protocol. The terminal server 76 is used as the protocol converter and the network interface to link the Immobilizer 30 to the ALC client 20. However, the ALC client 20 might run on a PC with the Immobilizer 30 hooked up to the PC's com port. Therefore the terminal server 76 would not be

needed. It should be noted that the illustrated configuration is exemplary and can be replaced by any other suitable configurations without departing from the invention.

[0022] In the preferred embodiment, all information sent over the communication links is ASCII format. As shown in Fig. 2A, a command 100 preferably consists of three portions -- a start of frame portion 110, a message packet portion 120, and an end of frame portion 130. The message packet portion 120 consists of two parts -- a message header 122 and a data segment 124. The start of frame portion 110 contains one byte, ASCII character STX (0x02). The end of frame portion 130 contains one byte, ASCII character ETX (0x03). The message header 122 contains 9 bytes, and the parts of the message header 122 are shown in TABLE 1.

TABLE 1

Part	Bytes	Comment
Length	3	The message header always contains the length of the Message Packet. The length is three ASCII digits long ('0' (0x30)... '9' (0x39)). In this application it specifies a range of 009 to 043.
Command Code	3	The command code is three-byte long and is specified by three ASCII digits ('0' (0x30)... '9' (0x39)). The command code describes the type of the sent command.
Sub Command Code	3	The sub command code is three-byte long and is specified by three ASCII digits ('0' (0x30)... '9' (0x39)). The sub command code is used by an acknowledgement command, representing the original command code to which this acknowledgement is for. If the command is an original command, its sub command code will be set to 000.

[0023] It should be noted that the length portion and the two codes are padded on the left with the ASCII character '0' (0x30).

[0024] The content of the data segment depends on the specific command issued within the components. Some commands do not have a data segment, as will be seen below. As shown in TABLE 2, the data segment contains two parts, the segment length and the data.

TABLE 2

Part	Bytes	Comment
Segment Length	3	The segment length contains the length of the Data Segment. The length is three ASCII digits long ('0' (0x30)...'9' (0x39)).
Data	Max 31	ASCII data representing specific contents of information. For each command, the size of the data field is fixed to accommodate the longest data possible. If the length of a specific data is shorter than the fixed size, the data is padded on the right with space (0x20).

[0025] TABLE 3 shows a list of commands exchanged between the ALC client 20 and the Immobilizer 30. These commands are respectively illustrated as indicated in Figs. 2B, 2C, 2D, 2E, 2F, 2G, 2H, 2I, 2J and 2K during an exemplary data communication process. An explanation of codes is as follows:

VIN refers to vehicle identification number;

MTOC refers to model/type/options/color, the type of information preferably included in information record associated with the VIN maintained in the database 52;

MTO refers to the MTOC, minus the color (since color is preferably not included in the registration);

REG indicates that the VIN and MTO are registered to the ECU 40 by the Immobilizer 30;

DONE indicates that an operational cycle is completed;

ACK is an acknowledgement of a previous command and/or data contents;

OK indicates that a command and/or data contents are valid;

NG indicates that a command and/or contents are not valid;

ABORT indicates that the operational cycle should be aborted;

ERR indicates that an error occurred in receiving or processing a command.

TABLE 3

Command Type	Command Name	Command Code (In Message Header)	Sub Command Code (In Message Header)	Data	Sender	Receiver
VIN	VIN	001	000	Long VIN contents	ALC Client	Immobilizer
MTOC	MTOC	002	000	MTOC contents	ALC Client	Immobilizer
REG DONE	REG DONE	003	000	Long VIN, MTO contents	Immobilizer	ALC Client
ACK	ACK(VIN)	004	001	Long VIN contents	Immobilizer	ALC Client
	ACK(MTOC)		002	MTOC contents		
OK	OK(MTOC)	005	002	None	ALC Client	Immobilizer
	OK(REG)		003	None		
NG	NG(VIN)	006	001	Bad VIN	ALC Client	Immobilizer
	NG(MTOC)		002	Bad MTOC		
	NG(REG)		003	Bad REG BOTH		
	NG(REG)		003	Bad REG VIN		
	NG(REG)		003	Bad REG MTO		
	NG(REG)		003	Bad REG MTO		
ABORT	ABORT	007	000	None	Immobilizer	ALC Client
ERR	ERR	008	000	None	Immobilizer	ALC Client

[0026] Figs. 3A-3P and 4 illustrate the operational flow of the method in accordance with the preferred embodiment. More specifically, Figs. 3A-3P illustrate a number of display windows of the GUI display 60 of the ALC client 20 that collects the vehicle's VIN and MTO data during the operational flow of the present method. Fig. 4 shows the operational flow of the present method, along with the display windows of the ALC client 20 as compared with the display screens shown by the vehicle Immobilizer 30. Processing of information and vehicles according to the present invention will be described hereinafter with reference to Figs. 3A-3P, 4 and 5A-5E and the messages of Figs. 2A-2J.

[0027] Fig. 3A shows a Ready State screen 200, i.e. when the ALC client 20 is awaiting a VIN entry (i.e., a VIN input to the ALC client by scanning the data sheet 24 with the scanner 22). The Ready State screen 200 is displayed in a window having a standard window format with fields that correspond to similar fields in other windows, described hereinafter. A VIN entry field 202 is shown for indicating the current scanned or manually entered VIN. An Expected VIN field 204 displays the current VIN expected to be scanned into the client 20. The Status window 206 displays the state of the process at each stage prior, during and after VIN registration. The Upcoming Vehicles tab 208 displays a list of expected VINs and associated MTOC information records for upcoming vehicles in the production line. The ALC client 20 asks the ALC servers 26 to populate this list periodically to be used by the current process point. The VIN data shown in the Expected VIN field 204 should match the top VIN entry shown in the Upcoming Vehicles list 208. The Processed Vehicles tab 210 displays a list of VINs and MTOC information records for vehicles already processed at the current process point.

In the preferred embodiment, the ALC database 52 keeps track of the progress of vehicles going down the assembly line. The MTOC data is determined ahead of time for a particular production schedule. This information is pre-populated into a table in the database 52. Preferably, a batch of expected VINs and associated MTOC information is sent in advance to the ALC client 20, so that registration can be performed in the event that the network connection is interrupted to the ALC servers 26 and ALC client 20, as will be explained hereinbelow.

[0028] In the beginning of a VIN registration process, the ALC client 20 is in the Wait on VIN Scan state indicated in Fig. 5A and displays the Ready State screen 200 of Fig. 3A. The Status field 206 displays Ready to Scan VIN. This message lets a production associate know that the ALC client 20 is ready to accept a scanned or manually entered VIN. The Immobilizer displays a Read Barcode screen 400 indicating that the Immobilizer 30 is awaiting VIN data from the ALC client 20.

[0029] As shown in Fig. 4, a scanning step 300 is performed of scanning a VIN bar code from a body assembly sheet 24. As shown in Fig. 5A, if the scan results in a valid expected VIN, the scanned VIN is sent for processing and a Sent VIN screen 220 is displayed on the ALC client screen, as shown in Fig. 3B. The scanned VIN appears in the VIN entry field 202 as shown in Fig. 3B. The ALC client 20 compares the scanned VIN with the expected VIN and, if the scanned VIN matches the expected VIN shown in field 204, the background color of fields 202, 204 and 206 will become green and a Sending VIN command 140 as shown in Figs. 2B and 5B will be sent to the Immobilizer for acknowledgement. The Status field 206 of the Sent VIN screen 220 (Fig. 3B) will display Sent VIN, and Waiting for VIN ACK messages. The process is in a Wait on VIN

ACK as indicated in Fig. 5C. If the Immobilizer 30 receives the VIN command 140 from the ALC client 20, the Immobilizer 30 will send back to the ALC client 20 a VIN acknowledgement command 142, such as shown in Figs. 2C, 5B and 5C, and will display a Sending ACK (VIN) screen 402, as shown in Fig. 4.

[0030] Upon receiving a valid VIN acknowledgement command 142 from the Immobilizer station as indicated in Fig. 5B, the ALC client 20 will display a Received VIN ACK screen 222 as shown in Fig. 3C. As shown in Fig. 5B, the ALC client 20 will send the associated MTOC information record (Fig. 5B) to the Immobilizer station in the form of an MTOC command 144, shown in Fig. 2D. The label above the Expected VIN field 204 will be changed to read MTOC and the field content will now display the value of the associated MTOC. The ALC client 20 is in a Wait on MTOC ACK state, as shown in Fig. 5D. The Status field 206 will show Received VIN ACK, Sent MTOC, and Waiting for MTOC ACK status messages. If the Immobilizer 30 receives the MTOC command 144 from the ALC client 20, the Immobilizer 30 will send back to the ALC client 20 a MTOC acknowledgement command 146, such as shown in Fig. 2E, and will display a Sending ACK (MTOC) screen 404, as shown in Fig. 4.

[0031] Upon receiving a valid MTOC acknowledgement 146 from the Immobilizer 30, the ALC client 20 will display a Received MTOC ACK screen 224 as shown in Fig. 3D. The ALC client 20 will send to the Immobilizer 30 an OK MTOC command 148 as shown in Fig. 2F. The ALC client 20 is in a Wait on REG DONE state, as indicated in Fig. 5E. The Status field 206 will display Received MTOC ACK, Sent OK MTOC, and Waiting for REG DONE messages as shown in Fig. 3D. When the Immobilizer 30 receives the OK MTOC command 148, it displays a screen 406 instructing the associate

to Turn IGN ON, Connect 16P Coupler, and Push Start PB. At this prompt, as shown in Fig. 4, the associate performs the steps of connecting the coupler 302, by extending a cable from the Immobilizer 30 and plugging it in to an ECU interface (not shown) in the vehicle cabin.

[0032] With the key in the on position, a step of pushing the “start” pushbutton 306 on the Immobilizer 30 is performed, at which point the Immobilizer 30 writes the VIN and only the MTO information to the vehicle’s ECU 40. In the preferred embodiment, although MTOC information is available, only the MTO information is registered in the vehicle ECU 40. Naturally, it is contemplated that the MTOC information, as well as other information, may be registered with the ECU 40. The Immobilizer 30 displays an Immobi Writing screen 408 while the Immobilizer 30 writes data into the vehicle’s ECU. After all the writing is complete, the vehicle Immobilizer reads from the vehicle’s ECU the vehicle identifier and the information record, and sends them back to the ALC client 20 with a REG DONE command 150 (Figs. 2G, 5A and 5E). If the two pieces of information read from the ECU match the two pieces of information held by the ALC client 20 (i.e. if REG DONE is valid), the ALC client 20 sends an OK REG message (Fig. 2K) to the Immobilizer. The ALC client 20 then notifies ALC servers 26 to record the VIN registration record in the central database 52. The ALC client 20 also updates the Upcoming Vehicles and Processed Vehicles VIN Lists and also restores its window to the Ready State screen 200. As indicated in Fig. 5A, the ALC client 20 returns to the Wait on VIN Scan state.

[0033] Upon receiving the OK REG message, the Immobilizer 30 displays a screen 412 stating, Cycle Complete, Disconnect Coupler. The associate then performs steps

of turning off the key and disconnecting the coupler. The Immobilizer 30 resumes to its ready state and the ECU data registration process is complete. A complete VIN registration record including the VIN and the associated information, MTO, is maintained in the ALC database 52 on the network. This information can be retrieved at a later time by the vehicle dealer, owner or service personnel if such information is ever required throughout the service life of the vehicle.

[0034] The foregoing describes the system's method of operation during normal (i.e. error-free) processing of information. Other methods are available for process recovery in the event that a problem is encountered with VIN and MTO registration, e.g. if there is an interruption in power or signal, or if data is corrupted, etc., at any stage in the process during operation.

[0035] For example, an abort operation can be performed whereby, if an immobilization operation is unsuccessful, an associate can abort the process by pushing a Complete push button 34a on the Immobilizer station 30. This will trigger an abort command 152 as shown in Fig. 2H to be sent to the ALC client 20. The abort signal is handled differently depending on the current operational state of the ALC client 20.

[0036] For example, if the ALC client 20 is in its Ready State, the abort command 152 from the Immobilizer 30 is ignored. This means the ALC client 20 will do nothing except continue to wait for VIN input. On the other hand, if the ALC client 20 receives an abort command 152 during VIN or MTOC transmission state (Fig. 5A, 5B), a dialog prompter screen 240, as shown in Fig. 3E, will pop up. The dialog prompter screen 240 gives the associate the choice of either rescanning the current VIN or skipping the

current VIN. The ALC client 20 is in a Wait on Operator Skip/Redo state, as indicated in Fig. 5A. The Rescan VIN button 242 allows the ALC client 20 to go back to Ready State with the same expected VIN, in order to redo the scan (Fig. 5A). The Skip VIN button 244 allows the ALC client 20 to skip the current expected VIN and return to the Ready State to wait for the next expected VIN (Fig. 5A). This skipped VIN will be marked as incomplete with an indication of an Immobilizer Abort in the ALC database 52.

[0037] Further, if the ALC client 20 receives the abort command 152 while waiting for the first REG DONE command 150 from the Immobilizer 30 (Figs. 5A, 5B), the ALC client 20 will automatically skip the current VIN and go back to the Ready State to wait for the next expected VIN. The skipped VIN will be marked as incomplete with an Immobilizer Abort indicated in the ALC database. No dialog option prompt will show up in this case.

[0038] The present method also includes a Timeout Operation in the event that the ALC client 20 does not receive any suitable signal from the Immobilizer 30 after a suitable interval. The ALC client 20 times out (goes into a waiting state) and enables the F7 function key to recover the ALC client 20 from a waiting state. During VIN or MTOC message transmission (Figs. 5C and 5D) the default timeout value is 5 seconds. During REG DONE transmission (Fig. 5E), the default timeout value is 15 seconds. This means that F7 will be enabled if the default timeout value time has passed without the ALC client 20 receiving a signal from the Immobilizer station 30. When F7 is invoked during VIN scanning (Figs. 5A, 5C), the ALC client 20 is in an Enable Operator

IRQ state, and a three-option dialog prompter screen 250 will appear, as shown in Fig. 3F.

[0039] The dialog prompter screen 250 gives the associate the choice of redoing (rescanning) the current VIN, resending the current command, or skipping the current VIN (Fig. 5C). The Rescan VIN button 252 allows the associate to rescan the current VIN by returning the ALC client 20 to the Ready State. The Resend Command button 254 allows the associate to resend the last command sent to the Immobilizer 30. Examples of an ALC client window indicating a resend operational state are shown in Figs. 3G and 3H. This will cause the Status field 206 at the ALC client 20 to show a resend message accordingly. A Skip VIN button 256 allows the associate to skip the current VIN, marking it in the database 52 as incomplete with a reason of Vehicle Skipped. The ALC client 20 will show the next upcoming VIN in the expected VIN field and return to the Ready State.

[0040] During use of the system in a manufacturing environment, other errors may be expected. For example, in the event that the VIN scanned into the system does not match the expected VIN in the Upcoming Vehicle List (i.e. a valid, not expected VIN (Fig. 5A)) a dialog prompter screen 260 will pop up as shown in Fig. 3I. This dialog prompter screen 260 will alert the associate of this problem, and will ask whether the scanned VIN should be set to the expected VIN, skipping a respective number of vehicles. A Yes button 262 is clicked to accept the scanned VIN, and a No button 264 is clicked to redo (rescan). If the Yes button 262 is selected, the scanned VIN will be accepted and will be immediately sent for processing to the Immobilizer 30. VINs in

between will be skipped and marked as incomplete with a reason Vehicle Skipped in ALC database 52.

[0041] Further, there could be several types of incorrect scans during the VIN scan process. The ALC client 20 detects the error and suitably prompts the associate of the error. As shown in Figs. 3J, 3K, 3L and 3M, respective dialog boxes can be displayed indicating: Invalid VIN scan 270; Scanned an already-processed VIN 272; Scan an invalid reference number 274; and Scanned VIN is too far behind 276.

[0042] Various transmission errors may occur during the VIN registration process, including corrupted data, out of sequence data and invalid data. Corrupted data are data that are unrecognizable by the ALC client 20. In this situation, the ALC client 20 will display an alert on the screen, and continue to wait for the expected signal in a Wait on ACK (VIN) state, as shown in Fig. 5C. The associate should take the correct action from the Immobilizer 30 by pushing the Complete push button 34a to abort the process. A screen as shown in Fig. 3N is displayed to indicate a corrupted data situation during VIN transmission. Out of sequence data are data that are recognizable but not expected by the ALC client 20. In this situation, the ALC client 20 will display an alert on the screen, and continue to wait for the signal it's expecting. The associate should take the correct action from the Immobilizer 30 by pushing the Complete push button 34a to abort the process. Invalid data is data that is recognizable, in sequence, but are incorrect. ALC client 20 will automatically send a specific NG message to the Immobilizer 30. (One type of "no good" message 154 is shown in Fig. 2I. Other types of "no good" messages are shown in Table 3.) No associate action is required. If the ALC client 20 times out, the F7 function is enabled, as shown in Fig. 5C, and an Enable

Operator IRQ state is enabled where various suitable messages can be displayed in the GUI interface of the ALC client 20 to allow skip/redo/resend actions to be taken corresponding to these respective contingencies. It should be appreciated that that similar corresponding contingency procedures are performed during the Sending MTOC and Doing Registration procedures, as indicated in Figs. 5D and 5E.

[0043] With the present method, the Immobilizer 30 has its own procedure to handle transmission errors. If the Immobilizer 30 receives corrupted data from the ALC client 20, it shows ERR on screen and sends out an ERR message 156 to the ALC client 20 as shown in Fig. 2J. In response to the ERR message, the ALC client 20 will automatically resend its last command to the Immobilizer 30. The Immobilizer 30 could request ALC client to resend by sending out ERR to it up to two times. If a corrupted data problem still exists, the Immobilizer 30 enables a Reset push button 34b on the Immobilizer 30. This Reset button 34b allow the associate to resend the Immobilizer's 30 last command to the ALC client 20, instructing the ALC client 20 to resend its last command. The Immobilizer 30 also enables the Complete push button 34a to allow the associate to abort the registration process. If the Immobilizer 30 receives out of sequence data from the ALC client 20, an error is shown on the Immobilizer's 30 screen and the Complete push button 34a is enabled to allow the associate to abort. If the Immobilizer 30 receives a specific NG signal from the ALC client 20, it shows NG on screen and enables the Complete push button 34a to allow the associate to abort. If the Immobilizer 30 times out while awaiting a signal from the ALC client 20, it shows timeout on the screen and enables the Reset push button 34b and the Complete push button 34a to allow the associate to resend or abort.

[0044] In the event of a situation where the ALC network is down, the Immobilizer 30 can be run in Stand Alone Mode, as shown in Fig. 1D. Once the ALC network is back up and running, the associates will switch back to the normal networked ALC Mode. This requires the associate to reset the expected VIN in the ALC client 20. To do so, the associate can click on the F3 function key when the ALC client 20 is in its Ready State. As shown in Fig. 3O, a dialog prompt 280 will pop up to update the expected VIN field on the screen to the newly selected VIN. The associate can scan or enter a long or short VIN in the Enter VIN to reset to: field 282 or select a VIN from the VIN list 284. Once the VIN has been entered or selected a Reset button 286 is enabled, an associate can then click on the Reset button 286. A dialog prompt screen 290, as shown in Fig. 3P, will pop up asking the associate to confirm the expected VIN. Selecting the Yes button will reset the VIN while selecting the No button will cancel the operation. If Yes is selected, once the operation is complete, a message prompt will show up notifying the associate that the VIN was reset successfully.

[0045] The present method also includes ALC terminal server reset detection. As indicated in Fig. 1C, a digital terminal server 76, preferably one of the products sold by Digi International Inc. of Minnetonka, Minnesota, is used to connect between the ALC client 20 and the Immobilizer station 30. The terminal server 76 acts as a converter between the RS232C transmission protocol used by the Immobilizer station 30 and the Internet Protocol used by the ALC system. Occasionally, the terminal server 76 could reset itself (e.g., due to a loose power connection), causing a communication loss between the two components. This could happen if the ALC client 20 is launching, if the ALC client 20 is writing data to the Immobilizer 30, or if the ALC client 20 is reading data

from the Immobilizer 30. The ALC client 20 will detect the error and prompt the associates to switch to Stand Alone Mode.

[0046] If the ALC client 20 loses connection to the ALC Object Server for whatever reason, the client 20 will not be able to operate. The GUI will be disabled and the Status field will display a message indicating "Lost Connection to Object Server. Contact ISD immediately." Upon reconnection to the Object Server, the client 20 will go back to the Ready State, without changing the expected VIN. Depending on the situation, the associate may need to reset the expected VIN, as described above.

[0047] As described hereinabove, the present embodiments provide a protocol for registering a vehicle VIN and associated data to a vehicle ECU while storing the data in a central database. In this way, the present invention solves many problems associated with previous type devices. However, it will be appreciated that various changes in the details, materials and arrangements of parts, which have been herein described and illustrated in order to explain the nature of the invention, may be made by those skilled in the art without departing from the principle and scope of the invention, as expressed in the appended claims.

WHAT IS CLAIMED:

1. A method of registering data associated with a vehicle comprising the steps of:
entering a vehicle identifier into a production control system connected to a network;
sending the vehicle identifier and an associated information record from the production control system to a vehicle Immobilizer; and
writing the vehicle identifier and the associated information record from the Immobilizer into an electronic control unit incorporated into the vehicle.
2. The method of claim 1 wherein, subsequent to the step of entering a vehicle identifier, performing the steps of:
comparing the entered vehicle identifier with an expected vehicle identifier;
if a match is obtained between the entered and expected vehicle identifiers, performing the step of sending the vehicle identifier and the associated information record from the production control system to the vehicle Immobilizer.
3. The method of claim 1 wherein the step of entering a vehicle identifier comprises scanning the vehicle identifier from a bar code associated with the vehicle.
4. The method of claim 1 wherein the vehicle identifier is a vehicle identification number and the information record comprises information on the model, type and options associated with the vehicle.

5. The method of claim 1 wherein the step of entering into a production control system comprises entering into a client device which communicates between the Immobilizer and the network.

6. The method of claim 1 wherein, prior to the step of writing, performing the steps of:

establishing a communications connection between the vehicle Immobilizer and the electronic control unit;

turning on the vehicle so as to enable the electronic control unit; and
actuating the Immobilizer to initiate the step of writing.

7. The method of claim 6 wherein, subsequent to the step of writing, performing the steps of:

reading back the vehicle identifier and the information record from the electronic control unit and sending them back to the production control system for verification;

if the sent vehicle identifier and the information record match those of the production control system:

sending a complete message from the Immobilizer to the production control system;

recording a VIN registration record in a central database.

disconnecting the communications connection between the vehicle Immobilizer and the electronic control unit; and

turning off the vehicle so as to disable the electronic control unit.

8. A method of registering data associated with a vehicle comprising the steps of:
entering a vehicle identifier into a production control system connected to a network;

comparing the entered vehicle identifier with an expected vehicle identifier;

if a match is obtained between the entered and expected vehicle identifiers,
sending the vehicle identifier from the production control system to a vehicle Immobilizer;

receiving a vehicle identifier acknowledgement at the production control system from the vehicle Immobilizer;

sending an information record associated with the vehicle identifier from the production control system to the vehicle Immobilizer;

receiving an information record acknowledgement at the production control system from the vehicle Immobilizer;

sending an authorization message from the production control system to the vehicle Immobilizer;

writing the vehicle identifier and the associated information record from the vehicle Immobilizer into an electronic control unit incorporated into the vehicle in response to the authorization message.

9. The method of claim 8 wherein the step of entering a vehicle identifier comprises scanning the vehicle identifier from a bar code associated with the vehicle.

10. The method of claim 8 wherein the vehicle identifier is a vehicle identification number and the information record comprises information on the model, type and options associated with the vehicle.

11. The method of claim 8 wherein the step of entering into a production control system comprises entering into a client device which communicates between the Immobilizer and the network.

12. The method of claim 8 wherein, prior to the step of writing, performing the steps of:

establishing a communications connection between the vehicle Immobilizer and the electronic control unit;

turning on the vehicle so as to enable the electronic control unit; and
actuating the Immobilizer to initiate the step of writing.

13. The method of claim 12 wherein, subsequent to the step of writing, performing the steps of:

reading back the vehicle identifier and the information record from the electronic control unit and sending them back to the production control system for verification;

if the sent vehicle identifier and the information record match those of the production control system:

sending a complete message from the Immobilizer to the production control system;

recording a VIN registration record in a central database; and

updating the expected vehicle identifier to correspond with a subsequent vehicle.

14. A system for registering vehicle data comprising:

a production control system connected to a network;

a vehicle Immobilizer for encoding data into an electronic control unit incorporated into the vehicle;

an entering implementation for entering a vehicle identifier into the production control system;

a sending implementation, incorporated into the production system, for sending the vehicle identifier and an associated information record from the production control system to the vehicle Immobilizer; and

a writing implementation, incorporated into the vehicle Immobilizer, for writing the vehicle identifier and the associated information record from the vehicle Immobilizer into the electronic control unit.

15. The system of claim 14 wherein the production control system further comprises:

a comparing implementation for comparing the entered vehicle identifier with an expected vehicle identifier;

a determining implementation for determining if a match is obtained between the entered and expected vehicle identifiers, and for instructing the sending implementation

to send the vehicle identifier and the associated information record to the vehicle Immobilizer.

16. The system of claim 15 further comprising:

a database for retaining a pre-populated table of expected vehicle identifiers and associated information records, for supplying expected vehicle identifiers to the comparing implementation;

an updating implementation for updating the expected identifier after the writing implementation writes the vehicle identifier and the associated information record from the vehicle Immobilizer into the electronic control unit.

17. The system of claim 16 further comprising a network system for retaining the database and a client device for communicating with the vehicle Immobilizer.

18. The system of claim 14 wherein the entering implementation comprises a bar code scanner scanning the vehicle identifier from a bar code associated with the vehicle.

19. The system of claim 14 wherein the vehicle identifier is a vehicle identification number and the information record comprises information on the model, type and options associated with the vehicle.

20. The system of claim 14 wherein the production control system comprises a client device for communicating between the Immobilizer and the network.

21. The system of claim 14 wherein the writing implementation comprises:
a communications connection from the vehicle Immobilizer to the electronic control unit; and
a pushbutton actuator for actuating the Immobilizer to initiate the writing implementation.

22. The system of claim 14 further comprising a network system for monitoring vehicle production and providing a data set of expected vehicle identifiers and associated information records to the production control system.

23. The system of claim 22 wherein the production control system further comprises:
a comparing implementation for comparing the entered vehicle identifier with an expected vehicle identifier;
a determining implementation for determining if a match is obtained between the entered and expected vehicle identifiers, and for instructing the sending implementation to send the vehicle identifier and the associated information record to the vehicle Immobilizer.

24. The system of claim 23 wherein the network system further comprises:

a database for retaining a pre-populated table of the expected vehicle identifiers and the associated information records, for supplying expected vehicle identifiers to the comparing implementation;

an updating implementation for updating the expected identifier after the writing implementation writes the vehicle identifier and the associated information record from the vehicle Immobilizer into the electronic control unit.

25. The system of claim 22 wherein the entering implementation comprises a bar code scanner scanning the vehicle identifier from a bar code associated with the vehicle.

26. The system of claim 22 wherein the vehicle identifier is a vehicle identification number and the information record comprises information on the model, type and options associated with the vehicle.

27. The system of claim 22 wherein the production control system comprises a client device for communicating between the Immobilizer and the network.

28. The system of claim 22 wherein the writing implementation comprises:

a communications connection from the vehicle Immobilizer to the electronic control unit; and



a pushbutton actuator for actuating the Immobilizer to initiate the writing implementation.

ABSTRACT OF THE DISCLOSURE

[0048] A method and related apparatus are disclosed of guaranteeing VIN registration to a vehicle's ECU. A vehicle identifier is entered into a production control system connected to a network. The entered vehicle identifier is compared with an expected vehicle identifier. If a match is obtained between the entered and expected vehicle identifiers, the vehicle identifier is sent from the production control system to a vehicle Immobilizer. A vehicle identifier acknowledgement is received at the production control system from the vehicle Immobilizer. The production control system verifies the vehicle identifier embedded in the acknowledgement. If a match is obtained, an information record associated with the vehicle identifier is sent from the production control system to the vehicle Immobilizer. An information record acknowledgement is received at the production control system from the vehicle Immobilizer. The production control system verifies the information record embedded in the acknowledgement. If a match is obtained, an authorization message is sent from the production control system to the vehicle Immobilizer. The vehicle identifier and the associated information record from the vehicle Immobilizer are written into an electronic control unit incorporated into the vehicle in response to the authorization message. The vehicle Immobilizer then continues to write other data into the vehicle's ECU. After all the writing is complete, the vehicle Immobilizer reads from the vehicle's ECU the vehicle identifier and the information record, and sends them back to the production control system for final verification. If the two pieces of information from the ECU match the two pieces of information held by the production control system, the production control system sends a complete message to the Immobilizer and records the VIN registration record in the

central database. Upon receiving the complete message, the Immobilizer resumes to its ready state and the ECU data registration process is complete.

1/20

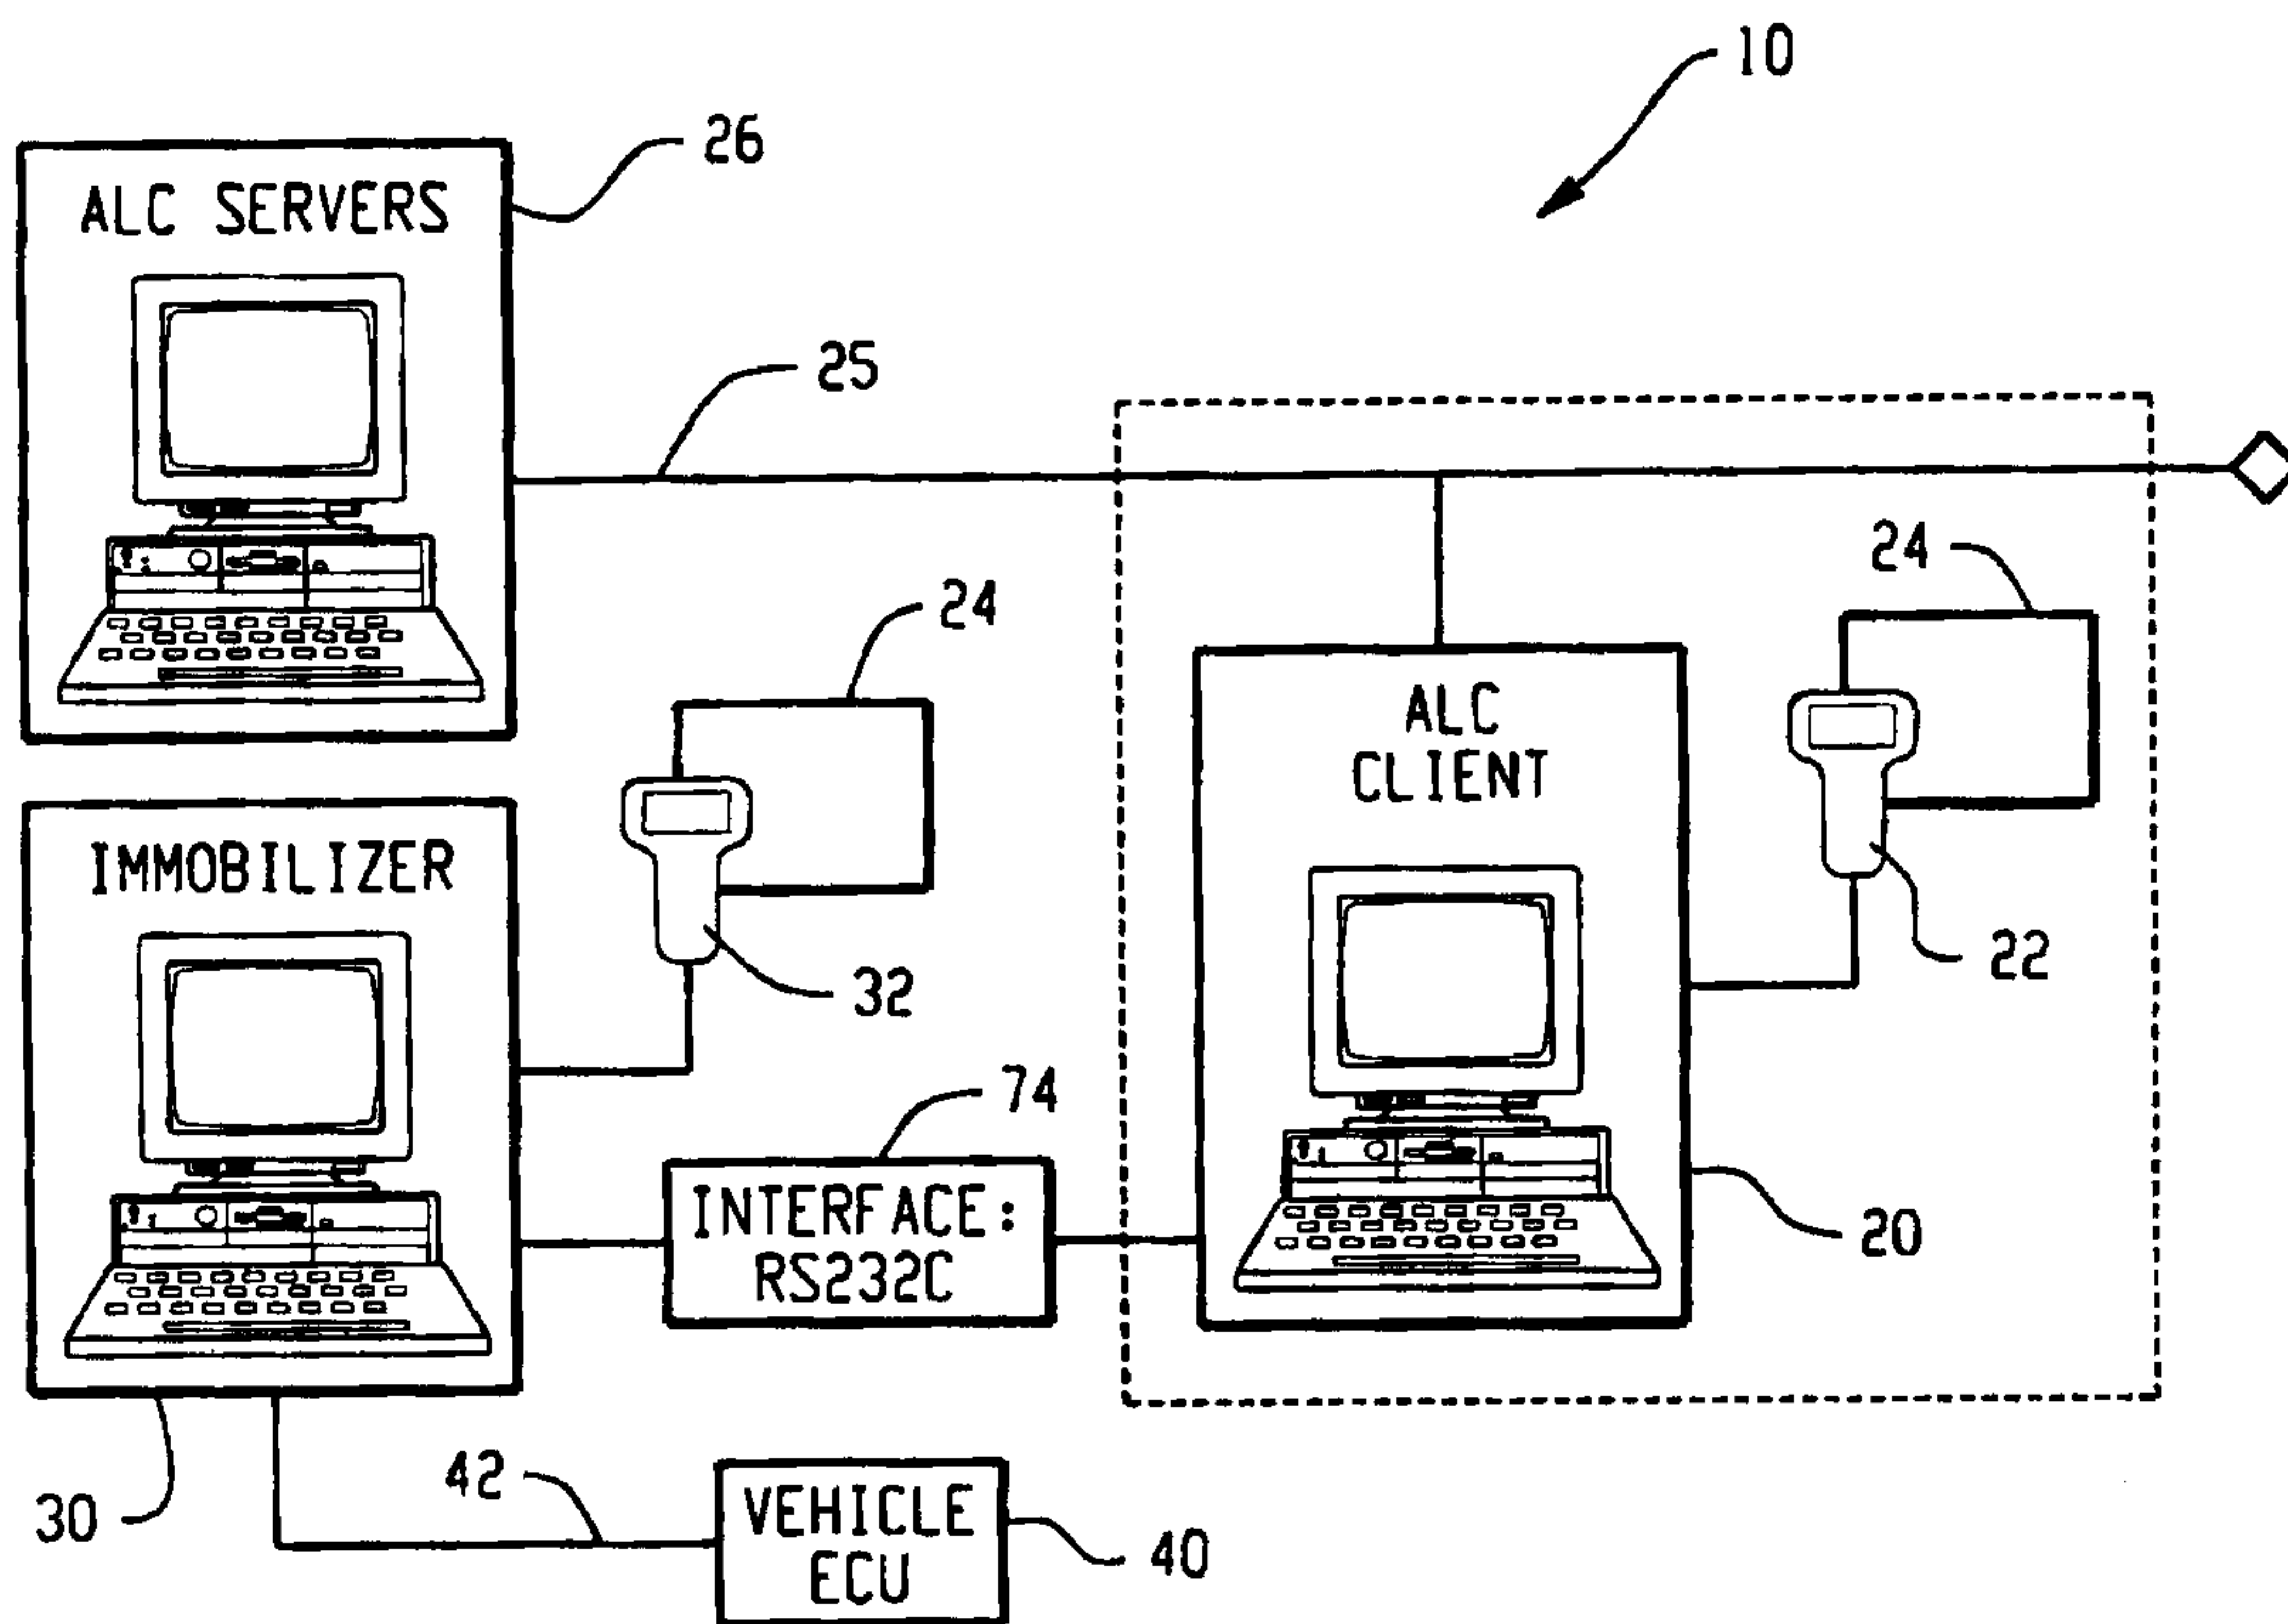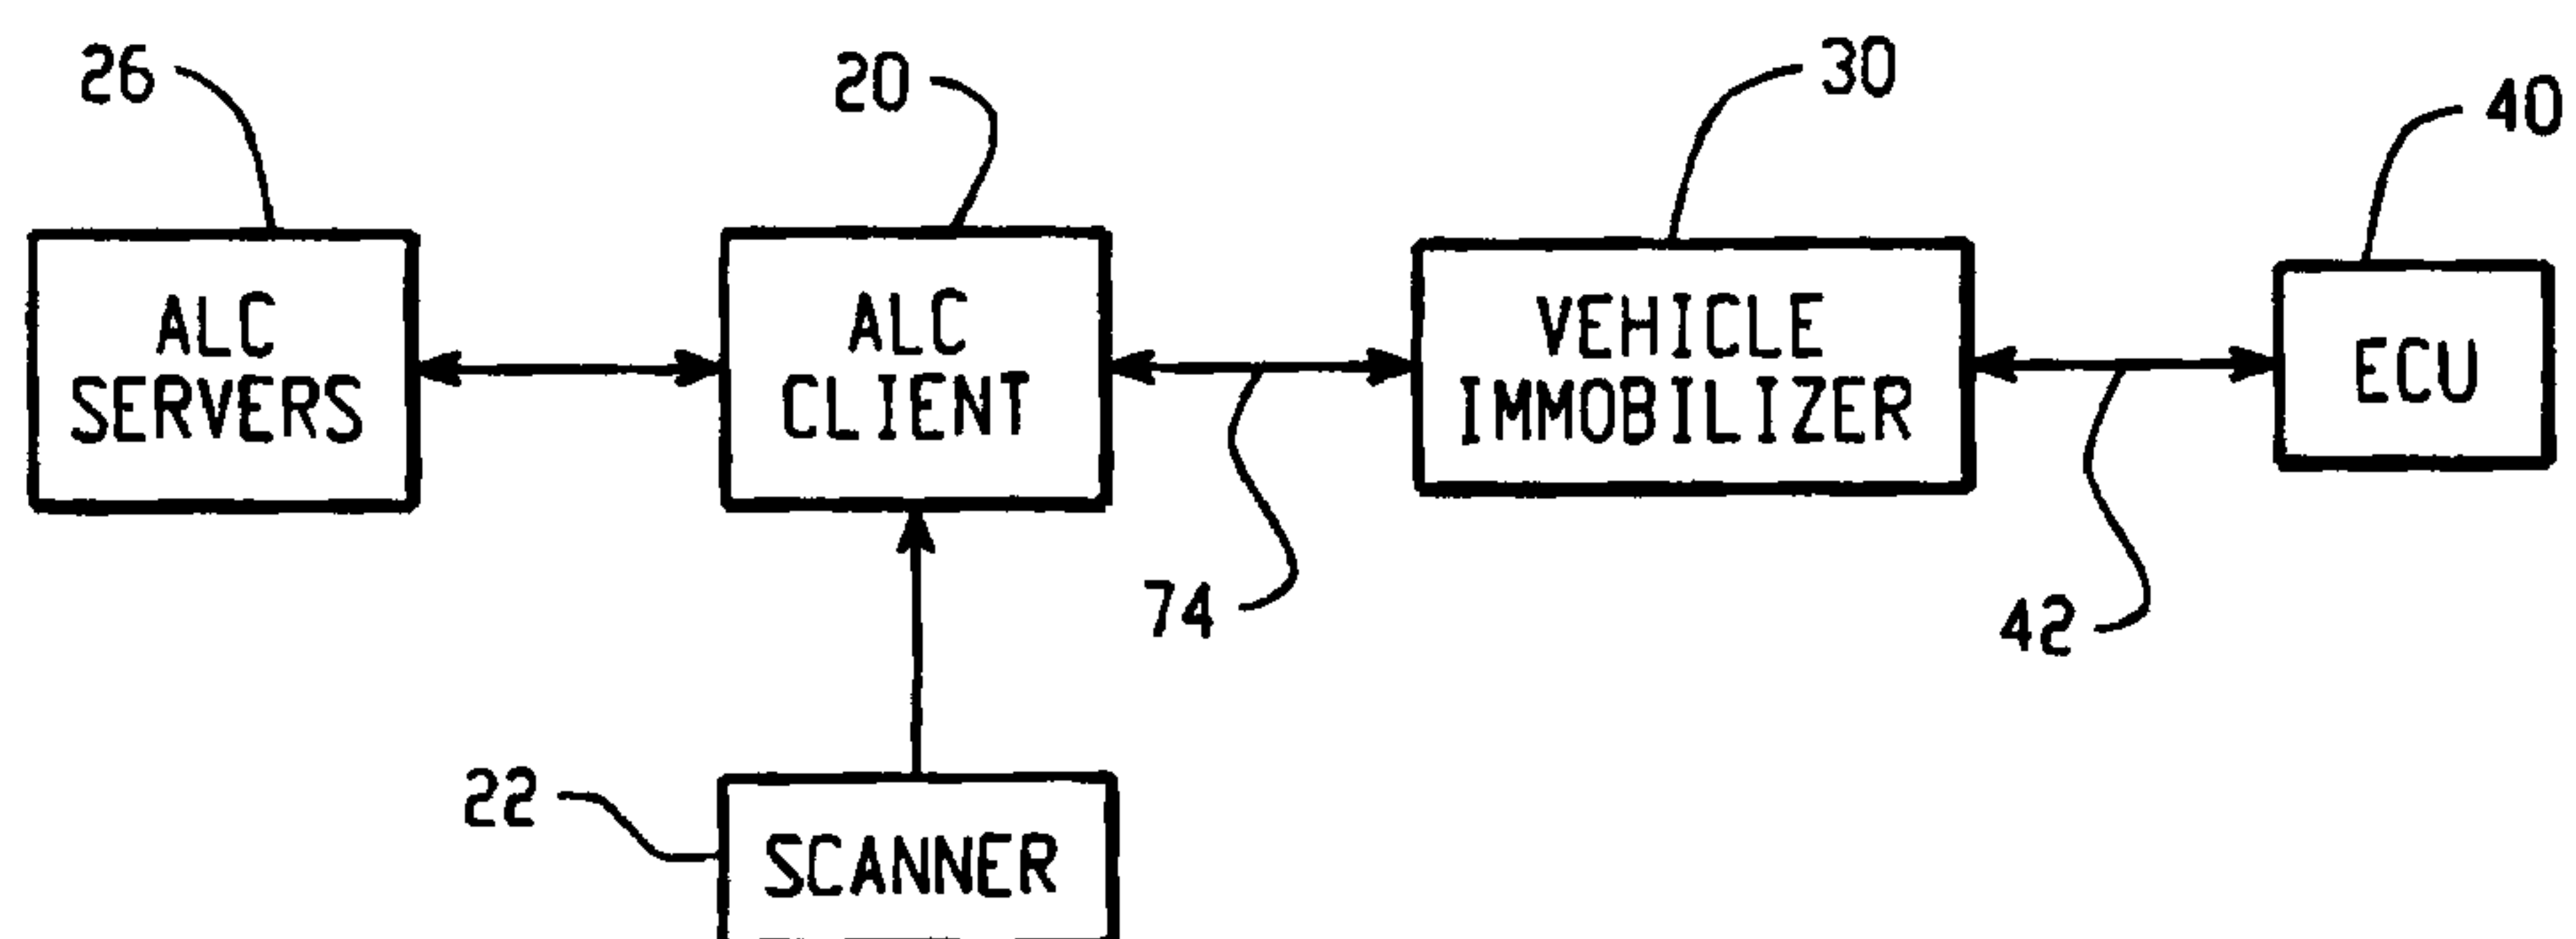*Fig. 1A**Fig. 1B*

2/20

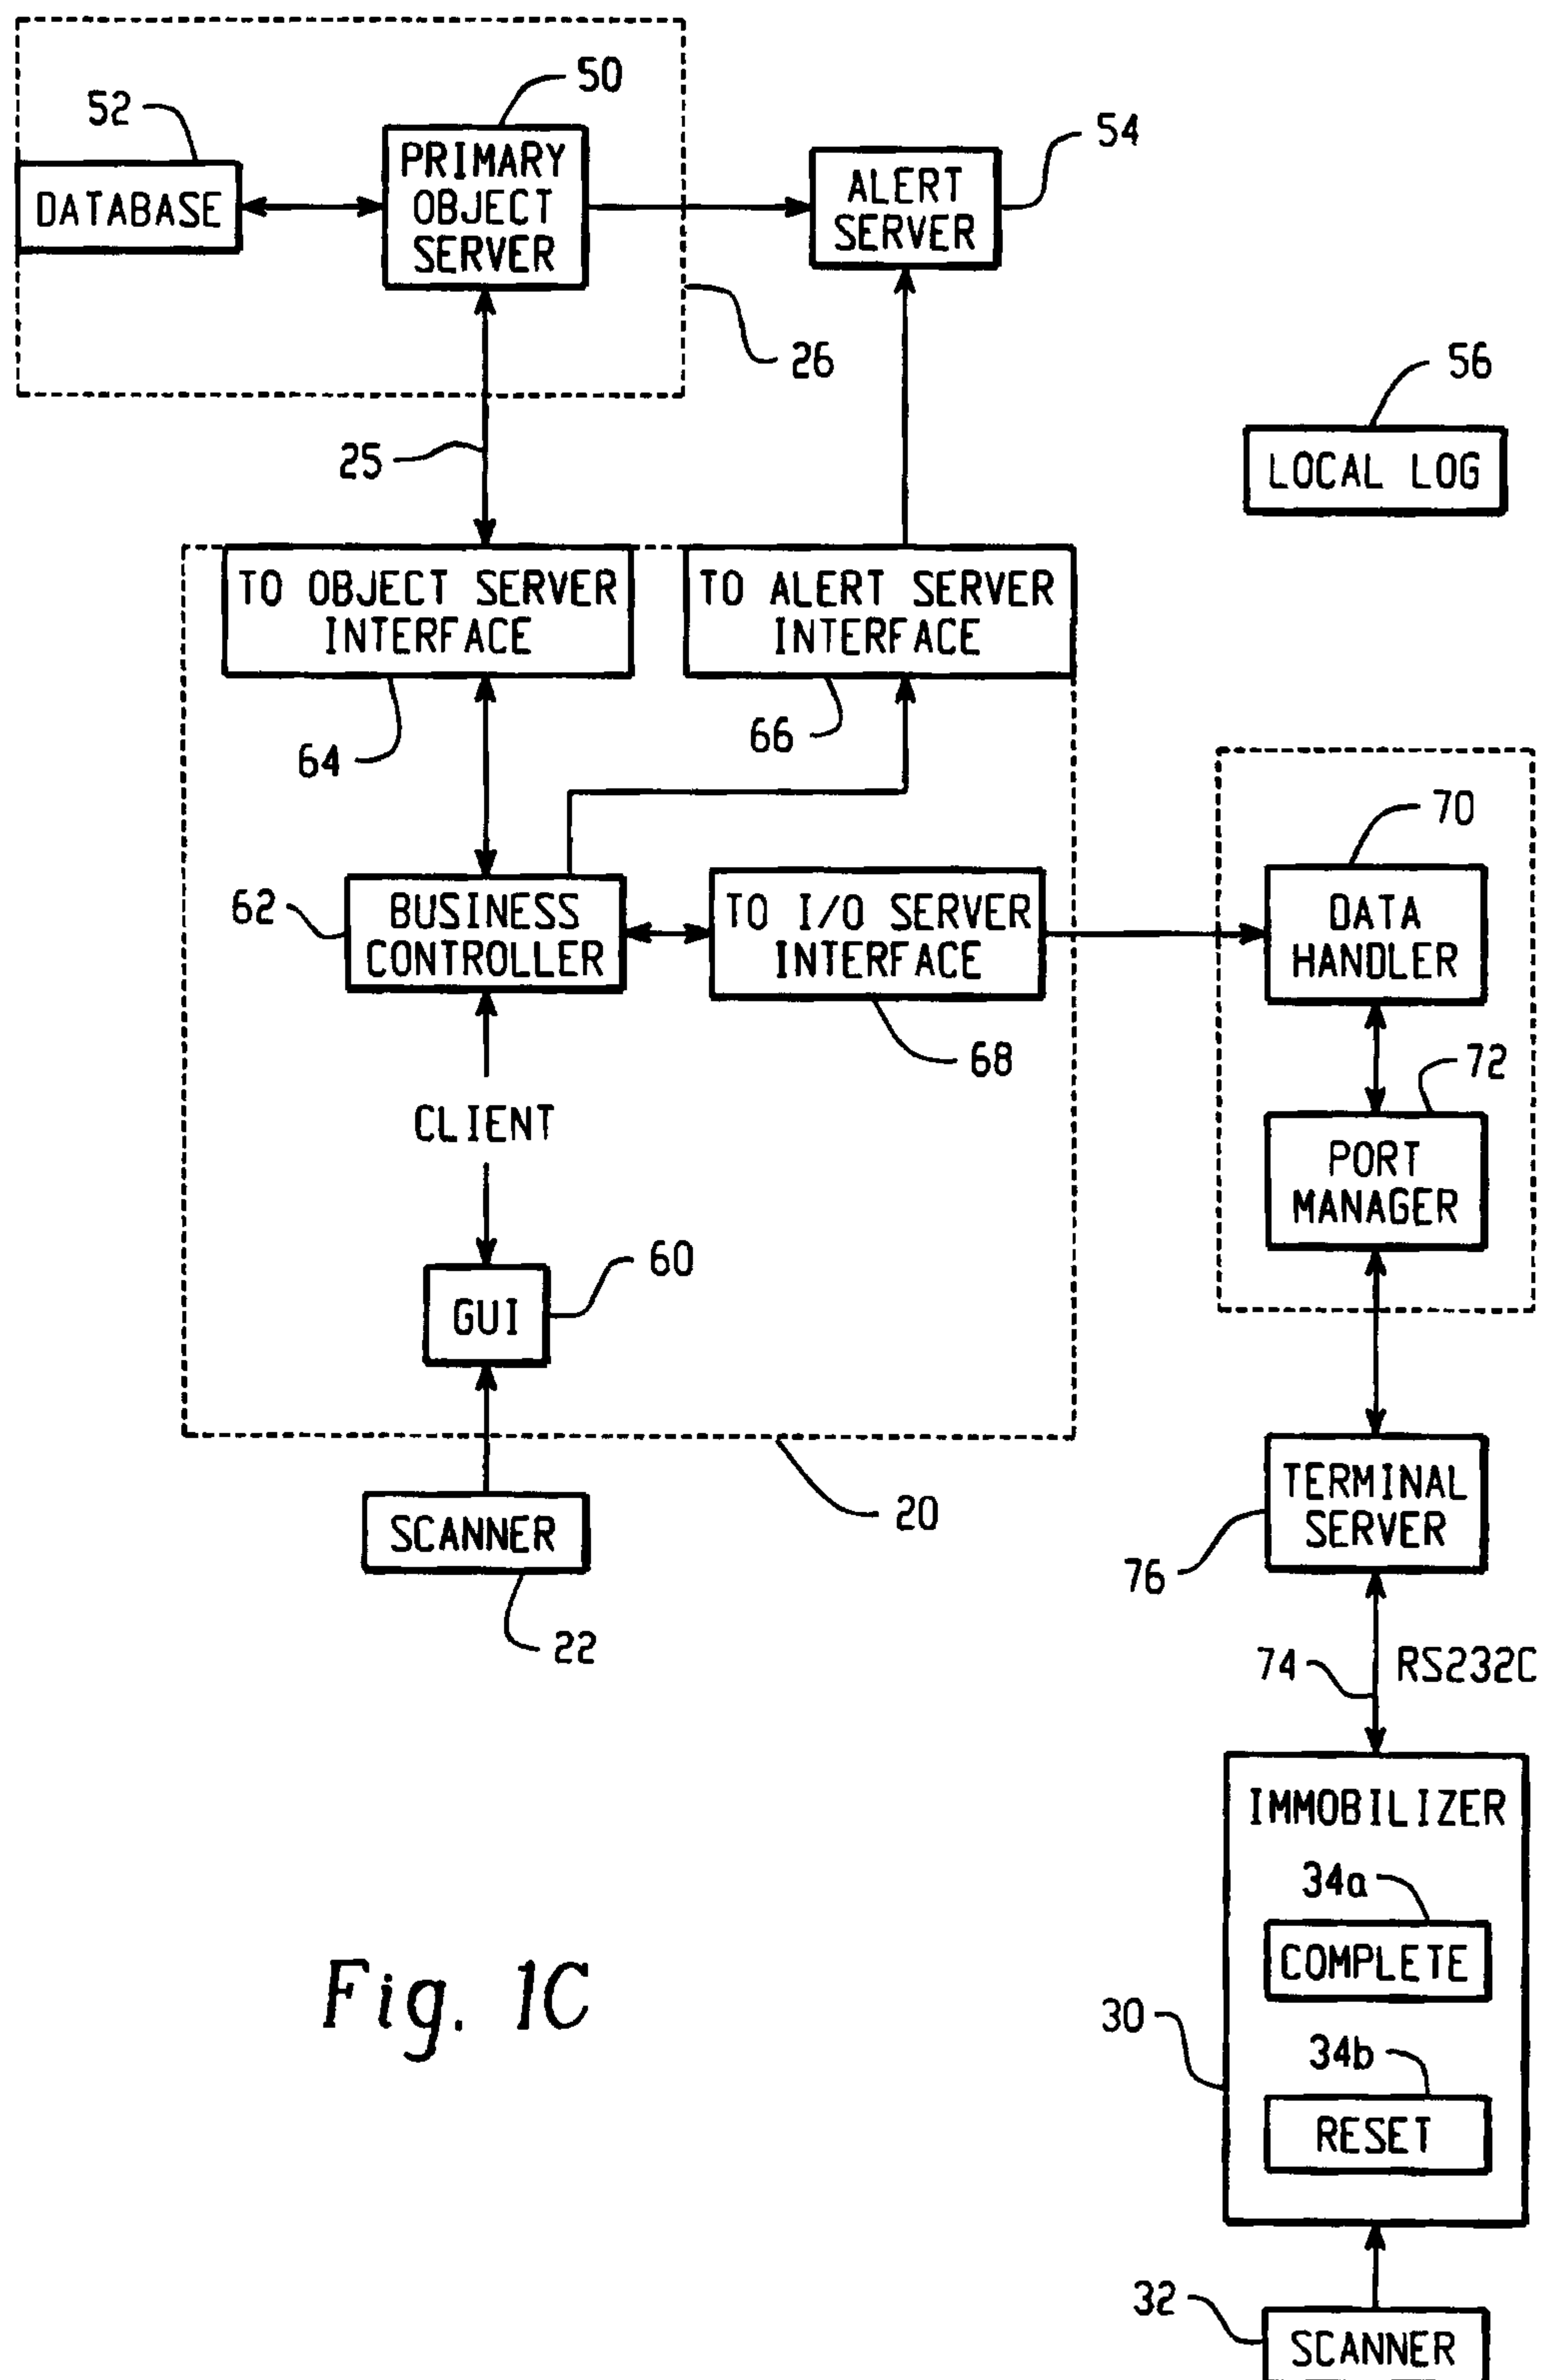


Fig. 1C

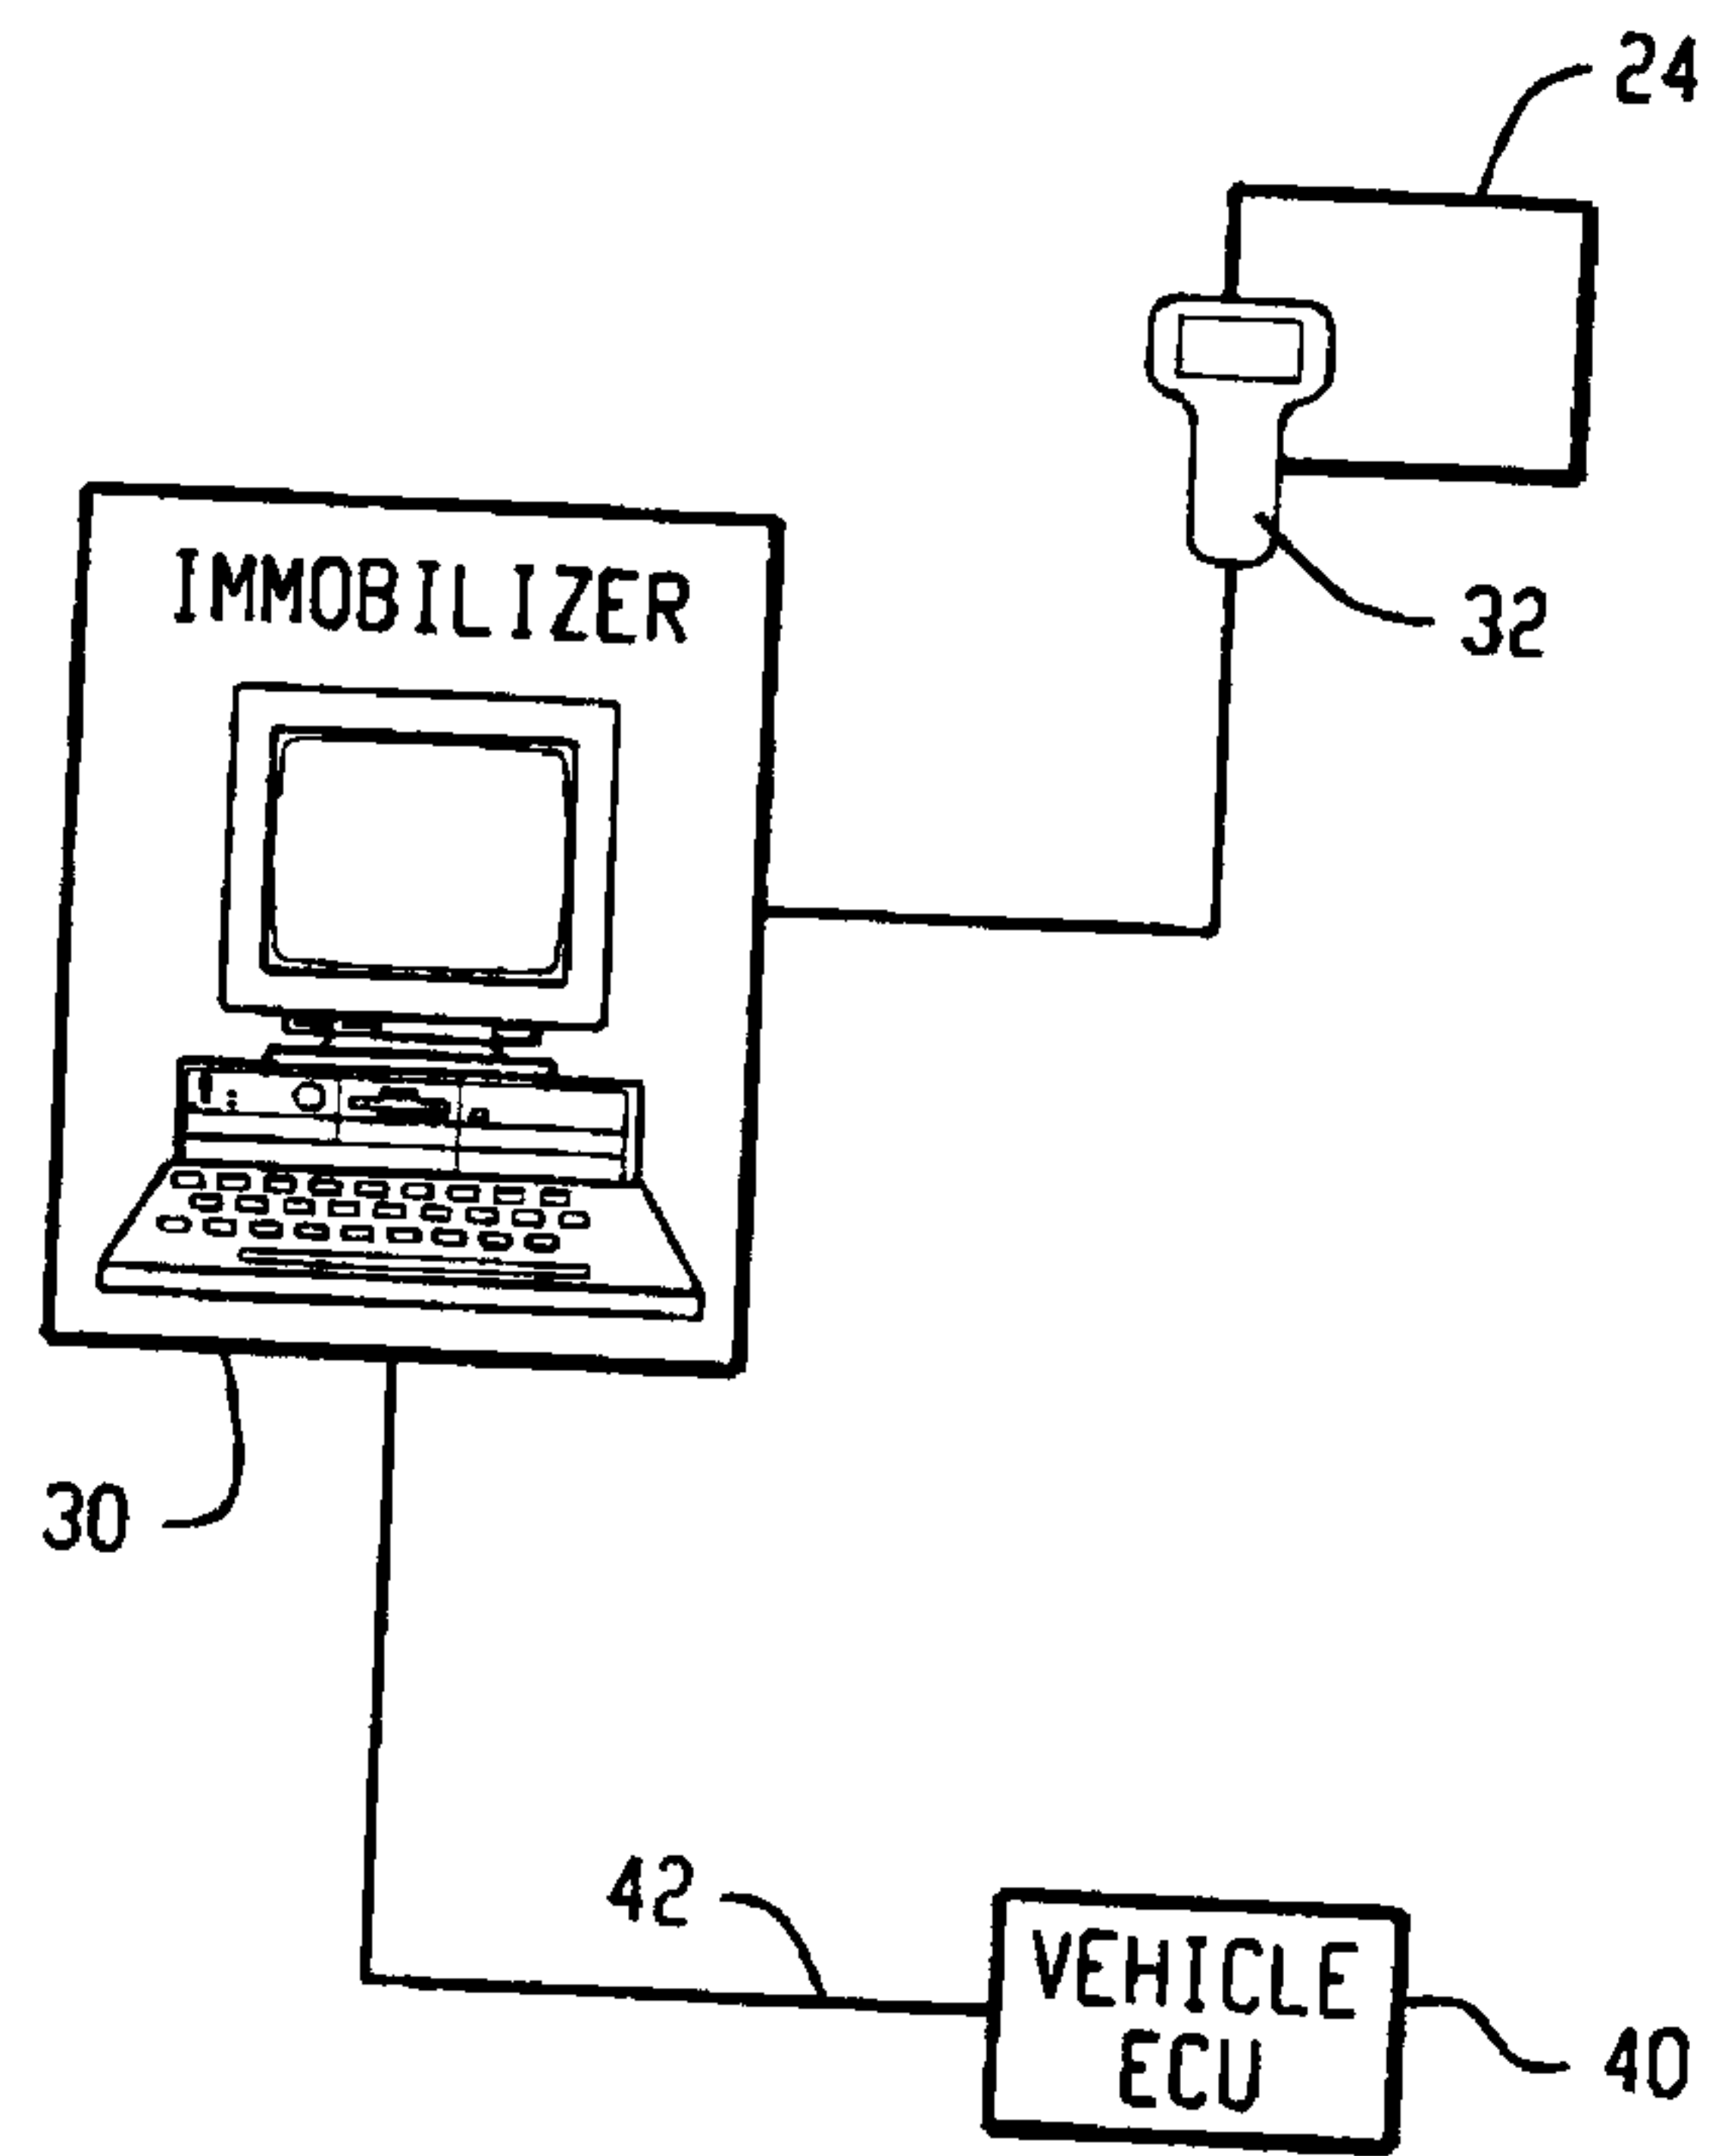


Fig. 1D

4/20

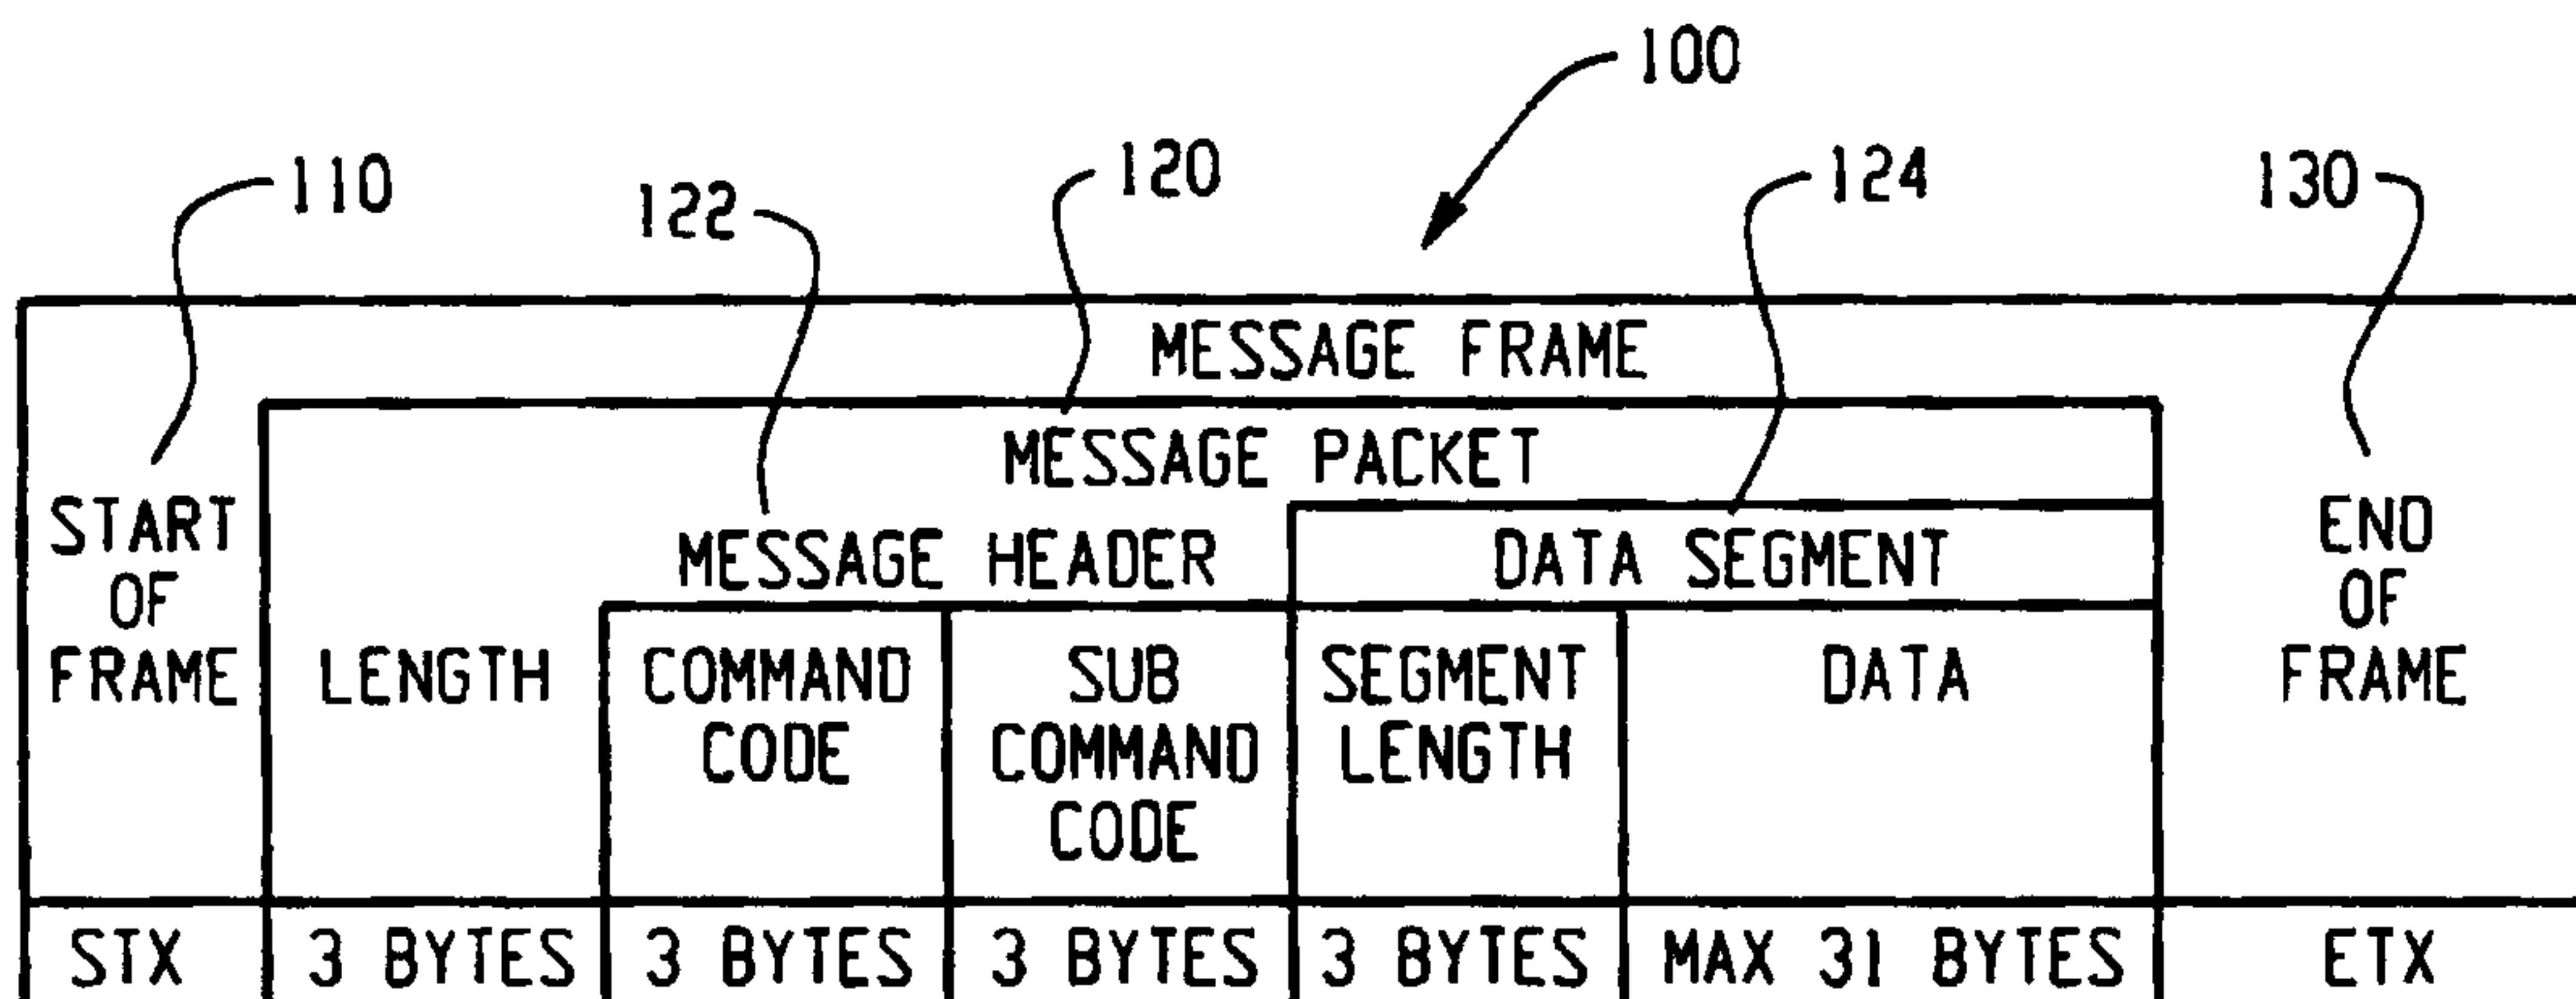


Fig. 2A

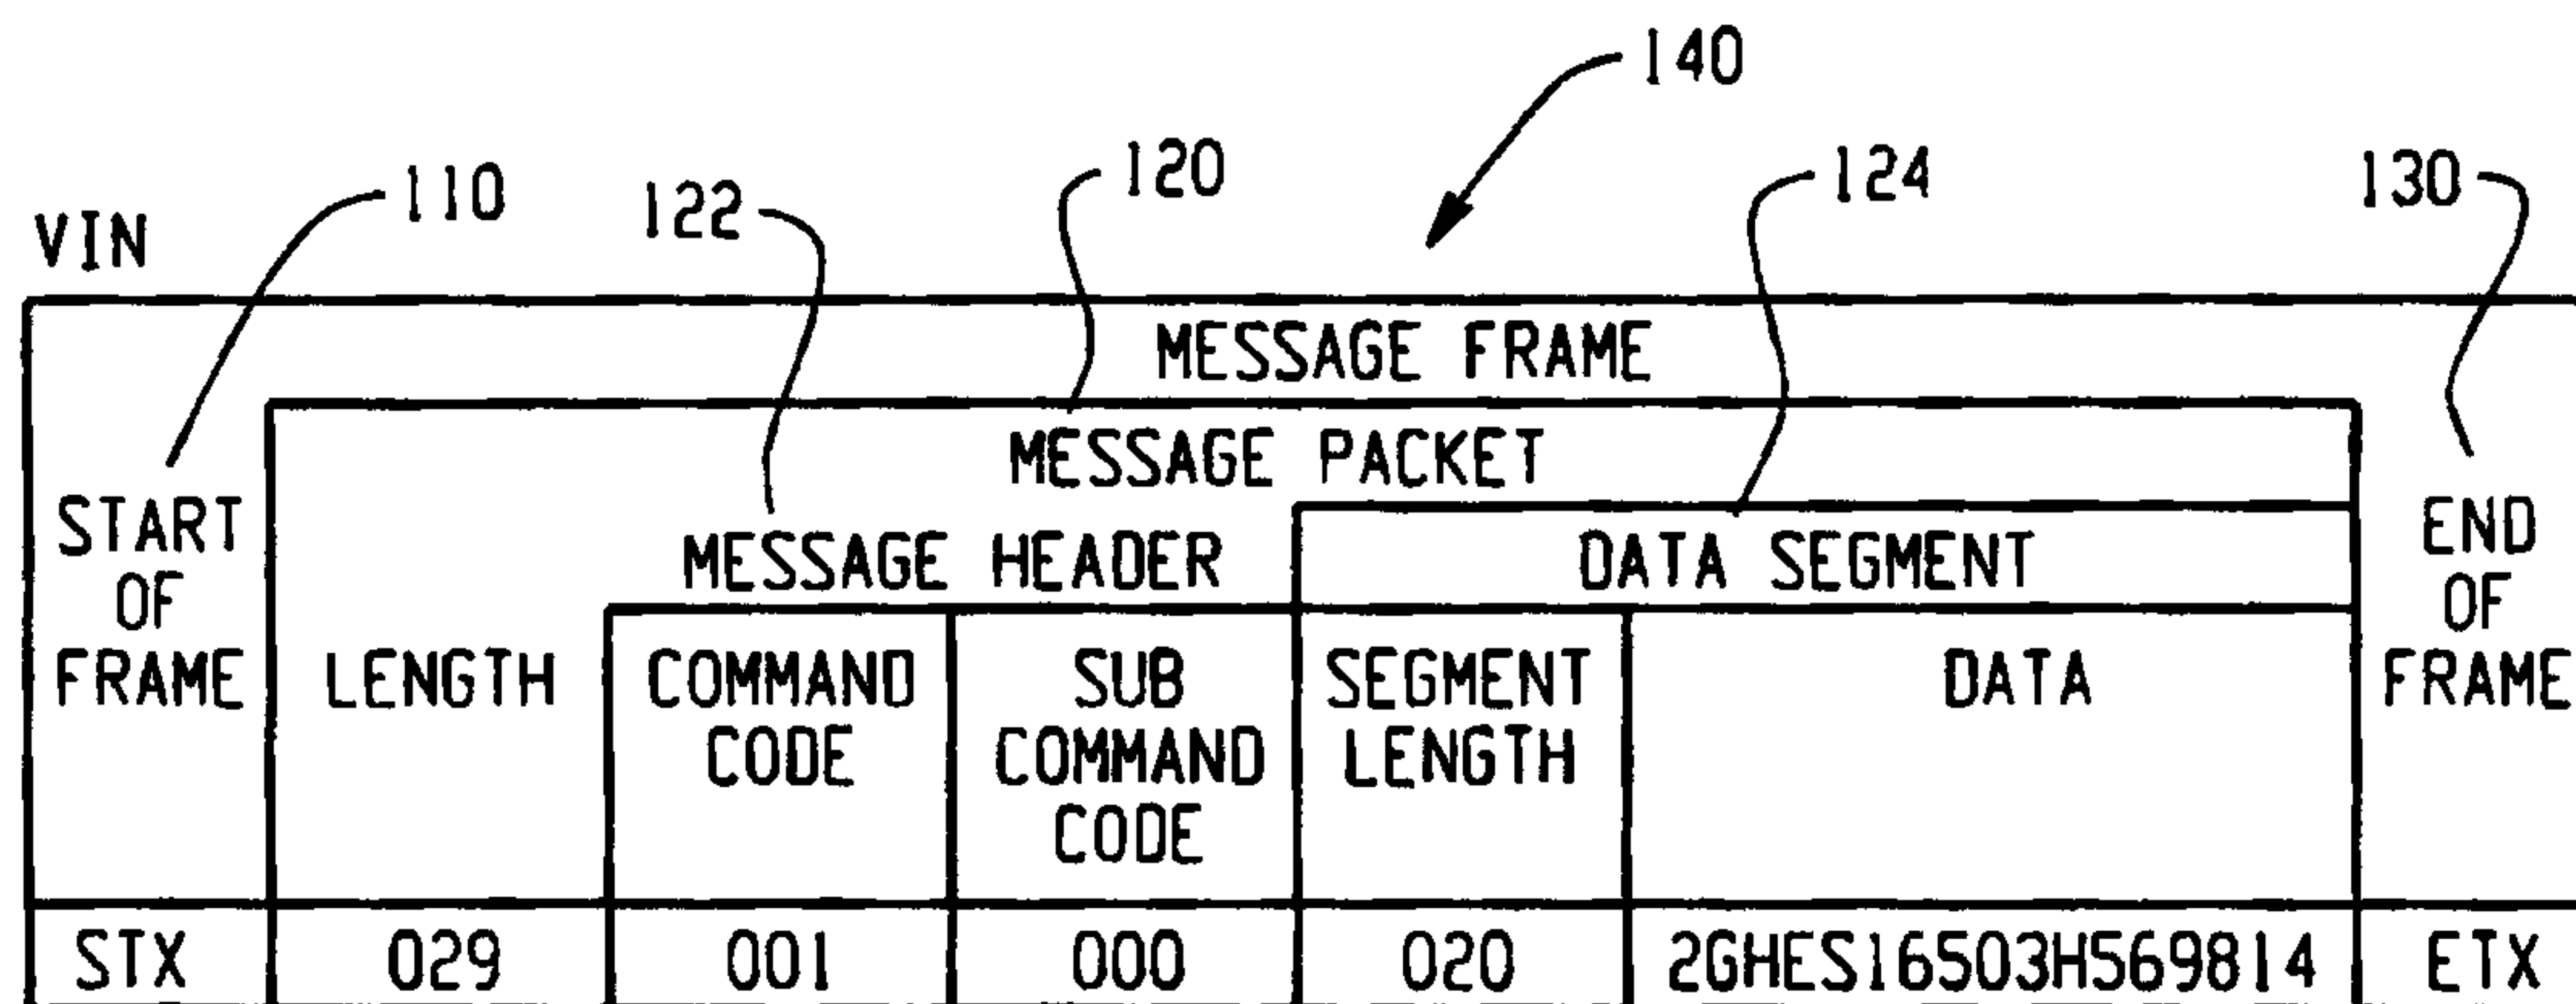


Fig. 2B

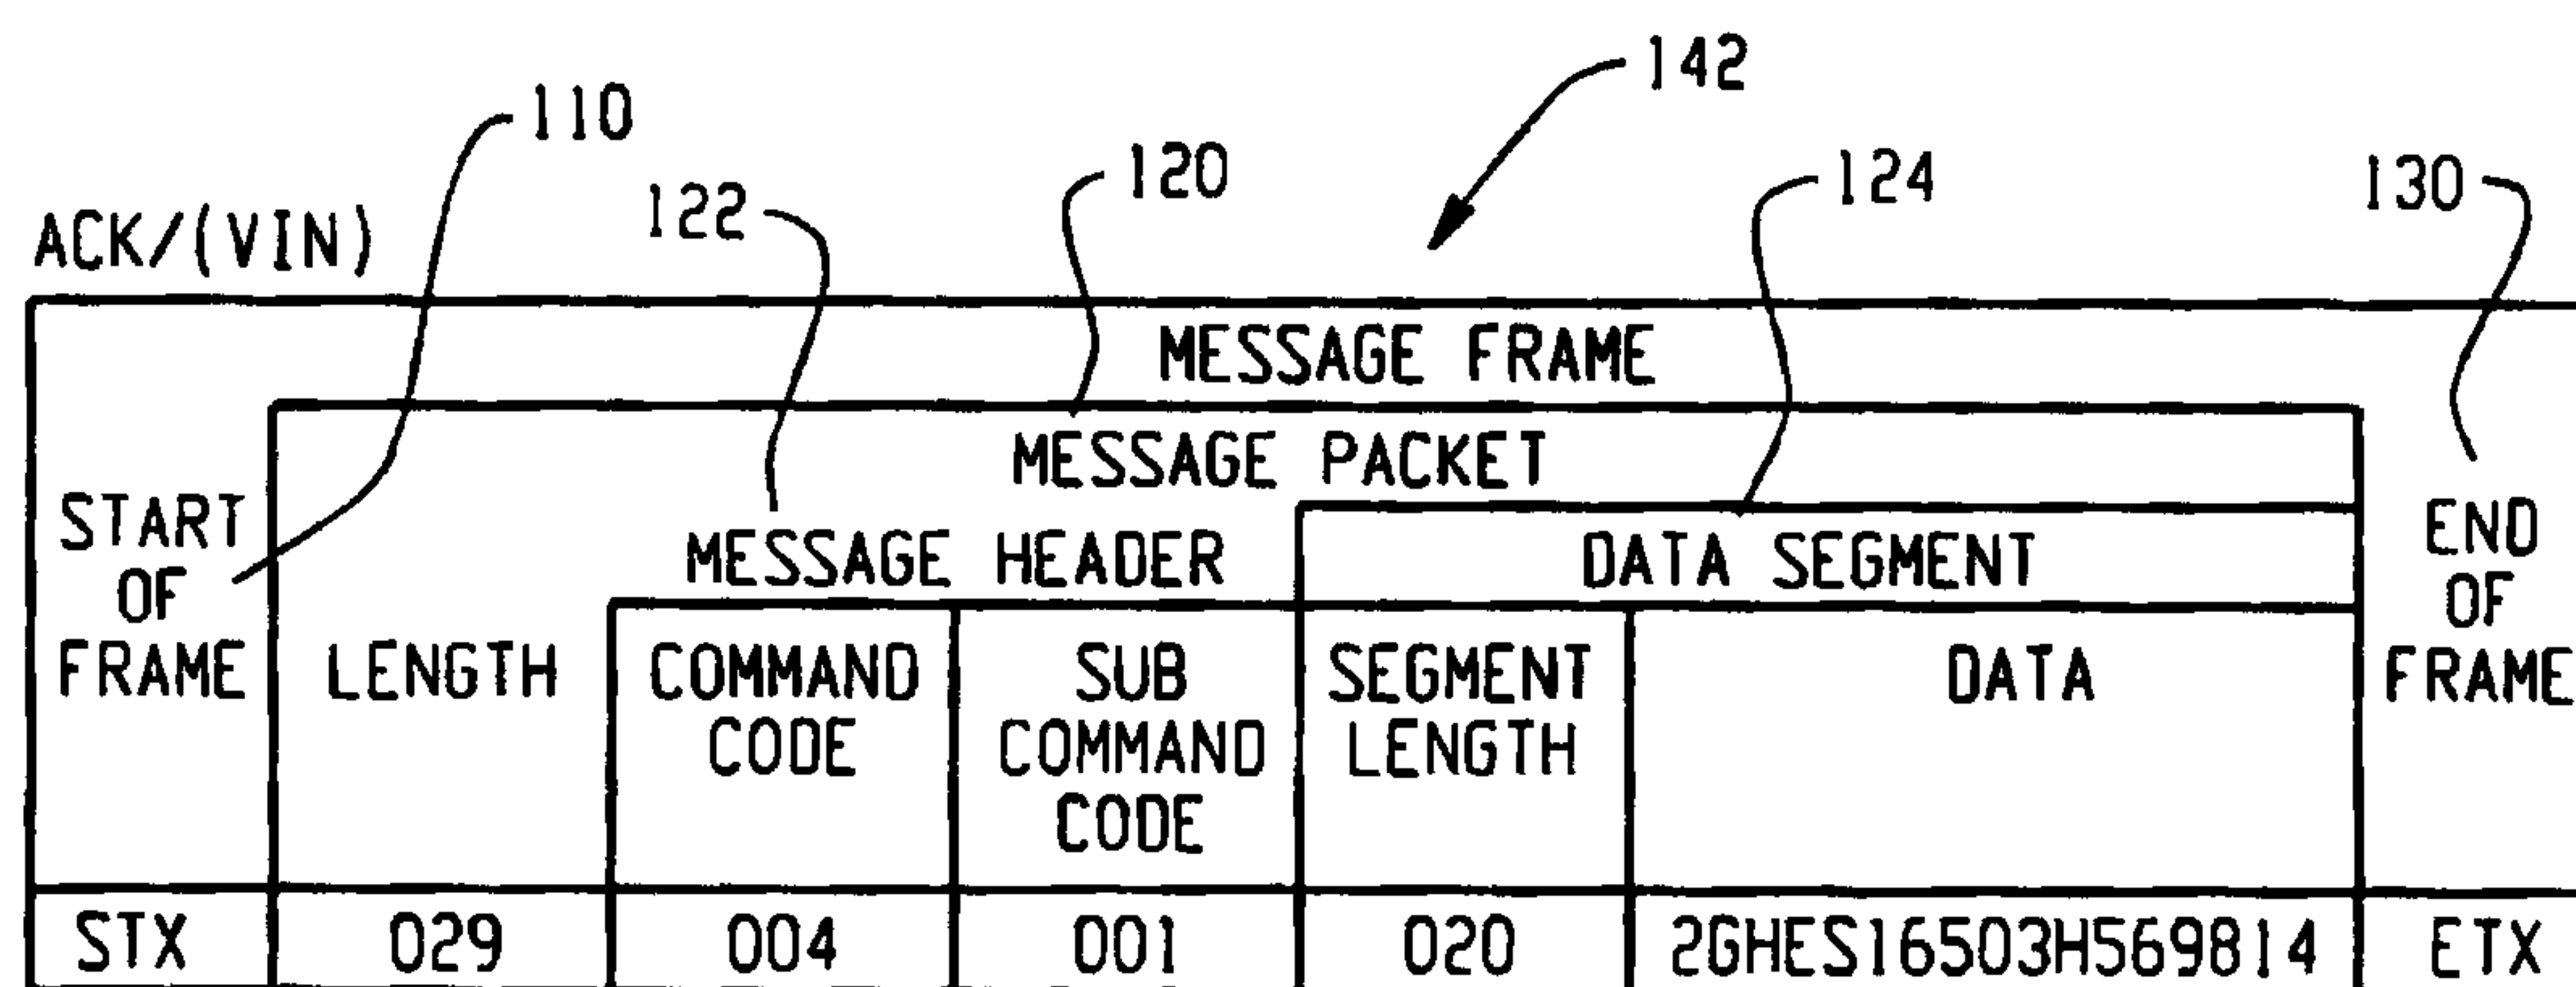


Fig. 2C

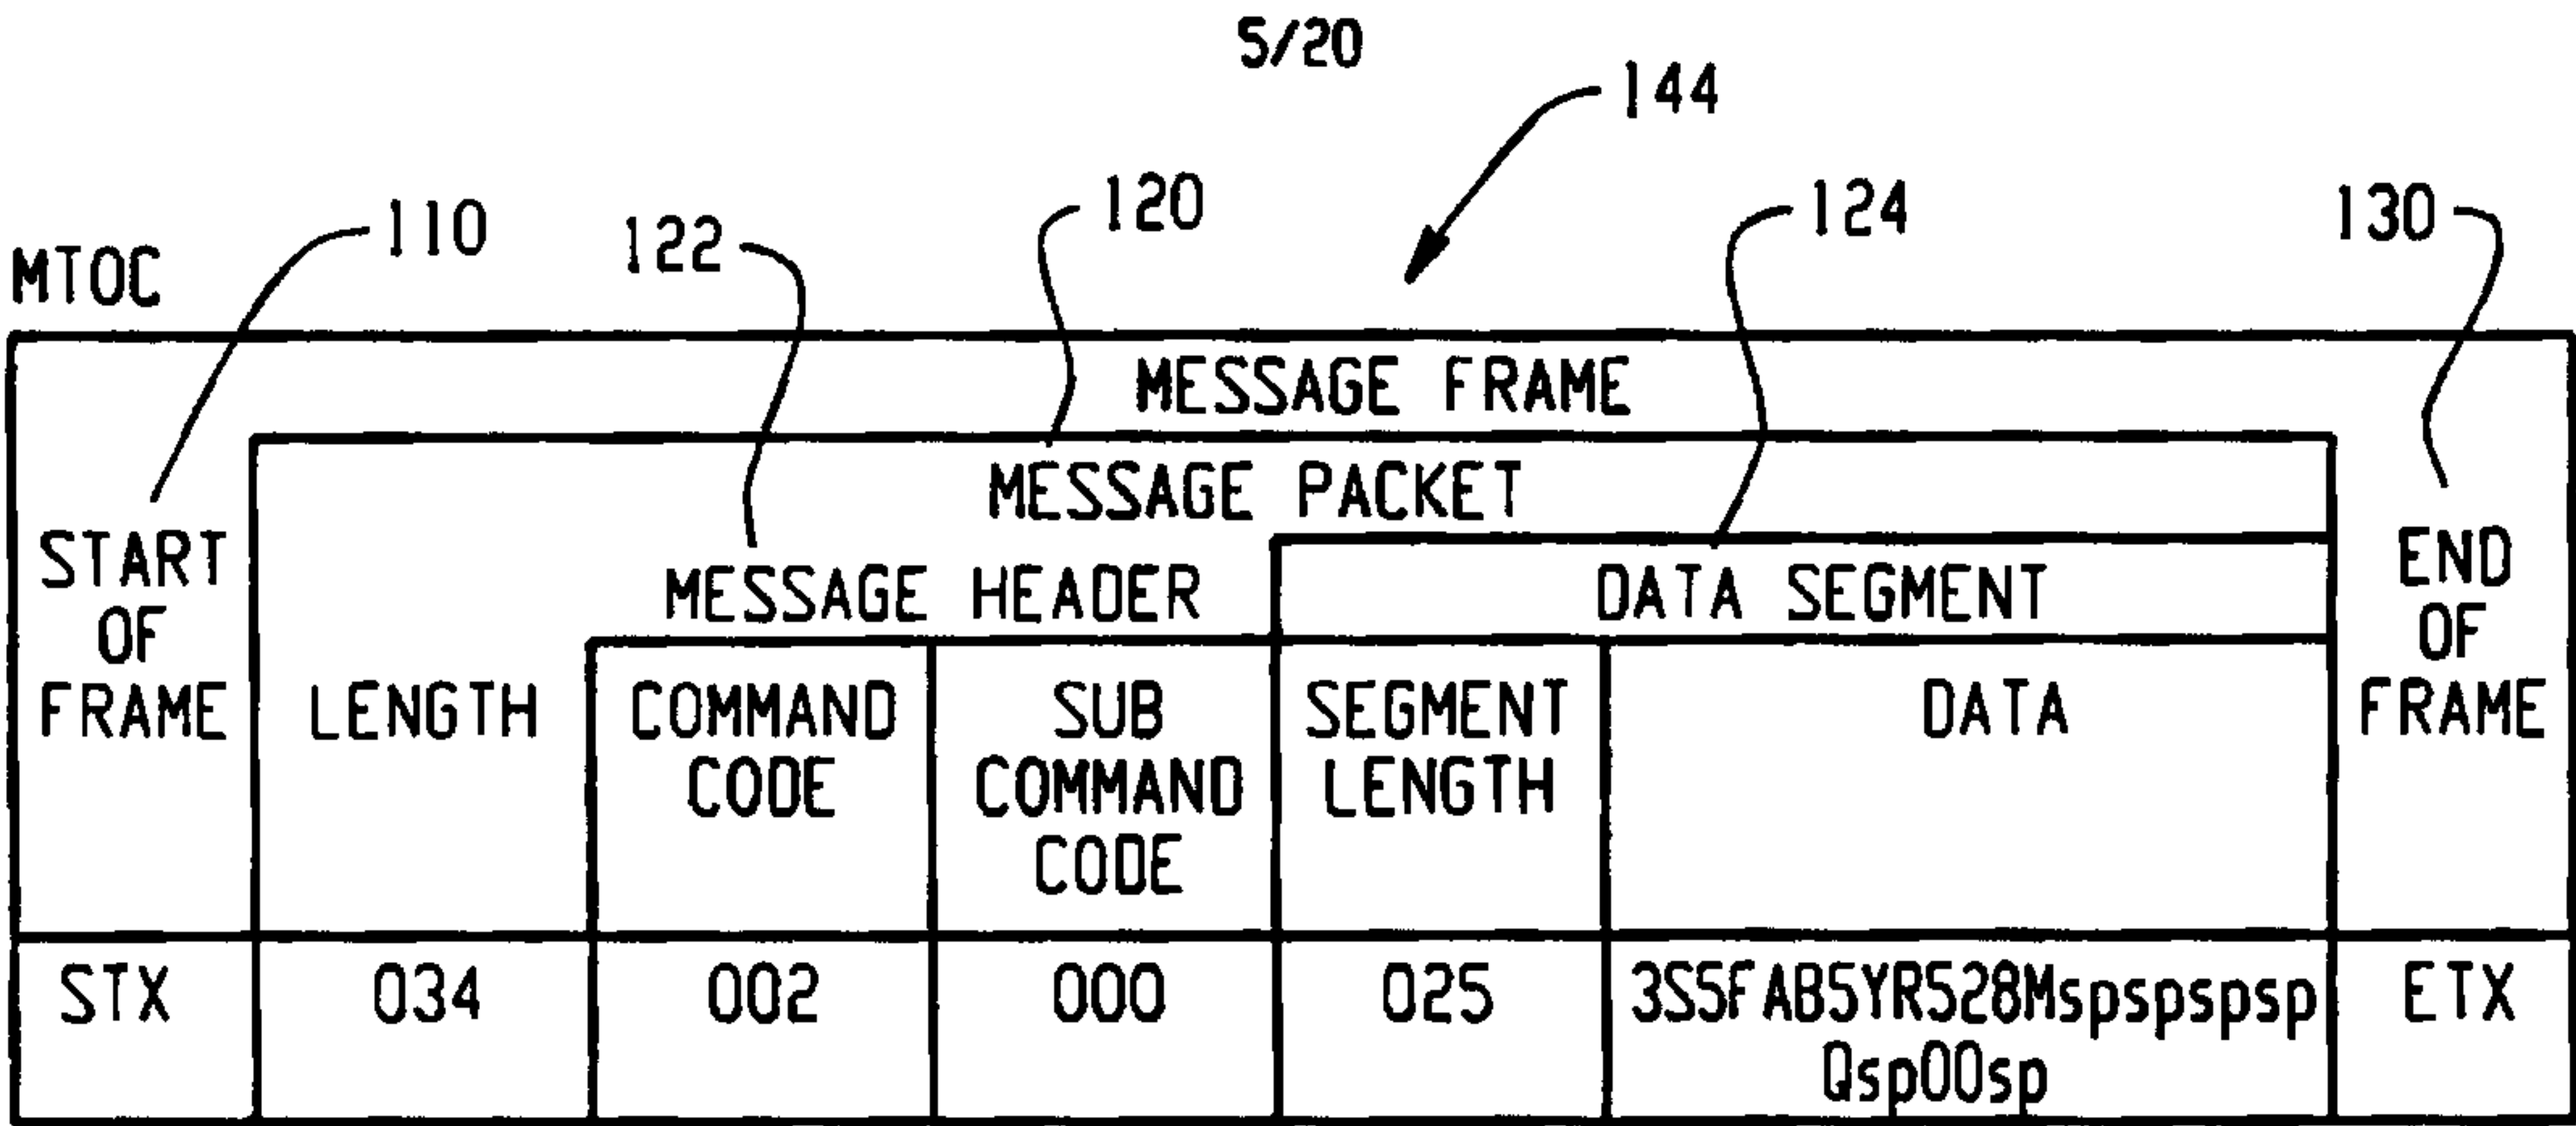


Fig. 2D

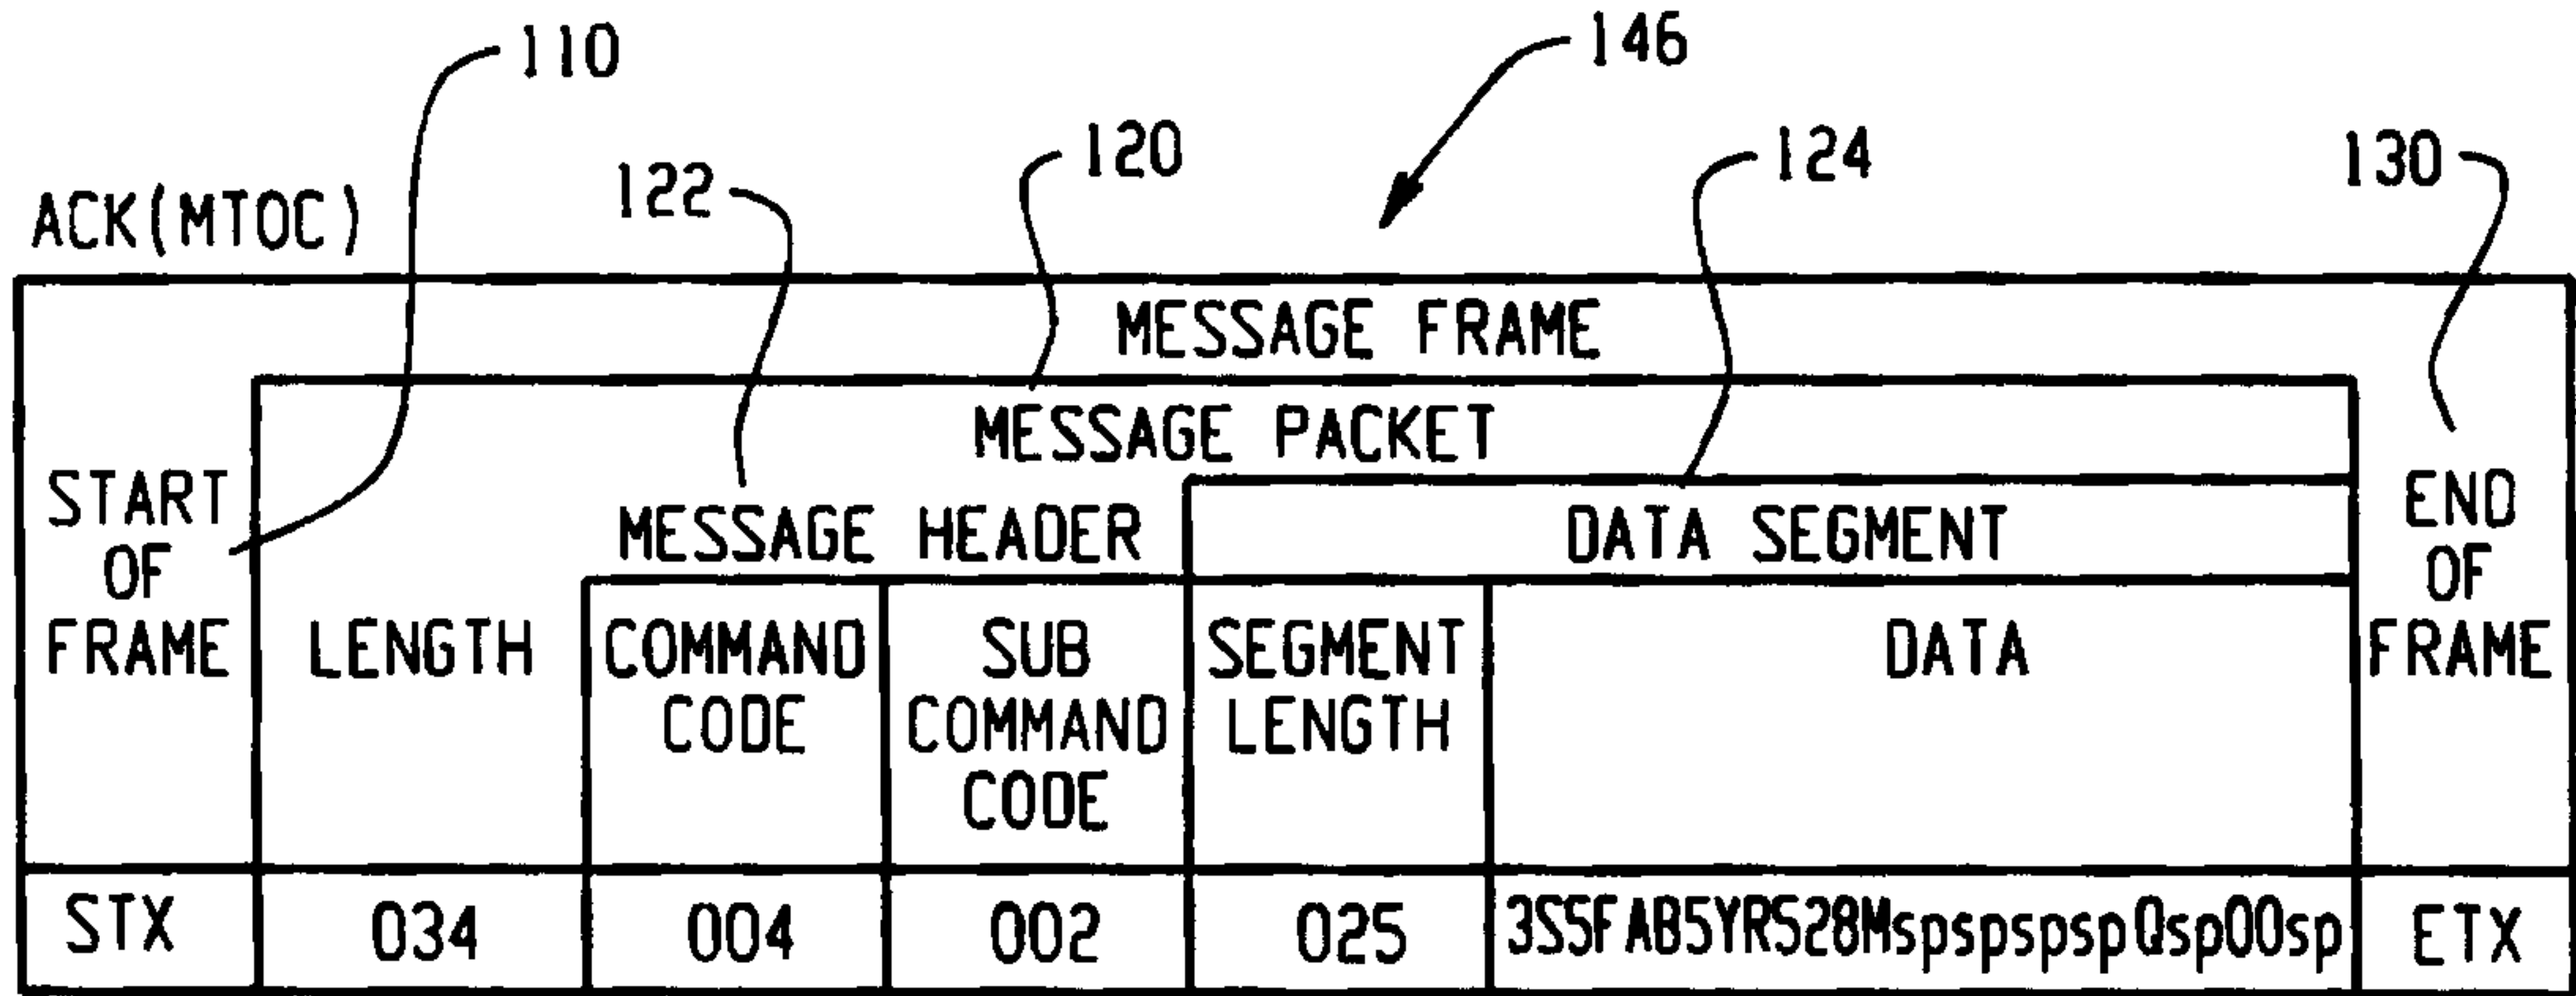


Fig. 2E

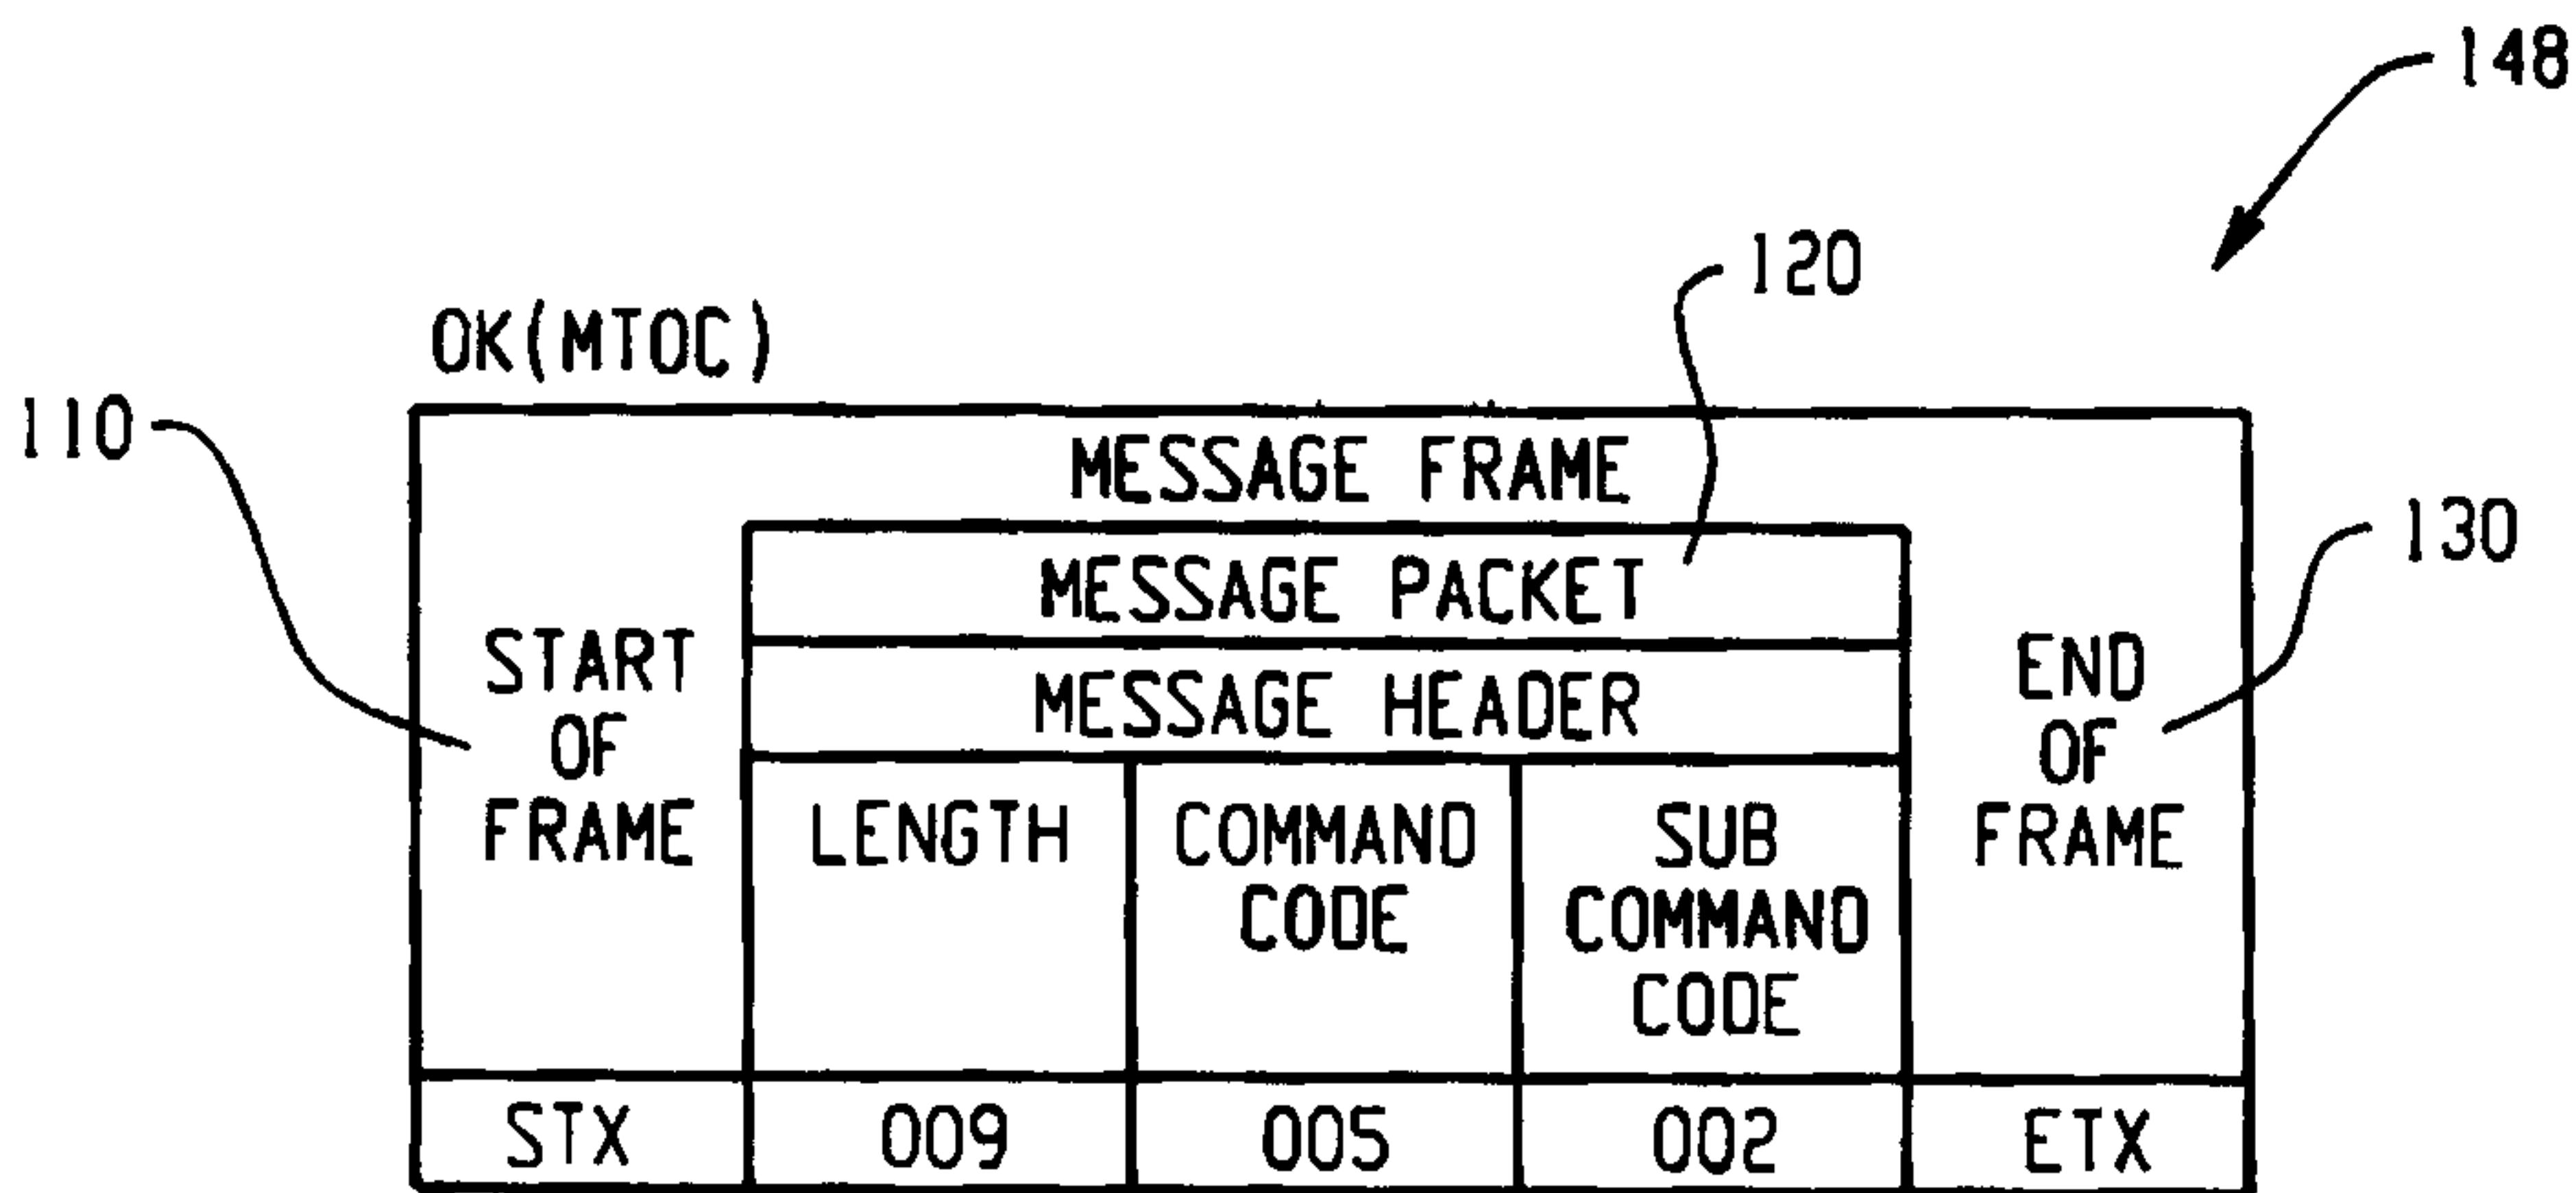


Fig. 2F

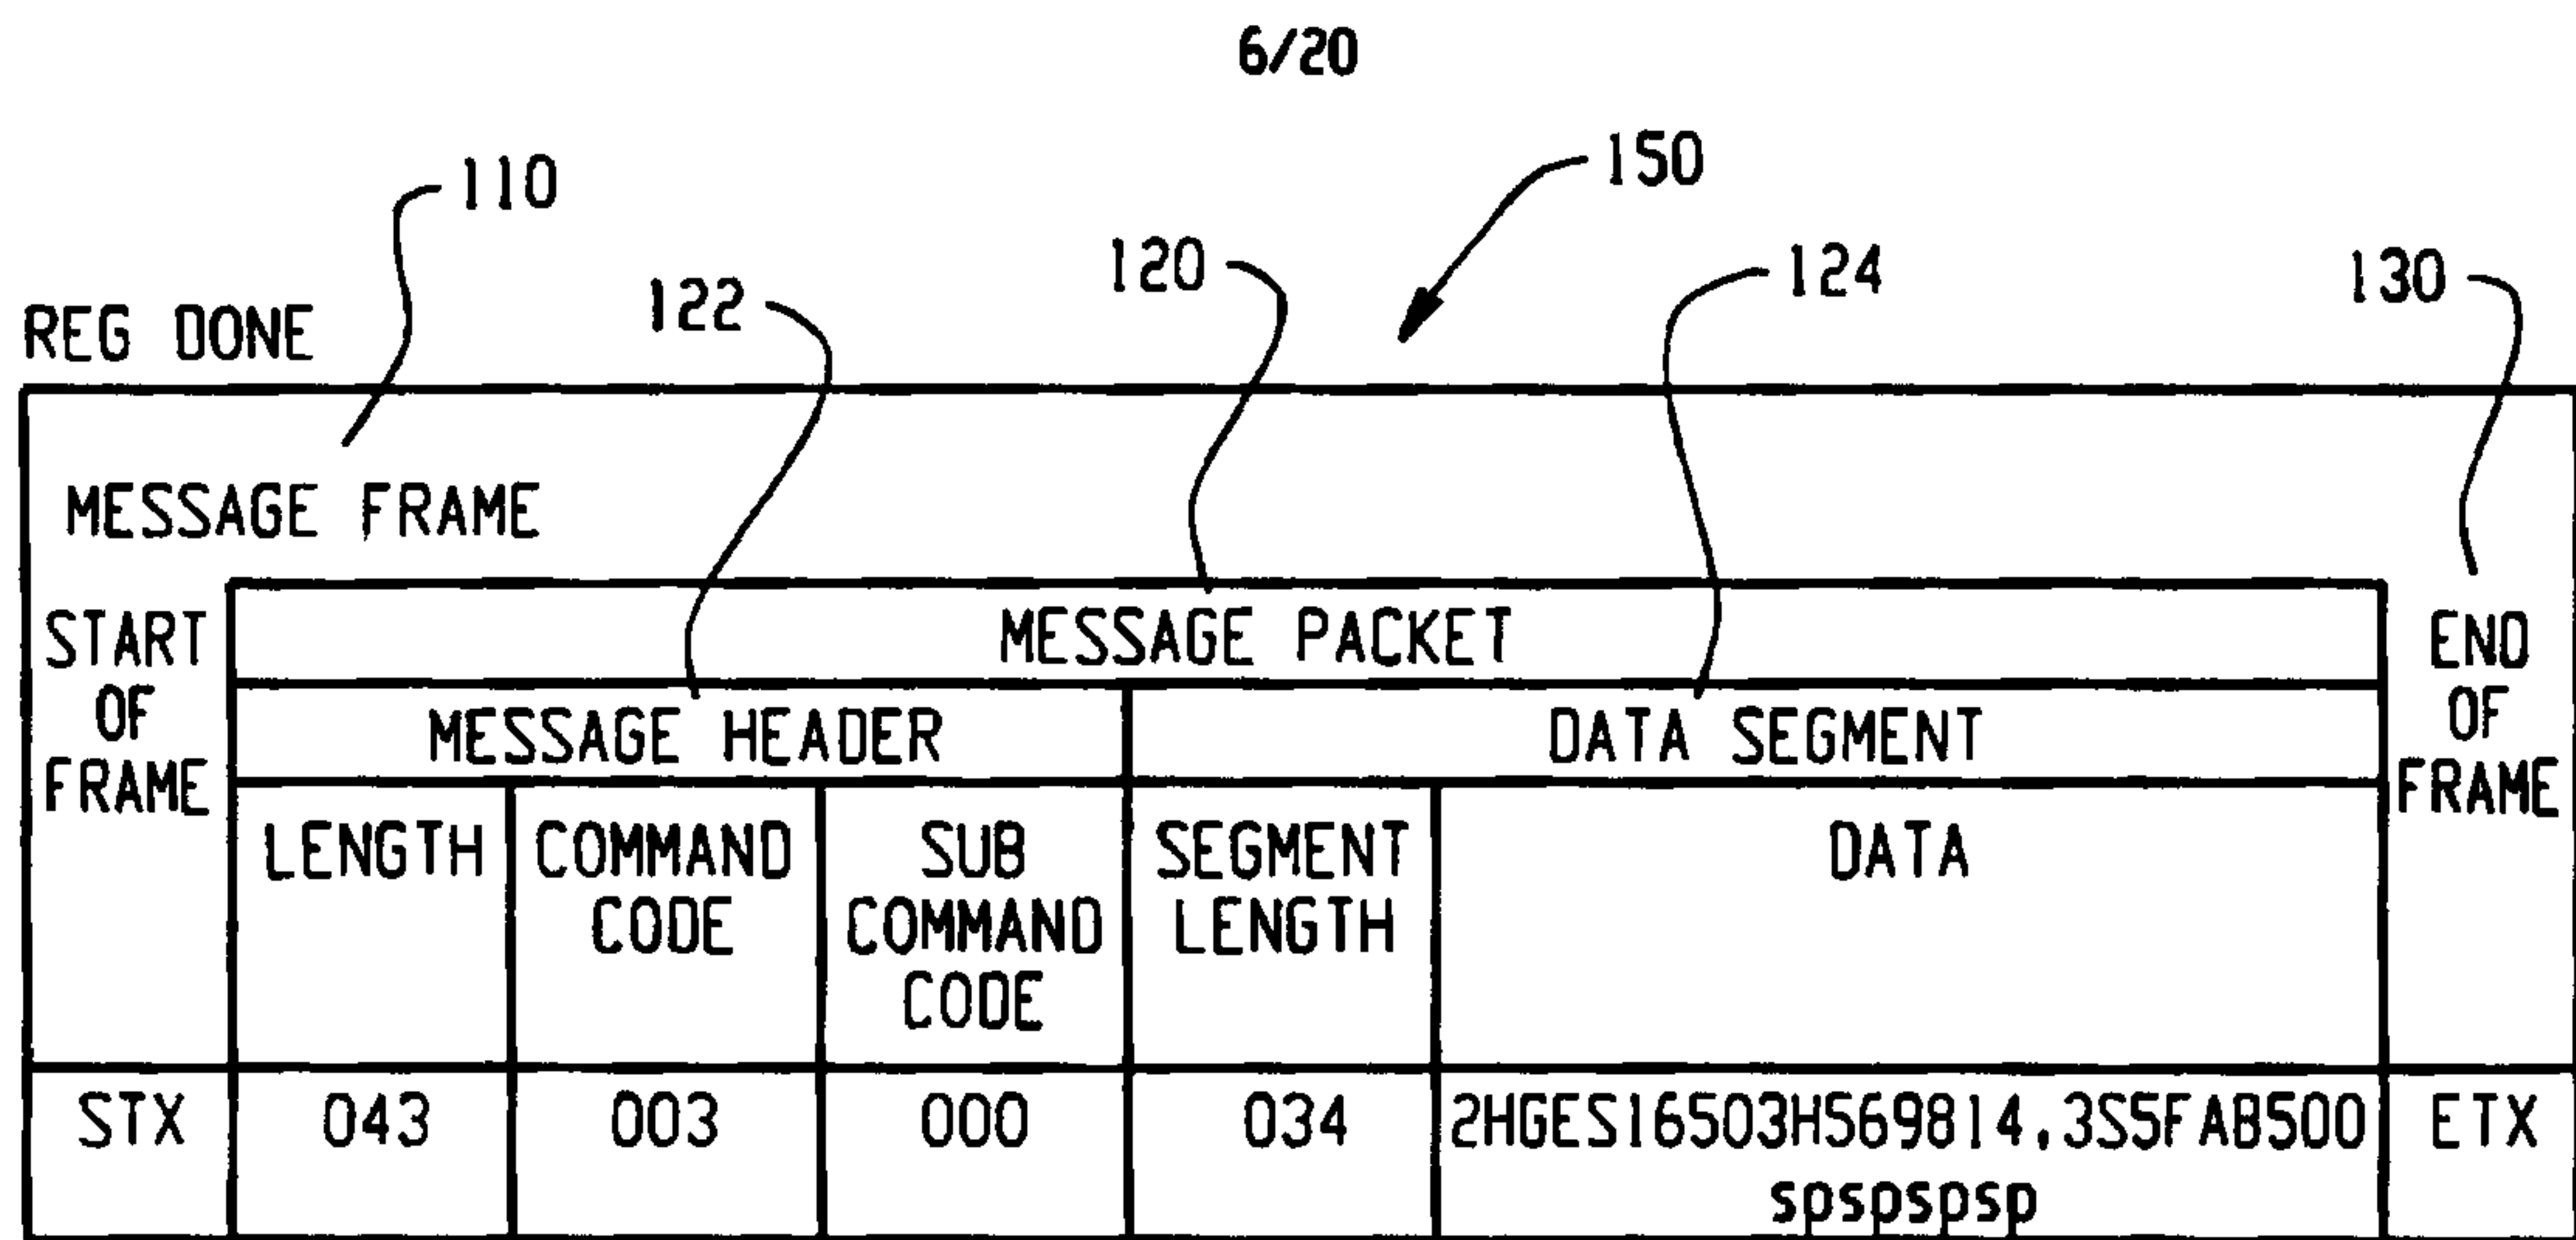


Fig. 2G

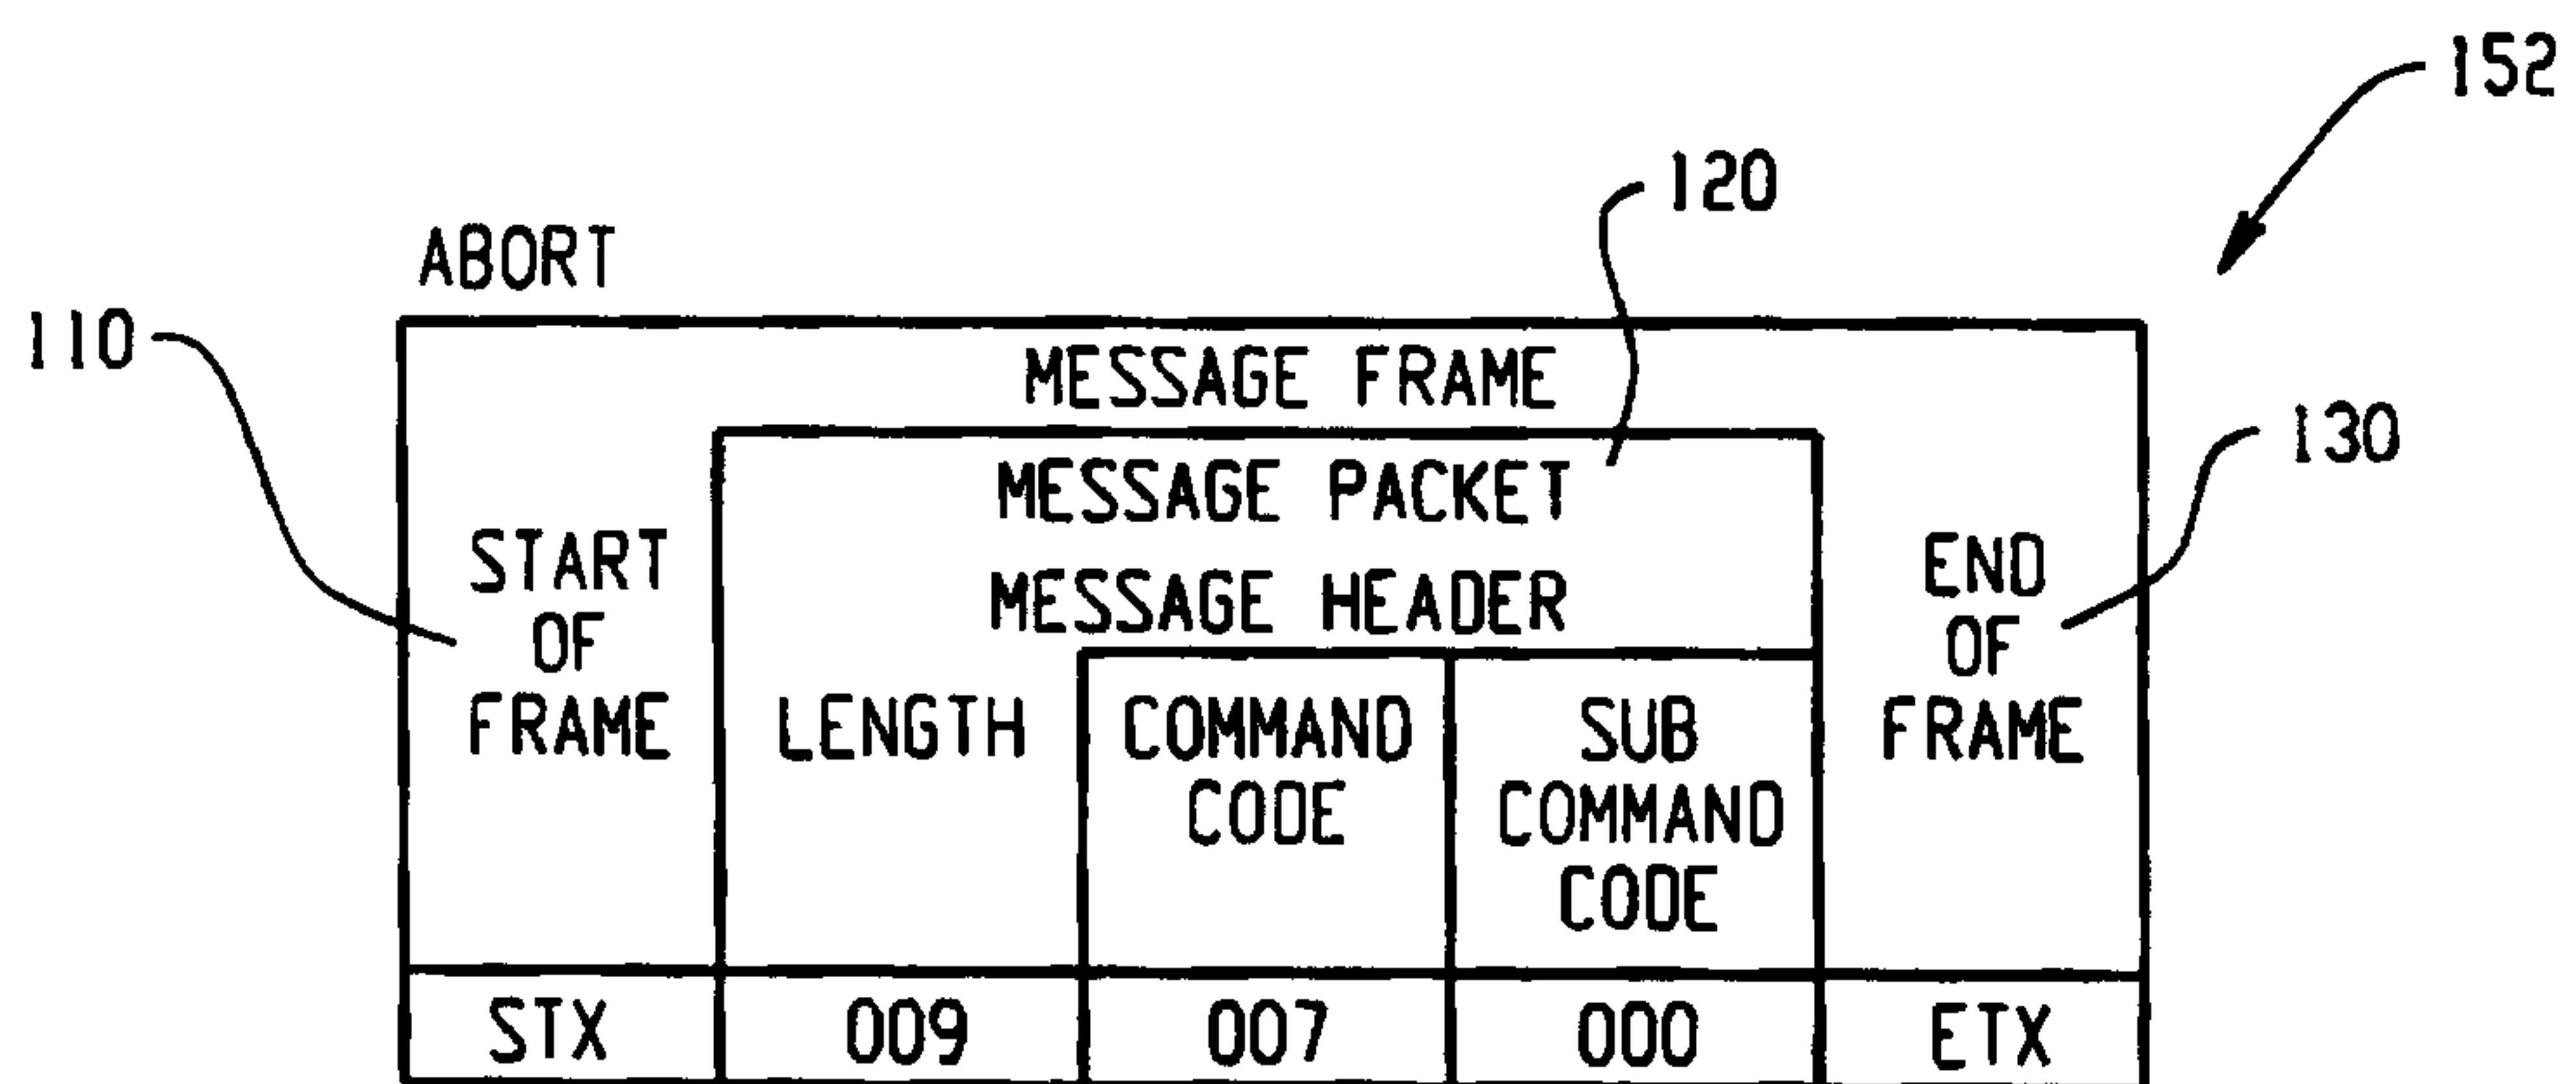


Fig. 2H

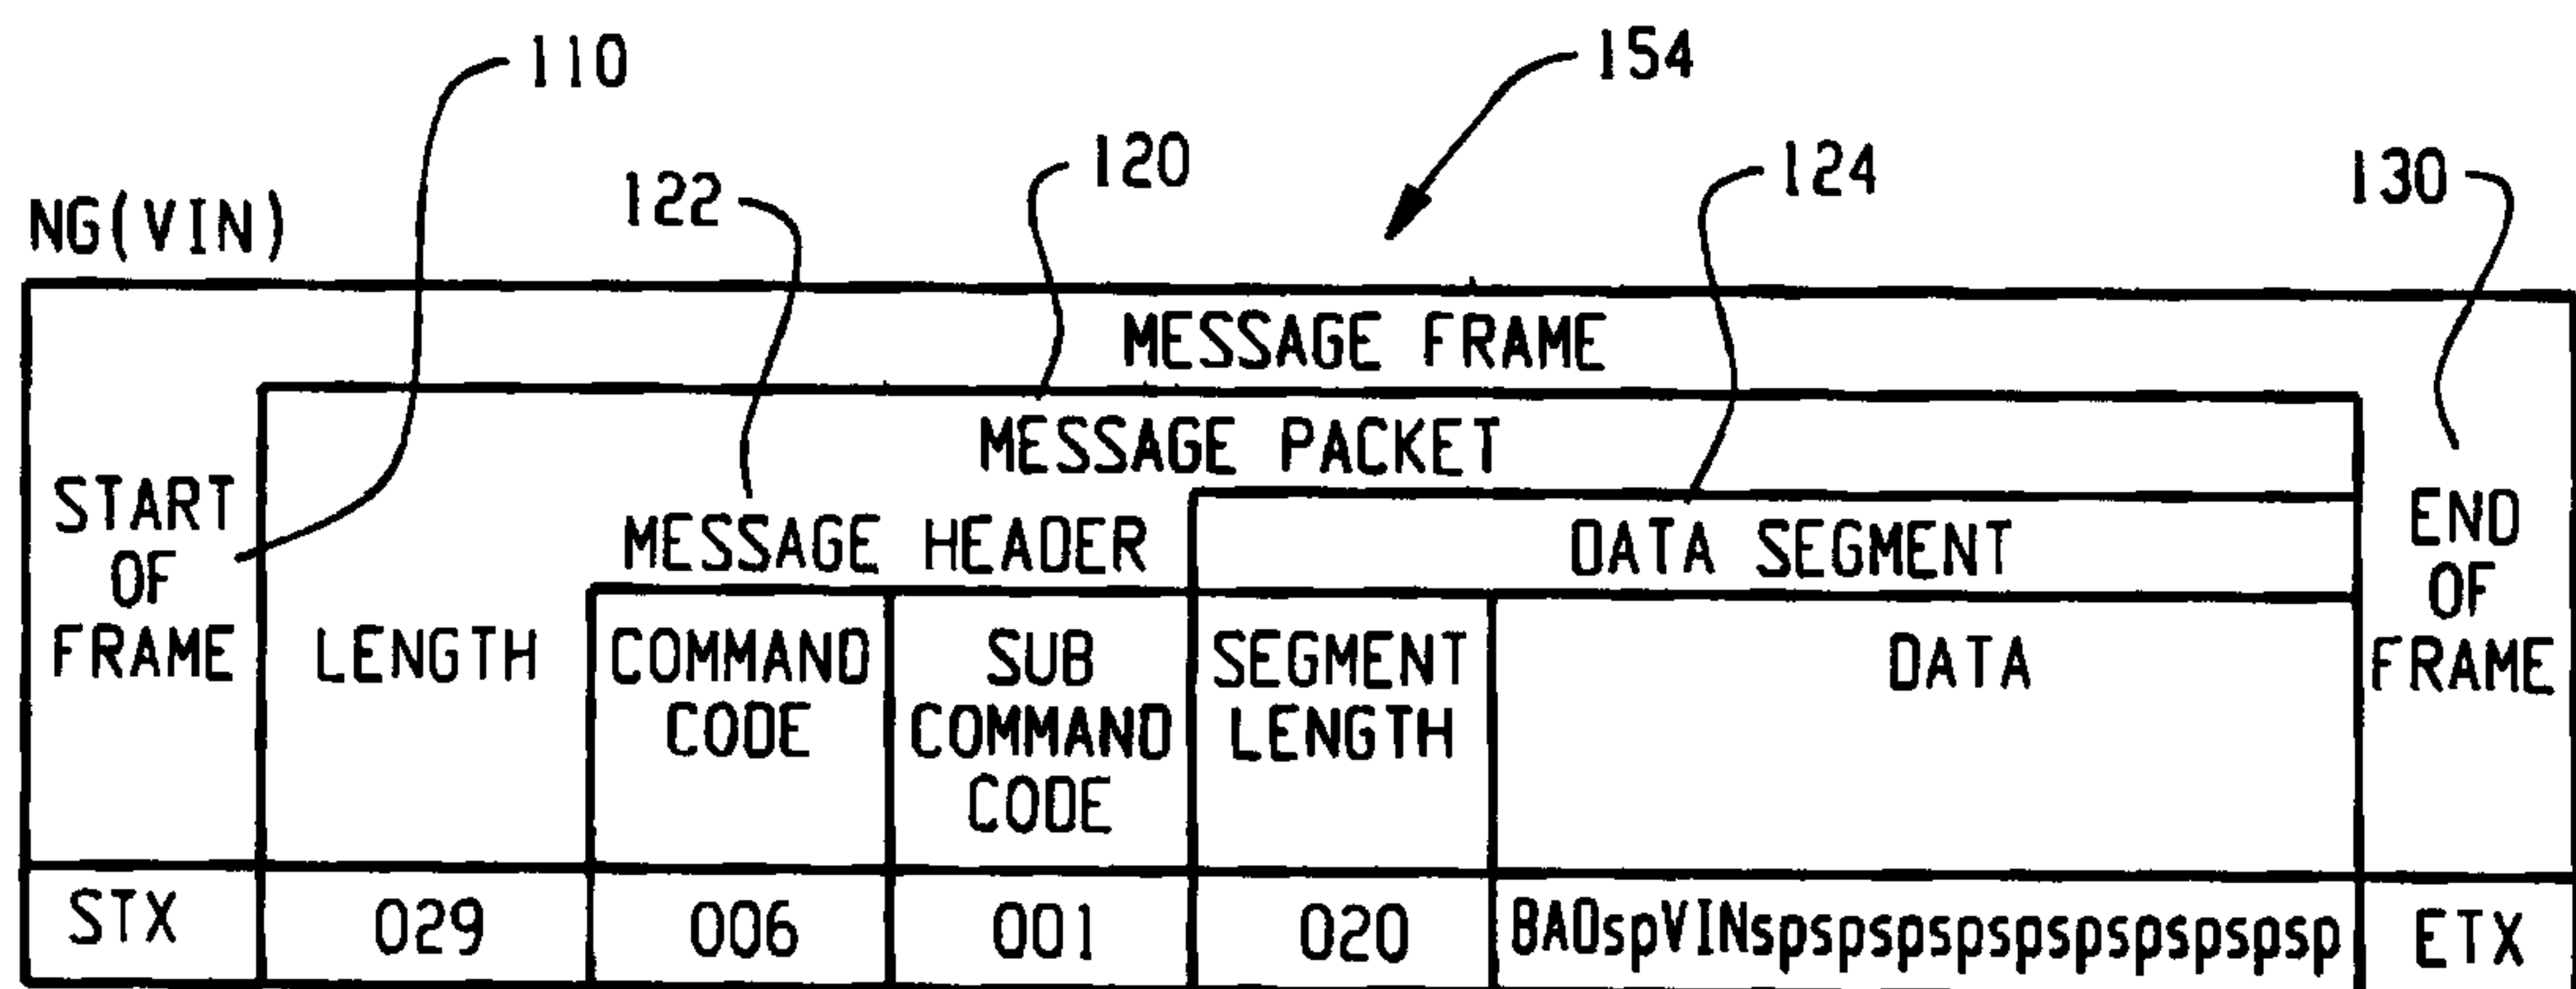


Fig. 2I

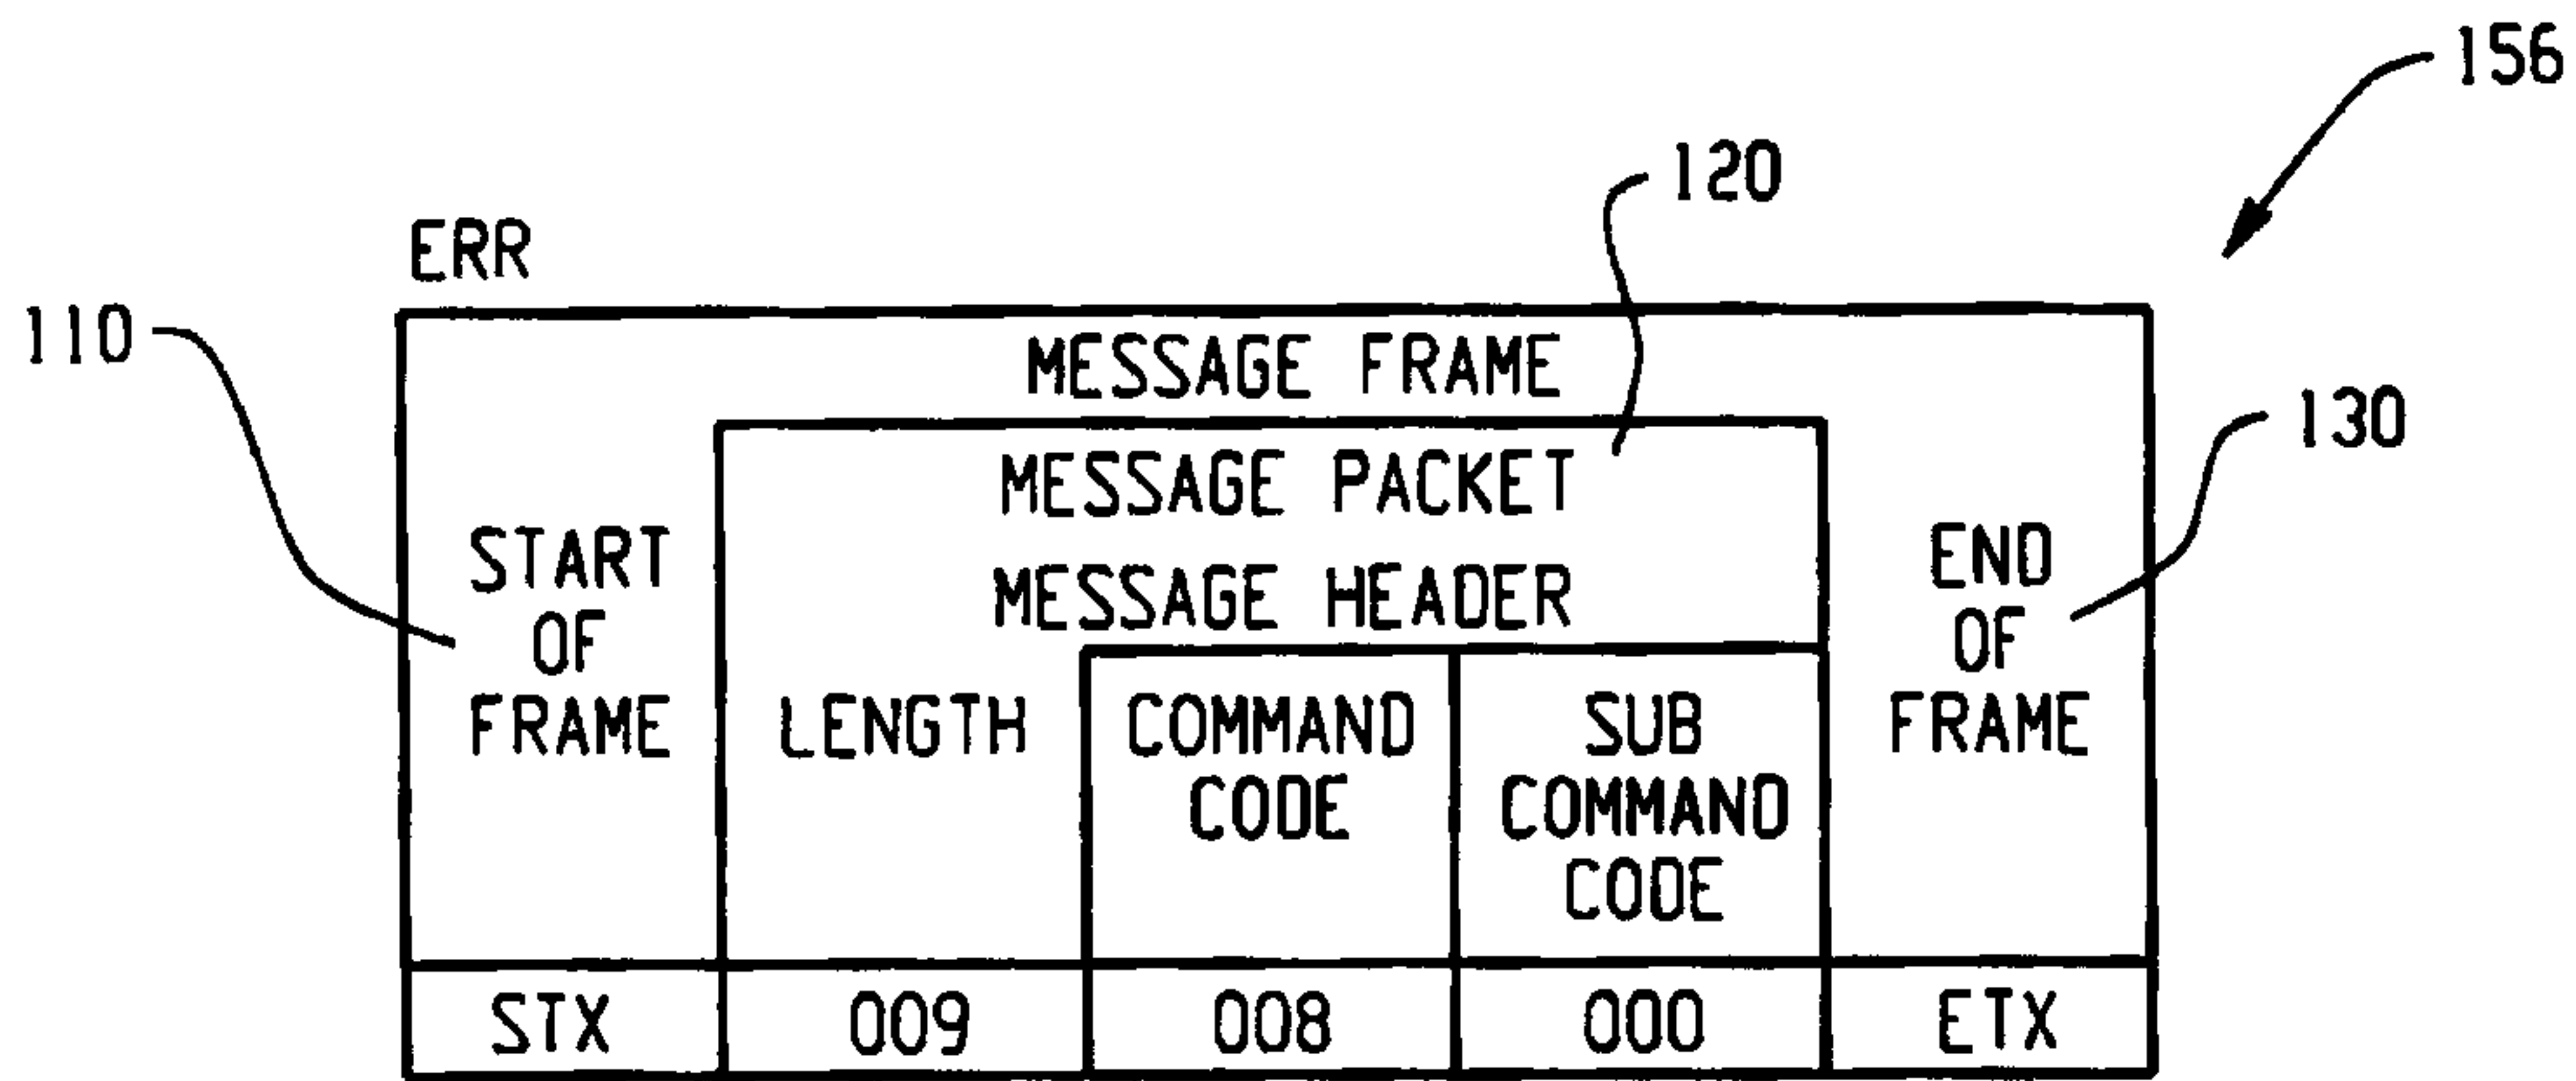


Fig. 2J

OK REG

START OF FRAME	MESSAGE FRAME					END OF FRAME
	MESSAGE PACKET					
	MESSAGE HEADER			DATA SEGMENT		
	LENGTH	COMMAND CODE	SUB COMMAND CODE	SEGMENT LENGTH	DATA	
STX	043	003	000	034	2HGESI6503H569814,3S5FAB500 spspspsp	ETX

Fig. 2K

8/20

200

208

210

202

204

206

SYSTEM CLIENT

VIN

EXPECTED VIN

2HKYF18444H558697

STATUS

READY TO SCAN VIN

UPCOMING VEHICLES

PROCESSED VEHICLES

REF. NO.	VIN	HTOC
1805	2HKYF18444H558697	4S9VL85NH638M A 00
1806	2HKYF18414H558706	4S9VL85NH638M A 00
1807	2HKYF18424H558696	4S9VL85NH638M A 00
1808	2HKYF18434H558707	4S9VL85NH638M A 00

NONE CLIENT SYSTEM STARTED

FRI, FEB. 20, 2004 12:43:41

Fig. 3A

220

202

204

206

SYSTEM CLIENT

VIN

2HNYD18814H514698

EXPECTED VIN

2HNYD18814H514698

STATUS

SENT VIN
WAITING FOR VIN ACK

UPCOMING VEHICLES

PROCESSED VEHICLES

REF. NO.	VIN	HTOC
9126	2HNYD18814H514698	4S3V A7NH677P E 00
9127	2HNYD18804H514689	4S3V A7NH677P E 00
9128	2HNYD18874H514690	4S3V A7NH677P E 00
9129	2HNYD18834H514699	4S3V A7NH677P E 00

NONE CLIENT SYSTEM STARTED

TUE, JAN 13, 2004 14:53:16

Fig. 3B

9/20

222

SYSTEM CLIENT

VIN
2HNYD18814H514698 202

MTOC
4S3V A7NH677P E 00 204

STATUS
RECEIVED VIN ACK
SENT MTOC
WAITING FOR MTOC ACK 206

UPCOMING VEHICLES		PROCESSED VEHICLES	
REF. NO.	VIN	MTOC	
9126	2HNYD18814H514698	4S3V A7NH677P E 00	
9127	2HNYD18804H514689	4S3V A7NH677P E 00	
9128	2HNYD18874H514690	4S3V A7NH677P E 00	
9129	2HNYD18834H514699	4S3V A7NH677P E 00	

NONE CLIENT SYSTEM STARTED TUE. JAN 13, 2004 14:54:06

Fig. 3C

224

SYSTEM CLIENT

VIN
2HNYD18814H514698 202

MTOC
4S3V A7NH677P E 00 204

STATUS
RECEIVED MTOC ACK
SENT OK MTOC
WAITING FOR REG DONE 206

UPCOMING VEHICLES		PROCESSED VEHICLES	
REF. NO.	VIN	MTOC	
9126	2HNYD18814H514698	4S3V A7NH677P E 00	
9127	2HNYD18804H514689	4S3V A7NH677P E 00	
9128	2HNYD18874H514690	4S3V A7NH677P E 00	
9129	2HNYD18834H514699	4S3V A7NH677P E 00	

NONE CLIENT SYSTEM STARTED TUE. JAN 13, 2004 14:28:55

Fig. 3D

10/20

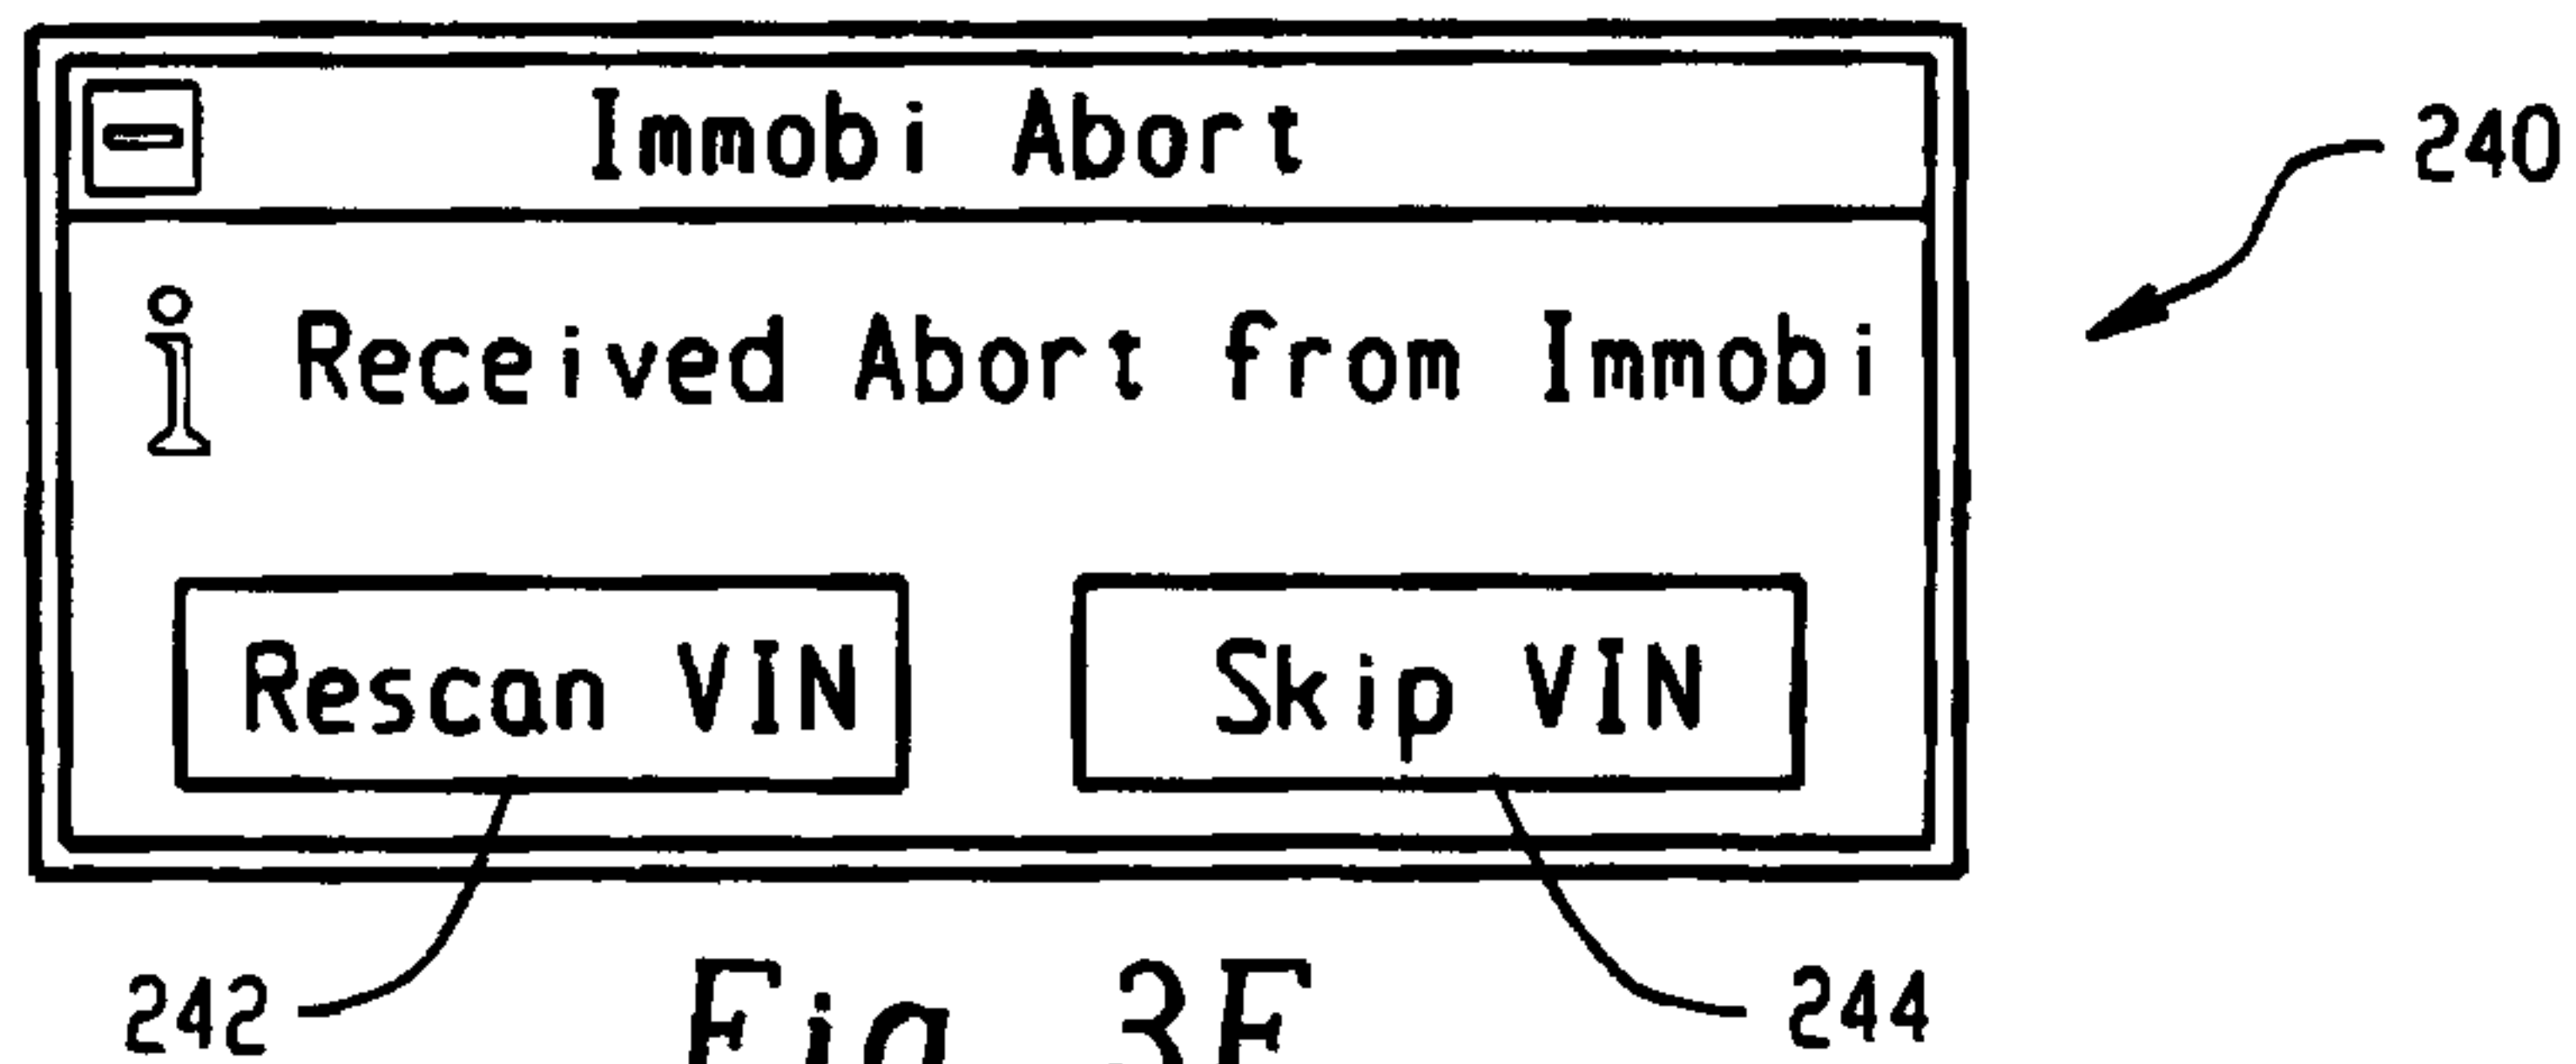


Fig. 3E

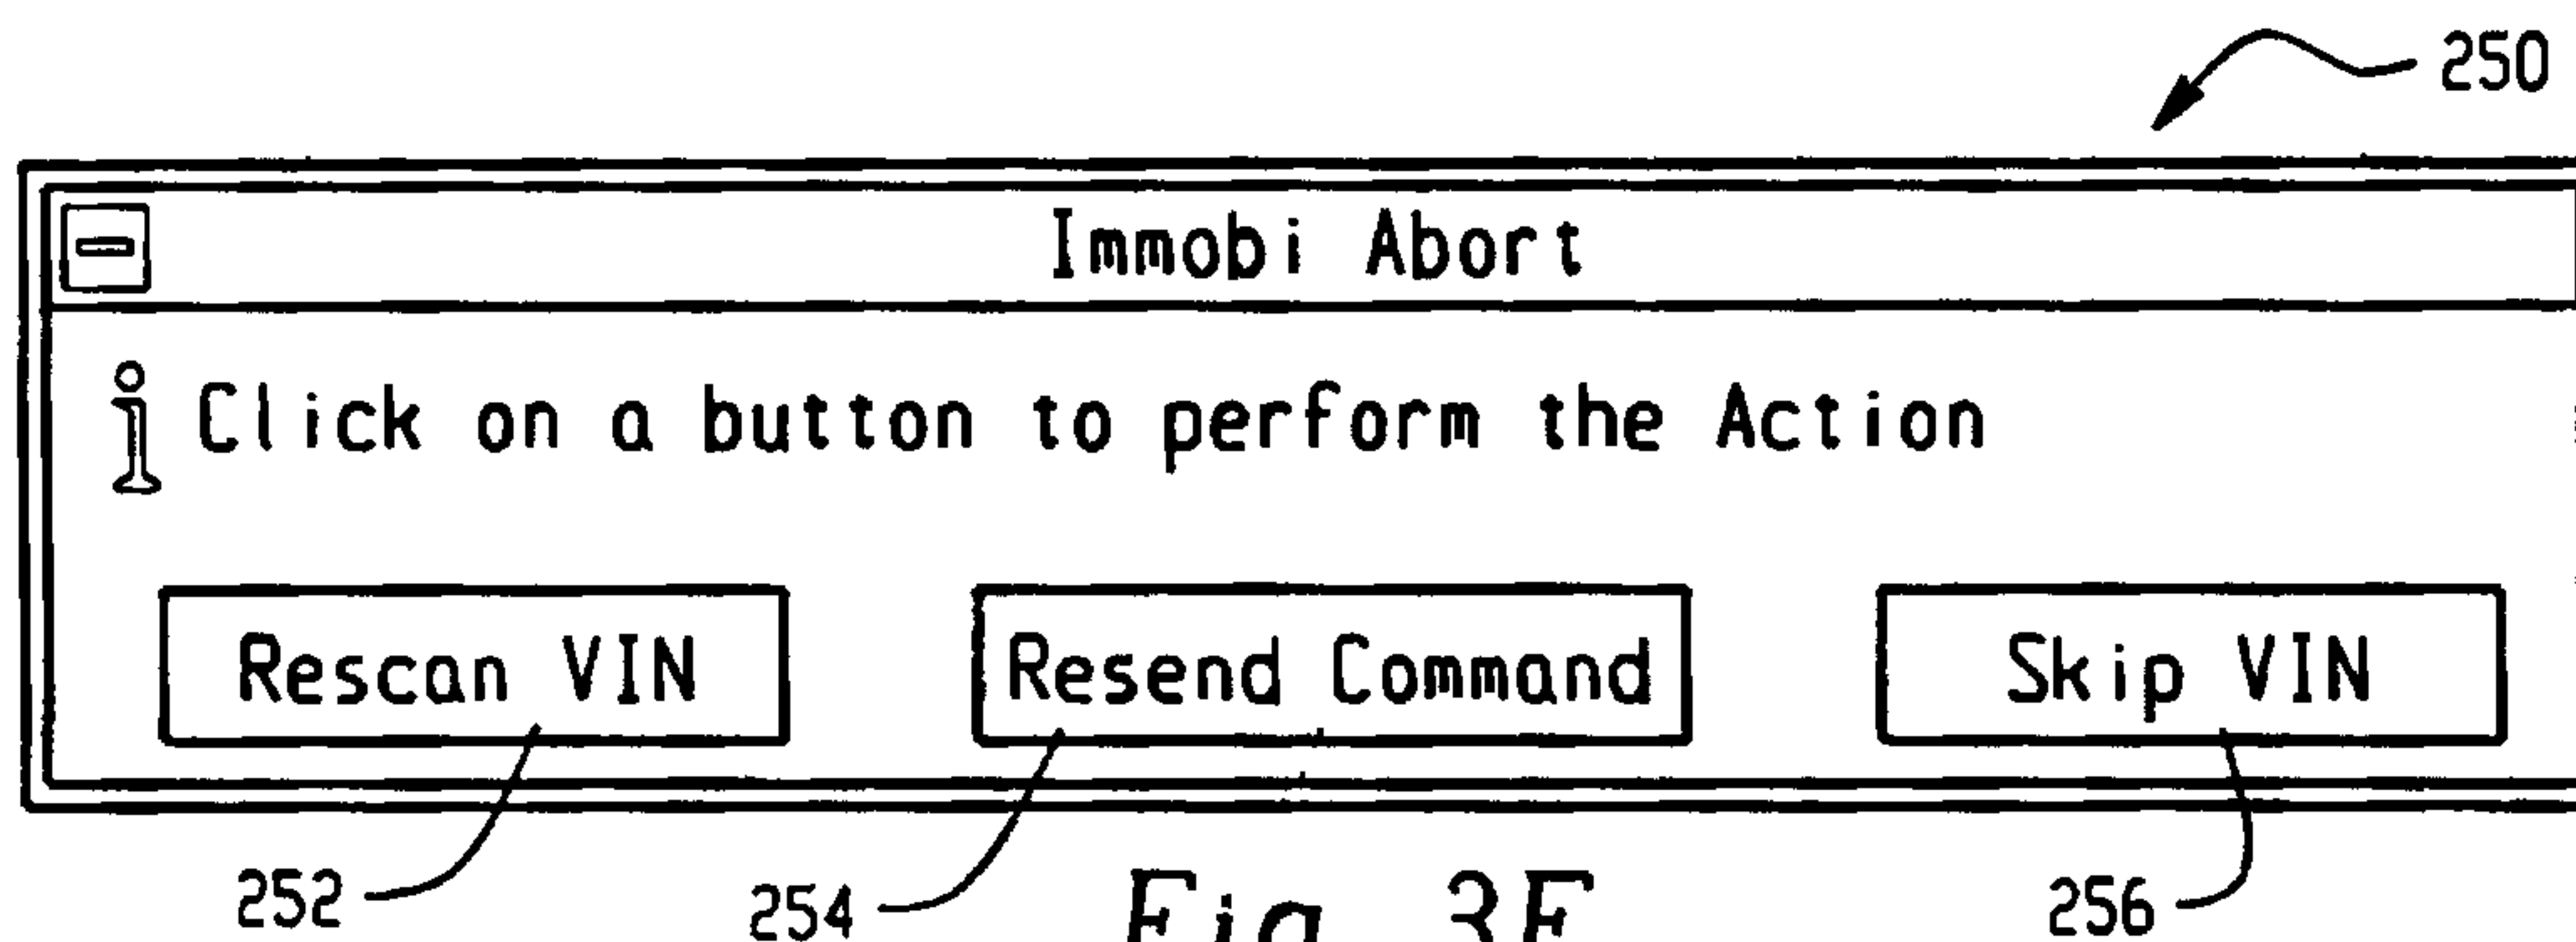


Fig. 3F

Fig. 3G is a screenshot of a "SYSTEM CLIENT" window. It displays the following information:

- VIN:** 2HNYD18814H514698
- EXPECTED VIN:** 2HNYD18814H514698
- STATUS:** COMMAND (VIN-2HNYD18814H514698) WAS RESENT TO IMMOBI WAITING FOR VIN ACK
- UPCOMING VEHICLES / PROCESSED VEHICLES:** A table with 4 columns: REF. NO., VIN, NTIC, and an empty column.
- Footer:** NONE, CLIENT SYSTEM STARTED, TUE. JAN 13, 2004, 13:48:09

REF. NO.	VIN	NTIC	
9126	2HNYD18814H514698	4S3V A7NH677P E 00	
9127	2HNYD18804H514689	4S3V A7NH677P E 00	
9128	2HNYD18874H514690	4S3V A7NH677P E 00	
9129	2HNYD18834H514699	4S3V A7NH677P E 00	

Fig. 3G

11/20

SYSTEM CLIENT

VIN
2HNYD18814H514698

MTOC
4S3V A7NH677P E 00

STATUS
COMMAND (MTOC-4S3V A7NH677P E 00) WAS RESENT TO IMMOBI
WAITING FOR MTOC ACK

REF. NO.	VIN	MTOC
9126	2HNYD18814H514698	4S3V A7NH677P E 00
9127	2HNYD18804H514689	4S3V A7NH677P E 00
9128	2HNYD18874H514690	4S3V A7NH677P E 00
9129	2HNYD18834H514699	4S3V A7NH677P E 00

NONE CLIENT SYSTEM STARTED TUE. JAN 13. 2004 13:49:07

Fig. 3H

Error

Scanned VIN does not match the expected VIN

Scanned VIN is: 2HKYF18554H554229




Expected VIN is: 2HKYF13514H554227

Do you want to skip 2 vehicles and set the expected VIN to the one you scanned?

YES NO

Fig. 3I

12/20

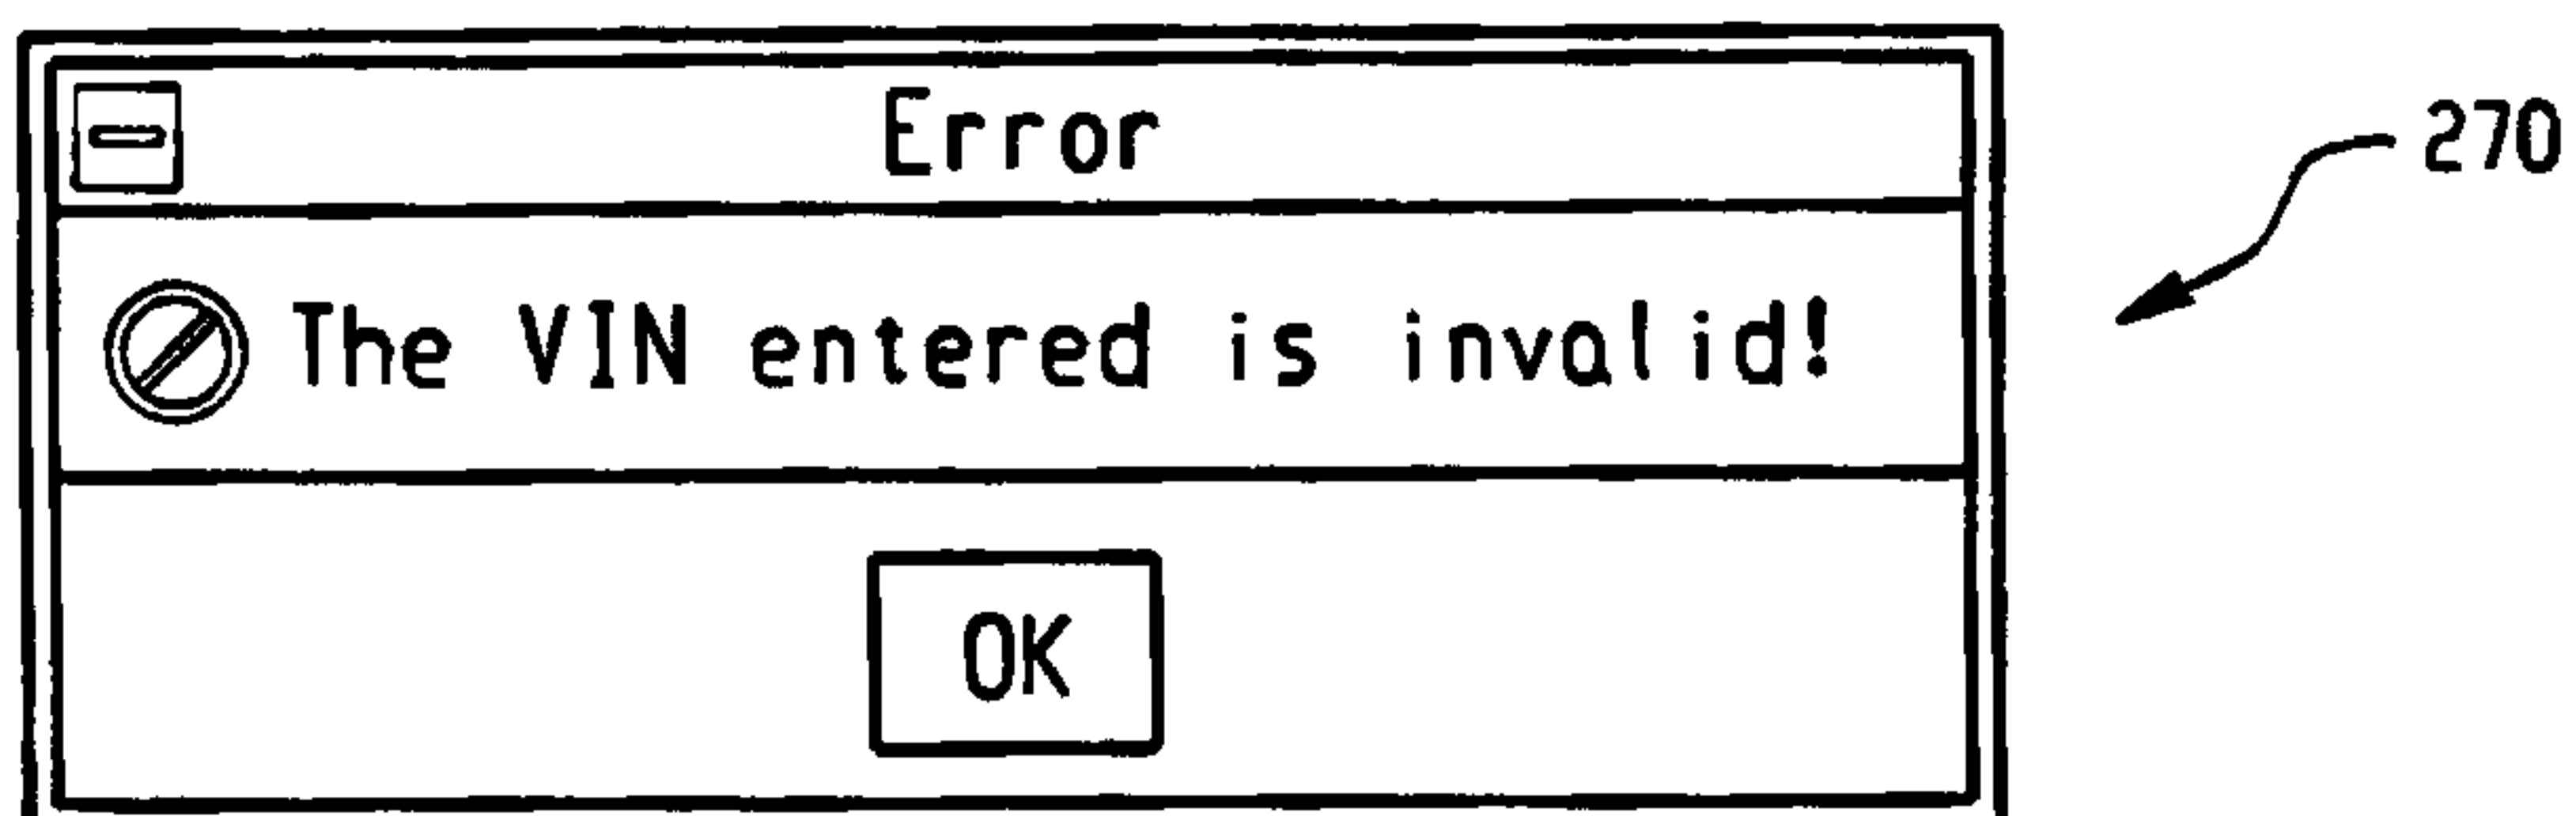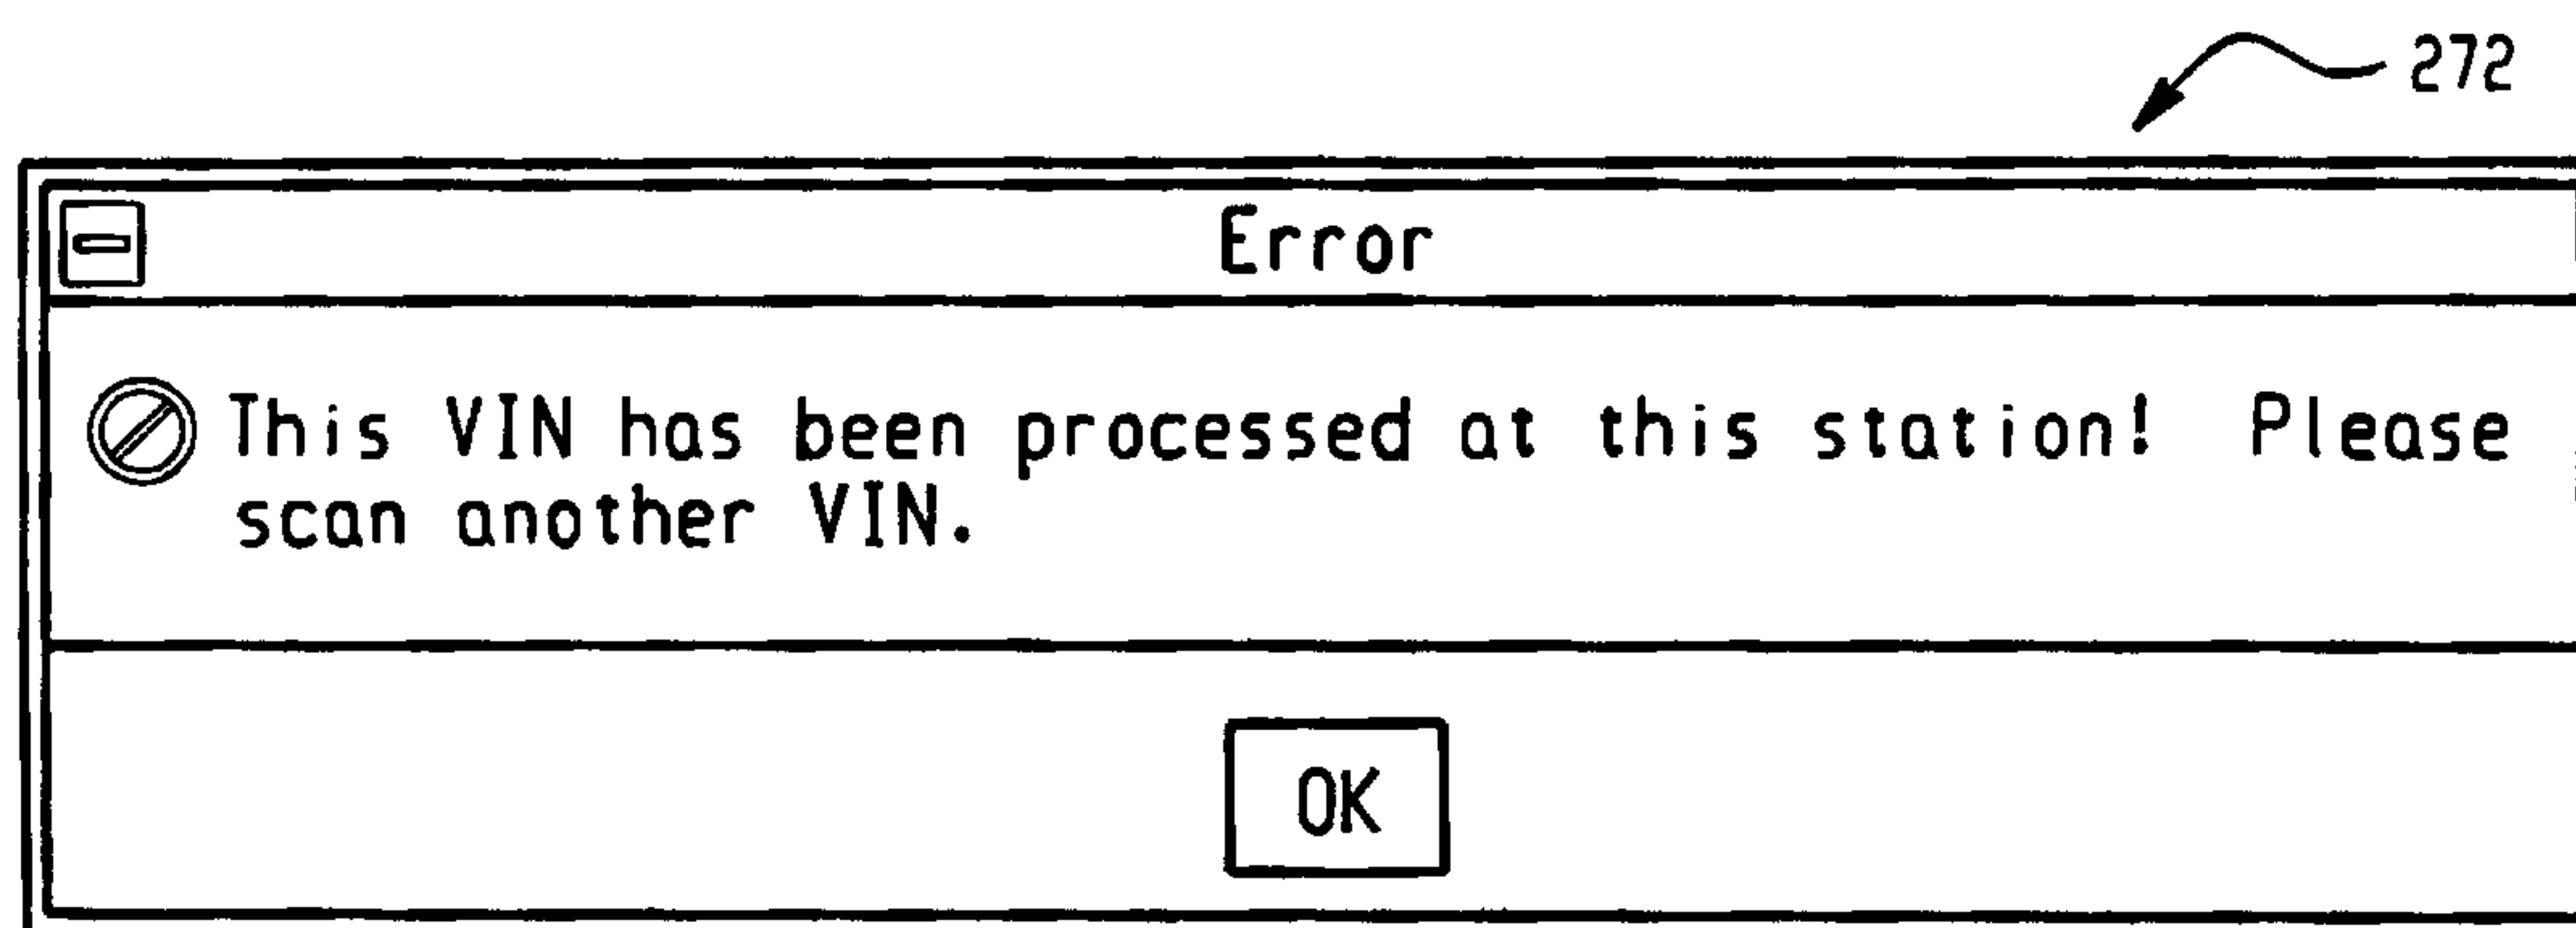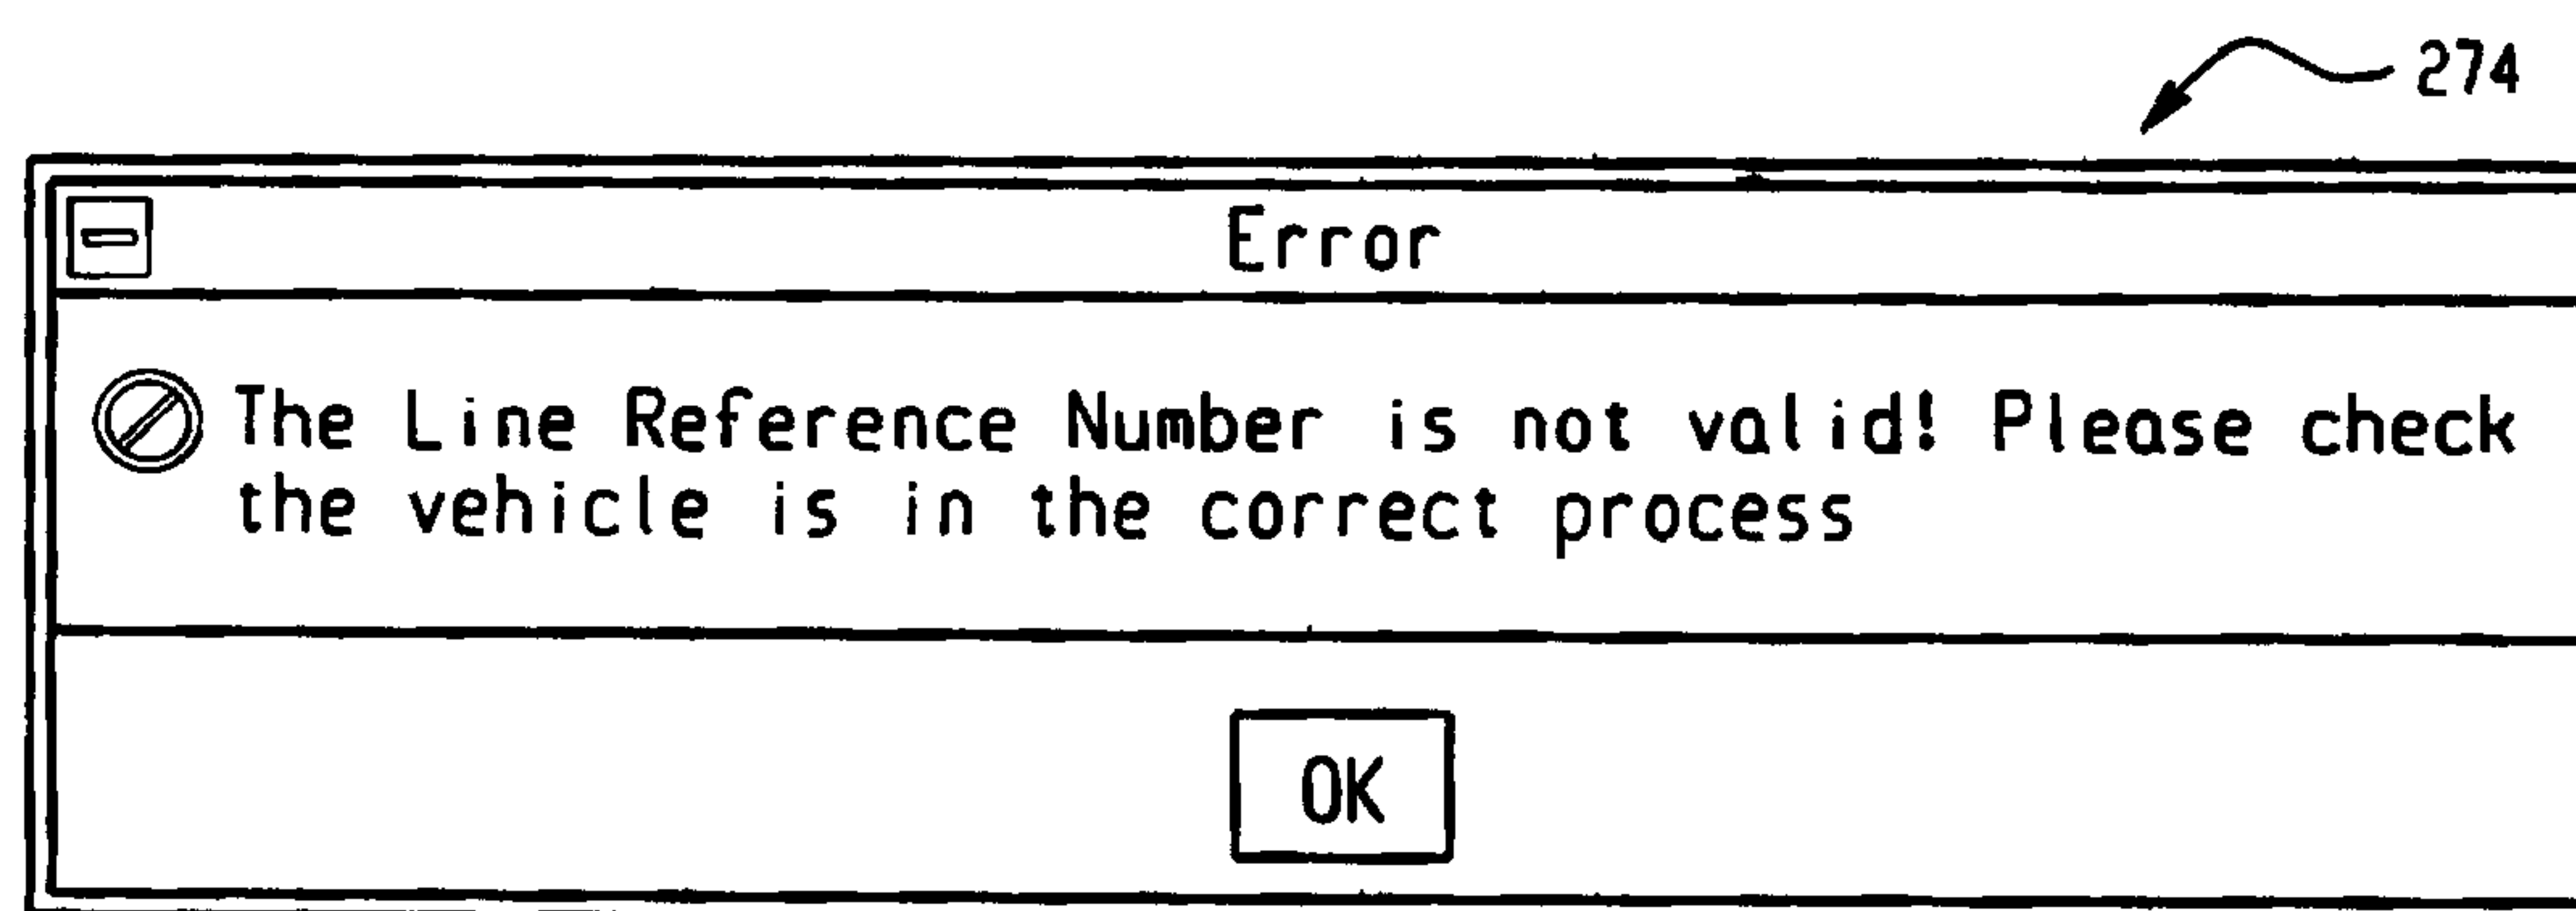*Fig. 3J**Fig. 3K**Fig. 3L*

13/20


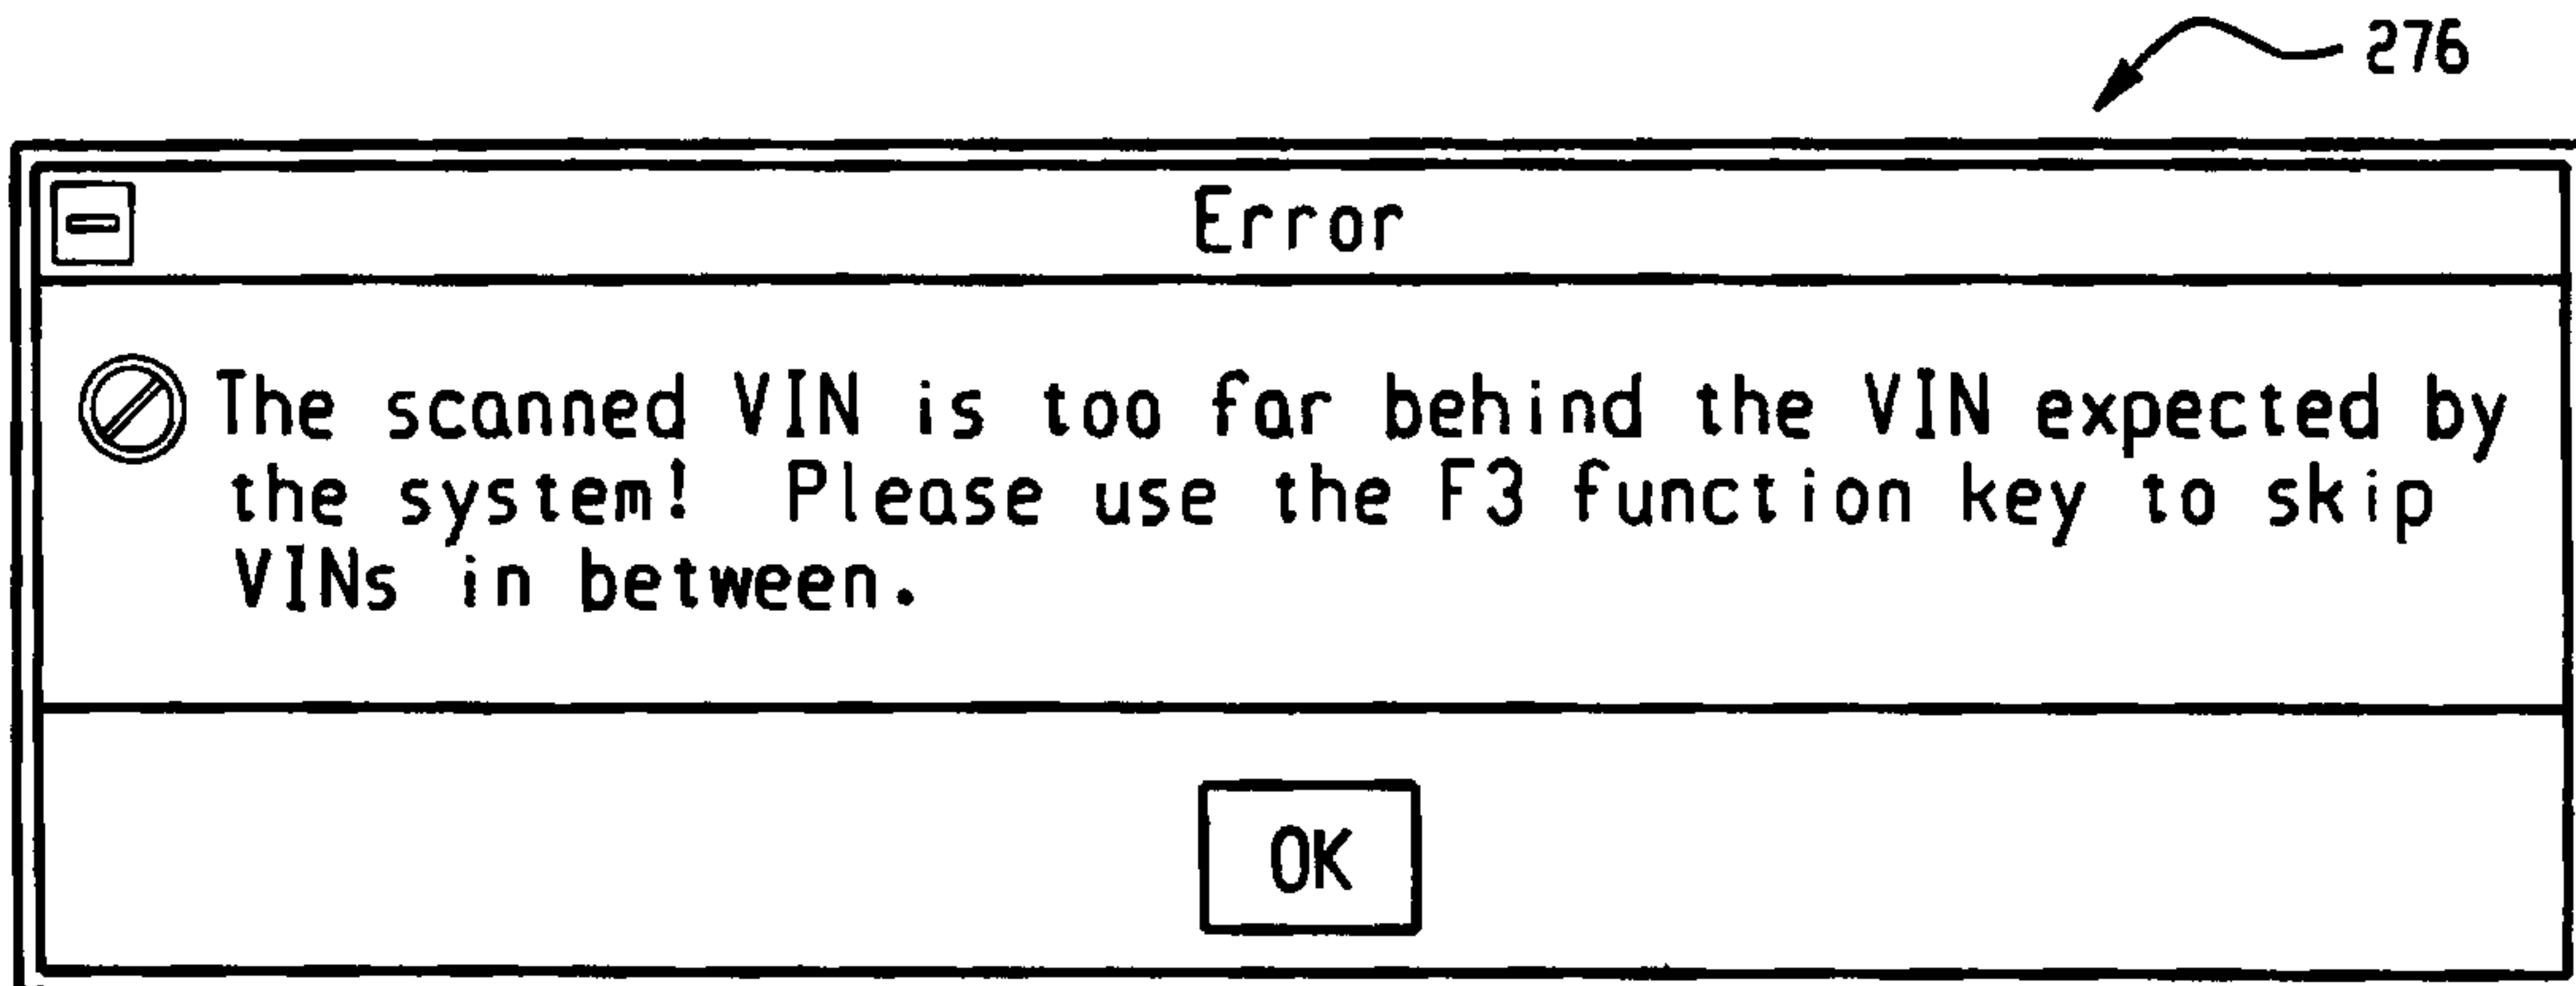


Fig. 3M

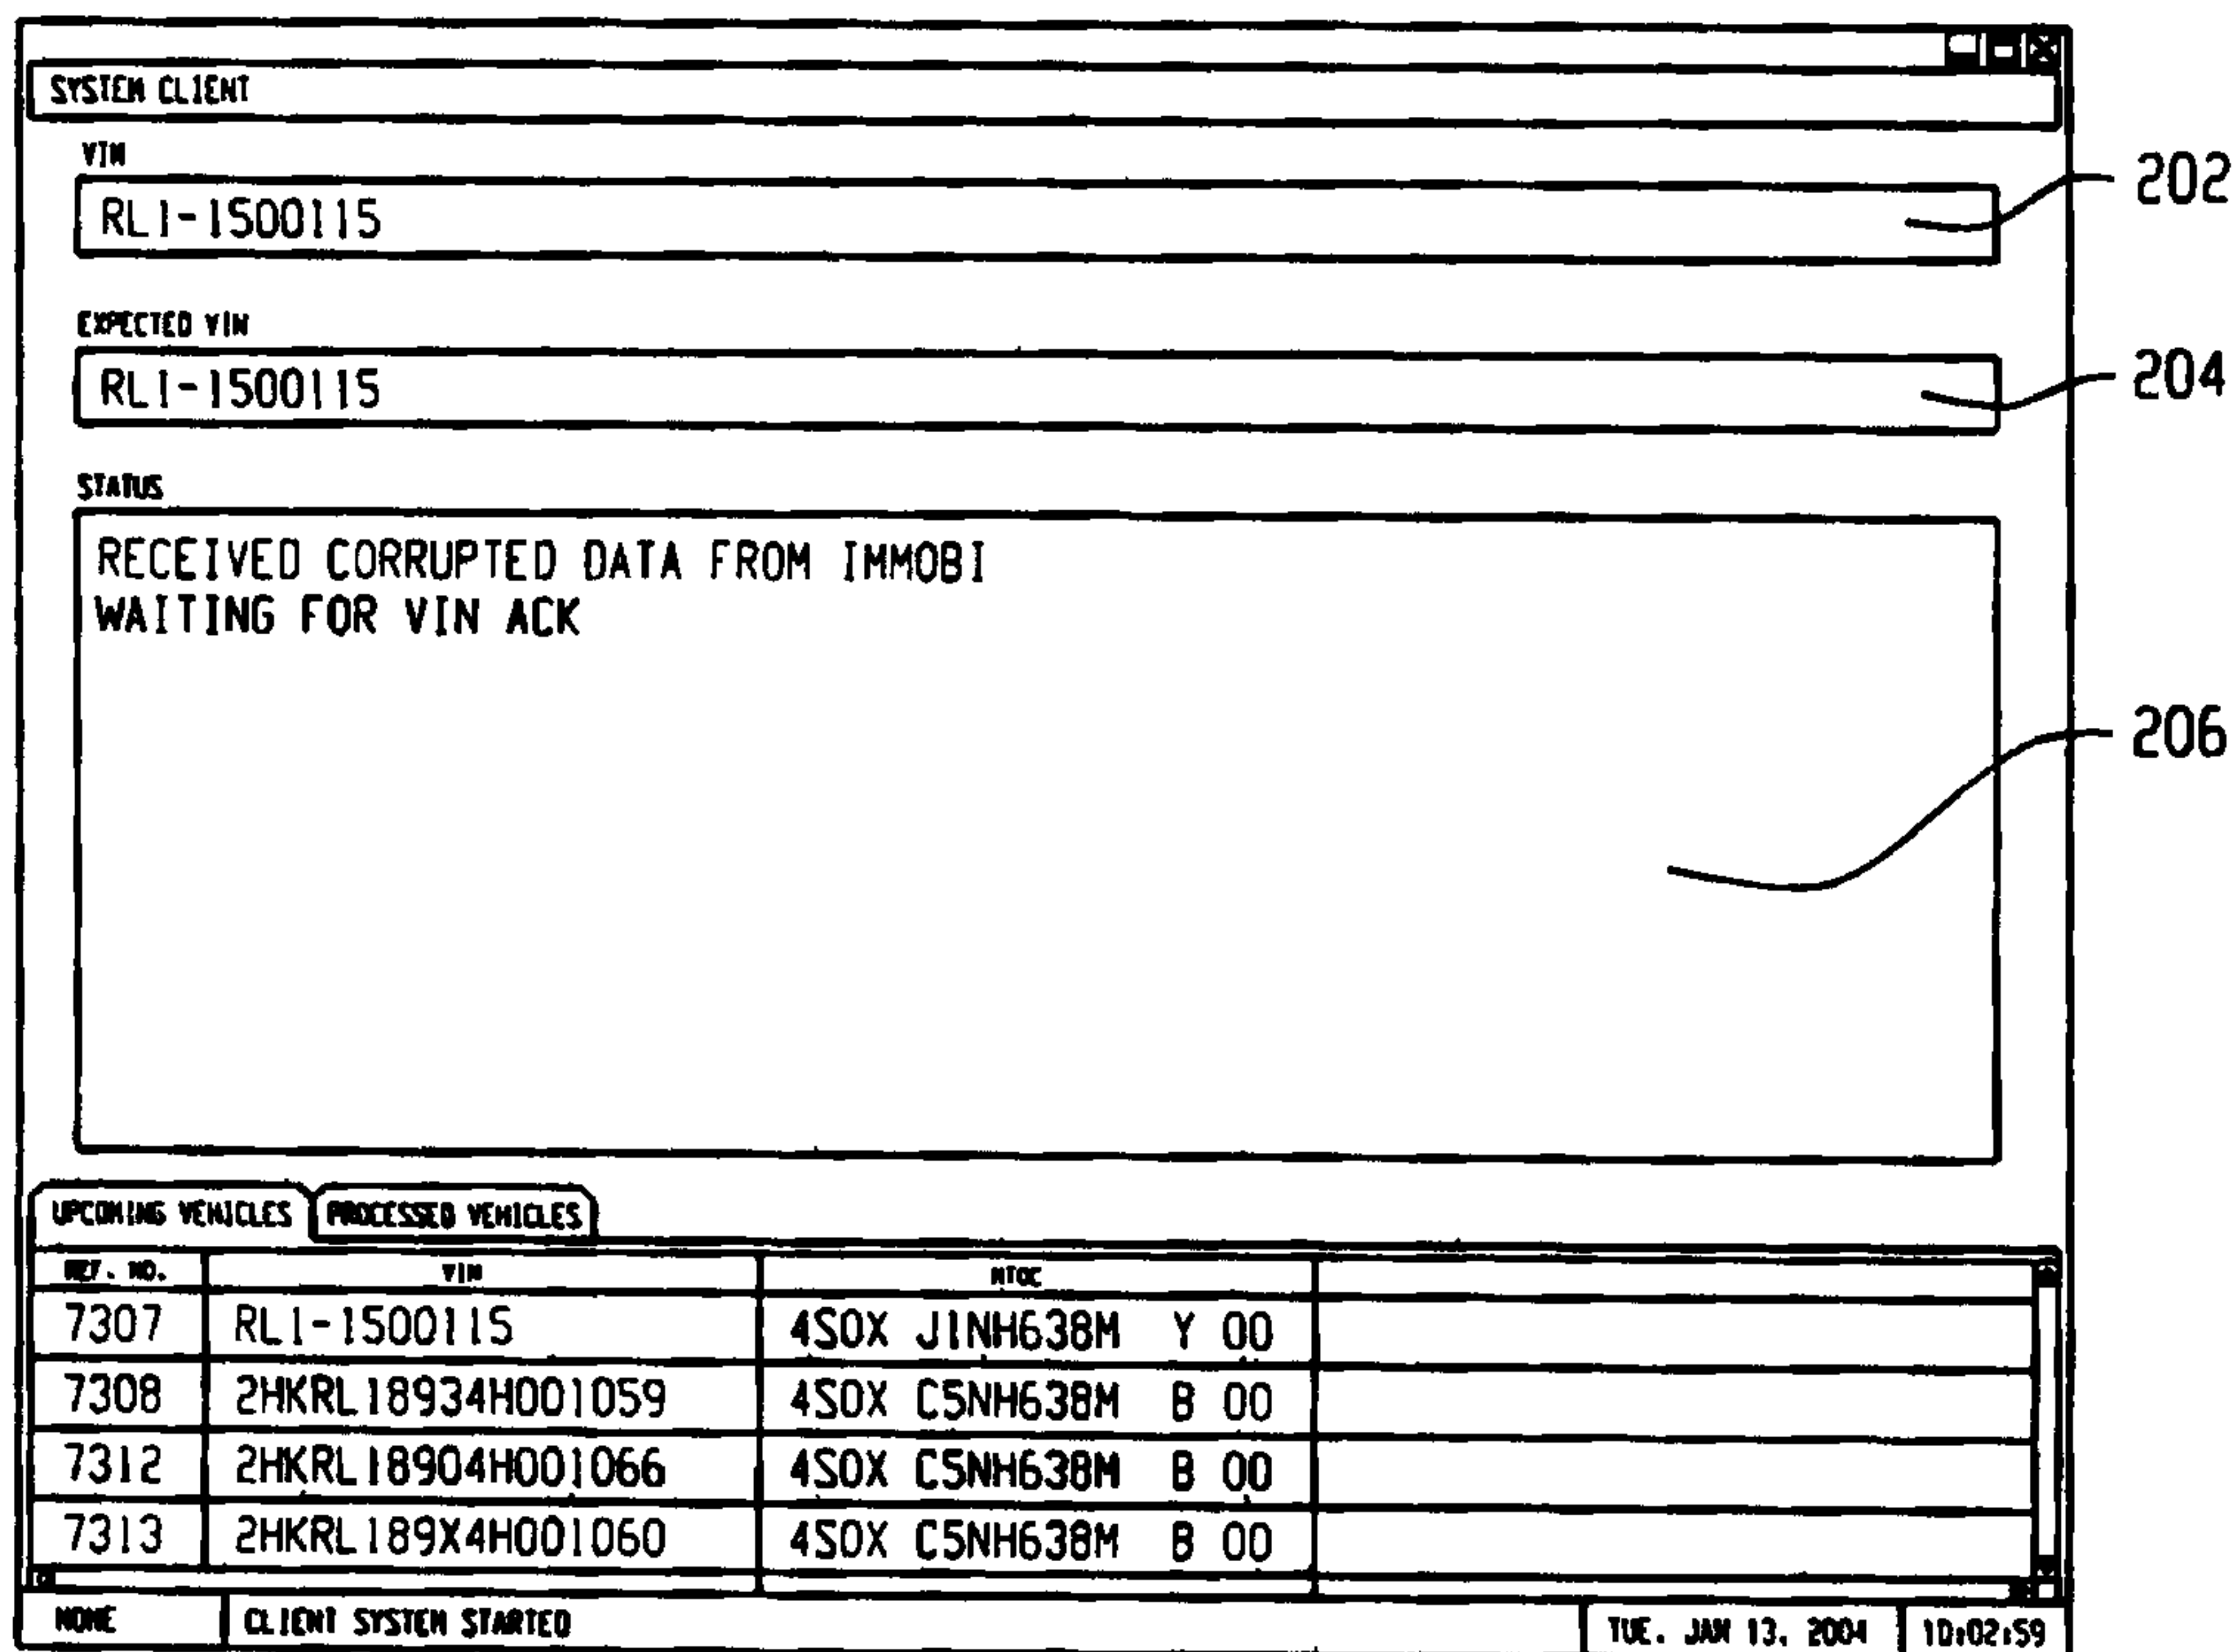

A screenshot of a "SYSTEM CLIENT" window. It contains several input fields and a status area. Reference numerals 202, 204, and 206 point to the VIN input field, the EXPECTED VIN input field, and the status text area, respectively.

VIN
RL1-1500115

EXPECTED VIN
RL1-1500115

STATUS
RECEIVED CORRUPTED DATA FROM IMMOBI
WAITING FOR VIN ACK


UPCOMING VEHICLES		PROCESSED VEHICLES	
REF. NO.	VIN	HTOC	
7307	RL1-1500115	4SOX J1NH638M Y 00	
7308	2HKRL18934H001059	4SOX C5NH638M B 00	
7312	2HKRL18904H001066	4SOX C5NH638M B 00	
7313	2HKRL189X4H001060	4SOX C5NH638M B 00	

NONE CLIENT SYSTEM STARTED TUE. JAN 13, 2004 10:02:59

Fig. 3N

14/20

280

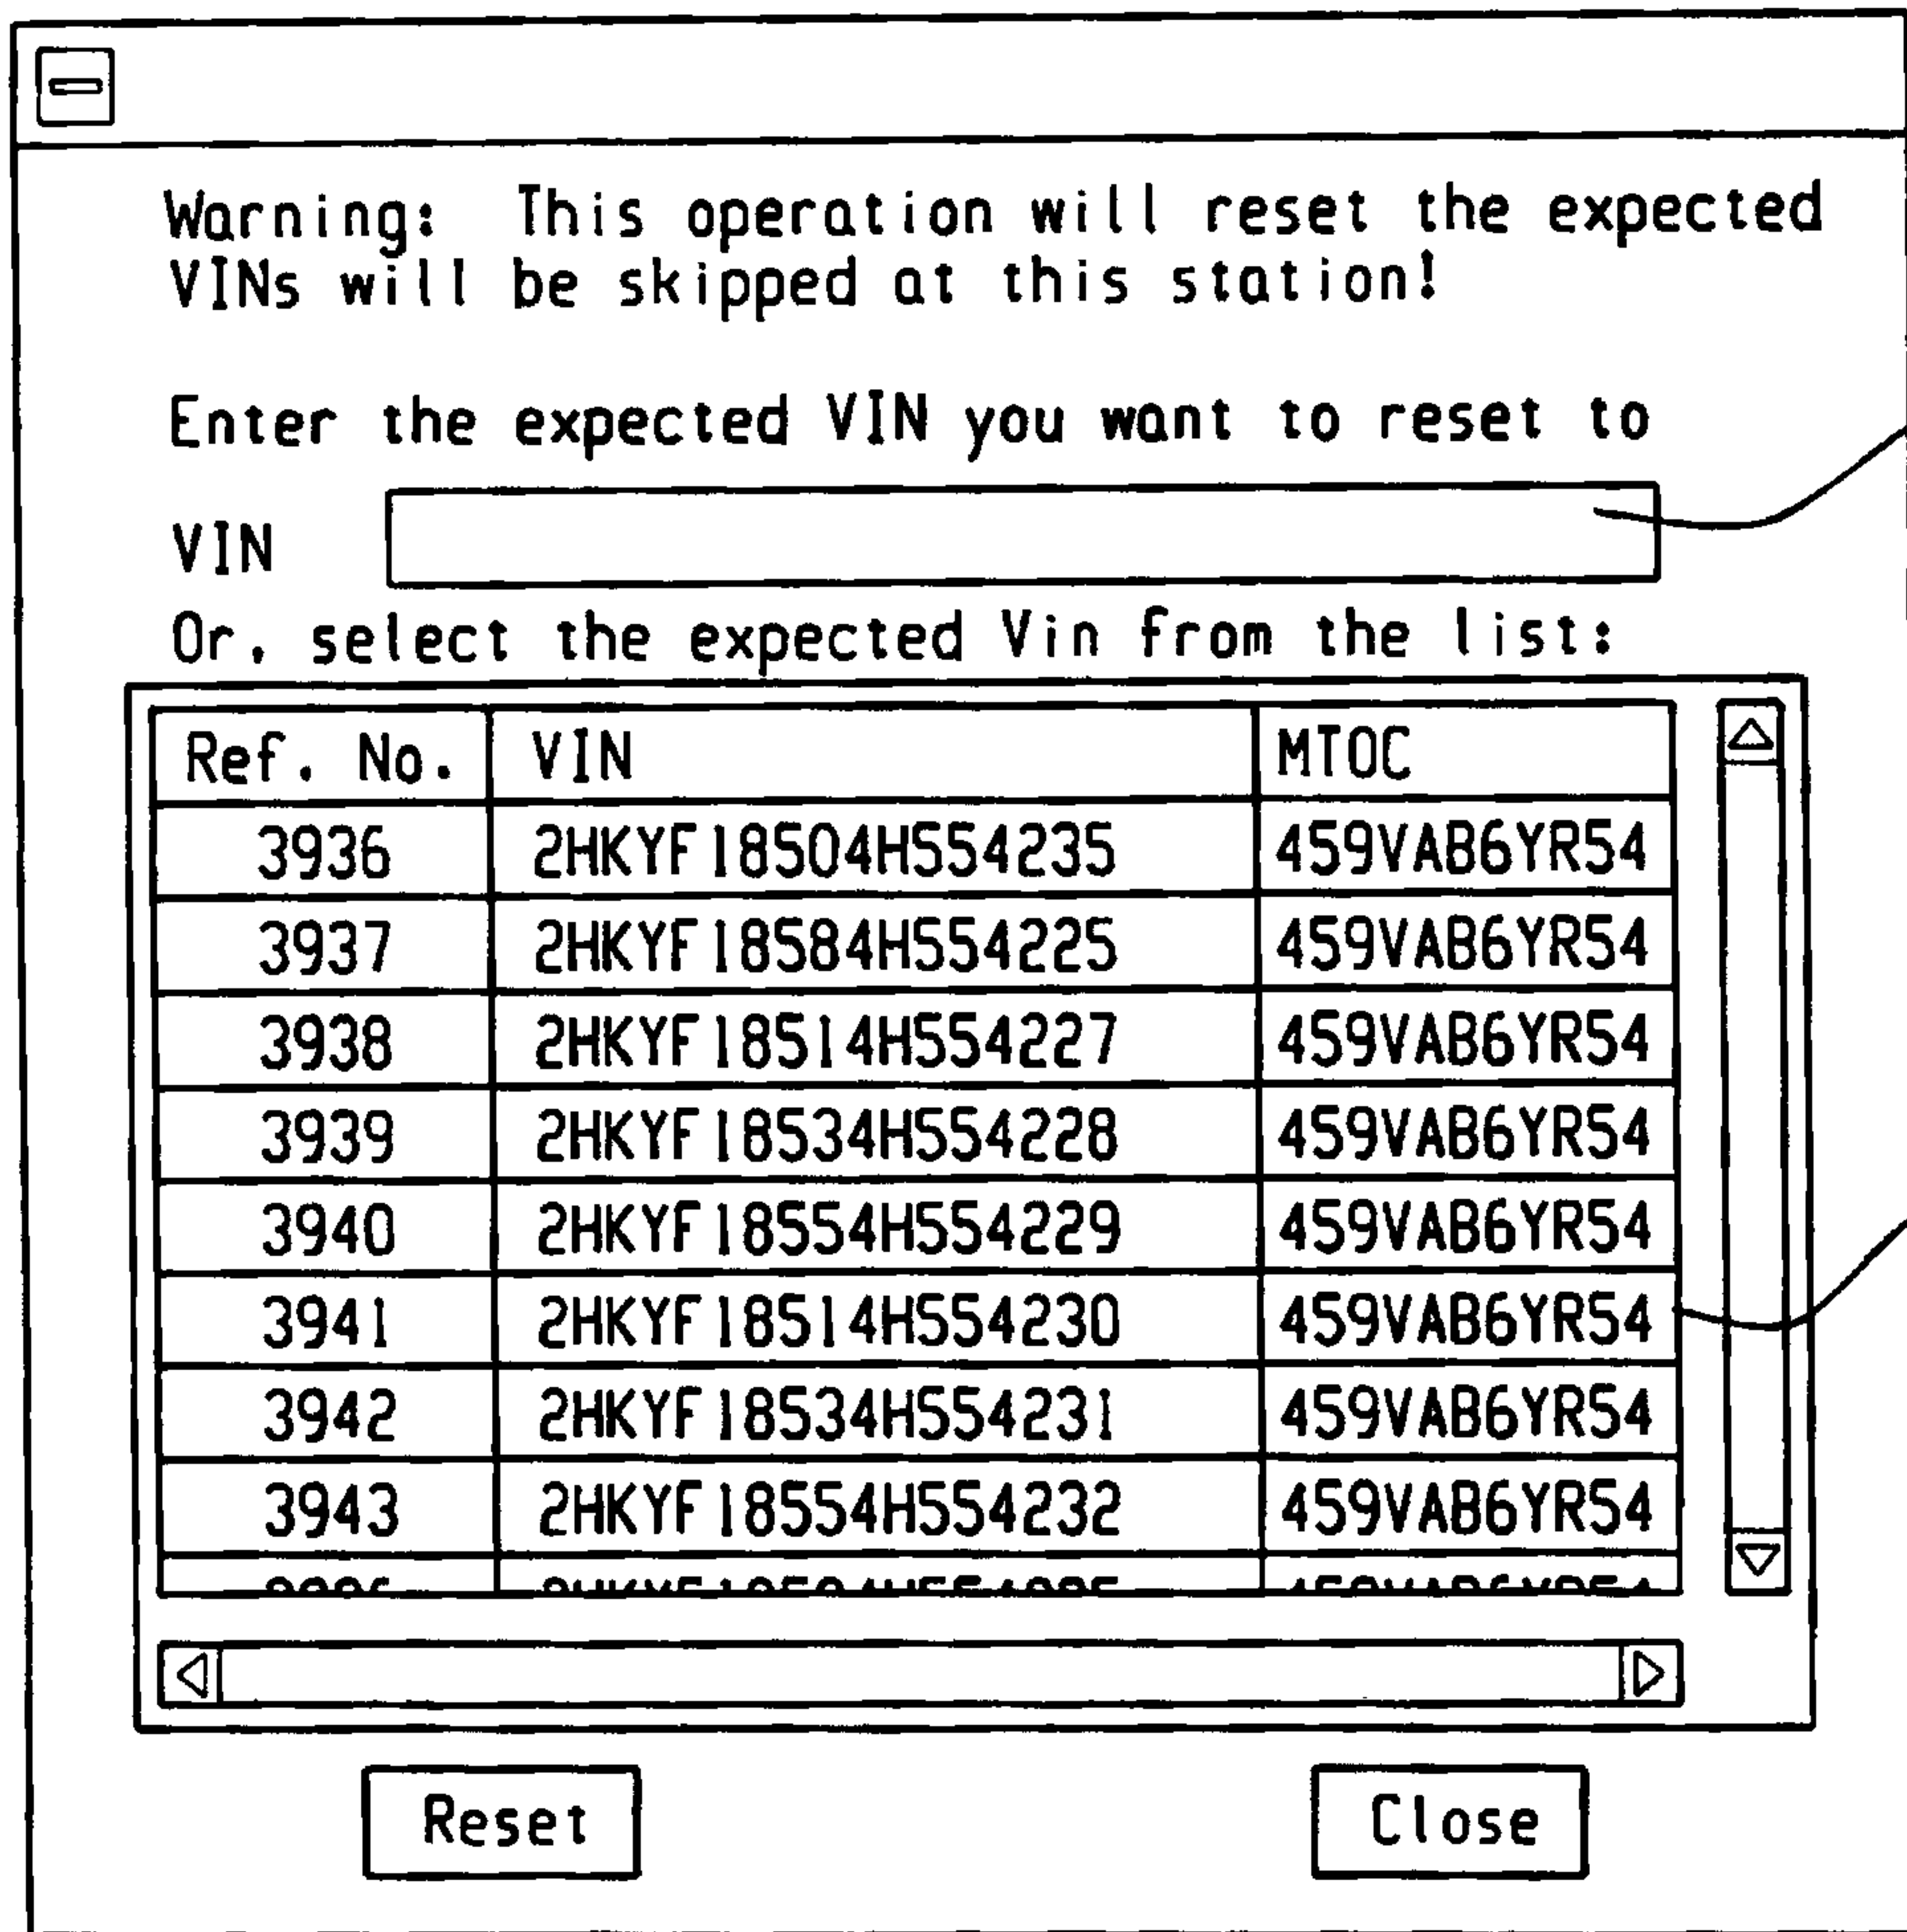

Warning: This operation will reset the expected VINs will be skipped at this station!

Enter the expected VIN you want to reset to


VIN

Or, select the expected Vin from the list:

Ref. No.	VIN	MTOC
3936	2HKYF18504H554235	459VAB6YR54
3937	2HKYF18584H554225	459VAB6YR54
3938	2HKYF18514H554227	459VAB6YR54
3939	2HKYF18534H554228	459VAB6YR54
3940	2HKYF18554H554229	459VAB6YR54
3941	2HKYF18514H554230	459VAB6YR54
3942	2HKYF18534H554231	459VAB6YR54
3943	2HKYF18554H554232	459VAB6YR54

Reset Close

Fig. 30

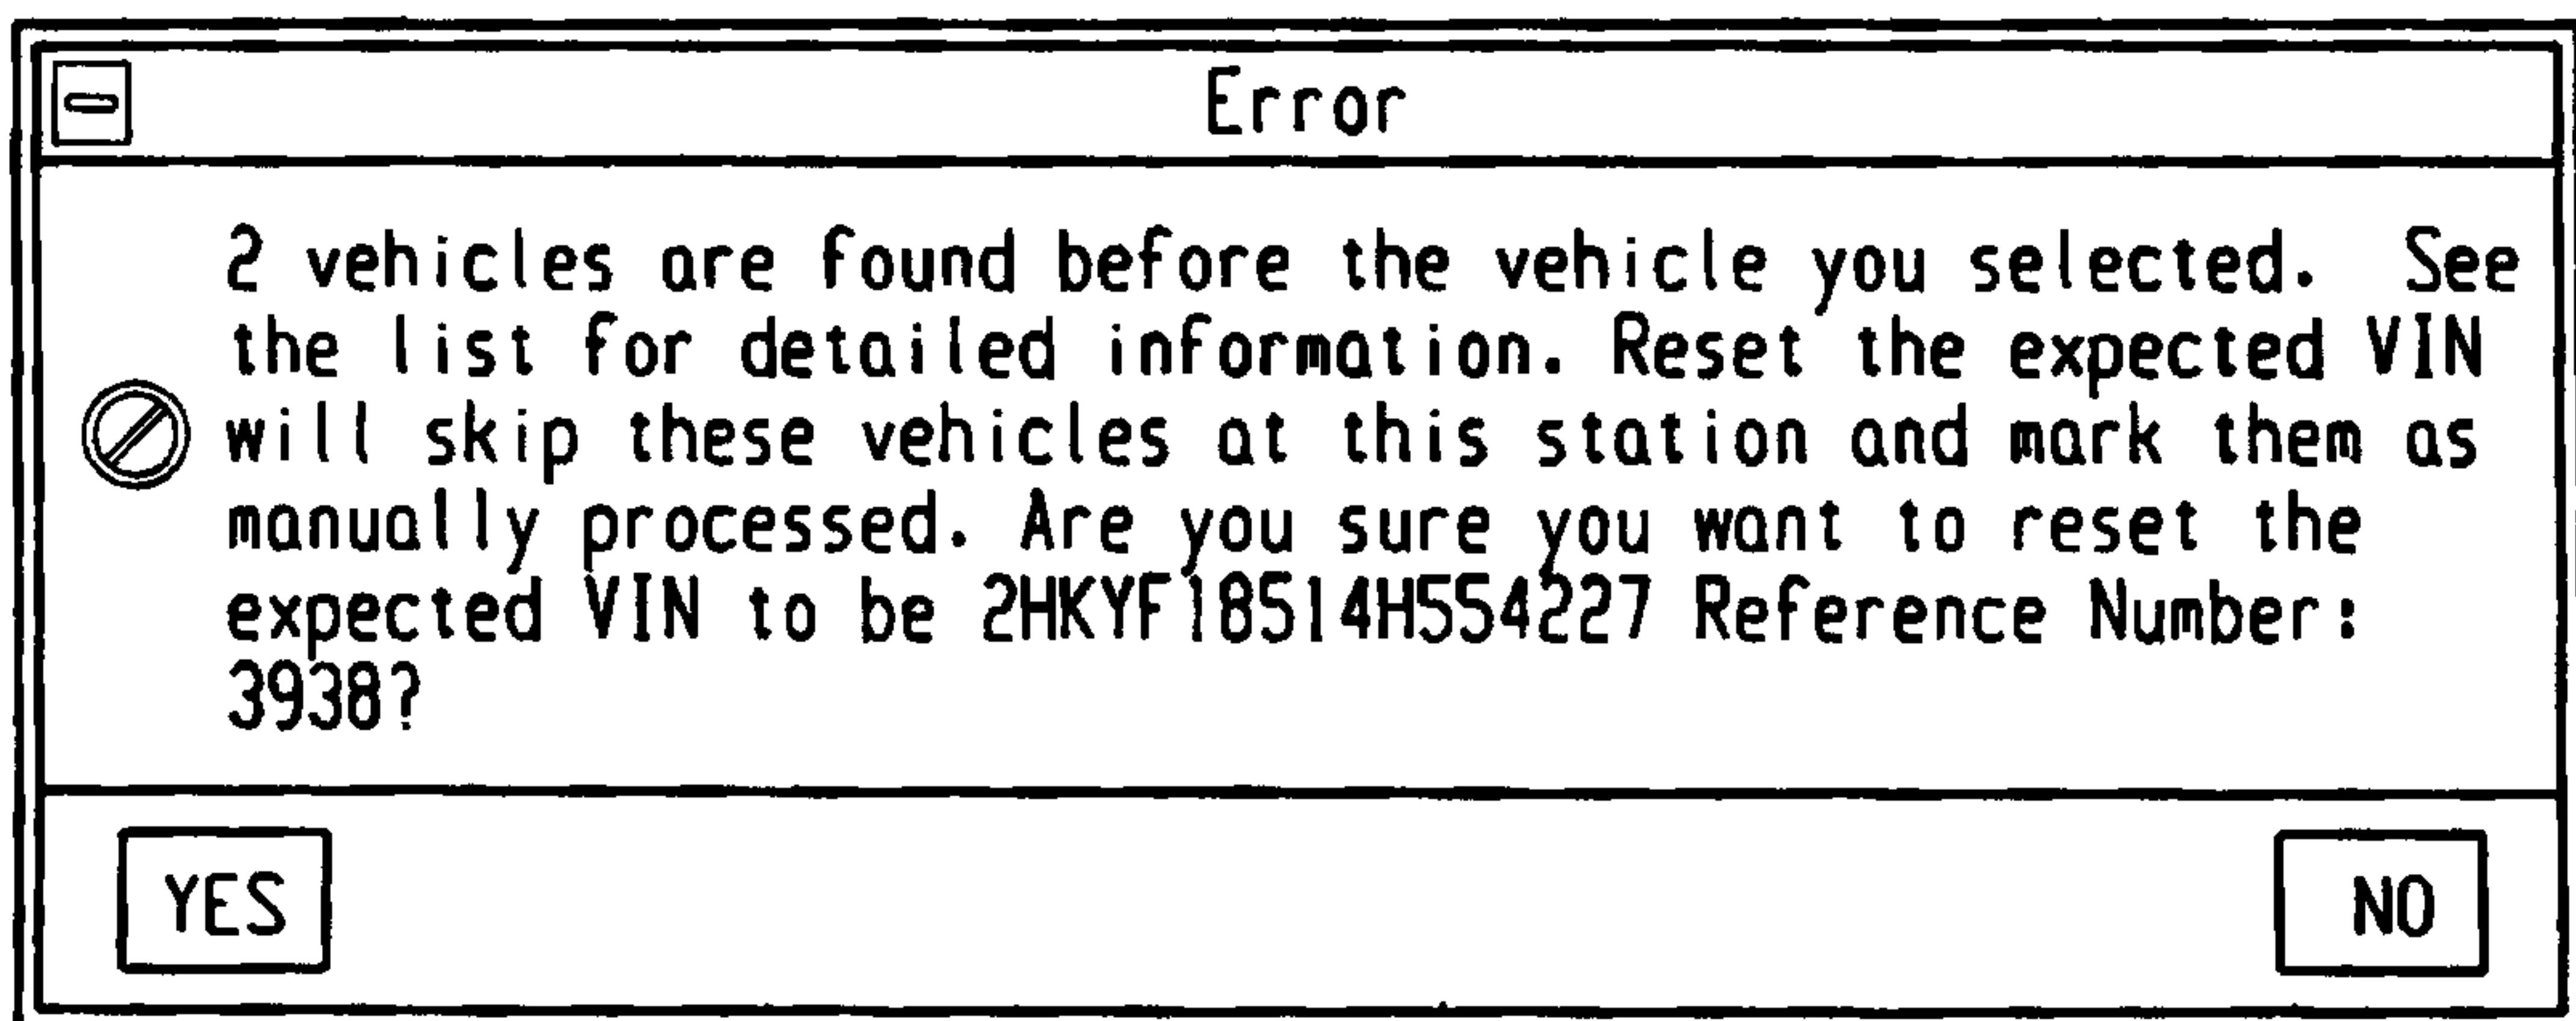

Error

2 vehicles are found before the vehicle you selected. See the list for detailed information. Reset the expected VIN will skip these vehicles at this station and mark them as manually processed. Are you sure you want to reset the expected VIN to be 2HKYF18514H554227 Reference Number: 3938?

YES NO

Fig. 3P

15/20

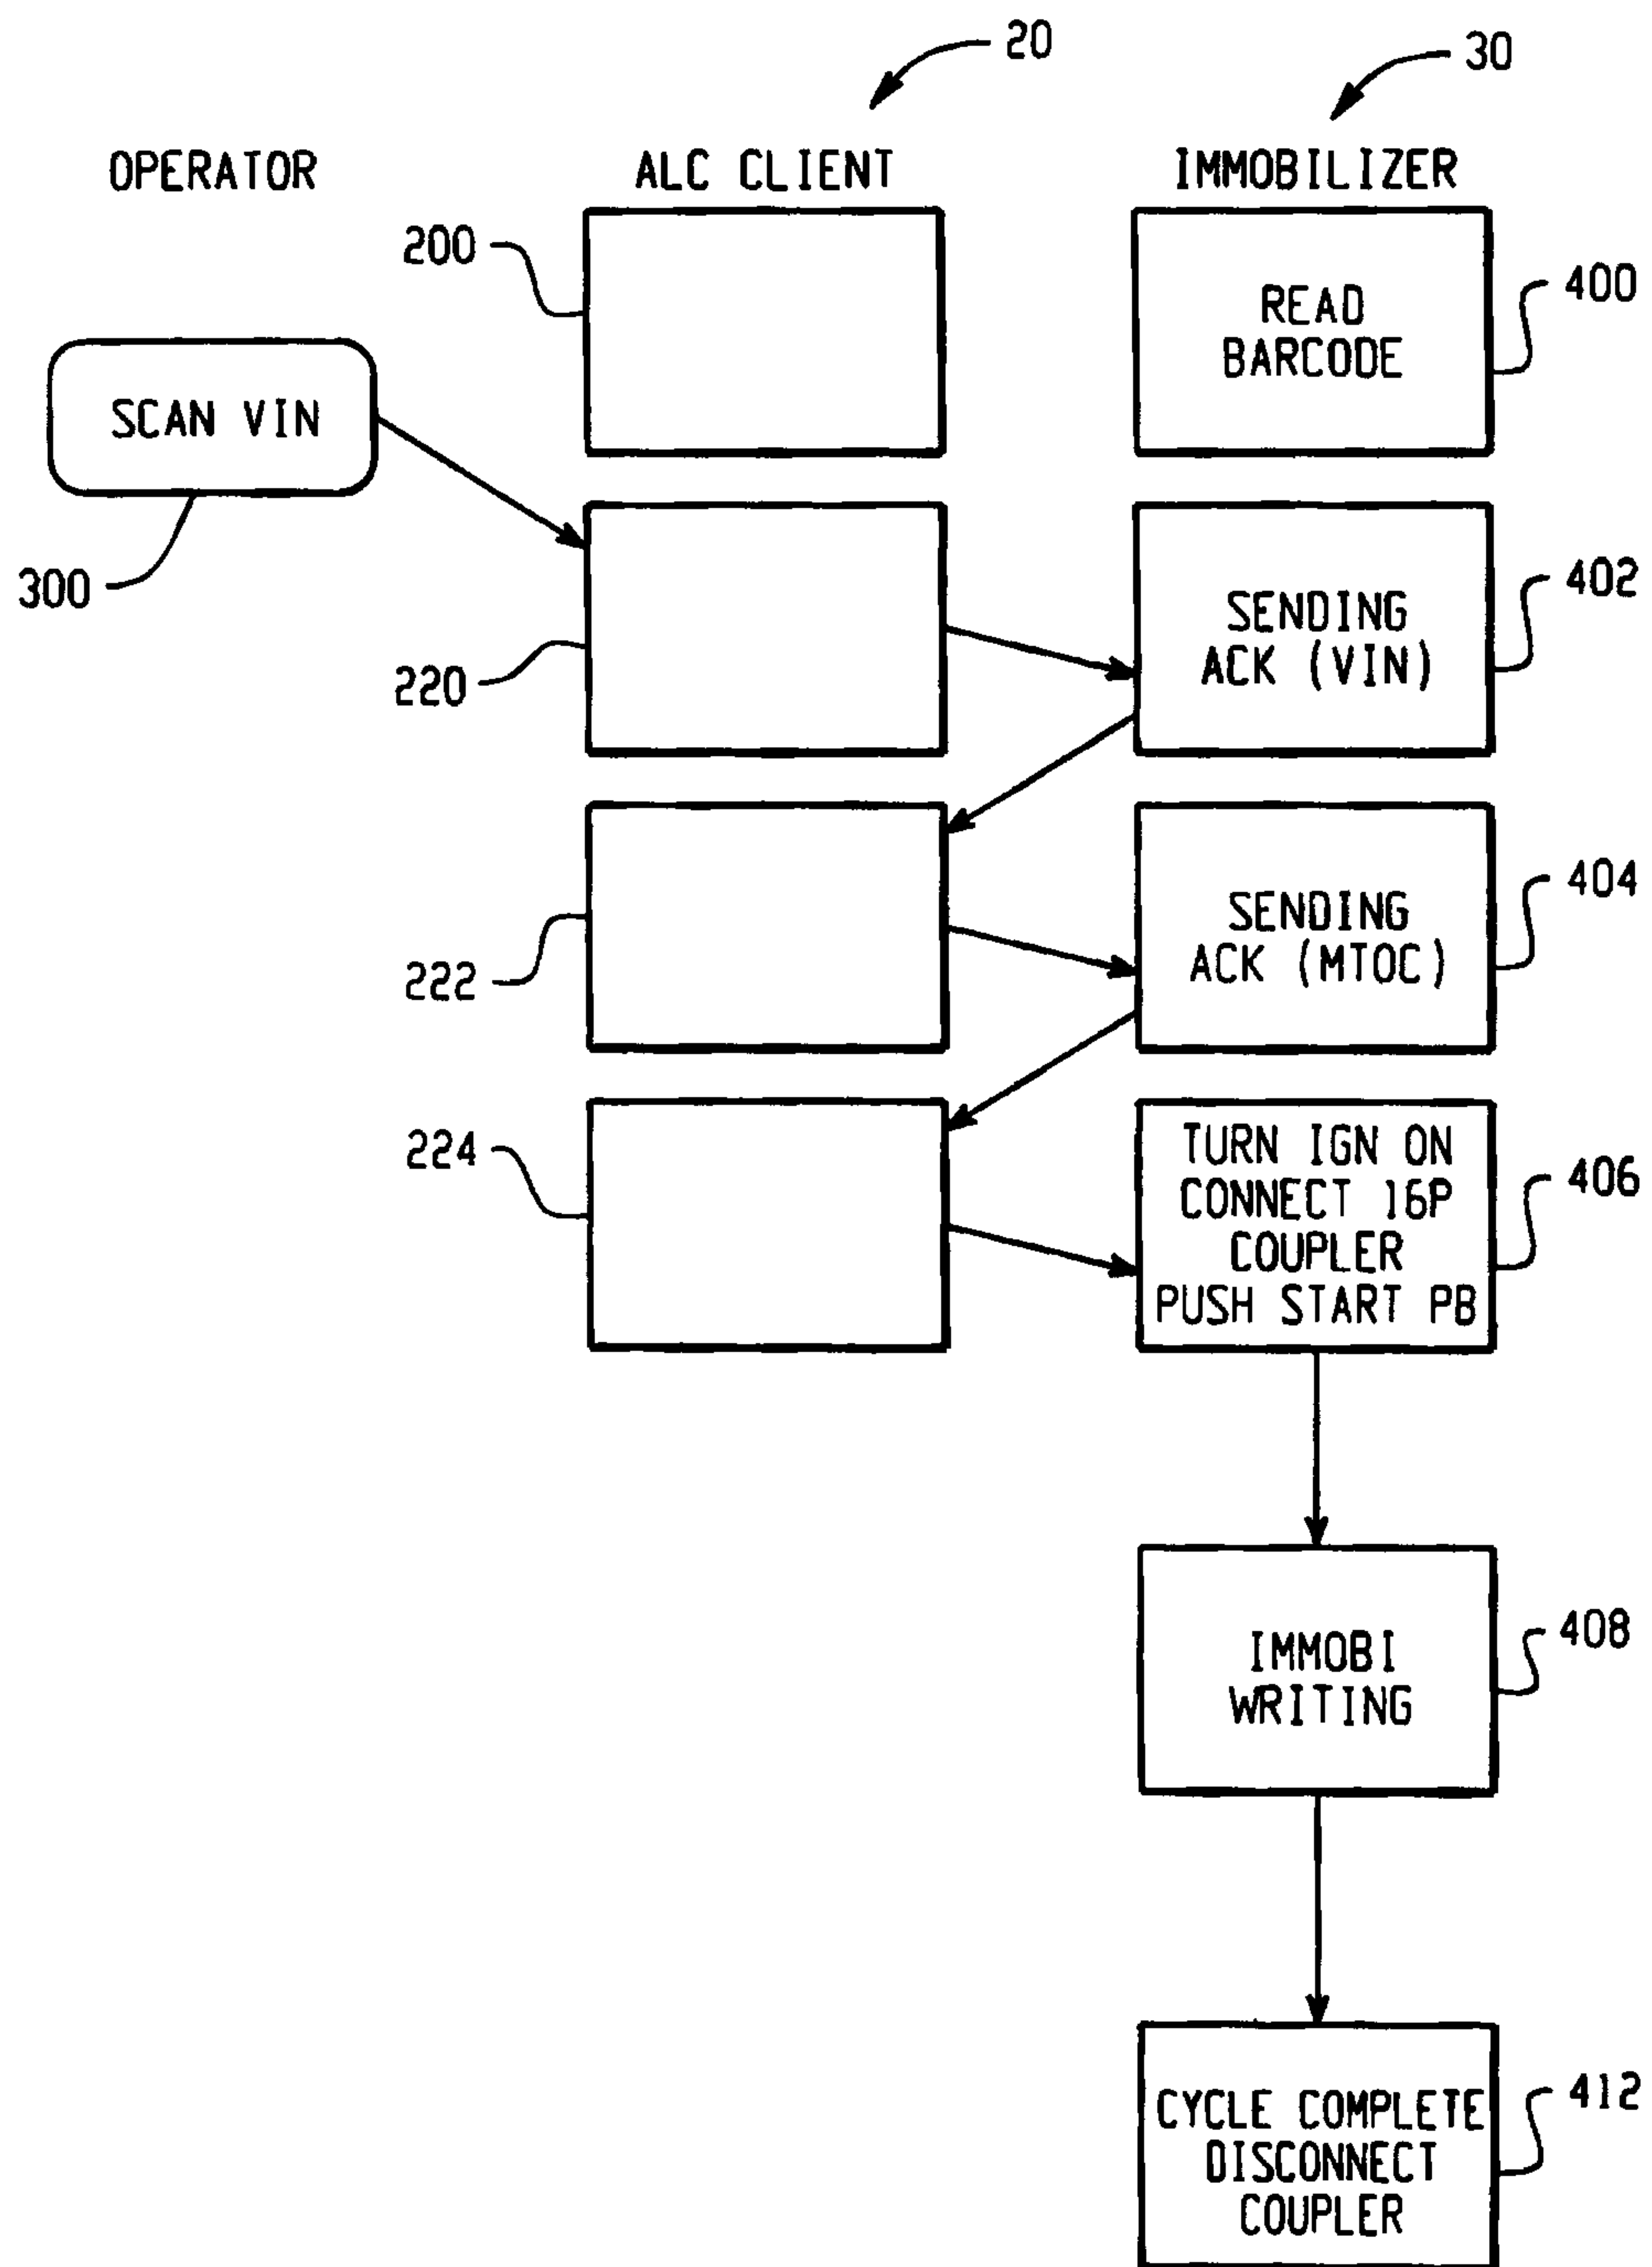


Fig. 4

16/20

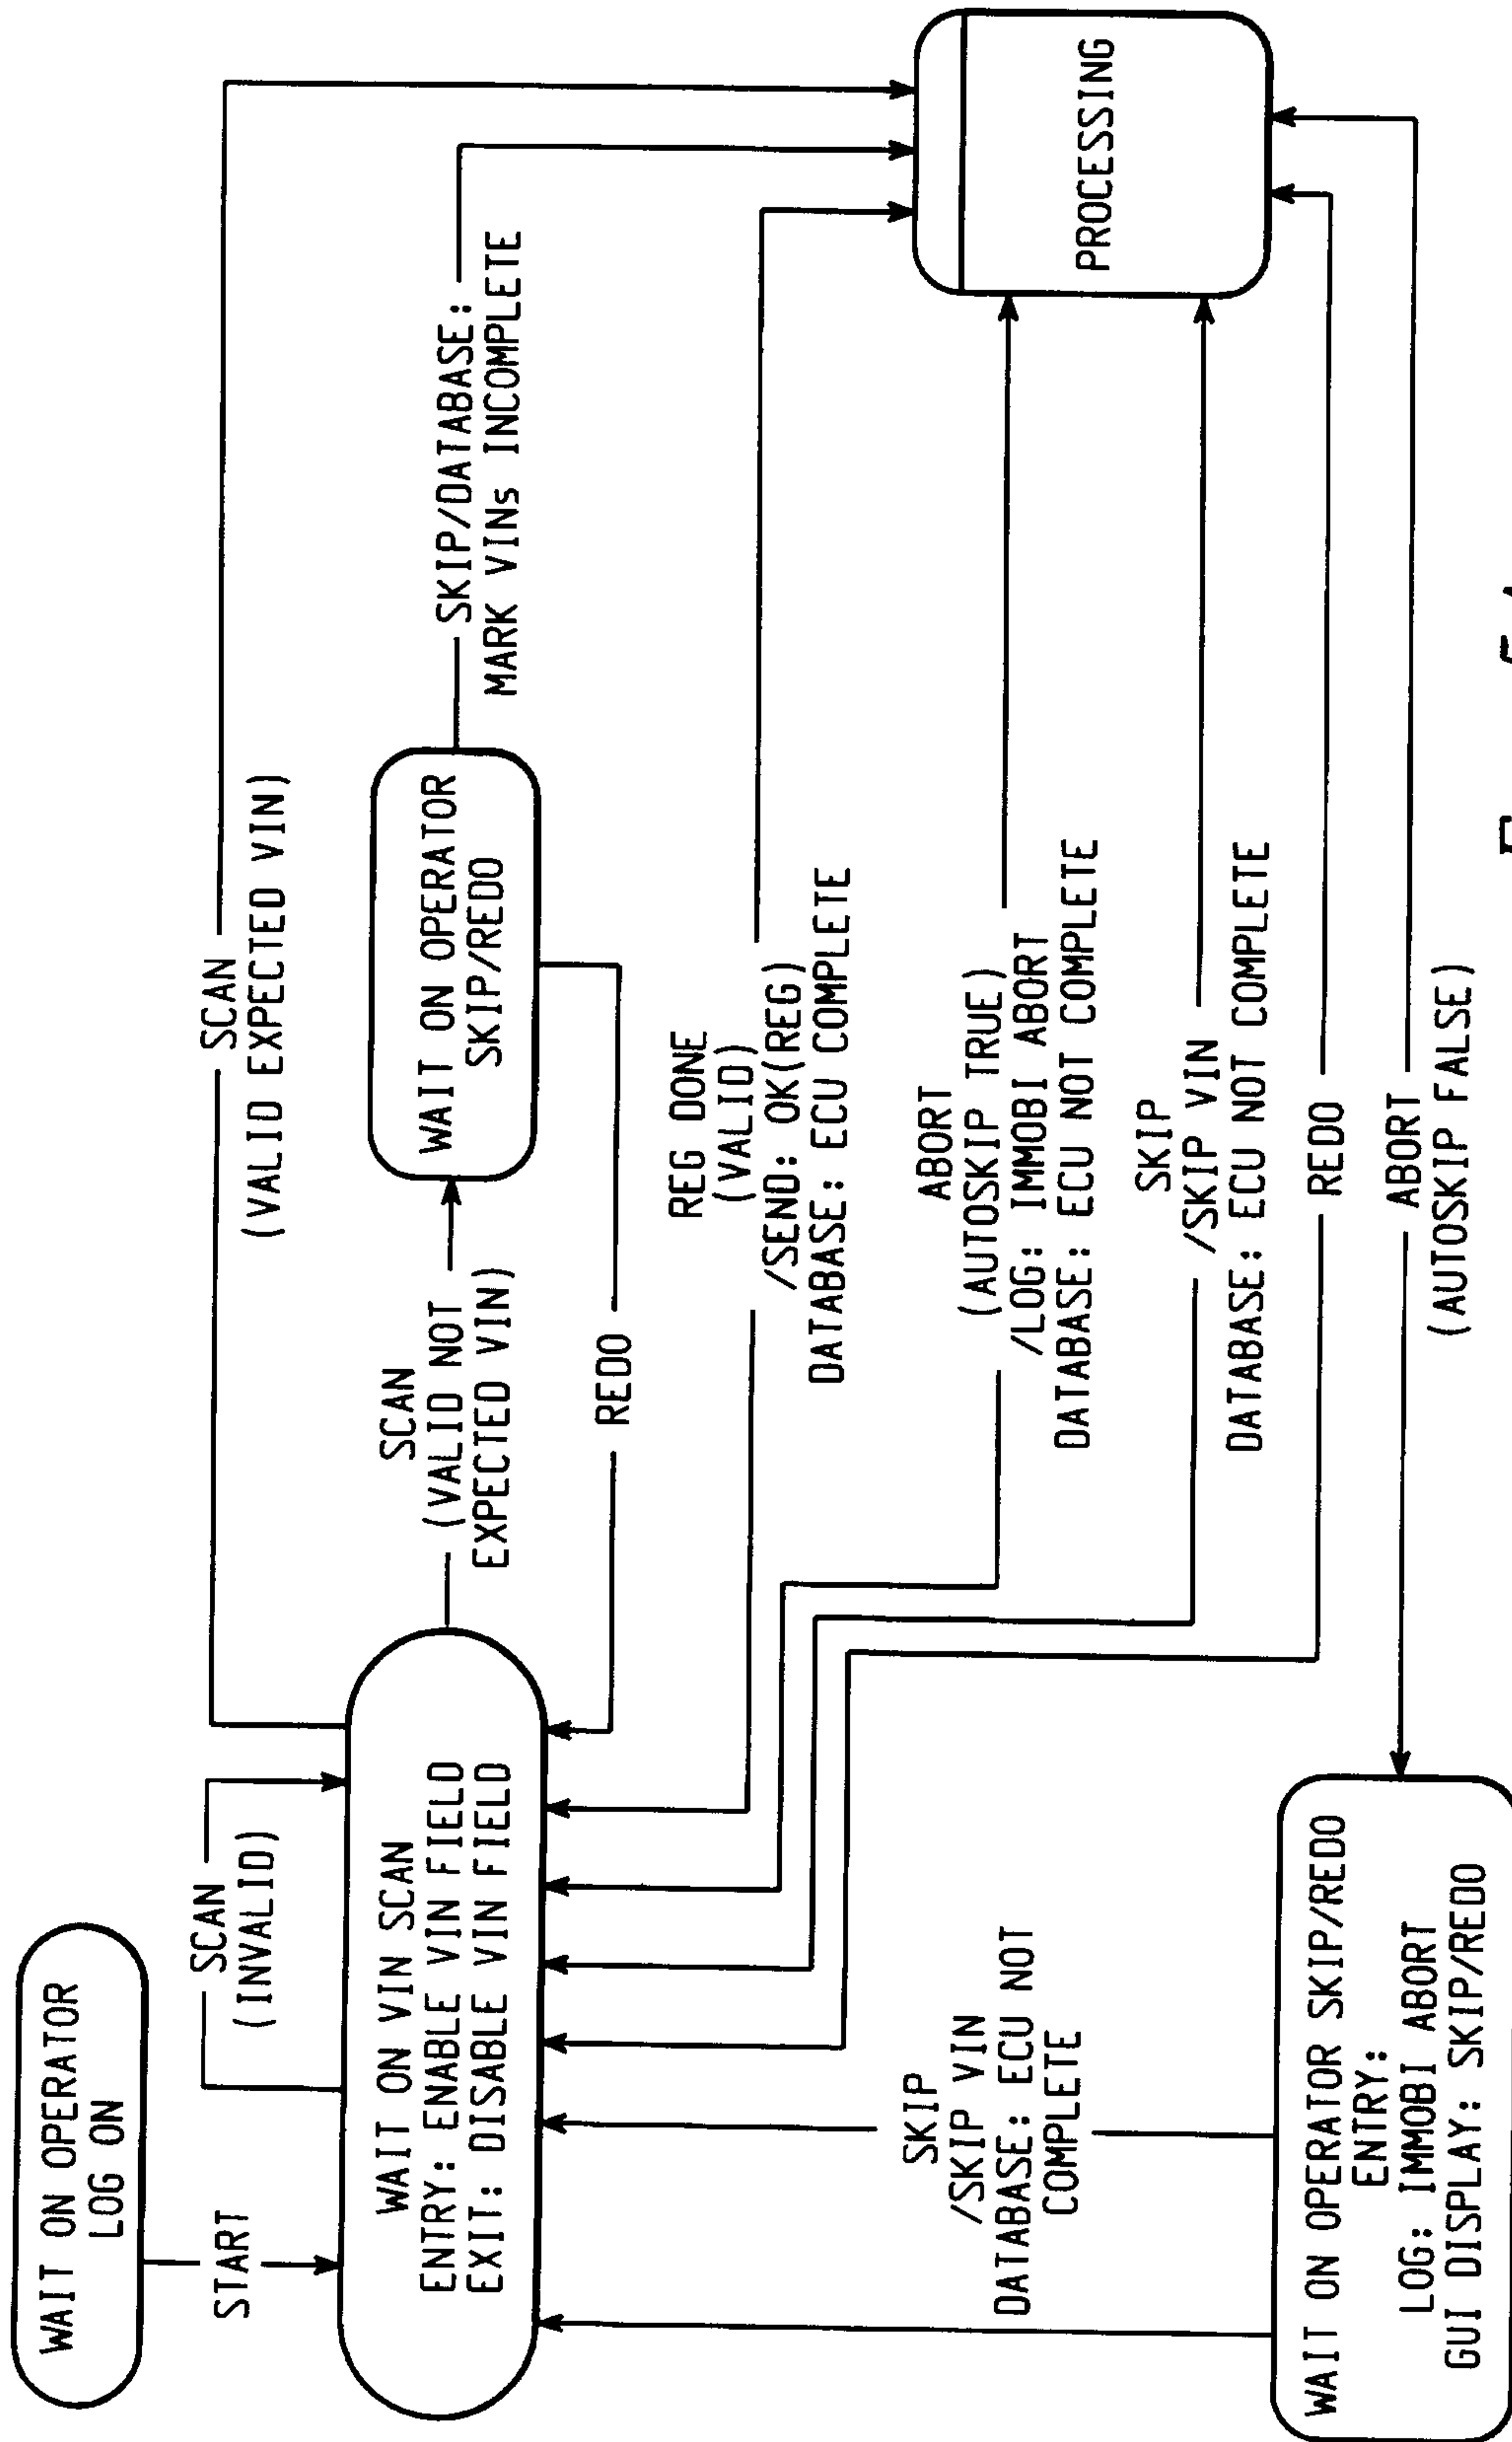
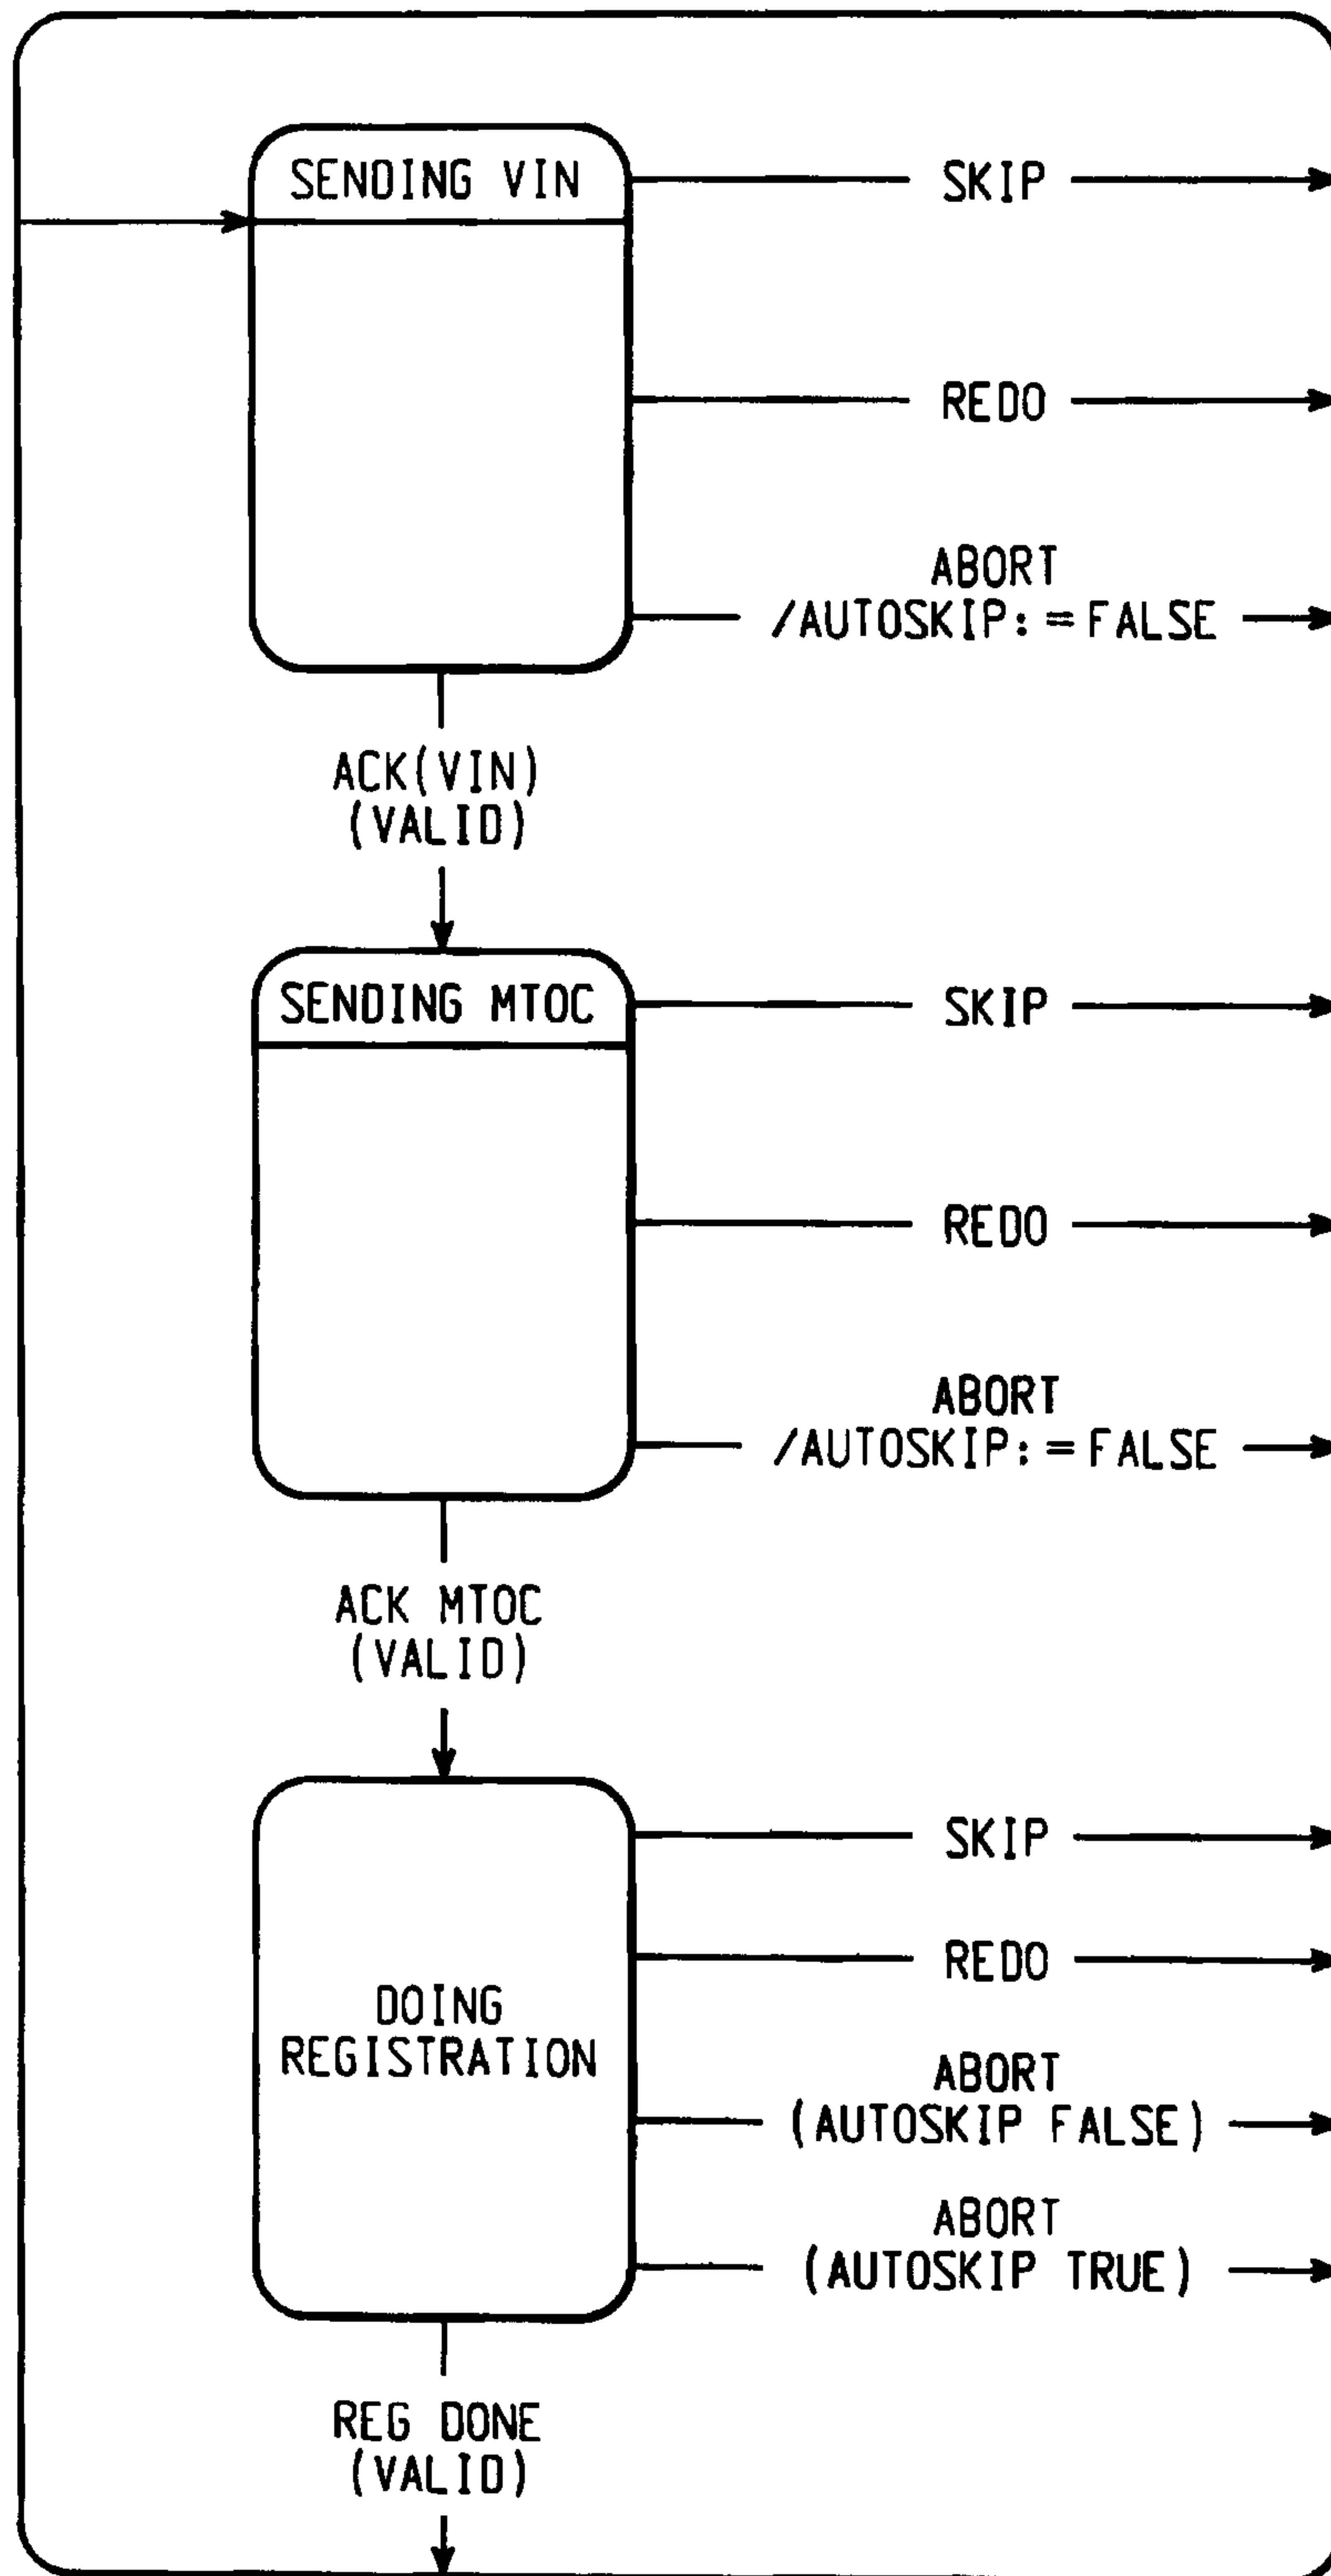


Fig. 5A

17/20

*Fig. 5B*

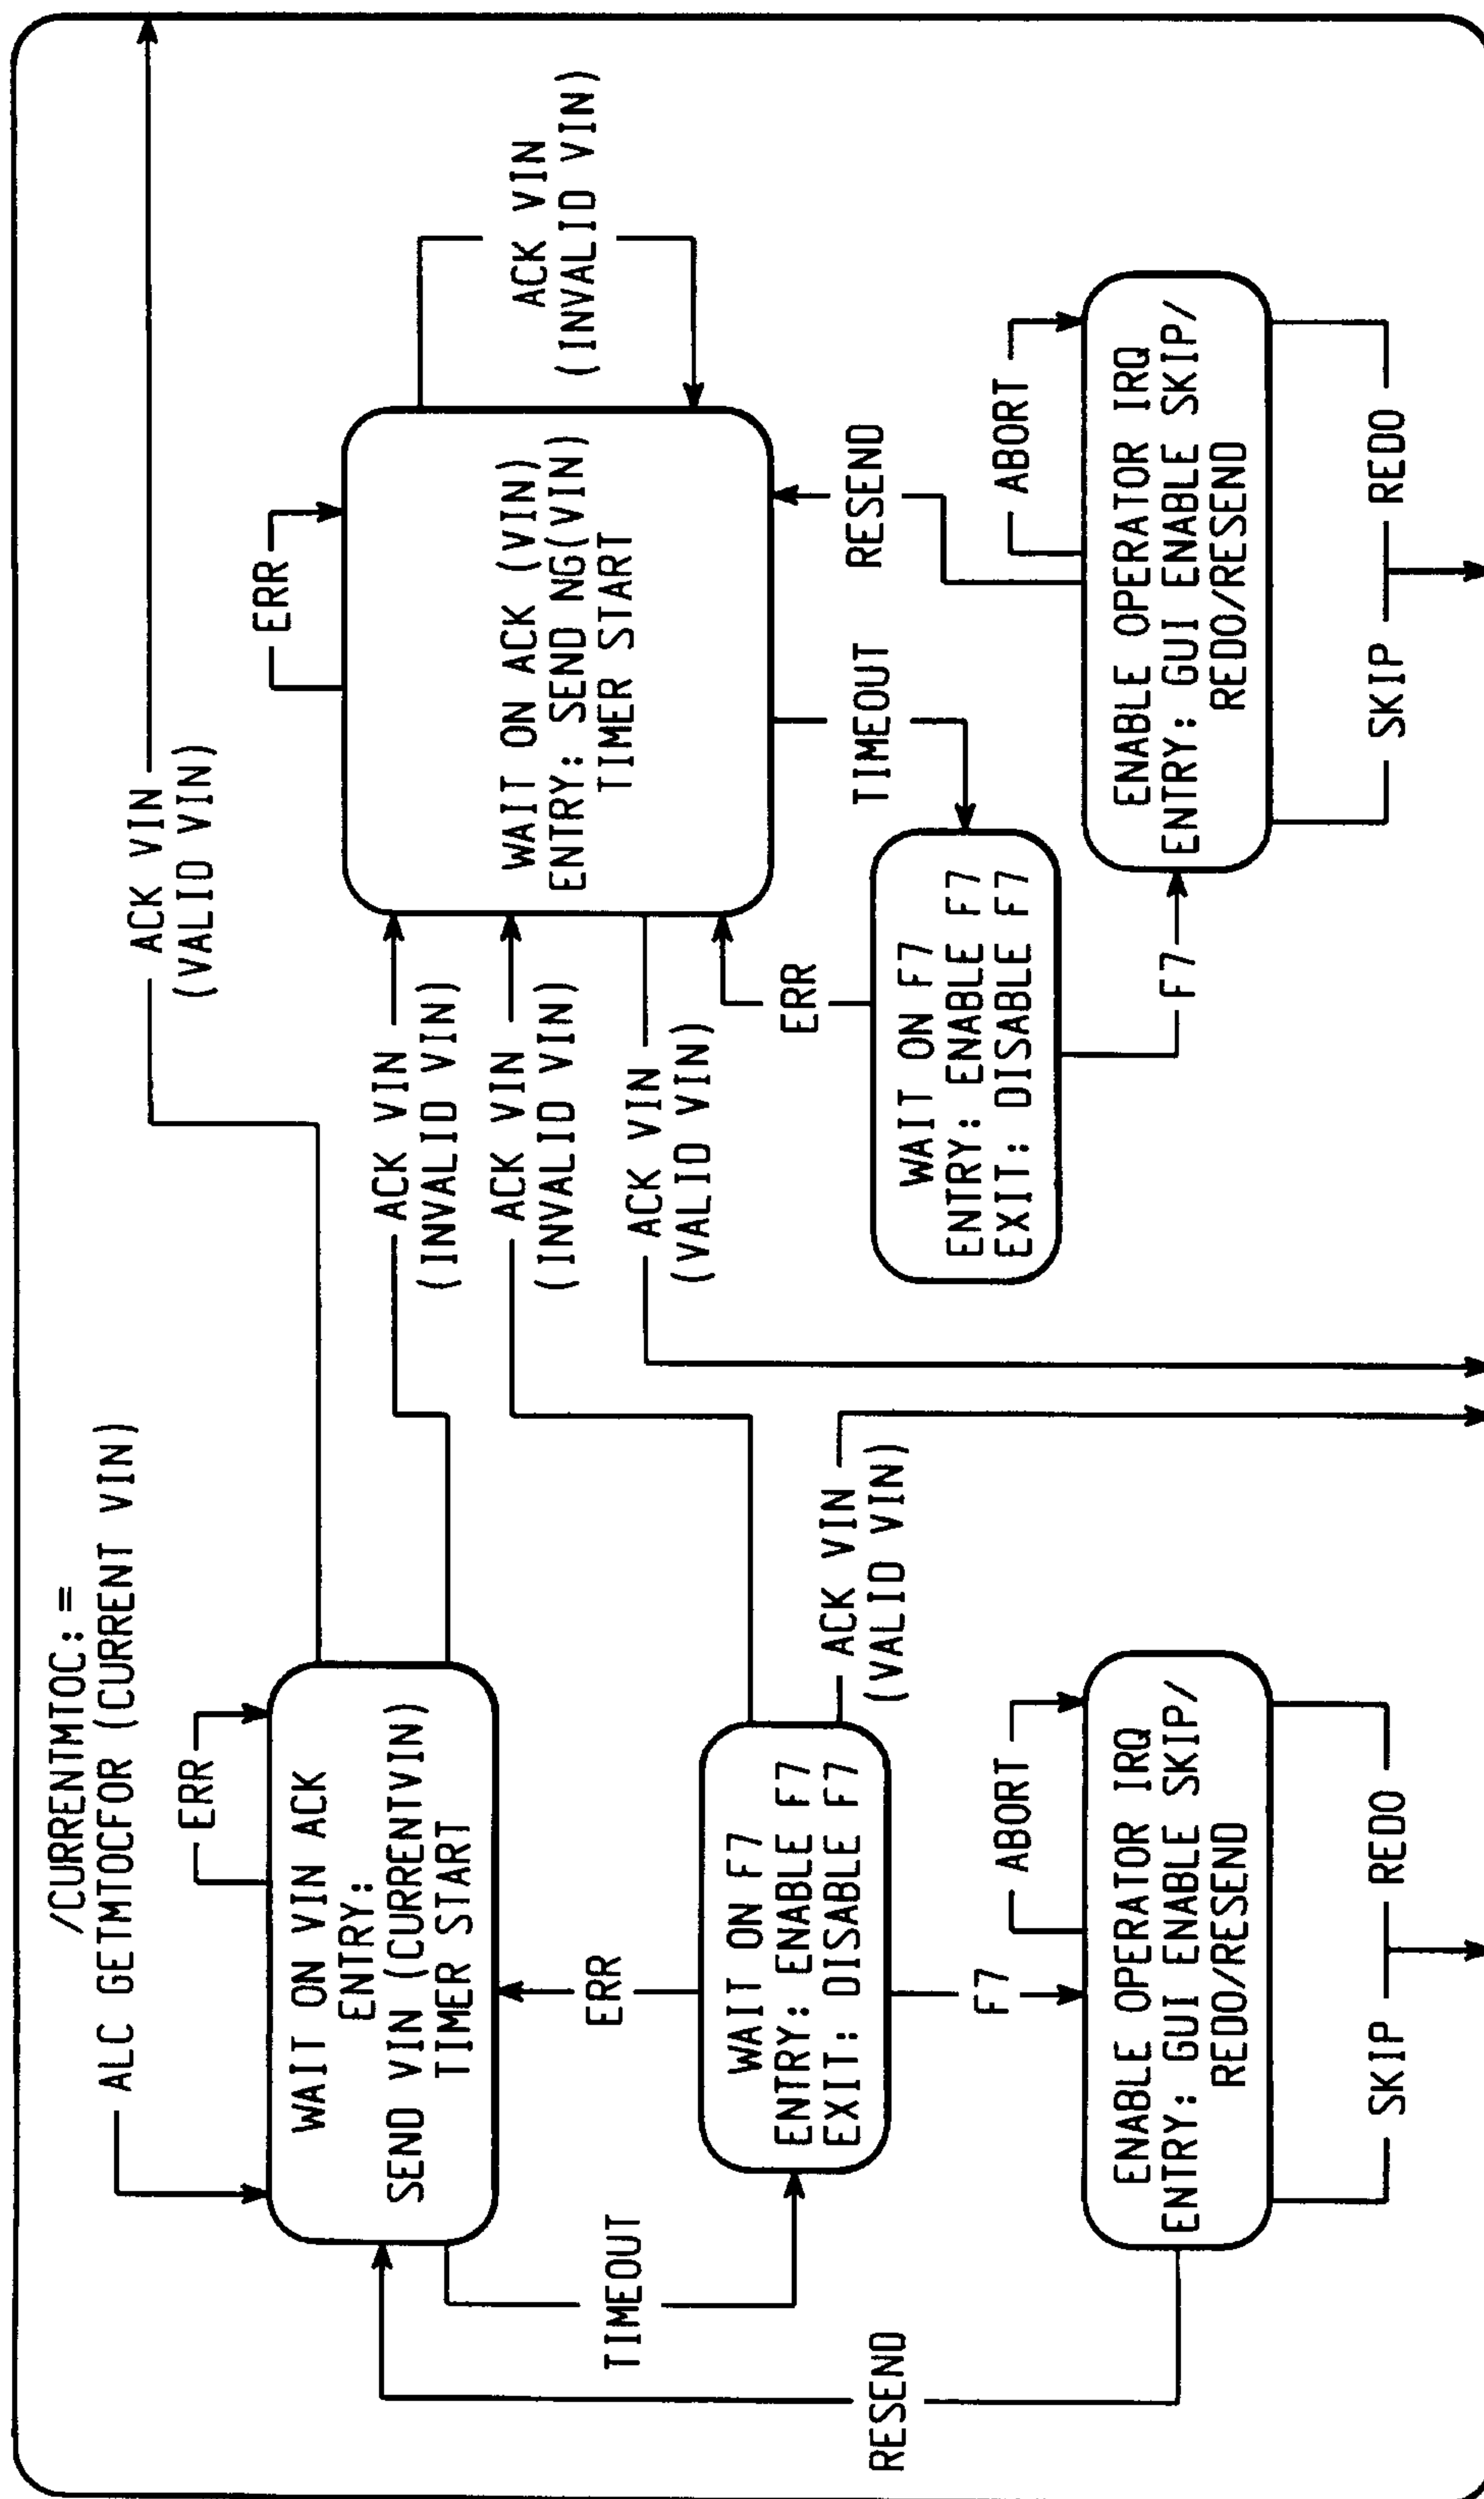


Fig. 5C

19/20

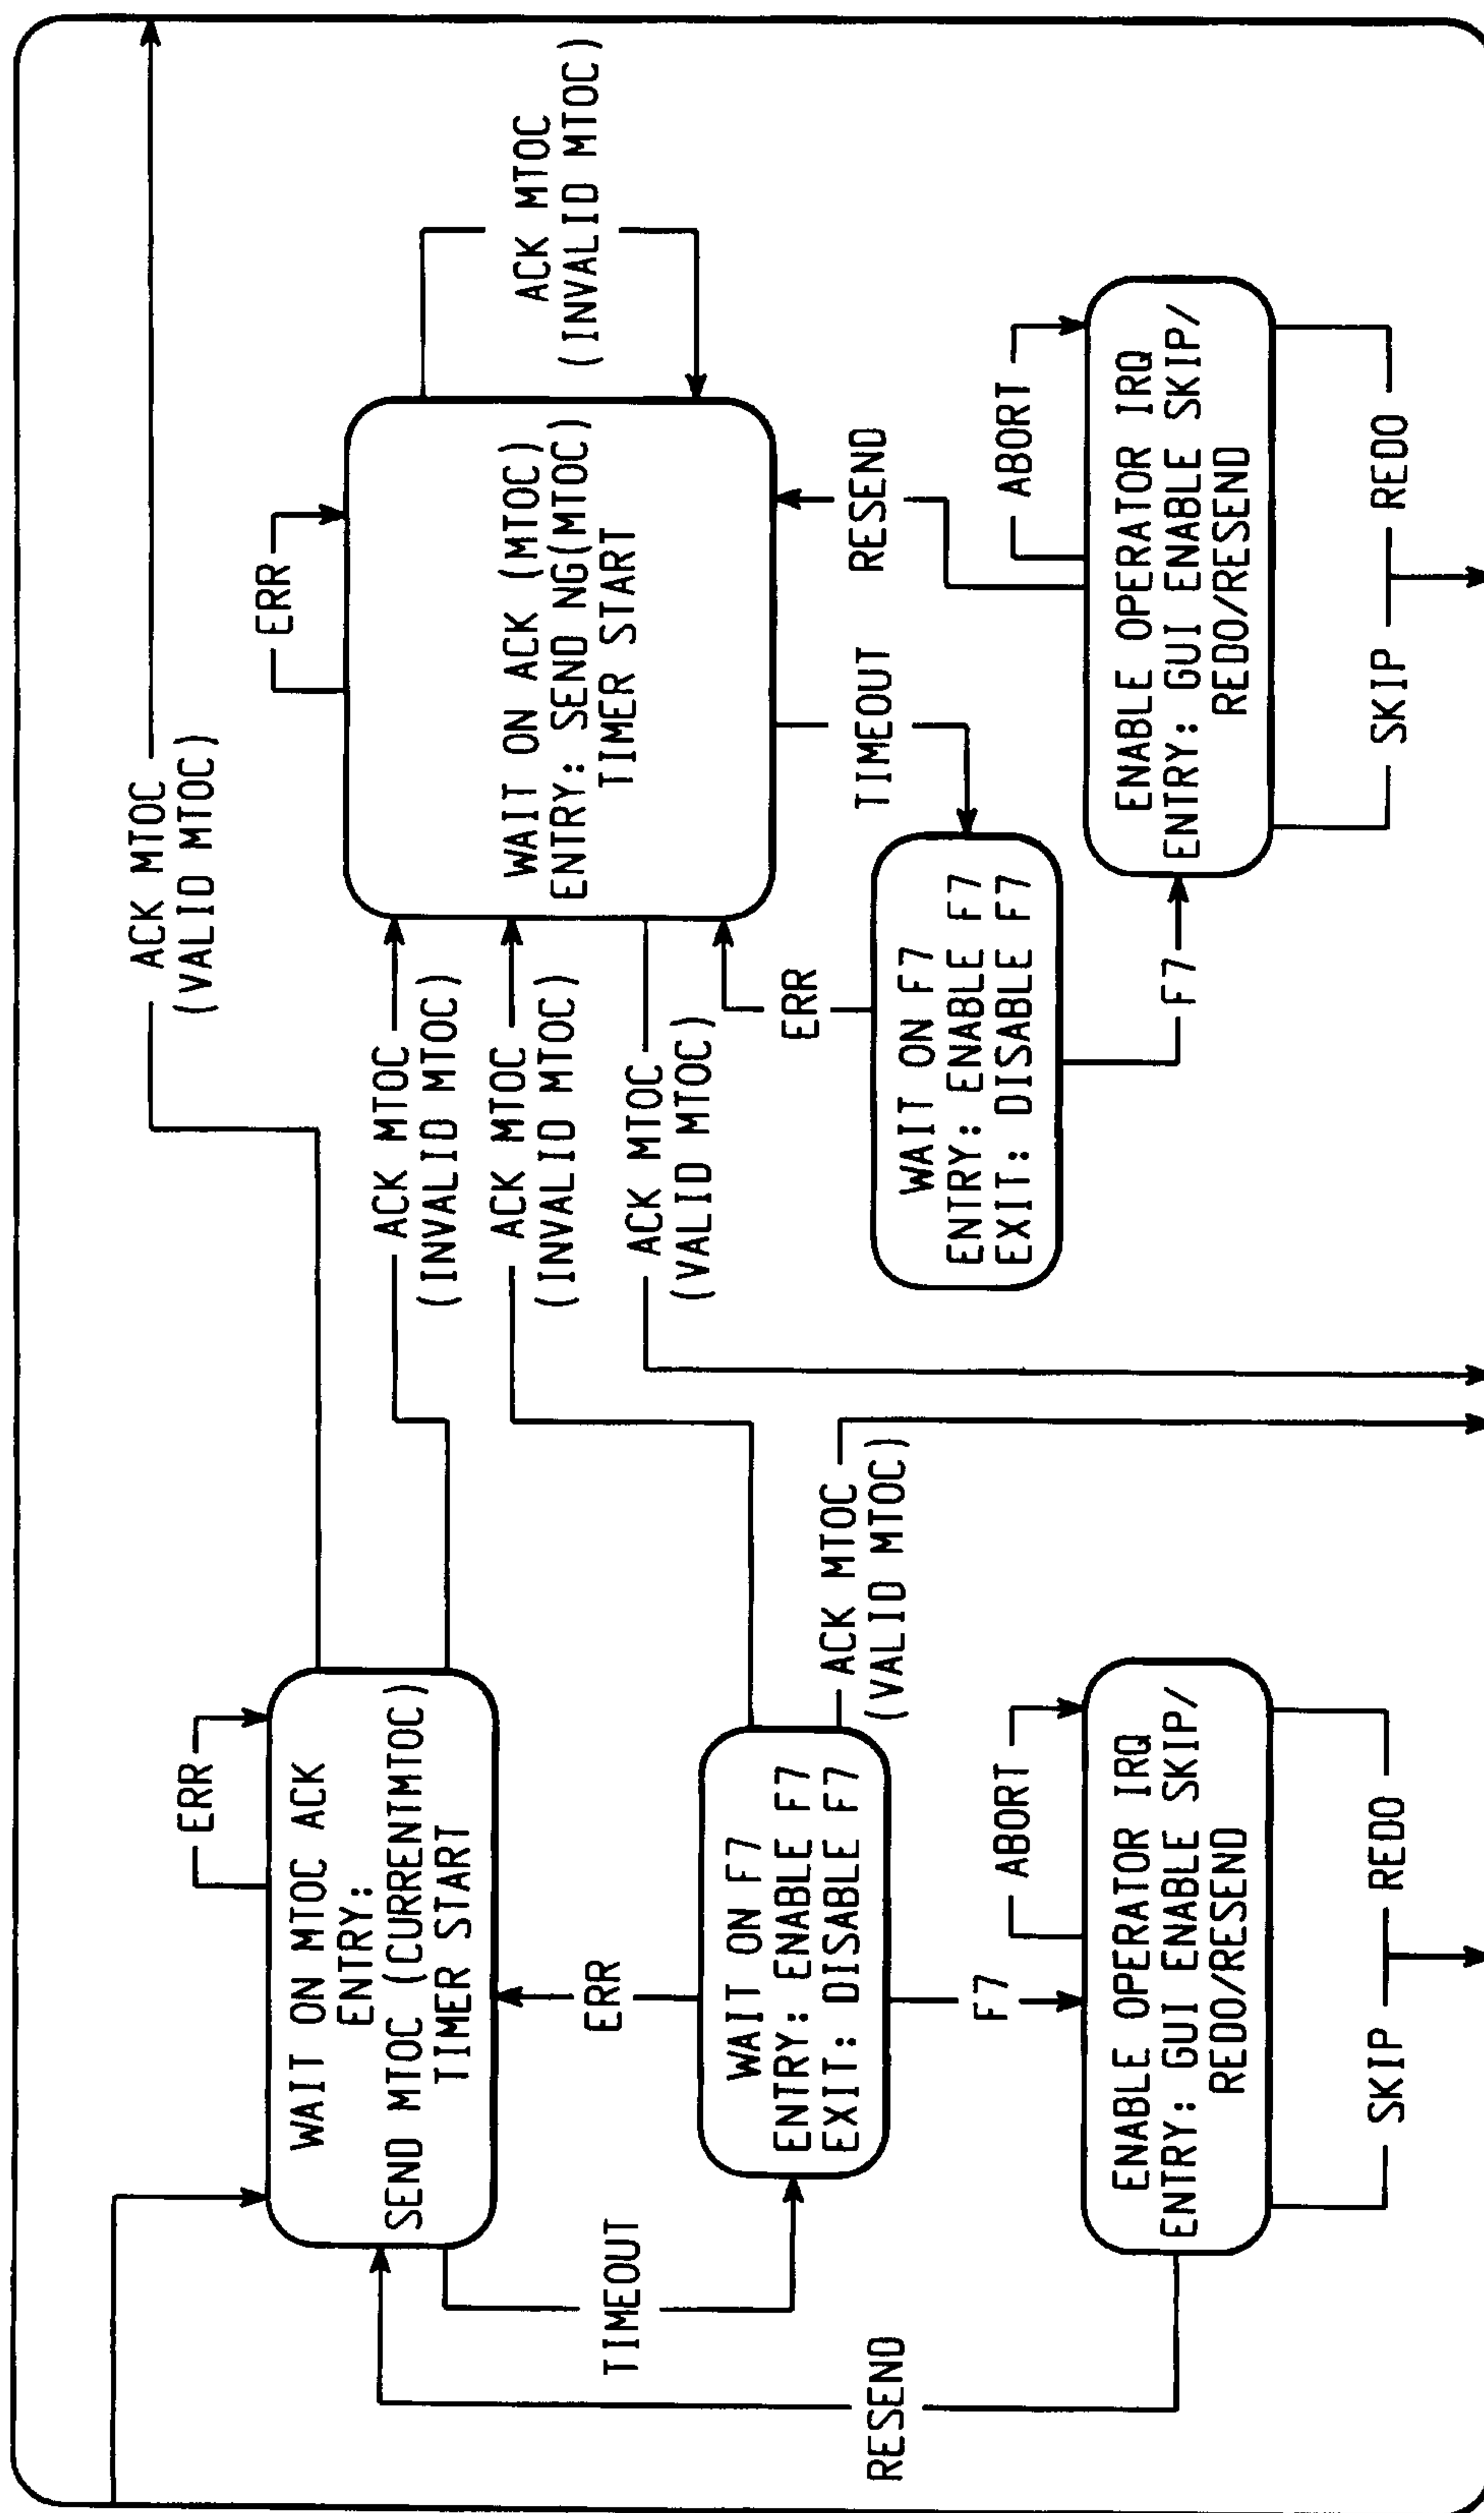


Fig. 5D

20/20

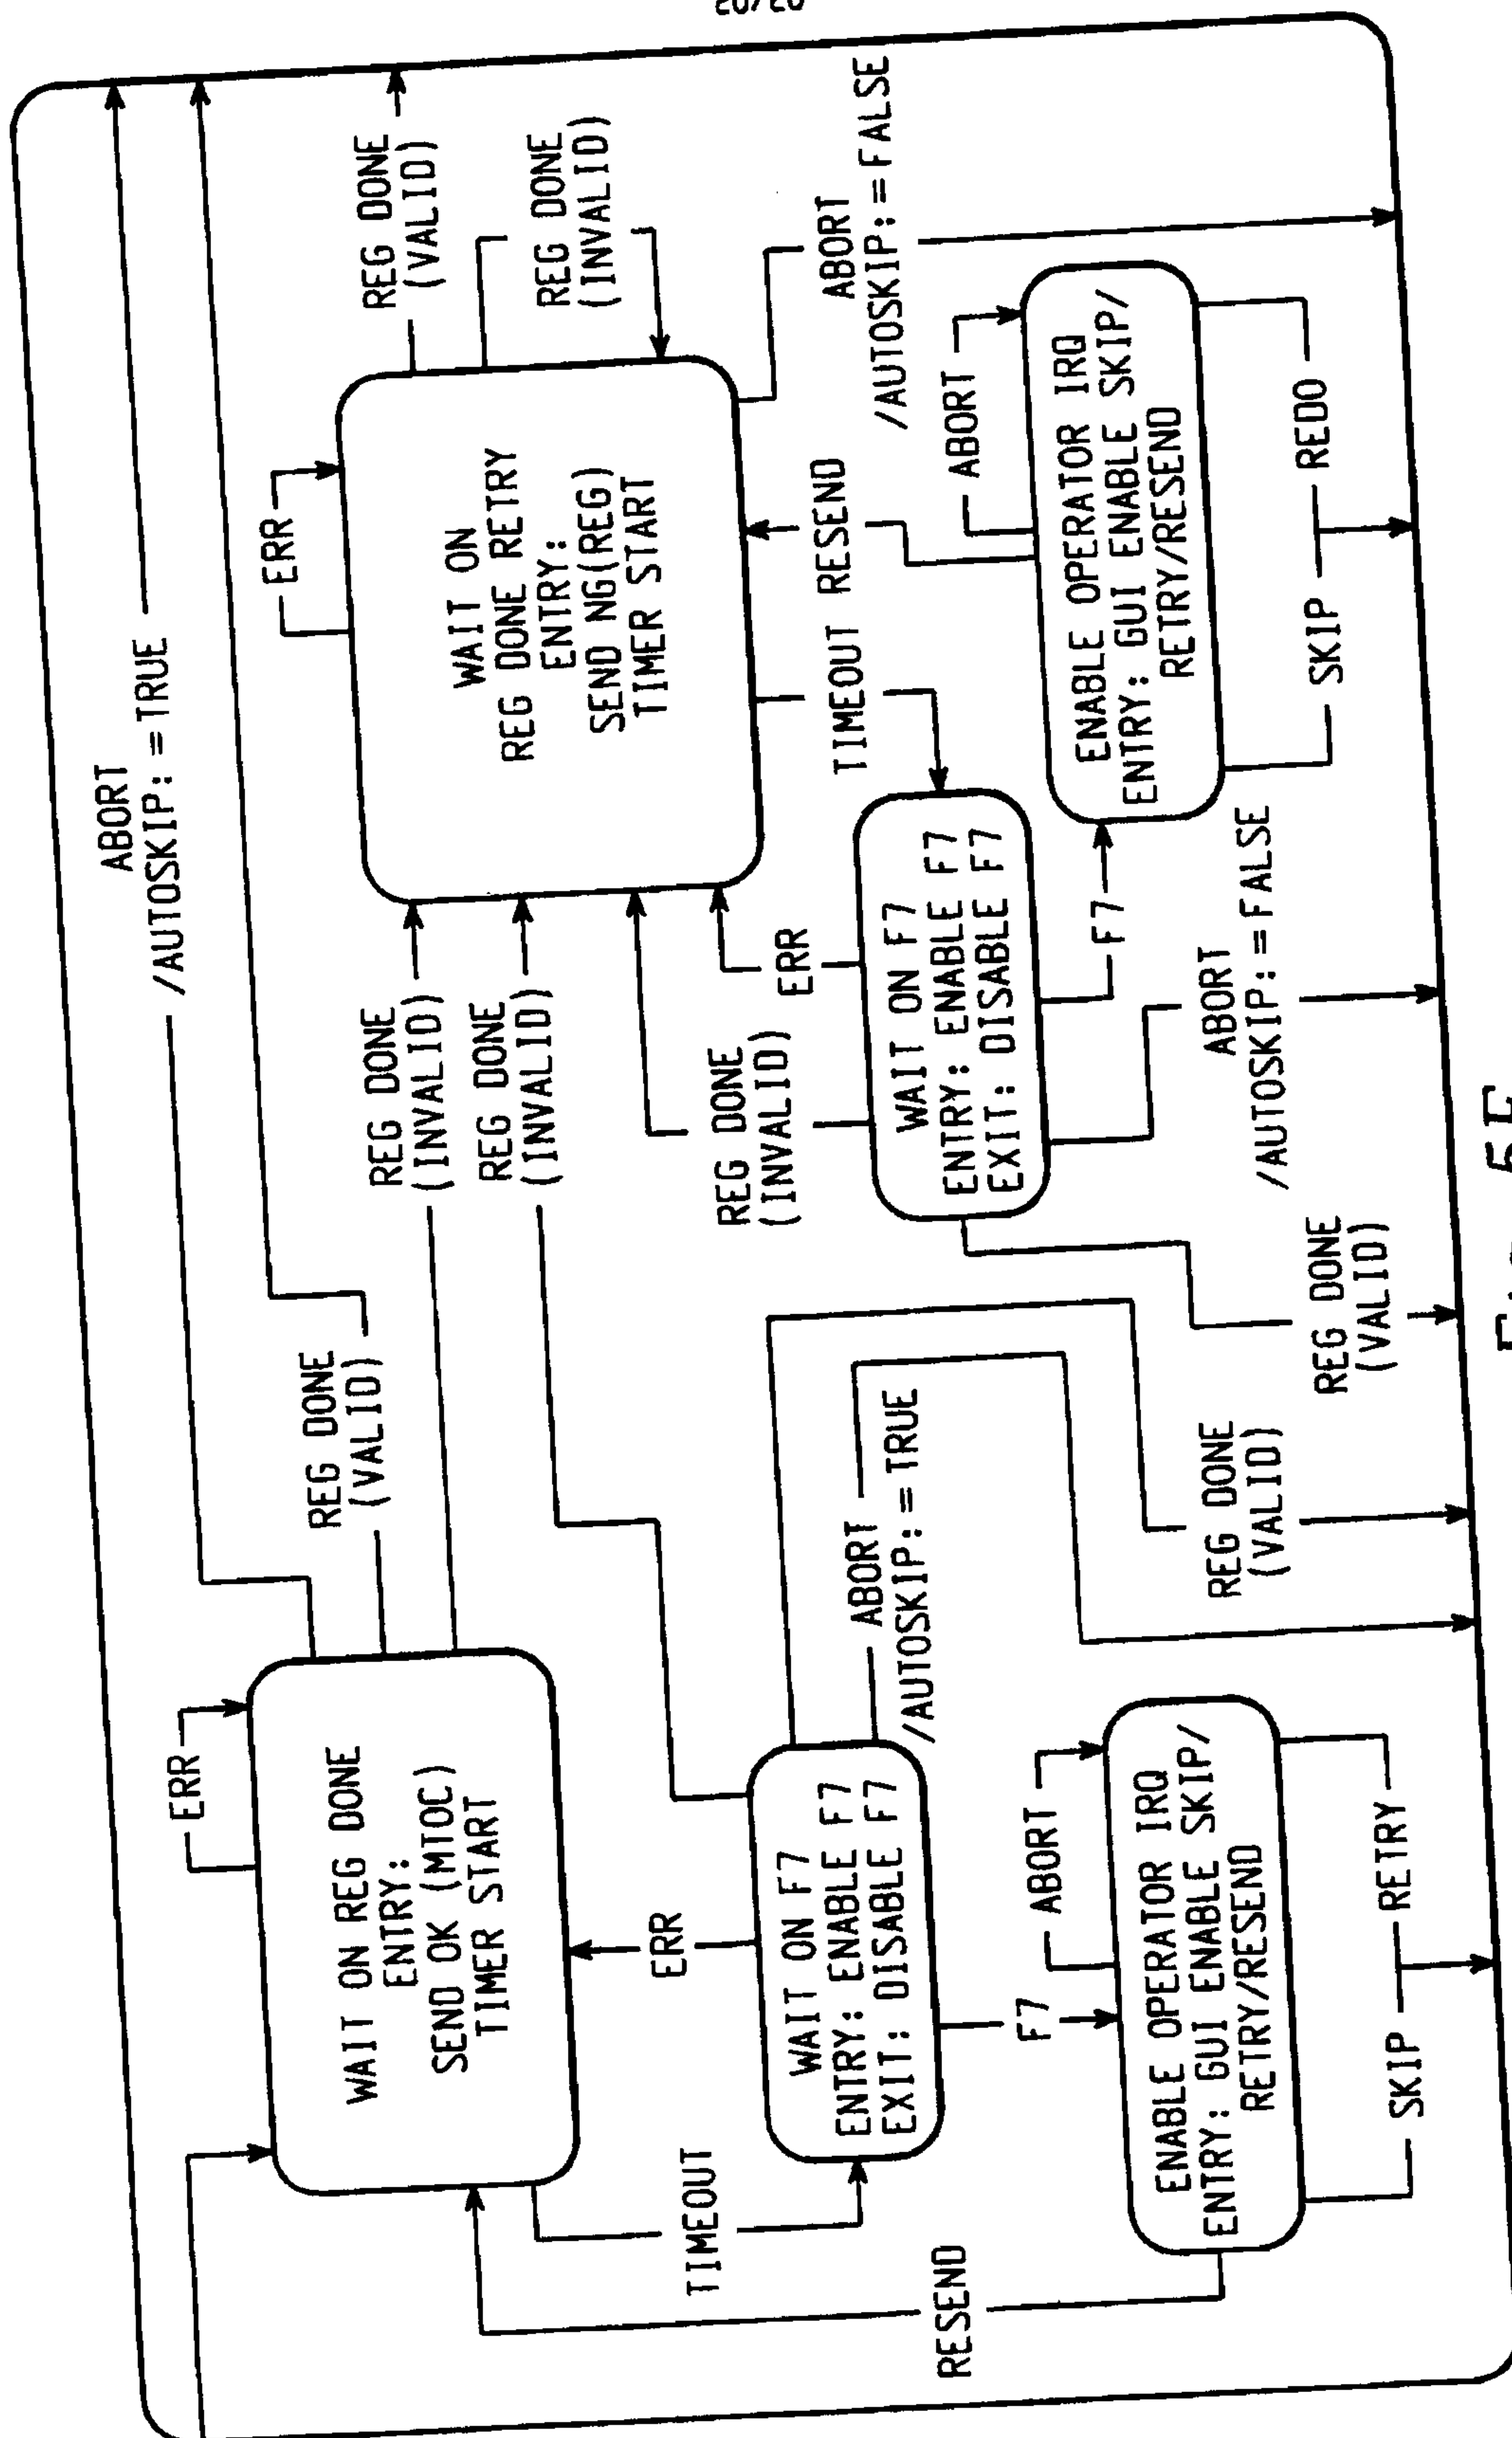


Fig. 5E

