

(12) **United States Patent**
Sawai

(10) **Patent No.:** US 10,104,625 B2
(45) **Date of Patent:** *Oct. 16, 2018

(54) **TRANSMISSION POWER CONTROL METHOD, COMMUNICATION DEVICE AND PROGRAM**

(71) Applicant: **Sony Corporation**, Tokyo (JP)

(72) Inventor: **Ryo Sawai**, Tokyo (JP)

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/367,035**

(22) Filed: **Dec. 1, 2016**

(65) **Prior Publication Data**

US 2017/0086145 A1 Mar. 23, 2017

Related U.S. Application Data

(63) Continuation of application No. 14/824,701, filed on Aug. 12, 2015, now Pat. No. 9,661,587, which is a (Continued)

(30) **Foreign Application Priority Data**

Jul. 31, 2009 (JP) 2009-179368
May 12, 2010 (JP) 2010-110013

(51) **Int. Cl.**
H04W 52/24 (2009.01)
H04W 52/46 (2009.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04W 52/243** (2013.01); **H04W 16/14** (2013.01); **H04W 52/24** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC ... H04W 52/143; H04W 52/16; H04W 52/24; H04W 52/242; H04W 52/243; H04W 52/46
52/46

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,537,610 A 7/1996 Mauger et al.
5,832,379 A 11/1998 Mallinckrodt
(Continued)

FOREIGN PATENT DOCUMENTS

JP 2002-142249 A 5/2002
JP 2002-171283 A 6/2002
(Continued)

OTHER PUBLICATIONS

IEEE 802.22 Working Group on Wireless Regional Area Networks, WRAN WG Website: <http://www.ieee802.org/22/>. Apr. 16, 2010.

(Continued)



Primary Examiner — Tan H Trinh

(74) *Attorney, Agent, or Firm* — Wolf, Greenfield & Sacks, P.C.

(57) **ABSTRACT**

There is provided a method for controlling a transmission power in a second communication service making secondary usage of a spectrum assigned to a first communication service, with use of any node of one or more secondary usage node that transmits a radio signal of the second communication service, comprising the steps of: acquiring an acceptable interference power allocated to the second communication service; calculating a total sum of interference power levels on the first communication service based on transmission powers respectively required for the one or more secondary usage node; and excluding any secondary usage node of the one or more secondary usage node from allocation of the transmission power when the calculated

(Continued)

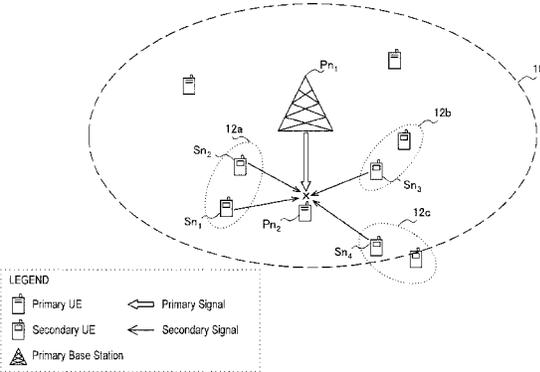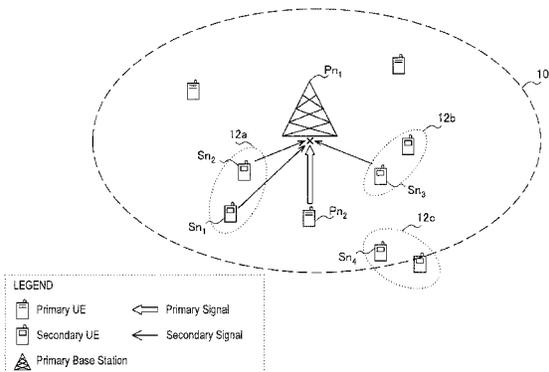

total sum of interference power levels is larger than the acceptable interference power.

20 Claims, 26 Drawing Sheets

Related U.S. Application Data

continuation of application No. 14/049,328, filed on Oct. 9, 2013, now Pat. No. 9,137,761, which is a continuation of application No. 13/587,312, filed on Aug. 16, 2012, now Pat. No. 8,588,829, which is a continuation of application No. 12/840,831, filed on Jul. 21, 2010, now Pat. No. 8,265,684.

(51) **Int. Cl.**

H04W 16/14 (2009.01)
H04W 52/34 (2009.01)
H04W 64/00 (2009.01)
H04W 52/14 (2009.01)
H04W 52/16 (2009.01)

(52) **U.S. Cl.**

CPC **H04W 52/34** (2013.01); **H04W 52/46** (2013.01); **H04W 64/00** (2013.01); **H04W 52/143** (2013.01); **H04W 52/16** (2013.01); **H04W 52/242** (2013.01)

(58) **Field of Classification Search**

USPC 455/501, 522, 69, 63.1, 135, 114.2, 13.4, 455/450, 512, 447, 446, 62, 278.1, 67.11, 455/449, 423, 552.1, 444, 436; 370/342, 370/329, 338; 713/151; 726/4
 See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,151,501 A 11/2000 Belkin et al.
 6,385,462 B1 5/2002 Baum et al.
 6,438,379 B1 8/2002 Gitlin et al.
 6,748,246 B1 6/2004 Khullar
 6,845,246 B1 1/2005 Steer
 6,865,393 B1 3/2005 Baum et al.
 6,985,750 B1 1/2006 Vicknair et al.
 7,146,176 B2 12/2006 McHenry
 7,193,978 B2 3/2007 Ishikawa et al.
 7,684,765 B2 3/2010 Song
 7,777,674 B1 8/2010 Haddadin et al.
 7,979,076 B2 7/2011 Hui et al.
 8,249,631 B2 8/2012 Sawai
 8,265,684 B2 9/2012 Sawai
 8,391,794 B2 3/2013 Sawai et al.
 8,446,849 B2 5/2013 Damnjanovic
 8,577,406 B2 11/2013 Sawai et al.
 8,588,829 B2 11/2013 Sawai
 8,639,281 B2 1/2014 Sawai et al.
 8,937,872 B2 1/2015 Wu et al.
 8,958,810 B2* 2/2015 Buddhikot H04W 16/10
 455/450
 9,078,243 B2 7/2015 Sawai
 9,131,387 B2 9/2015 Sawai et al.
 9,137,761 B2* 9/2015 Sawai H04W 52/24
 9,215,670 B2 12/2015 Sawai et al.
 9,351,340 B2 5/2016 Ribeiro et al.
 9,363,767 B2 6/2016 Kimura et al.
 9,380,575 B2 6/2016 Sawai
 9,510,302 B2 11/2016 Sawai et al.
 9,622,191 B2 4/2017 Kimura et al.
 9,661,587 B2 5/2017 Sawai
 9,775,119 B2 9/2017 Sawai et al.
 9,819,326 B2 11/2017 Low et al.

9,820,168 B2 11/2017 Sawai et al.
 9,894,657 B2 2/2018 Kimura et al.
 2001/0019543 A1* 9/2001 Mueckenheim H04W 16/10
 370/329
 2002/0002052 A1 1/2002 McHenry
 2002/0197995 A1 12/2002 Starkovich et al.
 2003/0100312 A1* 5/2003 Takahashi H04W 28/22
 455/453
 2003/0216143 A1* 11/2003 Roese G01S 5/02
 455/456.1
 2004/0063468 A1 4/2004 Frank
 2004/0253955 A1 12/2004 Love et al.
 2005/0003846 A1 1/2005 Anderson
 2005/0202839 A1 9/2005 Merboth et al.
 2006/0040696 A1 2/2006 Lin
 2006/0063500 A1 3/2006 Matoba et al.
 2006/0063533 A1 3/2006 Matoba et al.
 2006/0093074 A1 5/2006 Chang et al.
 2006/0094363 A1 5/2006 Kang et al.
 2006/0223573 A1 10/2006 Jalali
 2006/0240859 A1* 10/2006 Gervais H04W 52/16
 455/522
 2006/0251115 A1 11/2006 Hague et al.
 2006/0262767 A1* 11/2006 Peleg H04W 16/28
 370/338
 2007/0041351 A1 2/2007 Hazra et al.
 2007/0042784 A1 2/2007 Anderson
 2007/0049214 A1 3/2007 Song
 2007/0049266 A1 3/2007 Voss
 2007/0117537 A1 5/2007 Hui et al.
 2007/0117558 A1* 5/2007 Balwani H04W 8/245
 455/421
 2007/0129104 A1 6/2007 Sano et al.
 2007/0142087 A1 6/2007 Kim et al.
 2007/0147539 A1 6/2007 Gorokhov et al.
 2007/0149236 A1 6/2007 Naden et al.
 2007/0201412 A1 8/2007 Ji et al.
 2007/0213046 A1 9/2007 Li et al.
 2007/0287469 A1 12/2007 Wijting
 2008/0112361 A1 5/2008 Wu
 2008/0146154 A1* 6/2008 Claussen H04W 52/244
 455/63.1
 2008/0176595 A1 7/2008 Karaoguz
 2008/0208397 A1 8/2008 Miklos
 2008/0214127 A1 9/2008 Karmi et al.
 2008/0221951 A1* 9/2008 Stanforth G06Q 10/063
 705/7.41
 2008/0232490 A1 9/2008 Gross et al.
 2008/0253324 A1 10/2008 Mouldsley et al.
 2008/0268892 A1 10/2008 Hamdi et al.
 2009/0011788 A1 1/2009 Shan et al.
 2009/0034508 A1* 2/2009 Gurney H04W 16/14
 370/351
 2009/0088083 A1* 4/2009 Fujii H04W 52/367
 455/69
 2009/0111388 A1 4/2009 Chen
 2009/0180521 A1 7/2009 Joseph et al.
 2009/0186608 A1 7/2009 Lee et al.
 2009/0186646 A1 7/2009 Ahn et al.
 2009/0191889 A1 7/2009 Abedi
 2009/0196180 A1 8/2009 Bahl et al.
 2009/0215452 A1 8/2009 Balasubramanian et al.
 2009/0247201 A1 10/2009 Ye et al.
 2009/0247204 A1* 10/2009 Sennett H04W 16/14
 455/512
 2009/0253450 A1 10/2009 Gupta
 2009/0258654 A1 10/2009 Hagerman et al.
 2009/0264162 A1* 10/2009 Ramachandran ... H04W 52/243
 455/572
 2009/0265543 A1* 10/2009 Khetawat H04L 63/104
 713/151
 2009/0286545 A1 11/2009 Yavuz et al.
 2009/0291690 A1 11/2009 Guvenc et al.
 2009/0296640 A1 12/2009 Gilbert
 2009/0311968 A1 12/2009 Wigren
 2009/0313674 A1 12/2009 Ludvig et al.
 2009/0316601 A1 12/2009 Zhu et al.
 2009/0323641 A1 12/2009 Futagi et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

- 2010/0009716 A1 1/2010 Lee et al.
 2010/0027469 A1* 2/2010 Gurajala G06Q 30/016
 370/328
 2010/0062785 A1 3/2010 Hwang
 2010/0067419 A1 3/2010 Liu et al.
 2010/0081387 A1* 4/2010 Shi H04B 17/318
 455/62
 2010/0081449 A1 4/2010 Chaudhri et al.
 2010/0103924 A1 4/2010 Rao et al.
 2010/0118842 A1* 5/2010 Kalhan H04W 84/12
 370/338
 2010/0144357 A1* 6/2010 Chaudhri H04W 72/0406
 455/450
 2010/0167742 A1* 7/2010 Rajagopalan H04W 92/20
 455/436
 2010/0182928 A1 7/2010 Wu et al.
 2010/0207786 A1 8/2010 Chen et al.
 2010/0216404 A1 8/2010 Hershey et al.
 2010/0222063 A1 9/2010 Ishikura et al.
 2010/0223659 A1* 9/2010 Ekl H04W 12/06
 726/4
 2010/0261423 A1 10/2010 Stanforth et al.
 2010/0261467 A1 10/2010 Chou et al.
 2010/0309806 A1 12/2010 Wu et al.
 2010/0330919 A1 12/2010 Gurney et al.
 2011/0003605 A1 1/2011 Song et al.
 2011/0019625 A1 1/2011 Zhang et al.
 2011/0021235 A1 1/2011 Laroia et al.
 2011/0028170 A1 2/2011 Sawai
 2011/0028179 A1 2/2011 Sawai et al.
 2011/0028180 A1 2/2011 Sawai
 2011/0034204 A1 2/2011 Sawai et al.
 2011/0039495 A1 2/2011 Sawai et al.
 2011/0039561 A1 2/2011 Narasimha et al.
 2011/0039569 A1 2/2011 Narasimha et al.
 2011/0090885 A1 4/2011 Safavi
 2011/0105184 A1 5/2011 Piirainen et al.
 2011/0143805 A1 6/2011 Ramasamy et al.
 2011/0151887 A1 6/2011 Hakola et al.
 2011/0165903 A1 7/2011 Selen
 2011/0177808 A1* 7/2011 Grokop H04W 52/265
 455/423
 2011/0195667 A1* 8/2011 Hassan H04W 4/00
 455/62
 2011/0195735 A1 8/2011 Irmer et al.
 2011/0200136 A1 8/2011 Song et al.
 2011/0249619 A1 10/2011 Yu et al.
 2011/0261715 A1* 10/2011 Norefors H04W 60/00
 370/252
 2011/0275379 A1 11/2011 Hakola et al.
 2011/0300892 A1 12/2011 Hakola et al.
 2012/0178482 A1* 7/2012 Seo H04W 56/00
 455/501
 2012/0196611 A1 8/2012 Venkatraman et al.
 2012/0309439 A1 12/2012 Sawai
 2013/0100893 A1 4/2013 Sawai
 2013/0102344 A1 4/2013 Sawai
 2013/0102350 A1 4/2013 Sawai et al.
 2013/0122947 A1 5/2013 Li et al.
 2013/0142059 A1 6/2013 Di Girolamo et al.
 2013/0203435 A1* 8/2013 Smith H04W 16/14
 455/454
 2013/0217429 A1 8/2013 Kimura et al.
 2013/0242854 A1 9/2013 Cai et al.
 2013/0316756 A1 11/2013 Sawai et al.
 2014/0045542 A1 2/2014 Sawai
 2015/0119014 A1 4/2015 Muraoka et al.
 2015/0223257 A1 8/2015 Wilhelmsson et al.
 2015/0230243 A1 8/2015 Sawai
 2015/0282184 A1 10/2015 Yang et al.
 2015/0334664 A1 11/2015 Sawai et al.
 2015/0351045 A1* 12/2015 Sawai H04W 52/46
 455/501
 2016/0066347 A1 3/2016 Ji et al.
 2016/0073356 A1 3/2016 Sawai et al.
 2016/0262025 A1 9/2016 Zuniga et al.
 2016/0278157 A1 9/2016 Sawai
 2016/0337983 A1 11/2016 Sawai
 2016/0366653 A1 12/2016 Sawai et al.
 2017/0188365 A1 6/2017 Kimura et al.
 2017/0359785 A1 12/2017 Sawai et al.
 2018/0007565 A1 1/2018 Sawai et al.

FOREIGN PATENT DOCUMENTS

- JP 2002-247639 A 8/2002
 JP 2007-235683 A 9/2007
 JP 2007-300419 A 11/2007
 JP 2009-100452 A 5/2009
 JP 2009-523379 A 6/2009
 JP 2011-520377 A 7/2011
 JP 2012-533924 A 12/2012
 WO WO 2008/076219 A2 6/2008
 WO WO 2009/136760 A1 11/2009
 WO WO 2010/027308 A1 3/2010

OTHER PUBLICATIONS

- Second Report and Order and Memorandum and Order, FCC08-260: http://hraunfoss.fcc.gov/edocs_public/attachmatch/FCC-08-260A1. Released on Nov. 14, 2008.
 Ramandeep, Ahuja et al., "Cognitive Radio System Using IEEE 802.11a over UHF TVWS", IEEE, Motorola, 2008.
 Gurney, David et al., "Geo-location Database Techniques for Incumbent Protection in the TV White Space", IEEE, Dyspan, 2008.
 Fujii, Hiromasa et al., "Performance Analysis of Adaptive TPC Spectrum Sharing Under Multicell Environments", Crowncom, May 2008.
 Inage et al., "Spectrum Sharing Based on Capacity Conservation Ratio of Primary User", IEICE Technical Report SR2009, May 2009. 8 pages.
 IEEE 802.22 Working Group on Wireless Regional Area Networks, WRAN WG Website: <http://www.ieee802.org/22/HomePageText.htm>, Apr. 27, 2015.
 Fujii et al., Spectrum sharing by adaptive transmit power control for low priority systems and its achievable capacity. Presented at the 3rd International Conference on Cognitive Oriented Wireless Networks and Communications, May 15-17, 2008. IEICE Transactions on Communications v.E92-B (8); pp. 2568-2576. Aug. 1, 2009.
 IEEE 802.22—2011 IEEE Standard for wireless regional area networks part 22: Cognitive wireless RAN medium access control (MAC) and physical layer (PHY) specifications: policies and procedures for operation in the TV bands. Jul. 1, 2011. 672 pages.
 U.S. Appl. No. 12/838,605, filed Jul. 19, 2010, Sawai et al.
 U.S. Appl. No. 12/840,809, filed Jul. 21, 2010, Sawai.
 U.S. Appl. No. 12/840,831, filed Jul. 21, 2010, Sawai.
 U.S. Appl. No. 12/844,188, filed Jul. 27, 2010, Sawai et al.
 U.S. Appl. No. 12/849,210, filed Aug. 3, 2010, Sawai et al.
 U.S. Appl. No. 13/587,312, filed Aug. 16, 2012, Sawai.
 U.S. Appl. No. 13/655,002, filed Oct. 18, 2012, Sawai et al.
 U.S. Appl. No. 13/954,609, filed Jul. 30, 2013, Sawai et al.
 U.S. Appl. No. 14/049,328, filed Oct. 9, 2013, Sawai.
 U.S. Appl. No. 14/463,850, filed Aug. 20, 2014, Sawai.
 U.S. Appl. No. 14/810,825, filed Jul. 28, 2015, Sawai et al.
 U.S. Appl. No. 13/807,898, filed Dec. 31, 2012, Sawai.
 U.S. Appl. No. 14/696,941, filed Apr. 27, 2015, Sawai.
 U.S. Appl. No. 13/880,963, filed Apr. 22, 2013, Kimura et al.
 U.S. Appl. No. 14/824,701, filed Aug. 12, 2015, Sawai.
 U.S. Appl. No. 14/942,891, filed Nov. 16, 2015, Sawai et al.
 U.S. Appl. No. 13/807,825, filed Dec. 31, 2012, Sawai.
 U.S. Appl. No. 15/167,555, filed May 27, 2016, Sawai.
 U.S. Appl. No. 15/157,137, filed May 17, 2016, Kimura et al.
 U.S. Appl. No. 15/246,203, filed Aug. 24, 2016, Sawai et al.
 **Japanese Office Action dated Aug. 20, 2013 in connection with Japanese Application No. 2010-110014.
 **Japanese Office Action dated Jan. 28, 2014 in connection With Japanese Application No. 2010-110013.

(56)

References Cited

OTHER PUBLICATIONS

**Japanese Office Action dated Feb. 25, 2014 in connection with Japanese Application No. 2010-110012.

***Japanese Office Action dated Jan. 26, 2016 in connection with Japanese Application No. 2015-074793.

***Japanese Office Action dated Aug. 9, 2016 in connection with Japanese Application No. 2015-074793.

U.S. Appl. No. 15/458,056, filed Mar. 14, 2017, Kimura et al.

U.S. Appl. No. 15/688,081, filed Aug. 28, 2017, Sawai et al.

U.S. Appl. No. 15/703,247, filed Sep. 13, 2017, Sawai et al.

* cited by examiner

FIG. 1A

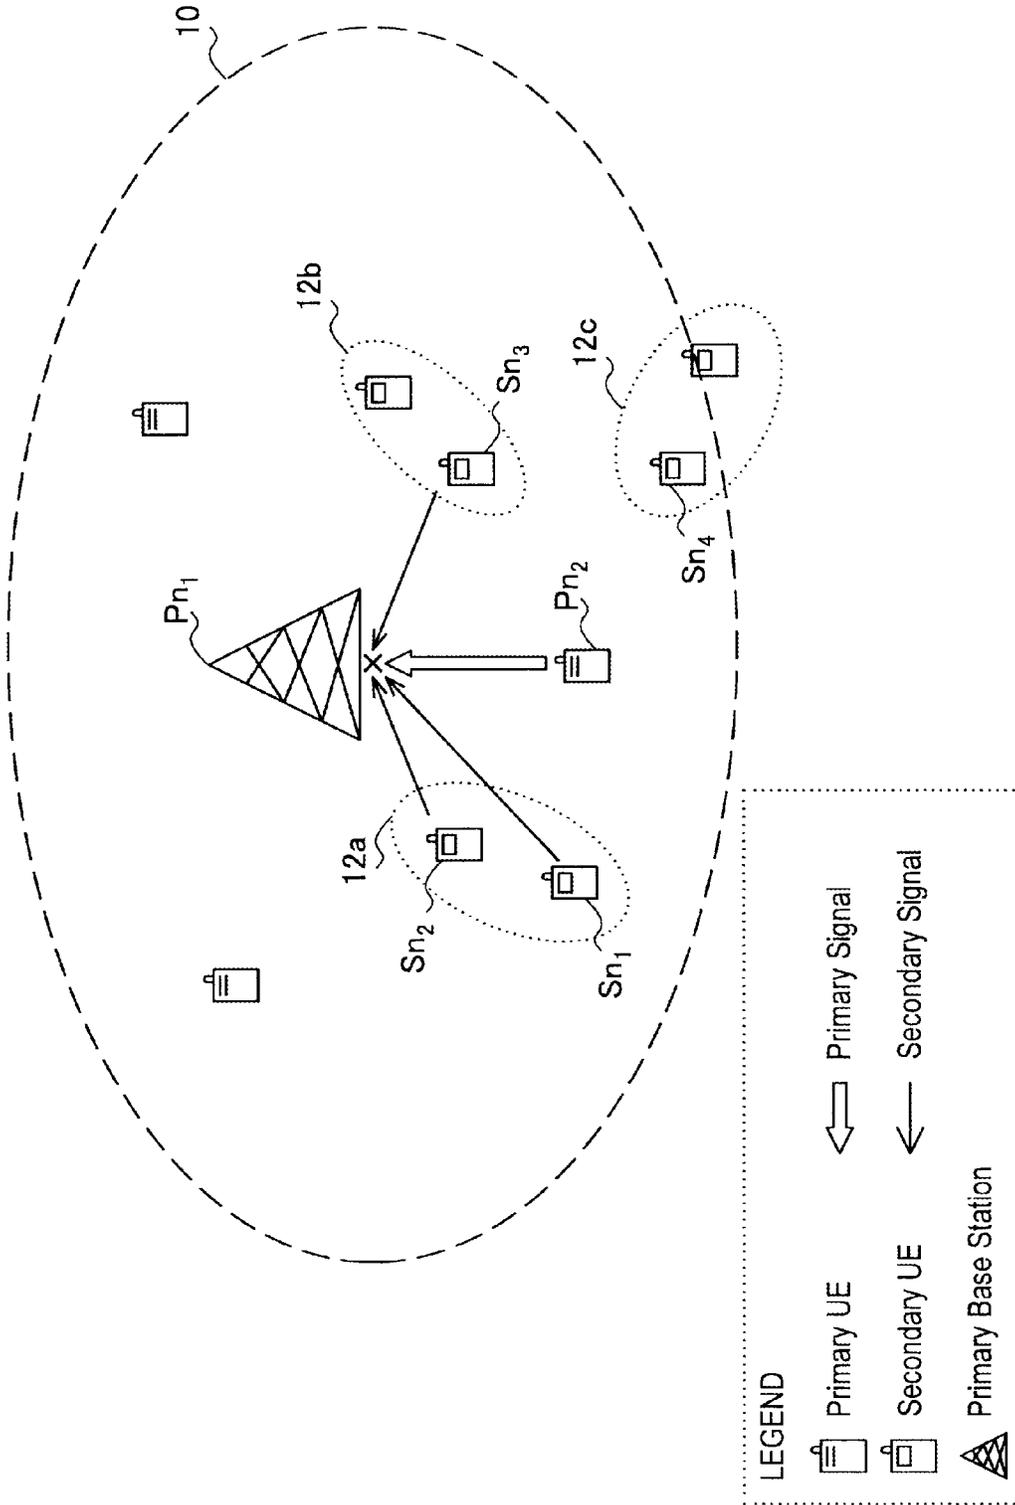


FIG.1B

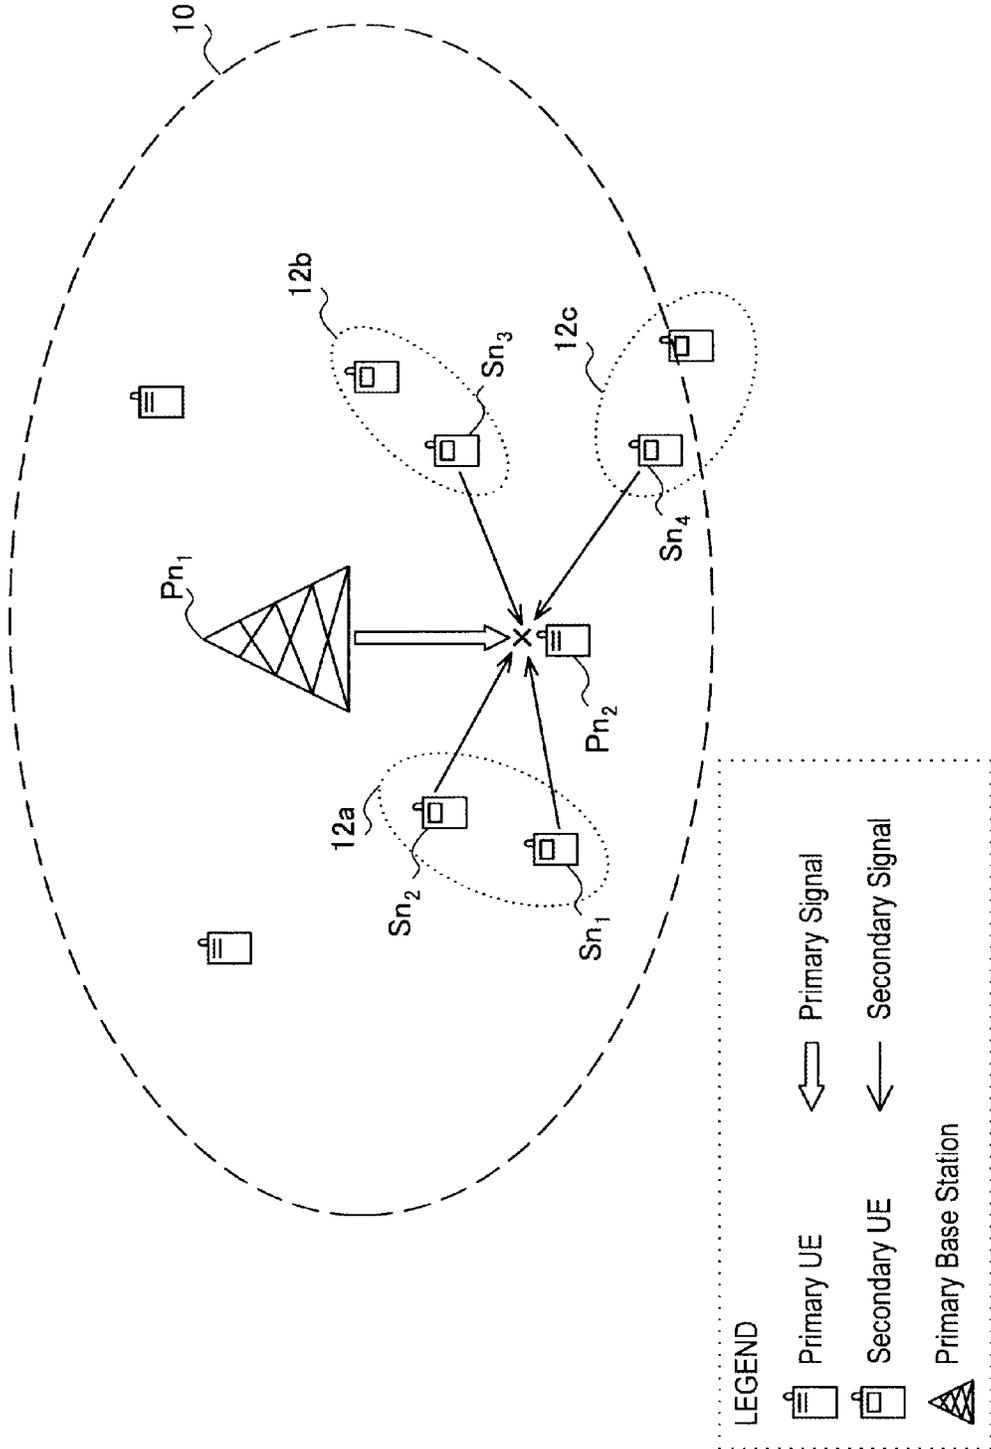


FIG.2A


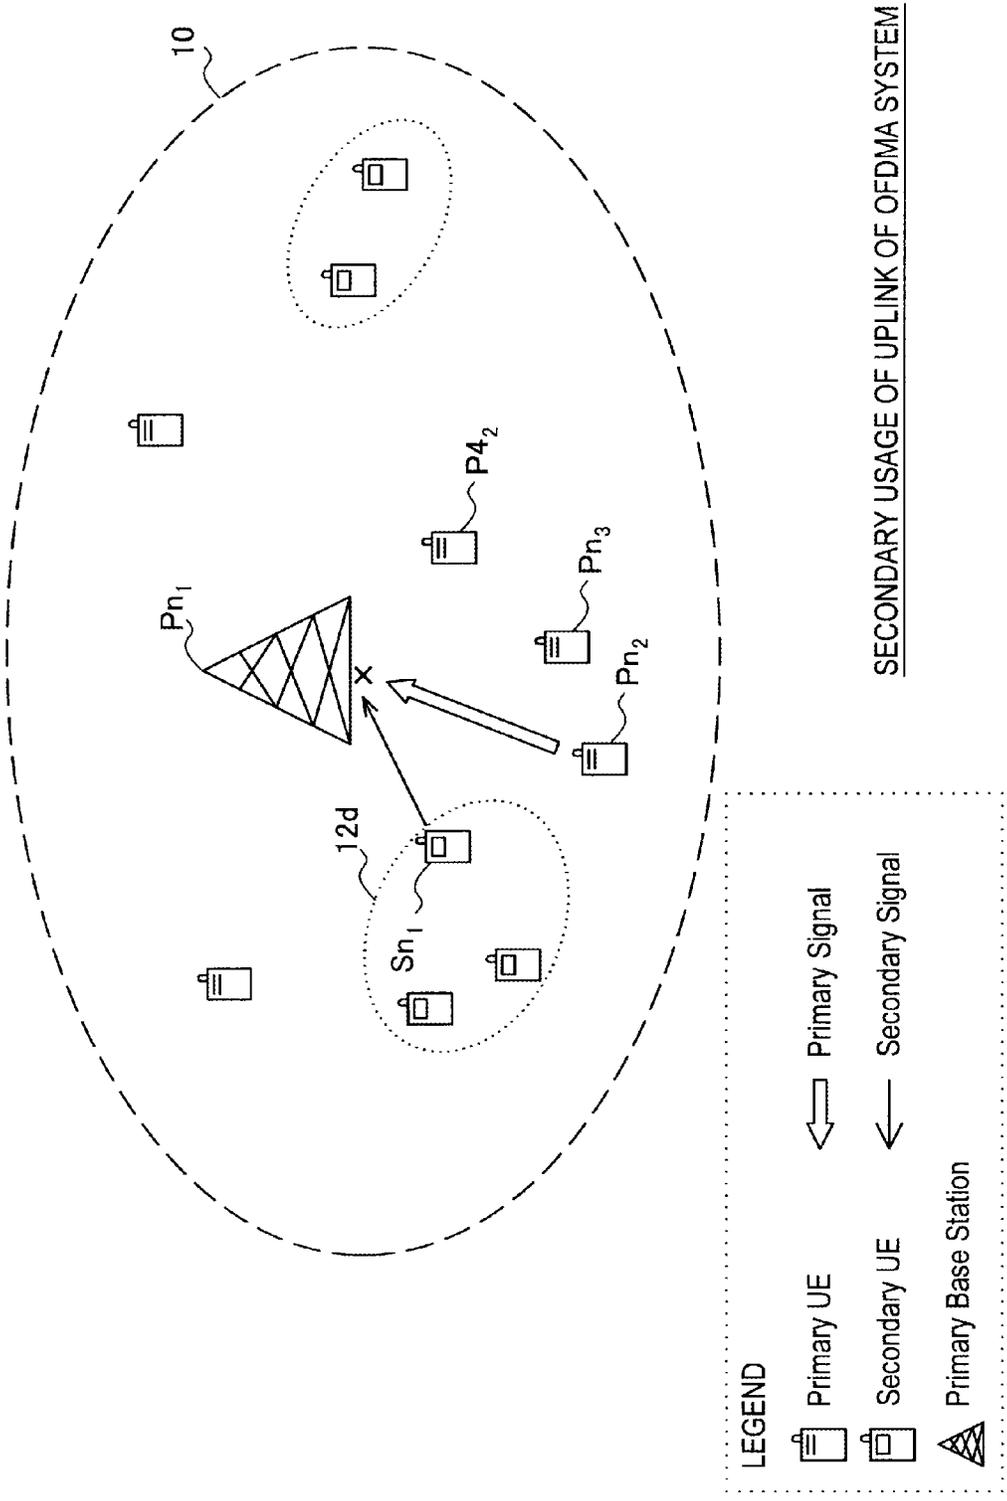


FIG.2B

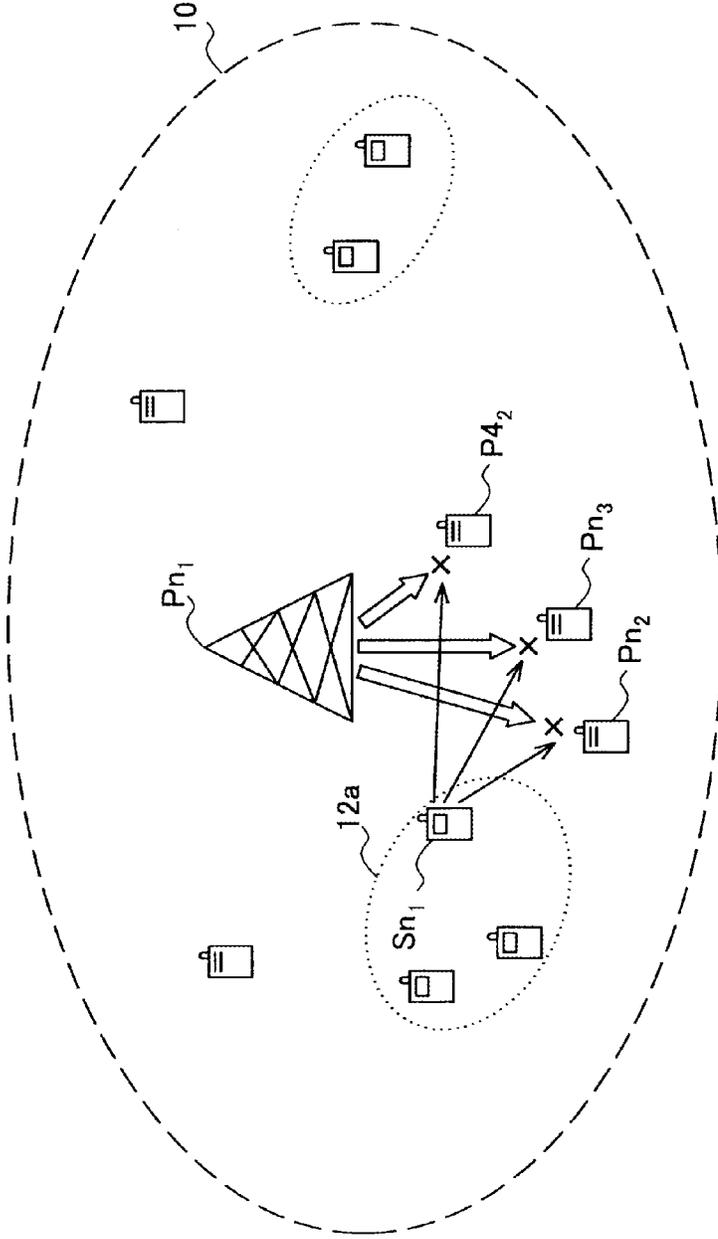


LEGEND

-  Primary UE
-  Secondary UE
-  Primary Base Station
-  Primary Signal
-  Secondary Signal

SECONDARY USAGE OF DOWNLINK OF OFDMA SYSTEM

FIG.2C

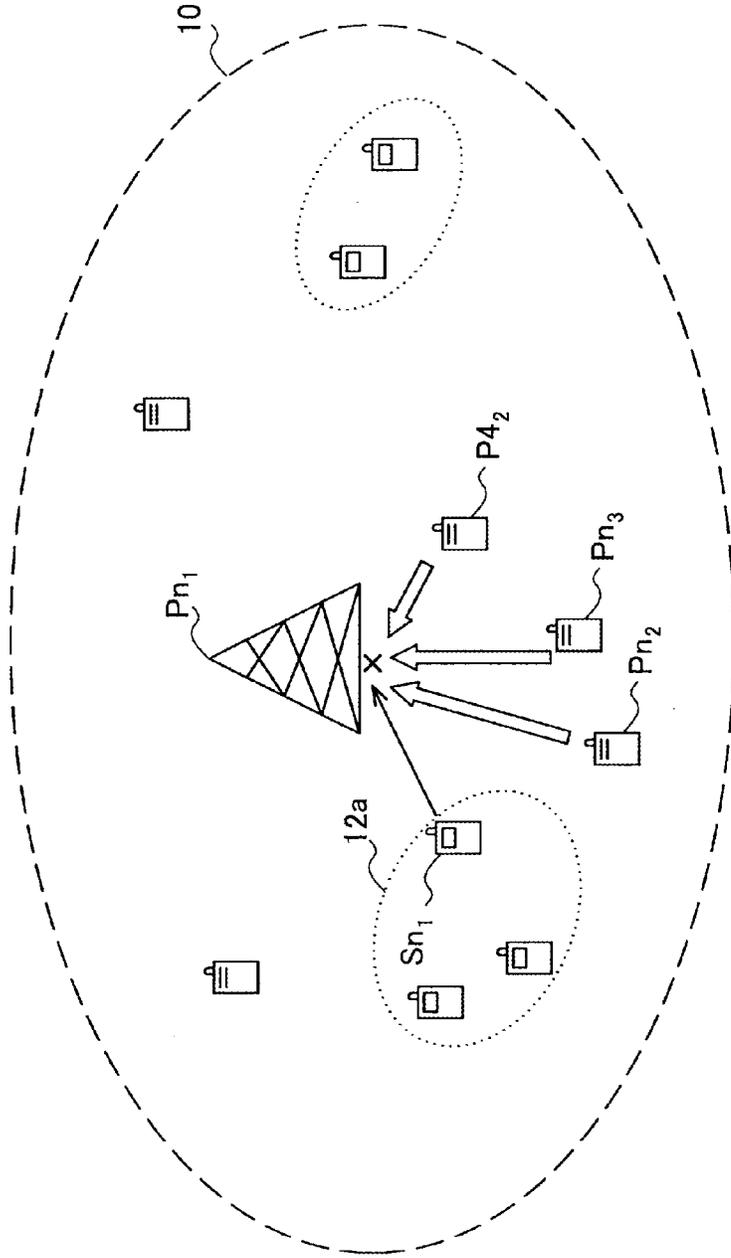


LEGEND

-  Primary UE
-  Primary Signal
-  Secondary UE
-  Secondary Signal
-  Primary Base Station

SECONDARY USAGE OF UPLINK OF CDMA SYSTEM

FIG.2D

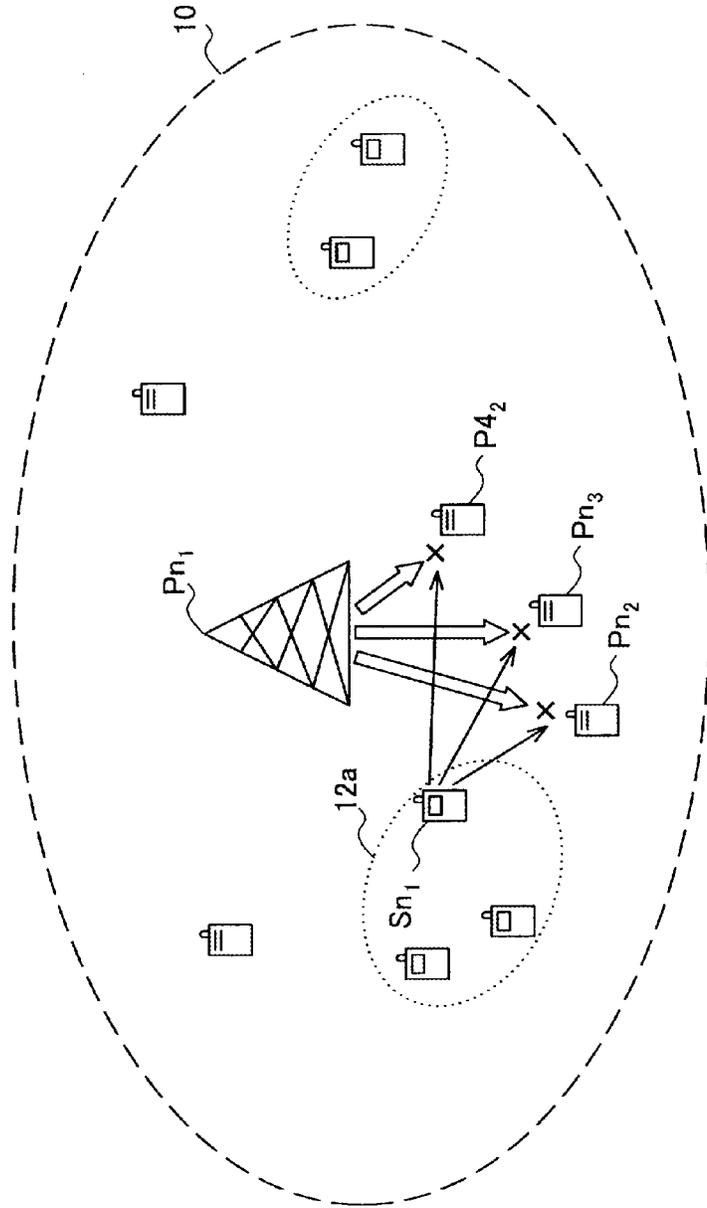

LEGEND

-  Primary UE
-  Secondary UE
-  Primary Base Station
-  Primary Signal
-  Secondary Signal

SECONDARY USAGE OF DOWNLINK OF CDMA SYSTEM

FIG. 3A

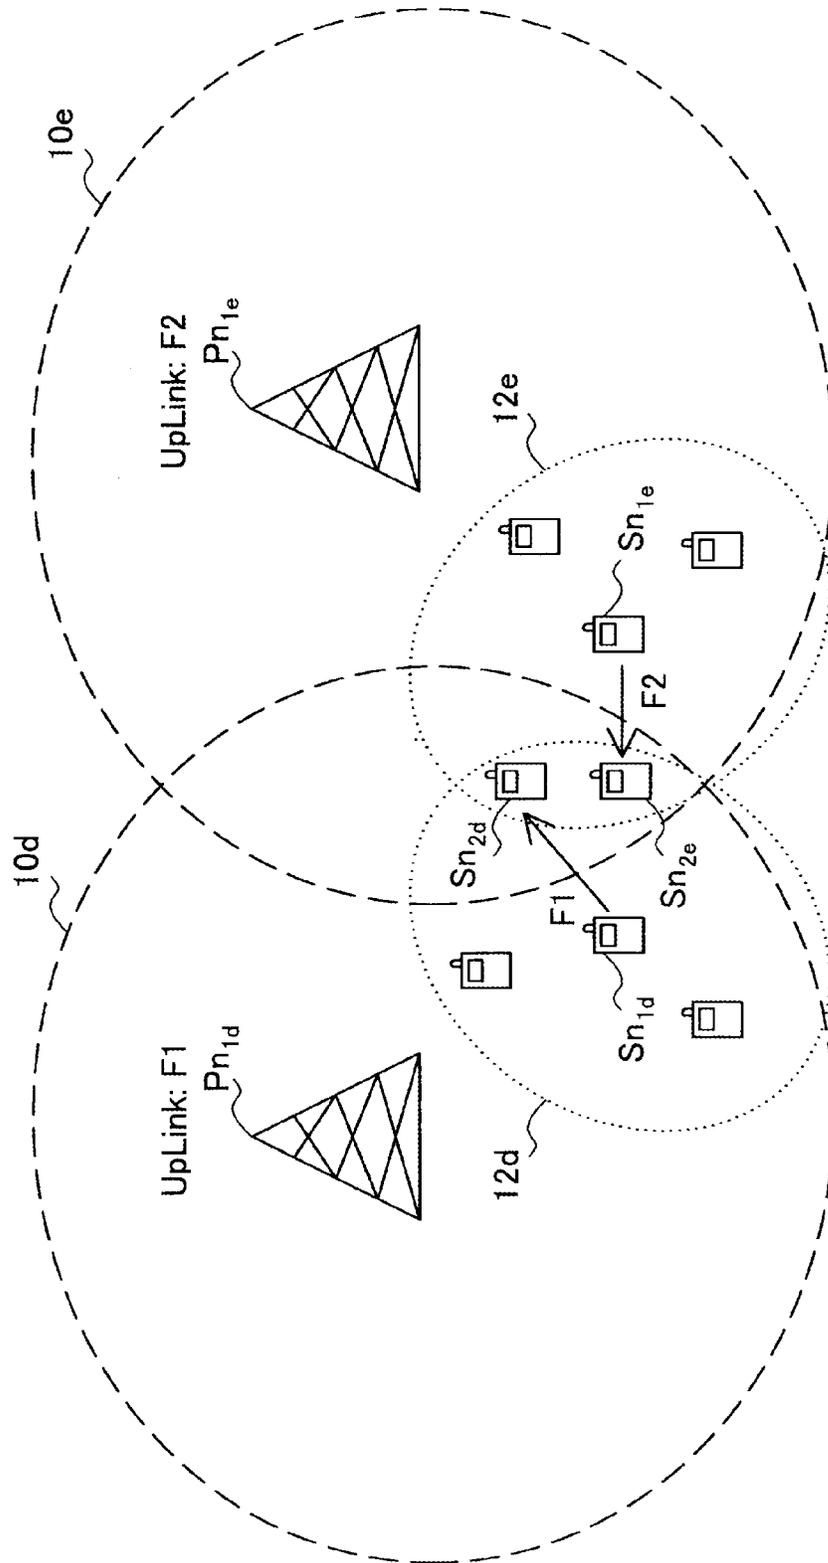


FIG.3B

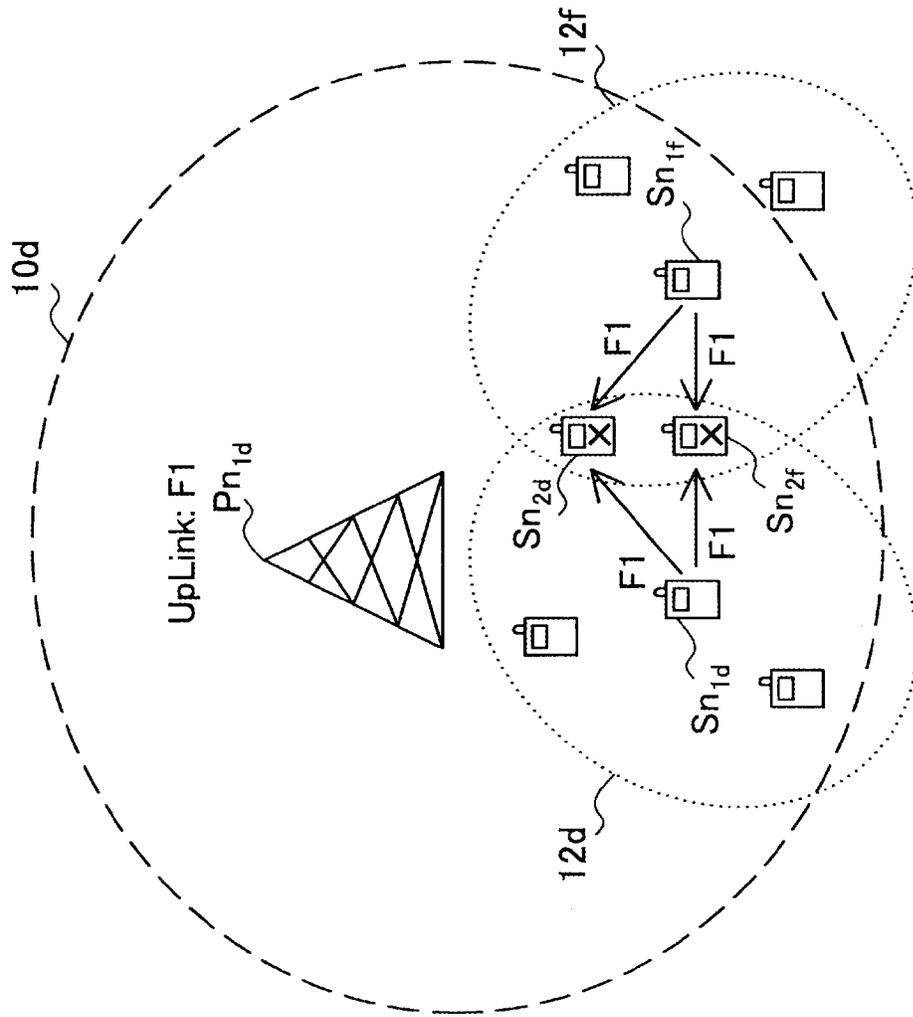


FIG. 4

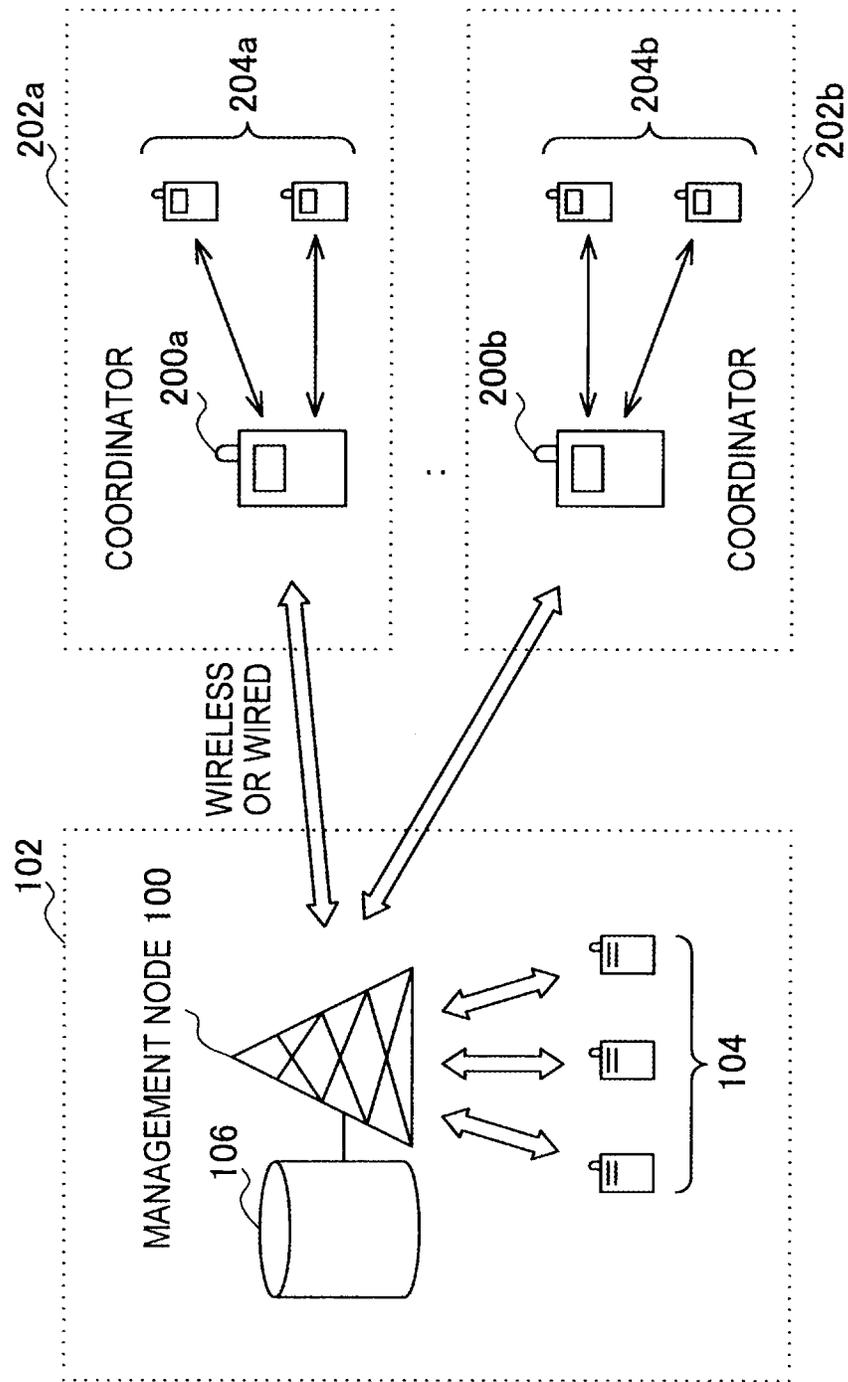


FIG.5

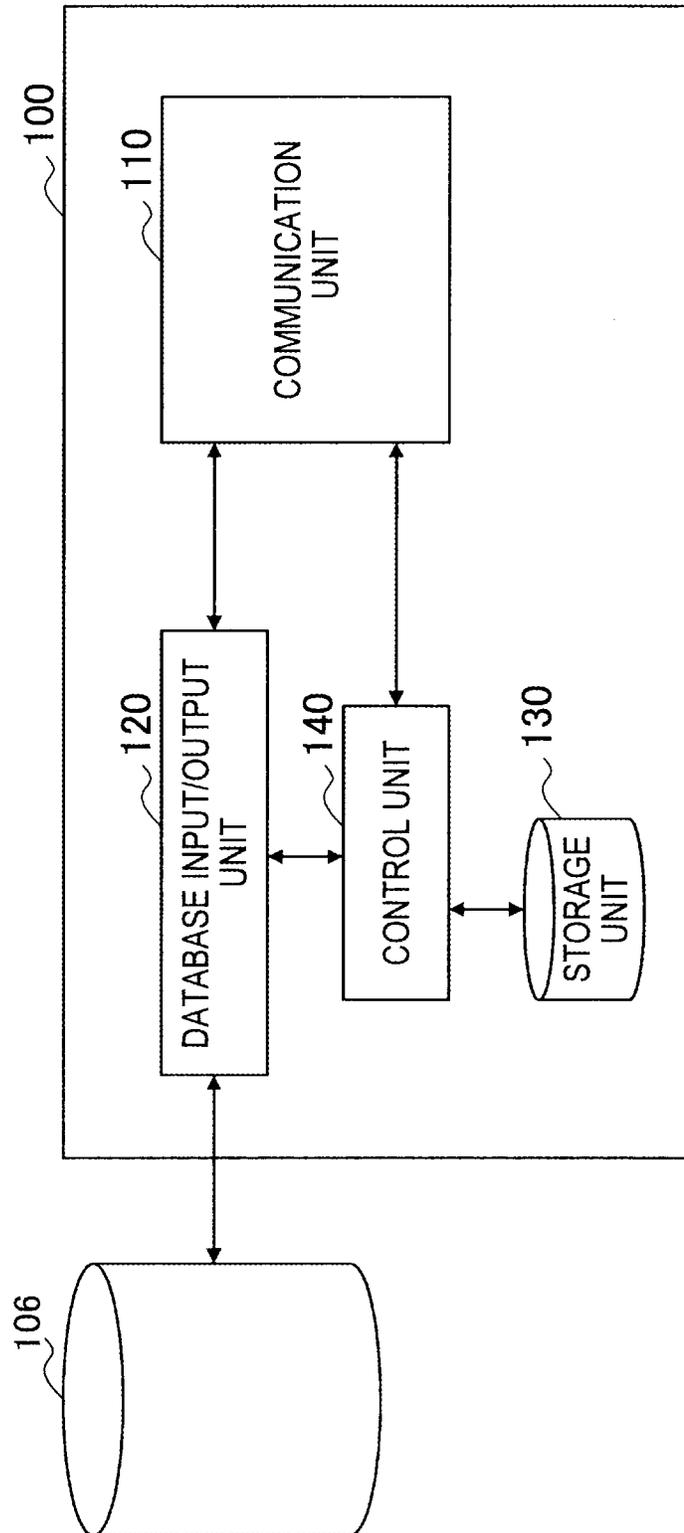


FIG.6

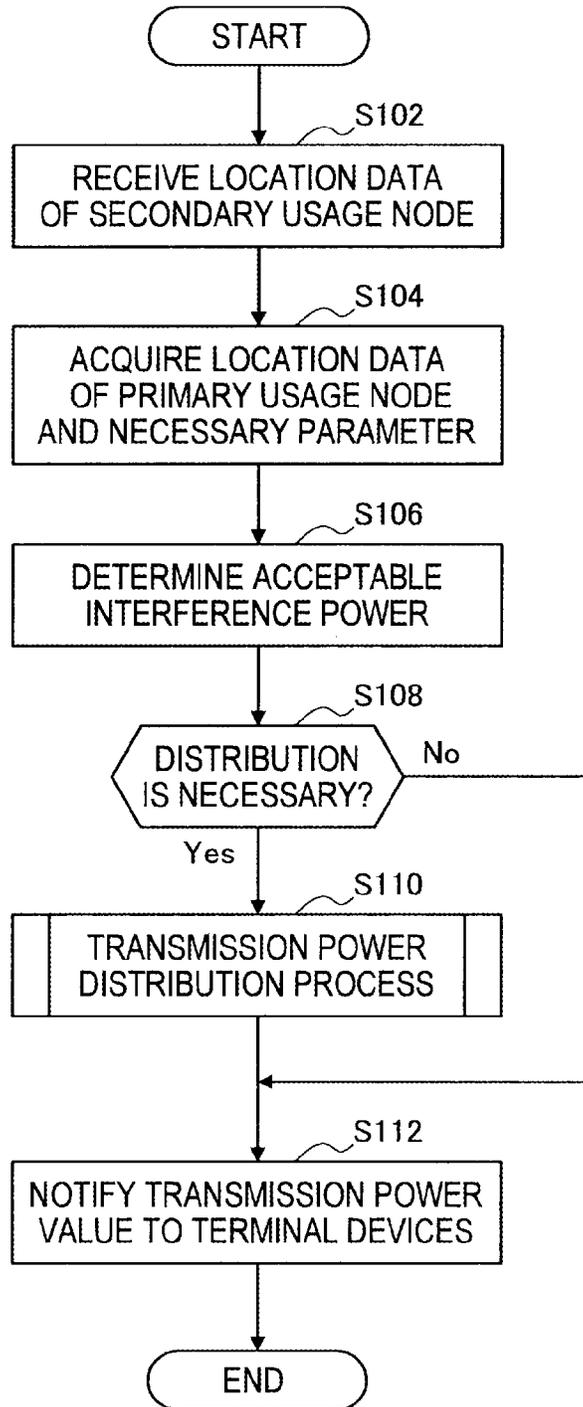


FIG. 7

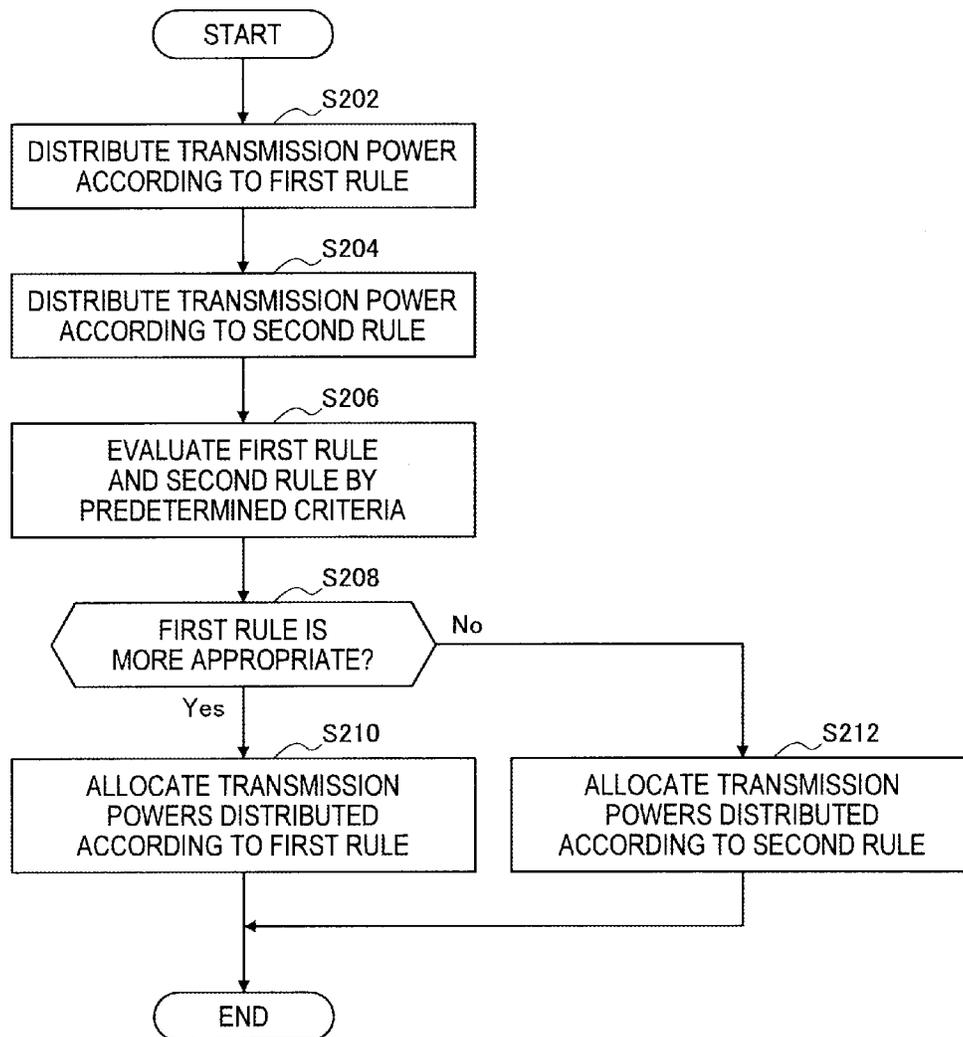


FIG. 8

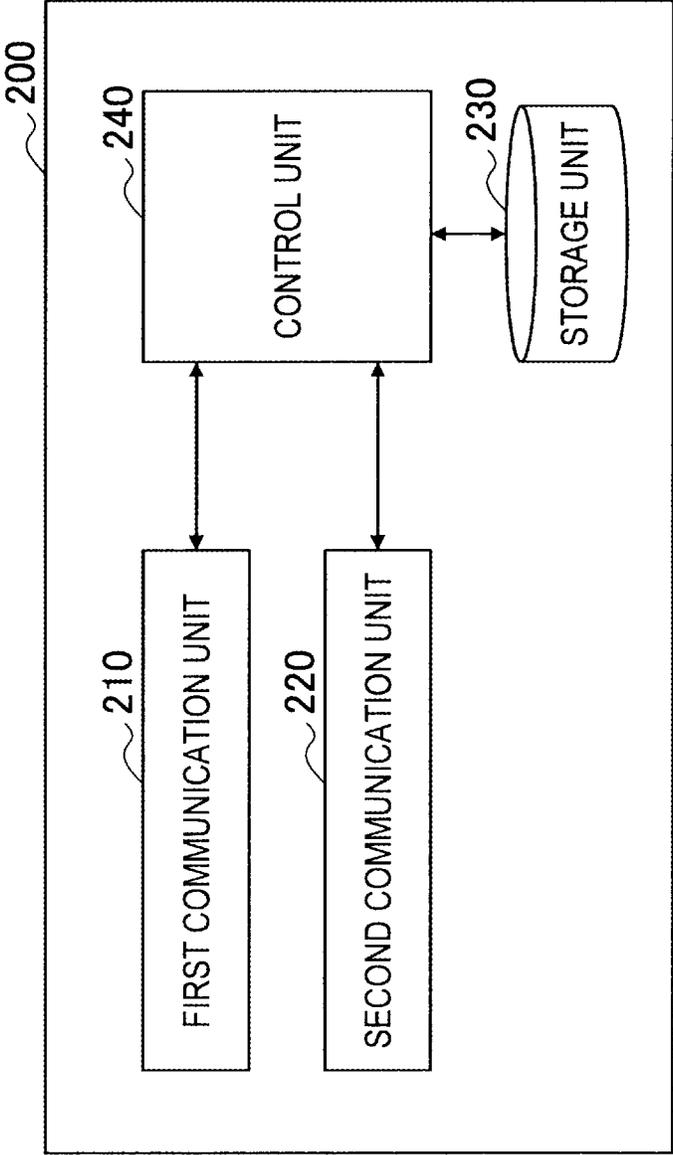


FIG.9

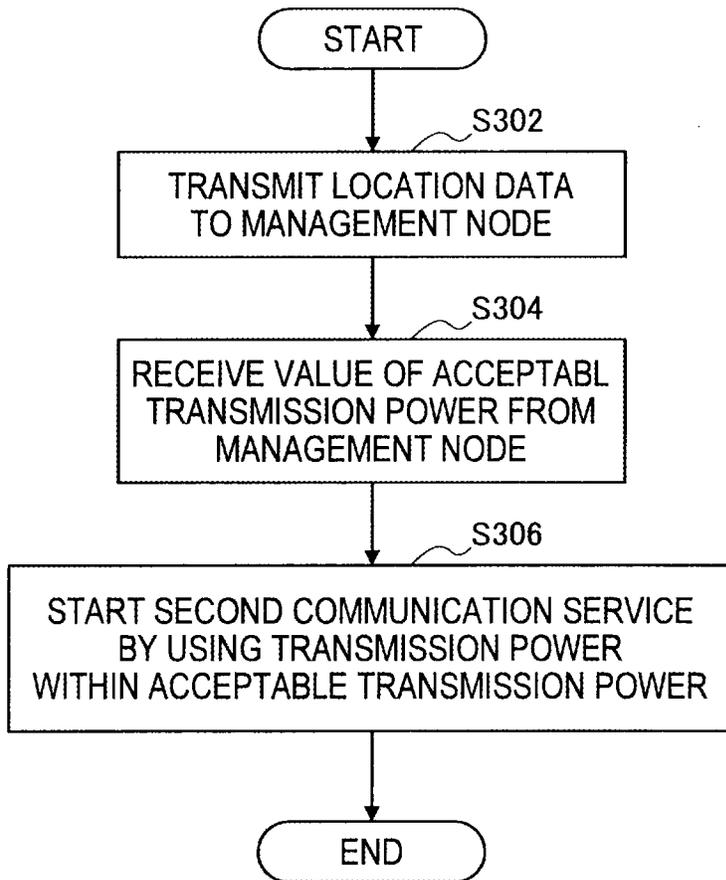


FIG.10

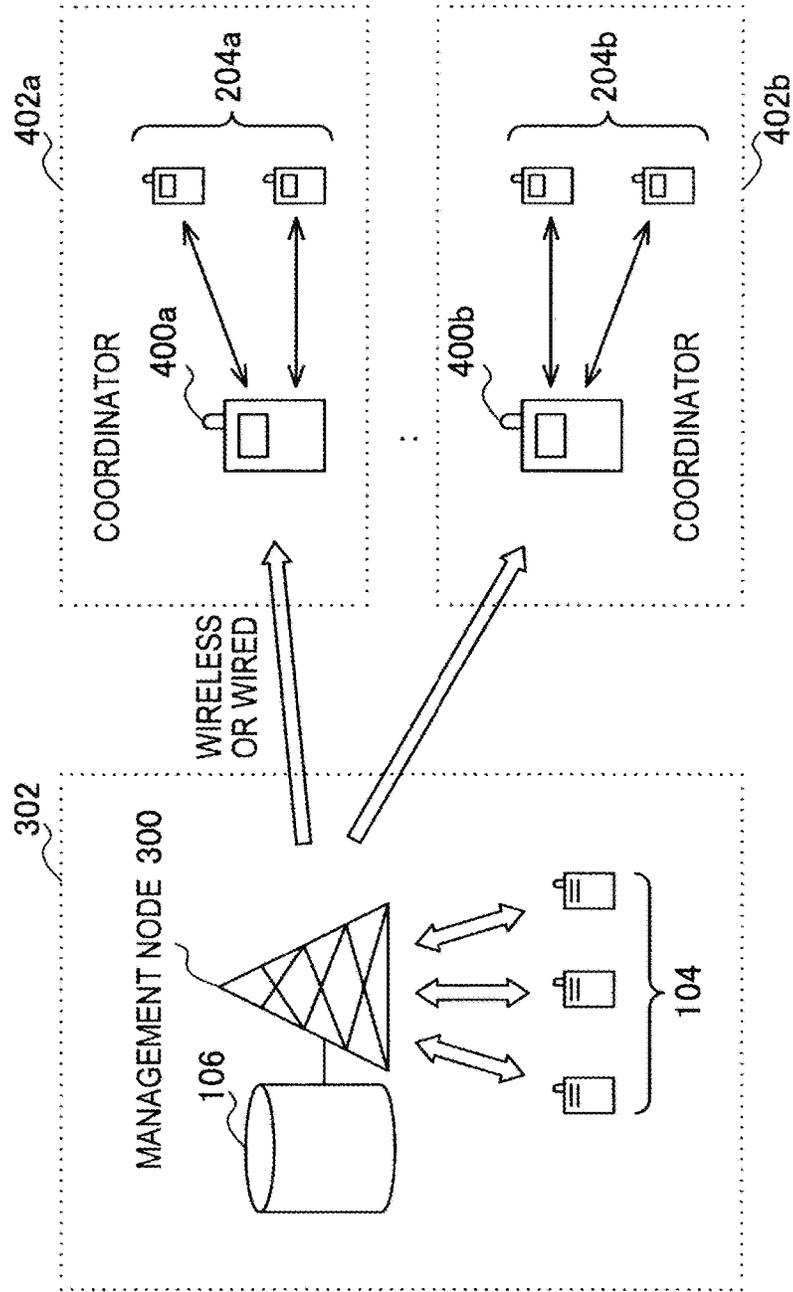


FIG.11

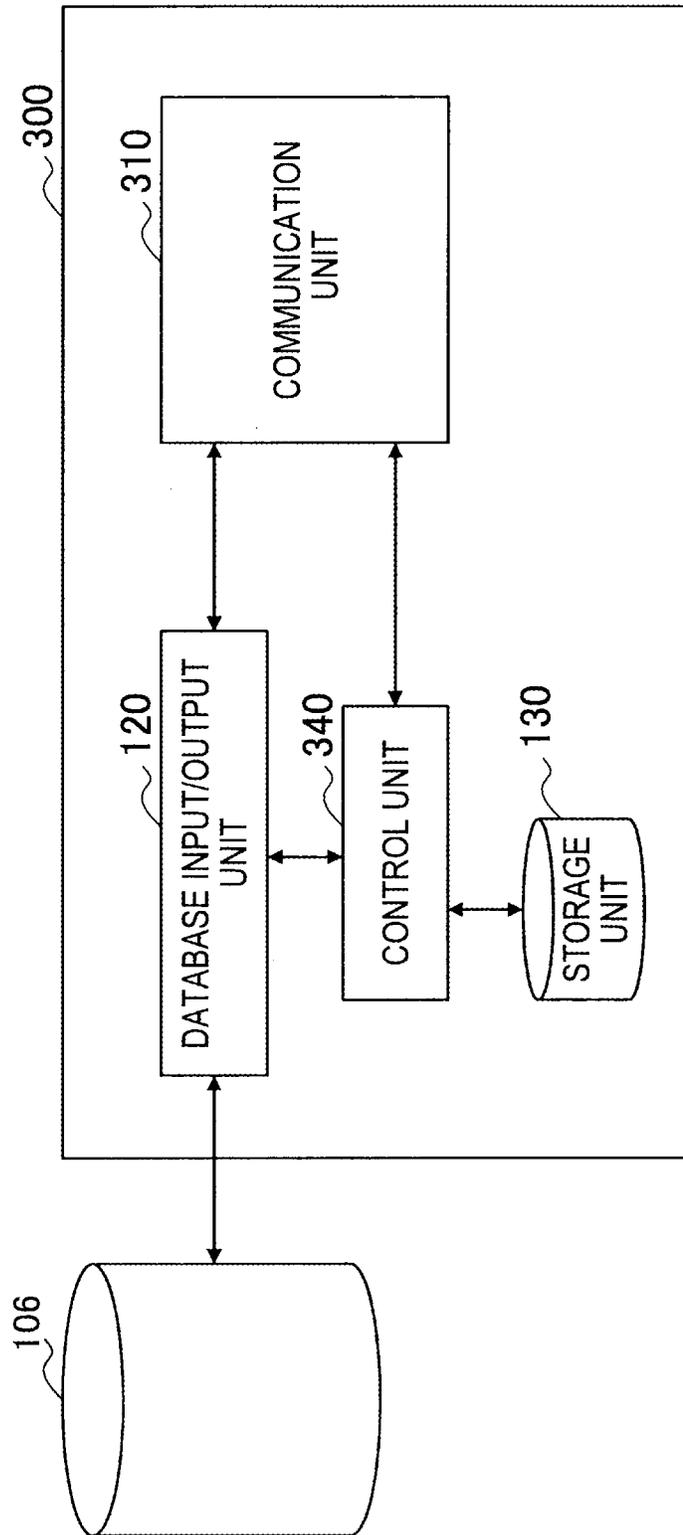


FIG.12

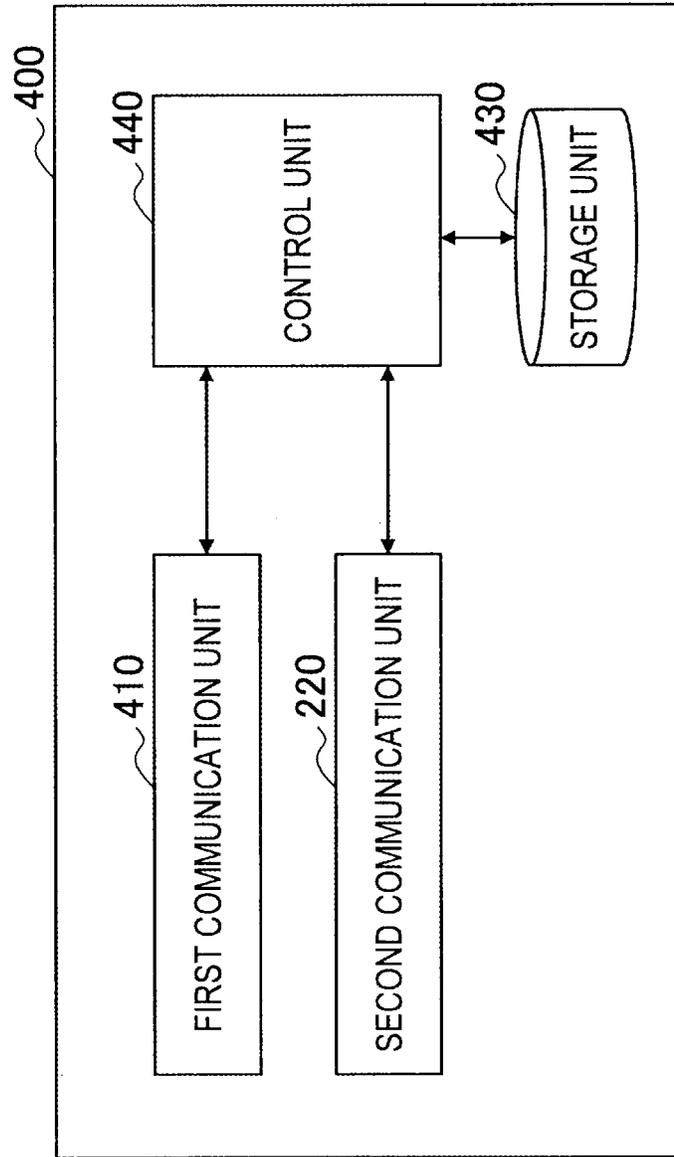


FIG.13

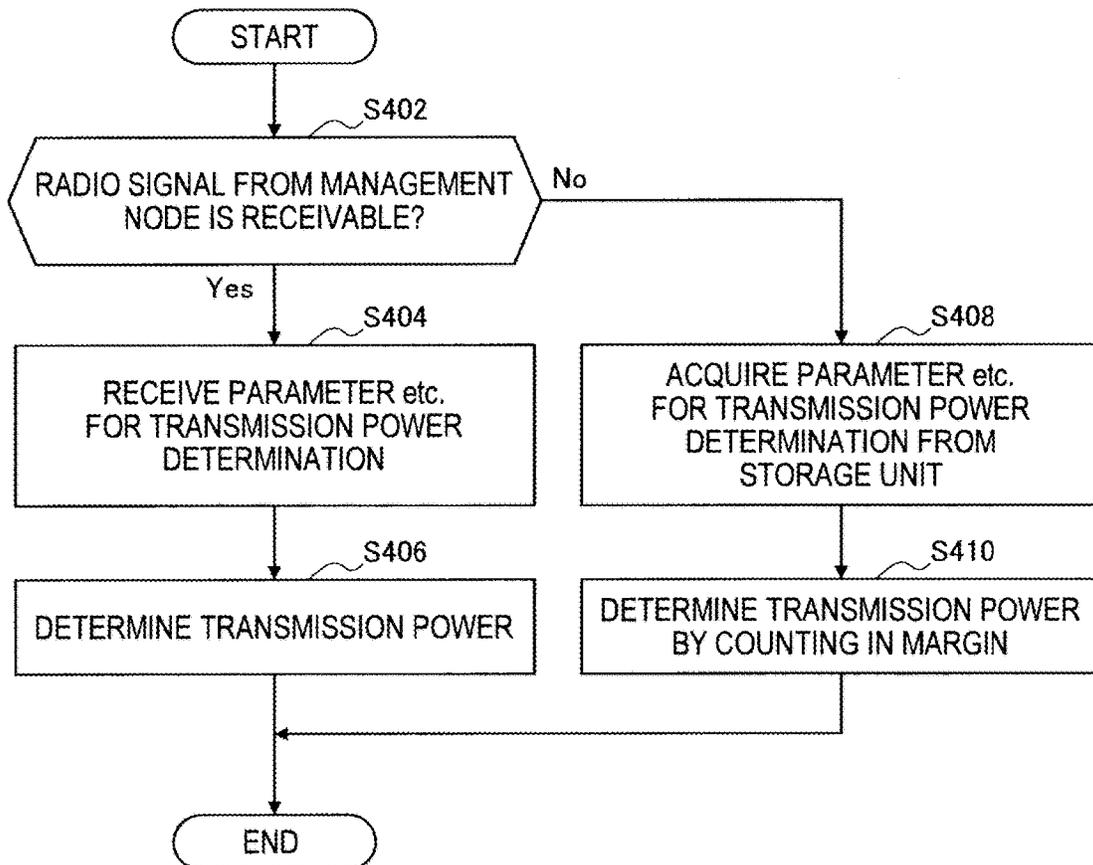


FIG. 14

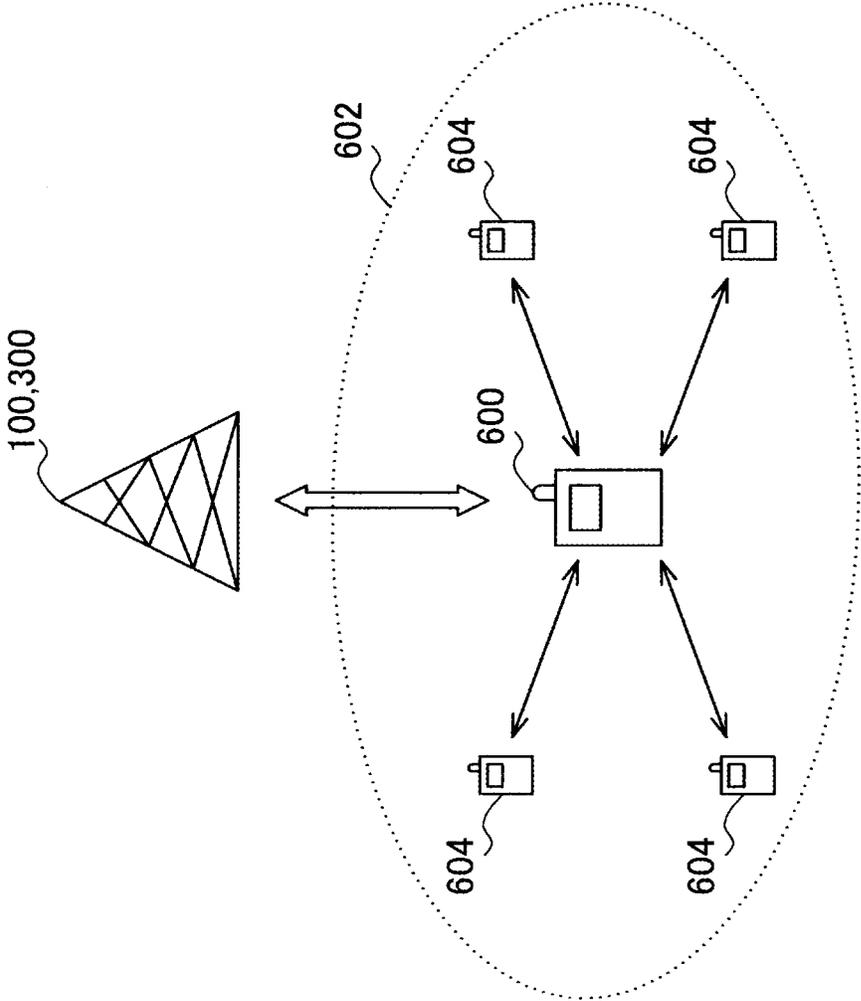


FIG.15

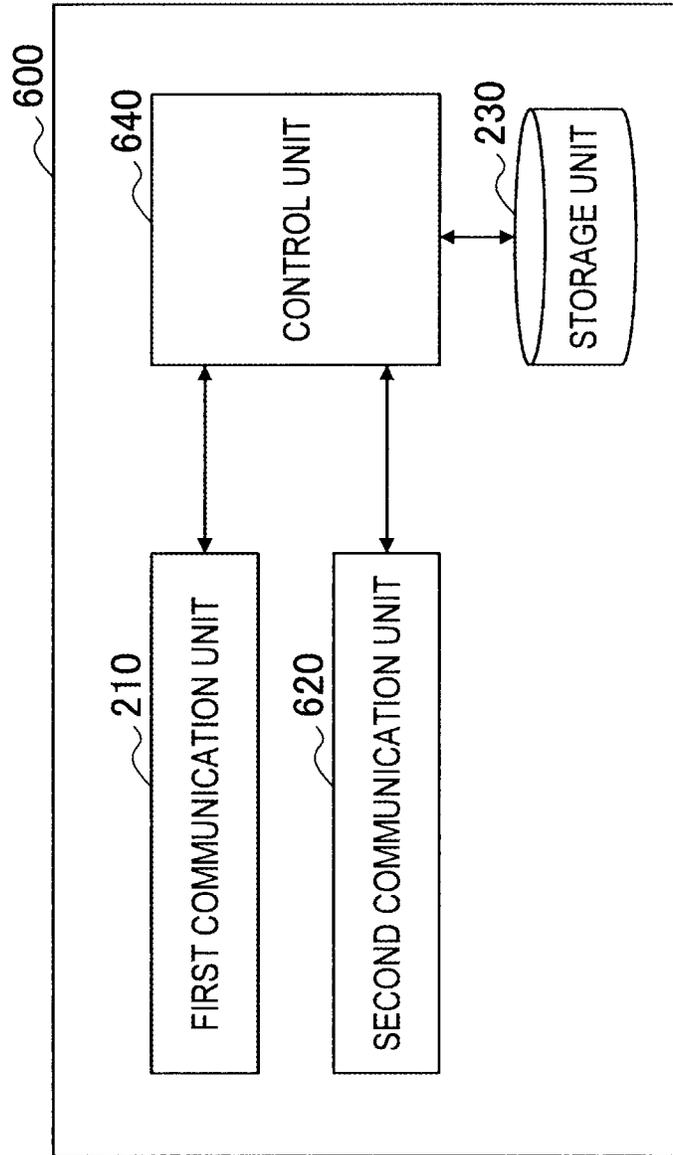


FIG.16

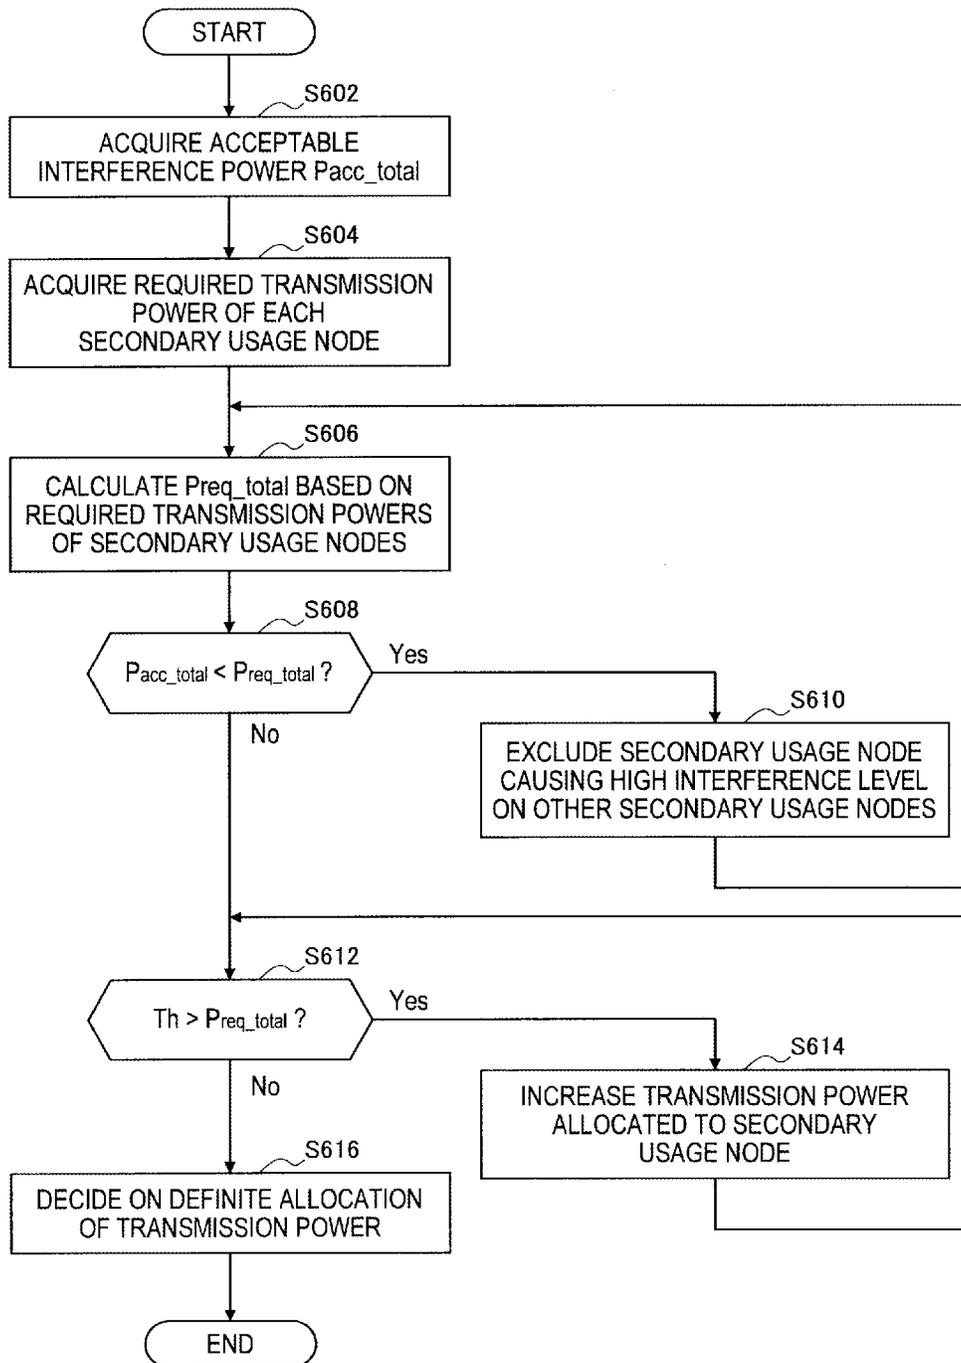


FIG.17

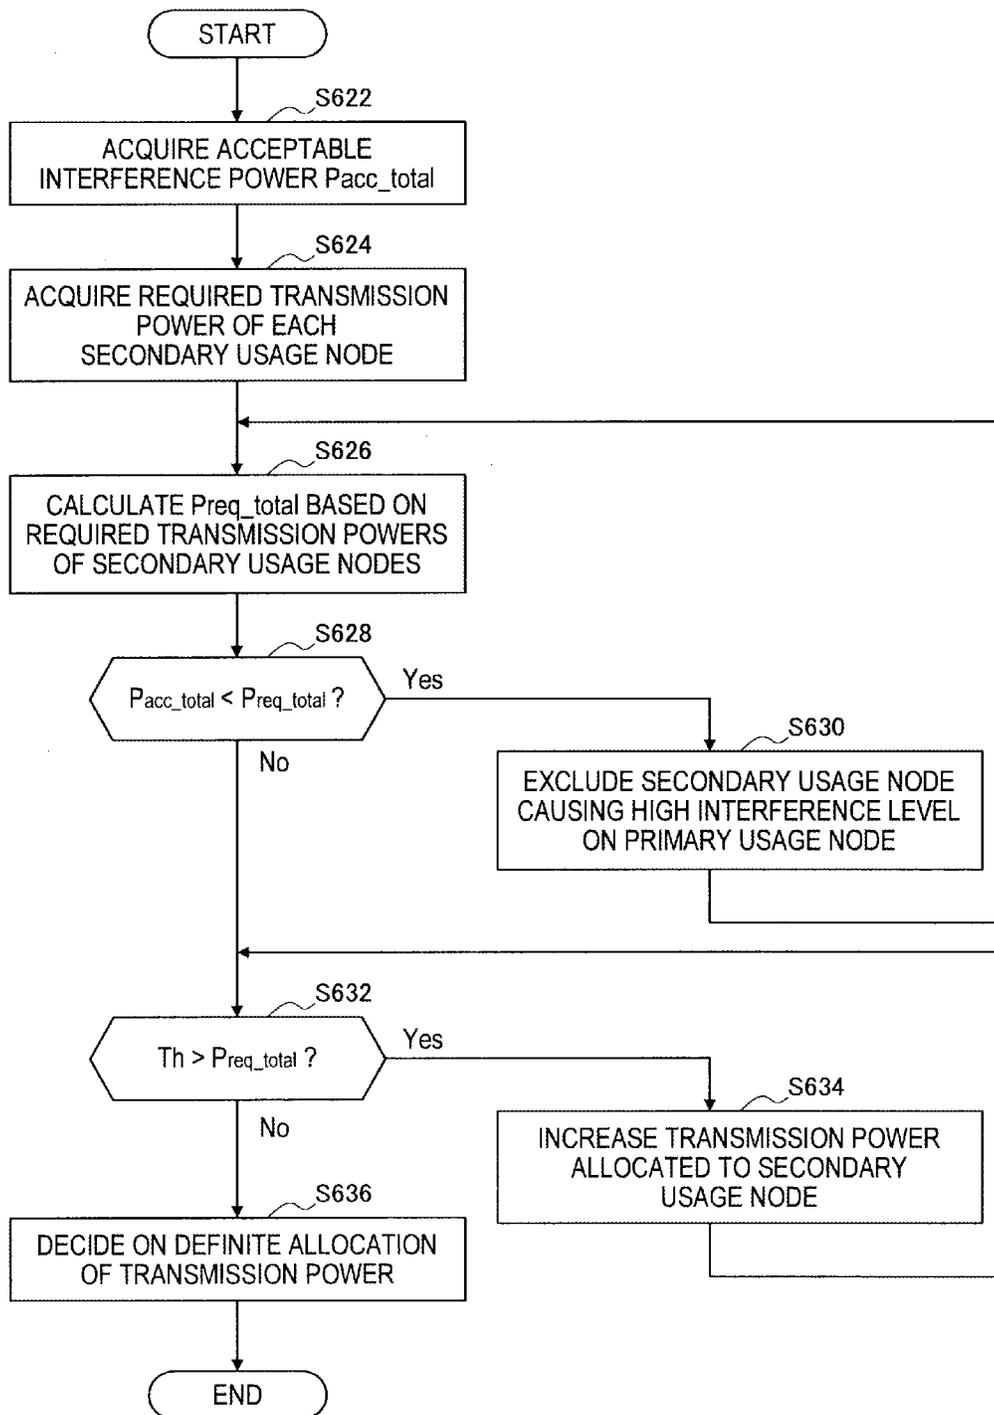


FIG.18

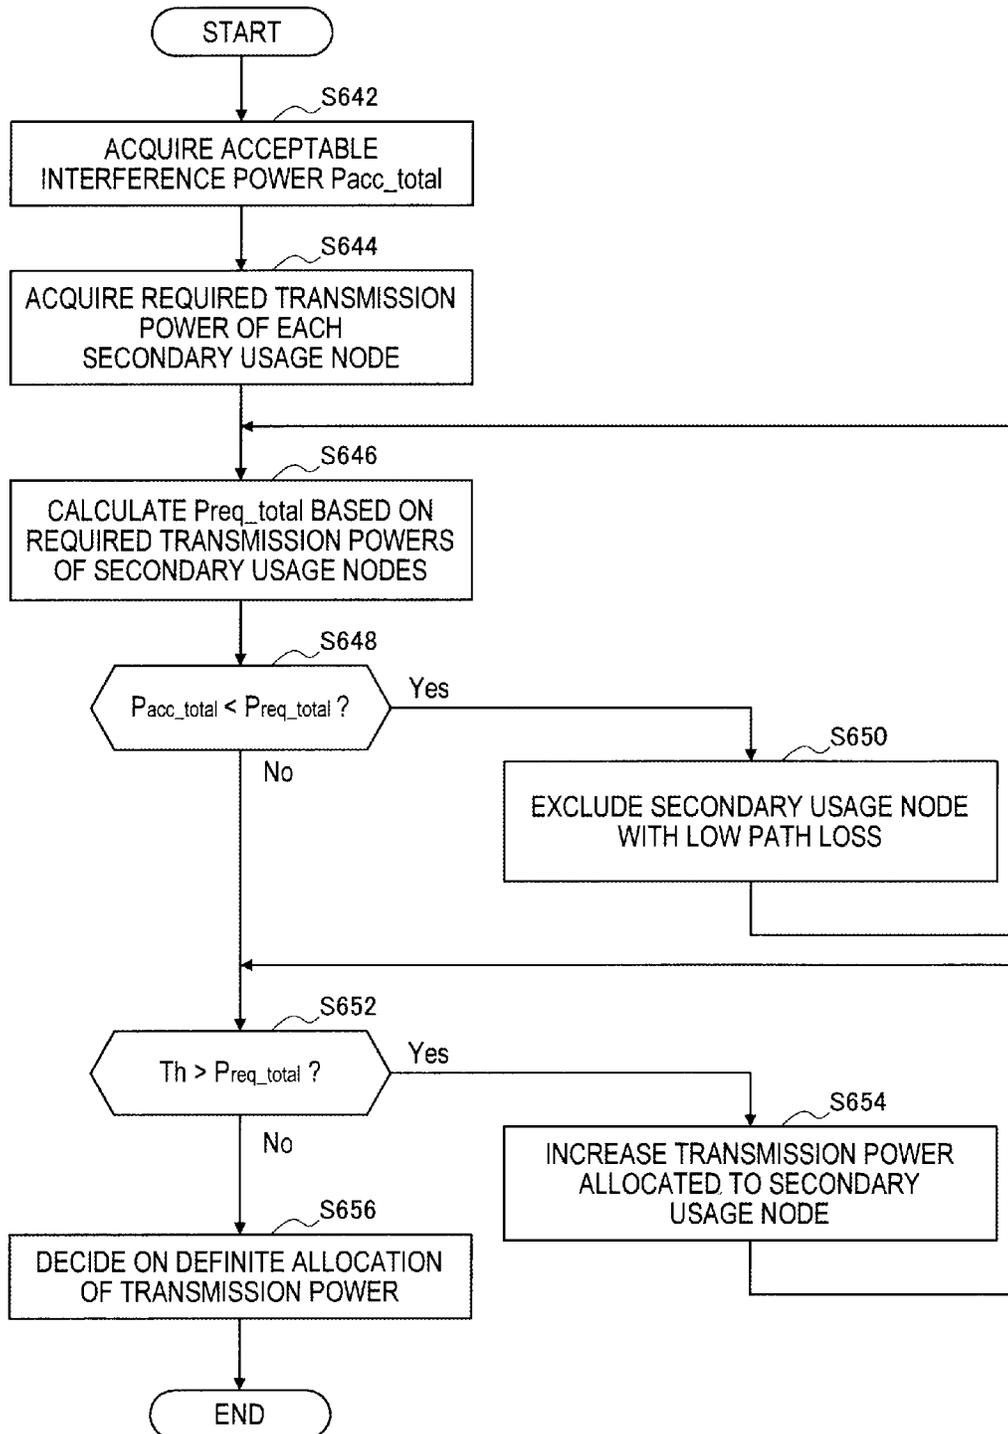


FIG.19

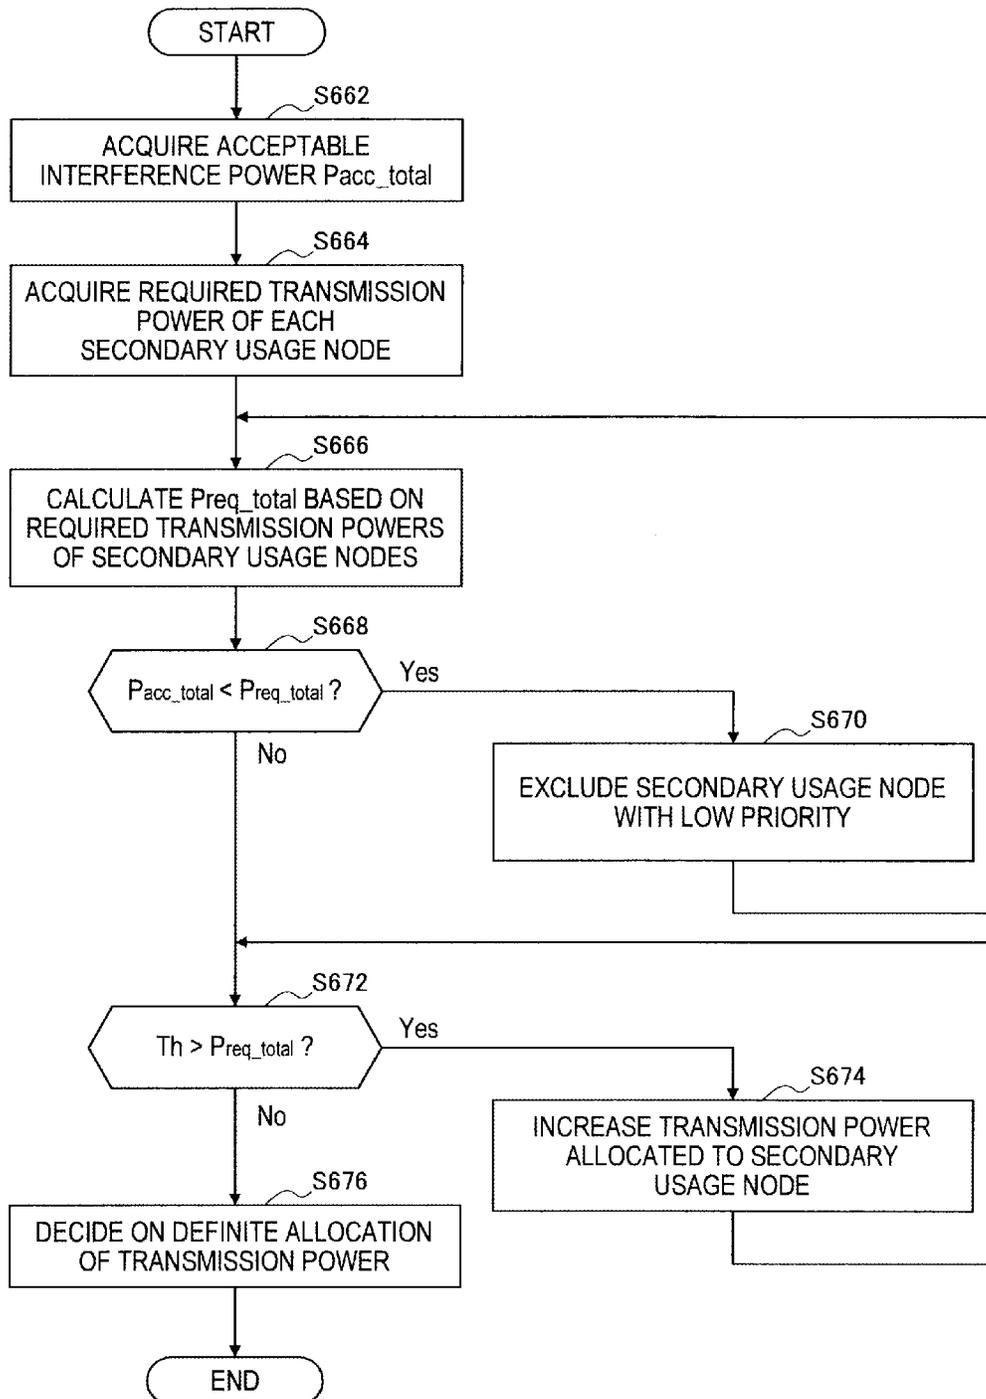


FIG.20


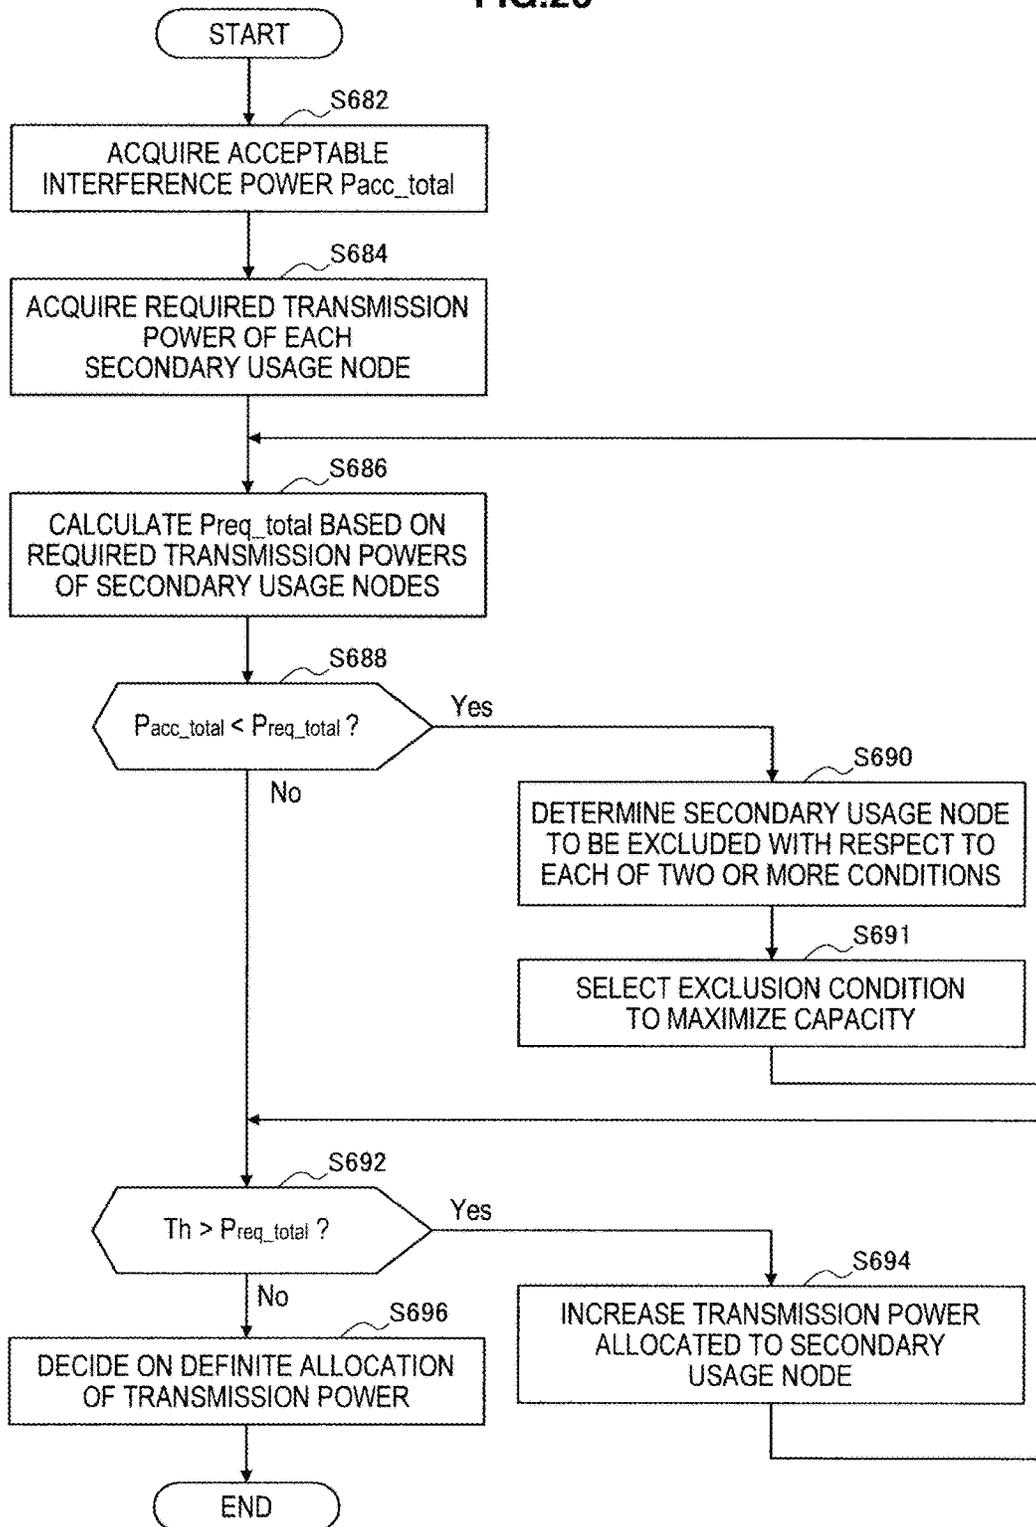


FIG. 21

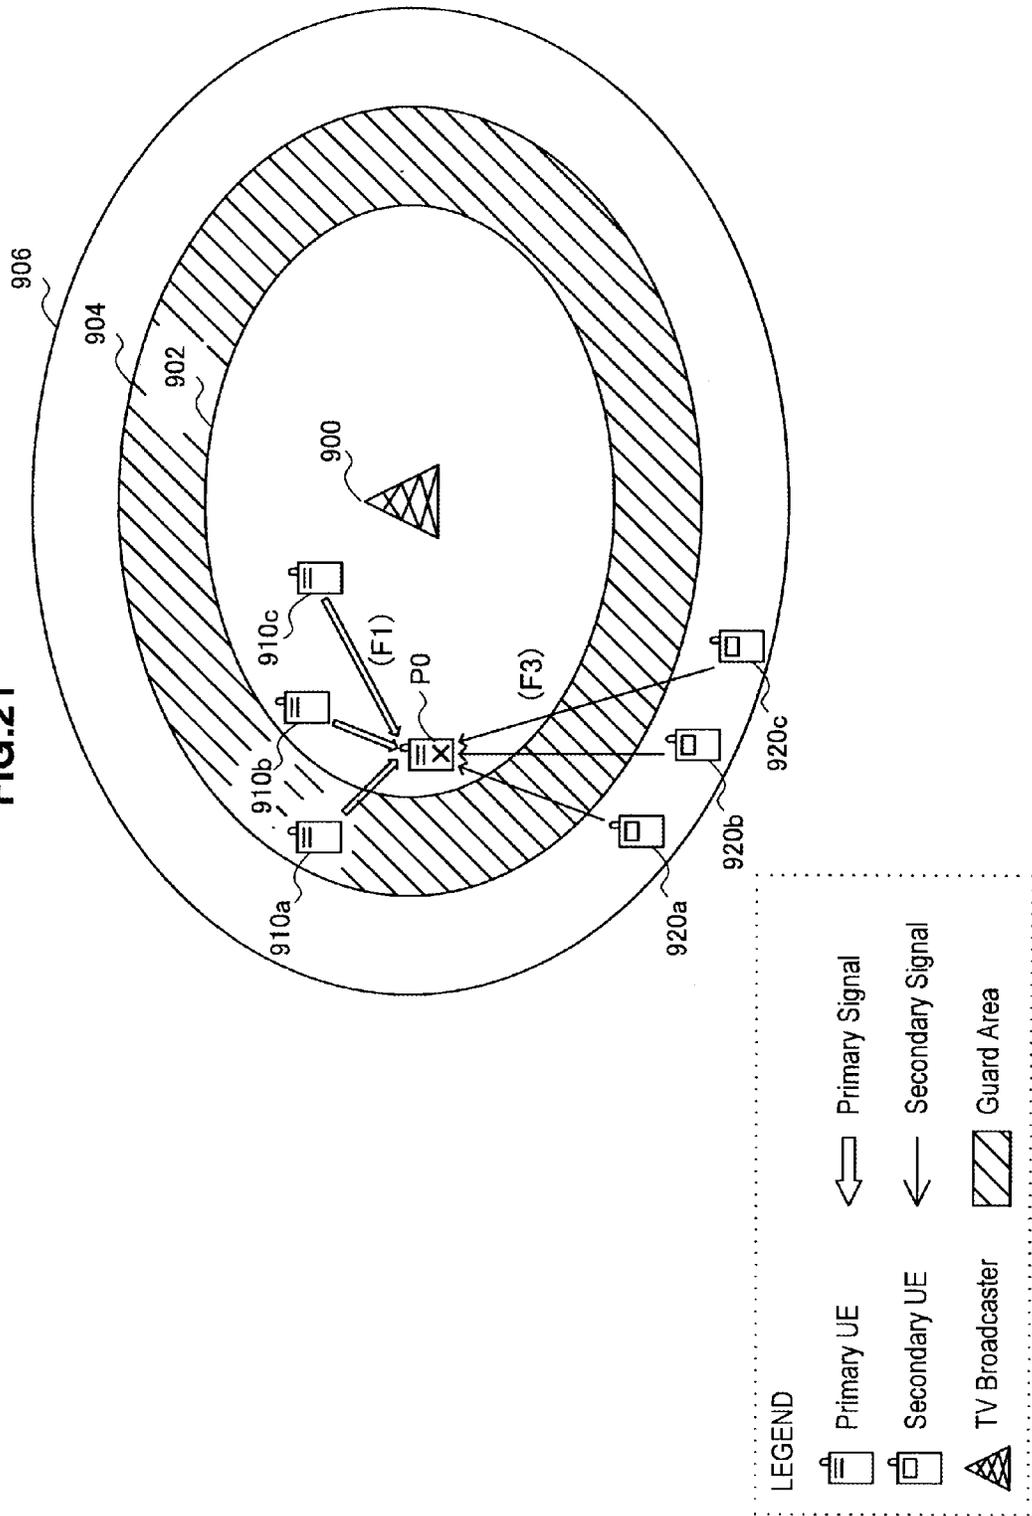

**TRANSMISSION POWER CONTROL
METHOD, COMMUNICATION DEVICE AND
PROGRAM**

RELATED APPLICATIONS

This Application claims the benefit under 35 U.S.C. § 120 and is a continuation (CON) of U.S. application Ser. No. 14/824,701, entitled "TRANSMISSION POWER CONTROL METHOD, COMMUNICATION DEVICE AND PROGRAM" filed on Aug. 12, 2015, which claims the benefit under 35 U.S.C. § 120 and is a continuation (CON) of U.S. application Ser. No. 14/049,328, entitled "TRANSMISSION POWER CONTROL METHOD, COMMUNICATION DEVICE AND PROGRAM" filed on Oct. 9, 2013, which claims the benefit under 35 U.S.C. § 120 and is a continuation (CON) of U.S. application Ser. No. 13/587,312, entitled "TRANSMISSION POWER CONTROL METHOD, COMMUNICATION DEVICE AND PROGRAM" filed on Aug. 16, 2012, which claims the benefit under 35 U.S.C. § 120 and is a continuation (CON) of U.S. application Ser. No. 12/840,831, entitled "TRANSMISSION POWER CONTROL METHOD, COMMUNICATION DEVICE AND PROGRAM" filed on Jul. 21, 2010, each of which is herein incorporated by reference in its entirety. Foreign priority benefits are claimed under 35 U.S.C. § 119(a)-(d) or 35 U.S.C. § 365(b) of Japanese application number 2009-179368, filed Jul. 31, 2009 and Japanese application number 2010-110013, filed May 12, 2010.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a transmission power control method, a communication device and a program.

Description of the Related Art

Discussions have been taking place recently regarding secondary usage of a spectrum assigned for primary usage to provide a secondary communication service depending on the use condition of the spectrum. For example, the standard specification for allowing an unused channel contained in a spectrum of the U.S. digital TV broadcast (TV white spaces) to be available for radio communication has been studied in the IEEE802.22 working group (cf. "IEEE802.22 WG on WRANs", [online], [Searched on Jan. 5, 2009], Internet <URL:<http://www.ieee802.org/22/>>).

Further, according to the report from FCC (Federal Communications Commission) on November 2008, the discussions are directed toward permitting secondary usage of TV white spaces by using a communication device that fulfills a certain condition and has received an authorization. The FCC's report accepts the above-described standard specification of IEEE802.22 which is the pioneering work on the standardization of secondary usage of TV white spaces and further covers the moves of a new study group in IEEE. Technically, because it is required to perform signal detection at the level of -114 [dBm] (SNR is about -19 [dB] when NF (Noise Figure) is 11 [dB], for example) with use of existing technology, for example, an auxiliary function such as geo-location database access is expected to be necessary (cf. "SECOND REPORT AND ORDER AND MEMORANDUM OPINION AND ORDER", [online], [Searched on Jul. 10, 2009], Internet <URL:http://hraunfoss.fcc.gov/edocs_public/attachmatch/FCC-08-260A1.pdf>).

Further, the FCC is searching for opening a 250 MHz band, which is a part of a 5 GHz band, as a new channel for secondary usage.

Furthermore, in the EU, there are moves afoot to universally allocate a dedicated control channel called CPC (Cognitive Pilot Channel) for making DSA (Dynamic Spectrum Access) under a long-term strategy. Allocation of CPC is incorporated in the agenda of ITU (International Telecommunication Union)-WP11 in 2011. Technological studies for a secondary usage system that makes DSA are also being progressed in IEEE SCC (Standards Coordinating Committee) 41.

In such a background, several research reports have been released recently concerning secondary usage of a spectrum in the case of assuming a broadcasting system, a satellite communication system, a mobile communication system or the like as a primary system. For example, Alan Bok et al., "Cognitive Radio System using IEEE802.11a over UHF TVWS", Motorola, October 2008 proposes a system architecture in the case of operating a radio system with use of the IEEE802.22 standard on TV white spaces of UHF (Ultra High Frequency). Further, D. Gueny et al., "Geo-location database technique for incumbent protection in the TV White space", DySPAN, October 2008 also intends use of TV white spaces and proposes a form that utilizes positional information of a service area of a primary system as external information.

On the occasion of secondary usage of a spectrum, it is generally necessary for a system on the part of secondary usage (secondary system) to carry out the operation that does not degrade the communication quality of a primary system. Therefore, when transmitting a radio signal in the secondary system, it is desirable to control its transmission power so as to avoid interference on a node of the primary system.

Regarding such control of a transmission power, in the case of secondary usage of TV white spaces as proposed by Alan Bok et al. or D. Gueny et al., it can be confirmed beforehand that a channel for secondary usage is not used at all, and it is thus possible to determine in many cases that a transmission power at the maximum level can be used. On the other hand, H. Fujii and H. Yoshino (NTT docomo), "Spectrum sharing by adaptive transmit power control for low priority system and its achievable capacity", Crown-Com, May 2008 proposes a technique that protects a node of a high-priority system by adaptively controlling a transmission power in a low-priority system.

Further, Inage et al., "Spectrum Sharing Based on Capacity Conservation Ratio of Primary User", IEICE Technical Report SR2009, May 2009 proposes a technique that, when a system such as a mobile communication system in which the receiving environment of a terminal varies depending on location due to fading or the like is the primary system, adopts the ratio of capacity (capacity conservation ratio) between before and after secondary usage in the primary system as a protection criterion and makes transmission power control for satisfying the capacity conservation ratio.

SUMMARY OF THE INVENTION

In order to make full effective use of a limited spectrum, it is not sufficient to achieve secondary usage of the above-described white space, which is a spectrum in an area where a communication service related to primary usage (which is referred to hereinafter as a first communication service) is not provided. One reason is that secondary usage of the white space is utilization of a spectrum that is apparently

available in the long and medium terms in a particular region, and an actual opportunity of usage is limited to an area where there are only a small number of users of the first communication service. Further, as for secondary usage of the TV white space in the United States, for example, it is predicted that part of the spectrum is auctioned and a spectrum left for secondary usage is small.

Given such a situation, one possible approach is to make secondary usage of a spectrum within a service area of the first communication service under permission of a coordinator (e.g. a base station) of the first communication service, for example. Another possible approach is to make secondary usage of a spectrum that is unavailable for the first communication service in an area inside or in the peripheral part of a service area of the first communication service where signal receiving conditions are relatively unsuitable due to shadowing (shielding), fading or the like. In such cases of secondary usage, it is expected that a node of the primary system (which is referred to hereinafter as a primary usage node) and a node of the secondary system (which is referred to hereinafter as a secondary usage node) are located closer to each other. Therefore, a mechanism of transmission power control that suppresses interference with enhanced adaptability is desirable. For example, because the technique taught by Inage et al. decreases the entire capacity of the primary system in one cell at a constant rate and allocates the amount of decrease to the secondary system, there remains a possibility it becomes difficult to receive a radio signal (primary signal) locally in one primary usage node due to interference of the secondary usage node in the nearby vicinity.

In light of the foregoing, it is desirable to provide a novel and improved transmission power control method, communication device and program that can achieve more opportunities of communication by secondary usage while suppressing interference on the primary system on the occasion of secondary usage of a spectrum.

According to an embodiment of the present invention, there is provided a method for controlling a transmission power in a second communication service making secondary usage of a spectrum assigned to a first communication service, with use of any node of one or more secondary usage node that transmits a radio signal of the second communication service, including the steps of: acquiring an acceptable interference power allocated to the second communication service; calculating a total sum of interference power levels on the first communication service based on transmission powers respectively required for the one or more secondary usage node; and excluding any secondary usage node of the one or more secondary usage node from allocation of the transmission power when the calculated total sum of interference power levels is larger than the acceptable interference power.

In this configuration, the acceptable interference power allocated to the second communication service is acquired by the secondary usage node acting as the coordinator of the second communication service, for example. Further, the total sum of interference power levels regarding respectively required power levels for one or more secondary usage node that subscribe to the second communication service is calculated. Then, when the calculated total sum of interference power levels is larger than the acceptable interference power, any secondary usage node is excluded from allocation of the transmission power.

The method may further include the step of: increasing a transmission power corresponding to any secondary usage node when the calculated total sum of interference power

levels is smaller than the acceptable interference power and a total sum of transmission powers is smaller than a given threshold depending on an interference level occurring in each secondary usage node.

The step of excluding any secondary usage node from allocation of the transmission power may exclude a secondary usage node causing a relatively high interference level on other secondary usage nodes.

The step of excluding any secondary usage node from allocation of the transmission power may exclude a secondary usage node causing a relatively high interference level on a primary usage node that receives a radio signal of the first communication service.

The step of excluding any secondary usage node from allocation of the transmission power may exclude a secondary usage node of which path loss on a communication path from a primary usage node that receives a radio signal of the first communication service is relatively low.

The step of excluding any secondary usage node from allocation of the transmission power may exclude a secondary usage node of which priority assigned in advance to each secondary usage node is relatively low.

The step of excluding any secondary usage node from allocation of the transmission power may determine a secondary usage node to be excluded according to a condition which maximizes a capacity after excluding a secondary usage node among two or more conditions selected from an interference level caused on other secondary usage nodes, an interference level caused on a primary usage node that receives a radio signal of the first communication service, a path loss on a communication path, and a priority assigned in advance to each secondary usage node.

According to another embodiment of the present invention, there is provided a communication device including: a communication unit that is able to communicate with one or more secondary usage node that subscribes to a second communication service making secondary usage of a spectrum assigned to a first communication service; and a control unit that controls a transmission power used by the secondary usage node, wherein the control unit acquires an acceptable interference power allocated to the second communication service; calculates a total sum of interference power levels on the first communication service based on transmission powers respectively required for the one or more secondary usage node; and excludes any secondary usage node of the one or more secondary usage node from allocation of the transmission power when the calculated total sum of interference power levels is larger than the acceptable interference power.

According to another embodiment of the present invention, there is provided a program causing a computer as a control unit, the computer controlling a communication device including a communication unit that is able to communicate with one or more secondary usage node that subscribes to a second communication service making secondary usage of a spectrum assigned to a first communication service, wherein the control unit controls a transmission power used by the secondary usage node and the control unit executing a process including: acquiring an acceptable interference power allocated to the second communication service; calculating a total sum of interference power levels on the first communication service based on transmission powers respectively required for the one or more secondary usage node; and excluding any secondary usage node of the one or more secondary usage node from allocation of the

transmission power when the calculated total sum of interference power levels is larger than the acceptable interference power.

According to the embodiments of the present invention described above, it is possible to provide a transmission power control method, a communication device and a program that can achieve more opportunities of communication by secondary usage while suppressing interference on the primary system on the occasion of secondary usage of a spectrum.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a diagram showing a first example in which a primary usage node receives interference by secondary usage of a spectrum.

FIG. 1B is a diagram showing a second example in which a primary usage node receives interference by secondary usage of a spectrum.

FIG. 2A is a first diagram to describe the effect of interference depending on a communication scheme and a channel direction.

FIG. 2B is a second diagram to describe the effect of interference depending on a communication scheme and a channel direction.

FIG. 2C is a third diagram to describe the effect of interference depending on a communication scheme and a channel direction.

FIG. 2D is a fourth diagram to describe the effect of interference depending on a communication scheme and a channel direction.

FIG. 3A is a first diagram to describe interference between second communication services.

FIG. 3B is a second diagram to describe interference between second communication services.

FIG. 4 is an explanatory view to describe an overview of a communication system according to a first embodiment.

FIG. 5 is a block diagram showing an example of a logical configuration of a management node according to the first embodiment.

FIG. 6 is a flowchart showing an example of a flow of a transmission power determination process according to the first embodiment.

FIG. 7 is a flowchart showing an example of a flow of a transmission power distribution process according to the first embodiment.

FIG. 8 is a block diagram showing an example of a logical configuration of a terminal device according to the first embodiment.

FIG. 9 is a flowchart showing an example of a flow of a transmission power control process in a terminal device according to the first embodiment.

FIG. 10 is an explanatory view to describe an overview of a communication system according to a second embodiment.

FIG. 11 is a block diagram showing an example of a logical configuration of a management node according to the second embodiment.

FIG. 12 is a block diagram showing an example of a logical configuration of a terminal device according to the second embodiment.

FIG. 13 is a flowchart showing an example of a flow of a transmission power determination process according to the second embodiment.

FIG. 14 is an explanatory view to describe an overview of a secondary system according to a third embodiment.

FIG. 15 is a block diagram showing an example of a logical configuration of a terminal device according to the third embodiment.

FIG. 16 is a flowchart showing a first example of a flow of a transmission power control process according to the third embodiment.

FIG. 17 is a flowchart showing a second example of a flow of a transmission power control process according to the third embodiment.

FIG. 18 is a flowchart showing a third example of a flow of a transmission power control process according to the third embodiment.

FIG. 19 is a flowchart showing a fourth example of a flow of a transmission power control process according to the third embodiment.

FIG. 20 is a flowchart showing a fifth example of a flow of a transmission power control process according to the third embodiment.

FIG. 21 is an explanatory view to describe an application to TV band.

DETAILED DESCRIPTION OF THE EMBODIMENTS

Hereinafter, preferred embodiments of the present invention will be described in detail with reference to the appended drawings. Note that, in this specification and the appended drawings, structural elements that have substantially the same function and structure are denoted with the same reference numerals, and repeated explanation of these structural elements is omitted.

Preferred embodiments of the present invention will be described hereinafter in the following order.

1. Interference Control Model according to First Embodiment

1-1. Example of Interference by Secondary Usage of Spectrum

1-2. Description of Interference Control Model

1-3. Comparison of Channels for Secondary Usage

1-4. Study on Interference between Second Communication Services

1-5. Distribution of Transmission Powers among Second Communication Services

1-6. Scope of Term "Secondary Usage"

2. First Embodiment

2-1. Overview of Communication System

2-2. Exemplary Configuration of Management Node

2-3. Exemplary Configuration of Terminal Device

2-4. Summary of First Embodiment

2-5. Alternative Example

3. Second Embodiment

3-1. Overview of Communication System

3-2. Exemplary Configuration of Management Node

3-3. Exemplary Configuration of Terminal Device

3-4. Summary of Second Embodiment

4. Third Embodiment

4-1. Overview of Secondary System

4-2. Exemplary Configuration of Terminal Device Acting as Coordinator

4-3. Example of Transmission Power Control Process

4-4. Summary of Third Embodiment

5. Application to TV Band

1. Interference Control Model According to First Embodiment

[1-1. Example of Interference by Secondary Usage of Spectrum]

Firstly, a case where a primary usage node receives interference due to secondary usage of a spectrum is described briefly with reference to FIGS. 1A and 1B. FIGS. 1A and 1B are diagrams respectively showing an example in which any primary usage node included in a primary system receives interference by secondary usage of a spectrum.

Referring to FIG. 1A, primary usage nodes Pn_1 and Pn_2 are located inside a cell **10** of a first communication service. The primary usage node Pn_1 is a base station (PBS: Primary Base Station) that provides the first communication service to a terminal device (which is also called UE: User Equipment) located inside the cell **10**. The first communication service may be a given communication service including a digital TV broadcasting service, a satellite communication service, a mobile communication service or the like. On the other hand, the primary usage node Pn_2 is a terminal device (PUE: Primary User Equipment) that is provided with the first communication service. The primary usage node Pn_1 , the primary usage node Pn_2 , and the other primary usage nodes in the FIG. 1A transmit and receive radio signals by using a spectrum assigned to the first communication service and thereby establishes a primary system.

FIG. 1A also shows a plurality of secondary usage nodes Sn_1 , Sn_2 , Sn_3 and Sn_4 located inside the cell **10**. Those secondary usage nodes operate a second communication service by using a part or whole of the spectrum assigned to the first communication service (i.e. by making secondary usage of the spectrum) in accordance with a predetermined spectrum policy and thereby establishes a secondary system. The second communication service may be a radio communication service that is implemented in conformity with an arbitrary radio communication protocol such as IEEE802.11a/b/g/n/s, Zigbee or WiMedia, for example. A plurality of secondary systems may be established in a single cell, and, in the example of FIG. 1A, different secondary systems are established in an area **12a**, an area **12b** and an area **12c** inside the cell **10**. Note that, although the primary usage node and the secondary usage node are described separately for the sake of clarity of explanation, a part of the primary usage node may operate as the secondary usage node.

When the second communication service is operated inside the cell **10** of the first communication service as shown in FIG. 1A, there is a possibility that radio signals transmitted for the second communication service interfere with the first communication service. The example of FIG. 1A shows the possibility that radio signals transmitted from the secondary usage nodes Sn_1 , Sn_2 and Sn_3 interfere with an uplink signal transmitted from the primary usage node Pn_2 to the primary usage node Pn_1 . In this case, there is a possibility that the primary usage node Pn_1 fails to normally receive the uplink signal, or, even if it receives it, fails to obtain the desired service quality.

In FIG. 1B, just like FIG. 1A, the primary usage nodes Pn_1 and Pn_2 are located inside the cell **10** of the first communication service, and the primary usage node Pn_1 serving as a base station provides the first communication service to the primary usage node Pn_2 serving as a terminal device. Further, the secondary usage nodes Sn_1 , Sn_2 , Sn_3 and Sn_4 are shown inside the cell **10** of the first communication service. The example of FIG. 1B shows the possibility that radio signals transmitted from the secondary usage nodes

Sn_1 , Sn_2 , Sn_3 and Sn_4 interfere with a downlink signal transmitted from the primary usage node Pn_1 to the primary usage node Pn_2 . In this case, there is a possibility that the primary usage node Pn_2 fails to normally receive the downlink signal, or, even if it receives it, fails to obtain the desired service quality.

One solution to prevent such interference by secondary usage of a spectrum and avoid an adverse effect such as degradation of communication quality on the first communication service is to reduce a transmission power that is used for transmission of radio signals from the secondary usage nodes. On the other hand, reduction of a transmission power leads to a decrease in the capacity of the second communication service and degradation of communication quality. Therefore, it is effective to increase a transmission power for the second communication service as much as possible within the range that does not cause interference on the first communication service. Thus, a relationship between interference on the first communication service due to secondary usage of a spectrum and a transmission power used in the secondary usage nodes is described hereinbelow. [1-2. Description of Interference Control Model]

Focusing attention on one-to-one relationship between the secondary usage node on the part of giving interference due to secondary usage and the primary usage node on the part of receiving interference (which is referred to hereinafter as an interfered node), it is necessary to satisfy the following relational expression (1) in order for the interference to be accepted in the interfered node. Note that the interfered node can correspond to the primary usage node Pn_1 in FIG. 1A or the primary usage node Pn_2 in FIG. 1B, for example.

$$SINR_{required} \leq \frac{P_{rx_primary,primary}}{P_{rx_primary,secondary} + N_{primary}} \quad \text{Expression (1)}$$

In the above expression, $SINR_{required}$ indicates the minimum SINR (Signal to Interference and Noise Ratio) that is required in the interfered node. $SINR_{required}$ may be the minimum receiving sensitivity of the interfered node, the minimum SINR given according to QoS (Quality of Service) or the like, for example. Further, $P_{rx_primary,primary}$ indicates the reception level of a radio signal that is required in the first communication service, and $P_{rx_primary,secondary}$ indicates the reception level of a radio signal that is transmitted from the secondary usage node in the interfered node. Further, $N_{primary}$ indicates the interference or noise level (including one or both of the interference level and the noise level) that can be applied to the interfered node.

Further, the reception level of a radio signal is represented by the transmission power of a radio signal and the path loss as shown in the following relational expressions (2) and (3).

$$P_{rx_primary,secondary} = P_{tx_secondary} / L_{path_tx_secondary} \quad \text{Expression (2)}$$

$$P_{rx_primary,primary} = P_{tx_primary} / L_{path_tx_primary} \quad \text{Expression (3)}$$

In the above expression, $P_{tx_secondary}$ indicates the transmission power of a radio signal in the secondary usage node, and $L_{path_tx_secondary}$ indicates the path loss on the communication path from the secondary usage node to the interfered node. Further, $P_{tx_primary}$ indicates the transmission power of a radio signal in the first communication service, and $L_{path_tx_primary}$ indicates the path loss on the communication path of a radio signal in the first communication service. Thus, the above relational expression (1) is deformed into the following expression.

$$SINR_{required} \leq \frac{P_{rx_primary,primary}}{P_{tx_secondary} / L_{path_tx_secondary} + N_{primary}} \quad \text{Expression (4)}$$

Note that the interference or noise level $N_{primary}$ included in the expression (1) and the expression (4) can be calculated by the following expression, for example, with use of the Boltzmann constant $k=1.38 \times 10^{-23}$ [J/K], the absolute temperature T [K], the noise figure NF and the bandwidth BW [Hz].

$$N_{primary} = I_{primary} + 10^{10 \log_{10}(kT) + NF + 10 \log_{10}(BW)} \quad \text{Expression (5)}$$

In the above expression, $I_{primary}$ may include inter-cell interference in the first communication service, intra-cell interference in a heterogeneous environment where a femtocell, a small cell or a relay node is overlaid by a macrocell, interference by out-of-band radiation or the like. Further, the path loss on the communication path of a radio signal typically depends on the distance d between two nodes, and it can be calculated by the following expression, for example.

$$L_{path}(d) = 10^{-\frac{-10 \cdot \log_{10} \left(\frac{\lambda}{4\pi d d_0} \right)^2 + 10n \log_{10} \left(\frac{d}{d_0} \right)} \quad \text{Expression (6)}$$

In the above expression, d_0 indicates the reference distance, λ indicates the wavelength of a carrier frequency, and n indicates the propagation constant.

The relational expression (4) is further deformed into the following expression.

$$P_{tx_secondary} \leq \quad \text{Expression (7)}$$

$$\left(\frac{P_{rx_primary,primary}}{SINR_{required}} - N_{primary} \right) \cdot L_{path_tx_secondary}$$

If the transmission power of the secondary usage node is controlled so as to satisfy the relational expression (7), the interference can be accepted in the interfered node at least concerning the one-to-one relationship between the secondary usage node and the interfered node. Further, when a plurality of secondary usage nodes exist, it is needed to satisfy the following relational expression if the total number of secondary usage nodes acting as the source of interference is n .

$$\sum_{i=1}^n \left(\frac{P_{tx_secondary,i}}{L_{path_tx_secondary,i}} \right) \leq \frac{P_{rx_primary,primary}}{SINR_{required}} - N_{primary} \quad \text{Expression (8)}$$

Consequently, on the assumption that the largest possible capacity or the highest possible communication quality should be obtained in the second communication service as well, the interference power level $I_{acceptable}$ which is acceptable for the second communication service as a whole is given by the following expression.

$$\sum_{i=1}^n \left(\frac{P_{tx_secondary,i}}{L_{path_tx_secondary,i}} \right) = \frac{P_{rx_primary,primary}}{SINR_{required}} - N_{primary} (= I_{acceptable}) \quad \text{Expression (9)}$$

Herein, since the parameters in the right-hand member of the expression (9) and the value of the path loss $L_{path_tx_secondary,i}$ are known, only the transmission power $P_{tx_secondary,i}$ depending on the interference power level $I_{acceptable}$ becomes a parameter to be determined. It may be understood that the expression (9) is an estimation formula to estimate the total sum of acceptable interference powers on the primary system due to secondary systems.

Specifically, as for a certain secondary usage node that makes secondary usage of the spectrum assigned to the first communication service, it is desirable to control transmission powers of secondary usage nodes in such a way that the transmission powers satisfy the expression (9) as a whole. [1-3. Comparison of Channels for Secondary Usage]

FIGS. 2A to 2D are diagrams to describe the effect of interference on the occasion of secondary usage, depending on a communication scheme and a channel direction used in the first communication service.

FIGS. 2A to 2D show a primary usage node Pn_1 serving as a base station and three primary usage nodes Pn_2 , Pn_3 and Pn_4 serving as PUEs. The primary usage nodes Pn_1 , Pn_2 , Pn_3 and Pn_4 establish a primary system by using OFDMA (Orthogonal Frequency Division Multiple Access) in the examples of FIGS. 2A and 2B. The primary system in this case may be WiMAX (registered trademark) system, LTE (Long Term Evolution) system, LTE-A (LTE-Advanced) system or the like, for example. Further, the primary usage nodes Pn_1 , Pn_2 , Pn_3 and Pn_4 establish a primary system by using CDMA (Code Division Multiple Access) in the examples of FIGS. 2C and 2D. The primary system in this case may be a UMTS (Universal Mobile Telecommunications System), W-CDMA (Wideband-CDMA) or the like, for example.

FIGS. 2A to 2D also show a secondary usage node Sn_1 . The secondary usage node Sn_1 transmits and receives a radio signal (secondary signal) for the second communication service to and from another secondary usage node located in an area $12a$, which can cause interference on the primary usage nodes Pn_1 , Pn_2 , Pn_3 and Pn_4 . The influential range of the interference depends on a communication scheme and a channel direction of the first communication service which is the target of secondary usage.

Referring first to FIG. 2A, when secondary usage is made on an uplink channel of the OFDMA system, interference can occur only on an uplink signal from any one PUE to the base station in the primary system. In the example of FIG. 2A, the secondary signal from the secondary usage node Sn_1 interferes with the uplink signal from the primary usage node Pn_2 to the primary usage node (base station) Pn_1 . In this case, the uplink signals from the other PUEs are not affected by the secondary signal because they are allocated in advance to different resource blocks (or different frequency slots or time slots).

Referring next to FIG. 2B, when secondary usage is made on a downlink channel of the OFDMA system, interference can occur on downlink signals from the base station to the respective PUEs in the primary system. In the example of FIG. 2B, the secondary signal from the secondary usage node Sn_1 interferes with the downlink signals from the

primary usage node (base station) Pn_1 to the primary usage nodes Pn_2, Pn_3 and Pn_4 . This is because the downlink signals (e.g. signals of a control channel) can be transmitted by using a common resource block or the like to the plurality of PUEs.

Referring then to FIG. 2C, when secondary usage is made on an uplink channel of the CDMA system, interference can occur on uplink signals from the respective PUEs to the base station in the primary system. In the example of FIG. 2C, the secondary signal from the secondary usage node Sn_1 interferes with the uplink signals from the primary usage nodes Pn_2, Pn_3 and Pn_4 to the primary usage node (base station) Pn_1 . Because the primary signals are typically spread to the entire band by using spread codes assigned to the respective PUEs and transmitted simultaneously in the CDMA system, the secondary signal can interfere with the primary signals from the plurality of PUEs.

Referring further to FIG. 2D, when secondary usage is made on a downlink channel of the CDMA system, interference can occur on downlink signals from the base station to the respective PUEs in the primary system. In the example of FIG. 2D, the secondary signal from the secondary usage node Sn_1 interferes with the downlink signals from the primary usage node (base station) Pn_1 to the primary usage nodes Pn_2, Pn_3 and Pn_4 . This is because the downlink signals (e.g. signals of a control channel) can be received in common by the plurality of PUEs and because the primary signals are spread to the entire band and transmitted simultaneously as in the uplink channel of the CDMA system.

The influential range of interference and the technical requirements in the case of using the above-described four types of channels for secondary usage are summarized in the following table 1.

TABLE 1

Table 1. Influential range of interference and technical requirements				
Communication scheme	Channel direction			
	Uplink		Downlink	
OFDMA	Interfered node	BS	Interfered node	UEs
	Interfered link	a UE -> BS	Interfered link	BS -> UEs
	Functional requirement	UL synchronization requirement	Functional requirement	DL synchronization (Control channel identification)
	Minimum receiving sensitivity	-90 dBm	Minimum receiving sensitivity	-90 dBm
CDMA	Interfered node	BS	Interfered node	UE
	Interfered link	UEs -> BS	Interfered link	BS -> UEs
	Functional requirement	Code detection	Functional requirement	Code detection
	Minimum receiving sensitivity	-120 dBm	Minimum receiving sensitivity	-120 dBm

Referring to the table 1, the influential range of interference is the smallest in the uplink channel of the OFDMA system as described above. Specifically, interfere can occur only on the link from one UE (“a UE”) to the base station when making secondary usage of an uplink channel of the OFDMA system, whereas interfere can occur on the links related to a plurality of UEs when making secondary usage of another channel. In terms of functional requirements,

detection of the spread code is necessary for sensing of the primary signal in the CDMA system, whereas only UL (uplink) or DL (downlink) synchronization is necessary in the OFDMA system, so that the CDMA system can be implemented more readily. Further, the minimum receiving sensitivity is -120 dBm (in the case of UMTS) in the CDMA system, whereas it is -90 dBm (in the case of WiMAX) in the OFDMA system, for example, and it is less subject to interference in the OFDMA system. Thus, on the occasion of secondary usage of a spectrum, it is desired to make secondary usage of the spectrum of the uplink channel, particularly, in the spectrum of the first communication service that employs the OFDMA scheme. In light of this, an embodiment which is described later in this specification is based on the assumption that secondary usage is made on the uplink channel of the OFDMA system. Note, however, that the present invention is applicable to the downlink channel of the OFDMA system or channels using a communication system other than the OFDMA system.

[1-4. Study on Interference Between Second Communication Services]

Interference which secondary usage of a spectrum causes on the first communication service is described above. Hereinafter, interference between second communication services in the case where there are a plurality of second communication services that make secondary usage of the spectrum assigned to the first communication service is described.

FIGS. 3A and 3B are diagrams to describe interference between second communication services. FIG. 3A shows an example in which second communication services are respectively operated in different adjacent cells. On the other

hand, FIG. 3B shows an example in which two second communication services are operated in the same cell.

FIG. 3A shows a primary usage node Pn_{1d} which is a base station located inside a cell $10d$ and a primary usage node Pn_{1e} which is a base station located inside a cell $10e$. Further, secondary usage nodes Sn_{1d} and Sn_{2d} and a secondary usage node Sn_{2e} are included inside the cell $10d$. Secondary usage nodes Sn_{1e} and Sn_{2e} and a secondary usage node Sn_{2d} are

included inside the cell 10e. The secondary usage nodes $Sn_{1,d}$ and $Sn_{2,d}$ operate the second communication service inside an area 12d. Further, the secondary usage nodes $Sn_{1,e}$ and $Sn_{2,e}$ operate the second communication service inside an area 12e.

When the first communication service employs the OFDMA scheme, for example, different frequencies are typically assigned as channel frequencies used between adjacent cells by interference avoidance algorithm between the adjacent cells. In the example of FIG. 3A, an uplink channel frequency of the cell 10d is F1, and an uplink channel frequency of the cell 10e is F2. Therefore, when the uplink channel of the OFDMA scheme is the target of secondary usage, the frequency used for communication between the secondary usage nodes $Sn_{1,d}$ and $Sn_{2,d}$ is F1, and the frequency used for communication between the secondary usage nodes $Sn_{1,e}$ and $Sn_{2,e}$ is F2. As a result, although the area 12d and the area 12e overlap with each other in the example of FIG. 3A, the secondary signals transmitted and received by the secondary usage nodes $Sn_{2,d}$ and $Sn_{2,e}$ that are located in the overlapping part do not interfere (or collide) with each other.

On the other hand, FIG. 3B shows a primary usage node $Pn_{1,d}$ which is a base station located inside a cell 10d. Further, secondary usage nodes $Sn_{1,d}$ and $Sn_{2,d}$ and secondary usage nodes $Sn_{1,f}$ and $Sn_{2,f}$ are included inside the cell 10d. The secondary usage nodes $Sn_{1,d}$ and $Sn_{2,d}$ operate the second communication service inside an area 12d. Further, the secondary usage nodes $Sn_{1,f}$ and $Sn_{2,f}$ operate the second communication service inside an area 12f. In this case, the frequency used for communication between the secondary usage nodes $Sn_{1,d}$ and $Sn_{2,d}$ and the frequency used for communication between the secondary usage nodes $Sn_{1,f}$ and $Sn_{2,f}$ are both F1. As a result, the secondary signals transmitted and received by the secondary usage node $Sn_{2,d}$ and the secondary usage node $Sn_{2,f}$ that are located in the part where the area 12d and the area 12f overlap with each other are likely to interfere with each other.

It is therefore understood that, when operating the second communication service by making secondary usage of the uplink channel of the OFDMA system, for example, in the spectrum assigned to the first communication service, it is desirable to give consideration to the existence of another second communication service at least in the same cell.

[1-5. Distribution of Transmission Powers Among Second Communication Services]

When the acceptable interference power of the second communication service is determined according to the above-described interference control model, if two or more second communication services exist in the same cell, it is necessary to further distribute a transmission power depending on the acceptable interference power among those second communication services. For example, in the case where a plurality of secondary usage nodes act as coordinators and start secondary usage of a spectrum, it is necessary to control their transmission powers so that the transmission powers of beacons that are transmitted from the respective coordinators satisfy the acceptable interference power as a whole. Further, the transmission power can be further distributed among the secondary usage nodes that subscribe to the second communication services. As a guideline for distributing the transmission power, three rules, i.e. equal type, unequal type and interfering margin reduction type, are proposed.

(Equal Type)

The equal type is a distribution rule that equally allocates transmission powers depending on the acceptable interfer-

ence power that is determined according to the above-described interference control model to two or more second communication services. In the equal type distribution rule, the value $P_{tx_secondary,i}$ of the transmission power which is allocated to the i-th ($i=1, \dots, n$) second communication service among n-number of second communication services is derived from the following expression.

$$P_{tx_secondary,i} = \frac{1}{K} \cdot \left(\frac{P_{rx_primary,primary}}{SINR_{required}} - N_{primary} \right) \quad \text{Expression (10)}$$

$$K = \sum_{i=1}^n \frac{1}{L_{path_tx_secondary,i}}$$

The right side of the expression (10) is dividing the right side of the expression (9) by the factor K on the basis of path loss $L_{path_tx_secondary,i}$. Such a transmission power distribution rule equally provides the opportunity of communication to the coordinators of the respective second communication services, and it is fair and clear as a service from the user's point of view. However, the interference levels on the primary usage node caused by the respective secondary usage nodes are uneven. Note that, in the case of distributing the transmission power among the secondary usage nodes that subscribe to the second communication service, the value of n used to determine the factor K may be the total number of secondary usage nodes that subscribe to the second communication service instead of the total number of second communication services.

(Unequal Type)

The unequal type is a distribution rule that unequally allocates transmission powers depending on the acceptable interference power that is determined according to the above-described interference control model to two or more second communication services. In the unequal type distribution rule, the value $P_{tx_secondary,i}$ of the transmission power depends on the distance between the secondary usage node and the interfered node and is derived from the following expression.

$$P_{tx_secondary,i} = \quad \text{Expression (11)}$$

$$\frac{1}{n} \cdot \left(\frac{P_{rx_primary,primary}}{SINR_{required}} - N_{primary} \right) \cdot L_{path_tx_secondary,i}$$

The right side of the expression (11) is assigning weights at the ratio of the path loss for each secondary usage node relative to the total sum of the path losses to the value obtained by dividing the right side of the expression (9) by the total number n of second communication services. With such a transmission power distribution rule, the secondary usage node that is more distant from the interfered node can gain larger opportunity of communication or communication distance. The entire communication range can be thereby maximized.

(Interfering Margin Reduction Type)

The interfering margin reduction type is a distribution rule that estimates the number of secondary usage nodes serving as the source of interference so as to include an extra number and thereby further reduces the possibility of causing interference on the primary usage node (i.e. provides "interference margin"). In the interfering margin reduction type distribution rule, the value $P_{tx_secondary,i}$ of the transmission power is derived from the following expression.

$$P_{tx_secondary,i} = \left(\frac{P_{tx_primary,primary}}{SINR_{required}} - N_{primary} \right) \cdot L_{path_tx_secondary,i} / N_{estimation} \quad \text{Expression (12)}$$

In the expression (12), $N_{estimation}$ indicates the estimated total number of secondary usage nodes serving as the source of interference which is estimated inclusive of an extra number. For example, the value of $N_{estimation}$ may be set so that the transmission power decreases by 10 [dB] if the total number of secondary usage nodes serving as the source of interference is 10, and the transmission power decreases by 20 [dB] if it is 100.

The features of the three transmission power distribution rules are summarized in the following table 2.

TABLE 2

Table 2. Features of transmission power distribution rules	
Equal type	Communication opportunity is equally provided to respective communication services Fair and clear as service Interference levels on primary usage node are uneven
Unequal type	Larger communication opportunity or communication distance is obtained with distance from interfered node Entire communication range can be maximized
Interfering margin reduction type	Possibility of causing interference is further reduced by setting of interference margin Transmission power can be set autonomously by secondary usage node (coordinate) Communication opportunity or communication distance decreases with the estimated total number of interference sources

It should be noted that a node that distributes a transmission power may distribute the transmission power according to one rule that is previously selected among the above-described three transmission power distribution rules. Alternatively, a node that distributes a transmission power may distribute the transmission power by adaptively selecting the rule that consequently maximizes an evaluation value such as the sum of capacities given to all secondary usage nodes (or secondary usage nodes with a high priority) or the total number of established secondary links.

[1-6. Scope of Term “Secondary Usage”]

In this specification, the term “secondary usage” typically means utilization of an additional or alternative communication service (a second communication service) using a part or whole of a spectrum assigned to a first communication service as described above. In this context about the meaning of the term “secondary usage”, the first communication service and the second communication service may be services of different types or the same type. The services of different types may be selected from services such as digital TV broadcasting service, satellite communication service, mobile communication service, wireless LAN access service, P2P (Peer To Peer) connection service and the like. On the other hand, services of the same type may contain, for example, a relationship between a service of macro-cell provided by a communication carrier and a service of femto-cell operated by users or MVNO (Mobile Virtual Network Operator). Additionally, services of the same type may contain, for example, a relationship between a service provided by a base station of a communication service according to WiMAX, LTE (Long Term Evolution), LTE-A (LTE-Advanced) or the like and a service provided by relay station (relay node) to cover a spectrum hole. Further, a

second communication service may be a service utilizing a plurality of fragmentary frequency bands aggregated using spectrum aggregation technology. Furthermore, a second communication service may be a supplementary communication service provided by femto-cells, relay stations or small or medium sized base stations for smaller service area than normal sized base stations within a service area of a normal sized base station. The subject matter of each embodiment described in this specification is applicable to every type of mode of such secondary usages.

In the foregoing, the proposed interference control model is described, and the main points of the relevant technical concerns are described sequentially. Based thereon, two embodiments of a transmission power control method for improving the capability of transmission power control on the occasion of secondary usage of a spectrum and suppressing interference on the primary system are described hereinbelow.

2. First Embodiment

[2-1. Overview of Communication System]

FIG. 4 is an explanatory view to describe an overview of a communication system according to a first embodiment of the present invention.

FIG. 4 shows a primary system 102 that operates a first communication service and secondary systems 202a and 202b that respectively operate second communication services. The primary system 102 includes a management node 100 and a plurality of primary usage nodes 104.

The management node 100 is a primary usage node that has a role to manage secondary usage of the spectrum assigned to the first communication service. Although the management node 100 is a base station in the example of FIG. 4, the management node 100 is not limited thereto. Specifically, the management node 100 may be a primary usage node different from a base station, or it may be another node (e.g. a data server etc.) that is connected to a base station by wired or wireless means. In this embodiment, the management node 100 can gain access to a database 106 that stores location data indicating the locations of primary usage nodes included in the primary system 102.

The primary usage node 104 is a node that transmits and receives radio signals for the first communication service in the primary system 102. If the primary usage node 104 joins the primary system 102, location data indicating its location is registered into the database 106.

The database 106 is typically implemented as a geo-location database. In this embodiment, in response to a request from the management node 100, the database 106 outputs location data with respect to each primary usage node to the management node 100. Note that the database 106 may be integral with the management node 100 or it may be a separate unit from the management node 100.

On the other hand, the secondary system 202a includes a terminal device 200a and a plurality of secondary usage nodes 204a. Likewise, the secondary system 202b includes a terminal device 200b and a plurality of secondary usage nodes 204b.

The terminal devices 200a and 200b are secondary usage nodes that have a role of a coordinator (SSC: secondary spectrum coordinator) that operates to start secondary usage of the spectrum assigned to the first communication service. Specifically, the terminal devices 200a and 200b determine the availability of secondary usage according to a predetermined spectrum policy, receive allocation of a transmission power from the management node 100, and start the second

communication service with the secondary usage nodes **204a** or **204b**. The terminal devices **200a** and **200b** may operate as an engine for cognitive radio (CE: Cognitive Engine), for example.

The secondary usage nodes **204a** and **204b** are nodes that respectively transmit and receive radio signals for the second communication service in the secondary systems **202a** and **202b**, respectively.

In the following description, when there is no particular need to distinguish between the terminal devices **200a** and **200b**, they are referred to collectively as the terminal device **200** by eliminating the alphabetical letter affixed to the reference numeral. The same applies to the secondary systems **202a** and **202b** (the secondary system **202**) and the secondary usage nodes **204a** and **204b** (the secondary usage node **204**).

[2-2. Exemplary Configuration of Management Node] (Description of Functional Blocks)

FIG. 5 is a block diagram showing an example of a logical configuration of the management node **100** shown in FIG. 4. Referring to FIG. 5, the management node **100** includes a communication unit **110**, a database input/output unit **120**, a storage unit **130** and a control unit **140**.

The communication unit **110** transmits and receives radio signals to and from the primary usage nodes **104** by using a communication interface that can include an antenna, an RF circuit, a baseband circuit or the like in accordance with a given communication scheme of the first communication service. Further, the communication unit **110** receives location data of the terminal device **200** from the terminal device **200** and outputs the received location data to the control unit **140** as described in further detail later.

The database input/output unit **120** mediates the access from the control unit **140** to the database **106**. Specifically, in response to a request from the control unit **140**, the database input/output unit **120** acquires location data indicating the location of the primary usage node **104** from the database **106**, and outputs the acquired location data to the control unit **140**. Further, if the database input/output unit **120** receives location data from the primary usage node **104** that newly joins the primary system **102** through the communication unit **110**, it registers the location data into the database **106**. Further, the database input/output unit **120** may acquire the location data stored in the database **106** in response to an inquiry from an external device and output the acquired location data.

The storage unit **130** stores programs and data to be used for the operation of each unit of the management node **100** by using a recording medium such as hard disk or semiconductor memory, for example. Further, in this embodiment, the storage unit **130** stores various parameters necessary for calculation of the transmission power according to the above-described interference control model. The parameters stored in the storage unit **130** may include a parameter related to the quality of radio signals required in the first communication service (e.g. a required radio signal reception level and a signal to interference and noise ratio) and a parameter related to the interference or noise level in the first communication service. Note that the values of those parameters may be updated dynamically. For example, the value of the required quality of radio signals can be updated dynamically according to the type of an application to be provided to the primary usage node. Further, for example, the value of the interference or noise level can be updated dynamically by sensing through the communication unit **110**.

The control unit **140** controls the overall functions of the management node **100** by using a control device such as a

CPU (Central Processing Unit), for example. Further, in this embodiment, when the terminal device **200** makes secondary usage of the spectrum assigned to the first communication service, the control unit **140** determines the acceptable transmission power for the second communication service according to the above-described interference control model. A transmission power determination process that is performed by the control unit **140** is described in further detail later. Further, when there are two or more second communication services, the control unit **140** distributes the determined transmission power to the two or more second communication services. A transmission power distribution process that is performed by the control unit **140** is described in further detail later. The control unit **140** then notifies the determined or distributed transmission power value to each terminal device **200** through the communication unit **110**. (Flow of Transmission Power Determination Process)

FIG. 6 is a flowchart showing an example of a flow of a transmission power determination process that determines the acceptable transmission power for the second communication service by the control unit **140** of the management node **100**.

Referring to FIG. 6, the control unit **140** first receives location data of the terminal device **200** from the terminal device **200** through the communication unit **110** (step S102). In this specification, the location data may include values of latitude and longitude measured by using the GPS functions or coordinate values with a point of origin at a given control point measured by applying the direction of arrival estimation algorithm or the like, for example. Further, the control unit **140** may receive not only location data of the terminal device **200** but also location data of each secondary usage node **204** from the terminal device **200**.

Next, the control unit **140** acquires location data of the primary usage node from the database **106** through the database input/output unit **120**. Further, the control unit **140** acquires necessary parameters from the storage unit **130** (step S104). Note that, in the case where secondary usage is made on the uplink channel of the OFDMA system as in the example shown in FIG. 2A, the interfered node is the base station only. In such a case, the control unit **140** acquires only the location data of the management node **100**, which is the base station, as the location data of the primary usage node. Further, the necessary parameters in the step S104 correspond to the quality of radio signals required in the first communication service, the interference or noise level in the first communication service (or a parameter for calculating those levels) or the like, for example.

Then, the control unit **140** determines the acceptable interference power of the second communication service based on the location data and the parameters that are received in the step S102 and acquired in the step S104, respectively (step S106). Specifically, the control unit **140** can determine the acceptable interference power of the second communication service according to the expression (9) in the above-described interference control model, for example. For example, the quality of radio signals required in the first communication service corresponds to the term $P_{rx_primary,primary}/SINR_{required}$ in the expression (9). Further, the interference or noise level corresponds to the term $N_{primary}$ in the expression (9). Further, the value of the path loss $L_{path_tx_secondary,i}$ in the expression (9) can be calculated according to the expression (6) by using the distance d that is derived from the location data of the primary usage node and the location data of each terminal device **200**. Note that the control unit **140** may receive the value of each path loss $L_{path_tx_secondary,i}$ from the respective terminal devices **200**

in the step S102 instead of calculating the value of each path loss $L_{path_tx_secondary,i}$ from the location data, for example. The value of the path loss $L_{path_tx_secondary,i}$ can be calculated as a difference between the transmission power value of a downlink signal from the base station and the reception level of the downlink signal in each terminal device **200**.

Then, the control unit **140** determines whether it is necessary to distribute the value of the transmission power (step S108). For example, in the case where secondary usage is made by two or more terminal devices **200** as illustrated in FIG. 4, the control unit **140** determines that it is necessary to distribute the value of the transmission power among the two or more terminal devices **200**. In this case, the process proceeds to the step S110 and the control unit **140** performs a transmission power distribution process (step S110). On the other hand, in the case where there is only one terminal device **200** that makes secondary usage and it is not necessary to distribute the value of the transmission power, the step S110 can be skipped.

After that, the control unit **140** notifies the value of the determined or distributed transmission power to each terminal device **200** through the communication unit **110** (step S112). Note that the control unit **140** may notify additional information such as a policy (e.g. a transmission spectrum mask, a modulation method etc.) to be complied with by the secondary usage node when making secondary usage of a spectrum, in addition to the value of the transmission power, to each terminal device **200**. After that, the second communication service can be started between the terminal device **200** and each secondary usage node **204**.

(Flow of Transmission Power Distribution Process)

FIG. 7 is a flowchart showing an example of a flow of a transmission power distribution process by the control unit **140** of the management node **100** in the case where two or more terminal devices **200** exist, namely, where two or more second communication services are operated in the same cell.

Referring to FIG. 7, the control unit **140** first distributes the transmission power depending on the acceptable interference power that is determined in the step S106 of FIG. 6 according to the first rule (step S202). Next, the control unit **140** distributes the transmission power depending on the acceptable interference power same as in the step S202 according to the second rule (step S204). The first rule and the second rule may be the above-described equal type transmission power distribution rule and the unequal type transmission power distribution rule, respectively, for example.

Then, the control unit **140** evaluates the transmission power distributed according to the first rule and the transmission power distributed according to the second rule by predetermined evaluation criteria (step S206). The predetermined evaluation criteria may be the total capacity that is provided to all terminal devices **200** in the end, for example. In this case, the total capacity C can be evaluated according to the following expression.

$$C = \sum_{i=1}^n C_i = \sum_{i=1}^n \left(\log_2 \left(1 + \frac{P_{tx_secondary,i}}{N_i} \right) \right) \quad \text{Expression (13)}$$

In the above expression, $P_{tx_secondary,i}$ indicates the transmission power distributed to the i -th terminal device **200**, and N_i indicates the noise level of the i -th terminal device **200**.

Further, in the expression (13), the control unit **140** may count only the terminal devices **200** with a high priority, out of the n -number of terminal devices **200**, for calculating the total capacity. The priority can be assigned depending on the type, contents or the like of the second communication service, for example. For example, a high priority can be assigned to the service for which small delay is needed, such as motion picture delivery or network game, for example. Further, a high priority can be assigned to the service to which high service charge is set so as to ensure a certain service quality. Then, the priority can be received together with the location data of the terminal device **200** in the step S102 of FIG. 6, for example.

Further, the control unit **140** may evaluate the total number of links of the second communication services that can be established by using the distributed transmission powers in the step S206 instead of evaluating the capacity as in the expression (13). In this case, the control unit **140** first determines whether each pair of secondary usage nodes which desire for communication can establish communication according to the transmission powers distributed to the respective terminal devices **200**. Then, the number of links determined that communication can be established is counted as the total number of links of the second communication services.

Then, the control unit **140** determines which of the first rule and the second rule is more appropriate by comparing the capacity or the total number of links evaluated in the step S206 (step S208). For example, when the transmission powers distributed according to the first rule can achieve the larger capacity than the transmission powers distributed according to the second rule, the control unit **140** can determine that the first rule is more appropriate. Further, when the transmission powers distributed according to the second rule can achieve the larger capacity than the transmission powers distributed according to the first rule, the control unit **140** can determine that the second rule is more appropriate. When it is determined that the first rule is more appropriate, the process proceeds to the step S210. On the other hand, when it is determined that the second rule is more appropriate, the process proceeds to the step S212.

In the step S210, the transmission powers distributed according to the first rule that is determined to be more appropriate are allocated to the respective terminal devices **200** (step S210). On the other hand, in the step S212, the transmission powers distributed according to the second rule that is determined to be more appropriate are allocated to the respective terminal devices **200** (step S212). After that, the transmission power distribution process shown in FIG. 7 ends.

Note that the case where the first rule and the second rule that can respectively correspond to the equal type and the unequal type are evaluated in terms of the capacity or the number of links that can be established is particularly described above. However, it is not limited thereto, and the transmission power distribution rules other than the equal type and the unequal type may be adopted. Further, three or more transmission power distribution rules may be evaluated.

[2-3. Exemplary Configuration of Terminal Device]
(Description of Functional Blocks)

FIG. 8 is a block diagram showing an example of a logical configuration of the terminal device **200** shown in FIG. 4. Referring to FIG. 8, the terminal device **200** includes a first communication unit **210**, a second communication unit **220**, a storage unit **230** and a control unit **240**. In this embodiment, the terminal device **200** can communicate with the

21

management node **100** through the first communication unit **210** and also transmit and receive radio signals for the second communication service through the second communication unit **220**.

The first communication unit **210** communicates with the management node **100** in accordance with a given communication scheme. A channel used for communication between the first communication unit **210** and the management node **100** may be a cognitive pilot channel (CPC), which is a control channel, for example. The CPC may include an inbound CPC in which CPC information is extrapolated in an existing communication system (e.g. the primary system **102**) or an outbound CPC which is a dedicated channel in which CPC information is interpolated, for example.

For example, the first communication unit **210** transmits location data indicating the location of its own device to the management node **100** in response to an instruction (an instruction operation by a user or a request from another node) for start of secondary usage of a spectrum or the like. After that, the first communication unit **210** receives the value of the acceptable transmission power which is determined according to the above-described technique from the management node **100** and outputs it to the control unit **240**.

The second communication unit **220** transmits and receives radio signals to and from the secondary usage node **204** in accordance with a given communication scheme. For example, when the terminal device **200** operates as the coordinator of the second communication service, the second communication unit **220** first performs sensing of radio signals of the first communication service and achieves synchronization of the uplink channel. Then, the second communication unit **220** transmits a beacon to the secondary usage nodes **204** in the nearby vicinity on a regular basis by using the synchronized uplink channel. The transmission power used by the second communication unit **220** is limited to the range that does not cause substantial interference on the primary usage node under control of the control unit **240**.

Note that, when the communication link between the first communication unit **210** and the management node **100** is a radio link, the first communication unit **210** and the second communication unit **220** may share the physically identical communication interface that can include an antenna, an RF circuit, a baseband circuit or the like. The communication link between the first communication unit **210** and the management node **100** is called a backhaul link in some cases.

The storage unit **230** stores programs and data to be used for the operation of each unit of the terminal device **200** by using a recording medium such as hard disk or semiconductor memory, for example. Further, in this embodiment, the storage unit **230** stores various parameters for operation of the second communication service and control of the transmission power. The parameters stored in the storage unit **230** may include the location data of its own device (and other secondary usage nodes that subscribe to the second communication service according to need), the acceptable transmission power notified from the management node **100**, a spectrum mask, a modulation method or the like, for example.

The control unit **240** controls the overall functions of the terminal device **200** by using a control device such as a CPU, for example. For example, in this embodiment, the terminal device **240** controls the value of the transmission power used for transmission of radio signals by the second communication unit **220** within the range of the acceptable transmission power notified from the management node **100**.

22

(Flow of Transmission Power Control Process)

FIG. **9** is a flowchart showing an example of a flow of a transmission power control process by the terminal device **200**.

Referring to FIG. **9**, upon detection of an instruction for start of secondary usage, for example, the first communication unit **210** transmits the location data of the terminal device **200** to the management node **100** (step **S302**). In this step, not only the location data of the terminal device **200** but also the location data of other secondary usage nodes **204** may be transmitted to the management node **100**.

Next, the first communication unit **210** receives the value of the acceptable transmission power which is determined according to the above-described interference control model from the management node **100** (step **S304**). In this step, additional information such as a transmission spectrum mask or a modulation method can be received in addition to the acceptable transmission power, for example.

Then, the control unit **240** starts the second communication service by controlling the transmission power used by the second communication unit **220** so as to be within the range of the acceptable transmission power that is received in the step **304** (step **S306**). Note that, when starting the second communication service, the control unit **240** may make a beacon transmitted from the terminal device **200** to the nearby secondary usage nodes include the value of the acceptable transmission power allocated to the second communication service. The other secondary usage nodes that subscribe to the second communication service can thereby also adjust their transmission powers so as not to cause substantial interference on the primary usage node.

[2-4. Summary of First Embodiment]

The first embodiment of the present invention is described above with reference to FIGS. **4** to **9**. In this embodiment, transmission powers allocated to the second communication service that makes secondary usage of the spectrum assigned to the first communication service is determined by the management node **100**, which is the primary usage node that can access to the database **106**, depending on the acceptable interference power determined according to the above-described interference control model. Then, the determined transmission powers are notified from the management node **100** to terminal devices **200**, which are the secondary usage nodes acting as the coordinator of the second communication services. The terminal devices **200** can thereby make adaptive control of the transmission power to be used for a second communication service so that interference on the primary system **102** is within the acceptable level.

Further, according to the above-described interference control model, a transmission power is determined so that interference on the interfered node is within the acceptable level based on the quality of radio signals required in the first communication service, the interference or noise level in the first communication service, and the path loss on the communication path about one or more secondary usage nodes. It is thereby possible to eliminate (or at least reduce) the possibility that it becomes difficult to receive a primary signal locally in a certain primary usage node.

Further, the path loss on the communication path mentioned above can be calculated dynamically based on the location of the primary usage node and the location of the secondary usage node. Therefore, even when the location of the terminal device **200** changes, it is possible to determine the transmission power in an adaptive manner so that interference on the interfered node is within the acceptable level.

Further, according to the embodiment, in the case where two or more second communication services are operated, the transmission power depending on the acceptable interference power determined according to the above-described interference control model is distributed among the respective second communication services according to the more appropriate rule between the first rule and the second rule. The first rule and the second rule may be the equal type distribution rule and the unequal type distribution rule described above, for example. The equal type distribution rule can distribute the opportunity of communication (the capacity, the number of communication links etc.) in a fair and clear manner from the user's point of view. Further, the unequal type distribution rule can distribute the transmission power so as to maximize the communication range as a whole because a higher transmission power is allocated to the secondary usage node that is more distant from the interfered node.

Furthermore, the more appropriate rule between the first rule and the second rule may be the rule with which the total capacity that is achieved in the end by using the allocated transmission powers is larger, for example. In this case, it is possible to maximize the capacity that is effectively utilized by secondary usage of a spectrum.

Further, the more appropriate rule between the first rule and the second rule may be the rule with which the total capacity related to the second communication services with a high priority is larger in the capacity that is achieved in the end by using the allocated transmission powers, for example. In this case, it is possible to selectively increase the capacity by secondary usage of a spectrum so as to particularly satisfy the requirements of each application, the QoS requirements agreed by a user or the like.

Further, the more appropriate rule between the first rule and the second rule may be the rule with which the number of links that can be established in the end by using the allocated transmission powers is larger, for example. In this case, it is possible to maximize the number of users who can gain the opportunity of communication by secondary usage of a spectrum.

Note that, in this embodiment, the case where the transmission power used in the second communication service is controlled at the start of the second communication service is described. However, the processes shown in FIGS. 6, 7, and 9 may be executed after the start of the second communication service, e.g. when the secondary usage node is moved or when the number of secondary usage nodes is changed, for example.

Further, the case where secondary usage is made on the uplink channel of the first communication service, i.e. when only the base station of the first communication service is taken into consideration as an interfered node is described in this embodiment. However, the present invention is applicable to the case where a plurality of interfered nodes exist as a matter of course.

3. Second Embodiment

In the first embodiment of the present invention, transmission powers allocated to the second communication service is determined by the primary usage node (management node) which is accessible to the database that stores the location data of the primary usage node. This is a passive technique from the viewpoint of the terminal device (UE) that makes secondary usage. On the other hand, the terminal device that makes secondary usage may acquire necessary parameters and determine the acceptable transmission

power for the second communication service in an active manner. In this section, a case where the terminal device that makes secondary usage actively determines the acceptable transmission power is described as a second embodiment of the present invention.

[3-1. Overview of Communication System]

FIG. 10 is an explanatory view to describe an overview of a communication system according to the second embodiment of the present invention.

FIG. 10 shows a primary system 302 that operates a first communication service and secondary systems 402a and 402b that respectively operate second communication services. The primary system 302 includes a management node 300 and a plurality of primary usage nodes 104.

The management node 300 is a primary usage node that has a role to manage secondary usage of the spectrum assigned to the first communication service. Although the management node 300 is a base station in the example of FIG. 10, the management node 300 is not limited thereto. In this embodiment, the management node 300 can gain access to a database 106 that stores location data indicating the locations of primary usage nodes that are included in the primary system 302.

On the other hand, the secondary system 402a includes a terminal device 400a and a plurality of secondary usage nodes 204a. Likewise, the secondary system 402b includes a terminal device 400b and a plurality of secondary usage nodes 204b.

The terminal devices 400 (400a and 400b) are secondary usage nodes that have a role of a coordinator (SSC) that operates to start secondary usage of the spectrum assigned to the first communication service. Specifically, the terminal devices 400 determine the availability of secondary usage according to a predetermined spectrum policy, determines the acceptable transmission power by acquiring necessary parameters from the management node 300, and then starts the second communication services with the secondary usage nodes 204. The terminal devices 400 may operate as an engine for cognitive radio (CR), for example.

[3-2. Exemplary Configuration of Management Node]

FIG. 11 is a block diagram showing an example of a logical configuration of the management node 300 shown in FIG. 10. Referring to FIG. 11, the management node 300 includes a communication unit 310, a database input/output unit 120, a storage unit 130 and a control unit 340.

The communication unit 310 transmits and receives radio signals to and from the primary usage nodes 104 by using a communication interface that can include an antenna, an RF circuit, a baseband circuit or the like in accordance with a given communication scheme of the first communication service. Further, the communication unit 310 transmits the location data of the primary usage nodes 104 stored in the database 106 and parameters to be used for determination of a transmission power stored in the database 106 or the storage unit 130 to the terminal device 400.

The control unit 340 controls the overall functions of the management node 300 by using a control device such as a CPU, for example. Further, in this embodiment, the control unit 340 transmits the above-described location data and parameters to be used when the terminal device 400 determines the acceptable transmission power according to the above-described interference control model to the terminal device 400 through the communication unit 310 (or another backhaul link). The location data and parameters may be transmitted on a regular basis by using a predetermined channel such as CPC, for example. Alternatively, the loca-

tion data and parameters may be transmitted in response to a transmission request from the terminal device 400, for example.

[3-3. Exemplary Configuration of Terminal Device]
(Description of Functional Blocks)

FIG. 12 is a block diagram showing an example of a logical configuration of the terminal device 400 shown in FIG. 10. Referring to FIG. 12, the terminal device 400 includes a first communication unit 410, a second communication unit 220, a storage unit 430 and a control unit 440.

The first communication unit 410 receives radio signals containing the data and parameters transmitted from the management node 300 in accordance with a given communication scheme. A channel used for communication between the first communication unit 410 and the management node 300 may be the above-described CPC, which is a control channel, for example.

Specifically, the first communication unit 410 attempts to receive the data and parameters to be used for determination of a transmission power from the management node 300 in response to an instruction for start of secondary usage of a spectrum or the like, for example. The data and parameters to be used for determination of a transmission power include the location data of an interfered node, the quality of radio signals required in the first communication service, the interference or noise level in the first communication service or the like, for example. Further, the data to be used for determination of a transmission power may include location data indicating the locations of other secondary usage nodes. If the first communication unit 410 receives the data and parameters from the management node 300, it outputs the received data and parameters to the control unit 440. If, on the other hand, the first communication unit 410 fails to receive the necessary data and parameters for some reasons such as unsuitable signal reception environment, it provides notification to the control unit 440.

The storage unit 430 stores programs and data to be used for the operation of each unit of the terminal device 400 by using a recording medium such as hard disk or semiconductor memory, for example. Further, in this embodiment, the storage unit 430 stores various parameters for determination of a transmission power for the second communication service and control of the transmission power. The parameters stored in the storage unit 430 may include the location data of its own device (and other secondary usage nodes that subscribe to the second communication service according to need), the parameters received from the management node 300 through the first communication unit 410 or the like, for example.

The control unit 440 controls the overall functions of the terminal device 400 by using a control device such as a CPU, for example. For example, in this embodiment, when making secondary usage of the spectrum assigned to the first communication service, the control unit 440 determines the acceptable transmission power for the second communication service depending on the determined acceptable interference power according to the above-described interference control model. If the control unit 440 fails to receive radio signals from the management node 300 and is thus unable to acquire the latest location data of the primary usage node and necessary parameters, it determines the acceptable transmission power by counting in the margin for reducing the possibility that causes interference on the primary usage node. The transmission power determination process is described in detail later. Then, the control unit 440 controls the value of the transmission power to be used for trans-

mission of radio signals by the second communication unit 220 to fall within the range of the determined acceptable transmission power.

(Flow of Transmission Power Determination Process)

FIG. 13 is a flowchart showing an example of a flow of a transmission power determination process for the control unit 440 to determine the acceptable transmission power for the second communication service.

Referring to FIG. 13, the control unit 440 first determines whether radio signals are receivable from the management node 300 through the first communication unit 410 (step S402). If radio signals from the management node 300 are receivable, the process proceeds to the step S404. If, on the other hand, radio signals from the management node 300 are not receivable, the process proceeds to the step S408.

In the step S404, the control unit 440 acquires the location data of the primary usage node serving as an interfered node that is received from the management node 300 through the first communication unit 410. Further, the control unit 440 acquires the parameters received from management node 300 in the same manner (step S404). Note that, in the case where secondary usage is made on the uplink channel of the OFDMA system as in the example shown in FIG. 2A, the interfered node is the base station only. In such a case, the control unit 440 acquires only the location data of the management node 300, which is the base station, as the location data of the primary usage node. Further, the necessary parameters in the step S404 correspond to the quality of radio signals required in the first communication service, the interference or noise level in the first communication service (or a parameter for calculating those levels) or the like, for example.

Then, the control unit 440 determines the transmission power depending on the acceptable interference power of the second communication service based on the location data and parameters received in the step S404 (step S406). Specifically, the control unit 440 can determine the transmission power depending on the acceptable interference power of the second communication service according to the expression (9) in the above-described interference control model, for example. For example, the quality of radio signals required in the first communication service corresponds to the term $P_{rx_primary,primary}/SINR_{required}$ in the expression (9). Further, the interference or noise level corresponds to the term $N_{primary}$ in the expression (9). Further, the value of the path loss $L_{path_tx_secondary,i}$ in the expression (9) can be calculated according to the expression (6) by using the distance d that is derived from the location data of the primary usage node and the location data of the terminal device 400. Note that the control unit 440 may calculate the value of the path loss $L_{path_tx_secondary,i}$ as a difference between the transmission power value of a downlink signal from the base station and the reception level of the downlink signal instead of calculating it from the location data. Further, when another second communication service exists, the control unit 440 may distribute the transmission power according to the expression (10) of the equal type or the expression (11) of the unequal type.

On the other hand, if radio signals from the management node 300 are not receivable, in the step S408, the control unit 440 acquires the location data and parameters for determining a transmission power from the storage unit 430 (step S408). For example, the control unit 440 may receive the location data of the interfered node and necessary parameters through the first communication unit 410 when communication with the management node 300 becomes available and store them into the storage unit 430 for later

use. Further, when the types of the first communication service which is the target of secondary usage are limited to several candidates in advance, for example, a parameter indicating the quality of radio signals required in the first communication service may be stored as a default value in the storage unit **430**.

Then, the control unit **440** determines the transmission power depending on the acceptable interference power of the second communication service based on the location data and parameters acquired in the step **S408** (step **S410**). In this case, however, there is a possibility that the parameters used for determination of the transmission power are not the latest. Thus, the control unit **440** adds a given margin to the value of the transmission power so as to reduce the possibility that causes interference on the primary usage node. Specifically, the control unit **440** can determine the transmission power according to the expression (12) of the interfering margin reduction type described above, for example. The value of $N_{estimation}$ in the expression (12) is determined to be inclusive of an extra number according to the number of secondary usage nodes **204** that possibly subscribe to the second communication service, for example.

After that, the transmission power determination process by the control unit **440** ends. Then, the second communication service is started between the terminal device **400** and the respective secondary usage nodes **204** by using the power level within the range of the determined acceptable interference power.

[3-4. Summary of Second Embodiment]

The second embodiment of the present invention is described above with reference to FIGS. **10** to **13**. In this embodiment, the acceptable transmission power for the second communication service that makes secondary usage of the spectrum assigned to the first communication service is determined by the terminal device **400** which acts as the coordinator of the second communication service according to the above-described interference control model. The terminal device **400** can thereby determine the transmission power to be used for the second communication service in an active manner and control the transmission power so as to suppress interference on the primary system **302**.

Further, if the control unit **440** fails to receive radio signals from the management node **300** and is thus unable to acquire the latest location data of the primary usage node, the range of the transmission power is determined by counting in the margin for reducing the possibility that causes interference on the primary usage node. The terminal device **400** can thereby start secondary usage of a spectrum autonomously and safely even when the terminal device **400** is located in the area where signal receiving conditions are relatively unsuitable due to shadowing (shielding), fading or the like.

Further, with the technique of the above-described interfering margin reduction type, the margin is determined according not to the actual number of secondary usage nodes, but to an assumed value that is estimated inclusive of an extra number. It is thereby possible to prevent degradation of the quality of the first communication service even when the number of secondary usage nodes that subscribe to the second communication service increases within an expected range.

4. Third Embodiment

In the first embodiment, the acceptable transmission power for secondary usage is determined by the manage-

ment node in a passive way from the viewpoint of the terminal device that makes secondary usage of a spectrum. Further, in the second embodiment, the acceptable transmission power for secondary usage is determined by the terminal device acting as a coordinator of secondary usage in an active way from the viewpoint of the terminal device that makes secondary usage of a spectrum. By making secondary usage of a spectrum within the range of the acceptable transmission power determined by any or those techniques, interference occurring in the primary usage node is suppressed. Further, in order to optimize the opportunity of communication attained by secondary usage of a spectrum within the range of the limited transmission power, it is desirable that the transmission power is allocated adaptively to the secondary usage nodes that subscribe to the second communication service as well. In this section, an example of transmission power control that allocates the transmission power adaptively to the secondary usage nodes that subscribe to the second communication service is described as a third embodiment of the present invention.

[4-1. Overview of Secondary System]

FIG. **14** is an explanatory view to describe an overview of a secondary system **602** in which a transmission power is allocated adaptively to secondary usage nodes in the third embodiment of the present invention. Referring to FIG. **14**, the secondary system **602** includes a terminal device **600** and a plurality of terminal devices **604**.

The terminal device **600** is a secondary usage node that has a role of a coordinator (SSC) that operates to start secondary usage of a spectrum. The terminal device **600** starts the second communication service by using a part or whole of the spectrum assigned to the first communication service that is provided from a base station **100** (or a base station **300**) shown in FIG. **4**, for example. At the same time, the terminal device **600** receives the value of the acceptable transmission power that is determined by using the technique described in the first embodiment from the base station **100**, for example. Alternatively, the terminal device **600** may acquire parameters necessary for determining the acceptable transmission power from the base station **300** and determine the value of the acceptable transmission power by itself by using the technique described in the second embodiment, for example. A specific configuration of the terminal device **600** is described in further detail later.

On the other hand, the terminal devices **604** are secondary usage nodes that subscribe to the second communication service and communicate with each other. If the terminal device **604** subscribes to the second communication service, it transmits and receives a radio signal (secondary signal) for the second communication service by using the transmission power allocated by the terminal device **600**.

[4-2. Exemplary Configuration of Terminal Device Acting as Coordinator]

FIG. **15** is a block diagram showing an example of a logical configuration of the terminal device **600** shown in FIG. **14**. Referring to FIG. **15**, the terminal device **600** includes a first communication unit **210**, a second communication unit **620**, a storage unit **230** and a control unit **640**.

The first communication unit **210** transmits location data indicating the location of its own device to the base station **100** in response to an instruction for start of secondary usage of a spectrum or the like and receives the value of the acceptable transmission power for secondary usage, for example, just like in the first embodiment. The first communication unit **210** then outputs the received value of the acceptable transmission power to the control unit **640**. Alternatively, the first communication unit **210** may receive

necessary parameters for determining the acceptable transmission power and output them to the control unit **640**.

The second communication unit **620** transmits and receives radio signals to and from the secondary usage node **604** in accordance with a given communication scheme. For example, the second communication unit **620** first performs sensing of radio signals of the first communication service and achieves synchronization of the uplink channel. Then, the second communication unit **620** transmits a beacon to the secondary usage nodes **604** in the nearby vicinity on a regular basis by using the synchronized uplink channel. The transmission power used by the second communication unit **620** is limited to the range of the acceptable transmission power received by the first communication unit **210**, i.e. the range that does not cause substantial interference on the primary usage node, under control of the control unit **640**.

The control unit **640** controls the overall functions of the terminal device **600** by using a control device such as a CPU, for example. Further, in this embodiment, the control unit **640** adaptively allocates the transmission power to be used for transmitting secondary signals by the secondary usage nodes **604** that subscribe to the second communication service in such a way that the opportunity of communication attained by secondary usage is optimized within the range of the acceptable transmission power.

Specifically, the control unit **640** can allocate the transmission power to the respective secondary usage nodes **604** in consideration of the communication quality in the secondary usage nodes **604** included in the secondary system **602**, for example. When one of the secondary usage nodes **604** is regarded as an interfered node, it is necessary to satisfy the following relational expression (14) in order for the interference to be accepted in the interfered node.

$$SINR_{i_required_secondary} \leq \quad \text{Expression (14)}$$

$$\frac{P_{i_rx_secondary,j_tx_secondary}}{(I_{i,primary} + I_{i,k(k \neq i,k \neq j)}_{tx_secondary}) + N_i}$$

In the above expression, $SINR_{i_required_secondary}$ indicates the minimum SINR that is required in the i-th secondary usage node, which is the interfered node. $SINR_{i_required_secondary}$ may be the minimum receiving sensitivity of the i-th secondary usage node, the minimum SINR given according to QoS or the like, for example. Further, $P_{i_rx_secondary,j_tx_secondary}$ indicates the reception level that is required for secondary signals transmitted from the j-th secondary usage node to the i-th secondary usage node. Further, $I_{i,primary}$ indicates the interference level by radio signals of the first communication service, $I_{i,k(k \neq i,k \neq j)}_{tx_secondary}$ indicates the interference level by secondary signals from other secondary usage nodes which are not the i-th or j-th secondary usage node (i.e. which are not relevant to the desired communication link). Further, N_i indicates the noise or interference level applicable to the i-th secondary usage node. Note that the interference level $I_{i,k(k \neq i,k \neq j)}_{tx_secondary}$ by secondary signals from the secondary usage nodes which are not relevant to the desired communication link can be calculated by subtracting the total sum of the path losses regarding such secondary usage nodes from the total sum of the transmission powers of those secondary usage nodes.

Focusing attention on the interference level $I_{i,k(k \neq i,k \neq j)}_{tx_secondary}$ from the secondary usage nodes which are not relevant to the desired communication link, the expression (14) is deformed into the following expression.

$$I_{i,k(k \neq i,k \neq j)}_{tx_secondary} \leq \quad \text{Expression (15)}$$

$$\frac{P_{i_rx_secondary,j_tx_secondary}}{SINR_{i_required_secondary}} - (I_{i,primary} + N_i)$$

On the other hand, the total interference level I_i from the secondary usage nodes other than the transmission source node of secondary signals (the j-th secondary usage node) which occurs in the interfered node (the i-th secondary usage node) can be represented by the following expression. Note that n in the expression (16) is the total number of secondary usage nodes serving as the source of interference.

$$I_i = \sum_{k=1(k \neq i,k \neq j)}^n (P_{tx_secondary,k} / L_{path_secondary,k}) \quad \text{Expression (16)}$$

Thus, assuming a plurality of secondary usage nodes, the transmission power $P_{tx_secondary,k}$ of each secondary usage node is determined in such a way that the total interference level I_i which is calculated by using the expression (16) is within the range that does not exceed the upper limit of the right side of the expression (15). For example, when the transmission power of each secondary usage node is maximized to the extent possible, the total interference level I_i in the i-th secondary usage node is a value given by the following expression.

$$I_i = \frac{P_{i_rx_secondary,j_tx_secondary}}{SINR_{i_required_secondary}} - (I_{i,primary} + N_i) \quad \text{Expression (17)}$$

Therefore, the control unit **640** adaptively controls the transmission power of each secondary usage node **604** so as to make the transmission powers of the secondary usage nodes **604** satisfy the acceptable interference power level for the secondary system **602**, as well as to satisfy the expression (14) or the expression (15) for the largest possible number of secondary usage nodes **604**. A specific flow of a transmission power control process is described hereinafter with reference to FIGS. **16** to **20**.

[4-3. Example of Transmission Power Control Process] (Scenario 1)

FIG. **16** is a flowchart showing an example of a flow of the transmission power control process by the control unit **640**.

Referring to FIG. **16**, the control unit **640** first acquires the value of the acceptable interference power P_{acc_total} that is accepted for the secondary system **602** (step **S602**). The value of the acceptable interference power P_{acc_total} may be acquired based on a transmission power determined by the technique described in the first embodiment, for example, according to the above-described interference control model and on a path loss. Alternatively, the control unit **640** may acquire parameters necessary for determining the acceptable interference power and determine the acceptable interference power P_{acc_total} by itself by using the parameters.

Next, the control unit **640** acquires the value $P_{tx_secondary,k}$ of a required transmission power for each secondary usage node **604** (step **S604**). The value of the required transmission power may be determined by the control unit **640** according to the minimum receiving sensitivity of each secondary usage node **604** or the minimum SINR based on QoS, for example. Alternatively, the control unit **640** may acquire the

value of the required transmission power for each secondary usage node **604** from the respective secondary usage nodes **604** through the second communication unit **620**, for example. In the latter case, the value of the required transmission power can be transmitted from the respective secondary usage nodes **604** to the terminal device **600** by being included in a response signal to a beacon for the second communication service which is transmitted from the terminal device **600**, for example.

Then, the control unit **640** calculates the total value P_{req_total} of the interference power levels on the basis of the required transmission power levels of the respective secondary usage nodes **604** which are acquired in the step **S604** according to the following expression (step **S606**).

$$P_{req_total} = \sum_{k=1}^n \left(\frac{P_{tx_secondary,k}}{L_{path_tx_secondary,k}} \right) \quad \text{Expression (18)}$$

Then, the control unit **640** compares the value P_{acc_total} of the acceptable interference power which is acquired in the step **S602** with the total value P_{req_total} of the interference power levels of the secondary usage nodes **604** which is calculated in the step **S606** (step **S608**). If the total value P_{req_total} of the interference power levels is larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step **S610**. On the other hand, if the total value P_{req_total} of the interference power levels is not larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step **S612**.

In the step **S610**, the total value P_{req_total} of the interference power levels exceeds the value P_{acc_total} of the acceptable interference power. Specifically, in this case, if the transmission power values as required are used in the respective secondary usage nodes **604**, interference at the level that is not acceptable in the primary usage node is likely to occur. To avoid this, in this scenario, the control unit **640** excludes the secondary usage node **604** that causes a relatively high interference level on the other secondary usage nodes **604** from allocation of the transmission power, for example (step **S610**). The interference level caused on the other secondary usage nodes **604** can be calculated by using the transmission power of secondary signals and the path loss, for example. In this manner, by excluding any secondary usage node **604** from allocation of the transmission power, the total value P_{req_total} of the transmission powers is reduced, thereby preventing the occurrence of interference that is not acceptable in the primary usage node. Note that the control unit **640** may direct the secondary usage node **604** that is excluded from allocation of the transmission power to communicate in a different resource block (or a different frequency slot, time slot or code). After that, the process returns to the step **S606**, and calculation of the total value P_{req_total} of the interference power levels and comparison with the value P_{acc_total} of the acceptable interference power are performed again.

On the other hand, in the step **S612**, the total value P_{req_total} of the interference power levels does not exceed the value P_{acc_total} of the acceptable interference power. Specifically, in this case, even if the transmission power values as required are used by the respective secondary usage nodes **604**, the level of interference occurring in the primary usage node is within the acceptable range. Then, the control unit **640** further compares the total value P_{req_total} of the interference power levels with a threshold Th that is set depending on the interference level occurring in each secondary

usage node **604** (step **S612**). The threshold Th may be set according to the following expression in relation to the expression (14), for example.

$Th =$ Expression (19)

$$\sum_{i=1}^n \left(\frac{P_{tx_secondary,i}}{L_{path_tx_secondary,i}} \right) = \frac{P_{tx_primary,primary}}{SINR_{required}} - N_{primary}$$

If the total value P_{req_total} of the interference power levels is smaller than the threshold Th , the process proceeds to the step **S614**. On the other hand, if the total value P_{req_total} of the interference power levels is not smaller than the threshold Th , the process proceeds to the step **S616**.

In the step **S614**, the total value P_{req_total} of the interference power levels is smaller than the threshold Th . Specifically, in this case, even if the transmission power that is larger than the required transmission power is used, there would be some allowance against the occurrence of interference that is not acceptable in the primary usage node and the secondary usage node **604**. Thus, in order to increase the opportunity of communication attained by secondary usage, the control unit **640** increases the transmission power corresponding to any secondary usage node **604** (step **S614**). The secondary usage node **604** whose transmission power is increased may be a node in which the priority of an application is high, a node in which a data rate can be improved with an increase in the transmission power, a node in which only a low data rate is obtained with the required transmission power or the like, for example. After that, the process returns to the step **S612**, and comparison of the total value P_{req_total} of the interference power levels with the threshold Th is performed again.

On the other hand, in the step **S616**, the total value P_{req_total} of the interference power levels is equal to or larger than the threshold Th . Therefore, the control unit **640** decides that it allocates the value of each transmission power corresponding to each secondary usage node **604** at this point to the respective secondary usage nodes **604** as a definite transmission power value (**S616**). Then, the control unit **640** notifies the transmission power value to be allocated to each secondary usage node **604** to the respective secondary usage nodes **604** by using a control channel of the second communication service, for example.

By the above transmission power control process, the control unit **640** can adaptively allocate the transmission power to the secondary usage nodes **604** subscribing to the second communication service within the range of the acceptable transmission power for the secondary system **602**. As a result, the opportunity of communication attained by secondary usage of a spectrum is optimized.

It should be noted that, in the example of FIG. **16**, the secondary usage node **604** that causes a relatively high interference level on the other secondary usage nodes **604** is excluded from allocation of the transmission power in the step **S610**. However, the present invention is not limited thereto, and the secondary usage node **604** to be excluded from allocation of the transmission power may be selected according to conditions different from the example shown in FIG. **16** as described below.

(Scenario 2)

FIG. **17** is a flowchart showing another example of a flow of the transmission power control process by the control unit **640**.

Referring to FIG. 17, the control unit 640 first acquires the value of the total transmission power P_{acc_total} that is accepted for the secondary system 602 from the base station 100, which is the management node, through the first communication unit 210 (step S622). Next, the control unit 640 acquires the value $P_{tx_secondary,k}$ of the required transmission power for each secondary usage node 604 (step S624). Then, the control unit 640 calculates the total value P_{req_total} of the interference power levels of the respective secondary usage nodes 604 which are acquired in the step S624 according to the above expression (18) (step S626). Then, the control unit 640 compares the value P_{acc_total} of the acceptable interference power which is acquired in the step S622 with the total value P_{req_total} of the interference power levels of the secondary usage nodes 604 which is calculated in the step S626 (step S628). If the total value P_{req_total} of the interference power levels is larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S630. On the other hand, if the total value P_{req_total} of the interference power levels is not larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S632.

In the step S630, the total value P_{req_total} of the interference power levels exceeds the value P_{acc_total} of the acceptable interference power. In this case, in this scenario, the control unit 640 excludes the secondary usage node 604 that causes a relatively high interference level on the primary usage node from allocation of the transmission power (step S630). After that, the process returns to the step S626, and calculation of the total value P_{req_total} of the interference power levels and comparison with the value P_{acc_total} of the acceptable interference power are performed again.

On the other hand, in the step S632, the total value P_{req_total} of the interference power levels does not exceed the value P_{acc_total} of the acceptable interference power. Then, the control unit 640 further compares the total value P_{req_total} of the interference power levels with the above-described threshold Th depending on the interference level occurring in each secondary usage node 604 (step S632). If the total value P_{req_total} of the interference power levels is smaller than the threshold Th , the process proceeds to the step S634. On the other hand, if the total value P_{req_total} of the interference power levels is not smaller than the threshold Th , the process proceeds to the step S636.

In the step S634, in order to increase the opportunity of communication attained by secondary usage, the control unit 640 increases the transmission power corresponding to any secondary usage node 604 in the same manner as in the step S614 shown in FIG. 16 (step S634). After that, the process returns to the step S632, and comparison of the total value P_{req_total} of the interference power levels with the threshold Th is performed again.

On the other hand, in the step S636, the total value P_{req_total} of the interference power levels is equal to or larger than the threshold Th . Therefore, the control unit 640 decides that it allocates the value of each transmission power corresponding to each secondary usage node 604 at this point to the respective secondary usage nodes 604 as a definite transmission power value (S636). Then, the control unit 640 notifies the transmission power value to be allocated to each secondary usage node 604 to the respective secondary usage nodes 604 by using a control channel of the second communication service, for example.

(Scenario 3)

FIG. 18 is a flowchart showing another example of a flow of the transmission power control process by the control unit 640.

Referring to FIG. 18, the control unit 640 first acquires the value of the total transmission power P_{acc_total} that is accepted for the secondary system 602 from the base station 100, which is the management node, through the first communication unit 210 (step S642). Next, the control unit 640 acquires the value $P_{tx_secondary,k}$ of the required transmission power for each secondary usage node 604 (step S644). Then, the control unit 640 calculates the total value P_{req_total} of the interference power levels of the respective secondary usage nodes 604 which are acquired in the step S644 according to the above expression (18) (step S646). Then, the control unit 640 compares the value P_{acc_total} of the acceptable interference power which is acquired in the step S642 with the total value P_{req_total} of the interference power levels of the secondary usage nodes 604 which is calculated in the step S646 (step S648). If the total value P_{req_total} of the interference power levels is larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S650. On the other hand, if the total value P_{req_total} of the interference power levels is not larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S652.

In the step S650, the total value P_{req_total} of the interference power levels exceeds the value P_{acc_total} of the acceptable interference power. In this case, in this scenario, the control unit 640 excludes the secondary usage node 604 in which the path loss in the path from the primary usage node is low (i.e. which is located close to the primary usage node) from allocation of the transmission power, for example (step S650). After that, the process returns to the step S646, and calculation of the total value P_{req_total} of the interference power levels and comparison with the value P_{acc_total} of the acceptable interference power are performed again.

On the other hand, in the step S652, the total value P_{req_total} of the interference power levels does not exceed the value P_{acc_total} of the acceptable interference power. Then, the control unit 640 further compares the total value P_{req_total} of the interference power levels with the above-described threshold Th depending on the interference level occurring in each secondary usage node 604 (step S652). If the total value P_{req_total} of the interference power levels is smaller than the threshold Th , the process proceeds to the step S654. On the other hand, if the total value P_{req_total} of the interference power levels is not smaller than the threshold Th , the process proceeds to the step S656.

In the step S654, in order to increase the opportunity of communication attained by secondary usage, the control unit 640 increases the transmission power corresponding to any secondary usage node 604 in the same manner as in the step S614 shown in FIG. 16 (step S654). After that, the process returns to the step S652, and comparison of the total value P_{req_total} of the interference power levels with the threshold Th is performed again.

On the other hand, in the step S656, the total value P_{req_total} of the interference power levels is equal to or larger than the threshold Th . Therefore, the control unit 640 decides that it allocates the value of each transmission power corresponding to each secondary usage node 604 at this point to the respective secondary usage nodes 604 as a definite transmission power value (S656). Then, the control unit 640 notifies the transmission power value to be allocated to each secondary usage node 604 to the respective secondary usage nodes 604 by using a control channel of the second communication service, for example.

(Scenario 4)

FIG. 19 is a flowchart showing another example of a flow of the transmission power control process by the control unit 640.

Referring to FIG. 19, the control unit 640 first acquires the value of the total transmission power P_{acc_total} that is accepted for the secondary system 602 from the base station 100, which is the management node, through the first communication unit 210 (step S662). Next, the control unit 640 acquires the value $P_{tx_secondary,k}$ of the required transmission power for each secondary usage node 604 (step S664). Then, the control unit 640 calculates the total value P_{req_total} of the interference power levels of the respective secondary usage nodes 604 which are acquired in the step S664 according to the above expression (18) (step S666). Then, the control unit 640 compares the value P_{acc_total} of the acceptable interference power which is acquired in the step S662 with the total value P_{req_total} of the interference power levels of the secondary usage nodes 604 which is calculated in the step S666 (step S668). If the total value P_{req_total} of the interference power levels is larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S670. On the other hand, if the total value P_{req_total} of the interference power levels is not larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S672.

In the step S670, the total value P_{req_total} of the interference power levels exceeds the value P_{acc_total} of the acceptable interference power. In this case, in this scenario, the control unit 640 excludes the secondary usage node 604 with a low priority from allocation of the transmission power, for example (step S670). The priority may be assigned according to the type of an application that is executed by using the second communication service, for example. For example, a high priority can be assigned to the application for which small delay is needed, such as motion picture delivery or network game. Further, a high priority can be assigned to the secondary usage node 604 of a user who pays high service charge so as to ensure a certain service quality. After that, the process returns to the step S666, and calculation of the total value P_{req_total} of the interference power levels and comparison with the value P_{acc_total} of the acceptable interference power are performed again.

On the other hand, in the step S672, the total value P_{req_total} of the interference power levels does not exceed the value P_{acc_total} of the acceptable interference power. Then, the control unit 640 further compares the total value P_{req_total} of the interference power levels with the above-described threshold Th depending on the interference level occurring in each secondary usage node 604 (step S672). If the total value P_{req_total} of the interference power levels is smaller than the threshold Th , the process proceeds to the step S674. On the other hand, if the total value P_{req_total} of the interference power levels is not smaller than the threshold Th , the process proceeds to the step S676.

In the step S674, in order to increase the opportunity of communication attained by secondary usage, the control unit 640 increases the transmission power corresponding to any secondary usage node 604 in the same manner as in the step S614 shown in FIG. 16 (step S674). After that, the process returns to the step S672, and comparison of the total value P_{req_total} of the interference power levels with the threshold Th is performed again.

On the other hand, in the step S676, the total value P_{req_total} of the interference power levels is equal to or larger than the threshold Th . Therefore, the control unit 640 decides that it allocates the value of each transmission power

corresponding to each secondary usage node 604 at this point to the respective secondary usage nodes 604 as a definite transmission power value (S676). Then, the control unit 640 notifies the transmission power value to be allocated to each secondary usage node 604 to the respective secondary usage nodes 604 by using a control channel of the second communication service, for example.

In the examples of FIGS. 16 to 19 described above, when the total value of the interference power levels exceeds the value of the acceptable interference power, the secondary usage node to be excluded from allocation of the transmission power is determined according to the conditions related to the interference level caused on the other nodes, the path loss or the predefined priority. Further, the secondary usage node to be excluded from allocation of the transmission power may be determined by a combination of two or more conditions of the above conditions as described hereinbelow, for example.

(Scenario 5)

FIG. 20 is a flowchart showing another example of a flow of the transmission power control process by the control unit 640.

Referring to FIG. 20, the control unit 640 first acquires the value of the total transmission power P_{acc_total} that is accepted for the secondary system 602 from the base station 100, which is the management node, through the first communication unit 210 (step S682). Next, the control unit 640 acquires the value $P_{tx_secondary,k}$ of the required transmission power for each secondary usage node 604 (step S684). Then, the control unit 640 calculates the total value P_{req_total} of the interference power levels of the respective secondary usage nodes 604 which are acquired in the step S684 according to the above expression (18) (step S686). Then, the control unit 640 compares the value P_{acc_total} of the acceptable interference power which is acquired in the step S682 with the total value P_{req_total} of the interference power levels of the secondary usage nodes 604 which is calculated in the step S686 (step S688). If the total value P_{req_total} of the interference power levels is larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S690. On the other hand, if the total value P_{req_total} of the interference levels is not larger than the value P_{acc_total} of the acceptable interference power, the process proceeds to the step S692.

In the step S690, the total value P_{req_total} of the interference power levels exceeds the value P_{acc_total} of the acceptable interference power. In this case, in this scenario, the control unit 640 first determines the secondary usage node 604 to be excluded according to each of the two or more conditions of a plurality of conditions (step S690). The plurality of conditions may be two or more conditions selected from the interference level caused on the other secondary usage nodes 604, the interference level caused on the primary usage node, the path loss on the communication path, and the priority assigned in advance to each secondary usage node 604, for example. Specifically, for example, the control unit 640 determines the secondary usage node 604 that causes a relatively high interference level on the other secondary usage nodes 604 as described above with reference to FIG. 16 and also determines the secondary usage node 604 that causes a relatively high interference level on the primary usage node as described above with reference to FIG. 17.

Then, the control unit 640 selects an exclusion condition by which the total capacity of the secondary system 602 is consequently maximized when the secondary usage node 604 is excluded according to each condition from the

above-described two or more conditions (S691). The total capacity $C_{secondary}$ of the secondary system 602 can be evaluated according to the following expression, for example.

$$C_{secondary} = \sum_{k=1}^n C_{secondary,k} = \sum_{k=1}^n \left(\log_2 \left(1 + \frac{P_{tx,secondary,k}}{N_k} \right) \right) \quad \text{Expression (20)}$$

In the above expression, $P_{tx,secondary,k}$ indicates the transmission power of the k-th secondary usage node 604, and N_k indicates the noise level of the k-th secondary usage node 604.

Then, the secondary usage node 604 that is determined according to the selected exclusion condition is excluded from allocation of the transmission power, and then the process returns to the step S686.

On the other hand, in the step S692, the total value P_{req_total} of the interference power levels does not exceed the value P_{acc_total} of the acceptable interference power. Then, the control unit 640 further compares the total value P_{req_total} of the interference power levels with the above-described threshold Th depending on the interference level occurring in each secondary usage node 604 (step S692). If the total value P_{req_total} of the interference power levels is smaller than the threshold Th , the process proceeds to the step S694. On the other hand, if the total value P_{req_total} of the interference power levels is not smaller than the threshold Th , the process proceeds to the step S696.

In the step S694, in order to increase the opportunity of communication attained by secondary usage, the control unit 640 increases the transmission power corresponding to any secondary usage node 604 in the same manner as in the step S614 shown in FIG. 16 (step S694). After that, the process returns to the step S652, and comparison of the total value P_{req_total} of the interference power levels with the threshold Th is performed again.

On the other hand, in the step S696, the total value P_{req_total} of the interference power levels is equal to or larger than the threshold Th . Therefore, the control unit 640 decides that it allocates the value of each transmission power corresponding to each secondary usage node 604 at this point to the respective secondary usage nodes 604 as a definite transmission power value (S696). Then, the control unit 640 notifies the transmission power value to be allocated to each secondary usage node 604 to the respective secondary usage nodes 604 by using a control channel of the second communication service, for example.

Note that the transmission power control process described above with reference to FIGS. 16 to 20 may be executed at the start of the second communication service by the terminal device 600, for example. Further, the transmission power control process may be executed dynamically when the number of the secondary usage nodes 604 subscribing to the second communication service is changed or when the communication quality required by the secondary usage node 604 is changed, or may be executed on a regular basis at regular time intervals.

[4-4. Summary of Third Embodiment]

The third embodiment of the present invention is described above with reference to FIGS. 14 to 20. According to the embodiment, the transmission power to be used by each secondary usage node 604 is controlled by the terminal device 600 so that a total sum of interference power levels based on transmission powers is within the range of an acceptable interference power allocated to the second com-

munication service. When the total sum of interference power is larger than the acceptable interference power, any secondary usage node 604 that is determined according to a given condition is excluded from allocation of the transmission power. In this configuration, it is possible to adaptively enhance the opportunity of communication attained by secondary usage of a spectrum within the range of the limited transmission power for the secondary usage nodes 604 that are located in different communication environments or that require different communication qualities, for example.

Further, when the total sum of interference power levels is smaller than the acceptable interference power and a total sum of transmission powers is smaller than a predetermined threshold depending on the interference level occurring in each secondary usage node 604, the transmission power allocated to any secondary usage node 604 is increased. It is thereby possible to efficiently make secondary usage within the range of the acceptable interference power without causing critical interference inside the secondary system 602.

Further, the condition for determining the secondary usage node 604 to be excluded from allocation of the transmission power when the total sum of interference power levels is larger than the acceptable interference power may be a condition according to the interference level caused on other nodes, the path loss, the predefined priority or the like, for example. Further, the secondary usage node 604 to be excluded from allocation of the transmission power may be determined by combining two or more conditions of those conditions. It is thereby possible to further optimize the opportunity of communication attained by secondary usage of a spectrum according to the purpose of a service, requirements, constraints or the like.

5. Application to TV Band

FIG. 21 is an explanatory view to describe an application of the above-mentioned first, second or third embodiment to TV band. In the example of FIG. 21, a primary usage node 900 is a broadcast station of TV broadcast (TV broadcaster). Primary usage nodes 910a to 910c are receiving station of TV broadcast. The primary usage node 900 provides a digital TV broadcast service on a frequency band F1 to the primary usage nodes 910a to 910c located inside the border 902 or 904. The inside area of the border 902 is a service area of the digital TV broadcast service. The shaded area between the border 902 and border 904 is a guard area where secondary usage of spectrum is restricted. Meanwhile, the area between the border 904 and border 906 is a TV white space. Secondary usage nodes 920a to 920c are located in this TV white space and operate second communication services on a frequency channel F3 which is different from the frequency band F1, for example. However, even if a guard band is set between the frequency band F1 for the first communication service and the frequency band F3 for the second communication service, there is a risk that a fatal interference occurs not only on the secondary system but also on the primary system at position P0, for example. Such a risk might be reduced by expanding the width of the guard area. However, expanding the width of the guard area leads to a decrease of an opportunity of secondary usage of spectrum. From this point of view, to control a transmission power of a second communication service according to the above-mentioned first, second or third embodiment allows for reducing interference on the primary system to fall within an acceptable range without excessively expanding the width of the guard area.

It should be noted that a series of processing according to the first, second and third embodiments described in this specification may be implemented on either hardware or software. In the case of executing a series or part of processing on software, a program constituting the software is prestored in a recording medium such as ROM (Read Only Memory), read into RAM (Random Access Memory) and then executed by using a CPU or the like.

The subject matter of each embodiment described in this specification is applicable to various types of modes of secondary usage. For example, as described above, it can be said that operation of relay node or femto-cell to cover a spectrum hole of the first communication service is a mode of secondary usage of spectrum. Further, the relationship between any one or more of macro-cell, RRH (Remote Radio Head), Hotzone, relay node, femto-cell and the like may form a mode of secondary usage of spectrum (such as heterogeneous network).

Although preferred embodiments of the present invention are described in detail above with reference to the drawings, the present invention is not limited thereto. It should be understood by those skilled in the art that various modifications, combinations, sub-combinations and alterations may occur depending on design requirements and other factors insofar as they are within the scope of the appended claims or the equivalents thereof.

The present application contains subject matter related to that disclosed in Japanese Priority Patent Application JP 2009-179368 filed in the Japan Patent Office on Jul. 31, 2009 and Japanese Priority Patent Application JP 2010-110013 filed in the Japan Patent Office on May 12, 2010, the entire contents of which are hereby incorporated by reference.

The invention claimed is:

1. An electronic device, comprising:
 - processing circuitry configured to:
 - receive a request for secondary usage of a spectrum assigned to a first communication service, the request comprising location information of at least one secondary usage node;
 - determine transmission power required for the at least one secondary usage node;
 - calculate a total sum of interference power levels on the first communication service based on the transmission power required for the at least one secondary usage node;
 - determine an acceptable transmission power level for a second communication services based, at least in part, on the location information and the total sum of interference power levels; and
 - notify the acceptable transmission power level for the second communication service to the at least one secondary usage node.
2. The electronic device of claim 1, wherein the request for secondary usage further includes location information of secondary usage nodes other than the at least one secondary usage node.
3. The electronic device of claim 1, wherein the location information includes values of latitude and longitude or values with a point of origin at a given control point.
4. The electronic device of claim 3, wherein the acceptable transmission power level is calculated by using the values of latitude and longitude.
5. The electronic device of claim 1, wherein the location information is measured by using a GPS function or measured by applying a direction of arrival estimation algorithm.

6. The electronic device of claim 1, wherein the processing circuitry is further configured to notify the acceptable transmission power level by transmitting beacons to the at least one secondary usage node.

7. The electronic device of claim 1, wherein the processing circuitry is further configured to:

- acquire an acceptable interference power level on the second communication service; and
- limit communicating by using the spectrum assigned to the first communication service of one or more secondary usage nodes of the at least one secondary usage node, when the calculated total sum of interference power levels is larger than the acceptable interference power level.

8. The electronic device of claim 7, wherein the processing circuitry is further configured to:

- direct the one or more limited secondary usage nodes to communicate using a spectrum different from a spectrum assigned to the first communication service.

9. The electronic device of claim 8, wherein the processing circuitry is further configured to:

- calculate a second total sum of interference power levels, based on transmission power required by secondary usage nodes configured to communicate by using the spectrum assigned to the first communication service.

10. The electronic device of claim 7, wherein the processing circuitry is further configured to:

- increase a transmission power corresponding to a secondary usage node of the at least one secondary usage node, when the calculated total sum of interference power levels is smaller than the acceptable interference power level and a total sum of transmission powers is smaller than a given threshold depending on an interference level occurring in each secondary usage node.

11. The electronic device of claim 7, wherein the processing circuitry is further configured to limit communicating by excluding:

- a secondary usage node causing a relatively high interference level on other secondary usage nodes, or
- a secondary usage node causing a relatively high interference level on a primary usage node that receives a radio signal of the first communication service, or
- a secondary usage node of which path loss on a communication path from a primary usage node that receives a radio signal of the first communication service is relatively low, or
- a secondary usage node of which priority assigned in advance to each secondary usage node is relatively low.

12. The electronic device of claim 7, wherein the processing circuitry is further configured to limit communicating by determining a secondary usage node to be excluded according to a condition which maximizes a capacity after excluding a secondary usage node among two or more of the following conditions selected from an interference level caused on other secondary usage nodes:

- an interference level caused on a primary usage node that receives a radio signal of the first communication service,
- a path loss on a communication path, and
- a priority assigned in advance to each secondary usage node.

13. The electronic device of claim 1, wherein determining the transmission power required for the at least one secondary usage node comprises receiving the transmission power required for the at least one secondary usage node from the at least one secondary usage node.

14. A secondary usage node, comprising:
 processing circuitry configured to:
 transmit a request for secondary usage of a spectrum
 assigned to a first communication service to a man-
 agement node, the request for secondary usage com-
 prising location information of the secondary usage
 node; and
 receive an acceptable transmission power level for a
 second communication service from the manage-
 ment node, wherein the acceptable transmission
 power level is determined based, at least in part, on
 the location information and a total sum of interfer-
 ence power levels on the first communication service
 calculated based on transmission power required for
 at least one secondary usage node including the
 secondary usage node.
15. The secondary usage node of claim 14, wherein the
 request for secondary usage further includes location infor-
 mation of secondary usage nodes other than the at least one
 secondary usage node.

16. The secondary usage node of claim 14, wherein the
 processing circuitry is configured to:
 receive the acceptable transmission power level by receiv-
 ing beacons from the management node.
17. The electronic device of claim 14, wherein the loca-
 tion information includes values of latitude and longitude, or
 values with a point of origin at a given control point.
18. The electronic device of claim 17, wherein the accept-
 able transmission power level is calculated by using the
 values of latitude and longitude.
19. The electronic device of claim 14, wherein the loca-
 tion information is measured by using a GPS function or
 measured by applying a direction of arrival estimation
 algorithm.
20. The secondary usage node of claim 14, wherein the
 processing circuitry is configured to:
 transmit the transmission power required for the second-
 ary usage node to the management node.

* * * * *