




(86) Date de dépôt PCT/PCT Filing Date: 2008/10/15  
(87) Date publication PCT/PCT Publication Date: 2009/04/23  
(85) Entrée phase nationale/National Entry: 2010/04/06  
(86) N° demande PCT/PCT Application No.: US 2008/079947  
(87) N° publication PCT/PCT Publication No.: 2009/052149  
(30) Priorité/Priority: 2007/10/19 (US11/875,584)

(51) Cl.Int./Int.Cl. *E21B 43/00* (2006.01),  
*E21B 34/06* (2006.01)  
(71) Demandeur/Applicant:  
BAKER HUGHES INCORPORATED, US  
(72) Inventeurs/Inventors:  
GAUDETTE, SEAN L., US;  
JOHNSON, MICHAEL H., US  
(74) Agent: SIM & MCBURNEY

(54) Titre : DISPOSITIFS DE CONTROLE DE FLUX D'UN MILIEU PERMEABLE A UTILISER DANS LA PRODUCTION D'HYDROCARBURES

(54) Title: PERMEABLE MEDIUM FLOW CONTROL DEVICES FOR USE IN HYDROCARBON PRODUCTION

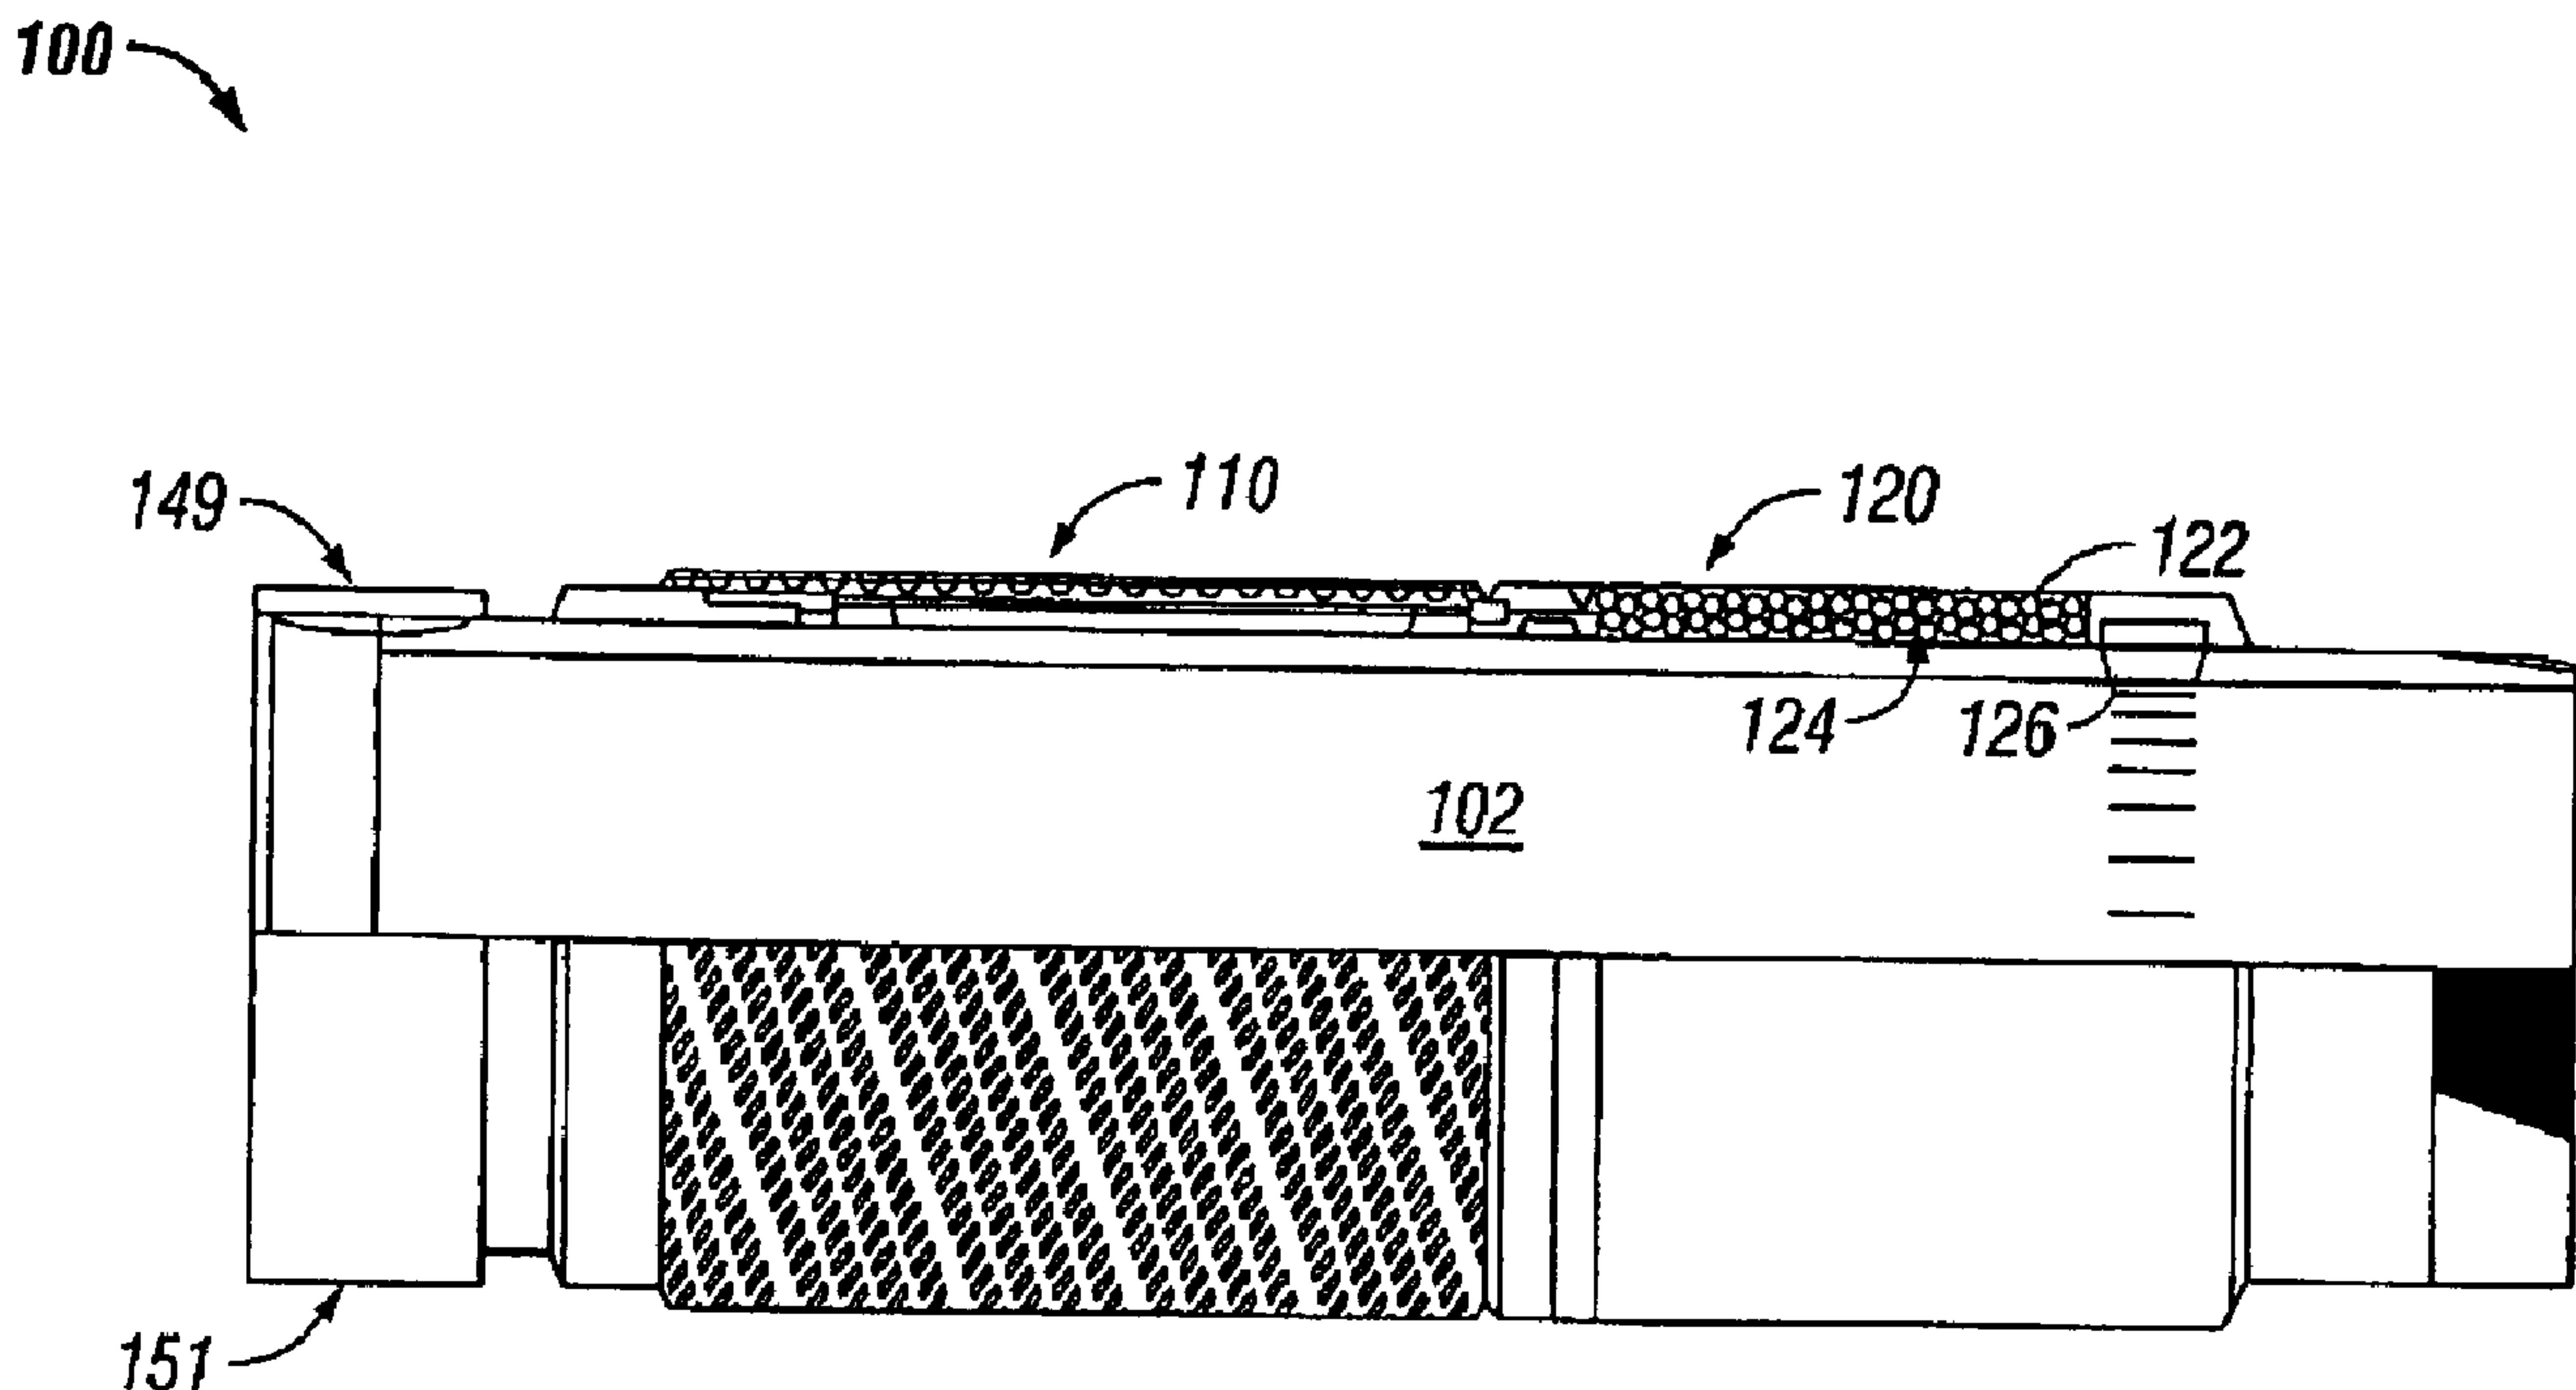

**FIG. 3**

(57) Abrégé/Abstract:

An in-flow control device controls fluid flow into a wellbore tubular using a permeable medium positioned in a flow space. The permeable medium induces a predetermined pressure differential in the flow space. The permeable medium may include separate

**(57) Abrégé(suite)/Abstract(continued):**

elements having interstitial spaces and / or solid porous members. In arrangements, a filtration element may be positioned upstream of the flow space. In arrangements, the flow space may be formed in a plug member associated with the housing. In certain embodiments, a flow restriction element, such as a check valve, in the housing may provide parallel fluid communication with the bore of the wellbore tubular. Additionally, an occlusion body may be positioned in the flow space and configured to disintegrate upon exposure to a preset condition. The occlusion body temporarily seals the flow space so that a bore of the tubular may be pressurized.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 April 2009 (23.04.2009)

PCT

(10) International Publication Number  
**WO 2009/052149 A3**

(51) International Patent Classification:  
*E21B 43/00* (2006.01) *E21B 34/06* (2006.01)

(21) International Application Number:  
PCT/US2008/079947

(22) International Filing Date: 15 October 2008 (15.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/875,584 19 October 2007 (19.10.2007) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GAUDETTE, Sean, L.** [US/US]; 23322 Dunhill Court, Katy, TX 77494 (US). **JOHNSON, Michael, H.** [US/US]; 6230 Clear Canyon Drive, Katy, TX 77450 (US).

(74) Agent: **DUPHORNE, Darin, H.**; Baker Oil Tools Division-baker Hughes Incorporated, Division Intellectual Property Counsel, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:  
9 July 2009

(54) Title: PERMEABLE MEDIUM FLOW CONTROL DEVICES FOR USE IN HYDROCARBON PRODUCTION

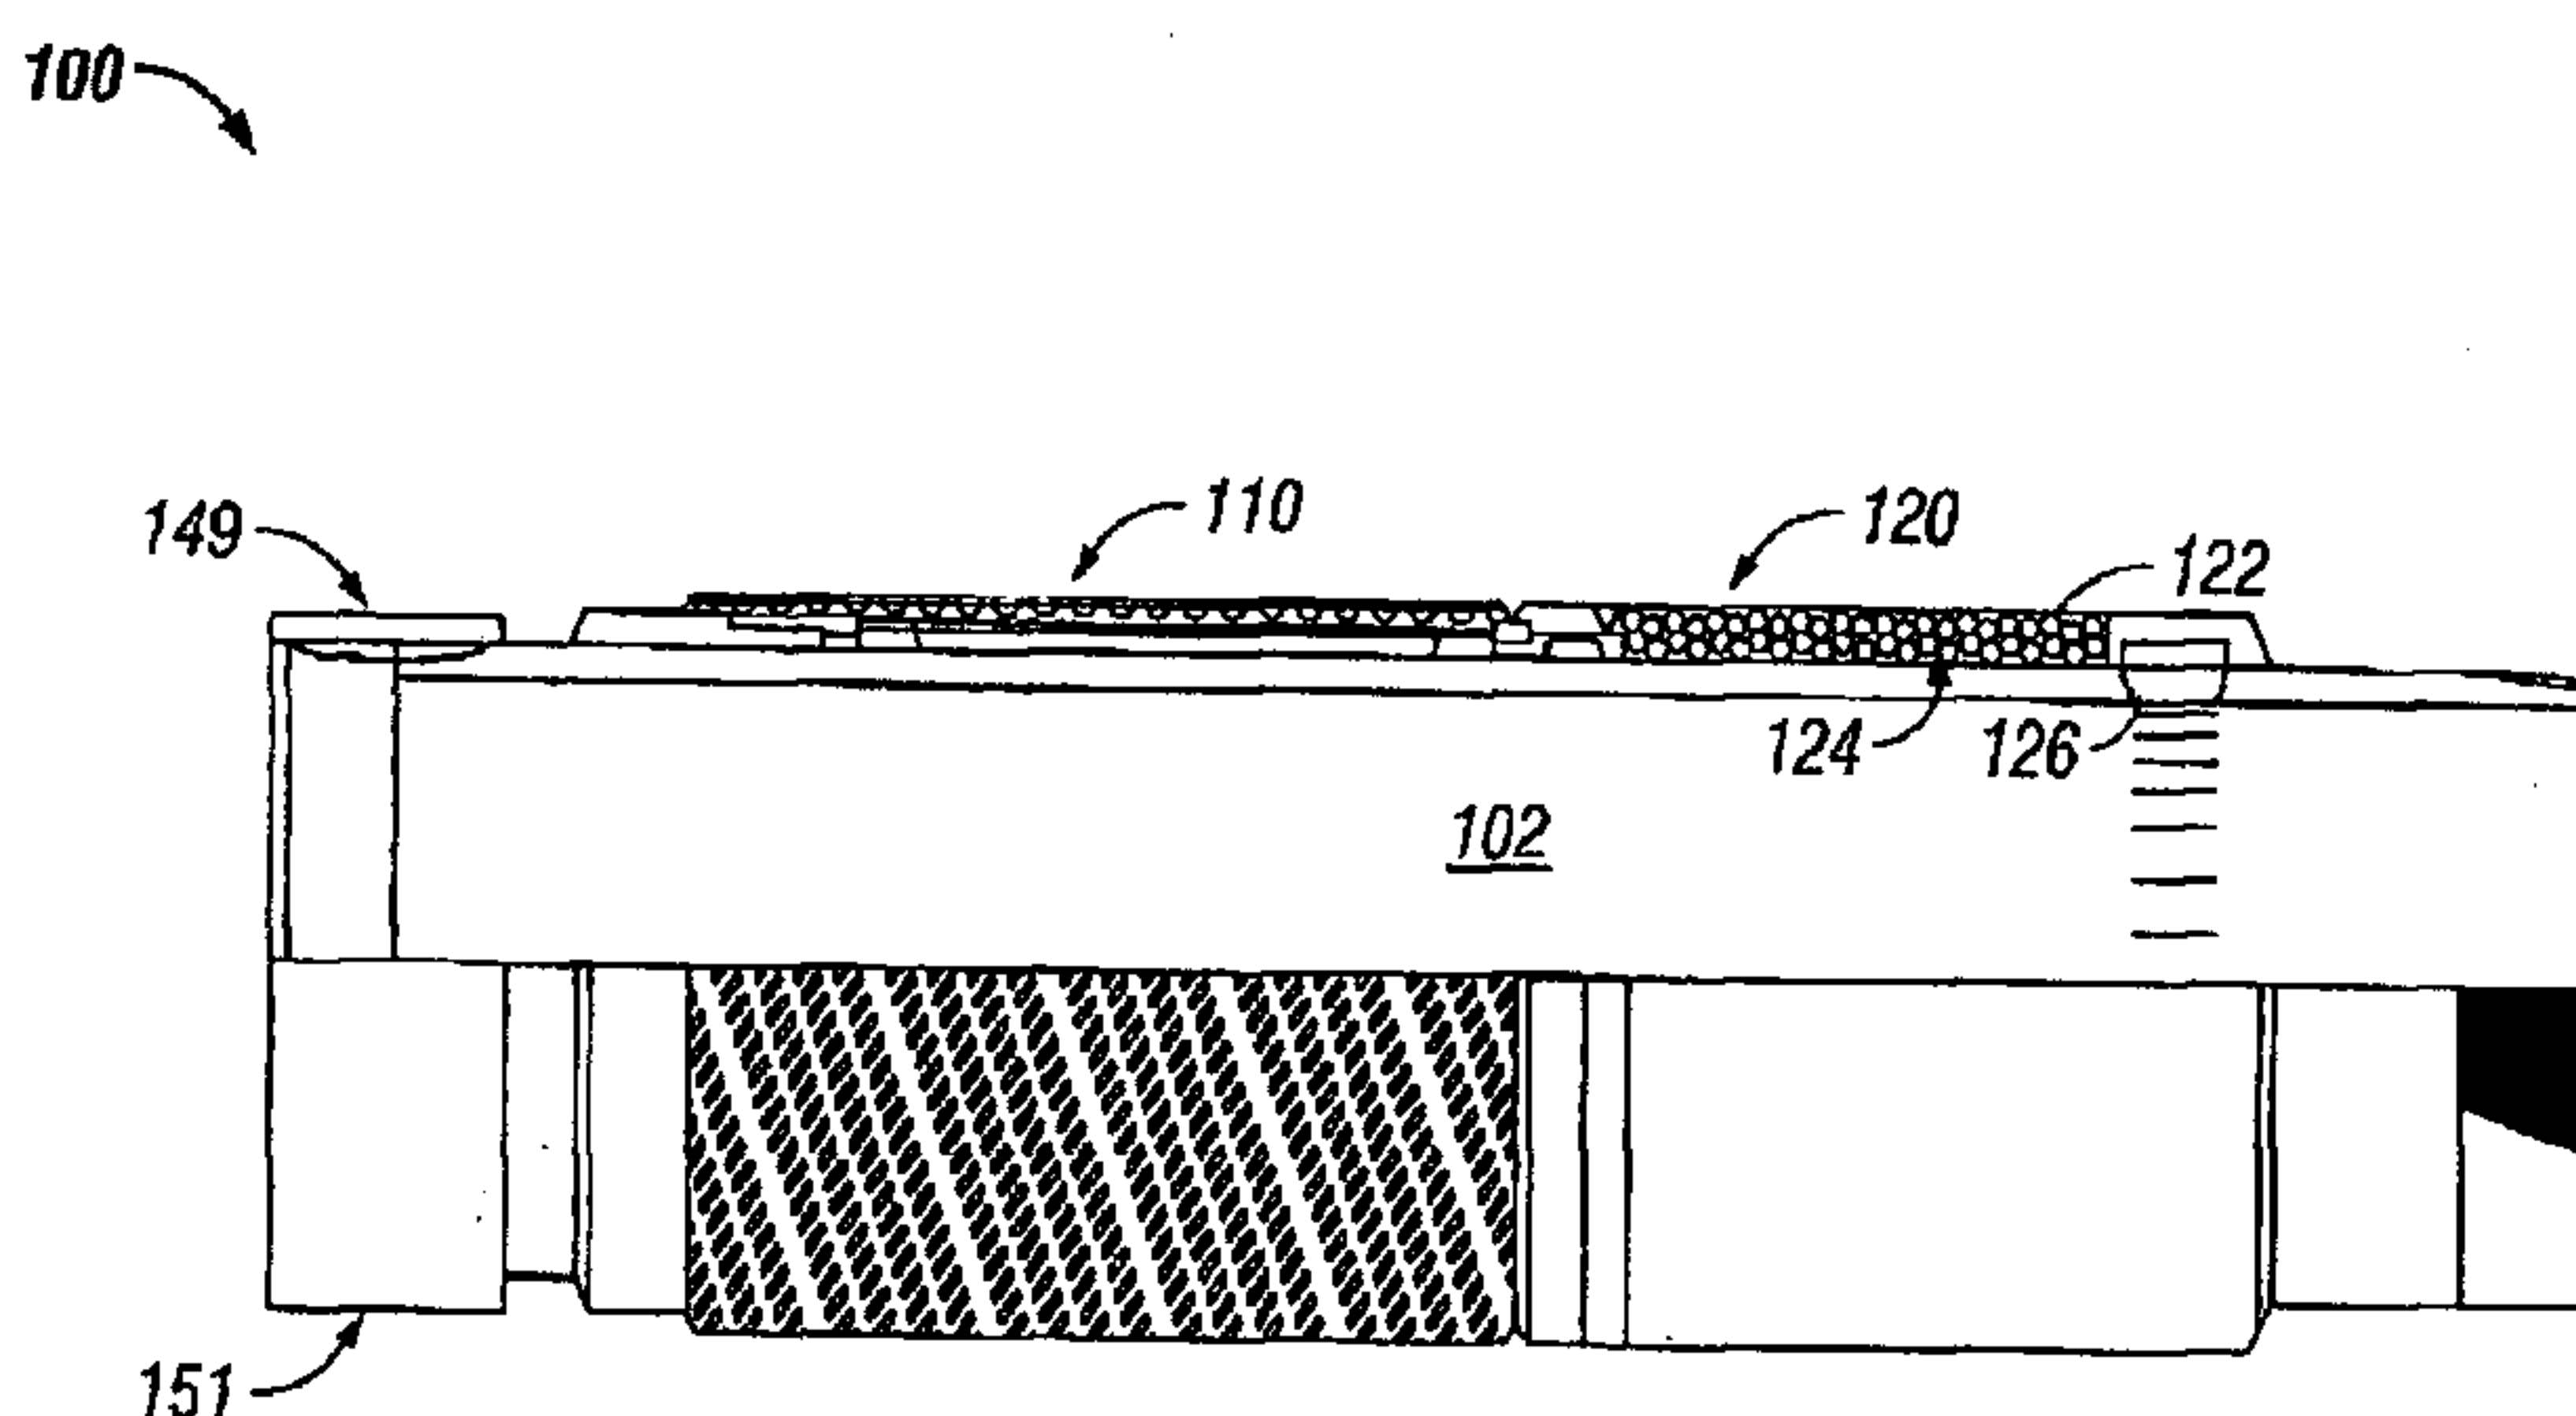


FIG. 3

(57) Abstract: An in-flow control device controls fluid flow into a wellbore tubular using a permeable medium positioned in a flow space. The permeable medium induces a predetermined pressure differential in the flow space. The permeable medium may include separate elements having interstitial spaces and / or solid porous members. In arrangements, a filtration element may be positioned upstream of the flow space. In arrangements, the flow space may be formed in a plug member associated with the housing. In certain embodiments, a flow restriction element, such as a check valve, in the housing may provide parallel fluid communication with the bore of the wellbore tubular. Additionally, an occlusion body may be positioned in the flow space and configured to disintegrate upon exposure to a preset condition. The occlusion body temporarily seals the flow space so that a bore of the tubular may be pressurized.

WO 2009/052149 A3

**TITLE: PERMEABLE MEDIUM FLOW CONTROL DEVICES FOR USE  
IN HYDROCARBON PRODUCTION**

INVENTORS: SEAN L. GAUDETTE, MICHAEL H. JOHNSON

**BACKGROUND OF THE DISCLOSURE**

**1. Field of the Disclosure**

**[0001]** The disclosure relates generally to systems and methods for selective control of fluid flow into a production string in a wellbore.

**2. Description of the Related Art**

**[0002]** Hydrocarbons such as oil and gas are recovered from a subterranean formation using a wellbore drilled into the formation. Such wells are typically completed by placing a casing along the wellbore length and perforating the casing adjacent each such production zone to extract the formation fluids (such as hydrocarbons) into the wellbore. These production zones are sometimes separated from each other by installing a packer between the production zones. Fluid from each production zone entering the wellbore is drawn into a tubing that runs to the surface. It is desirable to have substantially even drainage along the production zone. Uneven drainage may result in undesirable conditions such as an invasive gas cone or water cone. In the instance of an oil-producing well, for example, a gas cone may cause an in-flow of gas into the wellbore that could significantly reduce oil production. In like fashion, a water cone may cause an in-flow of water into the oil production flow that reduces the amount and quality of the produced oil. Accordingly, it is desired to provide even drainage across a production zone and / or the ability to selectively close off or reduce in-flow within production zones experiencing an undesirable influx of water and/or gas.

**[0003]** The present disclosure addresses these and other needs of the prior art.

## SUMMARY OF THE DISCLOSURE

**[0004]** In aspects, the present disclosure provides an in-flow control device for controlling a flow of fluid from a formation into a wellbore tubular. In one embodiment, the in-flow control device includes a flow space that provides fluid communication between the formation and a bore of the wellbore tubular. A permeable medium or media may be positioned in the flow space to induce a predetermined pressure differential across the permeable medium or media. For example, the permeable medium may have a porosity configured to provide the desired predetermined pressure differential. In some embodiments, the permeable medium may include a plurality of substantially separate elements having interstitial spaces therebetween when positioned in the flow space. In other embodiments, the permeable medium may include solid porous members. In still other embodiments, a medium in the flow space may include a combination of materials. In one embodiment, the in-flow control device may include a housing positioned along the wellbore tubular. The flow space may be formed in the housing. In some arrangements, a filtration element may be positioned upstream of the flow space of the in-flow control device. In one arrangement, the flow space may be formed in a plug member associated with the housing. In certain applications, the plug member may be removable. In certain embodiments, a flow restriction element in the housing may provide parallel fluid communication with the bore of the wellbore tubular. For instance, a check valve may be configured to open upon a preset pressure being reached in the in-flow control device. Additionally, an occlusion body may be positioned in the flow space and configured to disintegrate upon exposure to a preset condition. The occlusion body temporarily seals the flow space so that a bore of the tubular may be pressurized.

**[0005]** In aspects, the present disclosure provides a system for controlling a flow of a fluid from a formation into a wellbore tubular. The system may include a plurality of in-flow control devices positioned along a section of the wellbore tubular. Each in-flow control device may include a permeable medium positioned in a flow path between the formation and a flow bore of the wellbore tubular to control a flow characteristic. The flow characteristic

may be one or more of: (i) pressure, (ii) flow rate, and (iii) fluid composition. In one arrangement, the porosity of each permeable medium is configured to cause a substantially uniform flow characteristic along the section of the wellbore tubular. In certain arrangements, a filtration element may be positioned upstream of one or more of the plurality of in-flow control devices. The permeable medium may include a plurality of substantially separate elements configured to have interstitial spaces therebetween when positioned in the flow space and / or a substantially solid member having pores.

**[0006]** In aspects, the present disclosure provides a method for controlling a flow of fluid from a formation into a wellbore tubular. The method may include providing fluid communication between the formation and a bore of the wellbore tubular via a flow space and positioning a permeable medium in the flow space. The permeable medium may have a porosity configured to induce a predetermined pressure differential across the permeable medium.

**[0007]** It should be understood that examples of the more important features of the disclosure have been summarized rather broadly in order that detailed description thereof that follows may be better understood, and in order that the contributions to the art may be appreciated. There are, of course, additional features of the disclosure that will be described hereinafter and which will form the subject of the claims appended hereto.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0008]** The advantages and further aspects of the disclosure will be readily appreciated by those of ordinary skill in the art as the same becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference characters designate like or similar elements throughout the several figures of the drawing and wherein:

**Fig. 1** is a schematic elevation view of an exemplary multi-zonal wellbore and production assembly which incorporates an in-flow control system in accordance with one embodiment of the present disclosure;

**Fig. 2** is a schematic elevation view of an exemplary open hole production assembly which incorporates an in-flow control system in accordance with one embodiment of the present disclosure;

**Fig. 3** is a schematic cross-sectional view of an exemplary production control device made in accordance with one embodiment of the present disclosure;

**Fig. 4** is schematic cross-sectional view of an exemplary production control device that uses a plug member made in accordance with one embodiment of the present disclosure; and

**Fig. 5** is schematic end view of the **Fig. 4** embodiment.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0009]** The present disclosure relates to devices and methods for controlling production of a hydrocarbon producing well. The present disclosure is susceptible to embodiments of different forms. There are shown in the drawings, and herein will be described in detail, specific embodiments of the present disclosure with the understanding that the present disclosure is to be considered an exemplification of the principles of the disclosure and is not intended to limit the disclosure to that illustrated and described herein. Further, while embodiments may be described as having one or more features or a combination of two or more features, such a feature or a combination of features should not be construed as essential unless expressly stated as essential.

**[0010]** Referring initially to **Fig. 1**, there is shown an exemplary wellbore **10** that has been drilled through the earth **12** and into a pair of formations **14, 16** from which it is desired to produce hydrocarbons. The wellbore **10** is cased by metal casing, as is known in the art, and a number of perforations **18** penetrate and extend into the formations **14, 16** so that production fluids may flow from the formations **14, 16** into the wellbore **10**. The wellbore **10** has a deviated, or substantially horizontal leg **19**. The wellbore **10** has a late-stage production assembly, generally indicated at **20**, disposed therein by a tubing string **22** that extends downwardly from a wellhead **24** at the surface **26** of the wellbore **10**. The production assembly **20** defines an internal axial flowbore **28** along its length. An annulus **30** is defined between the production assembly **20** and the wellbore casing. The production assembly **20** has a deviated, generally horizontal portion **32** that extends along the deviated leg **19** of the wellbore **10**. Production devices **34** are positioned at selected points along the production assembly **20**. Optionally, each production device **34** is isolated within the wellbore **10** by a pair of packer devices **36**. Although only two production devices **34** are shown in **Fig. 1**, there may, in fact, be a large number of such production devices arranged in serial fashion along the horizontal portion **32**.

**[0011]** Each production device **34** features a production control device **38** that is used to govern one or more aspects of a flow of one or more fluids into the production assembly **20**. As used herein, the term “fluid” or “fluids” includes liquids, gases, hydrocarbons, multi-phase fluids, mixtures of two or more fluids, water, brine, engineered fluids such as drilling mud, fluids injected from the surface such as water, and naturally occurring fluids such as oil and gas. Additionally, references to water should be construed to also include water-based fluids; e.g., brine or salt water. In accordance with embodiments of the present disclosure, the production control device **38** may have a number of alternative constructions that ensure selective operation and controlled fluid flow therethrough.

**[0012]** **Fig. 2** illustrates an exemplary open hole wellbore arrangement **11** wherein the production devices of the present disclosure may be used. Construction and operation of the open hole wellbore **11** is similar in most respects to the wellbore **10** described previously. However, the wellbore arrangement **11** has an uncased borehole that is directly open to the formations **14**, **16**. Production fluids, therefore, flow directly from the formations **14**, **16**, and into the annulus **30** that is defined between the production assembly **21** and the wall of the wellbore **11**. There are no perforations, and open hole packers **36** may be used to isolate the production control devices **38**. The nature of the production control device is such that the fluid flow is directed from the formation **16** directly to the nearest production device **34**, hence resulting in a balanced flow. In some instances, packers may be omitted from the open hole completion.

**[0013]** Referring now to **Fig. 3**, there is shown one embodiment of a production control device **100** for controlling the flow of fluids from a reservoir into a production string. This flow control can be a function of one or more characteristics or parameters of the formation fluid, including water content, fluid velocity, gas content, etc. Furthermore, the control devices **100** can be distributed along a section of a production well to provide fluid control at multiple locations. This can be advantageous, for example, to equalize production flow of oil in situations wherein a greater flow rate is expected at a

"heel" of a horizontal well than at the "toe" of the horizontal well. By appropriately configuring the production control devices **100**, such as by pressure equalization or by restricting in-flow of gas or water, a well owner can increase the likelihood that an oil bearing reservoir will drain efficiently. Exemplary production control devices are discussed herein below.

**[0014]** In one embodiment, the production control device **100** includes a particulate control device **110** for reducing the amount and size of particulates entrained in the fluids and an in-flow control device **120** that controls overall drainage rate from the formation. The particulate control device **110** can include known devices such as sand screens and associated gravel packs. In embodiments, the in-flow control device **120** utilizes a permeable medium to create a predetermined pressure drop that assists in controlling in-flow rate. Illustrative embodiments are described below.

**[0015]** An exemplary in-flow control device **120** creates a pressure drop for controlling in-flow by channeling the in-flowing fluid through one or more conduits **122** that include a permeable medium **124**. The conduits **122** form a flow space that conveys fluid from the exterior of the in-flow control device **120** to openings **126** that direct the fluid into the flow bore **102** of a wellbore tubular, e.g., tubing **22** (**Fig. 1**). In aspects, Darcy's Law may be used to determine the dimensions and other characteristics of the conduit **122** and the permeable medium **124** that will cause a selected pressure drop. As is known, Darcy's Law is an expression of the proportional relationship between the instantaneous discharge rate through a permeable medium, the viscosity of the fluid, and the pressure drop over a given distance:

$$Q = \frac{-\kappa A (P_2 - P_1)}{\mu L}$$

where Q is the total discharge,  $\kappa$  is permeability of the permeable medium, A is the cross-sectional flow area,  $(P_2 - P_1)$  is the pressure drop,  $\mu$  is the viscosity of the fluid, and L is the length of the conduit. Because permeability, cross-sectional flow area, and the length of the conduit are

characteristics of the in-flow control device **120**, the in-flow control device **120** may be constructed to provide a specified pressure drop for a given type of fluid and flow rate.

**[0016]** The permeability of the conduit **122** may be controlled by appropriate selection of the structure of the permeable medium **124**. Generally speaking, the amount of surface area along the conduit **122**, the cross-sectional flow area of the conduit **122**, the tortuosity of conduit the **122**, among other factors, determine the permeability of the conduit **122**. In one embodiment, the permeable medium **124** may be formed using elements that are packed into the conduit **122**. The elements may be granular elements such as packed ball bearings, beads, or pellets, or fibrous elements such as "steel wool" or any other such element that form interstitial spaces through which a fluid may flow. The elements may also be capillary tubes arranged to permit flow across the conduit **122**. In other embodiments, the permeable medium **124** may include one or more bodies in which pores are formed. For example, the body may be a sponge-like object or a stack of filter-type elements that are perforated. It will be appreciated that appropriate selection of the dimensions of objects such as beads, the number, shape and size of pores or perforations, the diameter and number of capillary tubes, etc., may yield the desired permeability for a selected pressure drop.

**[0017]** Referring now to **Figs. 4 and 5**, there is shown another embodiment of an in-flow control device **140** that creates a pressure drop by conveying the in-flowing fluid through an array of plug elements, each of which is designated with numeral **142**. Each plug element **142** includes a permeable medium **144**. The plug element **142** may be formed as a tubular member having a bore **146** filled with elements **148**. The plug elements **142** may be positioned in a housing **150** that may be formed as a ring or collar that surrounds the wellbore tubular such as the tubing string **22** (**Fig. 1**). The depiction of four plug elements **142** is purely arbitrary. Greater or fewer number of plug elements **142** may be used as needed to meet a particular application. The housing **150** may be connected to the particulate control device **110** (**Fig. 3**) either directly or with an adapter ring **152**. Additionally,

the housing **150** may include an access port **154** that provides access to the interior of the housing. Orifices **156** provide fluid communication between the in-flow control device **140** and the flow bore **102** of the tubing string **22** (Fig. 1).

[0018] Referring now to Fig. 5, in certain embodiments, a flow control element **158** may be used to maintain a predetermined flow condition across the in-flow control device **140**. For example, the flow control element **158** may be a check valve, a frangible element, or other device that opens when exposed to a preset pressure differential. In one scenario, the flow control element **158** may be configured to open when a sufficient pressure differential exists across the in-flow control device **140**. Such a pressure differential may be associated with a substantial reduction of flow across the plug elements **142** due to clogging of the permeable medium **144**. Allowing some controlled fluid in-flow in such situations may be useful to maintain an efficient drainage.

[0019] In certain embodiments, an occlusion body **164** may be positioned in the housing **150** to temporarily block fluid flow through the in-flow control device **140**. The occlusion body **164** may be formed of a material that ruptures, dissolves, fractures, melts or otherwise disintegrates upon the occurrence of a predetermined condition. In some embodiments, the occlusion body **164** may be positioned downstream of the plug member **142** as shown or upstream of the plug member **142**. In other embodiments, the occlusion body **164** may be a material that fills the interstitial spaces of the plug member **142**. During deployment or installation of the in-flow control device **140** into a well, the occlusion body **164** allows a relatively high pressure differential to exist across the in-flow control device **140**. This may be advantageous during installation because a well may require relatively high pressures in order to actuate valves, slips, packers, and other types of hydraulically actuated completion equipment. Once a given completion activity is completed, the occlusion body **164** may disintegrate due to exposure to a fluid, such as oil, or exposure to the wellbore environment

(e.g., elevated pressure or temperatures) or exposure to material pumped downhole.

**[0020]** During operation, fluid from the formation flows through the particulate control device **110** and into the in-flow control device **140**. As the fluid flows through the permeable medium in the plug members **142**, a pressure drop is generated that results in a reduction of the flow velocity of the fluid. Furthermore, as will be discussed in more detail later, the back pressure associated with the in-flow control device assists in maintaining an efficient drainage pattern for the formation.

**[0021]** In some embodiments, an in-flow control device, e.g., the in-flow control device **120** or **140**, may be constructed to have a preset pressure drop for a given fluid. In other embodiments, an in-flow control device may be constructed to be tuned or configured "in the field" to provide a selected pressure drop. For example, the housing **150** may be configured to have several receptacles **160** for receiving a plug element **142**. Positioning a plug element **142** in each of the available receptacles **160** would maximize the number of flow conduits and provide the lowest pressure drops. To increase the pressure drop, one or more receptacles **160** may be fitted with a "blank" or stopping member to block fluid flow. Thus, in one arrangement, varying the number of plug elements **142** may be used to control the pressure differential generated by the in-flow control device. Another arrangement may include constructing the housing **150** to receive plug elements **142** having different flow characteristics. For instance, a first plug element **142** may have a first pressure drop, a second plug element **142** may have a second pressure drop greater than the first pressure drop, and a third plug element **142** may have a third pressure drop greater than the second drop. The changes in pressure drop can be controlled by, for example, varying the characteristics of the porous material or the length of the plug element **142**. It should be appreciated that an in-flow control device that can vary the number and / or characteristics of the plug elements **142** can be configured

or re-configured at a well site to provide the pressure differential and back pressure to achieve the desired flow and drainage characteristics for a given reservoir.

**[0022]** It should also be understood that plug elements **142** are merely illustrative of the structures that may be used to interpose a permeable medium into a flow from a formation into a wellbore tubular. For instance, the housing may include a flow passage for receiving one or more serially aligned porous disks. The pressure drop may be controlled by varying the number of disks and / or the permeability of the disks. In another variant, the housing may include a flow cavity that can be filled or packed with elements such as spherical members. The pressure drop may be control by varying the diameter of the spherical members. In still other variants, two or more media may be used. For example, such a medium may include a combination of capillary tubes, granular elements, and / or sponge-like material.

**[0023]** Further, it should be understood that **Figs. 1 and 2** are intended to be merely illustrative of the production systems in which the teachings of the present disclosure may be applied. For example, in certain production systems, the wellbores **10, 11** may utilize only a casing or liner to convey production fluids to the surface. The teachings of the present disclosure may be applied to control the flow into those and other wellbore tubulars.

**[0024]** For the sake of clarity and brevity, descriptions of most threaded connections between tubular elements, elastomeric seals, such as o-rings, and other well-understood techniques are omitted in the above description. Further, terms such as "valve" are used in their broadest meaning and are not limited to any particular type or configuration. The foregoing description is directed to particular embodiments of the present disclosure for the purpose of illustration and explanation. It will be apparent, however, to one skilled in the art that many modifications and changes to the embodiment set forth above are possible without departing from the scope of the disclosure.

**CLAIMS**

What is claimed is:

1. An apparatus for controlling a flow of fluid from a formation into a wellbore tubular, comprising:
  - (a) a flow space configured to provide fluid communication between the formation and a bore of the wellbore tubular; and
  - (b) a permeable medium positioned in the flow space, the permeable medium having a porosity configured to induce a predetermined pressure differential across the permeable medium.
2. The apparatus of claim 1 wherein the permeable medium includes a plurality of substantially separate elements configured to have interstitial spaces therebetween when positioned in the flow space.
3. The apparatus of claim 1 wherein the permeable medium includes a substantially solid member having pores.
4. The apparatus of claim 1 further comprising a housing positioned along the wellbore tubular, the flow space being formed in the housing.
5. The apparatus of claim 4 further comprising an occlusion body in the flow space, the occlusion body being configured to disintegrate upon exposure to a preset condition.
6. The apparatus of claim 4 further comprising a plug member associated with the housing, the flow space being formed in the plug member.
7. The apparatus of claim 1 further comprising a flow restriction element configured to provide a parallel fluid communication with the bore of the wellbore tubular.
8. The apparatus of claim 1 further comprising a filtration element positioned upstream of the flow space.

9. A system for controlling a flow of a fluid from a formation into wellbore tubular, comprising:
- (a) a plurality of in-flow control devices positioned along a section of the wellbore tubular, each in-flow control device including a permeable medium positioned in a flow path between the formation and a flow bore of the wellbore tubular to control a flow characteristic.
10. The system of claim 9 wherein the flow characteristic is one of: (i) pressure, (ii) flow rate, and (iii) fluid composition.
11. The system of claim 9 wherein the porosity of each permeable medium is configured to cause a substantially uniform flow characteristic along the section of the wellbore tubular.
12. The system of claim 9 further comprising a filtration element positioned upstream of at least one of the plurality of in-flow control devices.
13. The system of claim 9 wherein the permeable medium includes a plurality of substantially separate elements configured to have interstitial spaces therebetween when positioned in the flow space.
14. The system of claim 9 wherein the permeable medium includes a substantially solid member having pores.
15. A method for controlling a flow of fluid from a formation into a wellbore tubular, comprising:
- (a) providing fluid communication between the formation and a bore of the wellbore tubular via a flow space; and
  - (b) positioning a permeable medium in the flow space, the permeable medium having a porosity configured to induce a predetermined pressure differential across the permeable medium.

16. The method of claim 15 wherein the permeable medium includes a plurality of substantially separate elements configured to have interstitial spaces therebetween when positioned in the flow space.
17. The method of claim 15 wherein the permeable medium includes a substantially solid member having pores.
18. The method of claim 15 further comprising positioning a filtration element upstream of the flow space.
19. The method of claim 15 further comprising positioning an occlusion body in the flow space, the occlusion body being configured to disintegrate upon exposure to a preset condition.
20. The method of claim 15 wherein the flow space is formed in a plug member associated with a housing.

1/5

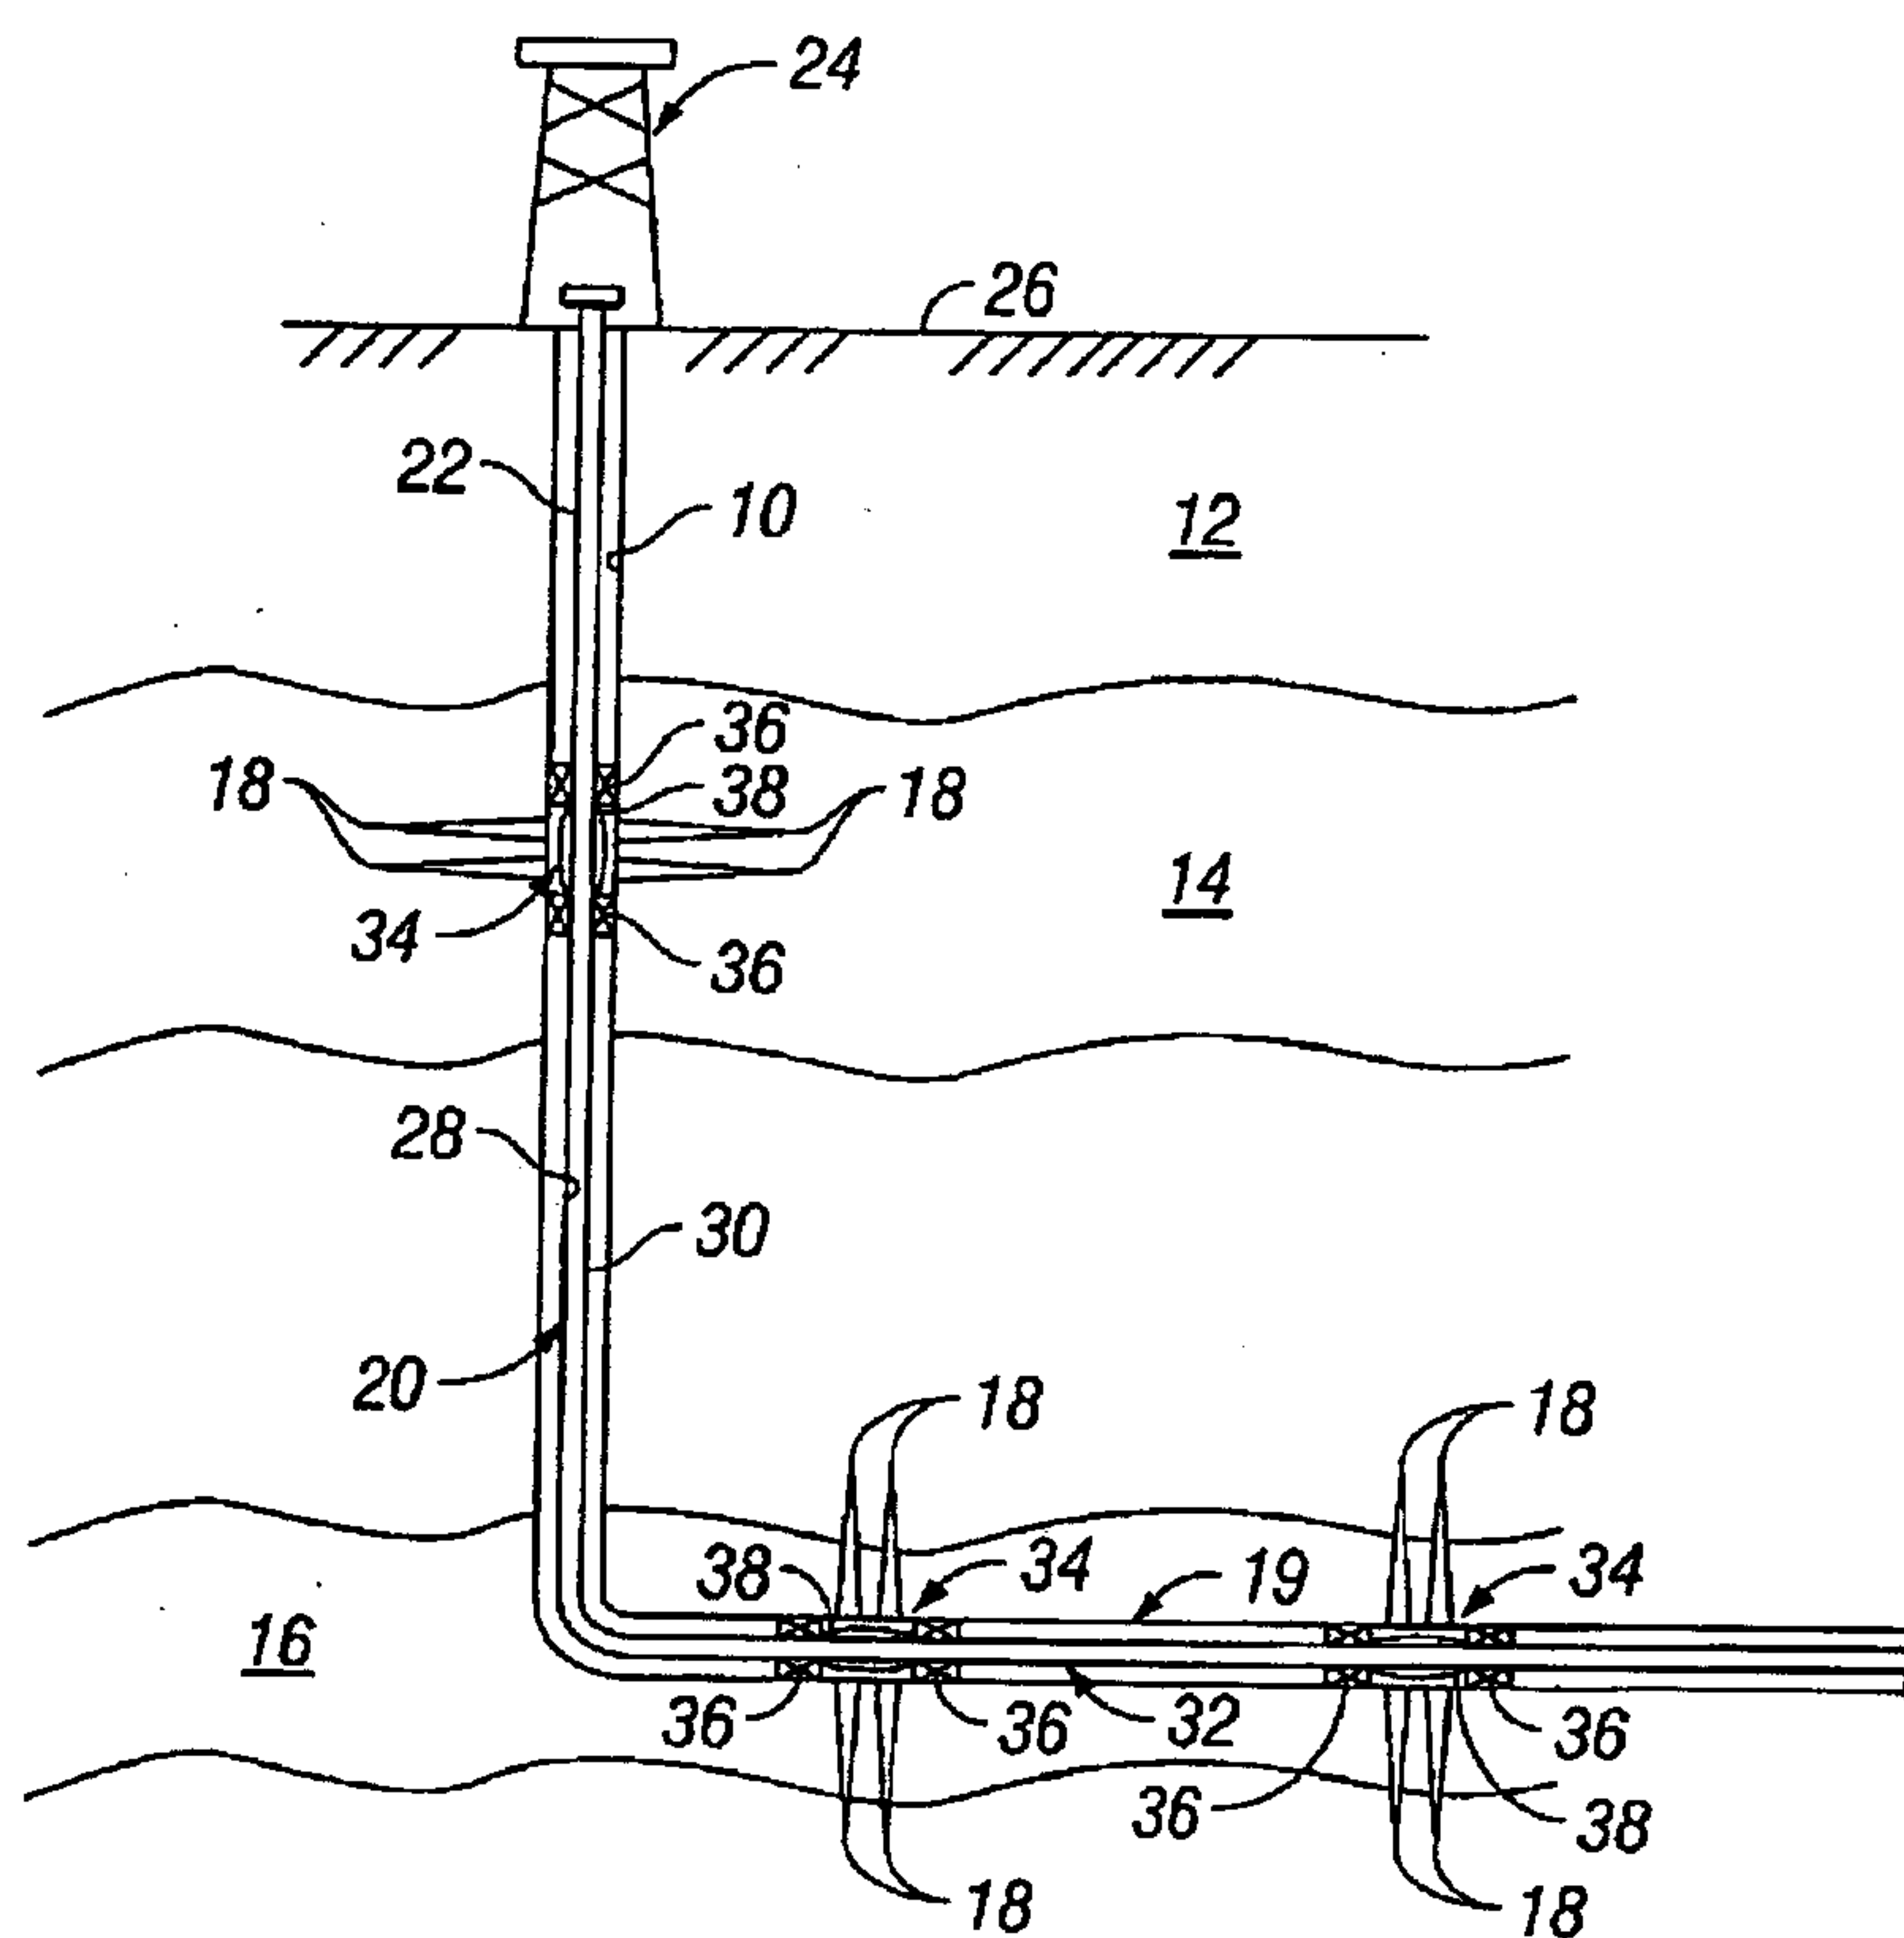


FIG. 1

2/5

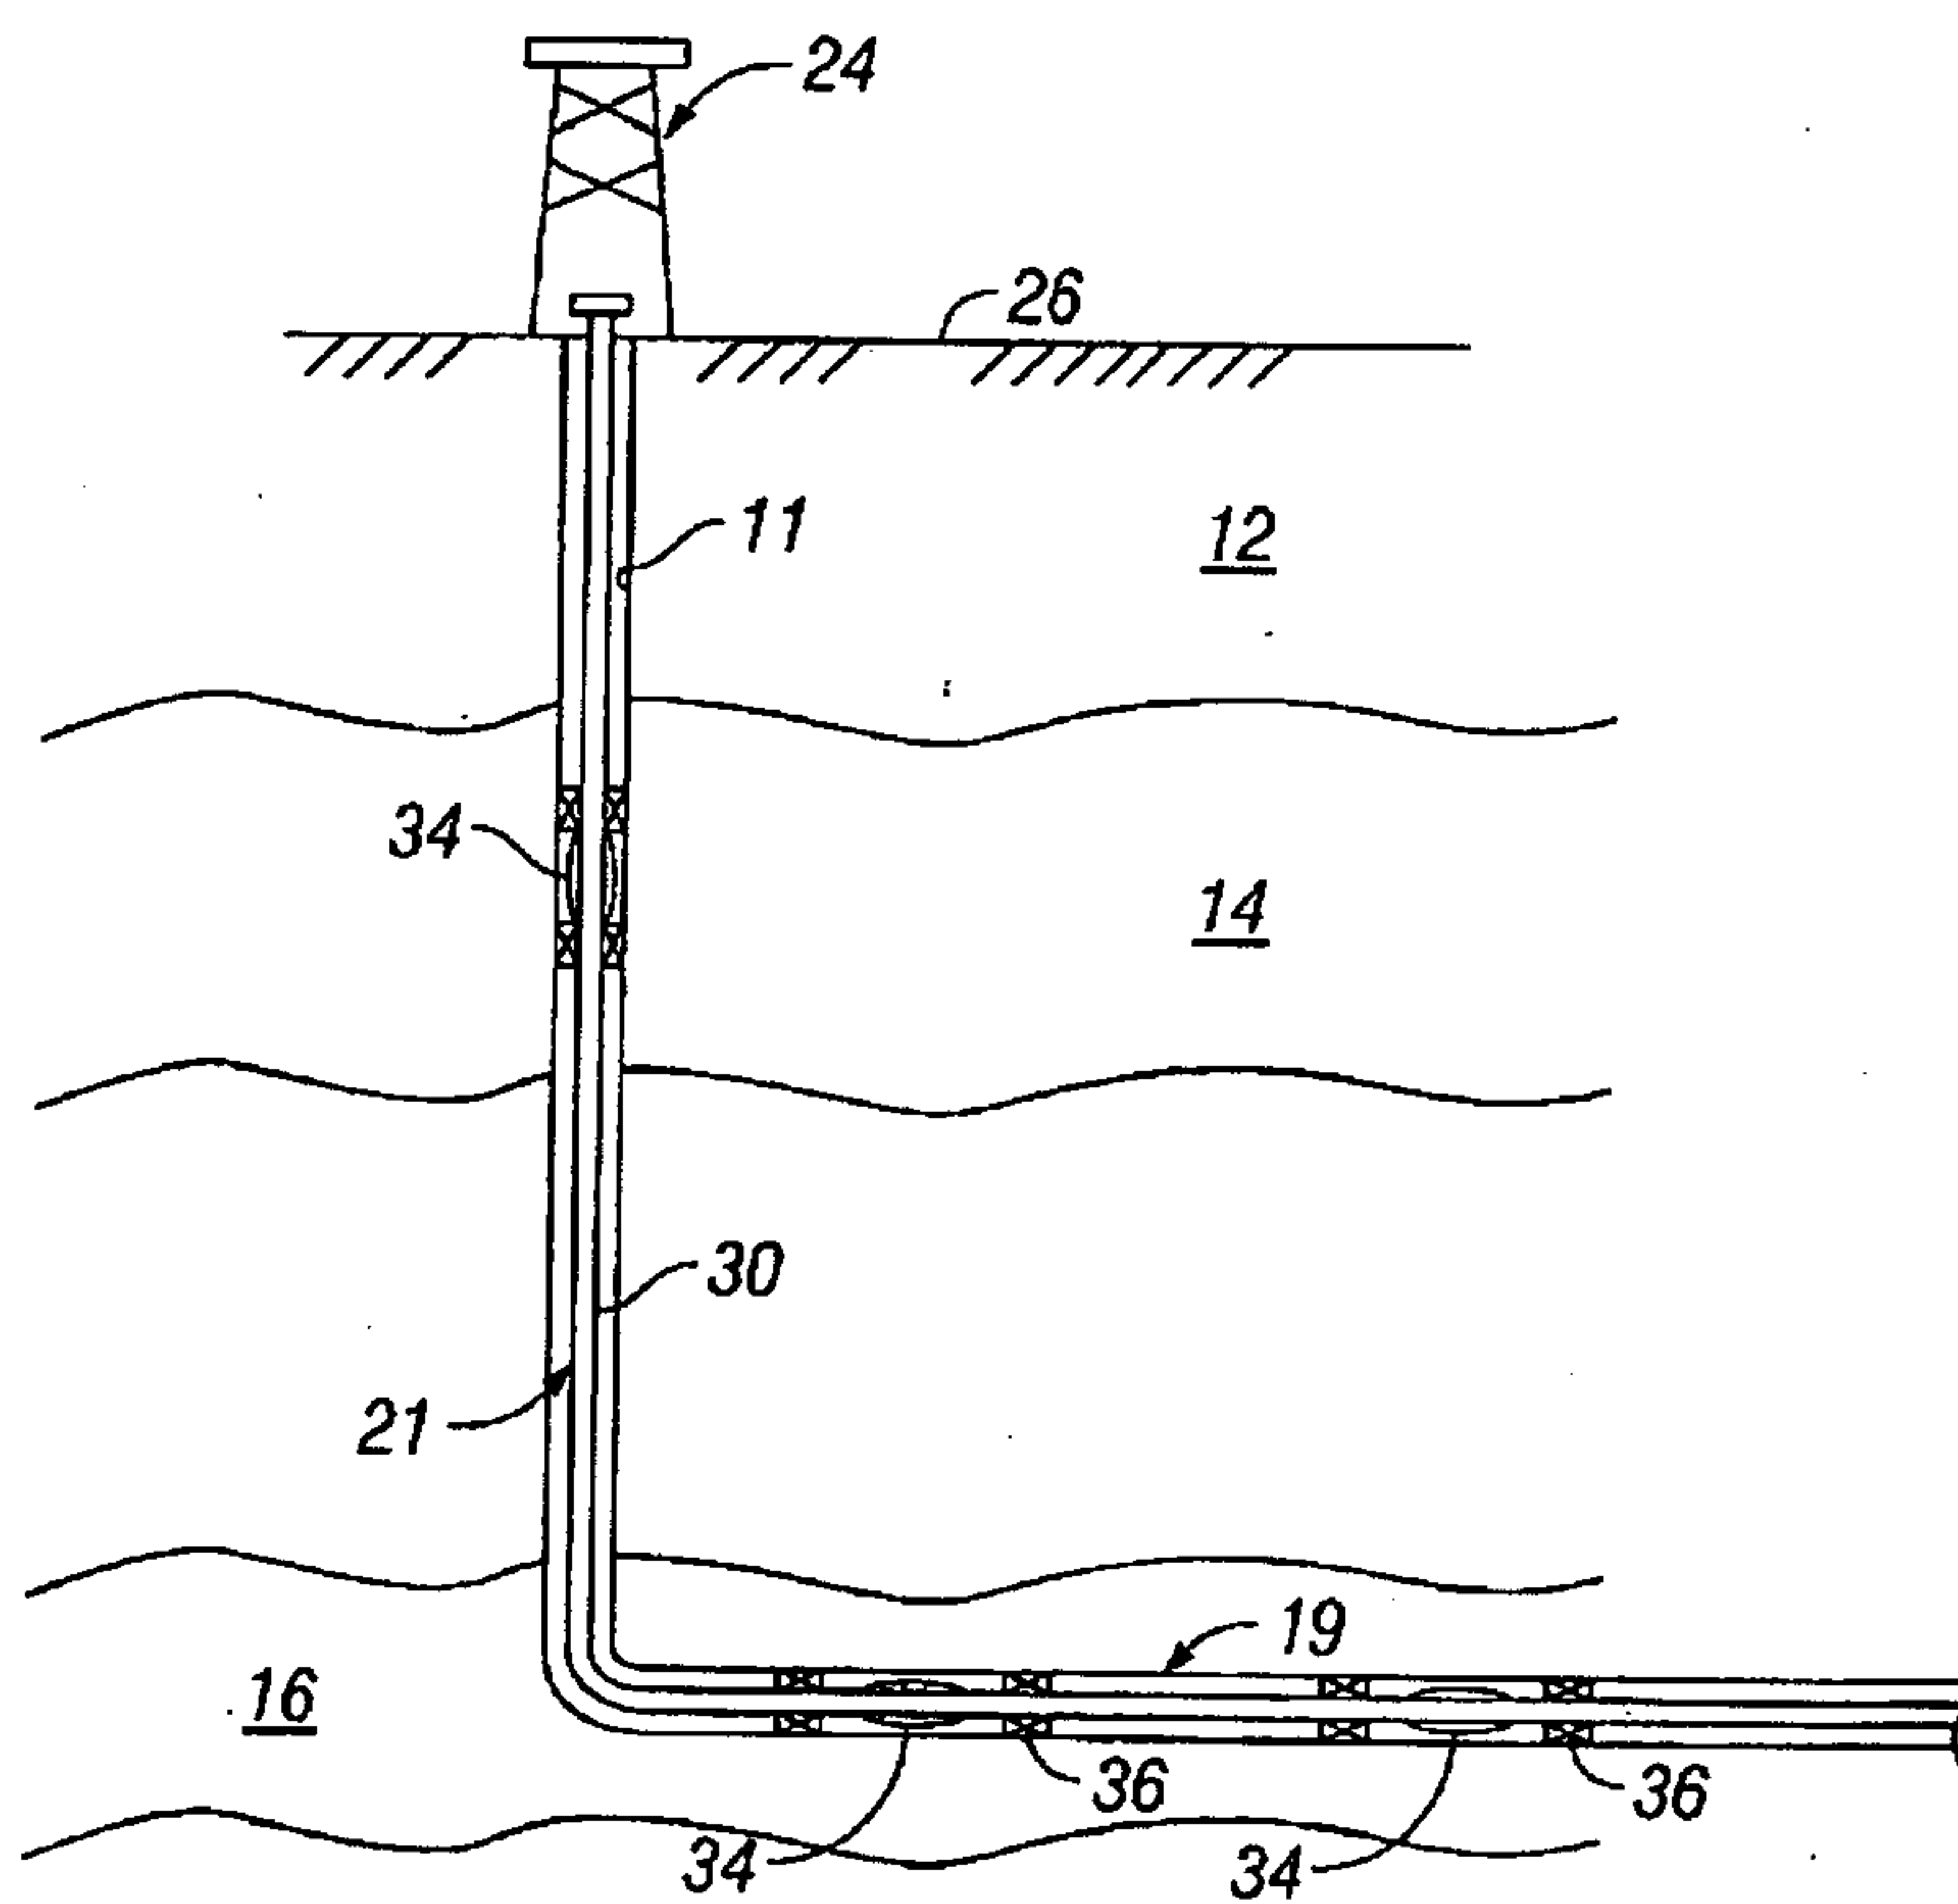


FIG. 2

3/5

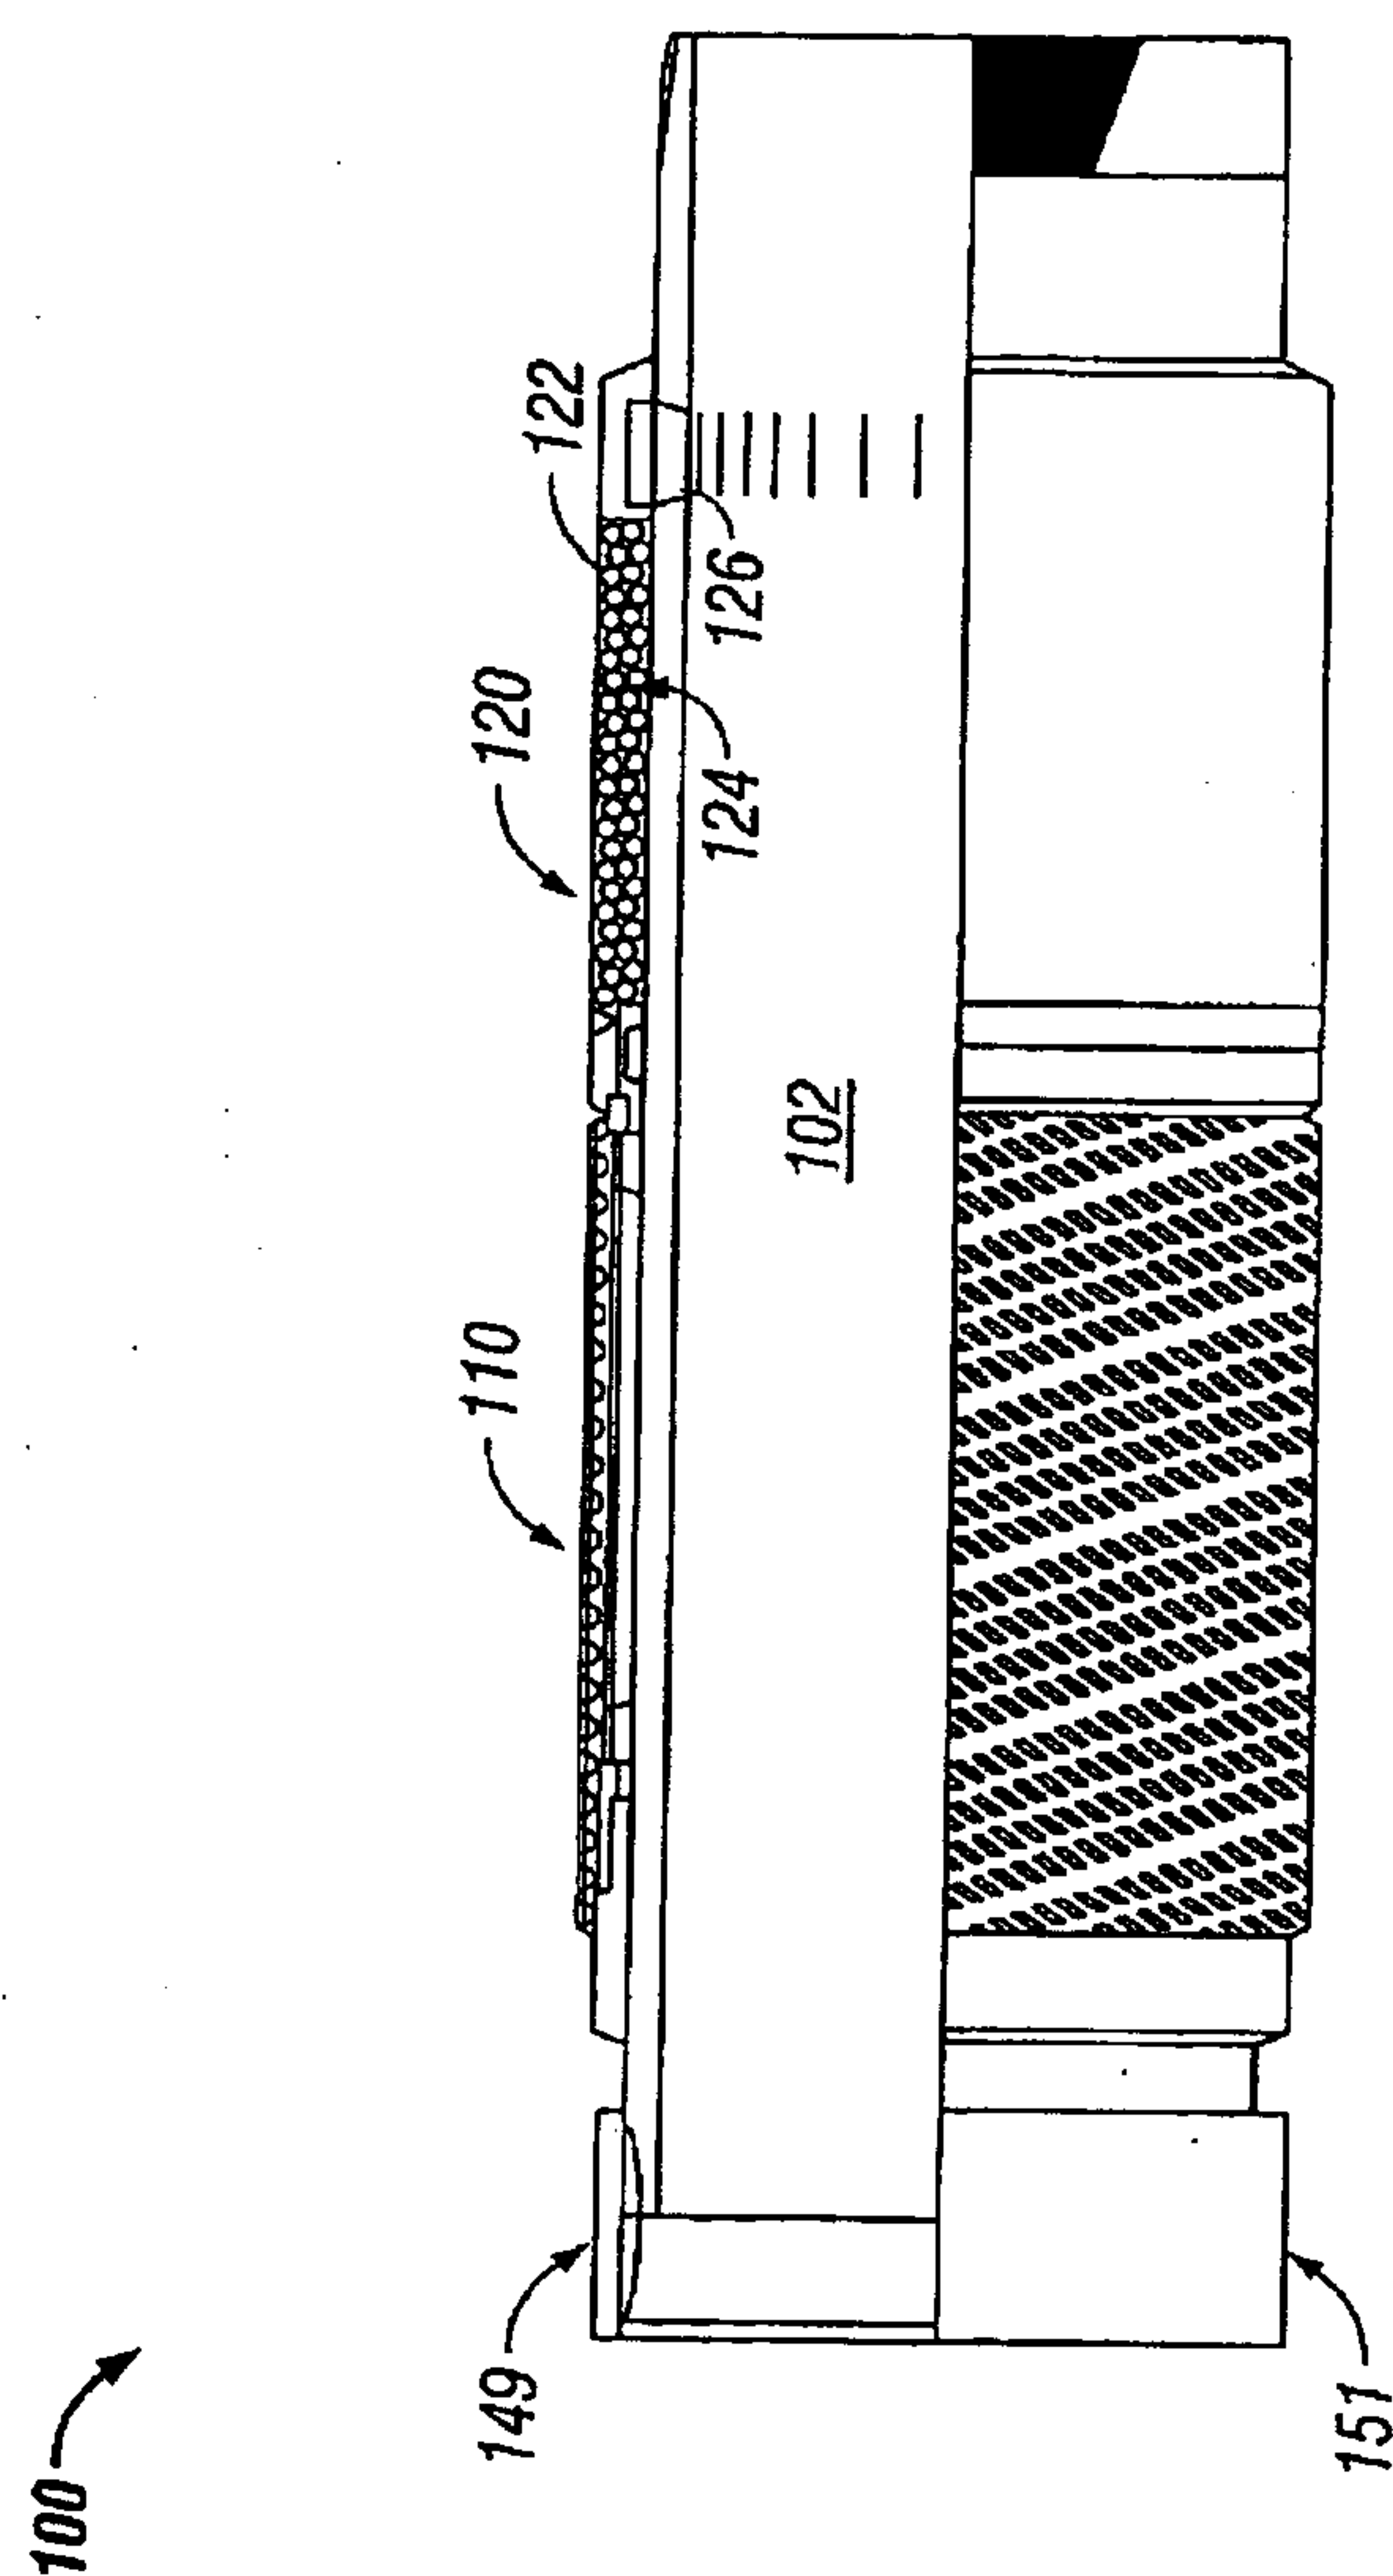


FIG. 3

4/5



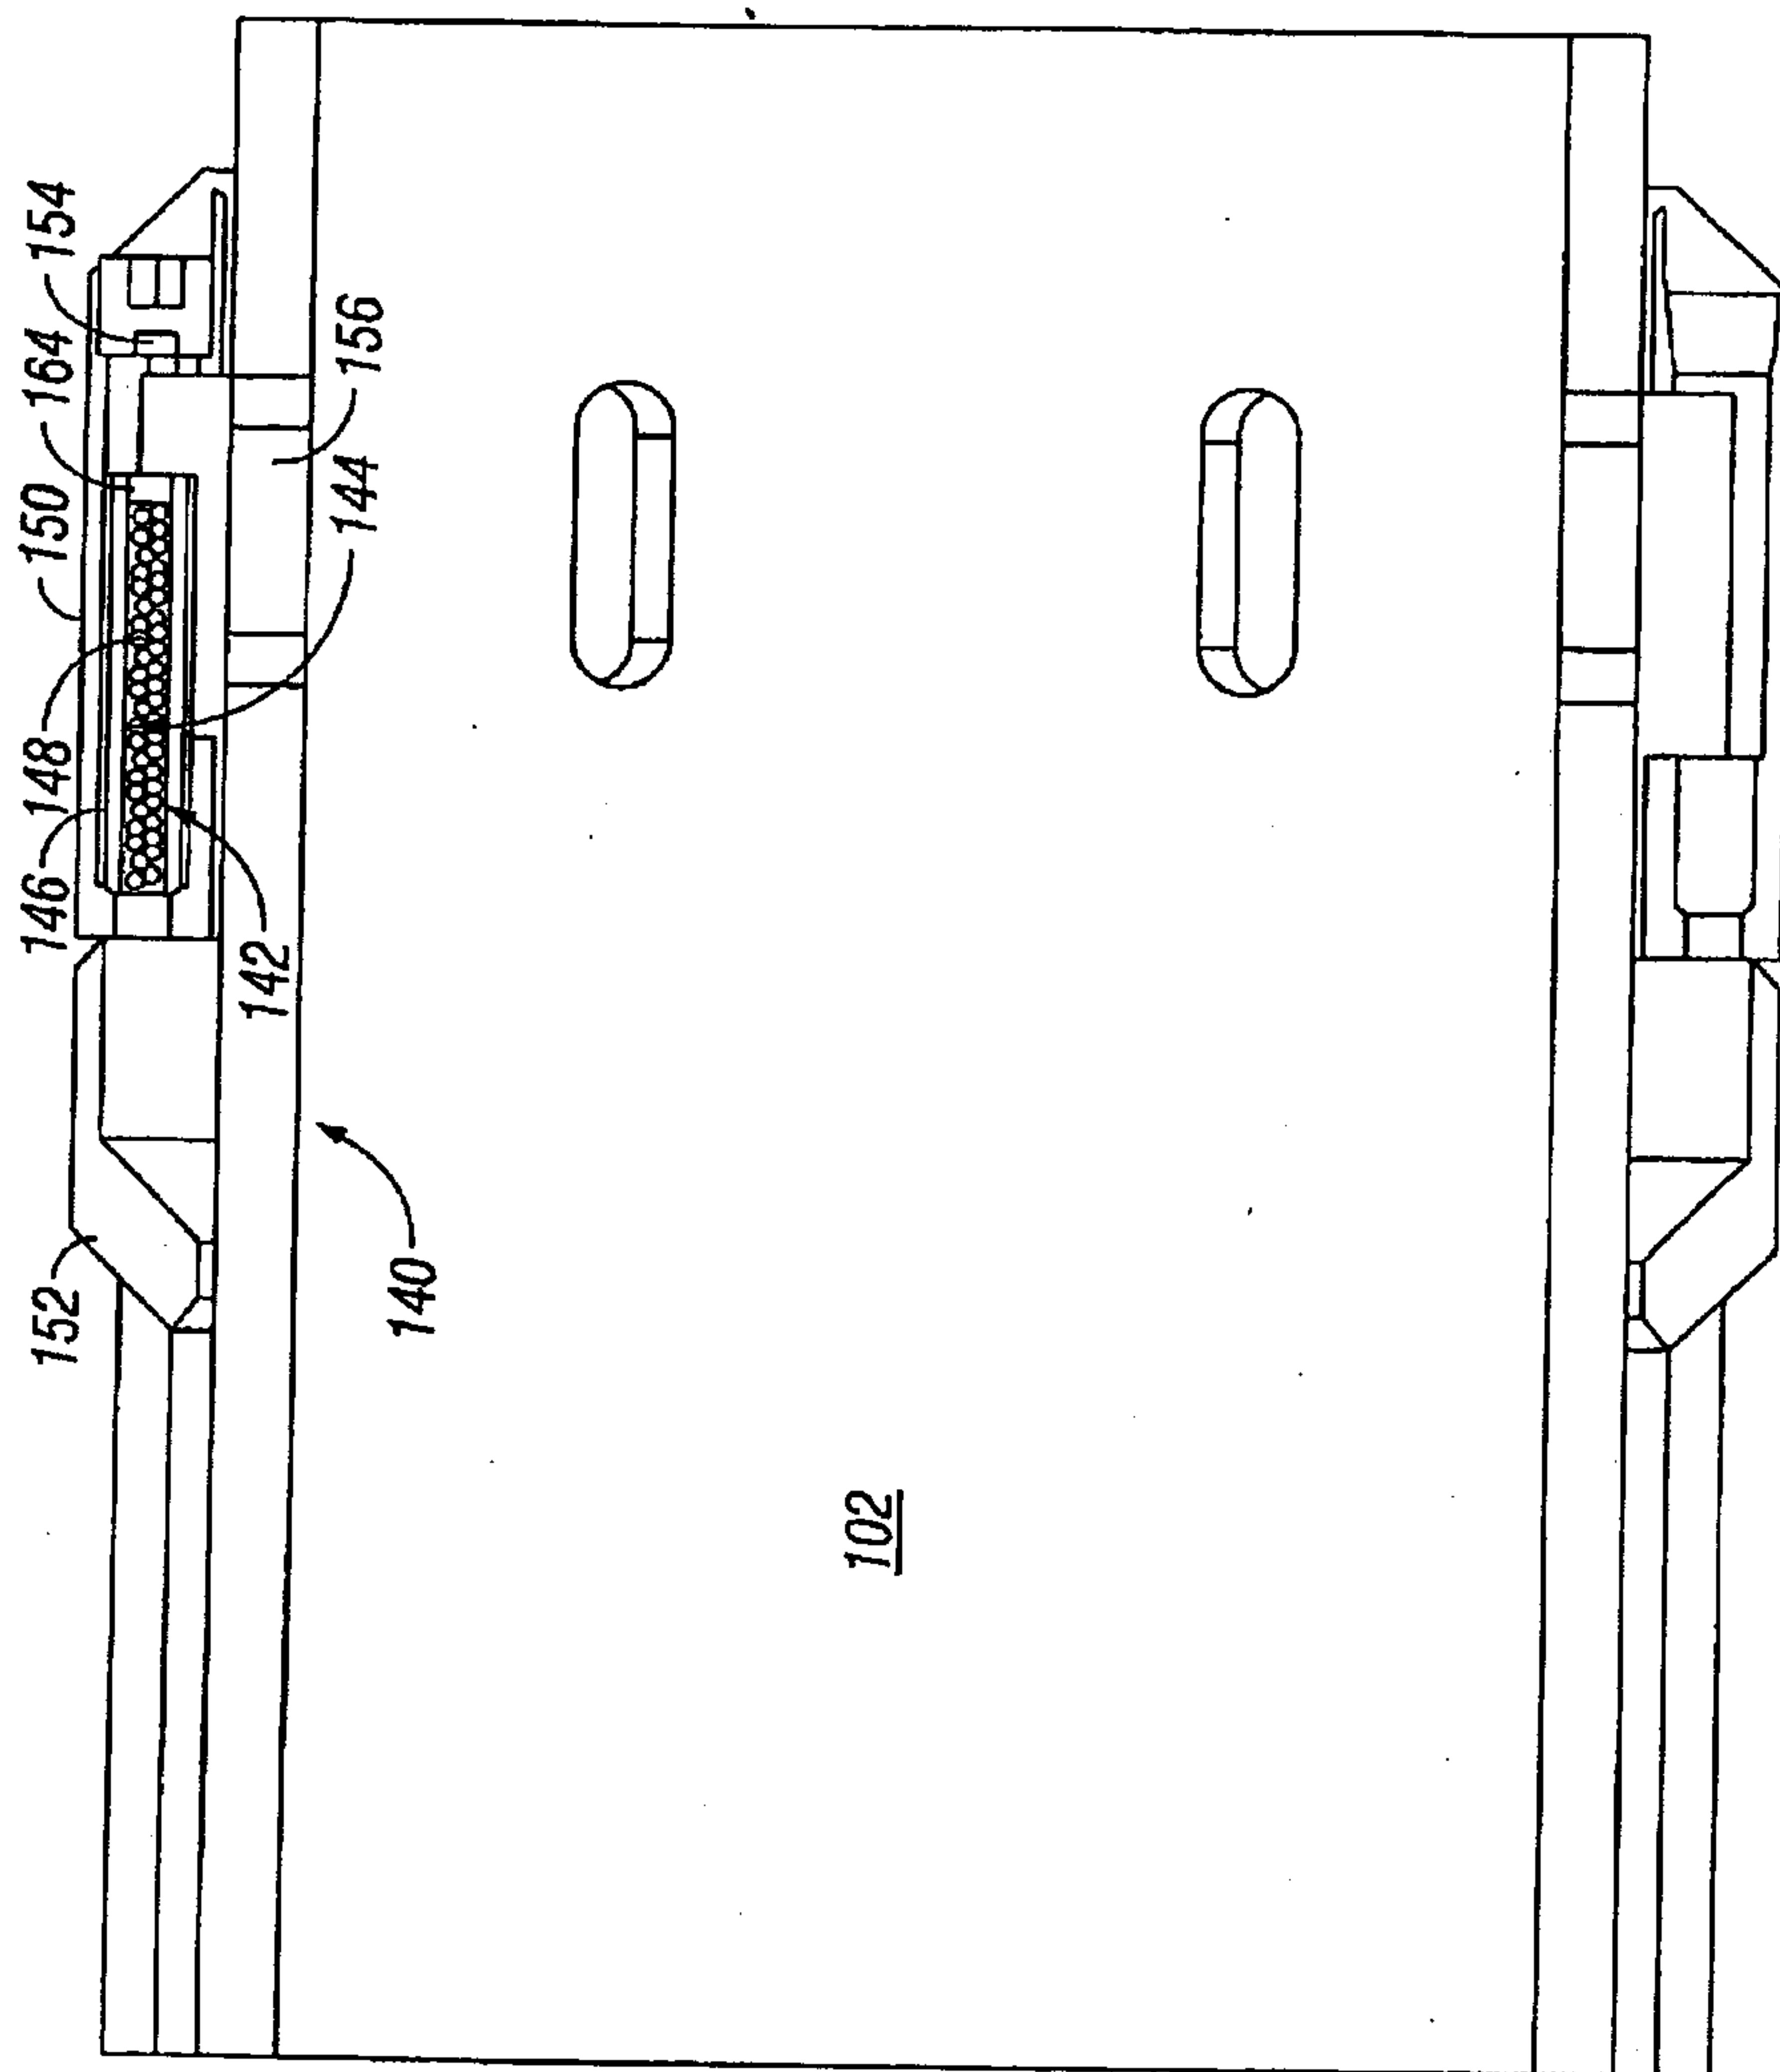


FIG. 4

**5/5**

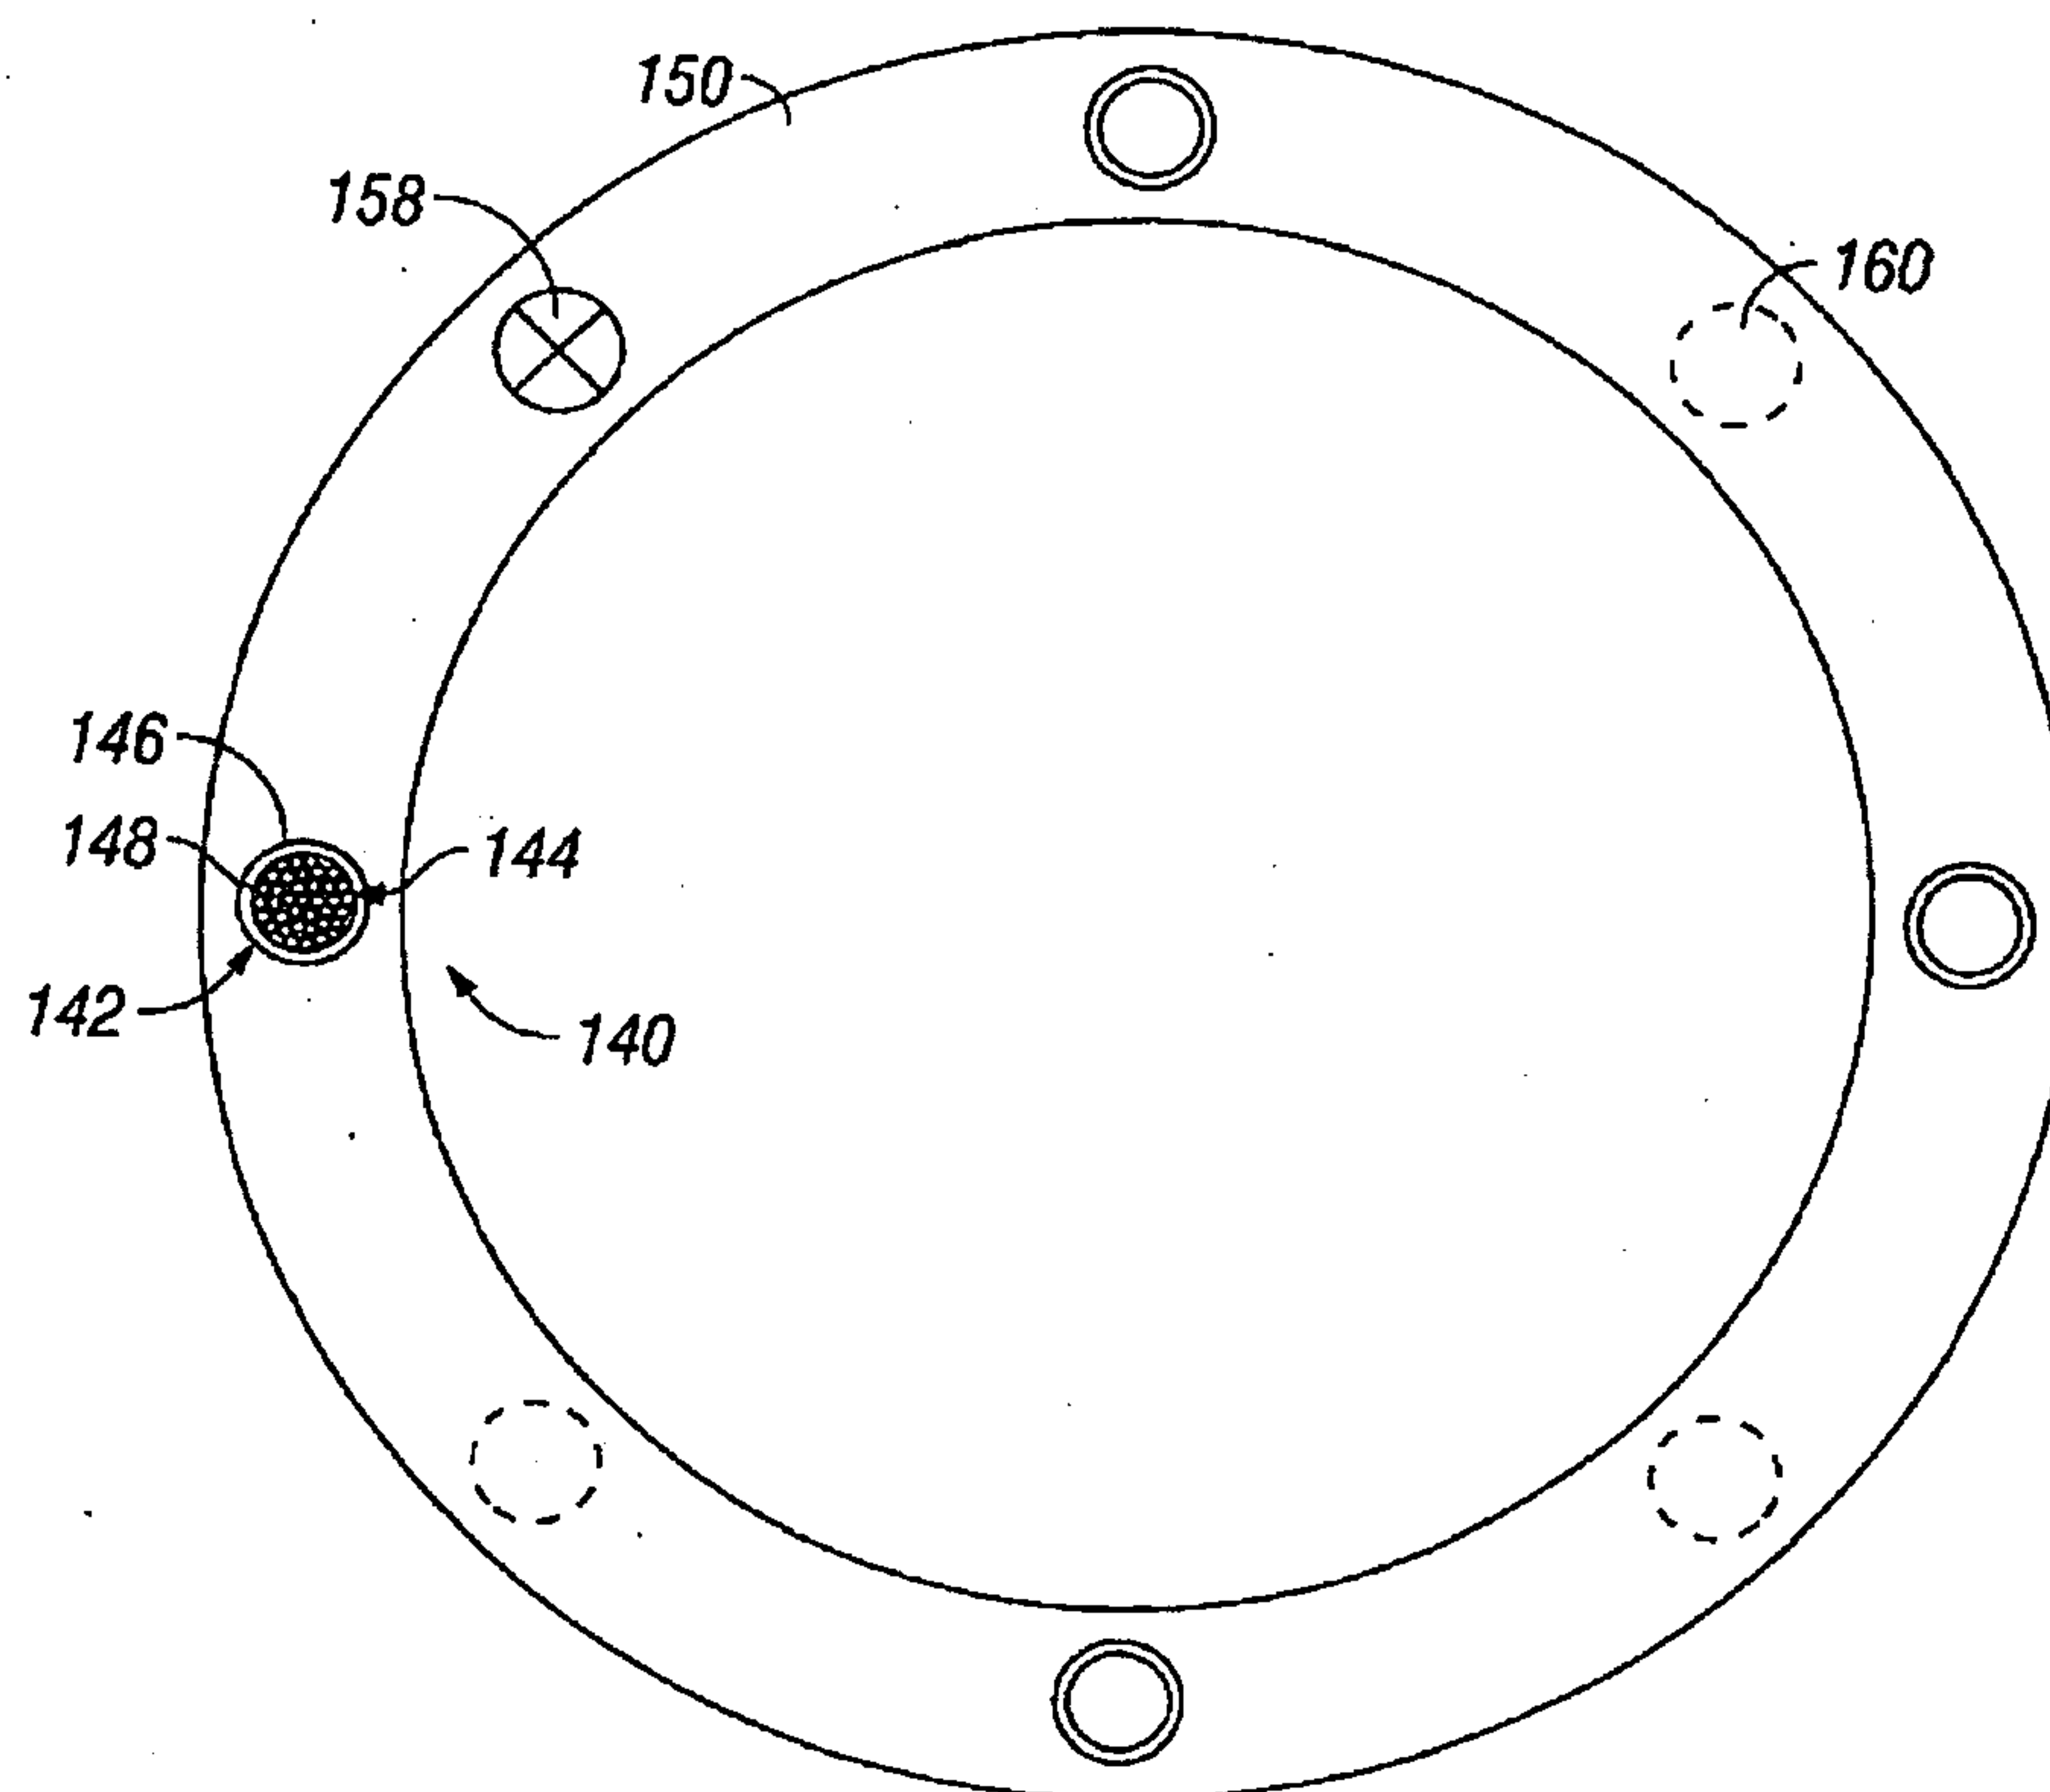

**FIG. 5**

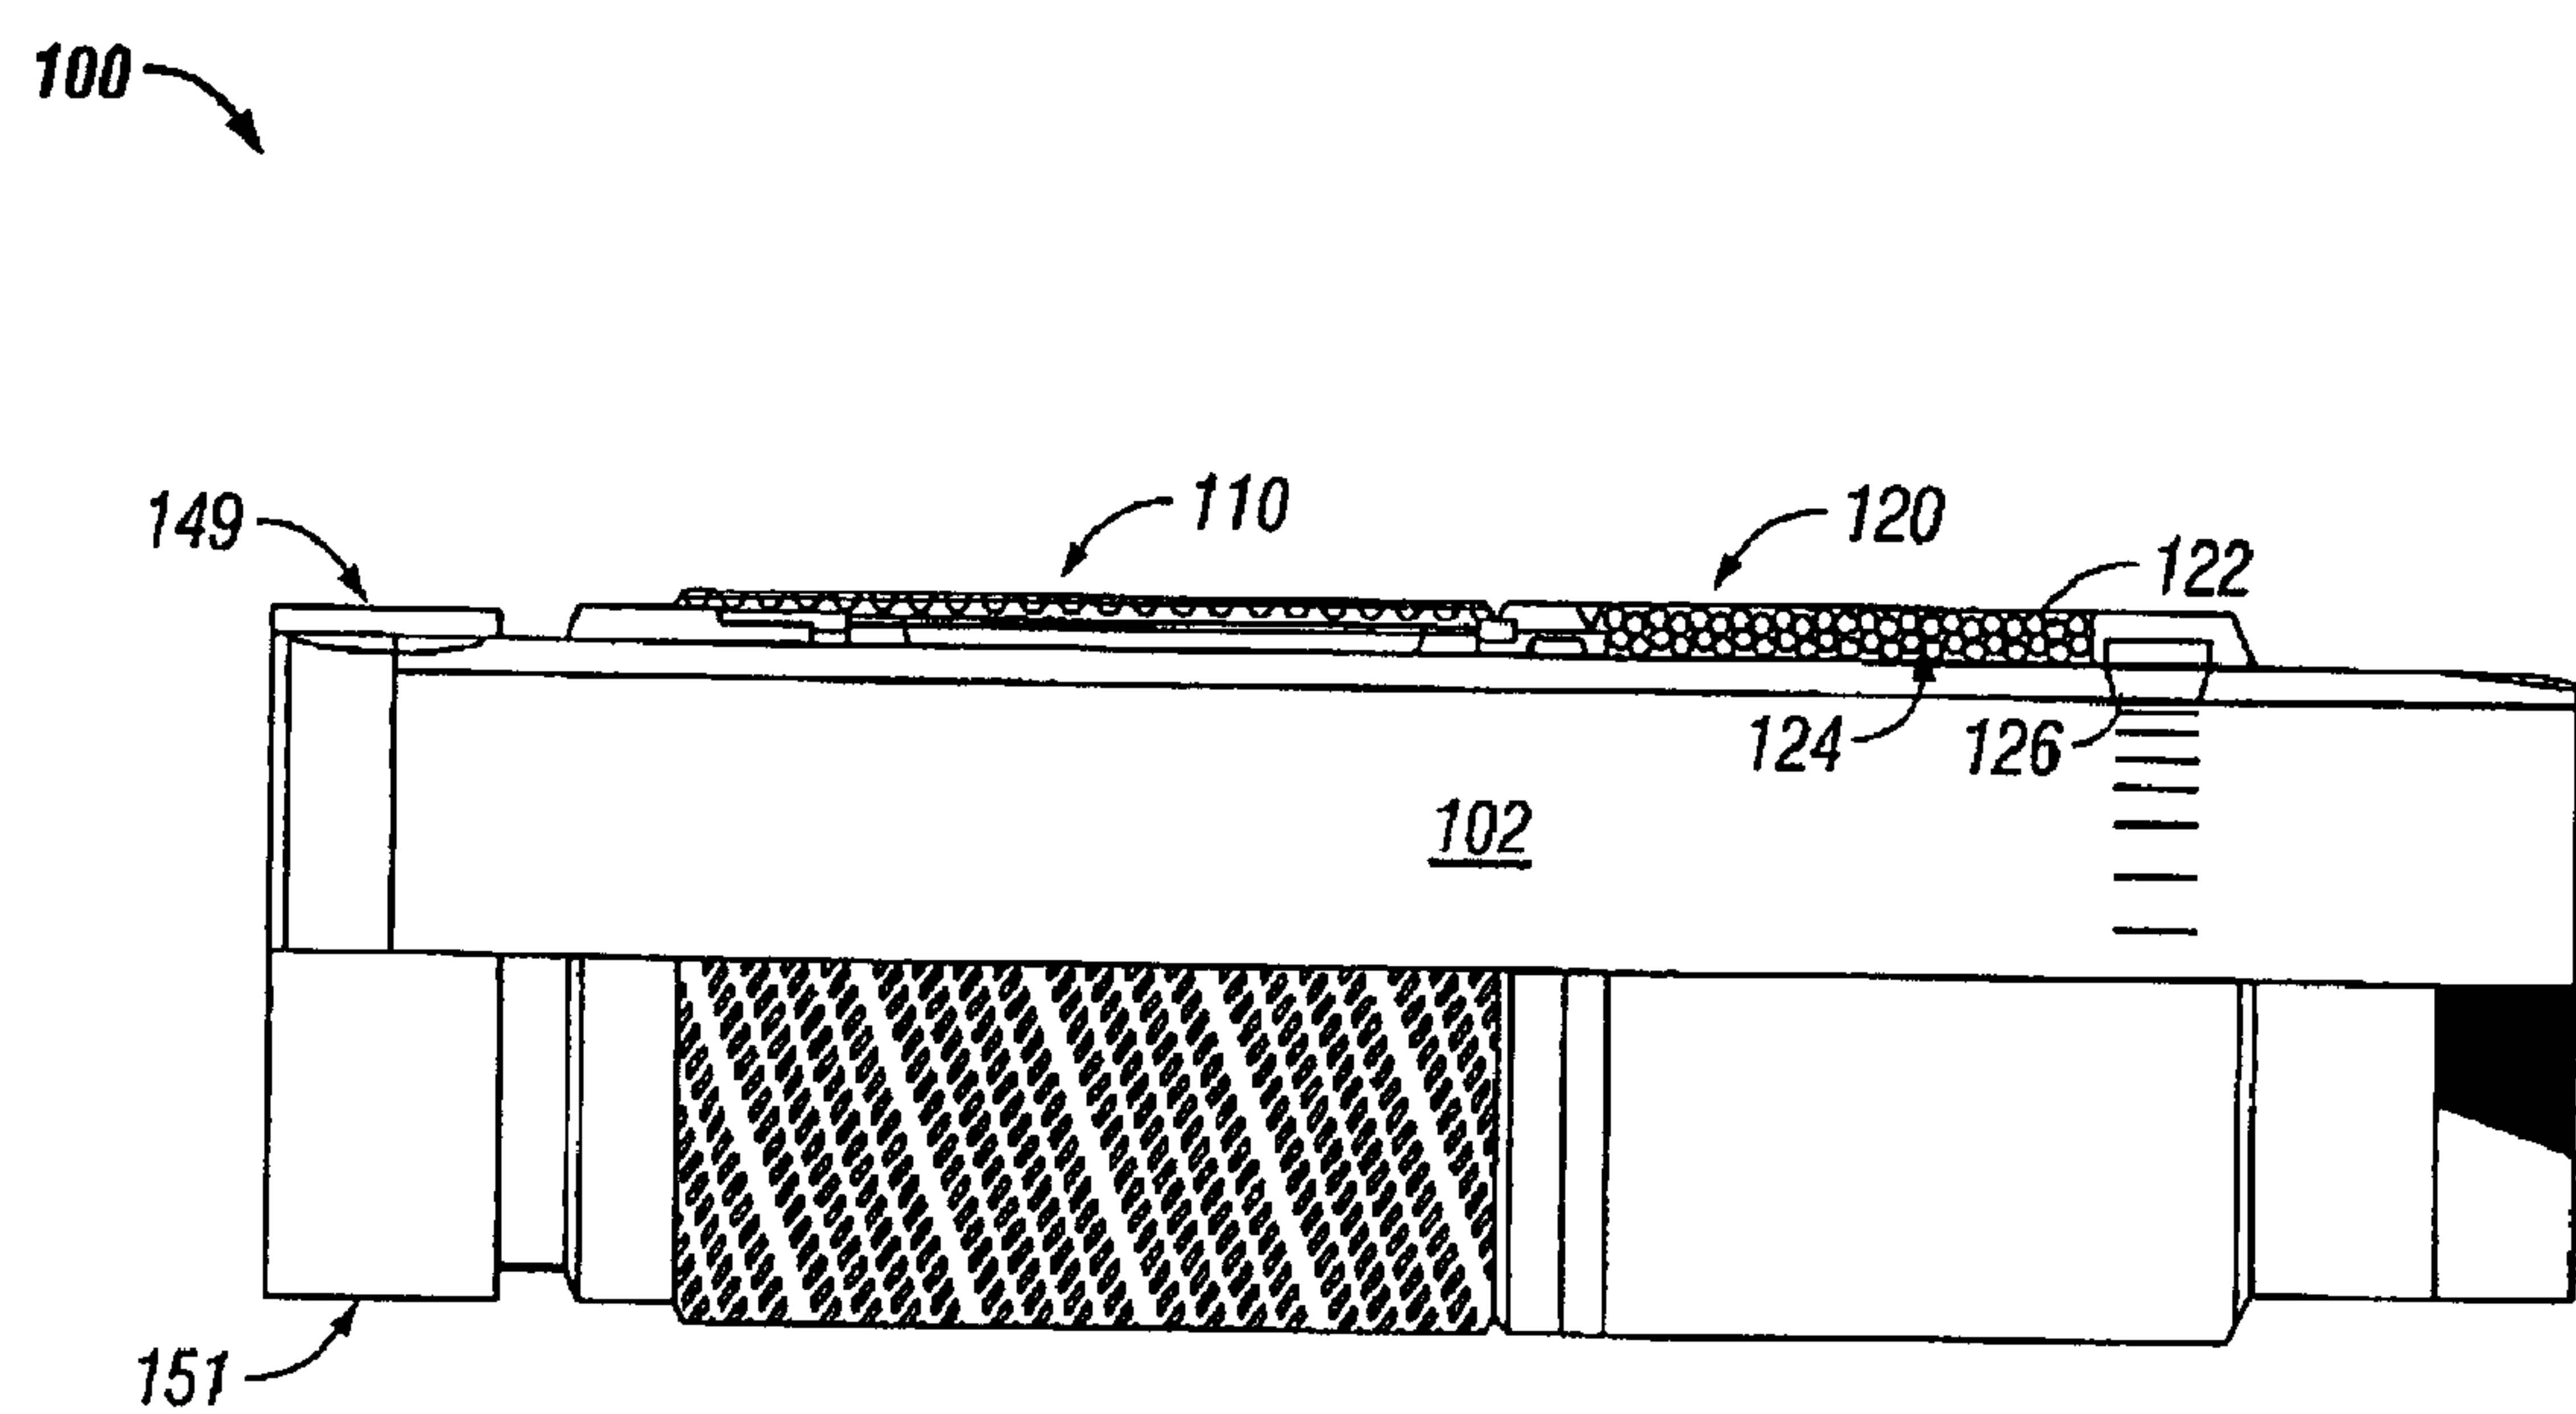

**FIG. 3**