



(11) **EP 3 951 040 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.09.2024 Bulletin 2024/39

(51) International Patent Classification (IPC):
D06F 25/00 ^(2006.01) **D06F 58/20** ^(2006.01)
D06F 37/26 ^(2006.01) **D06F 58/04** ^(2006.01)

(21) Application number: **19921139.2**

(52) Cooperative Patent Classification (CPC):
D06F 58/04; D06F 25/00; D06F 37/267;
D06F 58/20

(22) Date of filing: **18.07.2019**

(86) International application number:
PCT/CN2019/096573

(87) International publication number:
WO 2020/191962 (01.10.2020 Gazette 2020/40)

(54) **CLOTHES TREATMENT APPARATUS**
GEWEBEBEHANDLUNGSVORRICHTUNG
APPAREIL DE TRAITEMENT DE VÊTEMENTS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

- **ZHOU, Chunhao**
Wuxi, Jiangsu 214028 (CN)
- **REN, Guangqi**
Wuxi, Jiangsu 214028 (CN)

(30) Priority: **27.03.2019 CN 201920406145 U**
27.03.2019 CN 201910237996

(74) Representative: **Whitlock, Holly Elizabeth Ann**
Maucher Jenkins
Seventh Floor Offices
Artillery House
11-19 Artillery Row
London SW1P 1RT (GB)

(43) Date of publication of application:
09.02.2022 Bulletin 2022/06

(73) Proprietor: **Wuxi Little Swan Electric Co., Ltd.**
Wuxi, Jiangsu 214028 (CN)

(56) References cited:
WO-A2-2018/093201 CN-A- 105 624 968
CN-A- 107 227 598 CN-A- 109 267 286
CN-A- 109 267 286 CN-U- 207 176 307
CN-Y- 201 258 401 JP-A- 2007 151 670
JP-A- 2007 330 569 KR-A- 20050 087 454
US-A1- 2015 191 863

(72) Inventors:
• **ZHU, Lei**
Wuxi, Jiangsu 214028 (CN)
• **WANG, Guilian**
Wuxi, Jiangsu 214028 (CN)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] The present invention relates to the technical field of clothes treatment, and in particular to a clothes treatment device such as a clothes dryer and a washer-dryer.

BACKGROUND

[0002] For an existing washer-dryer, based on heat exchange between an outer tub and the outside air, hot and humid air in the tub condenses on a tub wall to form condensed water, thereby achieving the effect of clothes drying. However, since there is a small temperature difference between the outer tub and the air in the tub, even if a blower is added between the outer tub and a case, the temperature difference between the outer tub and the air in the tub cannot be effectively reduced.

[0003] A related art discloses a washer-dryer. By adding a blower between an outer tub and a case, heat exchange between the outer tub and the outside air is improved, so that the outer tub is cooled, and based on a temperature difference between the inside and outside of the outer tub, the hot and humid air in the tub condenses, thus resulting in a high cost and a poor heat exchange effect.

[0004] For this reason, another related art discloses a cycle + suction + discharge washing machine. During circulation of airflow, part of the outside air can be sucked in through a suction opening, and then part of hot and humid air can be discharged from a discharge opening. However, at an initial stage of drying, because the blower will suck in the outside air, and then discharge part of the air out of the tub, and due to arrangement of a discharge opening, a passage for suction and discharge is formed on the one hand, which causes the direct discharge of hot air, thus resulting in a slow heating-up in the initial stage; on the other hand, the direct discharge of the hot and humid air in a later state will also affect the environment. Moreover, the risk of overfoaming may occur at both the suction opening and the discharge opening, and the risk of overfoaming is relatively high. US2015191863A1 relates generally to a washer dryer in which a dryer is installed on top of the tub for heating and circulating air exhausted from a tub to dry clothes. WO2018093201A2 relates generally to a clothes treatment apparatus capable of increasing an effective air flow to clothes. CN109267286A relates generally to a drying washing machine in which a fan draws the gas in an inner cylinder into a condensation chamber to condense, and guides it into a heating air duct to be heated by a heating device and then pumped into the inner cylinder to form a cycle to dry the clothes.

SUMMARY

[0005] Aspects of the invention are set out in the claims. The present invention is intended to solve at least one of the technical problems existing in the prior art. In view of this, an objective of the present invention is to provide a clothes treatment device which has a simpler structure and high drying efficiency.

[0006] The clothes treatment device according to the invention includes:

a tub assembly defining a clothes treatment chamber therein, the tub assembly having an air inlet and an air outlet that are in communication with the clothes treatment chamber, the air inlet and the air outlet being provided at an upper part of a side wall of the tub assembly; and a clothes drying assembly including an air channel assembly communicating the air inlet with the air outlet, a heating member provided inside the air channel assembly, and a blower configured to guide air to flow, wherein the air channel assembly is provided with a vent in communication with the air outlet and the outside, and the vent is located above the air outlet.

[0007] In the clothes treatment device according to the embodiment of the present disclosure, a vent is provided and serves as an inlet/outlet of airflow to ensure a dynamic balance of air pressure between the clothes treatment chamber and the outside during the operation of the clothes treatment device. For example, when the air pressure in the clothes treatment chamber increases, part of the hot and humid air can overflow from the vent under the action of an air pressure difference, thus improving the drying efficiency; when the air pressure in the clothes treatment chamber decreases, the outside air can enter the clothes treatment chamber from the vent to participate in the circulation of the airflow, thereby realizing exchange of the hot and humid air with the outside air. In addition, compared with a technical solution with a discharge opening and a vent in the related art, by eliminating the discharge opening in the tub assembly, the clothes treatment device does not form a through airflow channel during the drying process, thereby ensuring quick heating-up in the tub assembly in the initial stage of the drying process and reducing the risk of overfoaming.

[0008] According to an embodiment of the present disclosure, a waterproof and air-permeable member is provided at the vent, thereby preventing water and foam in the clothes treatment chamber from overflowing from the vent, and ensuring that the air in the clothes treatment chamber can be discharged from the vent to the outside.

[0009] According to the invention, a flow area of the vent is within a range of 500 mm² to 1500 mm².

[0010] According to an embodiment of the present disclosure, in an axial direction of the tub assembly, the air inlet is located at a front part of the tub assembly, and the air outlet is located at a rear part of the tub assembly.

[0011] According to an embodiment of the present disclosure, the flow area of the air outlet is greater than 8000

mm².

[0012] According to an embodiment of the present disclosure, an orthographic projection of the air outlet on an imaginary horizontal plane passing through a central axis of the tub assembly deviates from the central axis of the tub assembly.

[0013] According to an embodiment of the present disclosure, the air channel assembly includes: an air channel shell mounted at the upper part of the side wall of the tub assembly, an inner cavity of the air channel shell being in communication with the air inlet; and a connecting base provided between the air channel shell and the tub assembly, the inner cavity of the air channel shell being in communication with the air outlet through an inner cavity of the connecting base, the vent being provided at the connecting base.

[0014] In some embodiments, a filter assembly and a spraying member are provided inside the connecting base, the filter assembly is configured to filter air discharged from the air outlet, and the spraying member is located above the filter assembly.

[0015] In some examples, the filter assembly includes a filter screen and an annular connecting frame, and the filter screen is mounted in the connecting base through the annular connecting frame.

[0016] In some embodiments, the air outlet is located below the connecting base, a bottom of the connecting base is defined with a first air-passing opening, and the first air-passing opening is in communication with the air outlet; a first latching rib is provided in a circumferential direction of one of the first air-passing opening and the air outlet, and a first latching groove fitted with the first latching rib is provided in a circumferential direction of the other one of the first air-passing opening and the air outlet.

[0017] In some embodiments, a filter screen and an annular connecting frame are connected in the connecting base, and the filter screen is mounted at the first air-passing opening through the annular connecting frame.

[0018] In some examples, a spraying member is further provided in the connecting base.

[0019] According to a further embodiment of the present disclosure, a bottom of the air channel shell is defined with a mounting opening, a top of the connecting base has a second air-passing opening, and the second air-passing opening is in communication with the mounting opening; a second latching rib is provided in a circumferential direction of one of the second air-passing opening and the mounting opening, and a second latching groove fitted with the second latching rib is provided in a circumferential direction of the other one of the second air-passing opening and the mounting opening.

[0020] According to a further embodiment of the present disclosure, an outer surface of the connecting base is provided with a connecting lug, an outer surface of the air channel shell is provided with a mounting lug, and the connecting base and the air channel shell are connected by a fastener passing through the connecting

lug and the mounting lug.

[0021] According to a further embodiment of the present disclosure, the vent is provided to a side of the connecting base.

[0022] In some embodiments, the side of the connecting base is provided with a tube head protruding outwards, and the tube head extends in an up-down direction and is defined with the vent.

[0023] According to a further embodiment of the present disclosure, the air channel shell includes: an air channel base arranged above the tub assembly and the connecting base; an air channel cover plate covering a part of the air channel base; and a blower cover plate covering the other part of the air channel base, a fan of the blower being arranged between the blower cover plate and the air channel base.

[0024] In some embodiments, a side of the blower cover plate away from the air channel base is provided with a mounting recess recessed downwards for mounting a driving motor of the fan.

[0025] In some examples, a side wall of the mounting recess is provided with a plurality of spacer ribs arranged at intervals along a circumferential direction of the mounting recess for spacing at least a part of the driving motor apart from the side wall of the mounting recess. Each of the spacer ribs includes an inner rib section and an outer rib section connected to each other, the inner rib section is located in the mounting recess and extends along a depth direction of the mounting recess, and the plurality of outer rib sections are arranged in a radial way and located outside the mounting recess.

[0026] In some embodiments, a top of a side wall of the air channel base is defined with a groove extending in a circumferential direction, and one side of the air channel cover plate and the blower cover plate facing the air channel base are each provided with a protruding rib fitted with the groove.

[0027] The additional aspects and advantages of the present disclosure will be set forth in part in the following description and become apparent in part from the following description or be understood through the practice of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The above-described and/or additional aspects and advantages of the present disclosure will become apparent and readily understood from the description of embodiments in conjunction with the following accompanying drawings, where

FIG 1 is a perspective view of a clothes treatment device according to an embodiment of the present disclosure;

FIG 2 is a rear view of the clothes treatment device shown in FIG 1;

FIG 3 is a cross-sectional view taken along line A-A in FIG 2;

FIG 4 is a side view of the clothes treatment device shown in FIG 1;

FIG 5 is a cross-sectional view taken along line B-B in FIG 4;

FIG 6 is an enlarged view of a part in FIG 5;

FIG 7 is an exploded view of an air channel assembly of a clothes treatment device according to an embodiment of the present disclosure;

FIG 8 is an enlarged view of part C in FIG 7; and

FIG 9 is an enlarged view of part D in FIG 7.

Reference numerals:

[0029]

clothes treatment device 100,
tub assembly 10,
outer tub 11, air inlet 101, air outlet 102,
inner tub 12, clothes treatment chamber 121,
clothes drying assembly 20,
air channel shell 21, air channel 2101, air channel
outlet 2104, mounting opening 2105,
air channel base 211, groove 2112, a protruding rib
2113, mounting lug 2114,
air channel cover plate 212,
blower cover plate 213, mounting recess 2131, spacer
rib 2132, inner rib section 2133, outer rib section
2134,
connecting base 214, vent 2141, first air-passing
opening 2142, second air-passing opening 2143,
first latching groove 2144, first latching rib 2145, second
latching groove 2146, second latching rib 2147,
connecting lug 2148, tube head 2149
annular connecting frame 216, spaying member
217,
heating member 22,
blower 23, fan 231, driving motor 232.

DETAILED DESCRIPTION

[0030] Embodiments of the present disclosure will be described below in detail. Examples of the embodiments are illustrated in the accompanying drawings, where the same or similar reference numerals throughout the specification refer to the same or similar elements or elements having the same or similar functions. The embodiments described below with reference to the accompanying drawings are exemplary and are intended to be illustrative only and are not to be construed as limiting the scope of the present disclosure.

[0031] A clothes treatment device 100 according to an embodiment of the present disclosure will be described below with reference to FIGS. 1 to 9. The clothes treatment device 100 here may be configured as a clothes dryer or a washer-dryer.

[0032] As shown in FIGS. 1 to 5, the clothes treatment device 100 according to the embodiment of the present disclosure includes a tub assembly 10 and a clothes dry-

ing assembly 20.

[0033] The tub assembly 10 defines a clothes treatment chamber 121 therein. The tub assembly 10 has an air inlet 101 and an air outlet 102. The air inlet 101 and the air outlet 102 are both in communication with the clothes treatment chamber 121, and the air inlet 101 and the air outlet 102 are provided at an upper part of a side wall of the tub assembly 10.

[0034] Further, the clothes drying assembly 20 includes an air channel assembly, a heating member 22 and a blower 23. The air channel assembly communicates the air inlet 101 with the air outlet 102. The air channel assembly has an air channel 2101, an air channel inlet of the air channel 2101 is in communication with the air outlet 102, and an air channel outlet 2104 of the air channel 2101 is in communication with the air inlet 101.

[0035] The heating member 22 is arranged in the air channel 2101 to heat air in the air channel 2101. In order to effectively utilize the space in the air channel 2101, improve drying efficiency, and increase a contact area between airflow and the heating member 22, the heating member 22 is configured as a serpentine heating elbow. The blower 23 functions as a power component which forms airflow to guide air to flow. The air channel assembly has a vent 2141 in communication with the air outlet 102 and the outside, and the vent 2141 is located above the air outlet 102.

[0036] In the clothes treatment device 100 according to the embodiment of the present invention, the vent 2141 is provided and serves as an inlet/outlet of airflow to ensure a dynamic balance of air pressure between the clothes treatment chamber 121 and the outside during the operation of the clothes treatment device 100. For example, when the air pressure in the clothes treatment chamber 121 increases, part of hot and humid air can overflow from the vent 2141 under the action of an air pressure difference, thus improving the drying efficiency; when the air pressure in the clothes treatment chamber 121 decreases, the outside air can enter the clothes treatment chamber 121 from the vent 2141 to participate in the circulation of the airflow, thereby realizing exchange of the hot and humid air with the outside air.

[0037] In addition, compared with a technical solution with a discharge opening and a vent in the related art, by eliminating the discharge opening in the tub assembly, the clothes treatment device 100 does not form a through airflow channel during the drying process, thereby ensuring quick heating-up in the tub assembly in an initial stage of the drying process and reducing the risk of over-foaming.

[0038] In order to prevent the water and foam in the clothes treatment chamber 121 from overflowing from the vent 2141, and to ensure that the air in the clothes treatment chamber 121 can be discharged from the vent 2141 to the outside, a waterproof and air-permeable member is provided at the vent 2141. In this embodiment, the waterproof and air-permeable member is configured

as a waterproof and air-permeable membrane. In some embodiments, the waterproof and air-permeable membrane may be made of a nylon material or a PET material.

[0039] As shown in FIGS. 3 and 4, in an axial direction of the tub assembly 10, the air inlet 101 is located at a front part of the tub assembly 10, and the air outlet 102 is located at a rear part of the tub assembly 10. In other words, the air inlet 101 and the air outlet 102 are spaced apart in the axial direction of the tub assembly 10.

[0040] Thus, a distance between the air inlet 101 and the air outlet 102 can be increased, i.e., a distance between the air channel inlet and the air channel outlet 2104, can be increased. In this way, the flowing time of moist air (discharged from the clothes treatment chamber 121) in the air channel 2101 can be increased, the heating time of the heating member 22 to the airflow is prolonged, and the moist air just discharged can be prevented from being sucked in immediately, which is beneficial to improving the drying efficiency.

[0041] In some embodiments, as shown in FIG 5, an orthographic projection of the air outlet 102 on an imaginary horizontal plane X passing through a central axis of the tub assembly 10 deviates from the central axis of the tub assembly 10. Therefore, by effectively using the position of the tub assembly 10 in the circumferential direction, a distance between the air inlet 101 and the air outlet 102 can be increased, which is beneficial to improving the drying efficiency.

[0042] According to long-term experiments of the applicant, if the flow area of the vent 2141 is too large, the hot air will leak out too quickly during the drying process of the clothes treatment device 100, which will affect the drying efficiency and waste electrical energy; if the flow area of the vent 2141 is too small, the moisture removal effect of the clothes treatment device 100 during the drying process will be too poor, which will affect the final moisture content and drying time.

[0043] As shown in FIG 5, in the present invention, by setting the flow area S0 of the vent 2141 to be within a range of 500 mm² and 1500 mm², the hot air can be prevented from leaking too quickly, the energy consumption is low, and poor moisture removal effect can be avoided during the drying process, which is beneficial to improving the drying efficiency.

[0044] In order to ensure a high flowing efficiency of the airflow and faster heating-up of the tub assembly 10 to improve the drying efficiency, the flow area S2 of the air outlet 102 is set to be greater than 8000 mm².

[0045] According to an embodiment of the present disclosure, the tub assembly 10 includes an outer tub 11 and an inner tub 12. The inner tub 12 is rotatably provided in the outer tub 11 and extends along an axial direction of the outer tub 11. The inner tub 12 defines a clothes treatment chamber 121 in communication with a gap between the outer tub 11 and the inner tub 12.

[0046] An air outlet 102 is provided at an upper part of a side wall of the outer tub 11 and is in communication with the clothes treatment chamber 121 through the gap.

An air inlet 101 is provided on a front edge of the outer tub 11 or a door seal on the outer tub 11. By arranging the air inlet 101 on the front edge of the outer tub 11, the length of the air channel 2101 can be increased, thereby improving the drying efficiency; by arranging the air inlet 101 on the door seal on the outer tub 11, the length of the air channel 2101 can be increased and the drying efficiency is accordingly improved on the one hand, and on the other hand, there is no need to form holes in the outer tub 11, which simplifies the structure and processing procedures of the outer tub 11 and reduces the cost.

[0047] As shown in FIGS. 5 to 8, according to an embodiment of the present disclosure, the air channel assembly includes an air channel shell 21 mounted at the upper part of the side wall of the tub assembly 10, and an inner cavity of the air channel shell 21 is in communication with the air inlet 101. In this embodiment, the air channel shell 21 is mounted at the top of the outer tub 11, and at least a part of the air channel shell 21 extends along the axial direction of the tub assembly 10.

[0048] Further, the air channel assembly further includes a connecting base 214 provided between the air channel shell 21 and the tub assembly 10, so as to communicate the inner cavity of the air channel shell 21 with the air outlet 102, that is, the inner cavity of the connecting base 214 and the inner cavity of the air channel shell 21 constitute an air channel 2101, and the vent 2141 is provided on the connecting base 214. In this embodiment, the connecting base 214 is provided between an air channel base 211 of the air channel shell 21 and the outer tub 11, which can not only support the air channel base 211, but also effectively utilize the top space of the outer tub 11 to facilitate communication with the outside.

[0049] In some embodiments, the air channel shell 21 includes an air channel base 211, an air channel cover plate 212, and a blower cover plate 213. The air channel cover plate 212 covers a part of the air channel base 211, and the air channel cover plate 212 and the air channel base 211 define a part of the air channel 2101. The blower cover plate 213 covers the other part of the air channel base 211, and the blower cover plate 212 and the air channel base 211 define the other part of the air channel 2101. It can be understood that, in this embodiment, the connecting base 214 defines the rest part of the air channel 2101.

[0050] As shown in FIGS. 6 and 7, the blower 23 includes a fan 231 and a driving motor 232 for driving the fan 231 to rotate. The fan 231 of the blower 23 is provided between the blower cover plate 213 and the air channel base 211, and the driving motor 232 is provided outside the blower cover plate 213.

[0051] In this embodiment, a side of the blower cover plate 213 away from the air channel base 211 has a downwardly recessed mounting recess 2131 for mounting the driving motor 232, and a motor shaft of the driving motor 232 passes through a bottom wall of the mounting recess 2131 so as to be connected to the fan 231.

[0052] In some examples, a side wall of the mounting

recess 2131 is provided with a plurality of spacer ribs 2132 arranged at intervals along the circumferential direction of the mounting recess 2131. The spacer ribs 2132 can space at least a part of the driving motor 232 from the side wall of the mounting recess 2131; in this way, a limiting effect can be achieved and a gap between the driving motor 232 and the mounting recess 2131 can also be ensured, thus facilitating heat dissipation.

[0053] As shown in FIG 8, each spacer rib 2132 includes an inner rib section 2133 and an outer rib section 2134 that are connected to each other. The inner rib section 2133 is located in the mounting recess 2131 and extends along a depth direction of the mounting recess 2131. One end of the outer rib section 2134 is connected to an upper end of the inner rib section 2133 and is located outside the mounting recess 2131. The plurality of outer rib sections 2134 are arranged in a radial way, which is beneficial to improving the structural strength of the blower cover plate 213.

[0054] In some embodiments, the top of the side wall of the air channel base 211 has a groove 2112 extending along its circumferential direction, and one sides of the air channel cover plate 212 and the blower cover plate 213 facing the air channel base 211 are each provided with a protruding rib 2113 fitted with the groove 2112, thus ensuring the reliability and tightness of the connection between the air channel base 211 and the air channel cover plate 212 and between the air channel base 211 and the blower cover plate 213.

[0055] Further, the groove 2112 is provided inside with a sealing ring extending along its circumferential direction. When the protruding rib 2113 is fitted with the groove 2112, the sealing ring is pressed tightly, thereby further ensuring the tight connection between the air channel base 211 and the air channel cover plate 212 and between the air channel base 211 and the blower cover plate 213.

[0056] In some embodiments, a filter assembly (not shown) and a spraying member 217 are connected in the connecting base 214. The filter assembly is configured to filter the hot and humid air discharged from the air outlet 102 to prevent lint of clothes from entering the air channel 2101. The spraying member 217 can wash the filter assembly, thereby flushing the lint on the filter assembly back to the clothes treatment chamber 121 to prevent the accumulation of lint.

[0057] In some examples, the filter assembly includes a filter screen and an annular connecting frame 216. The filter screen is mounted in the connecting base 214 through the annular connecting frame 216. The annular connecting frame 216 can not only fix the filter screen, but also improve the structural strength of the connecting base 214.

[0058] In this embodiment, the bottom of the connecting base 214 is provided with a first air-passing opening 2142, and the filter screen is fixed at the first air-passing opening 2142 by the annular connecting frame 216. The filter screen can filter the hot and humid air discharged

from the air outlet 102 to prevent the lint of clothes from entering the air channel 2101. Moreover, the filter screen can also increase the resistance of foam entering the air channel 2101. In addition, compared with the technical solution of directly installing the filter screen on the air outlet in the related art, the solution of installing the filter screen and the annular connecting frame 216 in the connecting base 214 facilitates the modularization of components and also facilitates the assembly and disassembly of the filter screen.

[0059] According to a further embodiment of the present disclosure, the air outlet 102 is located below the connecting base 214, and the bottom of the connecting base 214 has a first air-passing opening 2142 in communication with the air outlet 102, that is, the first air-passing opening 2142 forms an air channel inlet of the air channel 2101. A first latching rib 2145 is provided in the circumferential direction of one of the first air-passing opening 2142 and the air outlet 102, and a first latching groove 2144 fitted with the first latching rib 2145 is provided in the circumferential direction of the other one, thus ensuring the reliability and tightness of the connection between the tub assembly 10 and the connecting base 214.

[0060] As shown in FIG 6, in this embodiment, a first latching groove 2144 is provided in the circumferential direction of the first air-passing opening 2142 and forms a ring around the first air-passing opening 2142, and a first latching rib 2145 is provided in the circumferential direction of the air outlet 102 and surrounds the air outlet 102. By the fitting of the first latching rib 2145 and the first latching groove 2144 realizes a reliable connection between the connecting base 214 and the outer tub 11. In order to further ensure the airtightness between the connecting base 214 and the outer tub 11, a sealing ring may be provided in the first latching groove 2144, and the sealing ring is pressed tightly when the first latching rib 2145 and the first latching groove 2144 are fitted.

[0061] According to a further embodiment of the present disclosure, a bottom of the air channel shell 21 has a mounting opening 2104, a top of the connecting base 214 has a second air-passing opening 2143, and the second air-passing opening 2143 is in communication with the inner cavity of the air channel shell 21; a second latching rib 2147 is provided in a circumferential direction of one of the second air-passing opening 2143 and the mounting opening 2104, and a second latching groove 2146 fitted with the second latching rib 2147 is provided in the circumferential direction of the other one.

[0062] As shown in FIG 6, in this embodiment, a second latching rib 2147 is provided in the circumferential direction of the second air-passing opening 2143 and surrounds the second air-passing opening 2143, and a second latching groove 2146 is provided in the circumferential direction of the mounting opening 2104 and surrounds the mounting opening 2104. By the fitting of the second latching rib 2147 and the second latching groove 2146 realizes a reliable connection between the connect-

ing base 214 and the air channel base 211. In order to further ensure the airtightness between the connecting base 214 and the air channel base 211, a sealing ring may be provided in the second latching groove 2146, and the sealing ring is pressed tightly when the second latching rib 2147 and the second latching groove 2146 are fitted.

[0063] As shown in FIG 7, an outer surface of the connecting base 214 is provided with a connecting lug 2148, and an outer surface of the air channel shell 21 is provided with a mounting lug 2114. The connecting base 214 and the air channel shell 21 are connected reliably and stably by a fastener passing through the connecting lug 2148 and the mounting lug 2114. In this embodiment, the air channel base 211 has a side coaming extending along its circumferential direction, the mounting lug 2114 is provided on the side coaming, the connecting base 214 and the air channel base 211 are further connected by a fastener passing through connecting holes in the connecting lug 2148 and the mounting lug 2114.

[0064] In some embodiments, the vent 2141 is provided on a side of the connecting base 214. Specifically, the side of the connecting base 214 is provided with a protruding tube head 2149 and the tube head 2149 extends in an up-down direction and thus defines the vent 2141. The advantages of simple structure and easy processing and manufacturing are achieved.

[0065] In this embodiment, the connecting base 214 includes a body part and a cover plate part. The body part is provided with a first air-passing opening 2142 at the bottom and a second air-passing opening 2143 at the top, and a side of the body part is provided with an opening. The cover plate part is provided at the opening, and a side of the cover plate part away from the body part is provided with a tube head 2149, thus defining a vent 2141.

[0066] In the description of the present disclosure, it is to be understood that the orientations or positional relationships, indicated by the terms "central", "longitudinal", "lateral", "length", "width", "thickness", "on", "under", "front", "rear", "left", "right", "vertical", "horizontal", "top", "bottom", "inside", "outside", "clockwise", "counterclockwise", "axial", "radial", "circumferential", and the like, are based on the orientations or positional relationships shown in the drawings and are only for the purpose of facilitating and simplifying the description of the present disclosure, rather than indicating or implying that the described device or element must have a particular orientation or must be constructed and operated in a particular orientation, and therefore they cannot to be construed as limiting the present disclosure.

[0067] Other configurations and operations of the clothes treatment device 100 according to the embodiment of the present disclosure are known to those of ordinary skill in the art, and will not be described in detail here.

[0068] In the description of the present specification, the description with reference to the terms "one embod-

iment", "some embodiments", "exemplary embodiment", "example", "specific example", "some examples" or the like means specific features, structures, materials or characteristics described in connection with the embodiment or example are included in at least one embodiment or example of the present disclosure. In the present specification, the schematic representations of the above terms do not necessarily refer to the same embodiment. Moreover, the specific features, structures, materials, or characteristics described may be combined in a suitable manner in any one or more embodiments or examples, within the scope defined by the appended claims.

15 Claims

1. A clothes treatment device (100), comprising:

a tub assembly (10) defining a clothes treatment chamber (121) therein, the tub assembly (10) having an air inlet (101) and an air outlet (102) that are in communication with the clothes treatment chamber (121), the air inlet (101) and the air outlet (102) being provided at an upper part of a side wall of the tub assembly (10); and a clothes drying assembly (20) comprising an air channel assembly communicating the air inlet (101) with the air outlet (102), a heating member (22) provided inside the air channel assembly, and a blower (23) configured to guide air to flow, wherein the air channel assembly is provided with a vent (2141) in communication with the air outlet (102) and outside, and the vent (2141) is located above the air outlet (102); **characterised in that** a flow area (S0) of the vent (2141) is within a range of 500 mm² to 1500 mm².

2. The clothes treatment device (100) according to claim 1, wherein a waterproof and air-permeable member is provided at the vent (2141).

3. The clothes treatment device (100) according to any of claims 1 to 2, wherein in an axial direction of the tub assembly (10), the air inlet (101) is located at a front part of the tub assembly (10), and the air outlet (102) is located at a rear part of the tub assembly (10).

4. The clothes treatment device (100) according to any of claims 1 to 3, wherein a flow area (S2) of the air outlet (102) is greater than 8000 mm².

5. The clothes treatment device (100) according to any of claims 1 to 4, wherein an orthographic projection of the air outlet (102) on an imaginary horizontal plane (X) passing through a central axis of the tub

assembly (10) deviates from the central axis of the tub assembly (10).

6. The clothes treatment device (100) according to any of claims 1 to 5, wherein the air channel assembly comprises:

an air channel shell (21) mounted at the upper part of the side wall of the tub assembly (10), an inner cavity of the air channel shell (21) being in communication with the air inlet (101); and a connecting base (214) provided between the air channel shell (21) and the tub assembly (10), the inner cavity of the air channel shell (21) being in communication with the air outlet (102) through an inner cavity of the connecting base (214), the vent (2141) being provided at the connecting base (214).

7. The clothes treatment device (100) according to claim 6, wherein a filter assembly and a spraying member (217) are provided inside the connecting base (214), the filter assembly is configured to filter air discharged from the air outlet (102), and the spraying member (217) is located above the filter assembly.

8. The clothes treatment device according to claim 7, wherein the filter assembly comprises a filter screen and an annular connecting frame (216), and the filter screen is mounted in the connecting base (214) through the annular connecting frame (216).

9. The clothes treatment device (100) according to claim 6 to 8, wherein the air outlet (102) is located below the connecting base (214), a bottom of the connecting base (214) is defined with a first air-passing opening (2142), and the first air-passing opening (2142) is in communication with the air outlet (102); wherein a first latching rib (2145) is provided in a circumferential direction of one of the first air-passing opening (2142) and the air outlet (102), and a first latching groove (2144) fitted with the first latching rib (2145) is provided in a circumferential direction of the other one of the first air-passing opening (2142) and the air outlet (102).

10. The clothes treatment device (100) according to any of claims 6 to 9, wherein a bottom of the air channel shell (21) is defined with a mounting opening (2105), a top of the connecting base (214) is defined with a second air-passing opening (2143), and the second air-passing opening (2143) is in communication with the mounting opening (2105); wherein a second latching rib (2147) is provided in a circumferential direction of one of the second air-passing opening (2143) and the mounting opening (2105), and a second latching groove (2146) fitted

with the second latching rib (2147) is provided in a circumferential direction of the other one of the second air-passing opening (2143) and the mounting opening (2105).

11. The clothes treatment device (100) according to any of claims 6 to 10, wherein an outer surface of the connecting base (214) is provided with a connecting lug (2148), an outer surface of the air channel shell (21) is provided with a mounting lug (2114), and the connecting base (214) and the air channel shell (21) are connected by a fastener passing through the connecting lug (2148) and the mounting lug (2114).

12. The clothes treatment device (100) according to any of claims 6 to 11, wherein the vent (2141) is provided to a side of the connecting base (214), optionally, wherein the side of the connecting base (214) is provided with a tube head (2149) protruding outwards, and the tube head (2149) extends in an up-down direction and is defined with the vent (2141).

13. The clothes treatment device (100) according to claim 6, wherein the air channel shell (21) comprises:

an air channel base (211) arranged above the tub assembly (10) and the connecting base (214);

an air channel cover plate (212) covering a part of the air channel base (211); and

a blower cover plate (213) covering the other part of the air channel base (211), a fan (231) of the blower being arranged between the blower cover plate (213) and the air channel base (211).

14. The clothes treatment device (100) according to claim 13, wherein a side of the blower cover plate (213) away from the air channel base (211) is provided with a mounting recess (2131) recessed downwards, for mounting a driving motor (232) of the fan, optionally, wherein a side wall of the mounting recess (2131) is provided with a plurality of spacer ribs (2132) arranged at intervals along a circumferential direction of the mounting recess (2131), for spacing at least a part of the driving motor (232) apart from the side wall of the mounting recess (2131), wherein each of the spacer ribs (2132) comprising an inner rib section (2133) and an outer rib section (2134) connected to each other, the inner rib section (2133) is located in the mounting recess (2131) and extends along a depth direction of the mounting recess (2131), the plurality of outer rib sections (2134) are arranged in a radial way and located outside the mounting recess (2131).

15. The clothes treatment device (100) according to claim 13 or 14, wherein a top of a side wall of the air

channel base (211) is defined with a groove (2112) extending in a circumferential direction, and one sides of the air channel cover plate (212) and the blower cover plate (213) facing the air channel base (211) are each provided with a protruding rib (2113) fitted with the groove (2112).

Patentansprüche

1. Wäschebehandlungsvorrichtung (100), umfassend:

eine Bottichanordnung (10), die in sich eine Wäschebehandlungskammer (121) definiert, wobei die Bottichanordnung (10) einen Lufteinlass (101) und einen Luftauslass (102) aufweist, die mit der Wäschebehandlungskammer (121) in Verbindung stehen, wobei der Lufteinlass (101) und der Luftauslass (102) an einem oberen Teil einer Seitenwand der Bottichanordnung (10) bereitgestellt sind, und

eine Wäschetrocknungsanordnung (20), die eine Luftkanalanordnung, die den Lufteinlass (101) mit dem Luftauslass (102) in Verbindung bringt, ein Hezelement (22), das im Inneren der Luftkanalanordnung bereitgestellt ist, und ein Gebläse (23), das dafür gestaltet ist, den Strom der Luft zu führen, umfasst,

wobei die Luftkanalanordnung mit einer Lüftungsöffnung (2141) in Verbindung mit dem Luftauslass (102) und der Umgebung versehen ist und sich die Lüftungsöffnung (2141) über dem Luftauslass (102) befindet,

dadurch gekennzeichnet, dass ein Strömungsquerschnitt (S0) der Lüftungsöffnung (2141) im Bereich von 500 mm² bis 1500 mm² liegt.

2. Wäschebehandlungsvorrichtung (100) nach Anspruch 1, wobei an der Lüftungsöffnung (2141) ein wasserdichtes und luftdurchlässiges Element bereitgestellt ist.

3. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 1 bis 2, wobei sich in einer axialen Richtung der Bottichanordnung (10) der Lufteinlass (101) an einem vorderen Teil der Bottichanordnung (10) befindet und sich der Luftauslass (102) an einem hinteren Teil der Bottichanordnung (10) befindet.

4. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 1 bis 3, wobei ein Strömungsquerschnitt (S2) des Luftauslasses (102) größer als 8000 mm² ist.

5. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 1 bis 4, wobei eine Orthogonalprojektion des Luftauslasses (102) auf eine imaginäre horizontale Ebene (X), die durch eine Mittelachse der Bottichanordnung (10) verläuft, von der Mittelachse der Bottichanordnung (10) abweicht.

jektion des Luftauslasses (102) auf eine imaginäre horizontale Ebene (X), die durch eine Mittelachse der Bottichanordnung (10) verläuft, von der Mittelachse der Bottichanordnung (10) abweicht.

6. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 1 bis 5, wobei die Luftkanalanordnung Folgendes umfasst:

einen Luftkanalmantel (21), der an dem oberen Teil der Seitenwand der Bottichanordnung (10) montiert ist, wobei ein innerer Hohlraum des Luftkanalmantels (21) in Verbindung mit dem Lufteinlass (101) steht, und

eine Verbindungsbasis (214), die zwischen dem Luftkanalmantel (21) und der Bottichanordnung (10) bereitgestellt ist, wobei der innere Hohlraum des Luftkanalmantels (21) durch einen inneren Hohlraum der Verbindungsbasis (214) in Verbindung mit dem Luftauslass (102) steht, wobei die Lüftungsöffnung (2141) an der Verbindungsbasis (214) bereitgestellt ist.

7. Wäschebehandlungsvorrichtung (100) nach Anspruch 6, wobei eine Filteranordnung und ein Sprüh-element (217) im Inneren der Verbindungsbasis (214) bereitgestellt sind, wobei die Filteranordnung dafür gestaltet ist, Luft zu filtern, die aus dem Luftauslass (102) abgelassen wird, und sich das Sprüh-element (217) über der Filteranordnung befindet.

8. Wäschebehandlungsvorrichtung nach Anspruch 7, wobei die Filteranordnung ein Filtersieb und einen ringförmigen Verbindungsrahmen (216) umfasst und das Filtersieb durch den ringförmigen Verbindungsrahmen (216) in die Verbindungsbasis (214) montiert ist.

9. Wäschebehandlungsvorrichtung (100) nach Anspruch 6 bis 8, wobei sich der Luftauslass (102) unter der Verbindungsbasis (214) befindet, ein Boden der Verbindungsbasis (214) mit einer ersten Luftdurchlauföffnung (2142) definiert ist und die erste Luftdurchlauföffnung (2142) in Verbindung mit dem Luftauslass (102) steht, wobei in einer Umfangsrichtung entweder der ersten Luftdurchlauföffnung (2142) oder des Luftauslasses (102) eine erste Verriegelungsrippe (2145) bereitgestellt ist und in einer Umfangsrichtung des entsprechenden anderen der ersten Luftdurchlauföffnung (2142) und des Luftauslasses (102) eine erste Verriegelungsrille (2144) bereitgestellt ist, in die die erste Verriegelungsrippe (2145) eingepasst ist.

10. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 6 bis 9, wobei ein Boden des Luftkanalmantels (21) mit einer Montageöffnung (2105) definiert ist, ein Oberteil der Verbindungsbasis (214)

mit einer zweiten Luftdurchlauföffnung (2143) definiert ist und die zweite Luftdurchlauföffnung (2143) in Verbindung mit der Montageöffnung (2105) steht, wobei in einer Umfangsrichtung entweder der zweiten Luftdurchlauföffnung (2143) oder der Montageöffnung (2105) eine zweite Verriegelungsrippe (2147) bereitgestellt ist und in einer Umfangsrichtung des entsprechenden anderen der zweiten Luftdurchlauföffnung (2143) und der Montageöffnung (2105) eine zweite Verriegelungsrille (2146) bereitgestellt ist, in die die zweite Verriegelungsrippe (2147) eingepasst ist.

11. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 6 bis 10, wobei eine Außenfläche der Verbindungsbasis (214) mit einer Verbindungsnase (2148) versehen ist, eine Außenfläche des Luftkanalmantels (21) mit einer Montagenase (2114) versehen ist und die Verbindungsbasis (214) und der Luftkanalmantel (21) durch ein Befestigungsmittel verbunden sind, das durch die Verbindungsnase (2148) und die Montagenase (2114) verläuft.

12. Wäschebehandlungsvorrichtung (100) nach einem der Ansprüche 6 bis 11, wobei die Lüftungsöffnung (2141) zu einer Seite der Verbindungsbasis (214) bereitgestellt ist, wobei optional die Seite der Verbindungsbasis (214) mit einem Rohrstutzen (2149) versehen ist, der nach außen hervorsteht, und sich der Rohrstutzen (2149) in einer Oben-Unten-Richtung erstreckt und mit der Lüftungsöffnung (2141) definiert ist.

13. Wäschebehandlungsvorrichtung (100) nach Anspruch 6, wobei der Luftkanalmantel (219) Folgendes umfasst:

eine Luftkanalbasis (211), die über der Bottichanordnung (10) und der Verbindungsbasis (214) angeordnet ist,

eine Luftkanal-Abdeckplatte (212), die einen Teil der Luftkanalbasis (211) abdeckt, und eine Gebläseabdeckplatte (213), die den anderen Teil der Luftkanalbasis (211) abdeckt, wobei ein Flügelrad (231) des Gebläses zwischen der Gebläseabdeckplatte (213) und der Luftkanalbasis (211) angeordnet ist.

14. Wäschebehandlungsvorrichtung (100) nach Anspruch 13, wobei eine Seite der Gebläseabdeckplatte (213) fern der Luftkanalbasis (211) mit einer Montagevertiefung (2131) versehen ist, die nach unten vertieft ist, um einen Antriebsmotor (232) des Flügelrades zu montieren, wobei optional eine Seitenwand der Montagevertiefung (2131) mit mehreren Abstandshalterrippen (2132) versehen ist, die in Intervallen entlang einer Umfangsrichtung der Montagevertiefung (2131) angeordnet sind, um mindes-

tens einen Teil des Antriebsmotors (232) von der Seitenwand der Montagevertiefung (2132) zu beabstanden,

wobei jede der Abstandshalterrippen (2132) einen inneren Rippenabschnitt (2133) und einen äußeren Rippenabschnitt (2134) umfasst, die miteinander verbunden sind, wobei sich der innere Rippenabschnitt (2133) in der Montagevertiefung (2131) befindet und sich entlang einer Tiefenrichtung der Montagevertiefung (2131) erstreckt, die mehreren äußeren Rippenabschnitten (2134) in einer radialen Weise angeordnet sind und sich außerhalb der Montageöffnung (2131) befinden.

15. Wäschebehandlungsvorrichtung (100) nach Anspruch 13 oder 14, wobei ein Oberteil einer Seitenwand der Luftkanalbasis (211) mit einer Rille (2112) definiert ist, die sich in einer Umfangsrichtung erstreckt, und eine Seite der Luftkanal-Abdeckplatte (212) und eine Seite der Gebläseabdeckplatte (213), die zu der Luftkanalbasis (211) weisen, jeweils mit einer hervorstehenden Rippe (2113) versehen sind, die in die Rille (2112) eingepasst ist.

Revendications

1. Dispositif de traitement de vêtements (100), comportant :

un ensemble formant cuve (10) définissant une chambre de traitement de vêtements (121) dans celui-ci, l'ensemble formant cuve (10) ayant une entrée d'air (101) et une sortie d'air (102) qui sont en communication avec la chambre de traitement de vêtements (121), l'entrée d'air (101) et la sortie d'air (102) étant mises en oeuvre au niveau d'une partie supérieure d'une paroi latérale de l'ensemble formant cuve (10) ; et

un ensemble de séchage de vêtements (20) comportant un ensemble formant canal d'air faisant communiquer l'entrée d'air (101) avec la sortie d'air (102), un élément de chauffage (22) mis en oeuvre à l'intérieur de l'ensemble formant canal d'air, et un souffleur (23) configuré pour guider l'air à des fins d'écoulement, dans lequel l'ensemble formant canal d'air est doté d'un évent (2141) en communication avec la sortie d'air (102) et avec l'extérieur, et l'évent (2141) est situé au-dessus de la sortie d'air (102) ;

caractérisé en ce qu'une zone d'écoulement (S0) de l'évent (2141) se trouve dans les limites d'une plage allant de 500 mm² à 1500 mm².

2. Dispositif de traitement de vêtements (100) selon la revendication 1, dans lequel un élément étanche à l'eau et perméable à l'air est mis en oeuvre au niveau

de l'évent (2141).

3. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 1 à 2, dans lequel, dans une direction axiale de l'ensemble formant cuve (10), l'entrée d'air (101) est située au niveau d'une partie avant de l'ensemble formant cuve (10), et la sortie d'air (102) est située au niveau d'une partie arrière de l'ensemble formant cuve (10).
4. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 1 à 3, dans lequel une zone d'écoulement (S2) de la sortie d'air (102) est supérieure à 8000 mm².
5. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 1 à 4, dans lequel une projection orthographique de la sortie d'air (102) sur un plan horizontal imaginaire (X) traversant un axe central de l'ensemble formant cuve (10) dévie par rapport à l'axe central de l'ensemble formant cuve (10).
6. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 1 à 5, dans lequel l'ensemble formant canal d'air comporte :

une coque de canal d'air (21) montée au niveau de la partie supérieure de la paroi latérale de l'ensemble formant cuve (10), une cavité intérieure de la coque de canal d'air (21) étant en communication avec l'entrée d'air (101) ; et une base de raccordement (214) mise en oeuvre entre la coque de canal d'air (21) et l'ensemble formant cuve (10), la cavité intérieure de la coque de canal d'air (21) étant en communication avec la sortie d'air (102) au travers d'une cavité intérieure de la base de raccordement (214), l'évent (2141) étant mis en oeuvre au niveau de la base de raccordement (214).
7. Dispositif de traitement de vêtements (100) selon la revendication 6, dans lequel un ensemble formant filtre et un élément de pulvérisation (217) sont mis en oeuvre à l'intérieur de la base de raccordement (214), l'ensemble formant filtre est configuré pour filtrer l'air déchargé en provenance de la sortie d'air (102), et l'élément de pulvérisation (217) est situé au-dessus de l'ensemble formant filtre.
8. Dispositif de traitement de vêtements selon la revendication 7, dans lequel l'ensemble formant filtre comporte un tamis filtrant et un cadre de raccordement annulaire (216), et le tamis filtrant est monté dans la base de raccordement (214) au travers du cadre de raccordement annulaire (216).
9. Dispositif de traitement de vêtements (100) selon

l'une quelconque des revendications 6 à 8, dans lequel la sortie d'air (102) est située sous la base de raccordement (214), une partie inférieure de la base de raccordement (214) est définie avec une première ouverture de passage d'air (2142), et la première ouverture de passage d'air (2142) est en communication avec la sortie d'air (102) ; dans lequel une première nervure de verrouillage (2145) est mise en oeuvre dans une direction allant dans le sens de la circonférence de l'une parmi la première ouverture de passage d'air (2142) et la sortie d'air (102), et une première rainure de verrouillage (2144) adaptée avec la première nervure de verrouillage (2145) est mise en oeuvre dans une direction allant dans le sens de la circonférence de l'autre parmi la première ouverture de passage d'air (2142) et la sortie d'air (102).

10. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 6 à 9, dans lequel une partie inférieure de la coque de canal d'air (21) est définie avec une ouverture de montage (2105), une partie en haut de la base de raccordement (214) est définie avec une deuxième ouverture de passage d'air (2143), et la deuxième ouverture de passage d'air (2143) est en communication avec l'ouverture de montage (2105) ; dans lequel une deuxième nervure de verrouillage (2147) est mise en oeuvre dans une direction allant dans le sens de la circonférence de l'une parmi la deuxième ouverture de passage d'air (2143) et l'ouverture de montage (2105), et une deuxième rainure de verrouillage (2146) adaptée avec la deuxième nervure de verrouillage (2147) est mise en oeuvre dans une direction allant dans le sens de la circonférence de l'autre parmi la deuxième ouverture de passage d'air (2143) et l'ouverture de montage (2105).
11. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 6 à 10, dans lequel une surface extérieure de la base de raccordement (214) est dotée d'une patte de raccordement (2148), une surface extérieure de la coque de canal d'air (21) est dotée d'une patte de montage (2114), et la base de raccordement (214) et la coque de canal d'air (21) sont raccordées par une pièce de fixation passant au travers de la patte de raccordement (2148) et de la patte de montage (2114).
12. Dispositif de traitement de vêtements (100) selon l'une quelconque des revendications 6 à 11, dans lequel l'évent (2141) est mis en oeuvre sur un côté de la base de raccordement (214), éventuellement, dans lequel le côté de la base de raccordement (214) est doté d'une tête de tube (2149) faisant saillie vers l'extérieur, et la tête de tube (2149) s'étend dans une direction allant de haut en bas et est définie avec

l'évent (2141).

13. Dispositif de traitement de vêtements (100) selon la revendication 6, dans lequel la coque de canal d'air (21) comporte : 5
- une base de canal d'air (211) agencée au-dessus de l'ensemble formant cuve (10) et de la base de raccordement (214) ;
 - une plaque formant couvercle de canal d'air (212) recouvrant une partie de la base de canal d'air (211) ; et 10
 - une plaque formant couvercle de souffleur (213) recouvrant l'autre partie de la base de canal d'air (211), un ventilateur (231) du souffleur étant agencé entre la plaque formant couvercle de souffleur (213) et la base de canal d'air (211). 15
14. Dispositif de traitement de vêtements (100) selon la revendication 13, dans lequel un côté de la plaque formant couvercle de souffleur (213) à distance de la base de canal d'air (211) est doté d'un évidement de montage (2131) en retrait vers le bas, servant à monter un moteur d'entraînement (232) du ventilateur, éventuellement, dans lequel une paroi latérale de l'évidement de montage (2131) est dotée d'une pluralité de nervures d'entretoise (2132) agencées selon des intervalles le long d'une direction allant dans le sens de la circonférence de l'évidement de montage (2131), à des fins d'espacement d'au moins 20
- une partie du moteur d'entraînement (232) à distance de la paroi latérale de l'évidement de montage (2131), 25
- dans lequel, chacune des nervures d'entretoise (2132) comportant une section intérieure de nervures (2133) et une section extérieure de nervures (2134) raccordées l'une par rapport à l'autre, la section intérieure de nervures (2133) est située dans l'évidement de montage (2131) et s'étend le long d'une direction allant dans le sens de la profondeur de l'évidement de montage (2131), la pluralité de sections extérieures de nervures (2134) sont agencées de manière radiale et sont situées à l'extérieur de l'évidement de montage (2131). 30
- 45
15. Dispositif de traitement de vêtements (100) selon la revendication 13 ou la revendication 14, dans lequel une partie en haut d'une paroi latérale de la base de canal d'air (211) est définie avec une rainure (2112) s'étendant dans une direction allant dans le sens de la circonférence, et des côtés de la plaque formant couvercle de canal d'air (212) et de la plaque formant couvercle de souffleur (213) orientés vers la base de canal d'air (211) sont chacun dotés d'une nervure faisant saillie (2113) adaptée avec la rainure (2112). 50
- 55

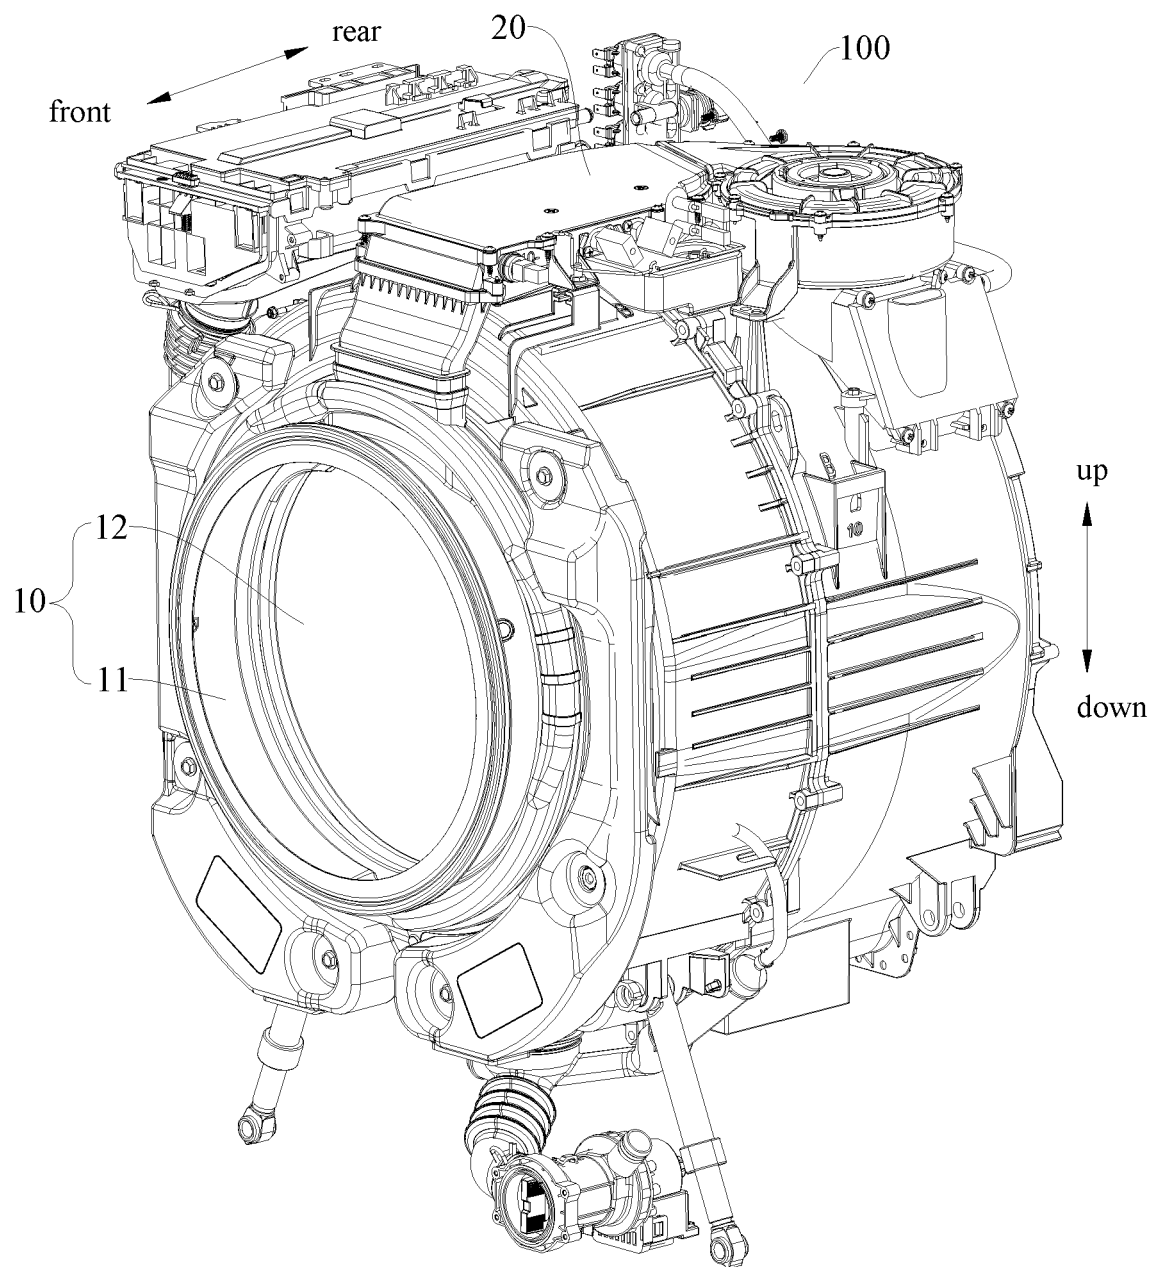


FIG. 1

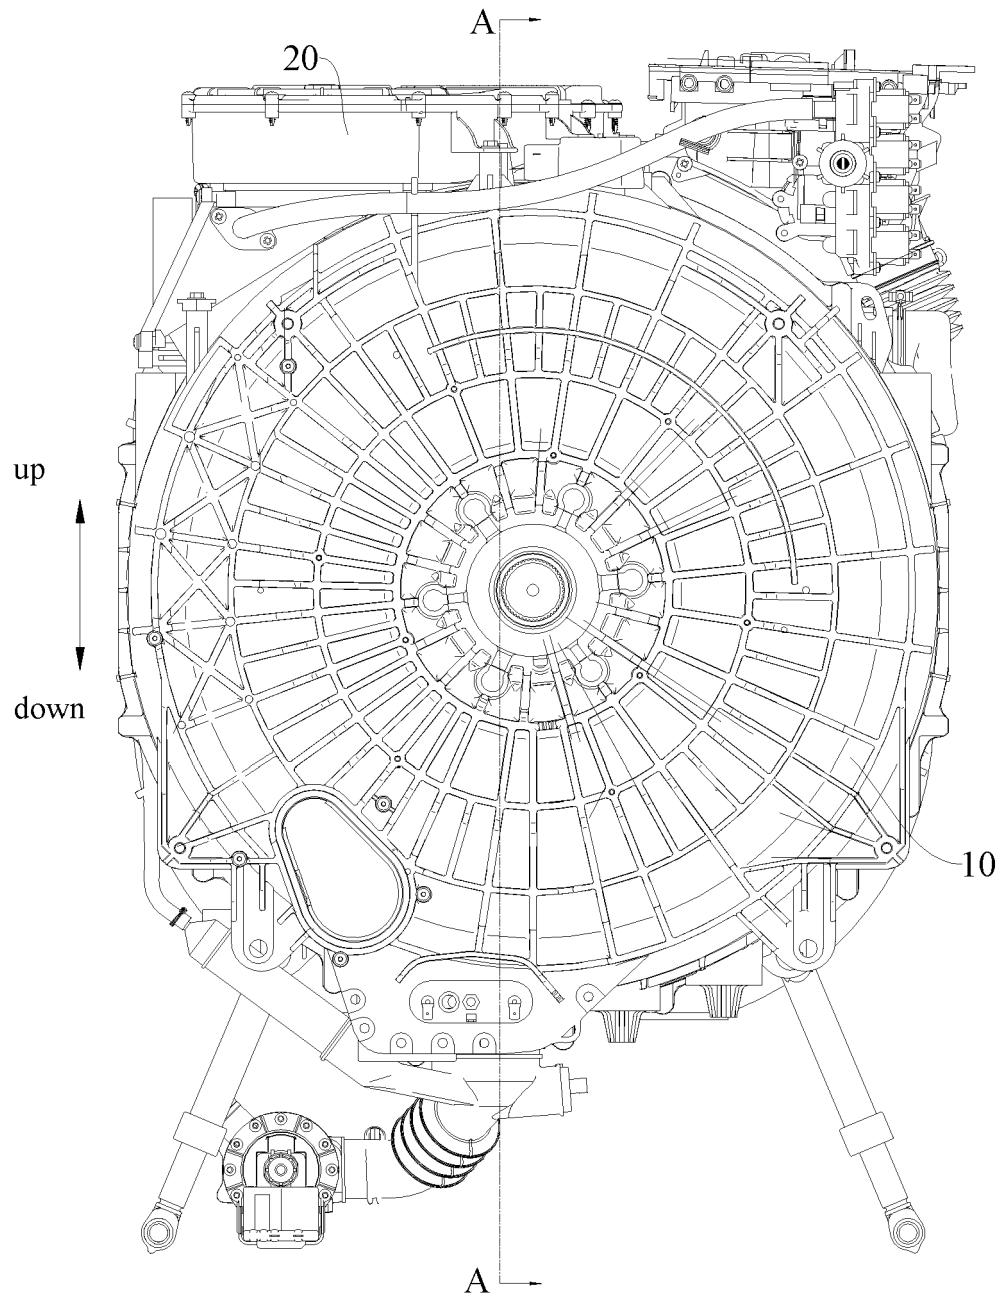


FIG. 2

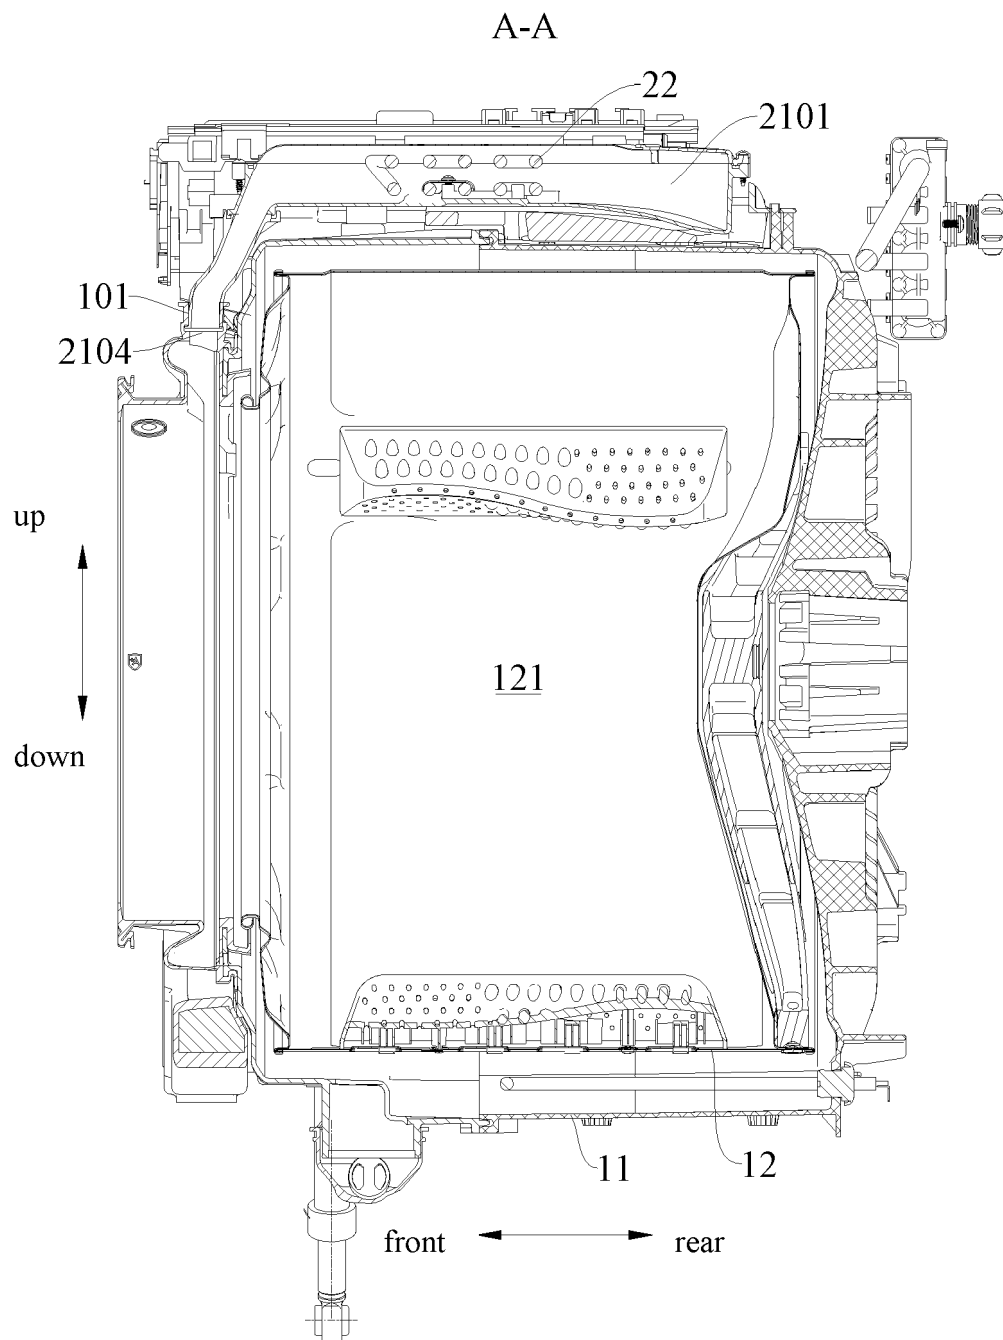


FIG. 3

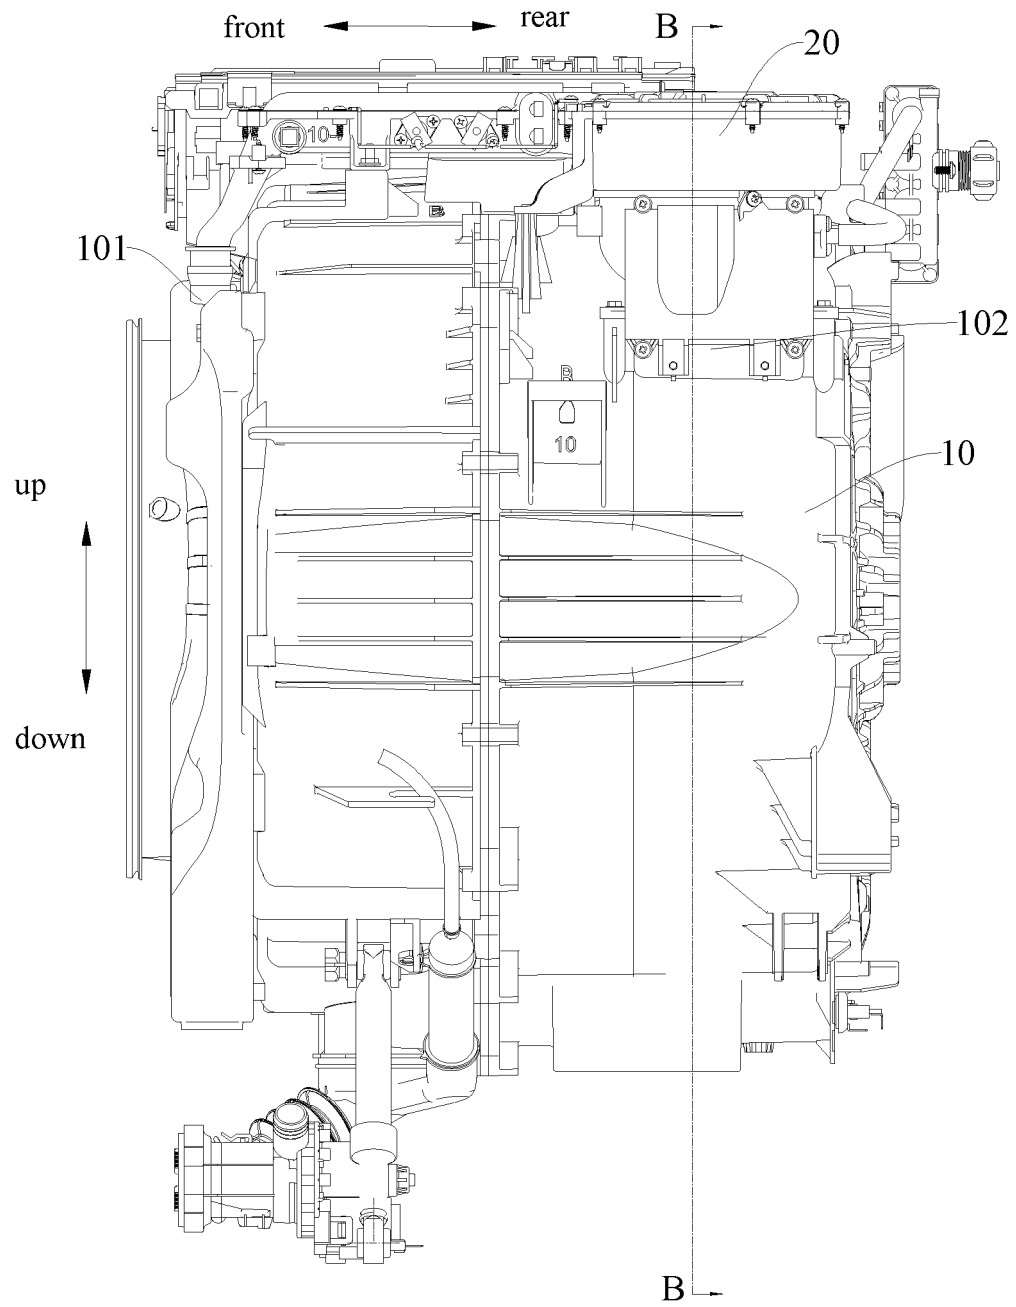


FIG. 4

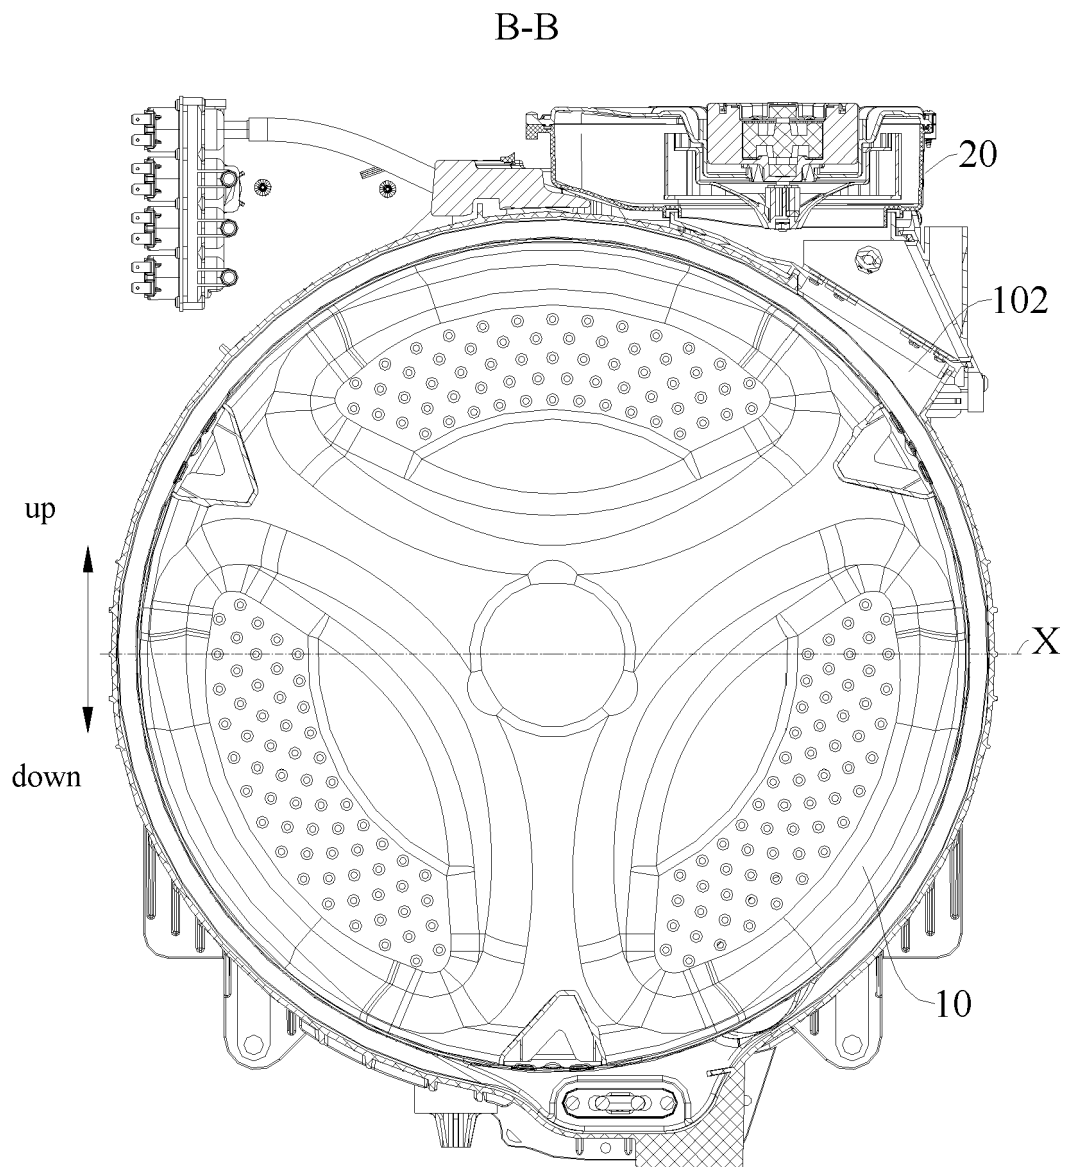


FIG. 5

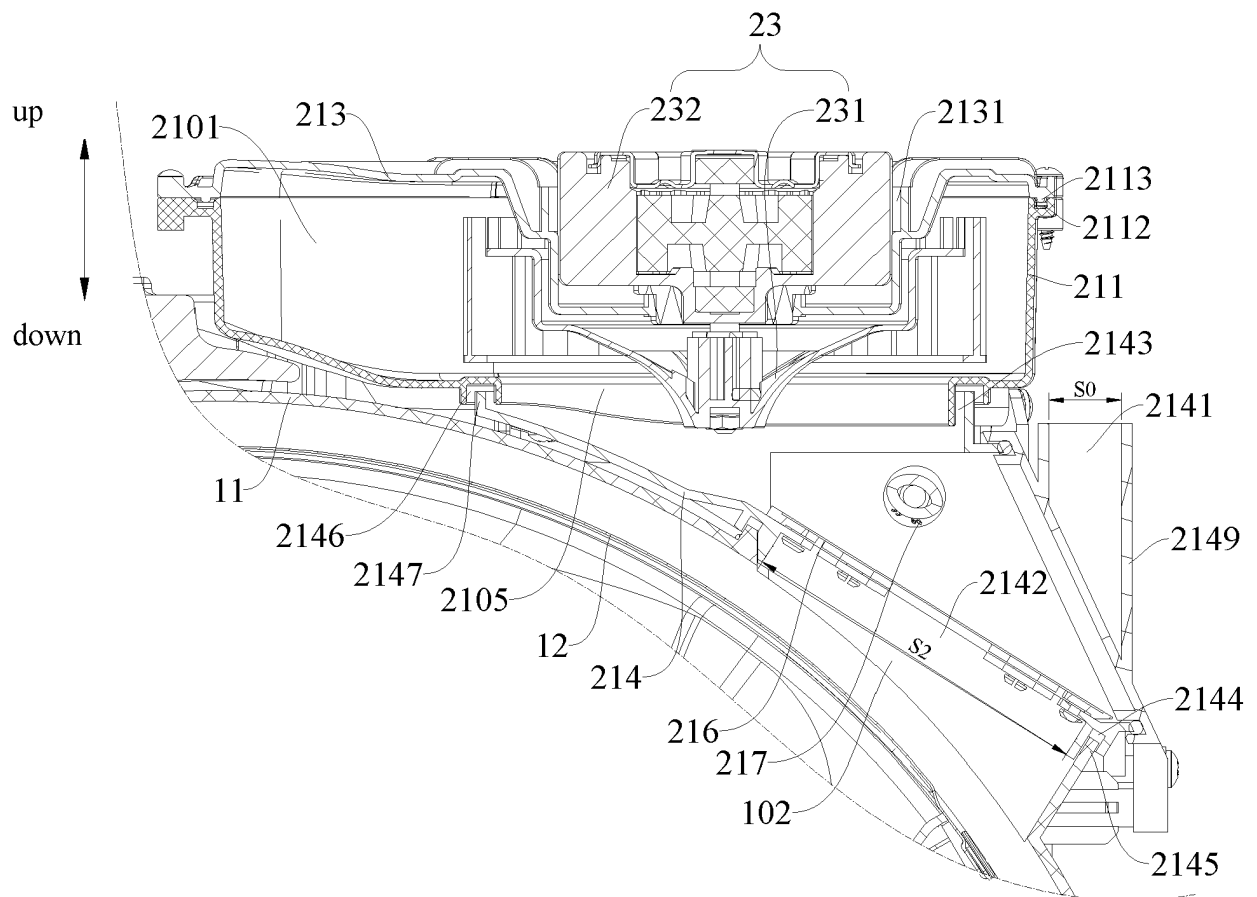


FIG. 6

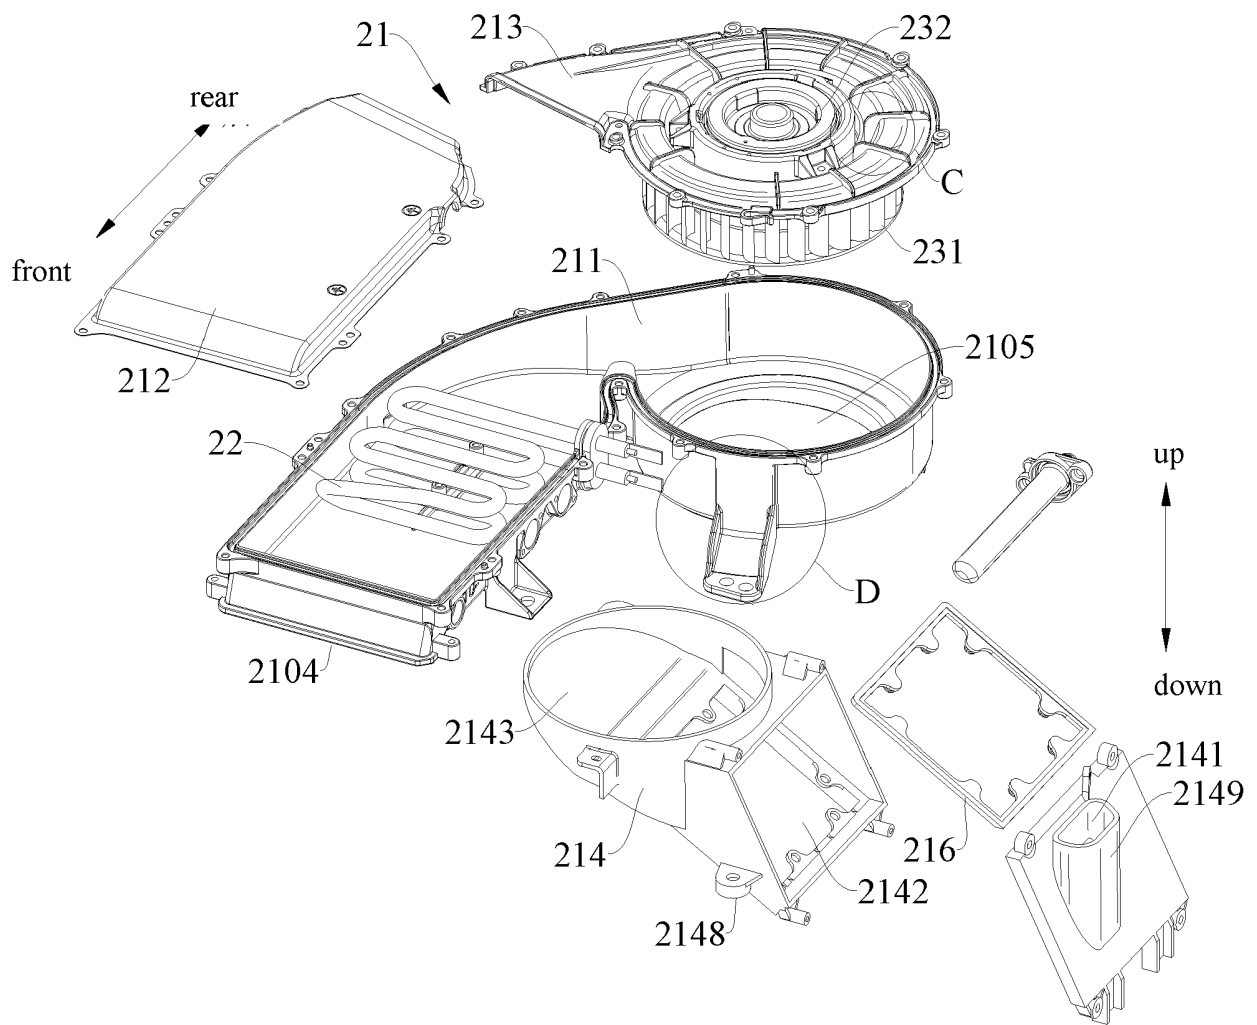


FIG. 7

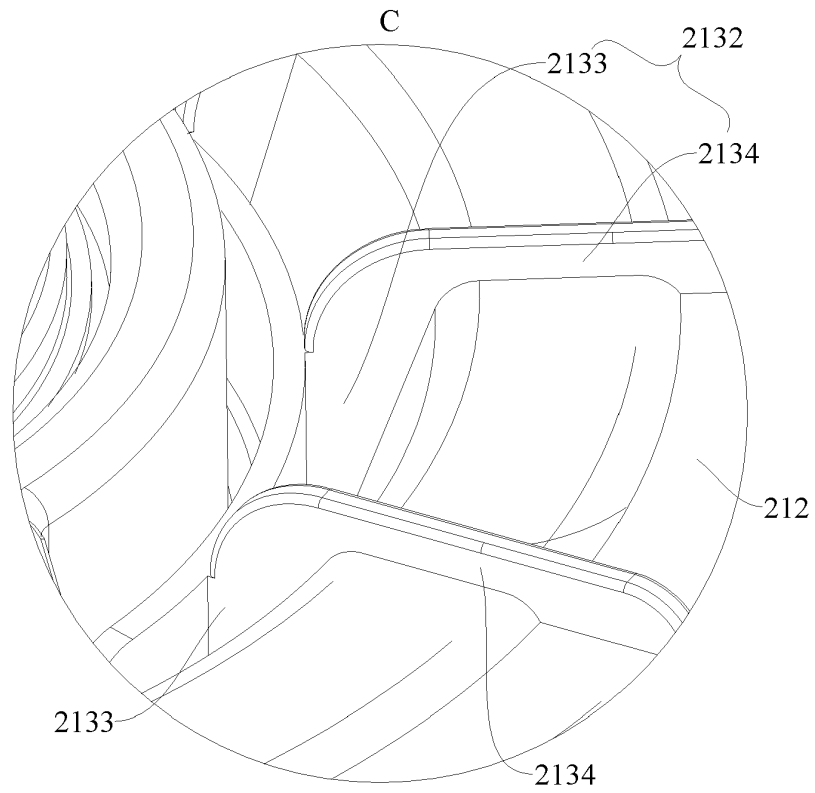


FIG. 8

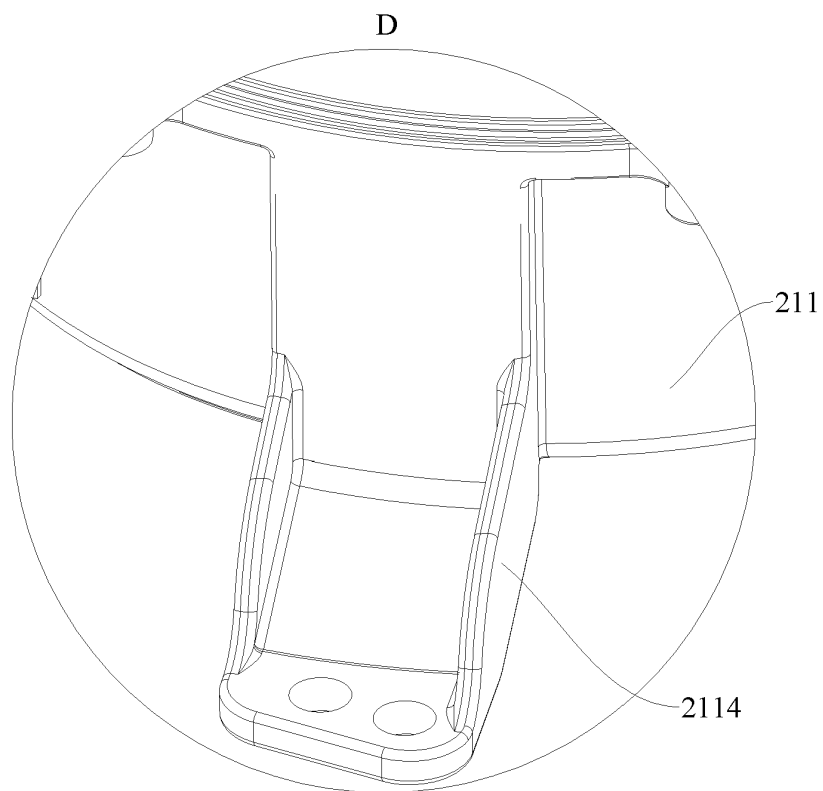


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2015191863 A1 [0004]
- WO 2018093201 A2 [0004]
- CN 109267286 A [0004]