

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 February 2008 (07.02.2008)

PCT

(10) International Publication Number
WO 2008/017019 A2

(51) International Patent Classification: **Not classified**

(21) International Application Number:
PCT/US2007/075052

(22) International Filing Date: 2 August 2007 (02.08.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/497,992 2 August 2006 (02.08.2006) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77027 (US).

(71) Applicants and

(72) Inventors (for all designated States except US): **PALMER, Larry, T.** [US/US]; 14 Crested Point Place, Spring, TX 77382 (US). **HERN, Gregory, L.** [US/US]; 24222 Silver Maple Drive, Huffman, TX 77336 (US). **ROSENBLATT, Steve** [US/US]; 3600 Montrose Boulevard, No. 502, Houston, TX 77006 (US).

(74) Agent: **PORTER, Andre, J.**; Division Intellectual Property Counsel, Baker Oil Tools Division-Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77027 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

(54) Title: ANNULAR FLOW SHIFTING DEVICE

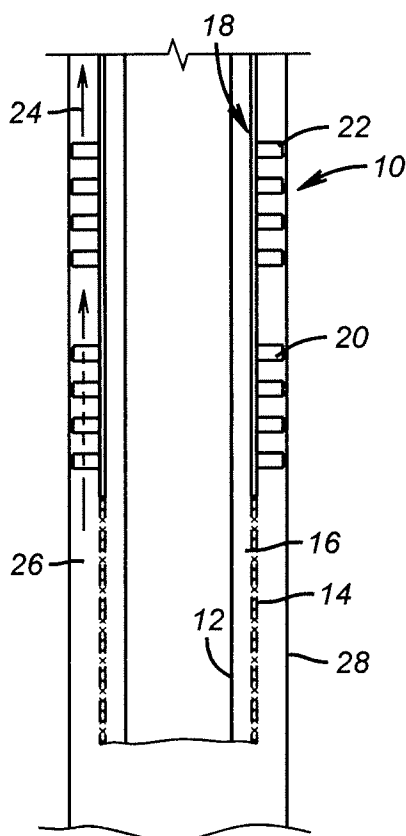

(57) Abstract: A wellbore cleanup tool collects debris when moved in one direction downhole. A flow diverter is extended for such flow diversion when debris is collected. When running the tool in the opposite direction in the wellbore, the flow diverter is in whole or in part articulated to retract so as to reduce resistance to fluid that passes around the outside of the tool. A segmented diverter can have fixed and movable components that are guided. The movable components can become longitudinally offset from the fixed components for movement in the direction where maximum flow bypass around the outside of the tool is desired. In an alternative embodiment, the diverter segments can all be movable on an inclined track to retract against a bias force for fluid bias with movement of the tool in the opposite direction allowing the bias to push the segments on the inclined track for diversion of debris laden fluid into a capture volume in the tool.

WO 2008/017019 A2

APPLICATION FOR PATENT

Title: Annular Flow Shifting Device

Inventor: Larry T. Palmer, Gregory L. Hern and Steve Rosenblatt

FIELD OF THE INVENTION

[0001] The field of this invention is wellbore cleanup tools and more particularly to flow diverting devices that direct well fluids into the tool for cleanup.

BACKGROUND OF THE INVENTION

[0002] Wellbore cleanup tools typically have a mandrel with a screen around it so as to define an annular space in between for accumulation of debris collected from the wellbore. Typically, some fluid diversion device is supported from the mandrel so that in at least one direction of movement of the tool, there is flow into the annular space and through the screen leaving the debris trapped in the annular space. The flow diverter can be fixed or movable with a movable design illustrated in USP 6,607,031 where one or more cup seals are illustrated. Some diverters block the flow totally such as one or more stacked cup seals while other designs just severely impede flow around the outside of the tool when directing flow into the annular space.

[0003] Since the cleanup of well fluids with these tools principally occurs with movement in a single direction, it is desirable to get the tool to move at maximum speed in the opposite direction where no or very little capturing of debris actually occurs. The problem occurs with diversion devices that maintain wellbore wall contact in both directions, such as cup seals. For example, if the tool is designed to direct well fluids into the annulus behind the screen when being pulled out of the hole, when the tool is run into the hole, the cup seals still resist fluid movement past them even though they are deflected from the wellbore wall. When this happens, the speed with which the tool can be run into the wellbore is reduced or a risk develops of pressurizing the formation when running in the tool. This can occur when the insertion speed displaces fluid at a faster rate than fluid can bypass the cup seals. Building pressure on the formation can reduce its

productivity while slowing the tool speed creates needless expense in operating expenses for surface personnel.

[0004] What is needed is a solution that allows delivery of the tool without speed restrictions while when the movement is reversed proper diversion of debris laden fluid into the annular space between the mandrel and the screen regardless of the design of the flow diverter. Several solutions are explored to this problem that focus on simple construction that will stand up to the downhole environment. These and other aspects of the present invention will be more clear to those skilled in the art from a review of the detailed description of the preferred embodiment and the associated drawings with the claims spelling out the full scope of the invention.

SUMMARY OF THE INVENTION

[0005] A wellbore cleanup tool collects debris when moved in one direction downhole. A flow diverter is extended for such flow diversion when debris is collected. When running the tool in the opposite direction in the wellbore, the flow diverter is in whole or in part articulated to retract so as to reduce resistance to fluid that passes around the outside of the tool. A segmented diverter can have fixed and movable components that are guided. The movable components can become longitudinally offset from the fixed components for movement in the direction where maximum flow bypass around the outside of the tool is desired. In an alternative embodiment, the diverter segments can all be movable on an inclined track to retract against a bias force for fluid bias with movement of the tool in the opposite direction allowing the bias to push the segments on the inclined track for diversion of debris laden fluid into a capture volume in the tool.

DETAILED DESCRIPTION OF THE DRAWINGS

[0006] Figure 1 shows an embodiment of the tool being run into the well with the flow diverters offset from each other;

[0007] Figure 2 is the view of Figure 1 with the tool moving in the opposite direction to collect debris and the diverter segments abutting;

[0008] Figure 3 is an alternative embodiment shown being run in with all segments retracted for fluid bypass;

[0009] Figure 4 is the view of Figure 3 with the tool moving the opposite direction and the bias force pushing all the diverter segments against the wellbore wall for flow diversion through the screen;

[0010] Figure 5 is a section view through lines 5-5 of Figure 2;

[0011] Figure 6 is a perspective view of the tool in the position of Figure 1;

[0012] Figure 7 is a perspective view of the tool in the position of Figure 2;

[0013] Figure 8 is a section along lines 8-8 of Figure 3 showing segments abutting and overlapping; and

[0014] Figure 9 is a section along lines 9-9 of Figure 4 the segments of Figure 8 still overlapping but at a larger diameter to block the annular space.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0015] Figure 1 is a schematic view of a wellbore cleanup tool **10** that has a mandrel **12** surrounded by a screen **14** to define an annular space **16** between them for the purpose of accumulation of capture debris. A diverter assembly **18** is preferably made of segments **20** and **22** that circumferentially alternate on a support sleeve **24** as shown in Figure 5. One group of the segments such as **20** can be rigidly mounted to sleeve **24** while the other group **22** can be slidably mounted for relative axial movement to an axially aligned position in Figure 2 and an axially misaligned position in Figure 1. When running into the hole the group **22** components are pushed uphole with respect to the mandrel **12** that is being run downhole. As a result the segments **22** are pushed on their guides to go axially uphole as the fluid represented by arrow **24** exerts an uphole force due to the descending mandrel **12**. Fluid flow **24** moves around the outside of the tool **10** in the annular space **26** by coursing through the circumferential gaps between stationary segments **20** formed by the uphole displacement of the segments **22**. After clearing past the segments **20** the fluid stream **24** simply makes a slight dog leg of a turn and goes

between the circumferential gaps between displaced segments **22** formed because the segments **20** are not movable axially with respect to the advancing mandrel **12** to the extent that such gap can close. Figure 1 illustrates that the tool **10** can be run into the wellbore **28** at a rapid rate because well fluids can quickly get by around the tool **10** in the annulus **26** by following a path first between segments **20** that didn't move much or at all and then making the necessary turns to get between segment **22** that have shifted up with respect to mandrel **12** to open a flow path having reduced resistance and thereby allowing rapid movement of the tool **10** downhole without creating formation pressure below it. The perspective view of Figure 6 also illustrates these concepts.

[0016] When the tool **10** is moved in the opposite direction which is out of the wellbore **28** a flow in the direction of arrow **30** is induced and that pushes the segments **22** back into axial alignment with segments **20**. This movement substantially closes off the annular space **26** around the tool **10** and directs fluid flow behind the segments **20** and **22** that are now axially aligned and into annulus **16** where the debris **32** is screened out and the remaining fluid passes through the screen **14** as the tool **10** is pulled from the wellbore **28**. Figure 7 illustrates these concepts.

[0017] In the preferred embodiment, the segments **20** and **22** are sections of wire brush to get debris off the wellbore wall **28** as the tool **10** is pulled out of the hole. The segments can have gaps between the wire strands but in the aggregate they can fulfill the purpose of acting as a flow diverter when the segments are aligned. While in the preferred embodiment the segments are alternated between stationary and movably mounted, other patterns can be used between movable and stationary segment to allow or impede flow in the annulus **26**. Other construction is envisioned for the segments apart from wires as long as the purpose of blocking and allowing annulus flow are accomplished. The segments can be made of solid blocks of material compatible with well operating conditions. Rather than segments, a unitary diverter is envisioned that can be retracted when the mandrel moves in one direction and extended when the movement direction is reversed. Segments that spread circumferentially rather than axially are also envisioned as illustrated in Figures 8 and 9. Segments may be on a scroll that rolls up when moved up an inline away from the wellbore **28** and rolls out to close off the annular

space when advanced down that same incline. Figures 3 and 4 are schematic enough to illustrate this concept.

[0018] Segments can retract on a slope in a circumferentially abutting or/and overlapping position even while moving axially relatively to each other and then get pushed down that slope while still abutting and/or overlapping until circumferential contact with the wellbore wall is made. Thus despite a growth in diameter as the segments are advanced down a slope they still can substantially obstruct the annular space 26 when brought into contact with the wellbore 28. Figures 3 and 4 are schematic enough to illustrate this concept. In Figure 3, the segments or overlapping scroll 40 is retracted on incline 42 as the mandrel 44 is brought down into the wellbore 28. This clears the annulus 26 for flow 46 to bypass the segments 40 while pushing against a bias 48 which can be a spring. When the direction of motion of the mandrel 44 is reversed, the spring 48 along with induced flow 50 push the segments or scroll 40 back down inclined surface 42 until the annular space 26 is closed and the flow 50 can be substantially redirected into annulus 16 and then through the screen 14.

[0019] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A flow diverter for an annular space in a wellbore around a downhole tool, comprising:
 - a downhole tool having a longitudinal axis;
 - a base supporting a plurality of segments relatively movable with respect to each other to selectively provide different amounts of obstruction in said annular space.
2. The diverter of claim 1, wherein:
 - said relative movement is substantially aligned with said longitudinal axis.
3. The diverter of claim 2, wherein:
 - at least one segment is movably mounted to said base for axial alignment or misalignment with said other segments depending on the direction of movement of said downhole tool in the wellbore.
4. The diverter of claim 3, wherein:
 - at least one segment is fixedly mounted to said base.
5. The diverter of claim 4, wherein:
 - said fixed and movable segments alternate circumferentially around said base.
6. The diverter of claim 5, wherein:
 - said segments comprise wire brushes.
7. The diverter of claim 1, wherein:
 - said segments comprise wire brushes.
8. The diverter of claim 1, wherein:
 - said downhole tool comprises a wellbore cleanup tool that further comprises:
 - a mandrel;
 - a screen around said mandrel defining a debris annular space to retain debris from the wellbore;
 - wherein said base retaining said segments is spaced from said mandrel such that when said segments are positioned for most obstruction of the annular space around said wellbore cleanup tool, flow is channeled into said debris annular space.
9. The diverter of claim 8, wherein:
 - said segments are positioned for most obstruction when said wellbore cleanup tool is moved out of the wellbore.

10. The diverter of claim 9, wherein:
said relative movement is substantially aligned with said longitudinal axis.
11. The diverter of claim 10, wherein:
said base comprises a taper to allow said segments to substantially retract from the annular space around said wellbore cleanup tool for minimizing said obstruction of said annular space.
12. The diverter of claim 11, wherein:
said segments are biased toward obstructing the annular space around said wellbore cleanup tool.
13. A wellbore cleanup tool defining a surrounding annular space when run in the wellbore, comprising:
a mandrel;
a screen surrounding said mandrel and defining a debris retaining annular space in between;
a movably mounted flow diverter movable between a first position where it is substantially out of said surrounding annular space and a second position where it is substantially obstructing said annular space.
14. The tool of claim 13, wherein:
said mandrel comprises a taper along which said diverter is movably mounted.
15. The tool of claim 14, wherein:
a biasing member to urge said diverter into the surrounding annular space.
16. The tool of claim 15, wherein:
said diverter comprises overlapping segments.
17. The tool of claim 15, wherein:
said diverter comprises a scroll.
18. The tool of claim 15, wherein:
said diverter comprises abutting segments in at least one position of said diverter.
19. The tool of claim 15, wherein:
said diverter comprises a plurality of spaced wires extending from at least one base.

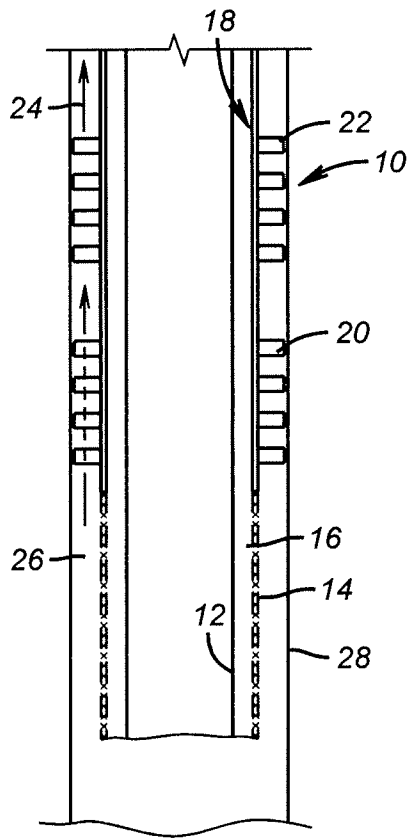


FIG. 1

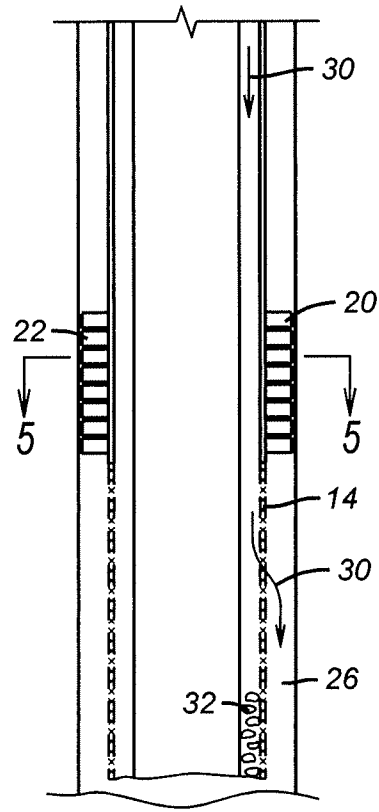


FIG. 2

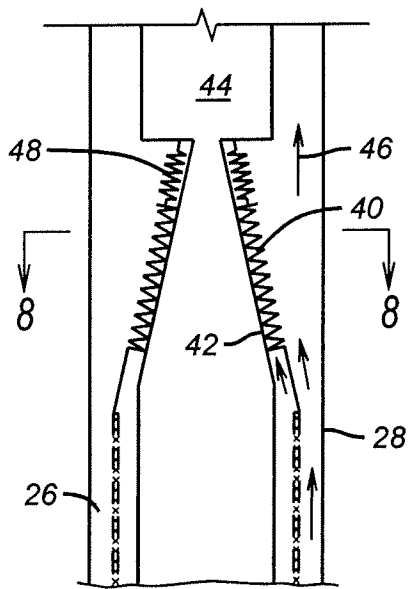


FIG. 3

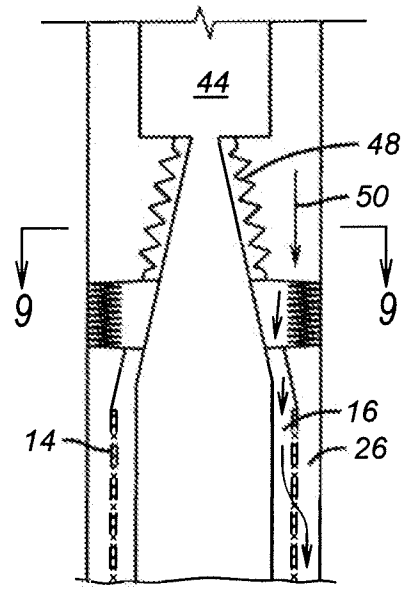


FIG. 4

+

2/3

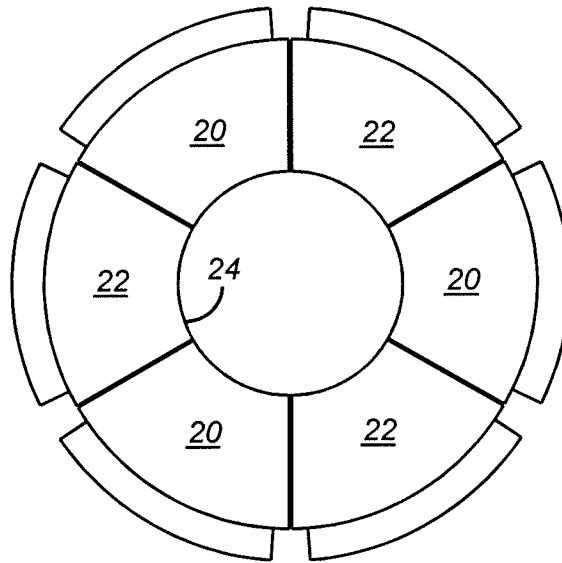


FIG. 5

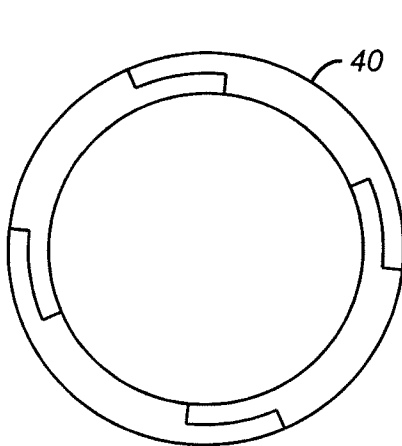


FIG. 8

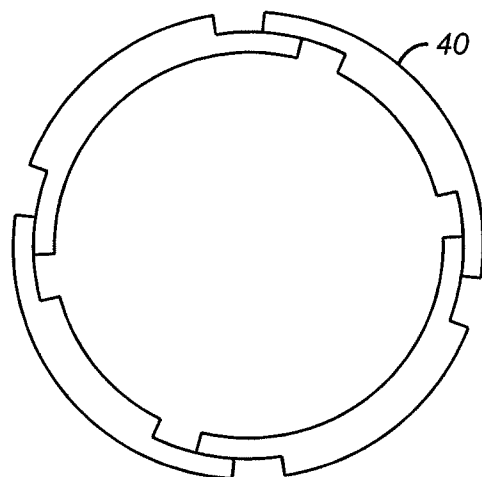


FIG. 9

+

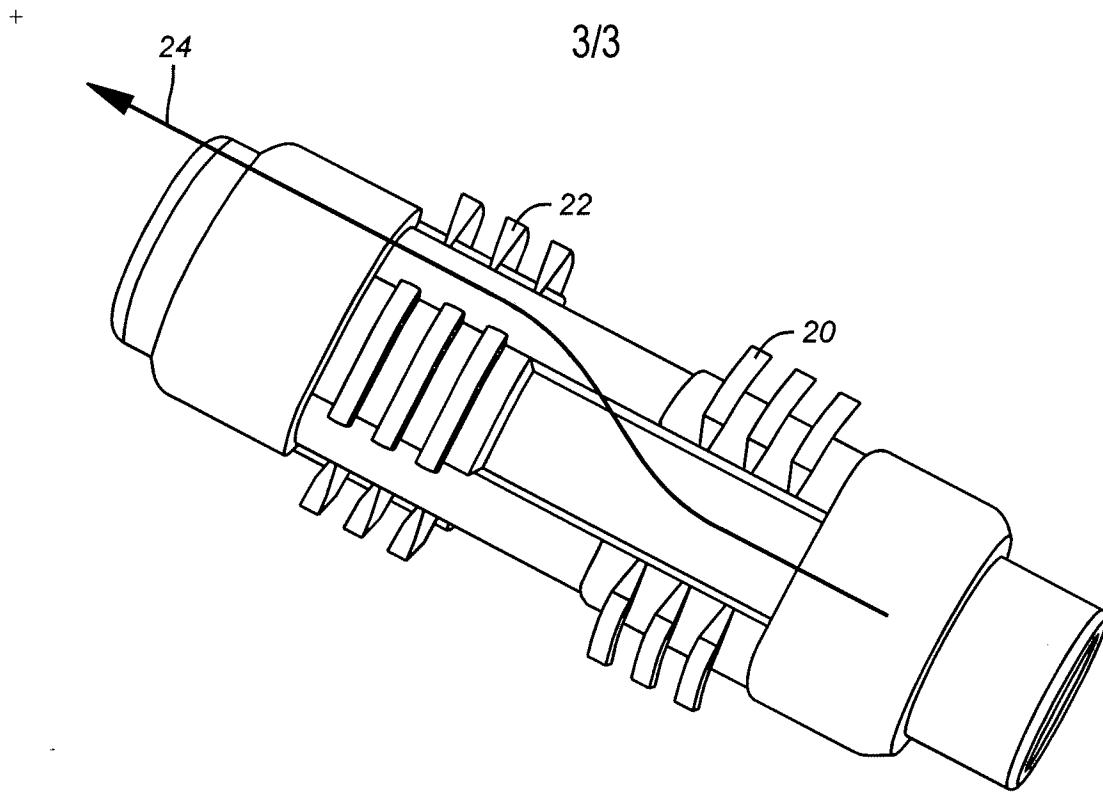


FIG. 6

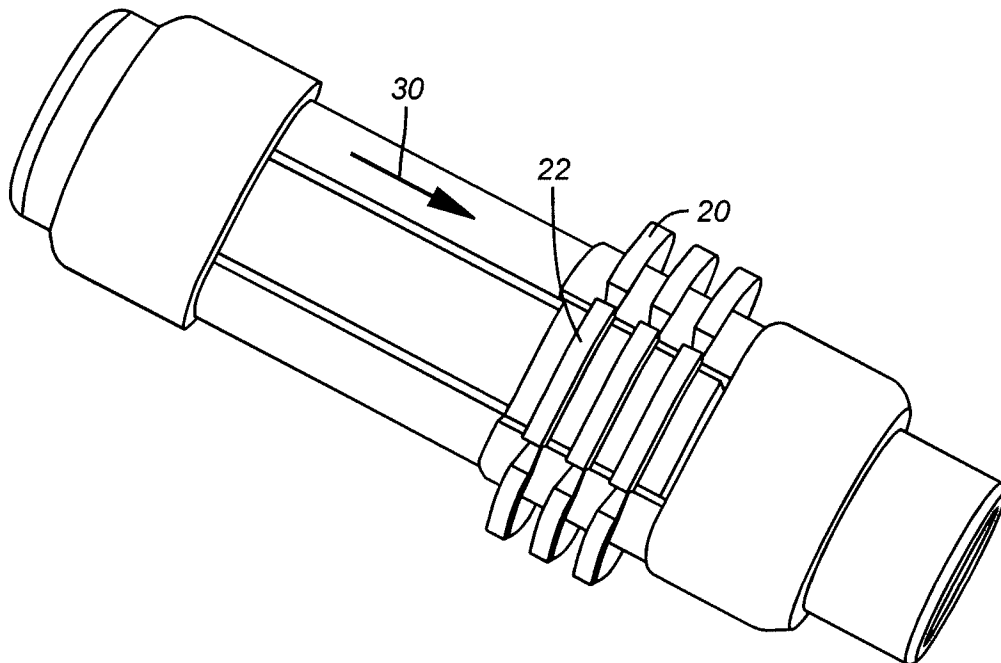


FIG. 7