

12

EUROPEAN PATENT APPLICATION

21 Application number: **89110183.4**

51 Int. Cl.4: **B41F 7/26**

22 Date of filing: **06.06.89**

30 Priority: **06.06.88 US 203351**

43 Date of publication of application:
13.12.89 Bulletin 89/50

34 Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

71 Applicant: **VARN PRODUCTS COMPANY, INC.**
175 Route 208
Oakland, NJ 07436(US)


72 Inventor: **Alvarez, Michael A.**
22 Banta Road
Kinnelon New Jersey 07405(US)

74 Representative: **Schmidt, Horst, Dr.**
Siegfriedstrasse 8
D-8000 München 40(DE)

54 **Dampening apparatus for lithographic press.**

57 A dampener for a lithographic press comprises a form roller (20b), a metering roller (22b), a reservoir of dampening solution lying above and between the form and metering rollers (20b,22b), and means for supplying solution to the reservoir. The amount of solution applied to the form roller (20b) can be controlled by adjusting the pressure between the form and metering rollers (20b,22b) without appreciably affecting the pressure between the form roller (20b) and the plate cylinder (10b). Excess moisture retained on the form roller (20b) and excess solution which collects between the plate cylinder (10b) and the form roller (20b) is continuously returned directly to the reservoir. The metering roller (22b) and the plate cylinder (10b) are driven by the press gear drive system, and the form roller (20b) is driven from frictional contact with the plate cylinder (10b) and the metering roller (22b), to aid in retrofitting the dampener to existing presses.

FIG-5

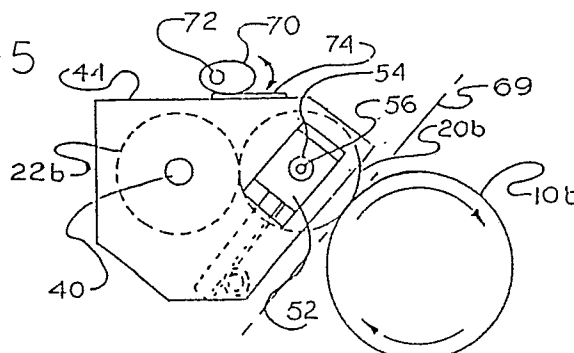

DAMPENING APPARATUS FOR LITHOGRAPHIC PRESS

Background of the Invention

The present invention relates to dampening systems for offset lithographic printing presses, and more particularly, to an improvement in the dampening solution feed apparatus which is disclosed in U.S. Patent No. 4,455,938.

The major components of a typical offset press are the plate cylinder, blanket cylinder, dampening system, and inking system. Secured around the plate cylinder is a planographic printing plate upon which is imposed an image defined by a gradation of oleophilic dots and a hydrophilic background, the intensity of the image being directly proportional to the concentration of such dots.

The function of the dampening system is to thoroughly moisten only the background of the plate with a substantially aqueous solution. Grease-based ink is applied to the plate and adheres only to the oleophilic dots to create an inked image which is transferred to an adjacent blanket cylinder and subsequently to the paper to be printed. Prior to the invention disclosed in said US Patent No. 4,455,938, the most common dampening devices used in offset lithographic presses were either of the type disclosed in U.S. Patent No. 4,088,074 issued 9 May 1978, or of the oscillating ductor roller type which has been used in this art for many years.

The dampening system is a critical element of the press. If the quantity and application of the dampening solution is not precise, the solution and ink will incorrectly coat the respective hydrophilic and oleophilic areas, and the finally printed image will be distorted. Conventional ductor roller dampening systems control the amount of solution transferred to the form roller, which contacts the plate cylinder, by adjusting the rate of oscillations of the ductor roller which reciprocates back and forth from a solution reservoir to the train of dampening rollers. The amount of solution which is then actually transferred to the plate is controlled by adjusting the pressure between the form roller and the plate cylinder. Excess solution is nipped between the form roller and the plate cylinder and accumulates on the form roller. This excess solution must eventually be reduced by decreasing the number of oscillations of the ductor roller, or it will accumulate enough to result in over-moistening of the printing plate. This is accomplished by the dampening apparatus of US Patent 4,455,938, and as a result it has enjoyed considerable success as a replacement or retrofit dampener for a number of small printing presses marketed by various com-

panies. Depending upon the existing press structure, the dampener may take various configurations so as to adapt to and receive its drive from such presses.

Summary of the Invention

The present invention is a dampening apparatus for offset lithographic printing presses which incorporates the novel features and arrangements of the dampening apparatus disclosed in US Patent 4,455,938 namely, a form roller supported parallel and tangent to the plate cylinder, a metering roller supported parallel and tangent to the form roller and pressed into contact therewith, a reservoir of dampening solution for the metering roller, preferably lying above and between the form and metering rollers, and a means for regularly supplying solution to the reservoir to maintain the reservoir level.

The form roller surface moves at a speed which matches the speed of the plate cylinder surface (and thus the speed of the plate) and also matches the surface speed of the metering roller. In the original design this is accomplished by gearing the plate cylinder and form roller together, and preferably but not necessarily also gear driving the metering roller. As described in the US patent, by means of such dampening apparatus an excessive amount of dampening solution is always in contact with the form roller. The amount of solution actually applied is controlled by adjusting the pressure between the form and metering rollers and between the form roller and the plate cylinder. Excess moisture which is retained on the form roller then is continuously returned directly to the reservoir, thus the solution does accumulate and eventually over-dampen the plate.

The form roller has a surface which is compressible and ink receptive, and the metering roller has a surface which is much more rigid than the form roller and which is also ink receptive. In operation no attempt is made to prevent or minimize the transfer of ink from the inked plate onto the dampening form roller and metering roller. Instead, contrary to the accepted practice, no effort is made to avoid such ink transfer into the dampener, and upon commencing a printing operation the liquid in the reservoir quickly becomes an emulsion of ink and dampening solution.

In the improvement of the present invention, to simplify and make easy retrofitting the dampening apparatus into existing lithographic presses, the

metering roller and the plate cylinder are mechanically driven directly by the press gear drive system, and the form roller is driven from frictional contact with both the plate cylinder and the metering roller. Thus, the surface velocities of the metering and form rollers and a plate on the plate cylinder are equilibrated.

The form roller is mounted such that its axis of rotation can be moved parallel to a tangent to the plate cylinder surface, while keeping a parallel relation with the axis of rotation of the plate cylinder and the metering roller. This allows a change in the pressure at the form roller / metering roller nip without affecting the pressure of the form roller against the plate. Also, this adjustment can be made so as to increase the pressure at the form roller / metering roller nip with increase in press speed, for controlling any tendency to transfer excess dampening solution at such higher speeds.

It is, therefore, the primary object of the present invention to provide an improvement in the prior art dampening apparatus for offset printing presses incorporating the aforementioned features; to simplify the gearing system over that of the prior art; to provide an improved gearing system for retrofit into offset lithographic printing presses; to provide a system whereby the pressure of the dampening form roller against the plate can be set to a desired value, and wherein pressure between the form and metering rollers can be increased at higher press speed without changing the form roller to plate pressure.

Other objects and advantages of the present invention will be obvious to persons skilled in the art in view of the following detailed description.

Brief Description of the Drawings

FIG. 1 is a schematic view of the existing dampening apparatus showing the form roller positively gear driven from the plate cylinder, and the metering roller being driven from frictional contact with the form roller, as explained in US Patent 4,455,938;

FIG. 2 is a schematic view similar to FIG. 1, showing the present invention in which the metering roller and the plate cylinder are gear driven by the press gear drive system, and the form roller is driven due to its frictional contact with both the plate cylinder and the metering roller;

FIG. 3 is a foreshortened top view of a retrofit type dampener constructed according to the invention;

FIG. 4 is a perspective exploded view of the dampener, illustrating the adjustment of metering roller / form roller pressure; and

FIG. 5 is a side elevation view showing a dampener frame member, illustrating the adjustment of the metering roller / form roller pressure, and the adjustment of the form roller / plate cylinder pressure.

Description of the Preferred Embodiment

FIG. 1 shows the existing dampening apparatus, which is disclosed in U.S. Patent No. 4,455,938 and incorporated herein by reference. As shown a plate cylinder 10a has a dampening form roller 20a pressed against it, and a metering roller 22a is pressed against the form roller, providing a nip in which the upper part forms a reservoir 26 for dampening solution. The form roller 20a is positively gear driven from plate cylinder 10a, and metering roller 22a is frictionally driven from the form roller 20a due to the pressure contact therebetween. Alternately, metering roller 22a can be gear driven from form roller 20a.

As shown in FIG. 2 the improvement of the present invention has the plate cylinder 10b and the metering roller 22b mechanically driven by the existing gear drive system of the press. It is necessary only to add gears as appropriate to transfer the drive to the metering roller, since the plate cylinder is already gear driven. The form roller 20b is driven from frictional contact with plate cylinder 10b and metering roller 22b, since the form roller is positively pressed against both of them, particularly against the metering roller 22b.

It should be apparent that in the drive arrangement of this system the same dampening function is retained as the dampening system disclosed in U.S. Patent No. 4,455,938, but in certain cases is more readily adaptable for retrofitting into existing offset lithographic printing presses. The ends of the reservoir above the form roller / metering roller nip are provided by seals 25 (FIG. 3) which engage the radial ends of the form roller 20b and the peripheral ends of the metering roller 22b, in the same manner as described in detail in U.S. Patent No. 4,455,938.

Referring to FIG. 3, a pair of support brackets 30 and 32 are fastened (as by bolts) to the side frame members 34 of the press. Gear 36 represents a final gear in a train driven from the press drive. In particular gear 36 meshes with an idle gear 35 which in turn meshes with a drive gear 11 for driving the plate cylinder 10b. Rotary power can be taken from gear 36 to the metering roller 22b for rotating said metering roller at an appropriate speed with respect to said plate cylinder 10b, e.g. at a 1:1 surface speed or with a "built in" slip, if desired. Brackets 30 and 32 support roller bearings

38 which in turn receive the extended ends of the shaft 40 of metering roller 22b. A snap ring 42 is fitted to one end of shaft 40, outboard of bearing 38 in bracket 30, to locate the dampening unit laterally in brackets 30, 32.

As shown in FIGS. 4 and 5, the structure of the dampener apparatus itself includes side frame members 44 connected by cross rods 46, which are pinned or otherwise fastened at their ends to frame members 44. Those frame members include bearings 48 receiving the metering roller shaft 40, and elongated slots 50 which receive blocks 52 that can slide in the slots 50 in a direction generally tangential to form roller 20b. Each block 52 includes a roller bearing 54 which receives an end of the form roller shaft 56, supporting the form roller 20b parallel to and in contact with the metering roller 22b. Thus, as can be perceived from FIGS. 4 and 5, the dampener apparatus itself is rotatable about the centerline of metering roller shaft 40. By pivoting the dampening apparatus about said centerline the pressure contact between the form roller 20b and the plate cylinder 10b can be adjusted as will be described below in further details.

Extending from blocks 52, through guide bores 58 in the dampener frame members, are adjustment or control rods 60 which are formed with a number of gear teeth to provide a short rack 62. A shaft 64, having small gears 66 thereon, extends between the dampener frame members 44 and is rotatable by a handle 67 pinned to shaft 64, to move control rods 60 in unison, thereby to move the form roller 20b toward and away from the metering roller 22b to adjust the pressure at their nip 68. The region above that nip functions (as is known) as the reservoir 26 for dampening solution. Due to the arrangement of the slots at a tangent 69 to the plate cylinder 10b such adjustment of the metering/form roller pressure does not affect the pressure of the form roller 20b against the plate cylinder 10b. Furthermore, since the seals 25 engage the radial ends of the form roller 20b, adjusting motion of that roller as just described does not affect the sealing action.

It has been noted that after the dampener has been adjusted at slow press speeds (e.g. below 350 rev./min.) to obtain the proper application of dampening solution, a substantial increase in press speed (e.g. to 1000 rev./min. or more) can result in excess dampening of the plate. The above-described adjustment feature is therefore also useful to provide pre-set increase in form roller / metering roller nip pressure. This may be accomplished manually by setting the handle to a predetermined position, or by a suitable form of manually or automatically actuated mechanism (not shown) which will rotate shaft 64 appropriately to increase

this nip pressure to the level desired.

The pressure of the form roller 20b against the plate on cylinder 10b is achieved by cams 70, fixed to a cross-shaft 72, pressing on a wear plate or follower 74 at the top of each frame member 44. Movement of this mechanism (which is per se known) pre-sets the position of the dampener frame, so as to exert a predetermined pressure of the form roller 20b against a plate on plate cylinder 10b.

As a summary a preferred embodiment of a dampening apparatus according to the invention comprises a roller system having at least a metering roller 22b and a form roller 20b. A nip between these rollers is closed by seals at the roller ends thereby providing a reservoir 26 for a dampening solution. The metering roller 22b is positively driven from the plate cylinder 10b and the form roller 20b is driven by frictional contact with either of the metering roller and the plate cylinder. The nip pressure between the form and metering rollers 20b, 22b can be adjusted by shifting the axle of the form roller 20b, and the whole apparatus is rotatable about the axle of the metering roller 22b for adjusting the nip pressure between the form roller 20b and the plate cylinder 10b.

While the forms of apparatus herein described constitute a preferred embodiment of this invention, it is to be understood that the invention is not limited to these precise forms of apparatus, and that changes may be made therein without departing from the scope of the invention which is defined in the appended claims.

Claims

1. A dampener for an offset lithographic printing press having a plate cylinder on which a lithographic plate can be mounted, said dampener comprising:

a frame adapted for mounting on the press adjacent the plate cylinder (10b);

a form roller (20b) rotatably supported in said frame for contact with a plate on the plate cylinder;

a metering roller (22b) rotatably supported in said frame in pressure contact with said form roller and on the opposite side thereof from the plate cylinder and forming with said form roller a reservoir (26) for a dampening solution;

said form roller and said metering roller having ink receptive surfaces and the surface of said metering roller being substantially less resilient than the surface of said form roller;

means (70-74) for urging said form roller into contact with a plate on the plate cylinder;

means (50-66) urging said metering roller and said form roller into pressure contact with each other;

and

means providing a supply of dampening solution to said reservoir (26) whereby solution in said reservoir is continually mixed with ink picked up from the plate by the action of the metering and form rollers and the resulting emulsion of solution and ink is applied to the plate by said form roller;

characterized by

means (11,35,36) for positively driving said metering roller (22b) from the plate cylinder drive means, and

said form roller (20b) being driven from frictional contact with said plate cylinder and said metering roller.

2. A dampener for an offset press as defined in claim 1, further comprising:

a shaft (40) supporting said metering roller (22b);

bearing means supporting said metering roller in said frame with portions of said shaft extending outwardly from said frame;

a pair of mounting brackets (30,32) adapted for attachment to frame members (34) of the press;

a bearing in each of said brackets receiving an end of said shaft to provide a mounting for said frame coincident with the axis of said shaft.

3. A dampener for an offset press as defined in claim 1 or 2, further comprising:

slots (50) formed in said frame arranged parallel to a tangent to said plate cylinder (10b);

blocks (52) slidably mounted in said slots;

bearing in said blocks receiving the end of said form roller (20b);

bearings supported in said frame and receiving ends of said metering roller (22b) in spaced relation to said slots;

control rods (60) attached to said blocks; and

said means for urging said metering roller and said form roller into pressure contact including means (57,62,64,66) acting on said control rods to move said blocks in a direction to move the axis of said form roller toward and away from the axis of said metering roller.

4. A dampener for an offset lithographic printing press having a plate cylinder on which a lithographic plate can be mounted, said dampener comprising:

a frame adapted for mounting on the press adjacent the plate cylinder (10b);

a form roller (20b) rotatably supported in said frame for contact with a plate on the plate cylinder;

a metering roller (22b) rotatably supported in said frame for contact with said form roller and on the opposite side thereof from the plate cylinder and forming with said form roller a nip, the regions of said metering roller and form roller above such nip providing a reservoir (26) for a dampening solution; means (50-66) urging said form roller into pressure contact with said metering roller;

said form roller and said metering roller having ink receptive surfaces and the surface of said metering roller being substantially less resilient than the surface of said form roller;

5 means (70-74) for urging said form roller into contact with a plate on the plate cylinder; and

means providing a supply of dampening solution to said reservoir whereby solution in said reservoir is continually mixed with ink carried from the plate by said form roller and the resulting emulsion of solution and ink is applied to the plate by said form roller;

characterized by

10 drive means (11,35,36) rotatably connected to the plate cylinder (10b) and to said metering roller (22b),

in which said form roller (20b) being driven from frictional contact with the plate cylinder and said metering roller,

20 said form roller and said metering roller rotating in opposite directions at substantially the same surface speed such that the contacting portions thereof move downwardly through the nip and said form roller carries a mixture of ink and dampening solution from said nip onto a plate on the plate cylinder at the same surface speed as the plate.

5 A dampener for an offset press as defined in claim 4 wherein said metering roller (22b) has shaft ends extending from its opposite ends;

30 bearing means supporting said shaft ends in said frame with portions of said shaft ends extending outwardly from said frame;

a pair of mounting brackets (30,32) adapted for attachment to frame members (34) of the press;

35 a bearing in each of said brackets receiving one of said shaft ends providing a mounting for said frame coincident with the axis of said shaft and about which said frame can rotate to move the surface of said form roller toward and away from the plate cylinder.

40 6. A dampener for an offset press as defined in claim 4 or 5, further comprising:

slots (50) formed in said frame arranged parallel to a tangent to the plate cylinder (10b);

45 blocks ((52) slidably mounted in said slots;

bearings in said blocks receiving the ends of said form roller (20b);

bearings supported in said frame and receiving ends of said metering roller (22b) in spaced relation to said slots;

50 said means for urging said metering roller and said form roller into pressure contact including means (57,62,64,66) acting on said blocks to move the axis of said form roller toward and away from the axis of said metering roller, while maintaining the pressure of the form roller against a plate on the plate cylinder.

FIG-1

PRIOR ART

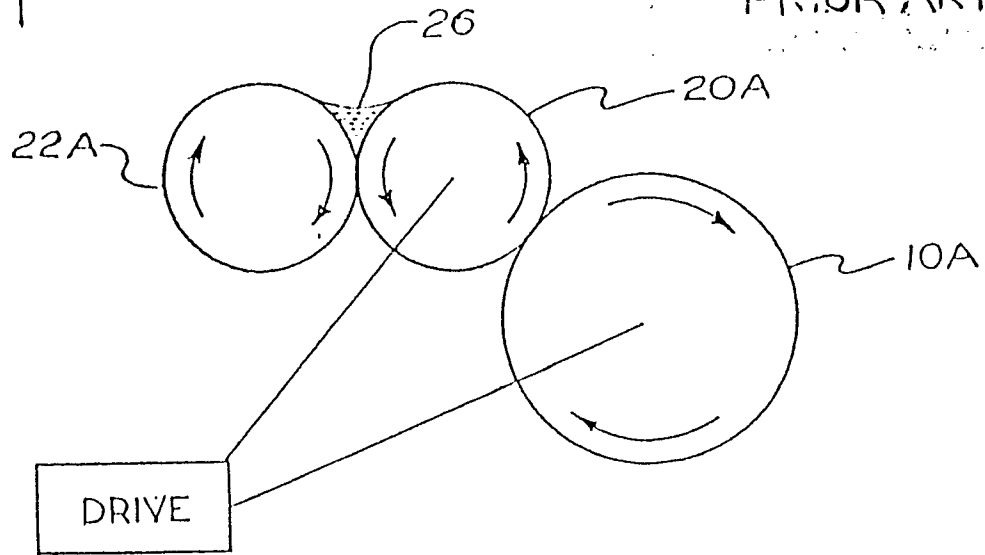


FIG-2

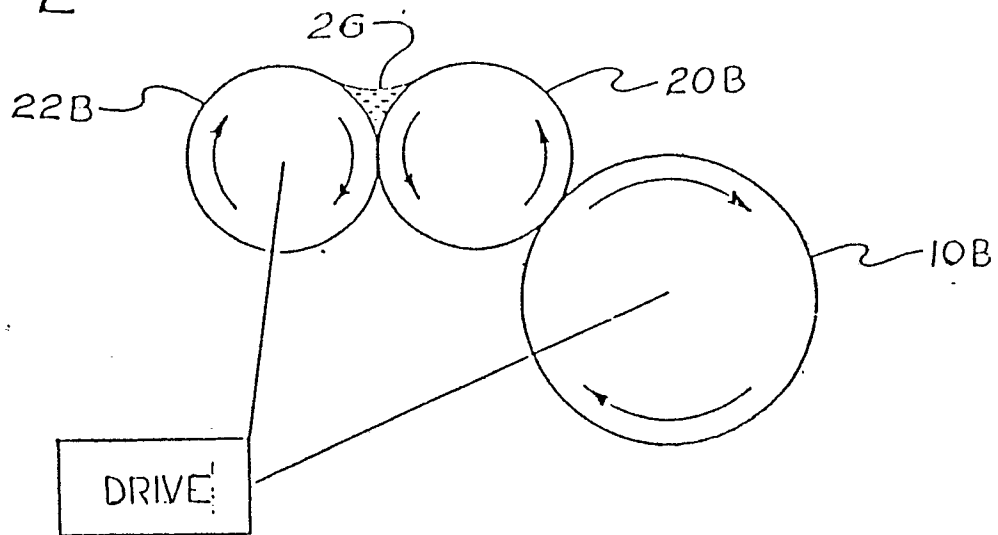


FIG-5

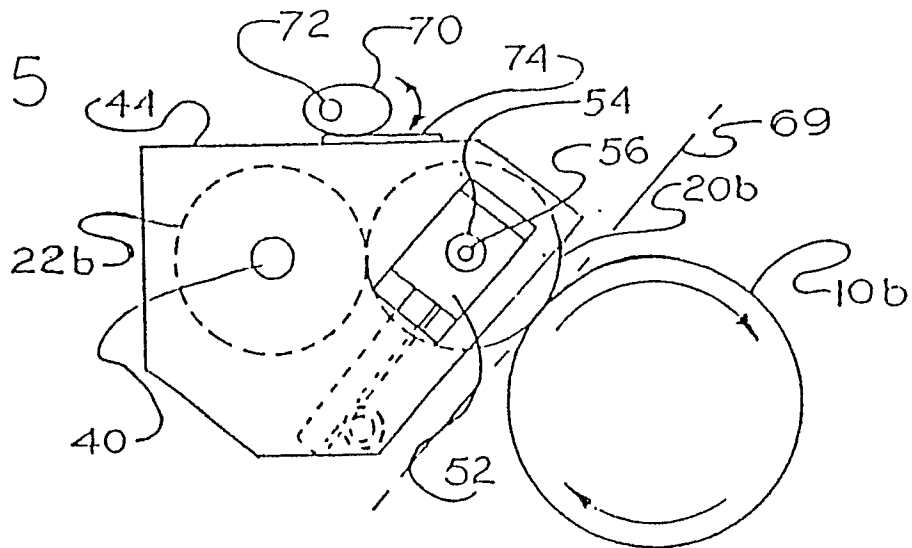


FIG-3

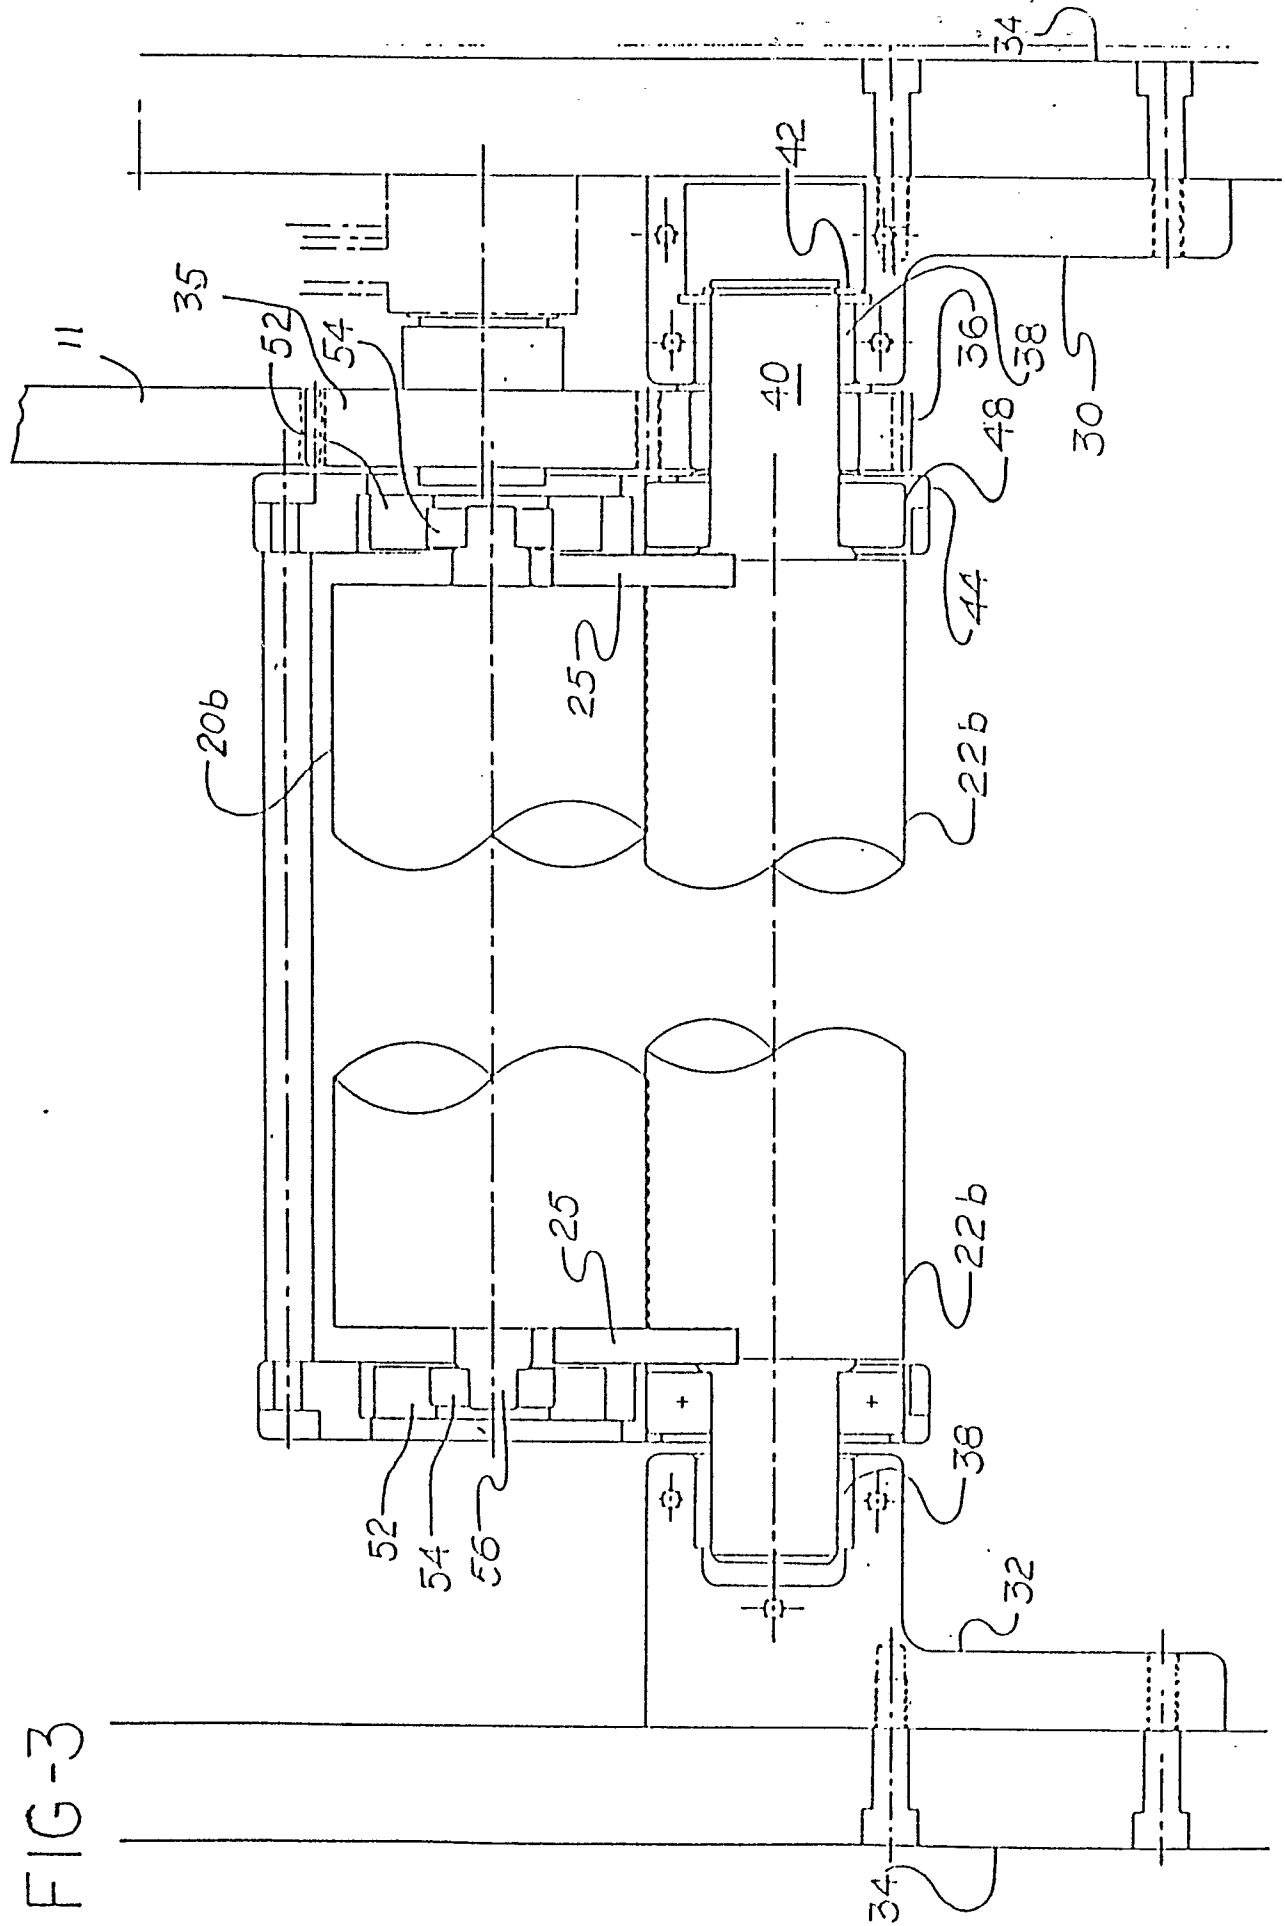


FIG -4

