

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2012244703 B2**

(54) Title
Joint prosthesis having a bending hinge that comprises a spreading axle

(51) International Patent Classification(s)
A61F 2/38 (2006.01) **A61F 2/30** (2006.01)

(21) Application No: **2012244703** (22) Date of Filing: **2012.04.19**

(87) WIPO No: **WO12/143445**

(30) Priority Data

(31) Number	(32) Date	(33) Country
11163204.8	2011.04.20	EP

(43) Publication Date: **2012.10.26**

(44) Accepted Journal Date: **2016.09.08**

(71) Applicant(s)
Waldemar Link GmbH & Co. KG

(72) Inventor(s)
Bartels, Carolin;Dmuschewsky, Klaus;lredi, Marco

(74) Agent / Attorney
Griffith Hack, GPO Box 4164, Sydney, NSW, 2001

(56) Related Art
US 6984249 B2

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges
Eigentum

Internationales Büro

(43) Internationales
Veröffentlichungsdatum

26. Oktober 2012 (26.10.2012)



(10) Internationale Veröffentlichungsnummer

WO 2012/143445 A1

(51) Internationale Patentklassifikation:

A61F 2/38 (2006.01) A61F 2/30 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2012/057165

(22) Internationales Anmeldedatum:
19. April 2012 (19.04.2012)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
11163204.8 20. April 2011 (20.04.2011) EP

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme
von US): DERU GMBH [DE/DE]; Oststrasse 4-10, 22844
Norderstedt (DE).

(72) Erfinder: und

(75) Erfinder/Anmelder (nur für US): BARTELS, Carolin
[DE/DE]; Königstraße 28, 25355 Barmstedt (DE).

DMUSCHEWSKY, Klaus [DE/DE]; Lemsahler
Landstraße 173 a, 22397 Hamburg (DE). IREDI, Marco
[DE/DE]; Heuberg 7, 22848 Norderstedt (DE).

(74) Anwalt: GLAWE DELFS MOLL; Rothenbaumchaussee
58, 20148 Hamburg (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AF, AG, AL,
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

[Fortsetzung auf der nächsten Seite]

(54) Title: JOINT PROSTHESIS HAVING A BENDING HINGE THAT COMPRISES A SPREADING AXLE

(54) Bezeichnung : GELENKPROTHESE MIT EINEM BEUGESCHARNIER MIT SPREIZACHSE

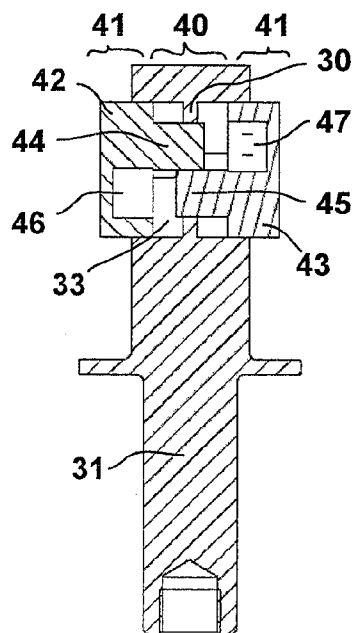


Fig. 3 c)

(57) Abstract: The invention relates to a joint prosthesis having a bending hinge, which is formed by a hinge fork and an axle pin (4), which comprises two axle stubs (42, 43), which are arranged in an installation position for insertion, in which installation position the axle stubs are retracted in a coupling piece (3), and in an expanded position after implantation by movement in the axial direction into aligned hinge holes of the hinge fork, wherein the axle pin (4) has two bearing areas (41) at the ends of the axle pin and a joining area (40) lying therebetween, and the axle pin is separated in the joining area (40) along a plane (49) extending in the axial direction, which plane intersects with the jacket of the axle pin (4) at two points.

(57) Zusammenfassung: Die Erfindung betrifft eine Gelenkprothese mit einem Beugescharnier, das von einer Scharniergabel und einem Achsbolzen(4) gebildet ist, der zwei Achsstümpfe (42, 43) umfasst, die zum Einsetzen in einer in einem Koppelstück (3) eingezogenen Montagestellung und nach Implantation durch Bewegung in Achsrichtung in fluchtende Scharnierbohrungen der Scharniergabel in einer expandierten Stellung angeordnet sind, wobei der Achsbolzen (4) zwei Lagerbereiche (41) an seinen Enden und einen dazwischen liegenden Fügebereich (40) aufweist, und er im Fügebereich (40) längs einer in Achsrichtung verlaufenden Ebene (49) getrennt ist, welche den Mantel des Achsbolzens (4) an zwei Stellen schneidet.



(84) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Erklärungen gemäß Regel 4.17:

- hinsichtlich der Identität des Erfinders (Regel 4.17 Ziffer i)
- hinsichtlich der Berechtigung des Anmelders, ein Patent zu beantragen und zu erhalten (Regel 4.17 Ziffer ii)
- Erfindererklärung (Regel 4.17 Ziffer iv)

Veröffentlicht:

- mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

**Joint prosthesis having a bending hinge that comprises
a spreading axle**

5 The invention relates to a joint endoprosthesis having
a bending hinge.

10 Endoprostheses of this kind are used, in particular, as
prostheses for knee joints. Owing to the high loading
on knee joints by virtue of the body weight of the
patient and owing to the complex movement sequence of
said knee joints, they are comparatively more
susceptible to dysfunction due to wear or disease. The
replacement of a knee joint by an endoprosthesis is a
complicated operation which puts stress on the patient.
15 It is therefore desirable to be able to implant the
endoprosthesis in a manner which is as straightforward
and insusceptible to faults as possible in order to
avoid complications.

20 To this end, a joint endoprosthesis of the kind cited
in the introductory part which has a spreadable axial
pin has been disclosed (EP 1 381 335 B1). Said joint
endoprosthesis comprises a tibial component and a
femoral component which are connected to one another in
25 an articulated manner by means of a coupling piece. A
bending joint and a rotary joint are formed. The
bending joint allows flexion and extension of the knee.
To this end, the coupling piece has an axial eye into
which an axial pin, which comprises pin stubs, is
30 inserted. The pin stubs are provided with mutually
complementary coaxial recesses, with the result that
they can be moved toward one another or away from one
another in a telescopic manner along their common
center axis. For insertion purposes, the pin stubs have
35 to be moved completely toward one another and are
therefore located in an installation position in which
the pin stubs are retracted into the coupling piece.

After the coupling piece has been installed in the mating piece, a hinge fork on the femoral component, said pin stubs are spread and thereby expand into the holes in the hinge fork which are aligned with one another. As a result, the coupling piece is connected to the femoral component in a pivotable manner. This axial pin allows simpler installation, however complications may arise in the event of the pin stubs becoming jammed.

It can be desirable for at least some embodiments of the invention to provide, proceeding from the last-mentioned prior art, an improved joint endoprosthesis which avoids this disadvantage.

As disclosed herein, the axial pin of said bending hinge comprises two pin stubs which are arranged in an installation position, in which they are retracted into the coupling piece, for insertion, and are arranged in a spread position after insertion of the central part by being moved in their longitudinal direction into aligned hinge holes in the hinge fork.

In a first aspect, there is provided a joint prosthesis having a bending hinge which is formed by a hinge fork and an axial pin which comprises two pin stubs which are arranged in an installation position, in which they are retracted in a coupling piece for insertion purposes, and are arranged in an expanded position after implantation by being moved in the axial direction into aligned hinge holes in the hinge fork, wherein the axial pin has two bearing regions at its ends and a joining region which is situated between said bearing regions, and the axial pin is separated in the joining region such that a planar interface between the stubs is a plane along the axial direction and

intersecting a circumferential surface of the axial pin at two locations.

5 An embodiment of the invention is based on the idea of dividing the joining region of the two pin stubs into two half-shafts, specifically by means of a plane which runs along the center axis and intersects the casing of the axial pin at two points. This is generally, but not necessarily, the center plane. Said plane can be
10 composed of several component planes, but it is continuous in most cases. Since said plane runs from one side to the other side, it has a maximum width, that is to say is the same size as the diameter of the pin in the joining region. This may produce a plane
15 which extends over the entire diameter and along which the two pin stubs are guided with their maximum width. Guidance over a wide region may ensure favorable friction conditions and may thereby prevent jamming. Since, moreover, the guide plane intersects the casing
20 at at least two locations, a degree of freedom may be available for compensating for tilting. This may constitute a considerable advantage over the prior art with closed - for example hollow-cylindrical - guide planes which can have a tendency to become blocked on
25 account of tilting. An embodiment of the invention therefore provides considerable advantages both during the initial implantation and also in the case of any subsequent adjustments.

30 The pin stubs preferably complement one another in their joining region. As a result, the same outer contour as that exhibited by the undivided axial pins which are conventionally used can be achieved by simply plug-connecting said pin stubs. The axial pin according
35 to an embodiment of the invention can therefore be used in conventional coupling pieces. Particular preference

may be given to the pin stubs not only being complementary but even having the same shape. In an embodiment, the pin stubs have half-pegs in the joining region. By way of example, the cross section in the joining region has a half-moon shape.

The coupling piece may advantageously have a separating element with an aperture for receiving the joining region of the pin stubs, with the aperture being non-round. As a result, the two pin stubs can be prevented from rotating in the coupling piece. Therefore, a separate rotation-prevention means, for example in the form of a screw which can be easily lost, may no longer be required.

A movement-prevention means can be arranged on the coupling piece. Said movement-prevention means may act on the two pin stubs and secures them in their spread position. Therefore, a spring, as provided in the prior art for spreading purposes, may not be required. In the event of an adjustment, the pin stubs can therefore be moved into the non-spread installation position by simply removing the movement-prevention means, without it being necessary to permanently overcome the counteracting force of the spreading spring for this purpose.

In order to be able to act on the pin stubs in the coupling piece, an access slot may be provided on each coupling piece, preferably for each pin stub. Said access slot may be oriented such that its elongate extent lies in the axial direction and has an extent which is at least the same size as the area over which the pin stubs are to be spread. A spreading instrument which can be inserted into the access slots may be provided for the purpose of moving the pin stubs. Said

spreading instrument may be expediently in the form of a clip with two free ends for insertion into the access slots, wherein the free ends can preferably be at an angle of 30 degrees to 75 degrees in relation to one another. Said spreading instrument can be formed from a piece of wire, the wire forming a three-point loop, which faces away from the free ends, in the rear region of said piece of wire. A sliding sleeve can be mounted on said three-point loop, said sliding sleeve moving from an inoperative position, in which the free ends are close to one another, the to a movable spreading position in which the free ends are moved away from one another.

A fastening guide can be arranged on the spreading instrument. Said fastening guide may be designed as a sleeve in which a locking screw is arranged. To this end, said sleeve may expediently have an internal thread into which the locking screw can be screwed. The fastening guide may be oriented such that it targets the pin when the spreading instrument is mounted on the coupling piece. The length of the locking screw is preferably greater than the distance between the coupling-piece-side end of the fastening guide and the joining region of the pin stubs. This may ensure that the spreading instrument, together with the fastening guide, can be removed only if the pin stubs are secured in their spread position.

The sliding sleeve can have a circumferential radial collar which has a recess in its side which faces the fastening guide. This may ensure movement also on a curved clip of the spreading instrument and a straight access path for a screwdriver to the locking screw which is arranged in the fastening guide.

- Furthermore, a pair of adjustment pliers can be provided. Said pair of adjustment pliers may have handles at its rear end and receiving fingers at its front end, said receiving fingers being designed to be
5 passed through the access slots and having an oval cross section. The receiving fingers may diverge at the front at an angle of preferably between 5 and 25 degrees.
- 10 Embodiments of the invention will be explained in greater detail below with reference to the appended drawing which illustrates an advantageous exemplary embodiment. In said drawing:
- 15 fig. 1 shows a rear view of a joint prosthesis;
- fig. 2 shows a perspective view of the coupling piece;
- 20 figs 3a-c show side views of the coupling piece;
- figs 4a-c show views of a detail of a pin stub;
- fig. 5 shows a plan view of a spreading
25 instrument;
- fig. 6 shows a side view of the coupling piece with the spreading instrument in section;
- 30 fig. 7 shows a perspective view relating to fig. 6; and
- figs 8a and b show a perspective view of a pair of
35 adjustment pliers and a view of a detail of a pair of adjustment pliers.

The endoprosthesis according to an exemplary embodiment of the invention will be explained using a knee joint endoprosthesis. The endoprosthesis of a knee joint substantially comprises two components 1, 2, one being in the form of a tibial component 1 and the other being in the form of a femoral component 2. In the femoral component 2, a femoral bearing half 21, which has two condyle-like runners 22 which project in the manner of a fork in relation to the tibial component 1, adjoins a stem 20 which is inserted into a femur of a patient. Said runners are supported on a tibial plateau 12 which is arranged on a tibial bearing half 11 which is fastened to a tibia of the patient by means of a stem 10.

A coupling piece 3 is arranged between said stems, said coupling piece a T-shaped piece 30 as a main body with a receiving eye 33, which is arranged in its upper region, for an axial pin 4 and with a bearing pin 31 for being received in a bearing bushing in the tibial bearing half 11.

A first bearing (flexion bearing) allows a pivoting movement between the components 1 and 2, that is to say realizes the bending movement between the thigh and the lower leg. This pivoting movement about the axis of the axial pin 4 therefore forms the first axis for the movement of the knee joint prosthesis. The pin 31 is oriented transverse to said first axis by way of its center axis which forms a second axis for the rotary movement with which the femur part 2 rotates about the second axis relative to the tibia component 1. For this rotary bearing, the pin 31 of the coupling piece 3 projects into the bearing bushing. A bearing insert 32 is arranged between said pin and bearing bushing.

5 The spreadable axial pin 4 is arranged in the receiving eye 33. Said axial pin has a plurality of regions, in each case a bearing region 41 at the two ends and a joining region 40 between said two ends. In fig. 3b, said axial pin is illustrated in its installation position in which it is retracted into the receiving eye 33, and in figure 3c is illustrated in its spread position in which the bearing regions 41 project out of the receiving eye 33 on both sides. Said axial pin is passed through an aperture in a separating element 30 in the receiving eye 33, said aperture having the shape of a flattened oval and preventing rotation of the axial pin 4.

15 The coupling piece 3 is provided with a flat receiving area 35 on its front side (on the left-hand side in the illustration in fig. 3a). A pocket 36 is formed in the receiving eye 33 at the upper end of said receiving area, said pocket merging with the receiving area 34 in a flat manner at its base. A retaining opening 35 which is designed in the form of a blind hole is provided in the central region of the receiving area 34. An impact-protection plate 37 can be mounted on the receiving area 34 and is inserted into the pocket 36. As a result, the pocket 36 is secured against lifting off from the receiving area 34 by way of its upper edge, specifically also under the action of force from the front (from the left-hand side in figure 3a) when the extended stop position of the flexion bearing is reached. The impact-protection plate 37 is protected against movement, in particular in the downward direction, by means of a projection which is formed on the rear face of said impact protection plate and engages in the retaining opening 35 in an interlocking manner.

The axial pin 4 has a separating plane 49, which runs along to form its center axis, in the joining region 40. Said separate plane intersects the casing in the joining region 40 at two diametrically opposite points (see fig. 3a). The axial pin 4 is thereby divided into two pin stubs 42, 43. The two said pin stubs have a projecting half-peg 44, 45, which pegs form the cross section of the axial pin 4 in the joining region 40 when combined.

Furthermore, each of the two pin stubs 42, 43 has a cavity 46, 47 in the shape of a half moon. Said cavities are shaped to complement the half-pegs 44, 45, with the result that each half-peg enters the cavity 46, 47 when the pin stubs are pushed together (for the installation position, as illustrated in fig. 3b). In the spread position, the half-pegs 44, 45 move out of the cavities 46, 47, said half-pegs being securely guided by the wide separating plane 49. Owing to this wide guidance in a flat plane, the spreading process does not lead to jamming or to tilting; the same applies when said half-pins are pushed together in the case of adjustment of the knee joint prosthesis. The design of the pin stubs 42, 43 is illustrated in detail in fig. 4. Said pin stubs further have an actuator opening 48, which is designed to receive a spreading instrument 5, on their casing. Two actuator openings 48 are preferably provided for each pin stub, specifically symmetrically in relation to the separating plane 49. One is used in each case, specifically depending on the installation position. In the illustrated exemplary embodiment, the pin stubs 42, 43 are the same shape, that is to say the same element can be used both as pin stub 42 and also as pin stub 43.

In order to spread the pin stubs 42, 43, two access slots 38 are formed on the receiving eye 33. Said access slots are oriented on an aligned line with an orientation of their elongate extent in the direction of the center axis of the axial pin 4. A fastening opening 39 is provided above and centrally between said access slots. A pointed instrument can be inserted through the access slots 38, said instrument engaging in one of the two actuator openings 48. The pin stub 42 is removed from the other pin stub, and vice versa, by moving the instrument outward.

The spreading instrument used for this purpose is illustrated in greater detail in figs 5 and 6. Said spreading instrument comprises a wire clip 50 with two free ends 51 at its front end, said free ends diverging at an angle α . Said wire clip forms a three-point loop in its rear region, a sliding sleeve 54 being mounted on said three-point loop. Said sliding sleeve has a radially projecting collar 56, which is provided with a recess 55, on its side which faces away from the ends 51. The sliding sleeve 54 can, between its spreading position, as illustrated in fig. 5, be moved forward into an inoperative position, as a result of which the free ends 51 are pushed into a position in which they are closer together. A certain adjustment force is required for this purpose, with the result that the sliding sleeve 54 functions as a means for preventing unintentional movement. The recess 55 ensures that the collar 56 does not collide with the wire clip 50 during the movement. Said recess also ensures unimpeded straight access to the fastening sleeve 60.

The fastening sleeve 60 is part of a fastening guide 6 which is arranged at the end of the wire clip 50. The fastening sleeve has an internal thread 62 in its inner

opening 61, a locking screw 63 being screwed into said internal thread. In the inoperative position, the locking screw 63 projects only slightly by way of its tip 64, specifically to such an extent that it engages
5 in the opening 39 by way of its thread and in this way secures the fastening guide to the coupling piece 3.

During installation, the sliding sleeve 5 is moved backwards for the purpose of spreading the axial pin 4,
10 as a result of which the free ends 51, which are inserted into the actuator openings 48 in the pin stubs 42, 43 through the access slots 38, are moved away from one another and thereby spread apart the pin stubs 42, 43. Once said pin stubs have reached their spread
15 position (see figs 3c and 7), the locking screw 63 is turned further, until it enters the separating plane 49 by way of its tip and secures the pin stubs 42, 43 by clamping and, if there is a corresponding receiving opening 49', even in an interlocking manner. If the
20 locking screw 63 has been turned sufficiently far, it is no longer in engagement with the internal thread 62. The fastening guide 6 is therefore free, and the spreading instrument 5 can then be removed (for the first time). This ensures that the spreading instrument
25 can be removed only when the pin stubs 42, 43 are spread.

In the event of an adjustment, it is necessary to move the pin stubs 42, 43 out of the spread position (see
30 fig. 3c) back into the installation position (see fig. 3b). To this end, a set of adjustment pliers 7 is provided with a handle 70 at the rear end and with receiving fingers 70 on jaws 71 at the front end (see fig. 8). The dimensions of the receiving fingers are
35 such that said receiving fingers can be inserted through the access slots 38 and engage with the

actuator openings 48. The receiving fingers 72 are preferably arranged in a converging manner. This means that they are oriented so as to point toward one another, specifically through an angle β of approximately 10 degrees. This angle is selected such that the receiving fingers 72 are approximately parallel in the position of the set of adjustment pliers 7 when the pin stubs 42, 43 have reached their installation position (see fig. 3b), for the purpose of simpler removal.

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part of the common general knowledge in the art, in Australia or any other country.

Patent claims

1. A joint prosthesis having a bending hinge which is formed by a hinge fork and an axial pin which comprises two pin stubs which are arranged in an installation position, in which they are retracted in a coupling piece for insertion purposes, and are arranged in an expanded position after implantation by being moved in the axial direction into aligned hinge holes in the hinge fork,
wherein the axial pin has two bearing regions at its ends and a joining region which is situated between said bearing regions, and the axial pin is separated in the joining region such that a planar interface between the stubs is a plane running along the axial direction and intersecting a circumferential surface of the axial pin at two locations.
2. The joint prosthesis as claimed in claim 1, wherein the plane is a central plane of the axial pin.
3. The joint prosthesis as claimed in claim 1, wherein the plane comprises a plurality of component planes.
4. The joint prosthesis as claimed in any one of claims 1 to 3, wherein the pin stubs have the same shape.
5. The joint prosthesis as claimed in any one of claims 1 to 4, wherein the joining region of the pin stubs are half-pegs.
6. The joint prosthesis as claimed in any one of claims 1 to 5, wherein the pin stubs have a half-moon shape in cross section.

7. The joint prosthesis as claimed in any one of claims 1 to 6, wherein the coupling piece comprises a separating element configured to receive the joining region, the separating element having a non-round aperture for the pin stubs.

8. The joint prosthesis as claimed in any one of claims 1 to 7, wherein a receiving means for a movement-prevention means of the pin stubs is formed on the coupling piece.

9. The joint prosthesis any one of the preceding claims, wherein an access slot is formed on the coupling piece for each pin stub, and a spreading instrument which is designed to engage in the pin stubs through the access slots is provided.

10. The joint prosthesis as claimed in claim 9, wherein the spreading instrument has a wire clip, the free ends of said wire clip being designed to be inserted into the access slots.

11. The joint prosthesis as claimed in claim 10, wherein the free ends are at an angle of 30 degrees to 70 degrees in relation to one another.

12. The joint prosthesis as claimed in claim 9 or 10, wherein, the free ends form, in its rear region which faces away from the ends, a loop in the opposite direction.

13. The joint prosthesis as claimed in any one of claims 9 to 12, wherein a sliding sleeve is provided, it being possible to move said sliding sleeve from an inoperative position, in which the free ends are close

to one another, to a spreading position in which the free ends are moved away from one another.

14. The joint prosthesis as claimed in claim 13,
5 wherein the spreading instrument has a fastening guide.

15. The joint prosthesis as claimed in claim 14,
wherein a thread is arranged on the fastening guide, a
locking screw being screwed into said thread.
10

16. The joint prosthesis as claimed in claim 15,
wherein the length of the locking screw is greater
than the distance between the fastening guide and the
axial pin.
15

17. The joint prosthesis as claimed in any one of
claims 11 to 16, wherein the sliding sleeve has a
circumferential radial collar which has a recess on its
side which faces the fastening guide.
20

18. The joint prosthesis as claimed in any one of
claims 9 to 17, wherein a pair of adjustment pliers is
provided, said pair of adjustment pliers having handles
at its rear end and receiving fingers at its front end,
25 said receiving fingers being designed to be inserted
into the access slots and having an oval cross section.

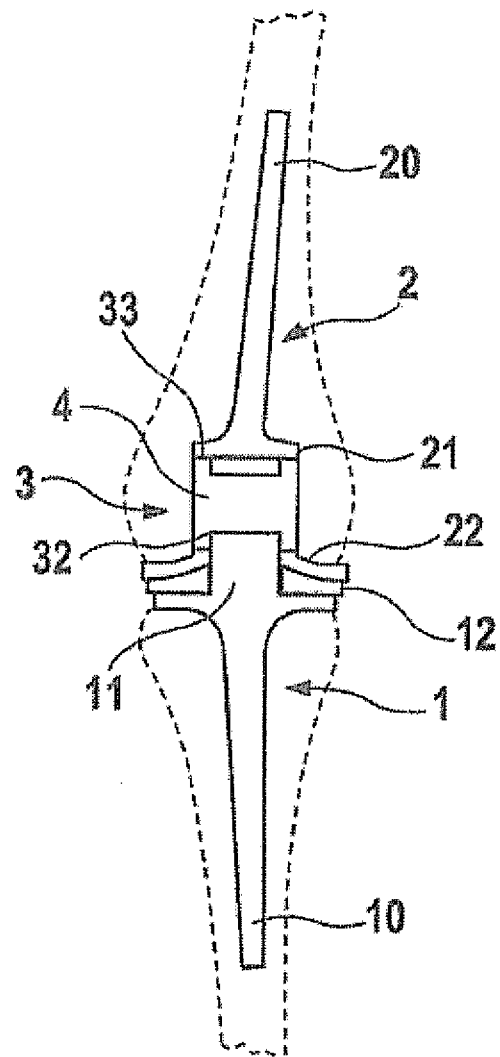


Fig. 1

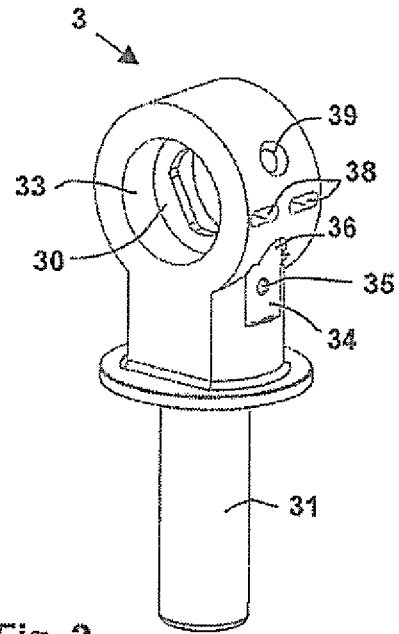


Fig. 2

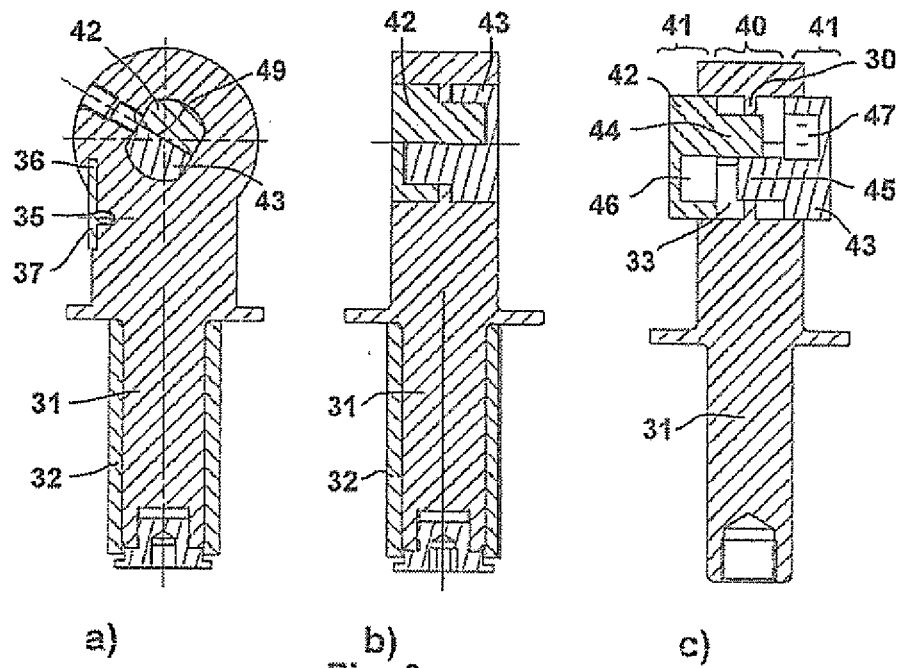


Fig. 3

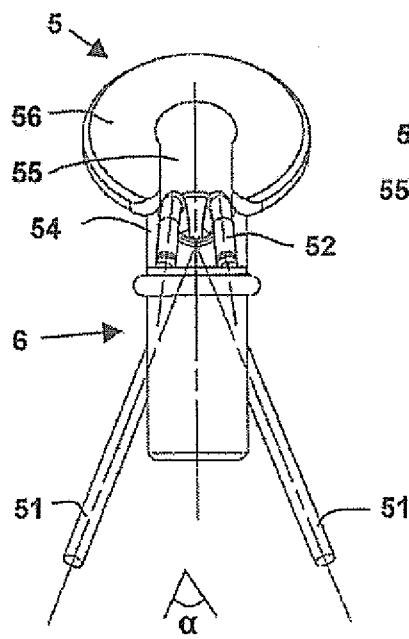
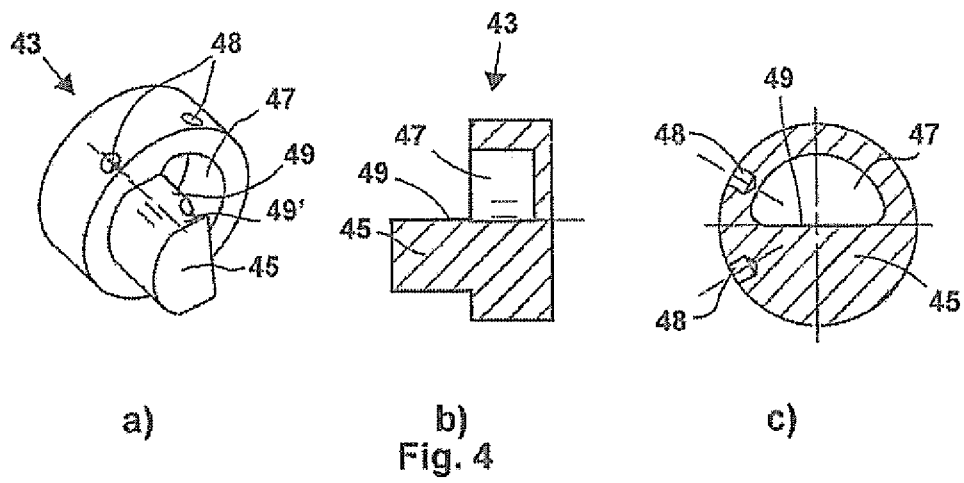


Fig. 5

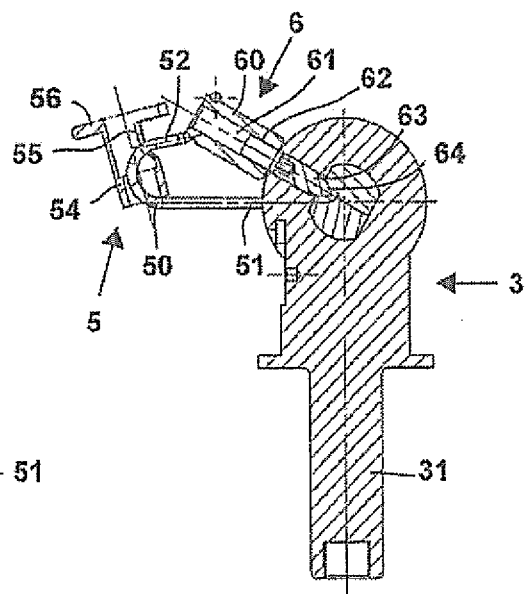


Fig. 6

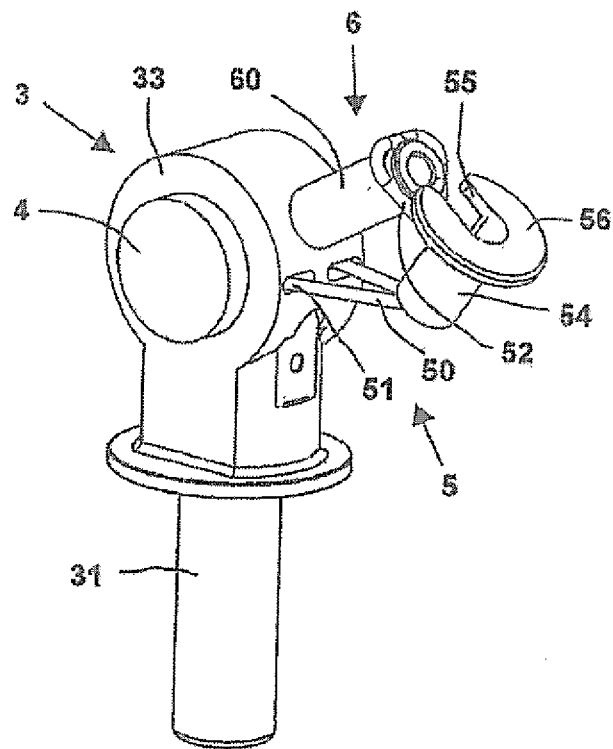


Fig. 7

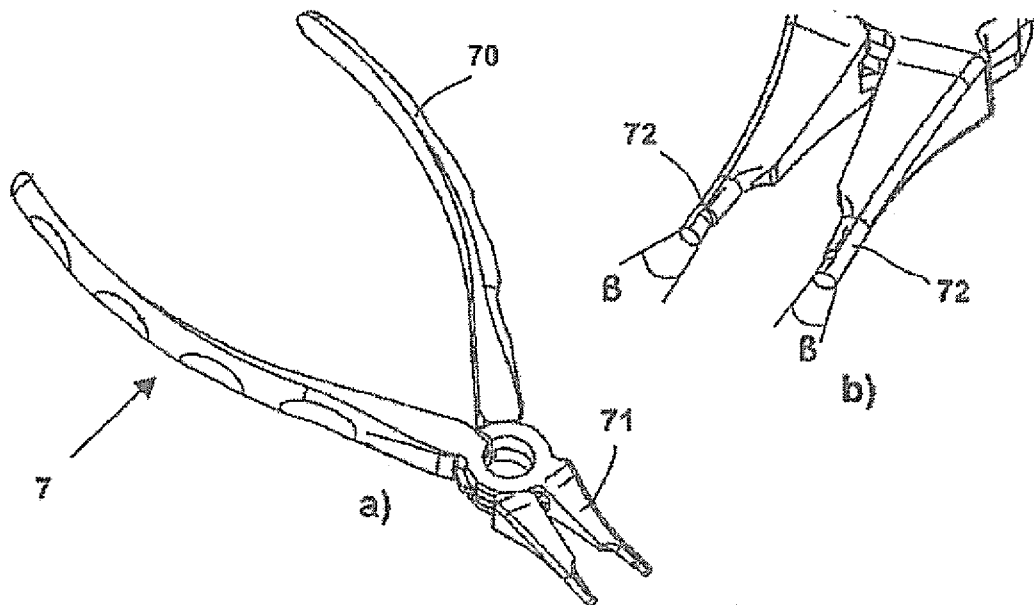


Fig. 8