

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 January 2002 (17.01.2002)

PCT

(10) International Publication Number
WO 02/03836 A1

(51) International Patent Classification⁷: **A47F 1/12, 5/00**

(21) International Application Number: PCT/SE01/01522

(22) International Filing Date: 2 July 2001 (02.07.2001)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0002579-1 7 July 2000 (07.07.2000) SE

(71) Applicant (for all designated States except US): **HL DISPLAY AB** [SE/SE]; Horisontvägen 26, S-128 34 Skarpnäck (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LINDÉN, Henrik** [SE/SE]; Gudmundsbyn 5681, S-857 51 Sundsvall (SE). **JOSEFSSON, Börje** [SE/SE]; Box 810, S-851 23 Sundsvall (SE).

(74) Agents: **AXELSSON, Rolf** et al.; Kransell & Wennborg AB, Box 27834, S-115 93 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN ARRANGEMENT IN A SUPPORTING DEVICE FOR GOODS

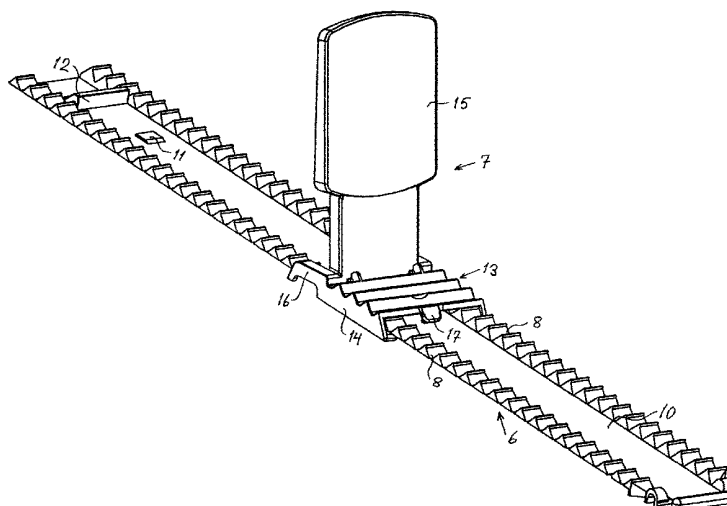

(57) **Abstract:** The device for use with a support for goods which are to stand in rows on the shelves of a shop or store-room, in particular such goods as are arranged in compartments formed by transverse dividers. The support comprises a track (6) provided with sawtooth racks (8) and a support device (7) that can be moved along the track, with a bottom plate (13), a support back (15) projecting upward from the bottom plate, and backward-projecting locking elements (16) which interact with the sawtooth rack (8) in the track. The device comprises an operating tool (10) arranged under the bottom plate (13) of the support device (7) in such a way that it can be pulled out. The operating tool is designed with lugs projecting upward from it arranged to interact with the bottom plate (13) of the support device when the operating tool (10) is pulled out, in order to bring the support device forward by means of a forward movement of the operating tool, for moving forward goods which are supported by the support device.



WO 02/03836 A1

An arrangement in a supporting device for goods

TECHNICAL FIELD

5 The present invention relates to a device for use with a support for goods which are to stand in rows on the shelves of a shop or store-room, in particular such goods as are arranged in compartments formed by transverse dividers, which support comprises a track
10 provided with sawtooth racks and a support device that can be moved along the track, which support device has a bottom plate and a support back projecting upward from the bottom plate.

15 BACKGROUND TO THE INVENTION

Supports of this kind are used, for example, for supporting products packed in sachets, small boxes or packages. In order to make it easy for the consumer to
20 take hold of the first package in a row, the row of packages should be kept to the front edge of the shelf. This requires among other things the row of packages to be supported by a support back which can easily be moved in the appropriate compartment. The support is
25 moved forward as the goods are removed, but must then be able to be returned to a position toward the back of the shelf for replenishing goods in the compartment.

Known support devices are available for this purpose, comprising a track provided with a sawtooth rack which
30 is arranged in the compartment and interacts with a support device that can be moved along the track, which support device has projections engaging with the sawtooth rack on the track and a support back
35 projecting upward from the bottom plate. A problem with certain known devices of this kind has been that the support device can be moved backward in the compartment unintentionally by the application of a force to the vertical support back.

- 2 -

In order to eliminate this problem, devices have previously been proposed in which the risk of such unintentional movement is eliminated. This has, however, meant that the devices have become more complicated to use, as an intentional movement of the support device has also been made more difficult. In some embodiments, such a movement requires the whole support device to be pivoted forward before it can be moved. This means, however, that products standing on the support device must also be tipped forward.

Another device utilizes a spring element which engages with the sawtooth rack on the track. The engagement of the spring element with the track must be released manually to permit an intentional movement of the support device. As the spring element is located at the back of the support device, there must be room to reach beside or above the support device, which is not always the case. Our international patent application PCT/SE00/00324 describes a support of the type described above, in which the risk of unintentional movement of the support in a backward direction has been eliminated, while at the same time a required movement can be carried out in a very simple way.

The previous support is of the type described in the first paragraph and is characterized in that the support device is provided with backward-projecting elements which engage and lock with the sawtooth racks on the track when a backward force is applied to the support back and in that the said locking elements are arranged to be lifted up out of engagement with the said sawtooth racks when a backward force is applied to a front part of the bottom plate of the support device, which force causes the bottom plate to pivot upward around a transverse axis at its front end as a result of the interaction between the bottom plate and the

- 3 -

sawtooth racks on the said track, raising the back part and the said locking elements.

5 This device thus effectively prevents an unintentional movement of the support device backward as a result of a force on the support back and at the same time makes it easy to move it intentionally by the application of a force to the bottom plate of the support device, which force brings about a small pivoting movement of
10 the support device and also the required backward movement.

The support device described above can easily be moved forward by applying a force on the rear of the support
15 back by hand. In many cases, this can be difficult to carry out, as there can be no room to reach behind the support device due to the positions of the shelf above and the side dividers.

20 In the device described above, this is solved by an elongated operating tool being able to be inserted under the bottom plate of the support device from the front end of the track, which tool lifts the device thereby releasing the engagement of the said locking
25 elements with the sawtooth racks on the track and also the engagement between the projections on the bottom plate and the said sawtooth racks, after which the support device can be moved forward or backward using the said operating tool.

30 By using an elongated operating tool in this way, the support device can be operated from the front of the compartment without needing to reach the back of the vertical support back. This is a great advantage when
35 the compartments are narrow and when there is only a small distance between the shelf and the one above.

The device described above is thus based on the person who is going to operate the support for goods carries

- 4 -

a tool of the type described above, which tool is temporarily inserted into the compartment where the support back is to be moved. It cannot, however, be left in place, as it would then protrude out from the shelf.

OBJECTS OF THE INVENTION

The main object of the present invention is to obtain a device for moving supports for goods as described above, which can be permanently inserted in a compartment for goods, so that it is always in place when the support for goods and the goods supported by this are to be pulled forward toward the front of the respective compartment.

This is obtained according to the present invention by means of a device of the kind defined in the first paragraph, which is characterized in that the track provided with sawtooth racks is stationary, in that the bottom plate of the support device forms a supporting surface for goods and is arranged to be guided by the said tracks when it is moved, and in that to bring about movement toward the front edge of a shelf it is moved relative to the teeth on the track, in that the device further comprises an elongated operating tool of essentially the same length as the said track, arranged under the bottom plate of the support device and in a recess in the track provided with sawtooth racks in such a way that it can be pulled out, and in that the operating tool is designed with means projecting upward from it and designed to interact with the said bottom plate of the support device when the operating tool is pulled out in order to bring this forward by means of a forward movement of the operating tool.

This operating tool can thus always remain in place and is simple to use and can be so designed that it automatically raises up the bottom plate, along with

- 5 -

the goods standing on the bottom plate, when it is pulled forward. When the movement of the support device has been completed, the operating tool can be pushed right back into the compartment, whereupon the support
5 device returns to the initial position with the locking elements engaging with the sawtooth racks on the track.

The operating tool is preferably designed with two projecting lugs, one of which is arranged to interact
10 with a rear part of the bottom plate, while the other is arranged to interact with a part projecting downward from the front part of the bottom plate. One of these lugs is thereby arranged so that it also acts as a dog means.

15 In a preferred embodiment, the distance between these lugs is the same as the distance between the front and back parts of the bottom plate, which means that a simultaneous raising of the whole bottom plate is
20 achieved when the operating tool is pulled forward.

Further characteristics of the invention will be apparent from the patent claims.

25 The invention will be described in greater detail below, utilizing examples of preferred embodiments and with reference to the attached figures.

BRIEF DESCRIPTION OF THE FIGURES

30 Figure 1 shows part of a shop shelf with a support according to the present invention.

Figure 2 shows an operating tool according to the
35 present invention for use together with the support as claimed in Figure 1.

Figure 3 shows a support according to the present invention with the operating tool installed.

- 6 -

Figure 4 shows a support device incorporated in the support shown in Figure 3 viewed obliquely from below.

5 Figure 5 is a longitudinal section through a device as shown in Figure 3.

Figure 6 is a longitudinal section corresponding to Figure 5, where the support device is in a raised
10 position.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Figure 1 shows a part 1 of a shop shelf with fixing
15 strips 2 running along the front and back edges of the shelf. Dividers 3 with essentially U-shaped fixing heads 4 are snapped onto the fixing strips 2, so that these dividers can be moved along the shelf to form compartments of the required width. In the figure only
20 one compartment is shown.

At the bottom of the compartment, there is a track 6 for a support device 7. The ends of this track can also be snapped onto the fixing strips 2.

25 The track 6 has two side portions provided with transverse sawtooth racks 8. Between these portions there is a recess 9. The sawtooth racks 8 comprise essentially V-shaped troughs with crests between.

30 Figure 2 shows an elongated operating tool 10 with two projecting lugs 11, 12 on the rear part. The operating tool 10 is relatively thin and is designed to be inserted into the recess 9 in the support track 6 in
35 such a way that it can be moved, so that it extends underneath the support device 7.

Figure 3 shows the track 6 with the support device 7 and installed operating tool 10. The support device 7

- 7 -

which can be moved along the track 6, see also Figure 4, comprises a bottom plate 13 with essentially V-shaped recesses on its upper side, in which products (not shown) can be stood.

5

The bottom plate 13 is provided with side flanges 14, which project downward, which guide the bottom plate along the edges of the track 6. At least the front parts of these flanges encloses the edges of the track
10 6 to hold the support device 7 on the track. There is, however, a certain amount of play between the track and the flanges which enclose it, allowing the support device to be raised slightly relative to the track.

15 The bottom plate 13 is provided with a support back 15 which projects upward. The support back 15 is intended to act as a support for a row of standing products, for example sachets, which are supported on the bottom plate 13 and on the parts of the edges of the track 6
20 in front of this. As packets are taken from the shelf, the support device 7 with the support back 15 can be moved forward, so that front part of the compartment is always kept full of packets.

25 In order to prevent an unintentional movement of the support device 7 in the opposite direction, that is toward the back of the shelf, the bottom plate 13 of the support device 7 is provided with two backward-projecting arms 16, which are arranged to interact with
30 the transverse toothed rack 8 of the track 6. A backward force on the support back 15 will thus not be able to bring about an unintentional movement of the support device backward. An intentional movement of the support device in a backward direction can, however, be
35 achieved by means of a force applied on the part 17 protruding downward from the front part of the bottom plate 13. Such a force will namely bring about a pivoting movement upward of the back part of the bottom plate 13 which is provided with the locking arms 16, so

- 8 -

that the engagement between these and the sawtooth rack 8 of the track 6 is released. This is described in greater detail in our international patent application PCT/SE00/00324 mentioned above, and will not be
5 described in greater detail in the present application.

In many cases, the distance between a shelf and the shelf above it and the distance between the support back 15 and the adjacent dividers 3 can be so small
10 that it is not possible to reach behind the support back 15 in order to pull the support device 7 forward toward the front edge of the shelf. This problem is solved in accordance with the present invention by means of the elongated operating tool 10, which is
15 inserted underneath the bottom plate 13 of the support device 7 in the recess 9 between the edges of the track 6.

The back part of the operating tool 10 is provided with
20 two projecting lugs 11, 12 at a distance apart which essentially corresponds to the distance between the front and back parts of the bottom plate. The function of these is as follows. When the support device 7 is to be moved forward in a compartment, from for example the
25 position shown in Figure 5, the operating tool 10 is pulled outward. The projecting lug 11, which has suitably a wedge-shaped front surface, thereby fits under the bottom plate 13 of the support device and engages with the downward-projecting part 17 of the
30 bottom plate. At the same time, the back lug 12 engages with the lower part of the support back 15, which is suitably rounded off. As a result, the support device 7 with the bottom plate 13 and the support back 15 will be raised upward relative to the track 6, see Figure 6.
35 The rear transverse lug 12 thereby also acts as a dog means, which engages with a downward-projecting lug 18 on the underside of the bottom plate 13. The whole support device 7 can thereby be pulled forward toward

- 9 -

the front of the shelf by pulling out the operating tool 10.

When the required position has been reached, the operating tool 10 can be pushed back in the recess 9, to the position shown in Figure 5, whereupon the support device is lowered back, so that the locking arms 16 re-engage and lock with the sawtooth edges of the track 6. The operating tool 10 can suitably be pushed right in to the track so that no part of the operating tool projects from the front edge of the shelf. The operating tool is thereby ready for further pulling forward of the support device 7 when this is required.

The arrangement described is very advantageous, as the person responsible for the display of products in the shop does not need to bring any special tool for moving the support devices in the different compartments, but instead can carry this out in a simple way using an operating tool already located in the respective compartment.

The invention has been described above in connection with the preferred embodiment shown in the figures. This can, however, be varied in several respects within the framework of the patent claims. Thus, for example, the precise shape of the sawtooth rack on the edges of the track 6 and the locking arms of the support device 7 can be varied. This also applies to the design of the operating tool and in particular to the number and shape of the projecting lugs 11 and 12 and the design of the interacting parts of the support device 7.

PATENT CLAIMS

1. A device for use with a support for goods which are to stand in rows on the shelves of a shop or store-room, in particular such goods as are arranged in compartments formed by transverse dividers (3), which support comprises a track (6) provided with sawtooth racks (8) and a support device (7) that can be moved along the track, with a bottom plate (13), a support back (15) projecting upward from the bottom plate (13), and backward-projecting elements (16) which engage and lock with the sawtooth rack (8) in the track when a backward-directed force is applied to the support back, **characterized in that** the track (6) provided with sawtooth racks (8) is stationary, the bottom plate (13) of the support device (7) forms a supporting surface for goods and is arranged in such a way that its movement is guided by the said track and that for movement toward the front edge of a shelf it is moved relative to the sawtooth rack (8) in the track, the device further comprising an elongated operating tool (10) of essentially the same length as the said track, arranged under the bottom plate (13) of the support device (7) and in a recess in the track (6) provided with sawtooth racks (8) in such a way that it can be pulled out, the operating tool being designed with means projecting upward from it and designed to interact with the said bottom plate (13) of the support device when the operating tool (10) is pulled out in order to bring this forward by means of a forward movement of the operating tool.

2. The device as claimed in claim 1, **characterized in that** the said operating tool (10) is provided with two lugs (11, 12) which project upward for raising and bringing forward the bottom plate (13) of the support device, one of these being arranged to interact with a rear part of the said bottom plate (13) and the other

- 11 -

being arranged to interact with a part (17) projecting downward from the front part of the bottom plate (13).

3. The device as claimed in claim 2, **characterized in**
5 **that** one of the said lugs (12) is so designed that it also acts as dog means.

4. The device as claimed in claim 2 or 3,
10 **characterized in that** the distance between the said lugs (11, 12) is the same as the distance between the said back and front parts of the bottom plate (13) to bring about a simultaneous raising of the whole bottom plate.

15 5. The device as claimed in any one of claims 2-4, **characterized in that** the front one (11) of the said lugs is provided with a forward-sloping inclined surface for interaction with a part (17) projecting downward from the front part of the bottom plate (13).

20 6. The device as claimed in any one of claims 2-5, **characterized in that** the rear one (12) of the said lugs is so arranged that after raising of the back part of the bottom plate (13) it is designed to engage with
25 at least one part projecting downward from this back part to bring forward the support device (7).

7. The device as claimed in any one of claims 2-6,
30 **characterized in that** the lug (12) interacting with a back part of the said bottom plate (13) is designed to interact with a rounded-off part of the said bottom plate to raise this up.

8. The device as claimed in any one of claims 2-7,
35 **characterized in that** the rear one (12) of the said lugs is arranged at the back edge of the operating tool (10).

Fig1

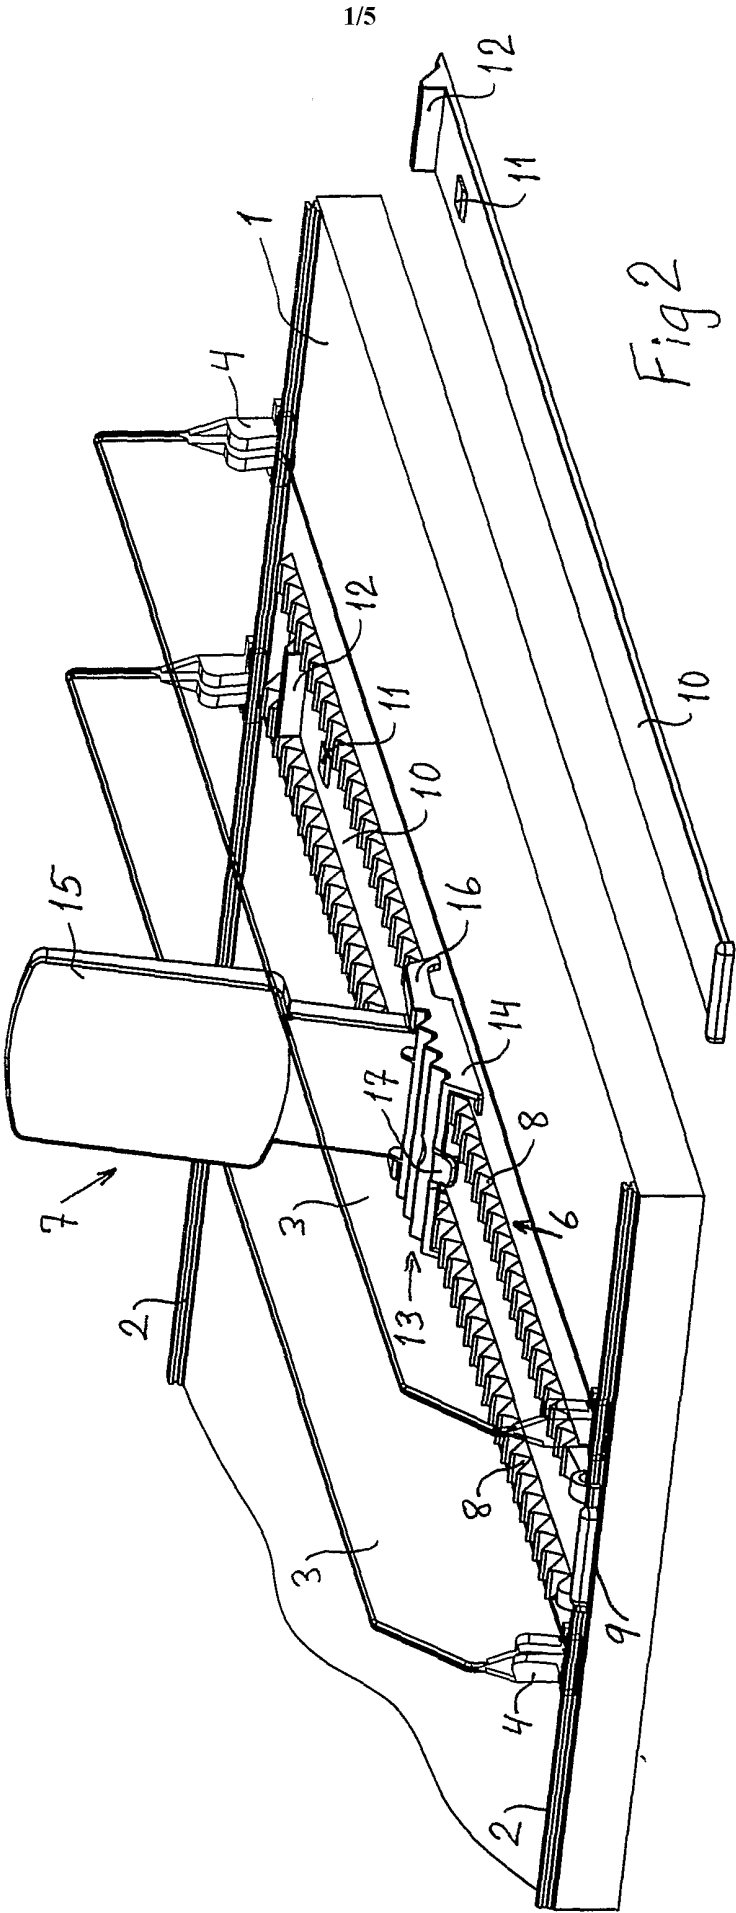
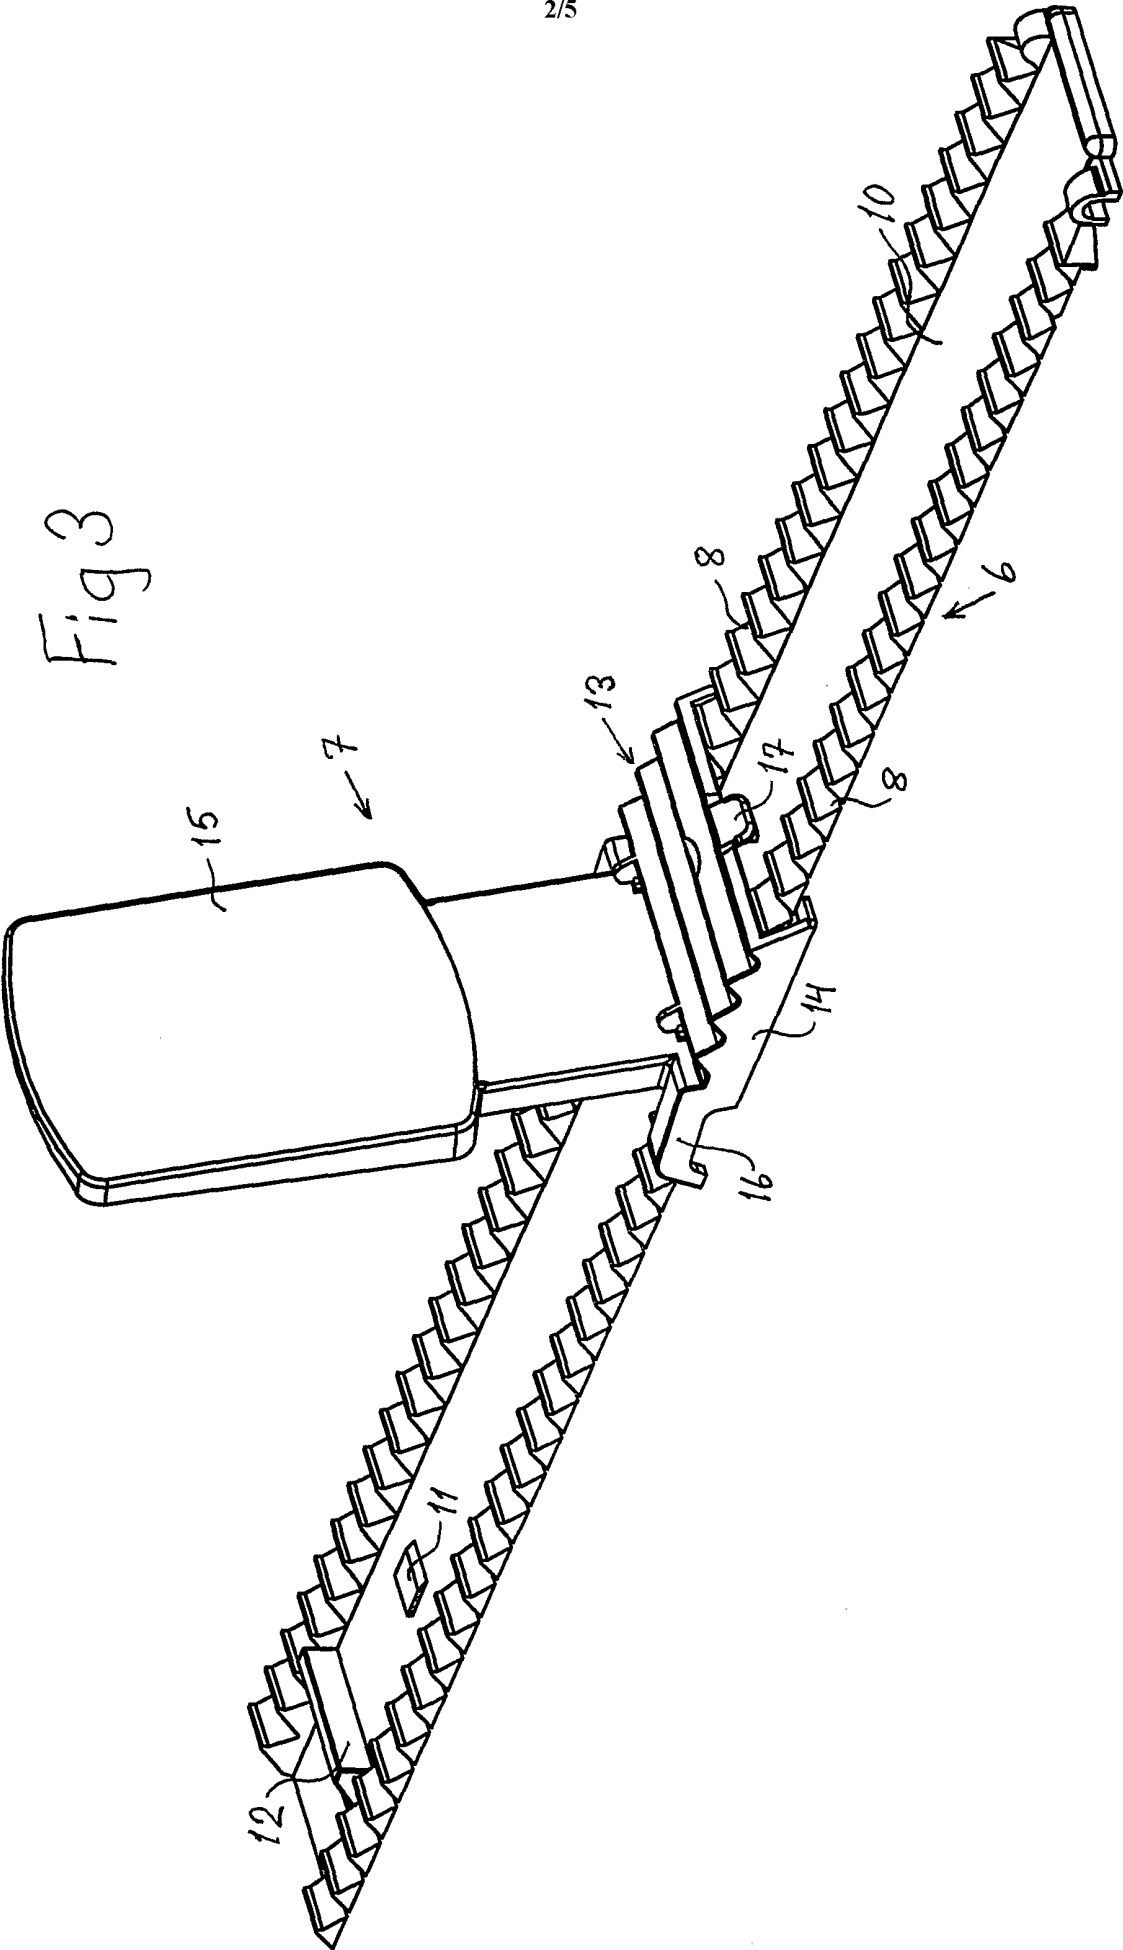


Fig2



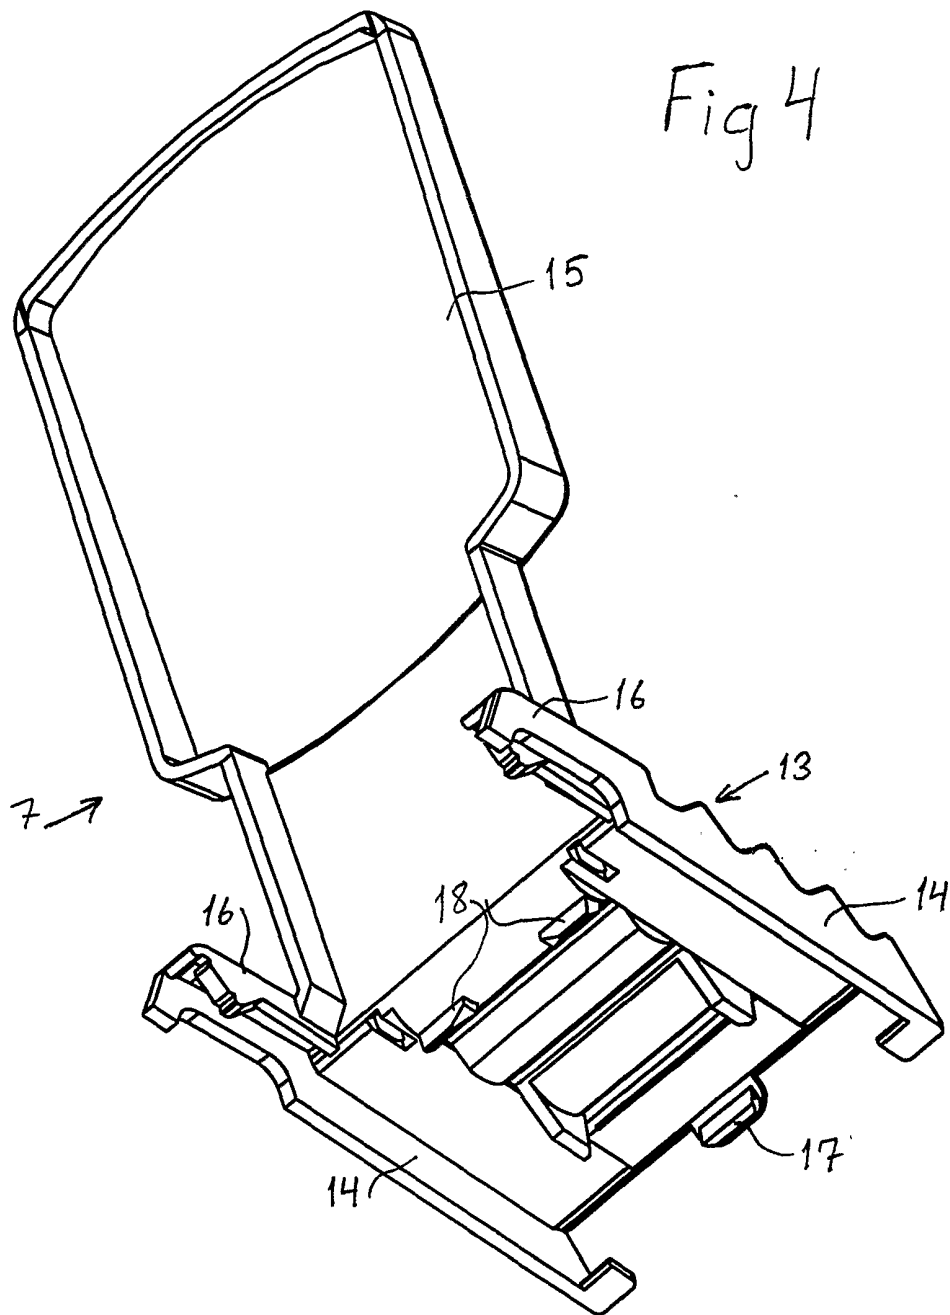


Fig 5


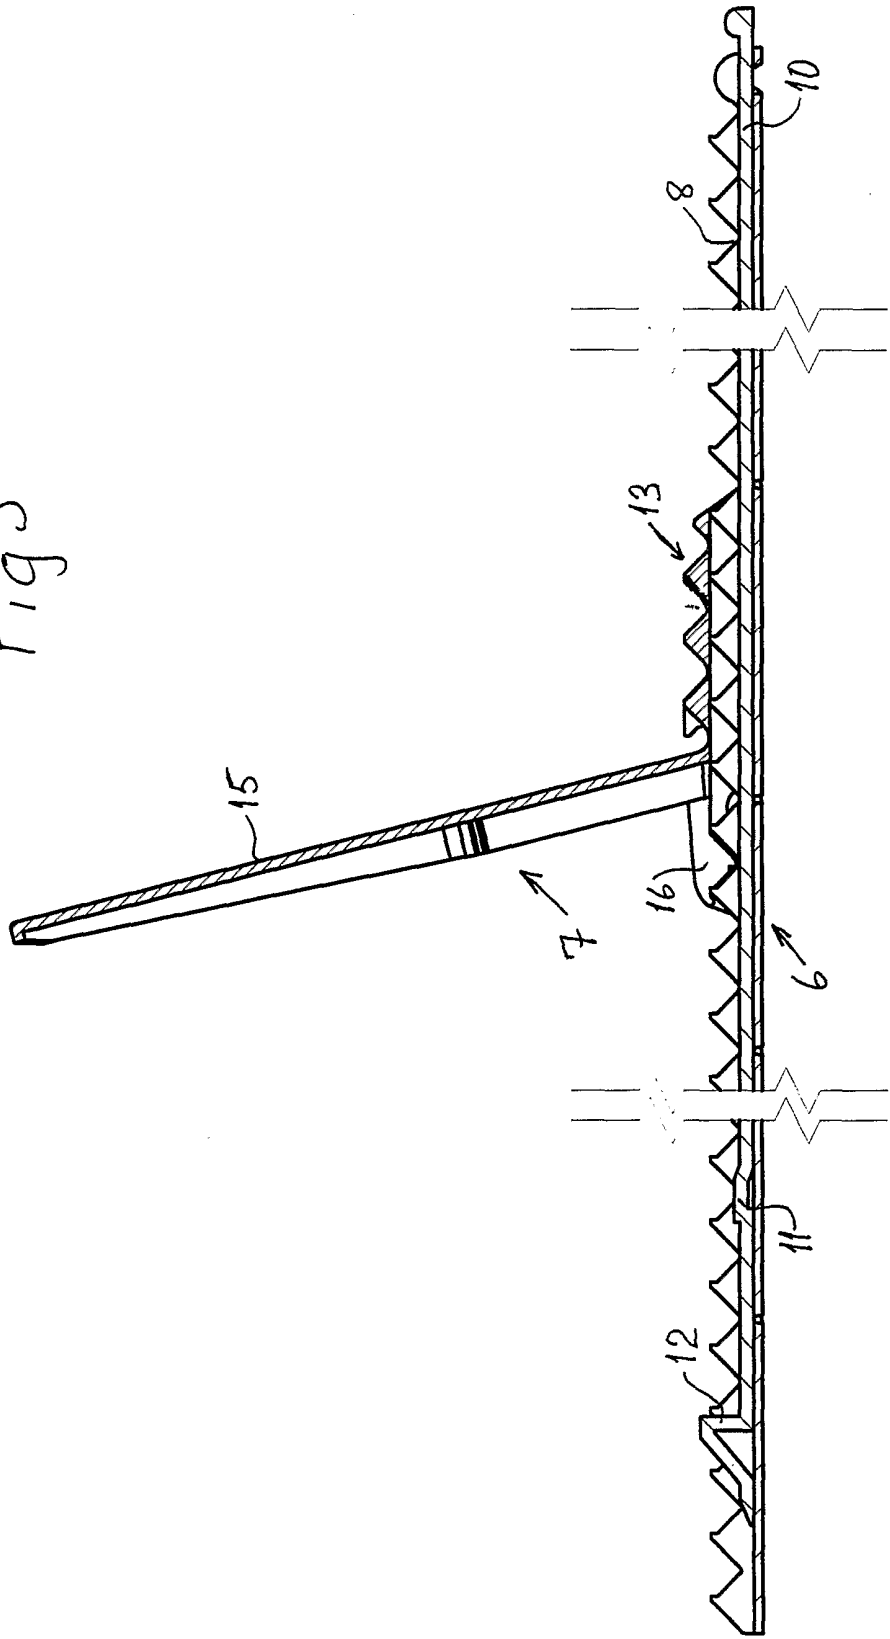


Fig 6

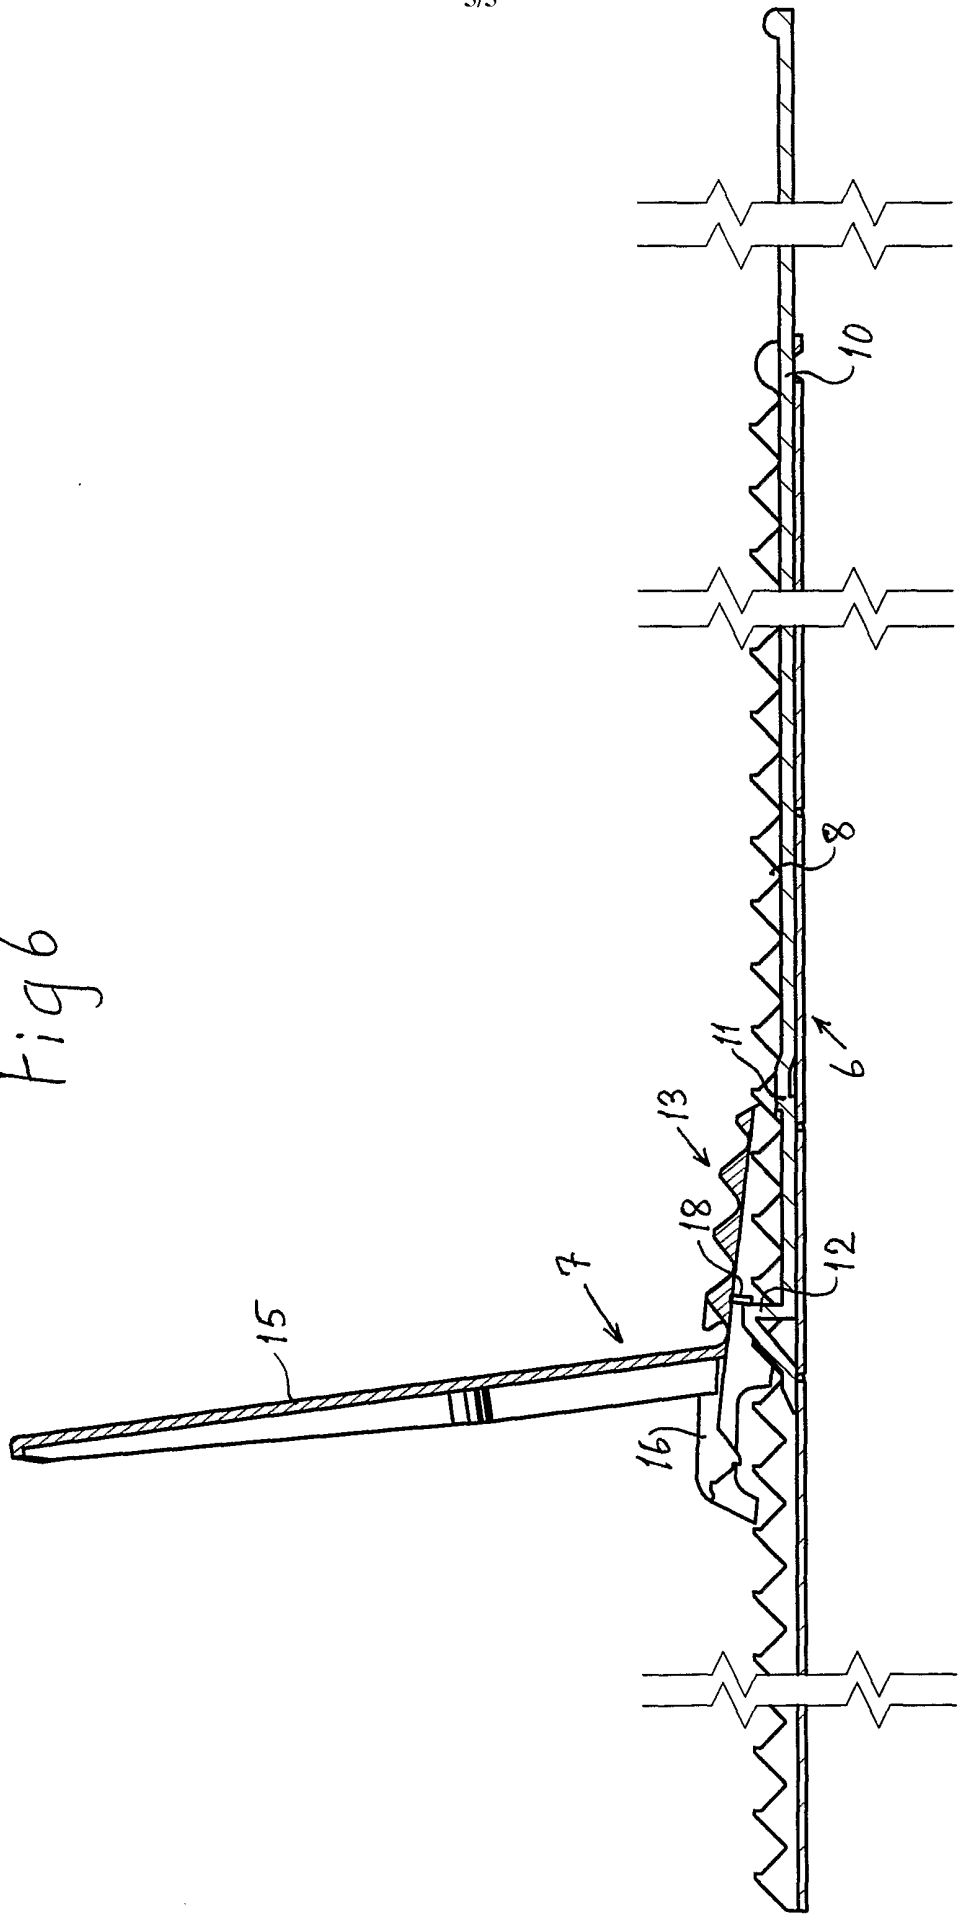

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/01522

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A47F 1/12, A47F 5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A47F, A47B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E,A	WO 0048488 A1 (HL DISPLAY AB), 24 August 2000 (24.08.00), page 8, line 11 - page 13, figures 8-11 --	1-8
A	DE 3211880 A1 (VALKIESER, HAND HELMUT), 6 October 1983 (06.10.83), page 7 - page 8, figures 1-2 --	1-8
A	US 5413229 A (ZUBERBUHLER ET AL), 9 May 1995 (09.05.95), whole document --	1-8
A	DE 9210275 U1 (FRITZ SCHÄFER GMBH), 26 November 1992 (26.11.92), whole document --	1-8

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2001

Date of mailing of the international search report

26 -10- 2001

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Inger Löfving / JA A

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 01/01522

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9214389 A1 (RETAIL ADVERTISING LIMITED), 3 Sept 1992 (03.09.92), whole document -- -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/10/01

International application No.

PCT/SE 01/01522

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0048488	A1	24/08/00	AU	3204400 A	04/09/00
				AU	3857399 A	25/10/99
				SE	513898 C	20/11/00
				SE	9900559 A	19/08/00

DE	3211880	A1	06/10/83	NONE		

US	5413229	A	09/05/95	NONE		

DE	9210275	U1	26/11/92	NONE		

WO	9214389	A1	03/09/92	CA	2104015 A	21/08/92
				EP	0572390 A	08/12/93
				GB	2268170 A,B	05/01/94
				US	5370265 A	06/12/94
