



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.04.2017 Bulletin 2017/14

(51) Int Cl.:
C25D 17/00 (2006.01) C25D 17/08 (2006.01)

(21) Application number: **16197330.0**

(22) Date of filing: **11.07.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **23.09.2010 US 889232**
23.09.2010 US 889228
23.09.2010 US 889219

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
11827131.1 / 2 619 349

(71) Applicant: **SunPower Corporation**
San Jose, CA 95134 (US)

(72) Inventors:
• **ABAS, Emmanuel Chua**
4026 Santa Rose, Laguna (PH)
• **CHEN, Chen-An**
Milpitas, CA California 95035 (US)
• **MA, Diana Xiaobing**
Saratoga, CA California 95070 (US)

- **GANTI, Kalyana Bhargava**
Fremont, CA California 94536 (US)
- **DIVINO, Edmundo Anida**
Damarinas, Cavite (PH)
- **ERMITA, Jake Randal G.**
Santa Rose, Laguna (PH)
- **CAPULONG, Jose Francisco S.**
Cabuyao, Laguna (PH)
- **CASTILLO, Arnold Villamor**
4200 Batangas (PH)

(74) Representative: **Grünecker Patent- und Rechtsanwälte**
PartG mbB
Leopoldstraße 4
80802 München (DE)

Remarks:

This application was filed on 04-11-2016 as a divisional application to the application mentioned under INID code 62.

(54) **NON-PERMEABLE SUBSTRATE CARRIER FOR ELECTROPLATING**

(57) One embodiment relates to a substrate carrier for use in electroplating a plurality of substrates. The substrate carrier comprises a non-conductive carrier body on which the substrates are to be held. Electrically-conductive lines are embedded within the carrier body, and a plurality of contact clips are coupled to the electrically-conductive lines embedded within the carrier body.

The contact clips hold the substrates in place and electrically couple the substrates to the electrically-conductive lines. The non-conductive carrier body is continuous so as to be impermeable to flow of electroplating solution through the non-conductive carrier body. Other embodiments, aspects and features are also disclosed.

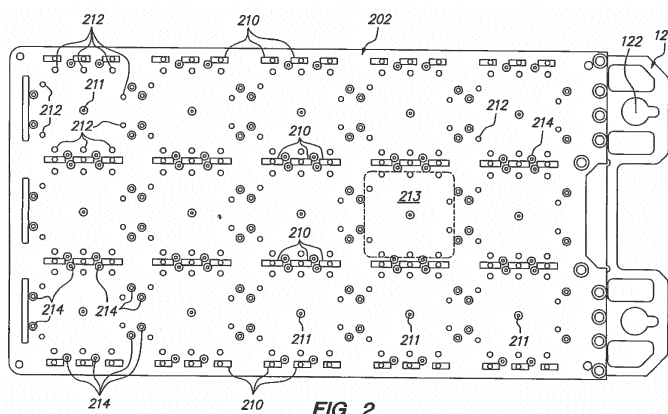


FIG. 2

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is related to commonly-owned U.S. Patent Application No. 12/889,228, entitled "Sealed Substrate Carrier for Electroplating," filed on even date herewith by Kalyana Ganti [attorney docket no. 10031.006610 (S0187US1)]. The present application is also related to commonly-owned U.S. Patent Application No. 12/889,232, entitled "Maintainable Substrate Carrier for Electroplating," filed on even date herewith by Chen-An Chen; Emmanuel Abas; Edmundo Divino; Jake Ermita; Jose Capulong; Arnold Castillo; and Diana Ma [attorney docket no. 10031.006620 (S0187US2)].

STATEMENT OF FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] The invention described herein was made with Governmental support under contract number DE-FC36-07GO17043 awarded by the United States Department of Energy. The Government may have certain rights in the invention.

BACKGROUND

1. FIELD OF ART

[0003] This disclosure relates generally to the field of electroplating. More particular, this disclosure relates to a carrier for use in electroplating substrates.

2. DESCRIPTION OF THE RELATED ART

[0004] Electroplating is a deposition technique that may be used to form a metal layer on a substrate. In some electroplating processes, the anode may be made out of the metal to be deposited, and the cathode may be the substrate to be plated. Both the anode and the cathode are immersed in an electrolyte solution, and a voltage is applied across the anode and cathode so that an electrical current flows between them. This causes oxidation of the metal at the anode so that ions of the metal are dissolved in the solution. This also causes reduction of the metal ions at the cathode so that a layer of the metal is deposited onto the substrate. In other electroplating processes, the solution may have ions of the metal to be plated, and the anode may be a non-consumable anode. In this case, the metal ions may be periodically replenished in the bath.

[0005] In order to efficiently electroplate a large number of substrates, a carrier may be used to hold multiple substrates and to apply electrical voltages to those substrates during the electroplating process. The carrier may be used to transfer the substrates between different chemical baths and also to safely handle them during rinsing and drying steps.

[0006] The present application discloses improved substrate carriers for electroplating.

SUMMARY

[0007] One embodiment relates to a substrate carrier for use in electroplating a plurality of substrates. The substrate carrier comprises a non-conductive carrier body on which the substrates are to be held. Electrically-conductive lines are embedded within the carrier body, and a plurality of contact clips are coupled to the electrically-conductive lines embedded within the carrier body. The contact clips hold the substrates in place and electrically couple the substrates to the electrically-conductive lines. The non-conductive carrier body is continuous so as to be impermeable to flow of electroplating solution through the non-conductive carrier body.

[0008] Another embodiment relates to a method of electroplating a plurality of substrates. The substrates are mechanically held onto a substrate carrier which has a non-permeable, non-conductive carrier body and an electrically-conductive path through the carrier body to substrates. The substrate carrier is mounted on a work arm. The carrier body with the substrates is then dipped into an electroplating bath, and a voltage is applied to the substrates via the electrically-conductive path through the non-permeable, non-conductive carrier body.

[0009] Another embodiment relates to a method of manufacturing a non-permeable substrate carrier for use in electroplating a plurality of substrates. Two non-permeable insulating plates are formed, each plate having an inner face and an outer face. A conductive assembly is fabricated, the conductive assembly including a metallic bus bar, metal lines and conductive clip-attachment features. A solvent cement is applied to areas of the inner faces of the two plates. The inner faces of the two plates are then bonded together with the metal lines, the conductive clip-attachment features and a portion of the bus bar encased therebetween.

[0010] Other embodiments, aspects and features are also disclosed in the present application.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] A more complete understanding of the subject matter may be derived by referring to the detailed description and claims when considered in conjunction with the following figures, wherein like reference numbers refer to similar elements throughout the figures.

FIG. 1 is a planar view of an inner face of a non-conductive plate for a non-permeable substrate carrier in accordance with an embodiment of the invention.

FIG. 2 is a planar view of an outer face of the non-conductive plate in accordance with an embodiment

of the invention.

FIG. 3 is a perspective view of a substrate holding area the outer face of the non-conductive plate in accordance with an embodiment of the invention.

FIG. 4 is a planar view of a conductive assembly including an electrically-conductive bus bar and electrically-conductive lines in accordance with an embodiment of the invention.

FIG. 5A is a first perspective view of a portion of the conductive assembly of FIG. 4 in accordance with an embodiment of the invention.

FIG. 5B is a second perspective view of a portion of the conductive assembly of FIG. 4 in accordance with an embodiment of the invention.

FIG. 6 is a planar view showing a thermoplastic overmold (or overcoat) applied to a portion the conductive bus bar in accordance with an embodiment of the invention.

FIG. 7 is a cross-sectional view which depicts various layers in the bonding of two carrier plates and a conductive assembly in accordance with an embodiment of the invention.

FIG. 8 is a perspective view depicting a semiconductor wafer clipped to a substrate carrier in accordance with an embodiment of the invention.

FIG. 9A is a perspective view of a first clip assembly in accordance with an embodiment of the invention.

FIG. 9B is an exploded view showing the parts of the first clip assembly as separated.

FIG. 10A is a perspective view of a second clip assembly in accordance with an embodiment of the invention.

FIG. 10B is an exploded view showing the parts of the second clip assembly as separated.

FIG. 10C further illustrates the Z shape of the lever.

FIG. 11 is a top view showing a double-clip assembly in accordance with an embodiment of the invention.

FIG. 12 is a perspective view of an outer face on one side of a permeable substrate carrier in accordance with an embodiment of the invention.

FIG. 13 is a closer-up perspective view of a portion of the permeable substrate carrier of FIG. 12 in accordance with an embodiment of the invention.

FIG. 14 is a flow chart of a method of manufacturing and maintaining a single-piece substrate carrier for electroplating in accordance with an embodiment of the invention.

FIG. 15 is a flow chart of a method of using the carrier to electroplate a plurality of substrates in accordance with an embodiment of the invention.

10 DETAILED DESCRIPTION

[0012] The following detailed description is merely illustrative in nature and is not intended to limit the embodiments of the subject matter or the application and uses of such embodiments. As used herein, the word "exemplary" means "serving as an example, instance, or illustration." Any implementation described herein as exemplary is not necessarily to be construed as preferred or advantageous over other implementations. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding technical field, background, brief summary or the following detailed description.

[0013] Conventional substrate carriers for electroplating have problems that are difficult to diagnose and solve. One problem with conventional substrate carriers is that they sometimes break the substrates during loading of the substrates onto the carrier. Applicants have analyzed the breakages and have discovered that the breakages frequently occur in the vicinity of the metal clips used to hold the substrates to the carrier. Applicants have further analyzed these breakages and have determined that they are often due to a portion of the clip impacting the edge of the substrate when the clip is not fully in a "closed" position.

[0014] Another problem with conventional substrate carriers is that the plating of some of the substrates is frequently incomplete in that there is non-uniform coverage of the substrate. The positions of the incompletely-plated substrates in the carrier are not always the same and appear to be somewhat random. Applicants have analyzed the incompletely plated substrates and have discovered that the incompletely-plated "stain" is often at a bottom portion of the substrate. Applicants have determined that these "stains" are due to plating solution residue that becomes trapped at the bottom of the carrier pockets and is not rinsed out.

[0015] Other problems relate to a lack of durability of the carriers. In other words, mechanical breakages limit the useful lifespan of the conventional substrate carriers before repair or replacement is necessary. The contact clips frequently fail due to being broken or damaged, or having too low tension, or not contacting the substrate in the proper location. In addition, the pads on the carrier often break or crack. Moreover, the carrier body itself often cracks or breaks, and the copper conductors within the carrier often fail due to etching by the chemical baths. Applicants have determined that that contributing factors

for breakage of the carrier body include over-stacking of carriers during staging and mishandling of the carriers.

[0016] The present application discloses improved substrate carriers that provide solutions to one or more of the above-discussed problems.

[0017] In accordance with one embodiment of the invention, a substrate carrier is provided that does not have openings allowing solution to go from one side of the carrier to the other side. In other words, the substrate carrier is effectively continuous and non-permeable to the electrolyte solution. A conventional view is that such openings are advantageous in reducing the weight of the carrier and allowing the electrolyte solution to flow through from side to side. However, applicants have surprisingly found that a "flat" carrier body which is effectively continuous and non-permeable (without openings going through the body) has various advantages. First, applicants believe that the flat carrier body provides a sheeting action which assists in the complete removal of the electrolyte solution during rinsing. In addition, although the flat carrier body is conventionally thought to be substantially heavier (due to the lack of open space), applicants have designed a flat carrier body with internal cavities so as to substantially reduce its weight.

[0018] In accordance with another embodiment of the invention, a robust substrate carrier is provided which has improved adhesion between thermoplastic and metal layers. The improved adhesion results in a superior hermetic seal which prevents chemical solutions from prematurely corroding metal within the carrier. As disclosed herein, the adhesion problems may be solved or reduced by replacing a previous weak metal-to-thermoplastic surface bond interface with two strong bond interfaces. The two strong bond interfaces are an improved metal-to-thermoplastic surface bond interface (using a bonding technique which provides superior adhesion, such as injection molding, for example) and a thermoplastic-to-thermoplastic surface bond interface.

[0019] In accordance with another embodiment of the invention, a substrate carrier is provided which has reduced downtime due to component failures. The component failures may comprise, for example, failures of the clips which hold the substrates to be plated to the carrier. As disclosed herein, a substrate carrier may be configured such that clips and other components may be removably attached. This advantageously enables the carrier to be kept in service without the substantial downtime needed to repair more permanently attached components.

[0020] FIG. 1 is a planar view of an inner face 102 of a non-conductive (electrically-insulating) plate for a non-permeable substrate carrier in accordance with an embodiment of the invention. The non-conductive plate itself is electrically insulating. Also shown positioned on the inner face is a conductive assembly including an electrically-conductive bus bar 120 at a top of the carrier and conductive lines 128 going from the bus bar 120 towards the bottom of the carrier.

[0021] In this exemplary embodiment, the inner face 102 includes fifteen "X" shaped ribbing patterns 106, each X-shaped ribbing pattern 106 separating four pocket indentations 104. These pocket indentations 104 substantially reduce the weight of the plate.

[0022] In addition, shown at the center of the X-shaped ribbing pattern 106 is a center location 111 which corresponds to a center pad location 211 on the outer face 202 (see FIG. 2, which is described below). Also shown at a perimeter around each X-shaped ribbing pattern 106 are first perimeter locations 112 which correspond to perimeter pad locations 212 on the outer face 202 (see FIG. 2). Shown at slightly farther out perimeter around each X-shaped ribbing pattern 106 are second perimeter locations 114 which correspond to alignment peg locations 214 on the outer face 202 (see FIG. 2).

[0023] Further shown in FIG. 1 is a conductive assembly including a metal bus bar 120 coupled to metal lines 128. For example, the metal bus bar 120 may be machined stainless steel and the metal lines 128 may be copper lines. The metal bus bar 120 may be coupled to the metal lines 128 in an electrically-conductive manner by welding of a metal cover plate 129 (which may also be stainless steel, for example). Metal bushings may be welded in the bushing holes 127 to securely interconnect the plate 129 and a top portion 402 (see FIG. 4) of the metal lines 128. In addition, metal clipping pins 130 are attached to the metal lines 128 at either side of the X-shaped ribbing patterns 106. These metal clipping pins 130 may be configured to allow removable clips to be attached onto the outer surface 202 of the carrier. Some of the metal clipping pins 130 are attached to metal lines 128 at an edge of the plate and others are attached to metal lines 128 in an interior of the plate.

[0024] The metal bus bar 120 is machined to have a plurality of openings. Two "keyhole" shaped openings 122 may be included to mount the carrier onto a mechanical work arm. The "keyhole" shape includes an alignment feature 123 which enables a more consistent alignment between the work arm and the carrier. On either side of each keyhole-shaped opening 122 may be a side opening 124. The side openings 124 advantageously reduce a weight of the metal bus bar 120. A handle opening 126 is provided at a top center location to facilitate manual holding of the carrier. The bus bar 120 may also include a series of bonding holes 132 to facilitate the secure attachment of a thermoplastic overcoat 602 (see FIG. 6, which is described below).

[0025] Also shown in FIG. 1 are dowel pin holes 140 at the corners of the carrier. These dowel pin holes 140 go through both the non-conductive plate and the metal bus bar 120 and may be used for the alignment of the carrier when it is loaded onto a table or loader.

[0026] FIG. 2 is a planar view of an outer face 202 of the non-conductive plate in accordance with an embodiment of the invention. A portion of the conductive bus bar 120 is also shown. In this exemplary embodiment, the outer face 202 is designed to be substantially "flat"

to reduce a tendency for electrolyte solution to remain trapped in corners and crevices of the carrier.

[0027] The outer face **202** includes fifteen center pad attachment points **211**. Shown on a first perimeter around each center pad attachment point **211** are perimeter pad attachment points **212**. These pad attachment points (**211** and **212**) may comprise, for example, mounting holes for removably attaching plastic pads.

[0028] Shown on a second perimeter around each center pad attachment point **211** are alignment peg attachment points **214**. Points on the second perimeter are slightly farther out from the center point than points on the first perimeter. The peg attachment points **214** may comprise, for example, mounting holes for removably attaching plastic pegs.

[0029] Fifteen areas **213** for holding a substrate (such as a silicon wafer, for example) are present on the outer face **202** in this exemplary embodiment. Each substrate holding area **213** is surrounded by the alignment peg attachment points **214**. The pad attachment points (**211** and **212**) are located within the substrate holding area **213** such that pads attached at those points provide spacing between the substrate and the surface of the outer face **202**.

[0030] Further shown in FIG. 2 are clip attachment features **210**. In accordance with an embodiment of the invention, each clip attachment feature may comprise a threaded outer surface **502** of a metal clipping pin (see FIG. 5B, described below). The clip attachment features are located on opposite sides of each substrate holding area **213**. In the exemplary embodiment shown, the clip attachment features may be aligned in vertical columns, including clip attachment features **210** along each side of the plate and clip attachment features **210** between neighboring substrate holding areas **213** in an interior region of the plate.

[0031] FIG. 3 is a perspective view of a substrate holding area **213** on the outer face **202** of the non-conductive plate in accordance with an embodiment of the invention. As shown, at a center of the substrate holding area **213** is a center pad **311** (attached to the center attachment point **211** shown in FIG. 2). Shown on a first perimeter around the center pad **311** are perimeter pads **312** that are removably attached to the perimeter attachment points **212**. For example, the center and perimeter attachment points (**211** and **212**) may comprise insertion holes, and the pads (**311** and **312**) may be attached by inserting stubs on the underside of the pads into the insertion holes. The pads (**310** and **311**) may be provided so as to advantageously create a rinsing space between the surface of the outer face **202** and the substrate to be plated. The pads (**310** and **311**) may be made of plastic and may be configured to be removable for ease of replacement when they become worn or damaged. In one implementation, the pads may have a flat surface that is in a "tear drop" shape.

[0032] Shown on a second perimeter around the center pad **311** are alignment pegs **314** that are removably at-

tached to the alignment peg attachment points **214**. (Points on the second perimeter are slightly farther out from the center pad **311** than points on the first perimeter.) For example, the peg attachment points **214** may comprise insertion holes, and the pegs **314** may be attached by inserting a stub at the bottom of each peg into an insertion hole. The pegs **314** have the dual functionalities of holding the substrate to be plated within the substrate holding space and protecting the clips from damage that may be caused by the substrate. The pegs **314** may be made out of plastic and may be configured to be removable for ease of replacement when they become worn or damaged. In one implementation, the pegs **314** may be tapered.

[0033] As further shown, on one side of the substrate holding area **213** is a first set of three clip attachment features **210**, and on the other side is a second set of three clip attachment features **210**. The clip attachment features **210** may be configured such that electrically-conductive clips may be removably attached for ease of replacement when they become worn or damaged. The clip attachment features **210** form an electrically-conductive path between the conductive assembly (such as depicted in FIG. 4) and the electrically-conductive clips.

[0034] In addition, FIG. 3 depicts relief cuts **316** surrounding the clip attachment features **210**. These relief cuts **316** are recessed areas that facilitate proper positioning of a base of a clip assembly (for example, see base **1012** of clip assembly **1000** shown in FIGS. 10A and 10B).

[0035] FIG. 4 is a planar view of a conductive assembly (weldment) including an electrically-conductive bus bar **120** and metal lines **128** in accordance with an embodiment of the invention. As shown, metal clipping pins **130** are attached to the metal lines **128**. As further shown, the metal lines **128** are attached to a connecting plate **402** which is used to connect the conductive bus bar **120** to the metal lines **128**. In one embodiment, the bus bar **120** may be formed from stainless steel, and the metal lines **128** may comprise copper lines.

[0036] FIGS. 5A and 5B are two perspective views showing portions of the conductive assembly of FIG. 4 in accordance with an embodiment of the invention. As shown in FIG. 5A, the connecting plate **402** is sandwiched between two metal cover plates **129**. Bushings may then be welded in the bushing holes **127** so as to electrically and mechanically connect the conductive bus bar **120** to the metal lines **120**. The metal clipping pins **130** are attached in a permanent manner (for example, welded) to the metal lines **120**. As shown in FIG. 5B, the metal clipping pins **130** may include a threaded outer surface **502**. Furthermore, a thermoplastic layer (or overcoat) **504** may be deposited, for example, by injection molding, around the metal clipping pins **130** on the metal lines **128**. In addition, a further thermoplastic layer (or overcoat) **506** may be deposited, for example, by dip coating or spray coating, over the metal lines **128**. For ease of illustration, only a small segment of the metal lines **128** is shown with

the the thermoplastic layer **506** in FIG. 5B. However, the thermoplastic layer **506** may be coated over either a portion of, or an entirety of, the metal lines **128** in accordance with embodiments of the invention.

[0037] FIG. 6 is a planar view showing a thermoplastic overmold (or overcoat) **602** applied to a portion the conductive bus bar **120** in accordance with an embodiment of the invention. As shown, the thermoplastic overmold **602** preferably spans a horizontal length of the conductive bus bar **120**. In this exemplary configuration, the thermoplastic overmold **602** fills the bonding holes **132** so as to bond securely to the conductive bus bar **120**. The thermoplastic overmold **602** over select portions of the conductive bus bar **120** may be applied, for example, by injection molding.

[0038] FIG. 7 is a cross-sectional view which depicts various layers in the bonding of two carrier plates and a conductive assembly in accordance with an embodiment of the invention. Note that FIG. 7 is not to scale and depicts the various layers for purposes of explanation.

[0039] As shown, a lower portion of the conductive bus bar **120** is sandwiched between the inner faces **102** of the two non-conductive carrier plates **700**. As shown, the thermoplastic overmold **602** covers both sides of the conductive bus bar **120**. A solvent cement layer **732** may be used to form a plastic-to-plastic bond between the inner surfaces **102** of the non-conductive carrier plates **700** and the thermoplastic overcoat **602** on the conductive bus bar **120**.

[0040] FIG. 8 is a perspective view depicting a semiconductor wafer **804** clipped to a substrate carrier in accordance with an embodiment of the invention. As shown, the wafer **804** may be placed in a space defined by alignment pegs **314** along its perimeter. Underneath the wafer **804** may be spaced from the outer face **202** of the carrier by a plurality of pads (for example, a center pad **311** and perimeter pads **312**) (not shown). In this exemplary embodiment, electrically-conductive clips **802** are attached to the clip attachment features **210** on opposite sides of the wafer **804**. When holding the wafer **804** to the carrier, each electrically-conductive clip **802** may be positioned so that its contact point rests on a metallic contact pad **806** on the surface of the wafer **804**. In an exemplary embodiment, the wafer **804** is configured such that each contact pad **806** is located directly above one of the perimeter pads **312** so that the clip may press the wafer directly against the pad (see neighboring space for another wafer on the right).

[0041] FIG. 9A is a perspective view of a first clip assembly **900** in accordance with an embodiment of the invention. As shown, the first clip assembly **900** may include a clip **901**, a screw **912** and an O-ring **914**. In this exemplary embodiment, the clip **901** may be formed from a single stainless steel piece (SS 301 which is fully hardened, for example). In addition, the screw **912** may be threaded on the inside so that it may be screwed onto the outer thread **502** of the clip attachment pin **130**.

[0042] FIG. 9B is an exploded view showing the parts

of the first clip assembly **900** as separated. In addition, various features of the clip **901** are labeled. As seen, the clip **901** includes a base **902** with a hole **904**. The clip attachment pin **130** fits through the O-ring **914** and the hole **904**, and then the screw **912** may be screwed onto outer thread **502** of the clip attachment pin **130**. The base **904** of the clip **901** may also include one or more alignment features **903** so as to provide for the correct angular orientation of the clip once it is attached.

[0043] As further shown, a spring **905** may extend upward from the base **902**. In this case, the spring comprises folds of the metal which forms the clip. A clip arm **906** may start at the top of the spring **905** and extend away from the base **902**. As seen, the arm **906** may be tapered in an exemplary embodiment to improve its lifetime. A tip portion **908** may extend downward from the end of the arm **906** which is furthest from the base **902**. A contact feature **910** may be formed at the lowest point of the tip portion **908**. The contact feature **910** is the part of the clip **901** which makes physical contact with the substrate to be plated (for example, at the contact pads **806** on a surface of a semiconductor wafer). In one implementation, the contact feature **910** is approximately 1 mm wide.

[0044] FIG. 10A is a perspective view of a second clip assembly **1000** in accordance with an embodiment of the invention. In this exemplary embodiment, the second clip assembly **1000** may include both metal and plastic parts. FIG. 10B is an exploded view showing parts of the second clip assembly **1000** as separated. As shown, the second clip assembly may include a plastic base **1012**, a metal spring-attachment plate **1014**, a metal screw **1016**, a metal double-torsion spring-loaded clip **1018**, a plastic lever **1020**, and a rubber O-ring **1022**.

[0045] The screw **1016** includes a shaft which fits through an opening of the spring attachment plate **1014**, the O-ring **1022**, and through an opening in the base **1012**. In an exemplary implementation, the shaft **1042** may be threaded internally so as to be screwed onto an outer thread **502** of a metal clipping pin **130**. The lever **1020** is also attached to the base **1020** using features **1030**.

[0046] Wire ends **1038** at a base of the spring-loaded clip **1018** fit into ferrule features **1040** on the spring attachment plate **1014**. The arm **1036** of the spring-loaded clip **1018** fits through an opening **1034** in the lever **1020**. When the arm **1042** of the lever **102** is pressed down, the arm **1036** of the clip **1018** is raised. When the arm **1042** of the lever **102** is released, the arm **1036** of the clip **1018** is lowered.

[0047] The shaft of the screw **1016** may pass through the O-ring **1022**, a hole in the spring-attachment plate **1014**, and a hole in the base **1012**. The shaft of the screw **1016** may have an inner thread which screws onto the outer thread of the clip attachment pin **130** so as to attach the base **1012** to the outside face **202** of the non-conductive carrier plate. The O-ring **1022** may fit into a recessed ring surrounding the hole in the base **1012** so as to prevent the electrolytic solution of the plating bath from

reaching to the clip attachment pin **130**.

[0048] The spring-loaded clip **1018** may be made of stainless steel (SS 301, for example) and may include wire ends **1038** that fit into ferrules **1040** of the spring-attachment plate **1014**. The spring-loaded clip **1018** may further include an arm **1036** that may be squeezed so as to fit in and through a spring hole **1034** in the lever **1020**. The spring opening **1034** may provide dual functionalities of protecting the spring coils **1037** and limiting the right-to-left and left-to-right movements of the arm **1036**. The lever **1020** may include male rotatable attachment features **1030** that fit into corresponding female rotatable attachment features **1028** of the base **1012**. The male rotatable attachment features **1030** thus form a pivot shaft for pivotally mounting the lever **1020**.

[0049] The lever (actuating arm) **1020** may be formed in a "Z" shape. The Z shape is illustrated in FIG. 10C. The Z shape of the lever **1020** advantageously allows for a wide window for opening the clips, particularly when they are arranged into a double-clip assembly **1100** as described below in relation to FIG. 11.

[0050] When the clip assembly **1000** is attached to the clip attachment pin **130**, a handle **1042** of the lever **1020** may be pressed down to open (disengage) the clip by lifting up the arm of the spring-loaded clip **1018** and so raise the contact feature **1044** at its tip. Releasing the handle **1042** of the lever **1020** causes the clip to close (engage) by lowering the arm of the spring-loaded clip **1018** so that the contact feature **1044** exerts a downward force to hold in place the substrate to be plated.

[0051] In accordance with an embodiment of the invention, the clip assembly **1000** forms an electrically-conductive path from the metal clipping pins **130** to the substrate to be electroplated. In one implementation, the screw **1016**, the spring-attachment plate **1014** and the clip **1018** are each metallic so as to form the electrically-conductive path from the metal clipping pins **130** to the substrate to be electroplated.

[0052] FIG. 11 is a top view showing a double-clip assembly **1100** in accordance with an embodiment of the invention. Such a double-clip assembly **1100** is preferably attached to the clip attachment features **210** which are located between two substrate holding areas **213**. As shown, in this embodiment, the base **1012** is configured with two sets of female rotatable attachment features **1028** (one set to the left of the screw **1016** and one set to the right of the screw **1016**) such that two levers **1020** may be pivotally mounted to the base **1012**. Two spring arms **1018** are attached by inserting their wire ends **1038** into two sets of ferrules **1040** on the spring-attachment plate **1014** and by squeezing them into the spring holes **1034** of the levers **1020**. One spring arm **1018** is oriented with its tip portion is over a first substrate holding area **213** towards the top of the diagram, and the other spring arm **1018** is oriented with its tip is over a second substrate holding area **213** towards the bottom of the diagram.

[0053] In accordance with an embodiment of the in-

vention, a robotic machine may be configured to open all the clips surrounding each substrate holding area **213** and a wafer (or other substrate to be processed) may be placed therein. The opening of the clips may be accomplished by simultaneously pressing down on the handles **1042** to raise the arms of the corresponding spring-loaded clips **1018**. The clips surrounding each substrate holding area **213** may then be closed by the robotic machine releasing the handles **1042** to lower the arms of the corresponding spring-loaded clips **1018** such that the contact features **1044** press against the metallic contact pads **806** to hold the wafer (or other substrate or other substrate to be plated) firmly in place. Once all the wafers (or other substrates) to be processed have been thus loaded onto the carrier, then the plating and other processing may be performed. After the processing, a robotic machine may be configured to re-open all the clips surrounding each substrate holding area **213** so that the processed wafers (or other substrates) may be removed and replaced with wafers to be subsequently processed.

[0054] FIG. 12 is a perspective view of an outer face **1202** on one side of a permeable substrate carrier in accordance with an embodiment of the invention. In this alternate embodiment, the two plates forming each substrate carrier each include at least one opening for each substrate holding area. The embodiment illustrated has one large opening **1204** at the center of each substrate holding area. As shown, the openings **1204** may be circular, for example. The openings **1204** reduce the weight of the carrier body and allows rinsing solution to flow through (permeate) the carrier body. Applicants believe that the openings **1204** reduce a drag force when the carrier is removed from a bath.

[0055] The conductive assembly (weldment) including the electrically-conductive bus bar **120** at the top of the carrier and conductive lines **128** going from the bus bar **120** towards the bottom of the carrier may be the same as, or similar to, the conductive assembly described above in relation to FIGS. 4, 5A, 5B, 6 and 7.

[0056] Further shown in FIG. 12 are clip attachment features **1210** on left and right sides of each opening **1204**. Electrically-conductive clips are preferably attached to the clip attachment features **1210**. The electrically-conductive clips may be the same as, or similar to, the clip assembly **900** described above in relation to FIGS. 9A and 9B, or the clip assemblies (**1000** and **1100**) described above in relation to FIGS. 10A, 10B, 10C and 11.

[0057] In addition, FIG. 12 shows support ribs **1220** on the left, bottom, and right sides of the carrier body. These support ribs **1220** provide structural strength to the carrier body. In accordance with an embodiment of the invention, the support ribs **1220** have a tapered profile to advantageously facilitate non-retention of electrolyte solution.

[0058] Also shown in FIG. 12 are horizontal support bars **1222**. The horizontal support bars **1222** may be con-

figured between rows of the openings **1204** to provide additional structural strength to the carrier body. In accordance with an embodiment of the invention, the raised horizontal support bars **1222** have a tapered profile to advantageously facilitate non-retention of electrolyte solution.

[0059] In addition, FIG. 12 shows a plurality of stacking features **1224** on the carrier body. In one implementation, the stacking features **1224** may be arranged periodically along the horizontal support bars **1222**. The stacking features **1224** are configured so as to maintain alignment and separation between carrier bodies when they are stacked.

[0060] FIG. 13 is a closer-up perspective view of a portion of the permeable substrate carrier of FIG. 12 in accordance with an embodiment of the invention. As shown, each side surrounding an opening **1204** includes substrate alignment features **1314**. The substrate alignment features **1314** are positioned around the opening **1204** and are configured such that the wafer (or other substrate) to be plated fits within a region having these substrate alignment features **1314** at its perimeter.

[0061] As further shown, there are several spacing features **1312** positioned around the opening **1204**. The spacing features **1312** are positioned to lie underneath the wafer or other substrate to be plated when it is clipped to the substrate carrier. The spacing features **1312** provides a space or gap between the substrate and the carrier.

[0062] In addition, FIG. 13 depicts relief cuts **1316** surrounding the clip attachment features **1210**. These relief cuts **1316** are recessed areas that facilitate proper positioning of a base of a clip assembly (for example, see base **1012** of clip assembly **1000** shown in FIGS. 10A and 10B).

[0063] FIG. 14 is a flow chart of a method **1400** of manufacturing and maintaining a single-piece substrate carrier for electroplating in accordance with an embodiment of the invention. The single-piece substrate carrier is substantially more robust when compared against a prior multiple-piece substrate carrier.

[0064] Blocks **1402** through **1408** pertain to the manufacture of a conductive assembly. The conductive assembly may be, for example, configured as the conductive assembly (weldment) described above in relation to FIG. 4.

[0065] In block **1402**, an electrically-conductive bus bar is fabricated. In one example, the bus bar may be fabricated by machining a 6 millimeter thick stainless steel (SS 316, for example) bar to a shape with openings such as described above in relation to the bus bar **120** shown in FIG. 1. After machining, the bus bar may be deburred and cleaned.

[0066] In block **1404**, a portion of the bus bar spanning its horizontal length is overmolded or overcoated with a thermoplastic. The overmolding or overcoating may be performed, for example, by injection molding chlorinated polyvinyl chloride (CPVC) over a lower portion of the bus

bar. In one example, the thermoplastic overcoat may be formed over an area of the bus bar such as the area **602** shown in FIG. 6.

[0067] In block **1405**, the bus bar and metal lines may be pre-treated prior to being conductively attached together. The pre-treatment may comprise degreasing with sand blasting and/or using a grit cloth to remove surface deposits and may also comprise cleaning with multiple washes and air drying. The pre-treatment may also include pretreating with chemicals to promote adhesion between the bus bar (stainless steel, for example) and the metal lines (copper, for example).

[0068] In block **1406**, metal lines are conductively attached to the bus bar. This may be accomplished, for example, by welding the metal lines (for example, copper) to the bus bar (for example, stainless steel). In one example, the metal lines may be configured similarly to the configuration of metal lines **128** shown in FIG. 4.

[0069] In block **1408**, clip-attachment parts are conductively attached to the metal lines, and thermoplastic layers may be deposited. The thermoplastic layers may include, for example, a thermoplastic layer (see **504** in FIG. 5B) surrounding each clip-attachment parts and a thermoplastic layer (see **506** in FIG. 5B) over the metal lines.

[0070] Blocks **1410** and **1412** pertain to the manufacture of the non-conductive plates for the carrier body. In one embodiment, the non-conductive plates may be formed from CPVC material. Other embodiments may use different thermoplastic materials.

[0071] In block **1410**, two non-conductive plates are formed with various features for the carrier body. In a first embodiment, the carrier body is designed to be non-permeable to electrolytic solution and may comprise non-conductive plates with an inner face **102** as shown in FIG. 1 and an outer face **202** as shown in FIG. 2. In this embodiment, although holes are formed through the plates for the clip attachment parts, the thermoplastic layer around the clip attachment parts are bonded to the inner face of the non-conductive plate to maintain the non-permeable aspect of the carrier body. In a second embodiment, the carrier body is designed to be permeable to electrolytic solution and may be configured with large circular openings **1204** as shown in FIG. 12.

[0072] In block **1412**, the surfaces of the plates are prepared prior to bonding. For example, the surfaces may be sand blasted and then cleaned with multiple washes and air drying.

[0073] Blocks **1414** through **1416** pertain to the integration of the conductive assembly and the carrier plates to form a single-piece substrate carrier. In block **1414**, a solvent cement is applied to areas of the inner faces of the two plates. In the plates are made of CPVC, then an exemplary solvent cement may be a CPVC solvent cement, such as, for instance, Weld-On® 724™ solvent cement.

[0074] In block **1416**, the inner sides of the two plates are bonded with the overmolded portion of the bus bar

and the metal lines encased therebetween. The positioning of the bus bar and the metal lines against an inner face of one of the plates is depicted in FIG. 1, for example. The bonding process may involve, for example: application of a primer to the inner faces of the plates; application of a gum material on the areas of the inner faces where the metal lines are to be embedded; embedding the metal lines within the gum material; bonding the inner faces of the two plates; and curing the bonded plates (for example, for 72 hours).

[0075] Blocks **1417** and **1420** pertain to adding the clips, pads and pegs onto the outer faces of the carrier plates.

[0076] In block **1417**, post-bond drilling for the clip-attachment parts and tapping or threading of the clip-attachment parts are performed. Thereafter, in block **1418**, clips to hold the substrates to the carrier may be attached in a removable manner to the clip attachment features at the outer faces of the carrier. Because the clips are removably attached, they may be readily replaced when worn or damaged. In one embodiment, the clips may comprise clip assemblies **900** such as those depicted in FIGS. 9A and 9B. In another embodiment, the clips may comprise single clips on the edges of the carrier and double clips on the interior of the carrier (where the double clips are between two substrate holding areas). The single clips may comprise, for example, the clip assembly **1000** depicted in FIGS. 10A, 10B. The double clips may comprise, for example, the clip assembly **1100** depicted in FIG. 11.

[0077] In block **1420**, spacing pads and substrate-alignment pegs may be removably attached onto the outer faces of the carrier plates. Because the pads and pegs are removably attached, they may be readily replaced when worn or damaged. The spacing pads may be removably attached to the pad attachment points (**211** and **212**) at the outer faces **202** of the carrier. In one embodiment, the spacing pads may comprise the pads (**311** and **312**) depicted in FIG. 3. The substrate-alignment pegs may be removably attached to the alignment peg attachment points **214** at the outer faces **202** of the carrier.

[0078] Blocks **1422** and **1426** pertain to maintaining the substrate carrier. In block **1422**, the carrier is used to electroplate substrates. Use of the carrier typically involves dipping the carrier with the substrates clipped thereon into one or more electroplating baths while a voltage is applied to the substrates by way of the clips. See the method **1500** described below in relation to FIG. 15, for example.

[0079] Upon occasion, the clips may become worn or damaged. In accordance with an embodiment of the invention, the worn or damaged clips may be readily replaced per block **1424**. In one implementation, the replacement of the clips may be performed on a periodic schedule. This advantageously allows the carrier to be kept in service without the substantial downtime needed to repair more permanently attached clips.

[0080] Similarly, upon occasion, the spacing pads

and/or alignment pegs may become worn or damaged. In accordance with an embodiment of the invention, the worn or damaged pads and/or pegs may be readily replaced per block **1426**. In one implementation, the replacement of the pads and/or pegs may be performed on a periodic schedule. This advantageously allows the carrier to be kept in service without the substantial downtime needed to repair more permanently attached pads and/or pegs.

[0081] FIG. 15 is a flow chart of a method **1500** of using a substrate carrier to electroplate a plurality of substrates in accordance with an embodiment of the invention. In block **1502**, a robotic loader may be used to clip a plurality of substrates to the substrate holding areas of the carrier. In block **1504**, the substrate carrier may be mounted on a work arm of an electroplating machine.

[0082] In block **1506**, the electroplating machine may mechanically dip the carrier into an electroplating bath. Per block **1508**, a voltage may be applied to the substrates by way of the electrically-conductive path traveling through the bus bar, the metal lines, and the clips. In one example, the substrates may comprise silicon wafers. The clips may make contact, for example, with a base (seed) layer of copper (or other metal) in gridlines on the surface of the wafers. A metal layer may then be deposited from the electroplating bath on top of the base layer.

[0083] Per block **1512**, if more metal layers are to be electroplated onto the substrates, then the method **1500** may loop back to block **1506** and the carrier may be mechanically dipped into a different electroplating bath to deposit a different metal layer so as to form a multi-layer stack for a metal contact, for example. When no more metal layers are to be electroplated onto the substrates, then per block **1514** the substrates may be removed from the carrier by a robotic machine, for example. Thereafter, the method **1500** may loop back to block **1502** and other (unplated) substrates to be processed may be robotically clipped onto the substrate carrier.

[0084] While at least one exemplary embodiment has been presented in the foregoing detailed description, it should be appreciated that a number of variations exist. It should also be appreciated that the exemplary embodiment or embodiments described herein are not intended to unnecessarily limit the scope, applicability, or configuration of the claimed subject matter. Rather, the foregoing detailed description will provide those skilled in the art with a convenient road map for implementing the described embodiment or embodiments. It should be understood that various changes can be made in the design and arrangement of elements without departing from the scope defined by the claims, which includes known equivalents and foreseeable equivalents at the time of filing this patent application.

PREFERRED EMBODIMENTS OF THE INVENTION
COMPRISE THE FOLLOWING FEATURES:

[0085]

1. A substrate carrier for use in electroplating a plurality of substrates, the substrate carrier comprising:

a non-conductive carrier body on which the substrates are to be held;

electrically-conductive lines embedded within the carrier body; and

a plurality of contact clips which are coupled to the electrically-conductive lines embedded within the carrier body, the contact clips holding the substrates in place and electrically coupling the substrates to the electrically-conductive lines,

wherein the non-conductive carrier body is continuous so as to be impermeable to flow of electroplating solution through the non-conductive carrier body.

2. The substrate carrier of embodiment 1, further comprising:

cavities in the non-conductive carrier body.

3. The substrate carrier of embodiment 2, wherein non-conductive carrier body comprises a first thermoplastic layer and a second thermoplastic layer which are joined together thereby forming the cavities, and wherein the electrically-conductive lines are arranged in between the first and second thermoplastic layers.

4. The substrate carrier of embodiment 1, wherein the cavities are arranged at positions so as to be behind the substrates when the substrates are clipped to the substrate carrier.

5. The substrate carrier of embodiment 4, further comprising:

a ribbing pattern within said cavities.

6. The substrate carrier of embodiment 5, wherein the ribbing pattern comprises an X-shaped pattern.

7. The substrate carrier of embodiment 1, further comprising:

a plurality of spacing features on the non-conductive carrier body, the spacing features being configured to space the substrates from a top surface of the non-conductive carrier body when the substrates are clipped onto the substrate

carrier.

8. The substrate carrier of embodiment 7, wherein the spacing features comprise removable pads.

9. The substrate carrier of embodiment 8, wherein the removable pads have a flat surface which is tear-drop shaped.

10. The substrate carrier of embodiment 1, further comprising:

a plurality of aligning features on the non-conductive carrier body, wherein the aligning features are arranged to surround and align the substrates placed on the substrate carrier.

11. The substrate carrier of embodiment 10, wherein the aligning features are configured to be removable from the carrier body and replaceable with new aligning features.

12. The substrate carrier of embodiment 11, wherein the aligning features comprise pegs.

13. The substrate carrier of embodiment 12, wherein the pegs are tapered.

14. The substrate carrier of embodiment 1, further comprising:

an electrically-conductive bus bar configured at a top side of the non-conductive carrier body and conductively coupled to the electrically-conductive lines embedded in the non-conductive carrier body.

15. The substrate carrier of embodiment 14, further comprising:

a plurality of mounting holes in the bus bar for mounting the substrate carrier onto a work arm for dipping the non-conductive carrier body into, and raising the non-conductive carrier body out of, an electroplating bath while a voltage is applied to the bus bar.

16. A method of electroplating a plurality of substrates, the method comprising:

mechanically holding the plurality of substrates onto a substrate carrier having a non-permeable, non-conductive carrier body and an electrically-conductive path through the carrier body to substrates;

mounting the substrate carrier on a work arm;

dipping the carrier body with the substrates held thereon into an electroplating bath; and

applying a voltage to the substrates via the electrically-conductive path through the non-permeable, non-conductive carrier body.

17. A method of manufacturing a non-permeable substrate carrier for use in electroplating a plurality of substrates, the method comprising:

forming two non-permeable insulating plates, each plate having an inner face and an outer face;
fabricating a conductive assembly including a metallic bus bar, metal lines and conductive clip-attachment features; and
applying a solvent cement to areas of the inner faces of the two plates; and

bonding the inner faces of the two plates with the metal lines, the conductive clip-attachment features and a portion of the bus bar encased therebetween, wherein the non-permeable substrate carrier has a body that is continuous without openings which allow electrolyte solution to flow through the body.

18. The method of manufacturing of embodiment 17, further comprising:

after said bonding, drilling holes from the outer faces of the two plates to reach the conductive clip-attachment features.

19. The method of manufacturing of embodiment 17, wherein the inner face of each plate includes pocket indentations which form cavities when the inner faces of the two plates are bonded together.

20. The method of manufacturing of embodiment 17, further comprising:

overmolding a portion of the bus bar with a thermoplastic prior to said bonding.

21. The method of manufacturing of embodiment 17, further comprising:

depositing a thermoplastic layer around each conductive clip-attachment feature.

22. The method of manufacturing of embodiment 17, further comprising:

depositing a thermoplastic layer over the metal lines prior to said bonding.

Claims

1. A substrate carrier for electroplating a plurality of substrates, the substrate carrier comprising:

a non-conductive carrier body for holding the substrates, an area of the non-conductive carrier body that is directly behind the substrates being continuous so as to be impermeable to flow of electroplating solution through the area of the non-conductive carrier body;
a plurality of aligning features on the non-conductive carrier body, wherein the aligning features are arranged to surround and align the substrates; and
electrically-conductive lines embedded within the non-conductive carrier body.

2. The substrate carrier of claim 1, further comprising:

a plurality of spacing features on the non-conductive carrier body, the spacing features being configured to space the substrates from a top surface of the non-conductive carrier body.

3. The substrate carrier of claim 1, wherein the aligning features are configured to be removable from the carrier body and replaceable with new aligning features.

4. The substrate carrier of claim 1, wherein the aligning features comprise pegs.

5. The substrate carrier of claim 4, wherein the pegs are tapered.

6. The substrate carrier of claim 1, further comprising:

an electrically-conductive bus bar configured at a top side of the non-conductive carrier body and conductively coupled to the electrically-conductive lines embedded in the non-conductive carrier body.

7. The substrate carrier of claim 6, further comprising:

a plurality of mounting holes in the bus bar for mounting the substrate carrier onto a work arm for dipping the non-conductive carrier body into, and raising the non-conductive carrier body out of, an electroplating bath while a voltage is applied to the bus bar.

8. A substrate carrier for electroplating a plurality of substrates, the substrate carrier comprising:

a non-conductive carrier body;
a holding area on the non-conductive carrier

- body and over which the substrates are to be held, the entirety of the holding area being continuous so as to be impermeable to flow of electroplating solution through the holding area; and electrically-conductive lines embedded within the non-conductive carrier body.
- 5
9. The substrate carrier of claim 8, wherein the holding area on the non-conductive carrier body comprises a plurality of substrate holding sections, with each of the holding sections being configured to hold a substrate to be electroplated.
- 10
10. The substrate carrier of claim 9, wherein each of the substrate holding sections includes pocket indentations.
- 15
11. The substrate carrier of claim 10, wherein each of the substrate holding sections includes a ribbing pattern that separates the pocket indentations in the substrate holding section.
- 20
12. The substrate carrier of claim 11, wherein the ribbing pattern is X-shaped.
- 25
13. The substrate carrier of claim 10, further comprising:
- a plurality of aligning features on the holding area of the non-conductive carrier body, wherein the aligning features are arranged to surround and align the substrates.
- 30
14. The substrate carrier of claim 13, wherein the aligning features are configured to be removable from the carrier body and replaceable with new aligning features.
- 35
15. The substrate carrier of claim 13, wherein the aligning features comprise pegs.
- 40
16. The substrate carrier of claim 13, wherein the pegs are tapered.
- 45
17. A substrate carrier for electroplating a plurality of substrates, the substrate carrier comprising:
- a non-conductive carrier body;
- a plurality of substrate holding sections on the non-conductive carrier body, each substrate holding section being configured to hold a substrate to be electroplated and is continuous so as to be impermeable to flow of electroplating solution through the substrate holding section; and
- 50
- electrically-conductive lines embedded within the non-conductive carrier body.
- 55
18. The substrate carrier of claim 17, wherein each of

the substrate holding sections includes pocket indentations.

19. The substrate carrier of claim 17, further comprising:

a plurality of aligning features on each the plurality of substrate holding sections, wherein aligning features on a substrate holding section are arranged to surround and align a substrate to be electroplated.

20. The substrate carrier of claim 17, wherein the aligning features comprise pegs.

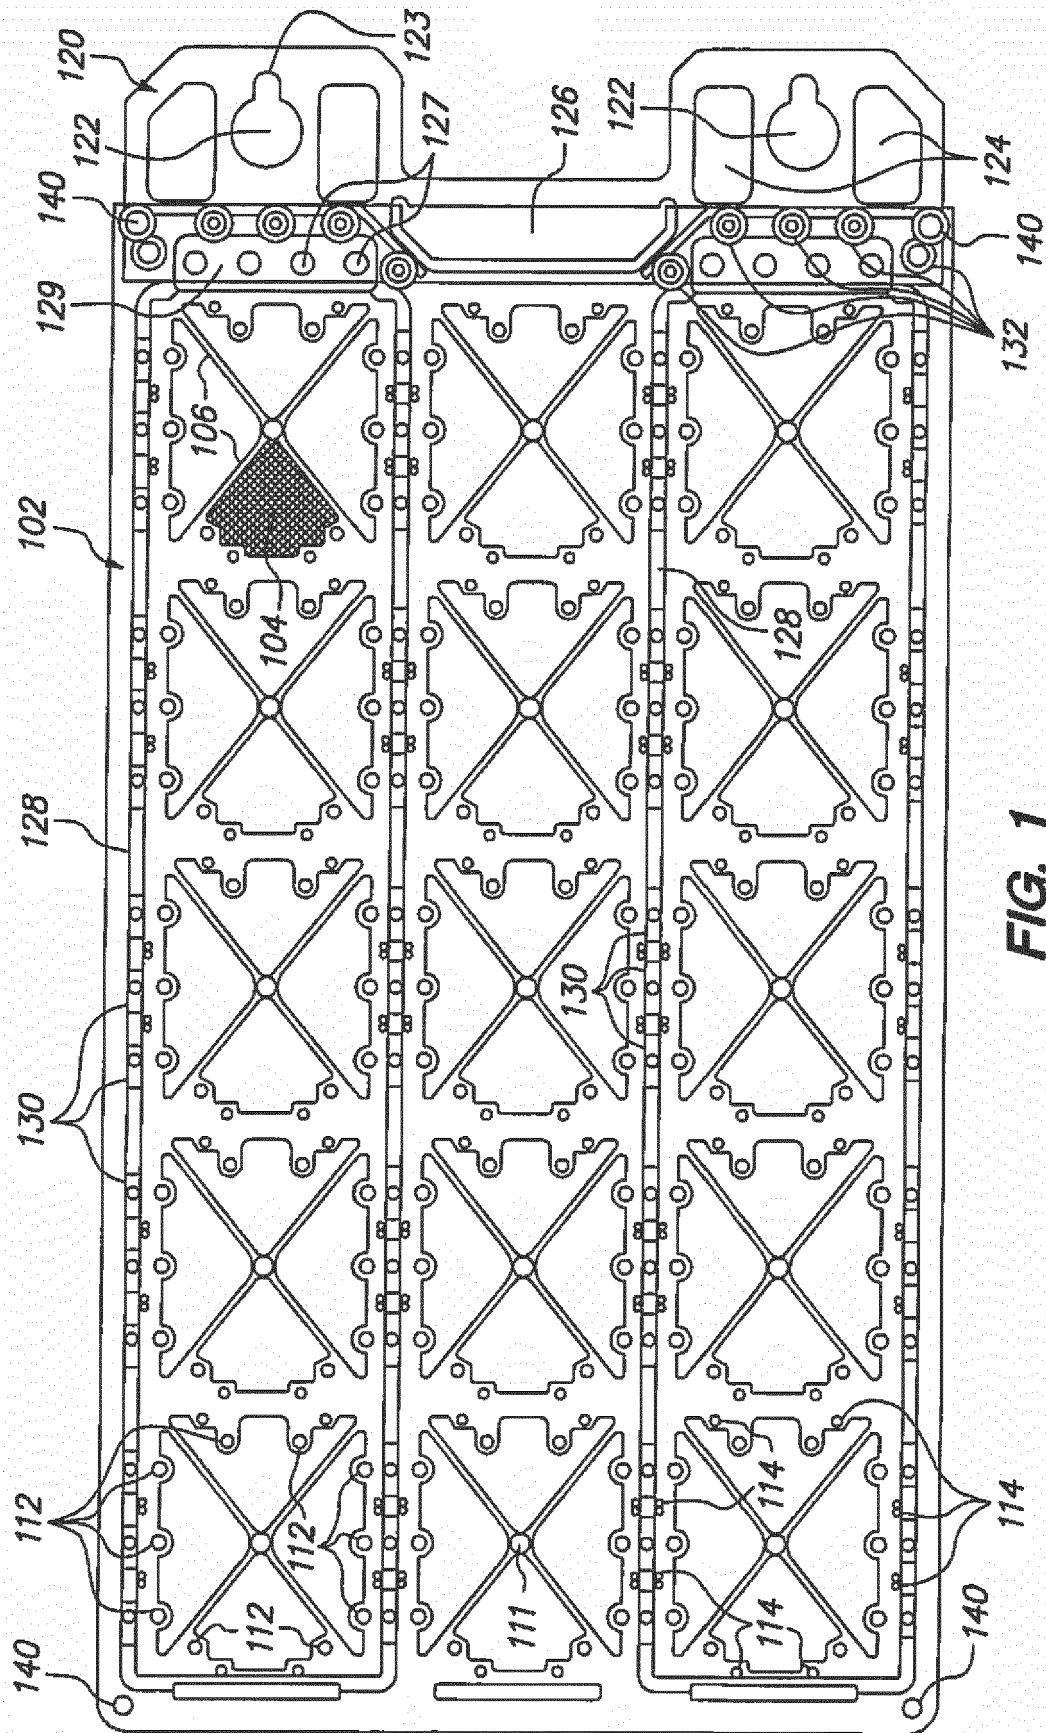


FIG. 1

2/17

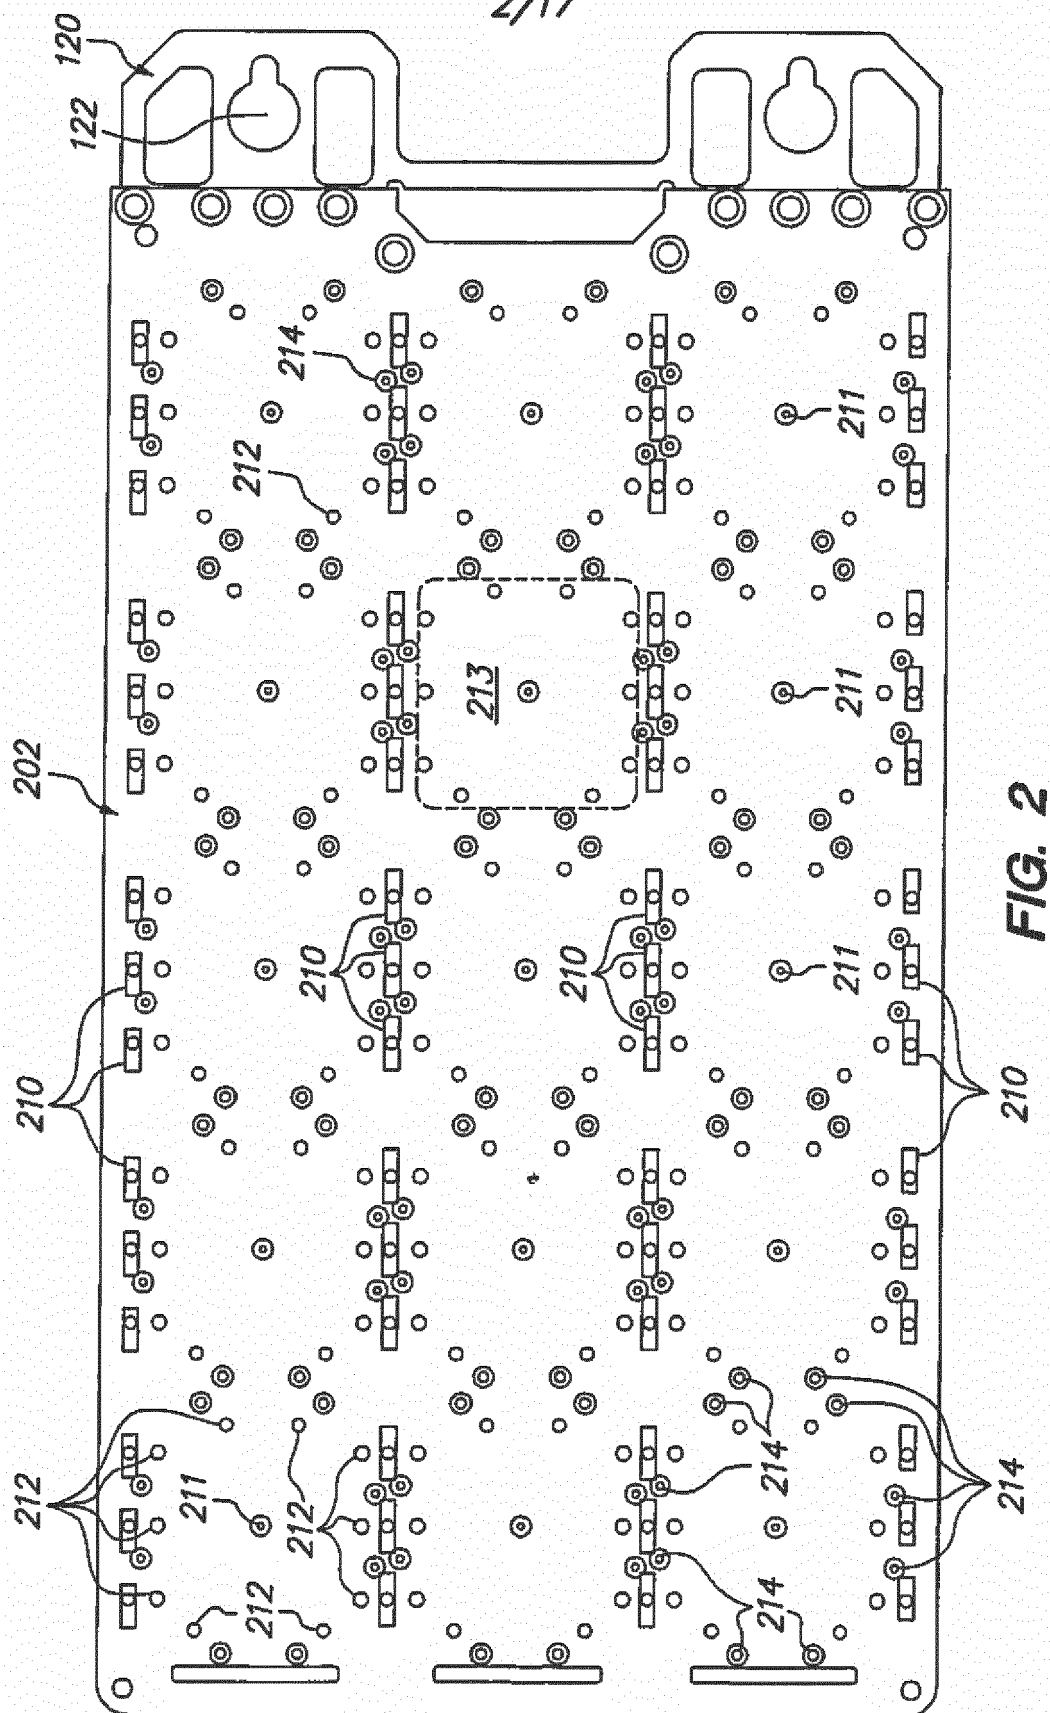


FIG. 2

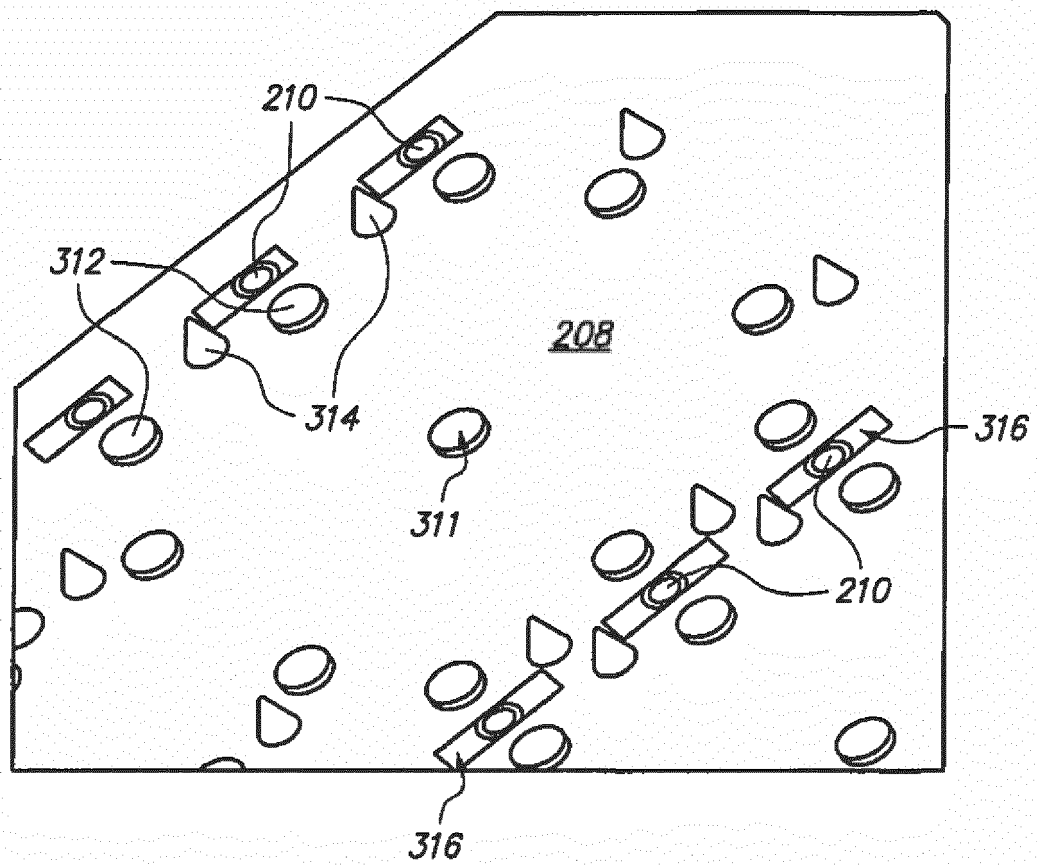


FIG. 3

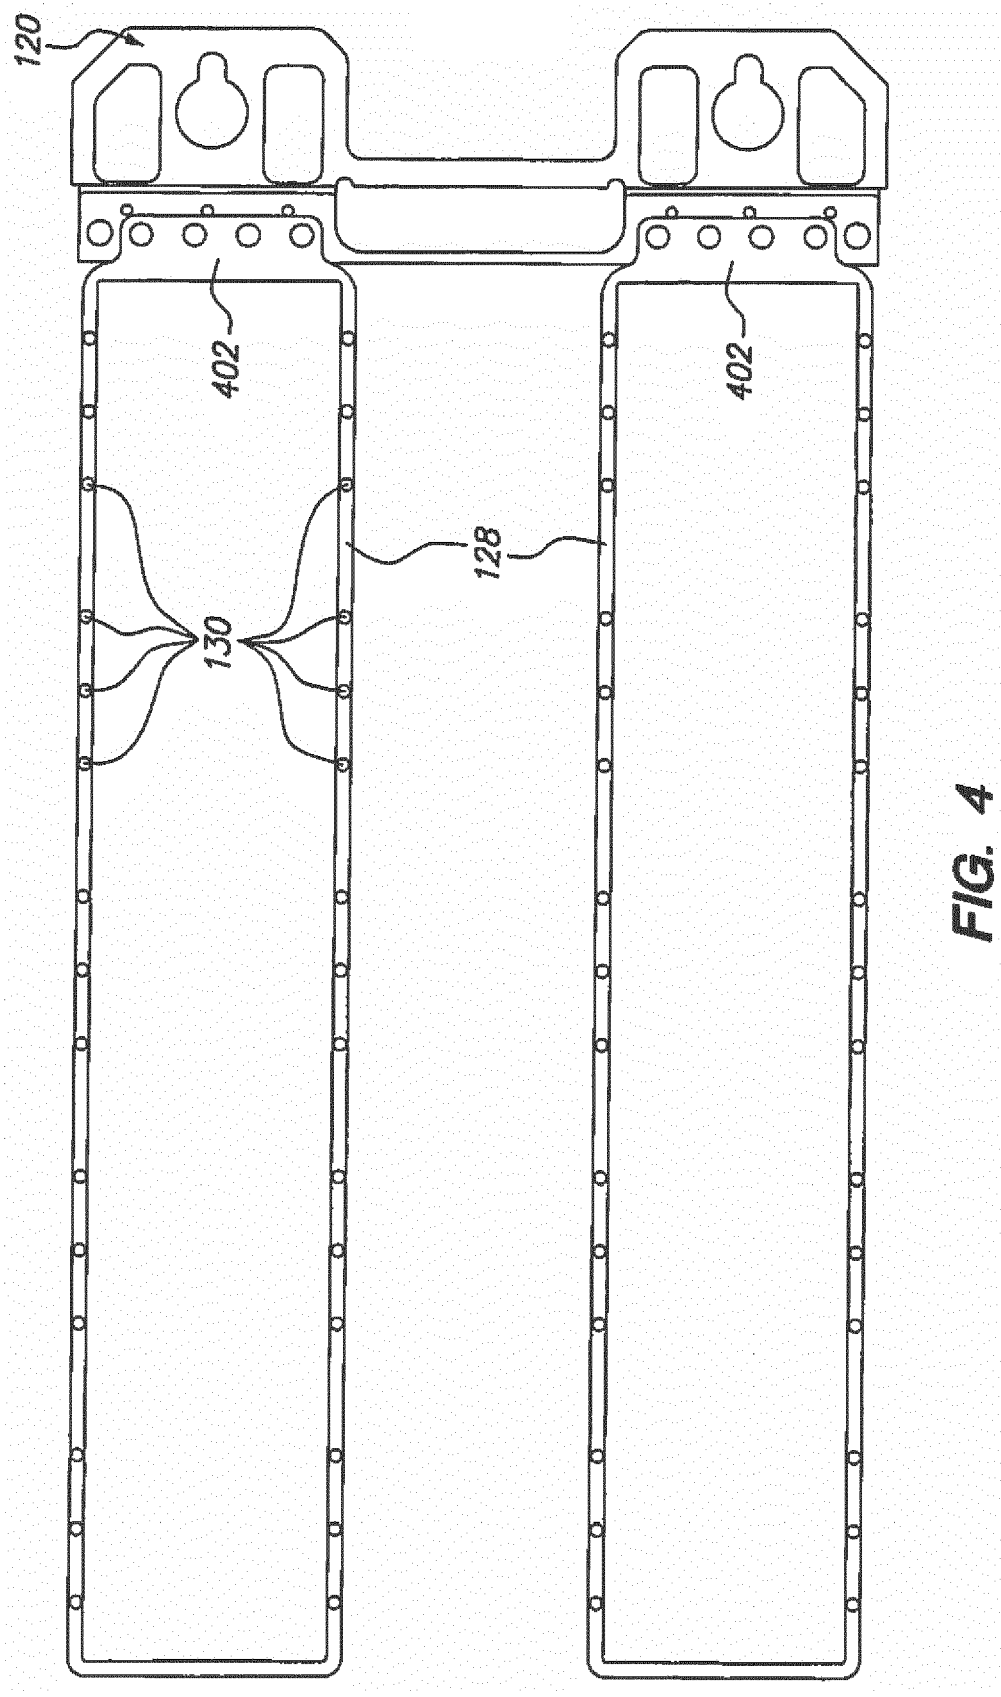
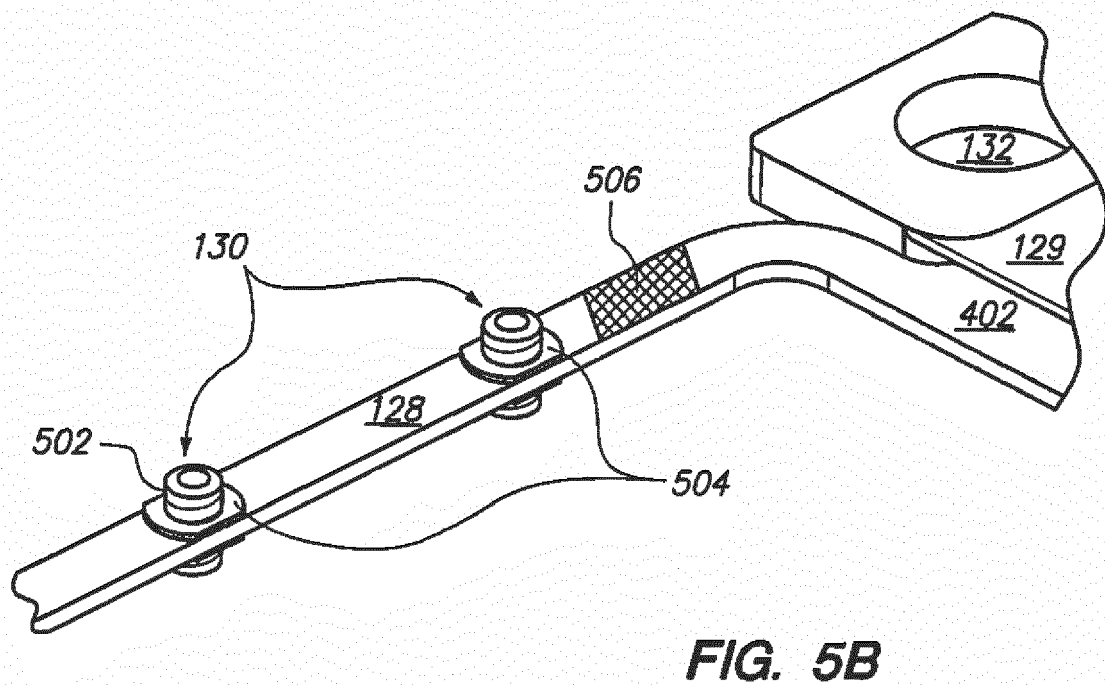
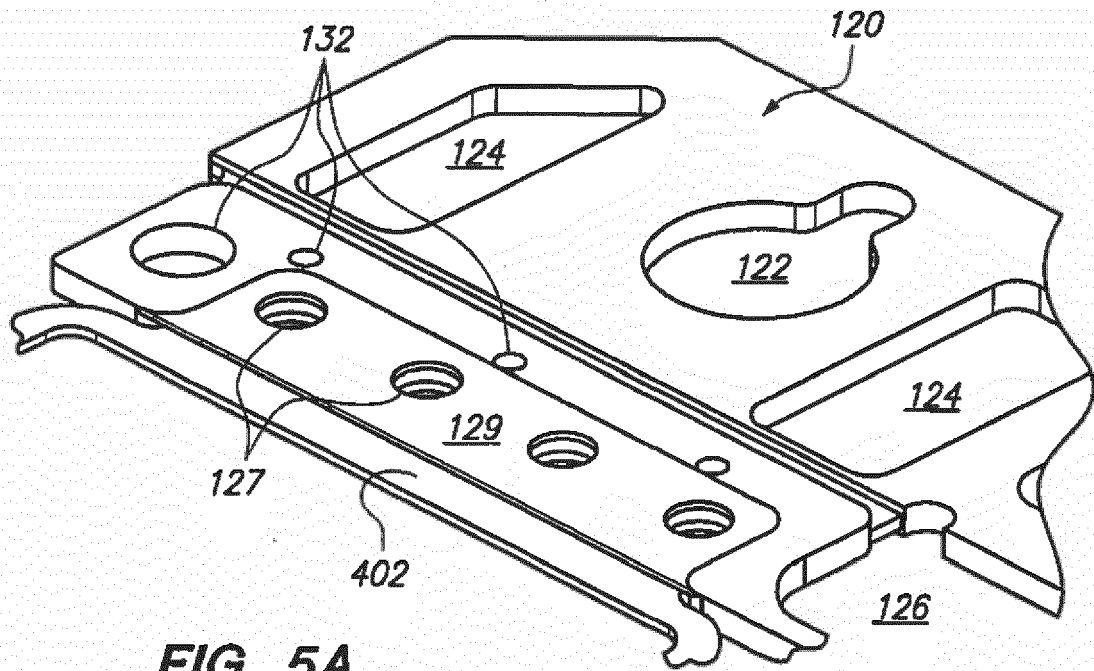
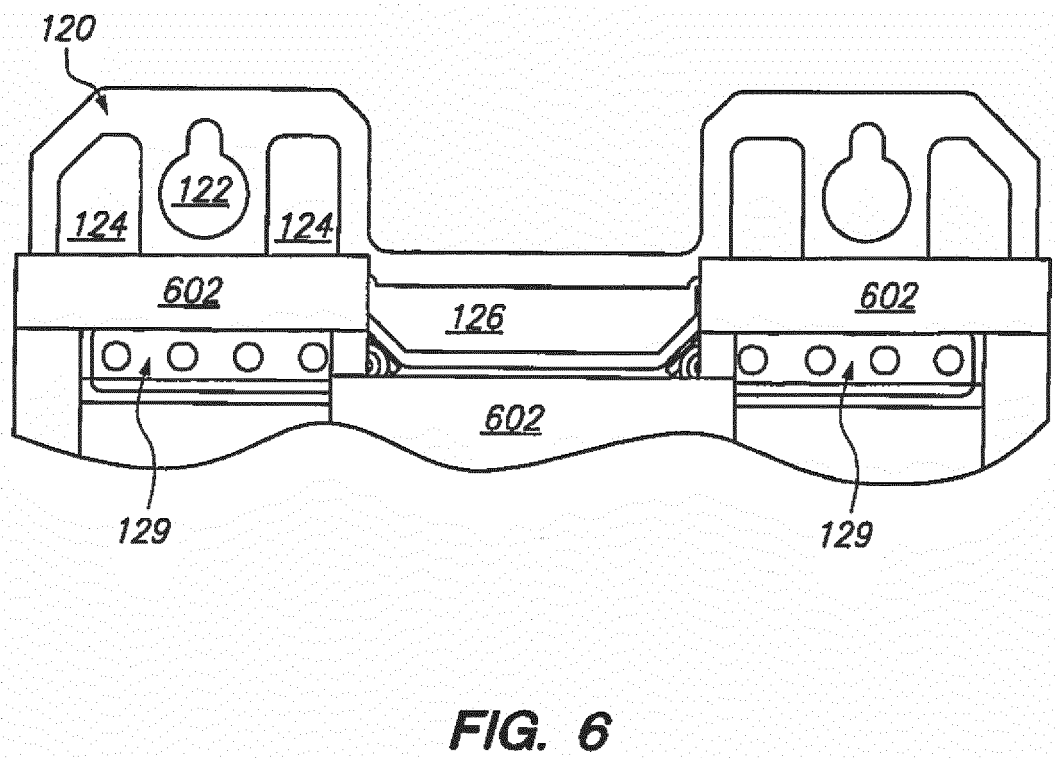


FIG. 4





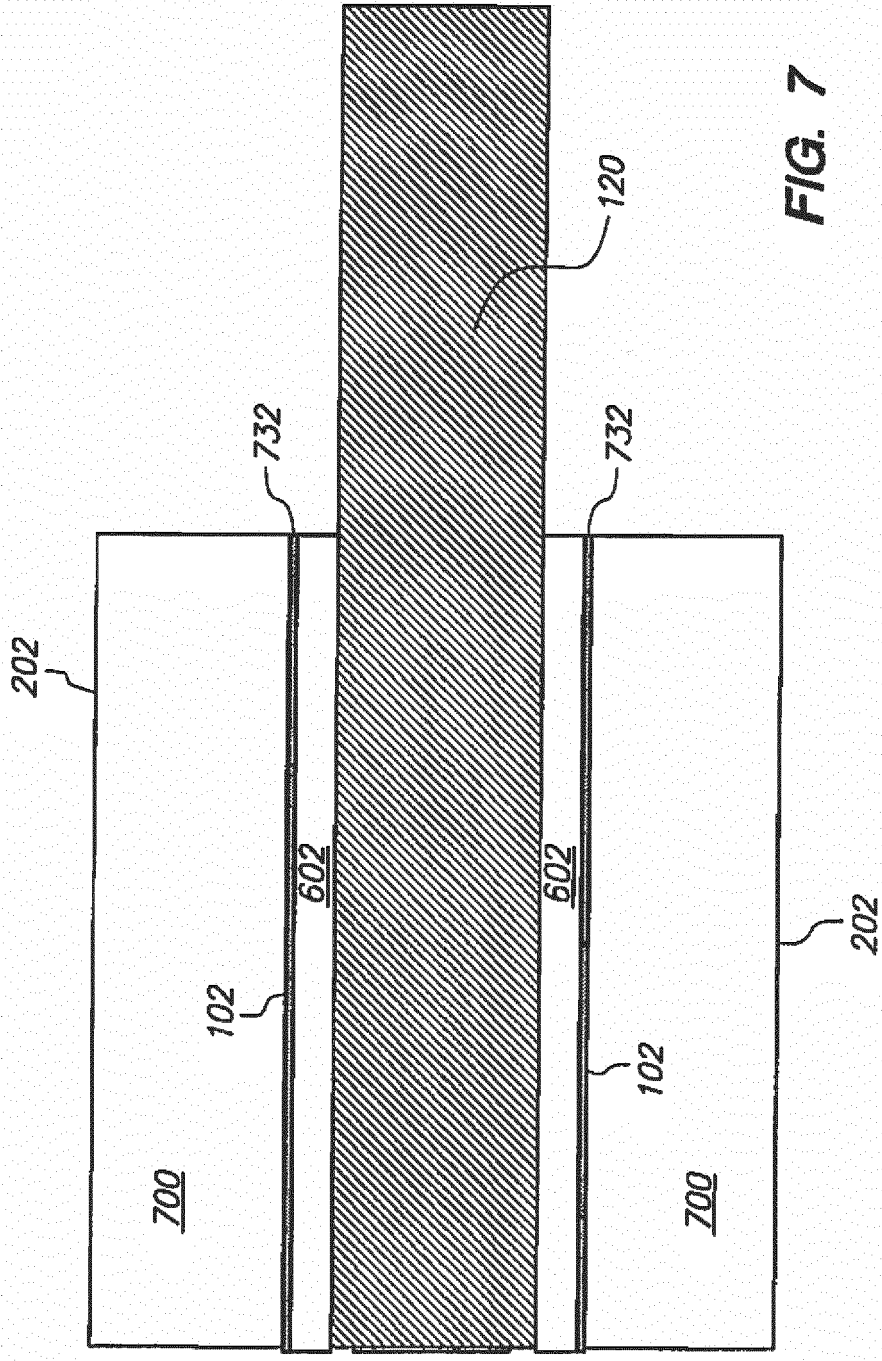


FIG. 7

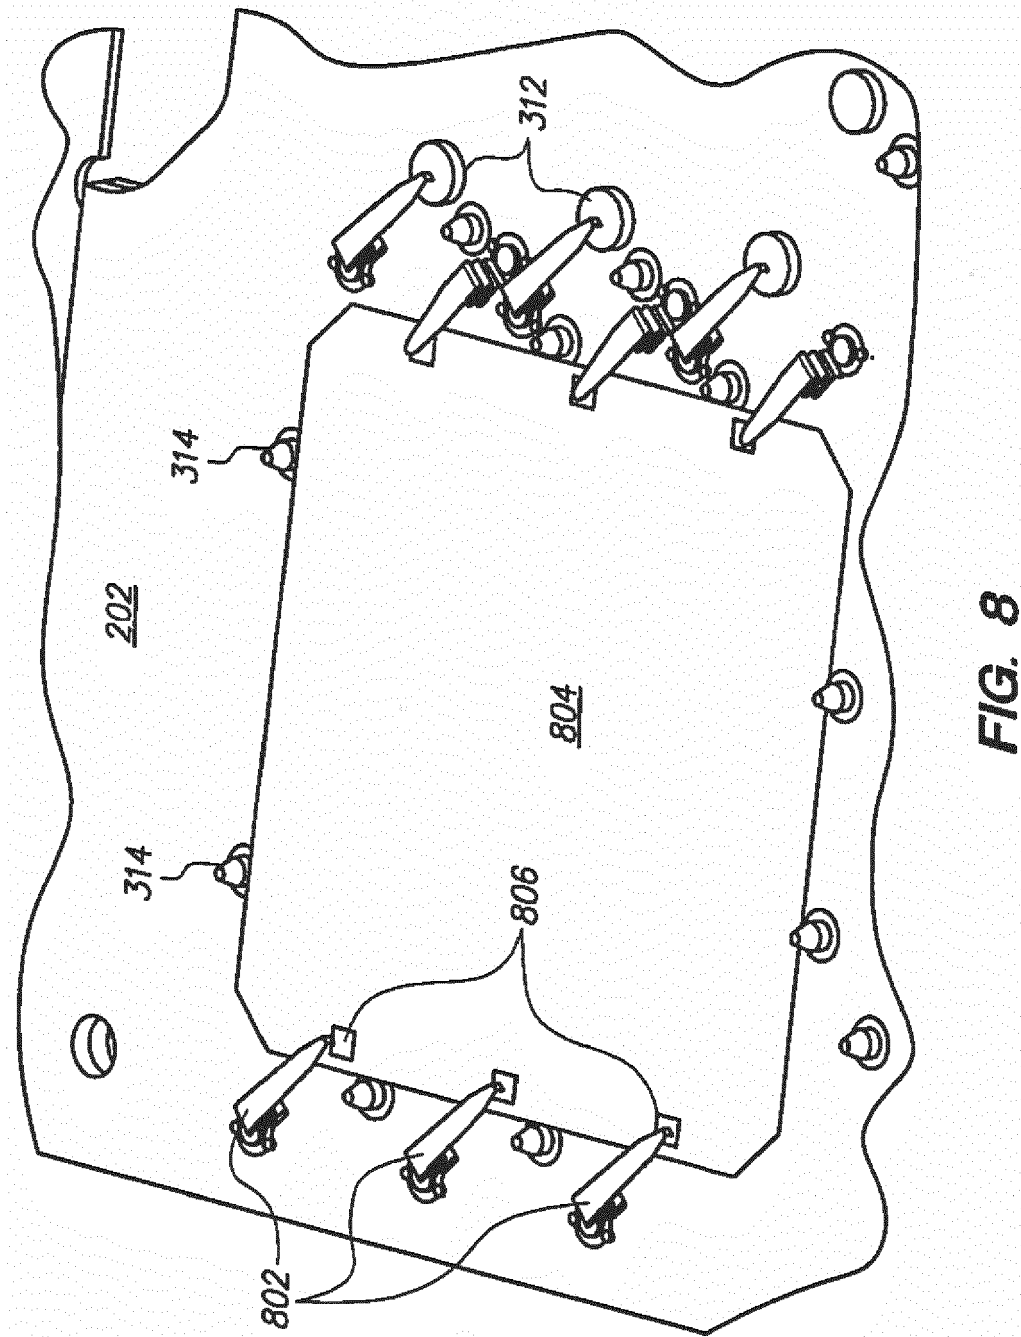


FIG. 8

FIG. 9A

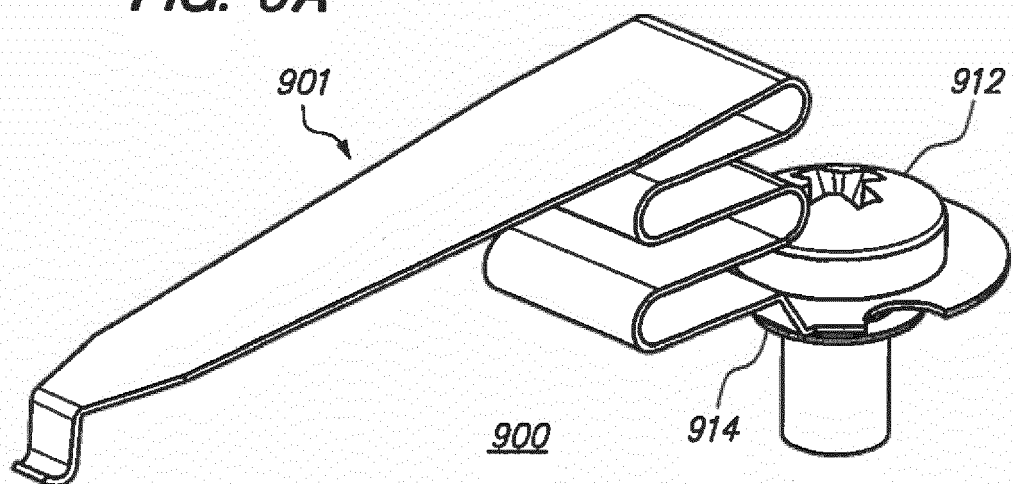


FIG. 9B

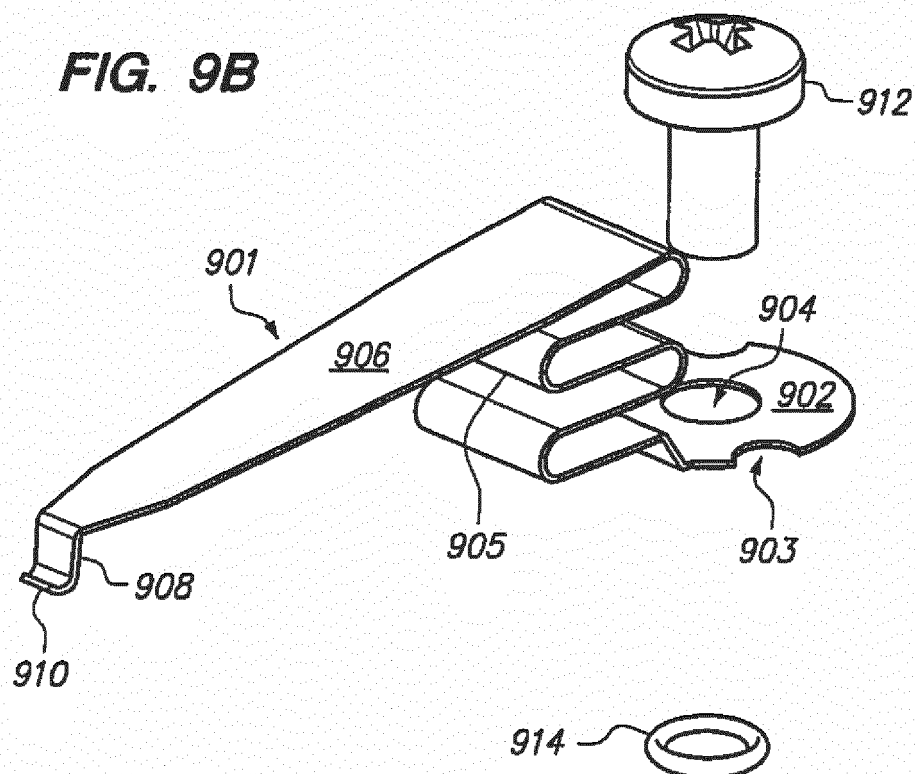


FIG. 10A

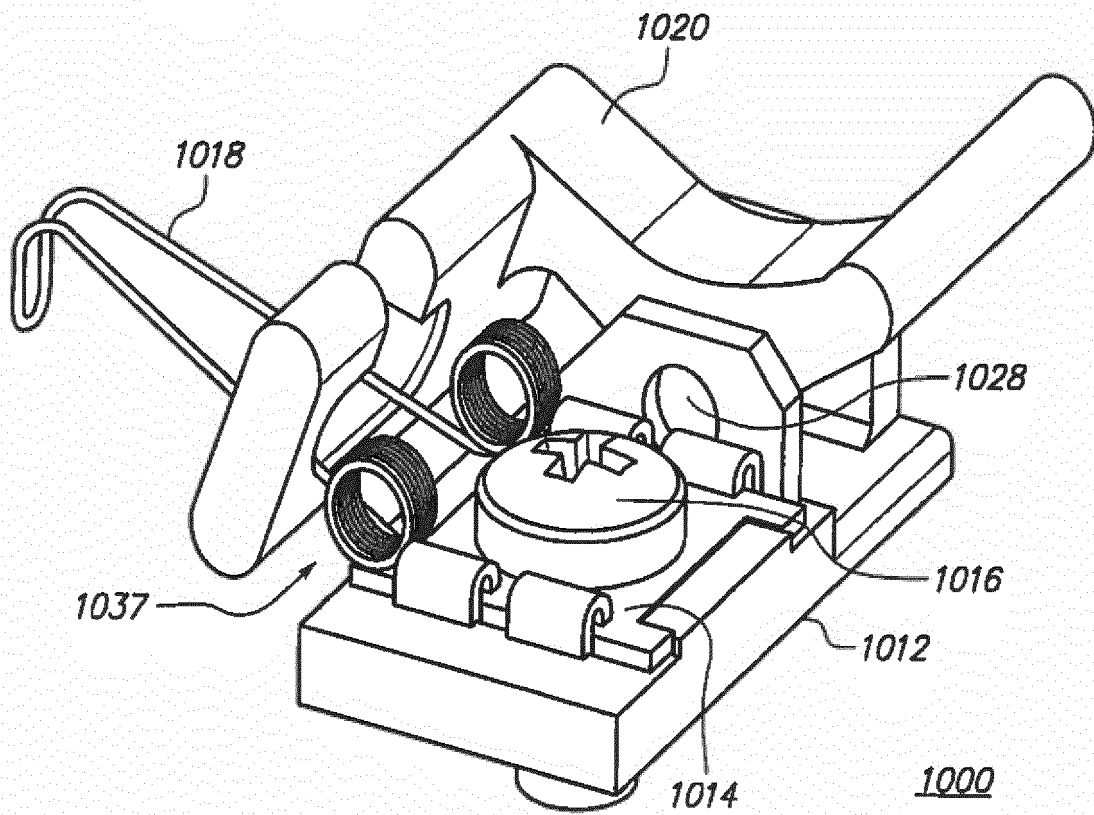
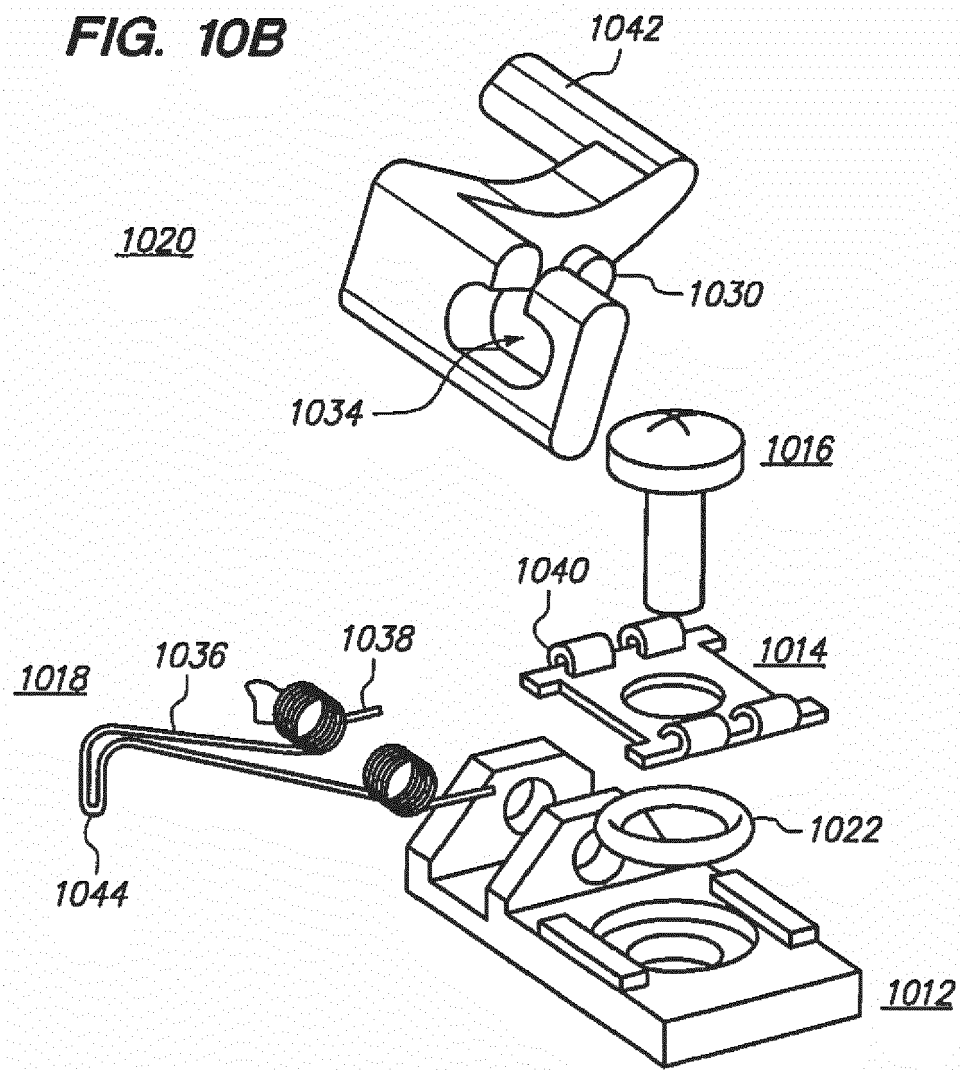
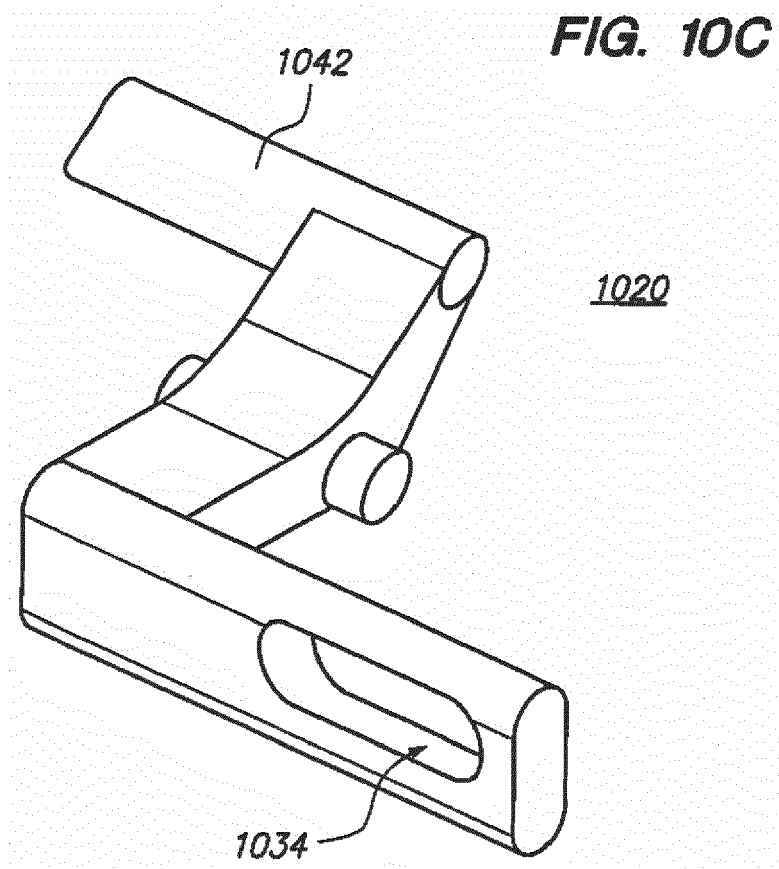


FIG. 10B





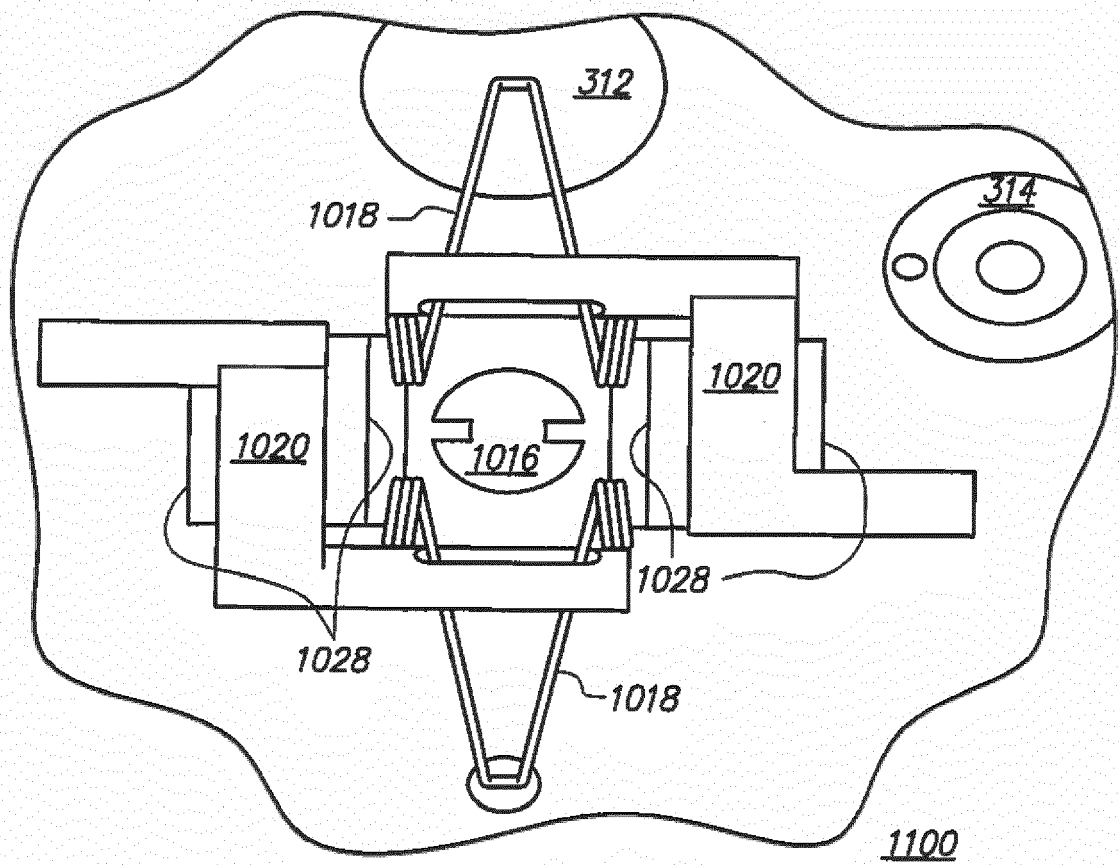
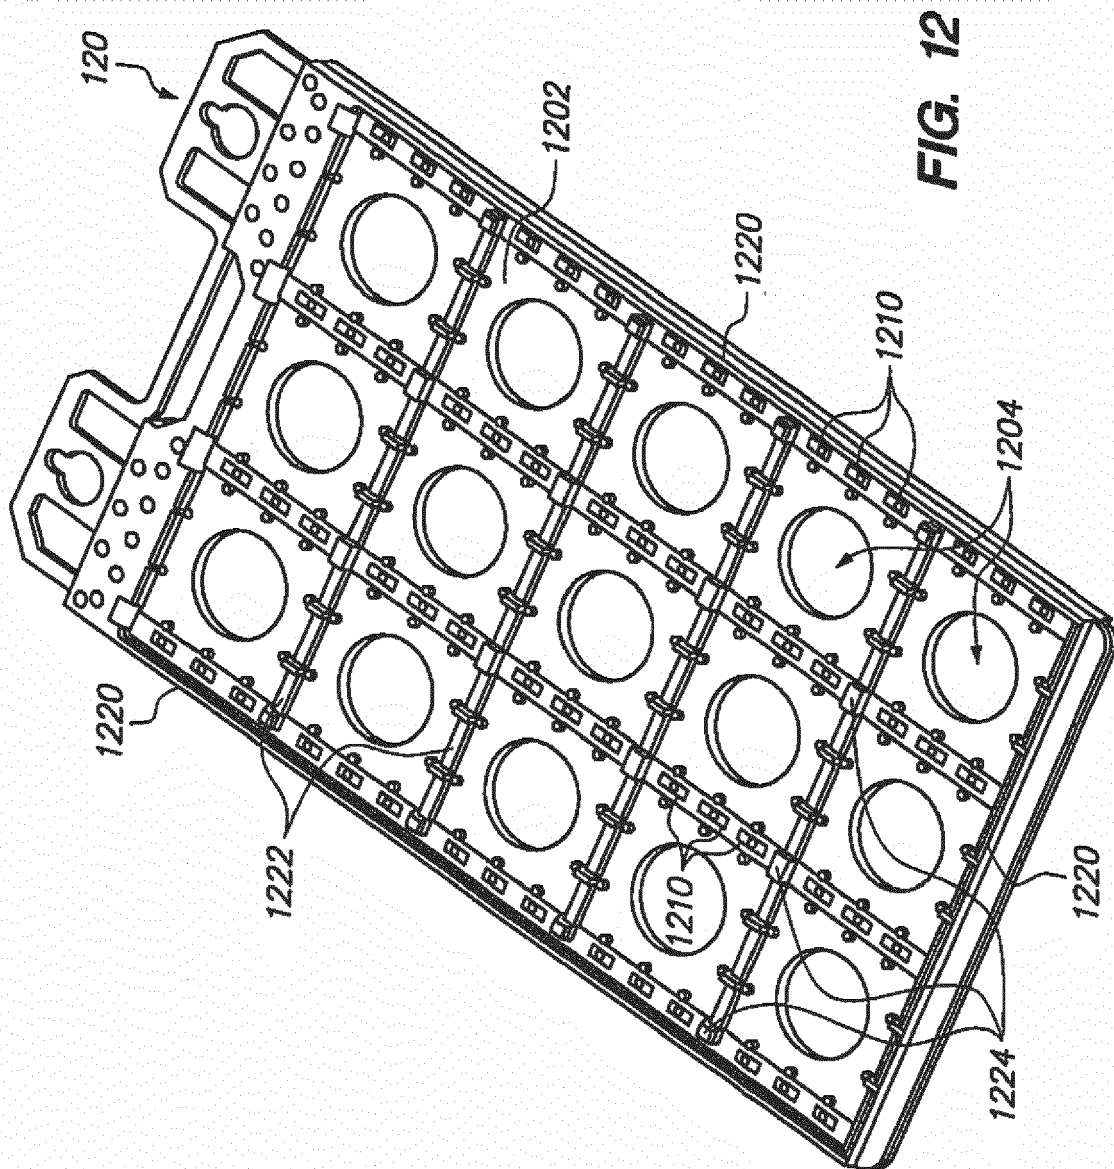


FIG. 11





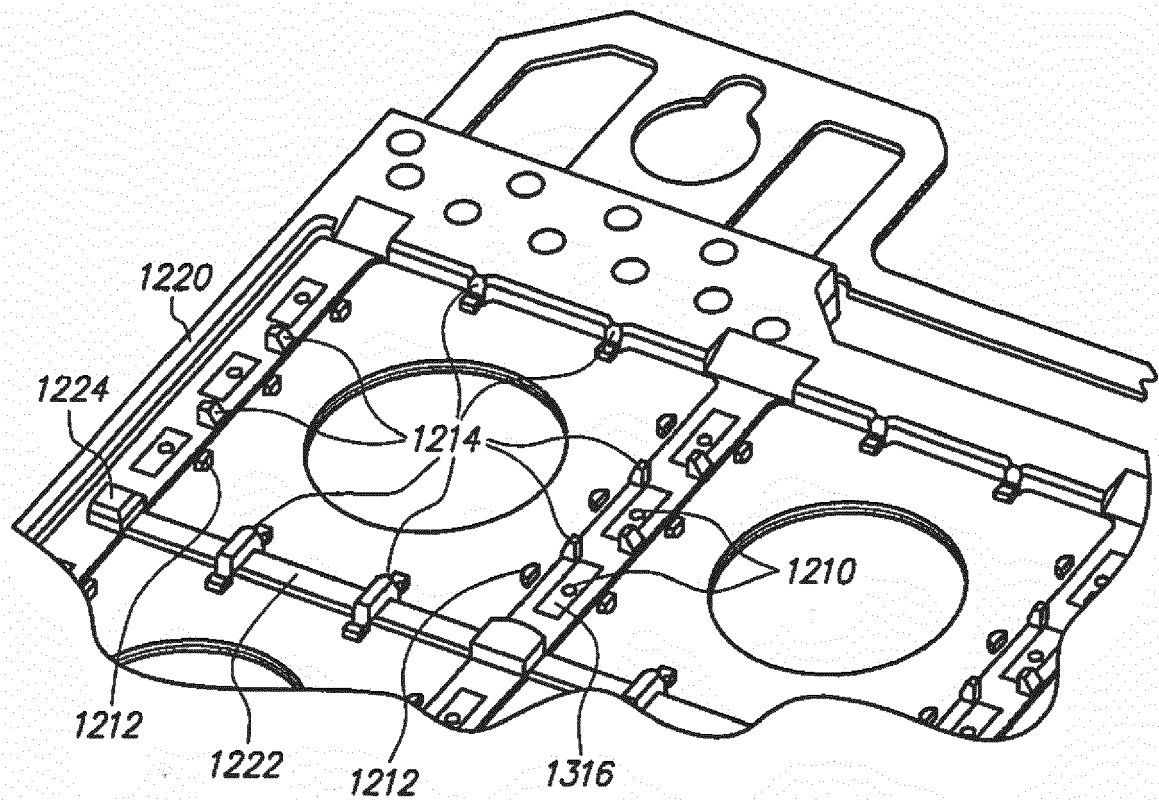


FIG. 13

FIG. 14



**FIG. 15**

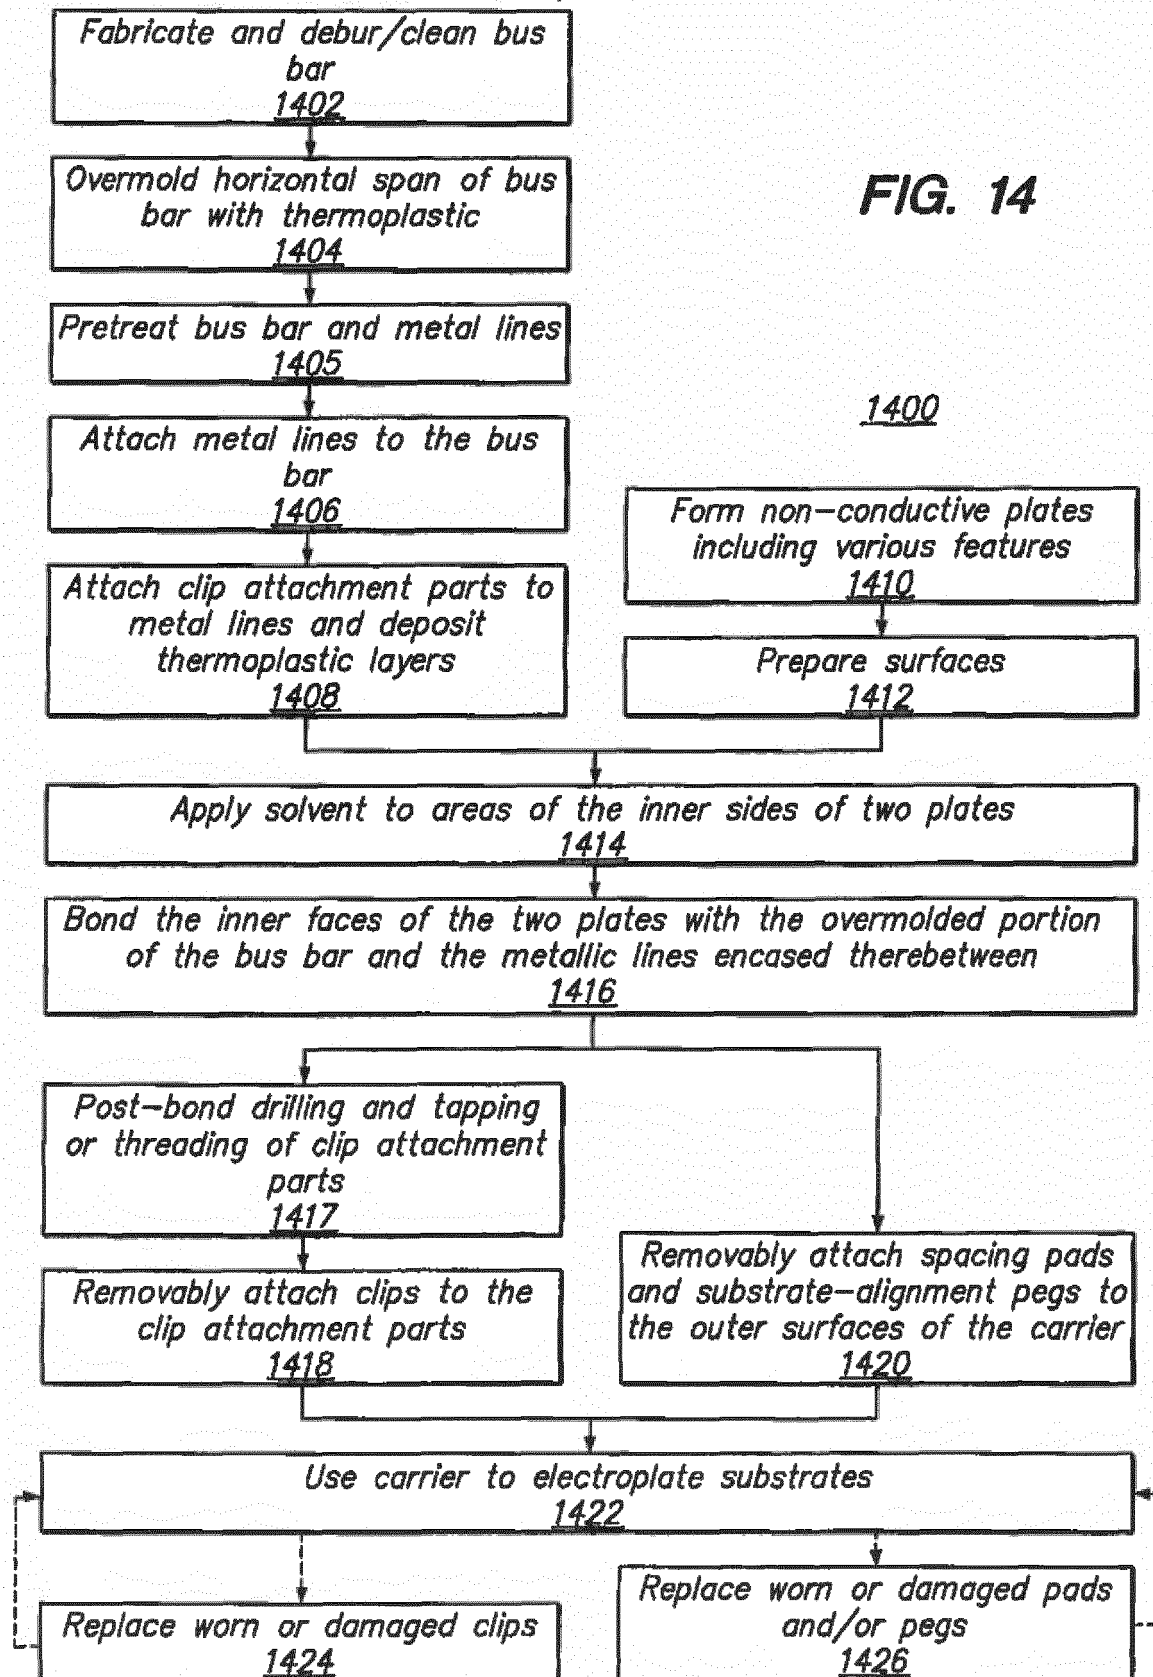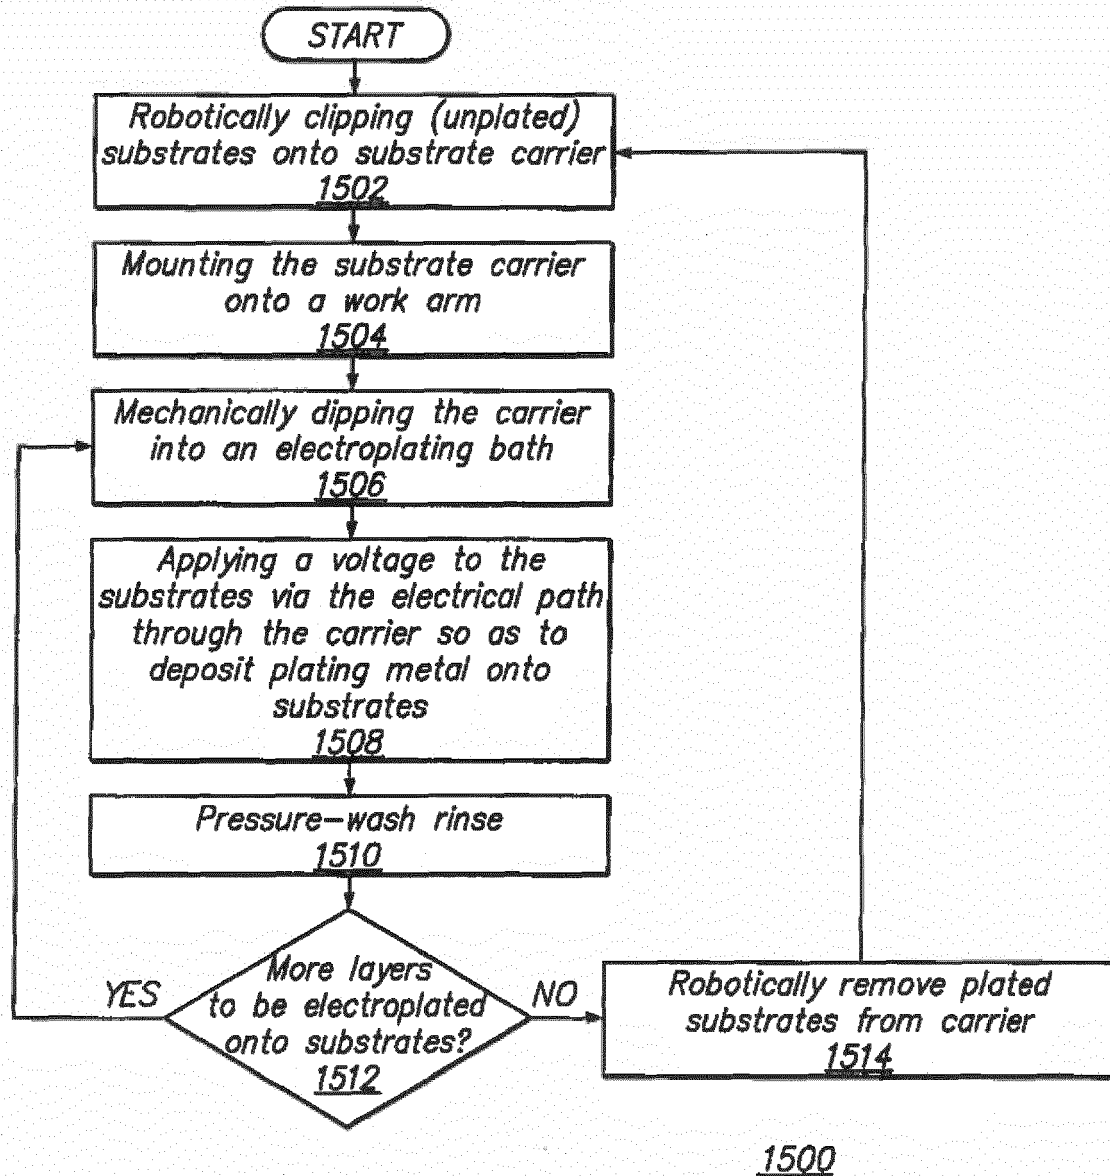

EUROPEAN SEARCH REPORT

 Application Number
 EP 16 19 7330

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2005/061665 A1 (PAVANI LUCA [IT] ET AL) 24 March 2005 (2005-03-24) * paragraphs [0025] - [0027], [0033], [0035] *	1-20	INV. C25D17/00 C25D17/08
A	US 2008/248596 A1 (DAS RABINDRA N [US] ET AL) 9 October 2008 (2008-10-09) * abstract * * claims 1-4 *	1-20	
A	US 2007/151599 A1 (COUSINS PETER J [PH]) 5 July 2007 (2007-07-05) * abstract * * claims 1-18 *	1-20	
A	DE 10 2005 039100 A1 (SCHMID GMBH & CO GEB [DE]) 15 February 2007 (2007-02-15) * abstract * * paragraphs [0024] - [0030] * * claims 1-10 *	1-20	
A	US 5 078 852 A (YEE IAN Y K [US] ET AL) 7 January 1992 (1992-01-07) * abstract * * column 2, lines 29-41 * * column 3, line 30 - column 5, line 28 *	1-20	TECHNICAL FIELDS SEARCHED (IPC) C25D
A	US 4 796 157 A (OSTREM FRED E [US]) 3 January 1989 (1989-01-03) * abstract * * claims 1-10 *	1-20	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 26 January 2017	Examiner Haering, Christian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 19 7330

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-01-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005061665 A1	24-03-2005	US 2005061665 A1	24-03-2005
		WO 2005029540 A2	31-03-2005
US 2008248596 A1	09-10-2008	NONE	
US 2007151599 A1	05-07-2007	NONE	
DE 102005039100 A1	15-02-2007	AT 472000 T	15-07-2010
		AU 2006278145 A1	15-02-2007
		CA 2617502 A1	15-02-2007
		CN 101316952 A	03-12-2008
		DE 102005039100 A1	15-02-2007
		EP 1913179 A1	23-04-2008
		ES 2348148 T3	30-11-2010
		JP 4908509 B2	04-04-2012
		JP 2009504906 A	05-02-2009
		KR 20080034992 A	22-04-2008
		US 2008142358 A1	19-06-2008
		WO 2007017279 A1	15-02-2007
US 5078852 A	07-01-1992	NONE	
US 4796157 A	03-01-1989	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 889228 A [0001]
- US 889232 A [0001]