



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.08.2017 Bulletin 2017/31

(51) Int Cl.:
F25B 13/00 (2006.01) **F25B 49/02** (2006.01)
F25B 49/00 (2006.01) **H01H 35/24** (2006.01)

(21) Application number: **16153414.4**

(22) Date of filing: **29.01.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicants:
• **DAIKIN INDUSTRIES, LIMITED**
Osaka-shi
Osaka 530 (JP)
• **Daikin Europe N.V.**
8400 Oostende (BE)

(72) Inventors:
• **TANIGUCHI, Shinichi**
301 00 Plzen Skvrnany (CZ)
• **Nagayoshi, Katsunori**
Osaka-shi
Osaka 530-8323 (JP)
• **Matsuda, Yoshito**
Osaka-shi
Osaka 530-8323 (JP)
• **Yamada, Tsuyoshi**
Osaka-shi
Osaka 530-8323 (JP)

(74) Representative: **Global IP Europe**
Patentanwaltskanzlei
Pfarrstraße 14
80538 München (DE)

(54) **AIR CONDITIONING SYSTEM**

(57) An air conditioning system (100) comprises a refrigerant circuit (40), and an electrical circuit (50). The refrigerant circuit (40) includes an indoor heat exchanger (22), an outdoor heat exchanger (13), a compressor (11), a refrigerant pipe (171), and a plurality of pressure stats (181, 182). The refrigerant pipe (171) is connected to the compressor (11) and forming at least part of the refrigerant circuit (40). The plurality of pressure stats (181, 182) is configured to detect pressure of the refrigerant in the refrigerant pipe (171). The electrical circuit (50) is configured to drive the refrigerant circuit (40). Each of the plurality of the pressure stats (181, 182) includes a pressure sensor (630, 730) and an electrical switch (640, 740). The pressure sensor (630, 730) is configured to detect pressure of the refrigerant in the refrigerant pipe (171). The electrical switch (640, 740) is configured to stop the electrical circuit (50) from driving the refrigerant circuit (40) at least partially in accordance with the pressure detected by the respective pressure sensor (630, 730). The plurality of the pressure stats (181, 182) is connected to different connection portions (301, 302) of the refrigerant pipe (171), respectively. The connection portions (301, 302) are spaced out from each other.

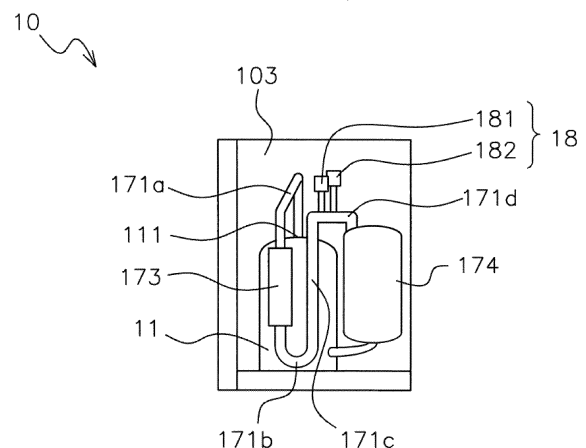


FIG. 8

Description

Technical field

[0001] This invention relates to an air conditioning system with a refrigerant circuit having an indoor heat exchanger, an outdoor heat exchanger, and a compressor.

Background art

[0002] An air conditioner circulates refrigerant in its refrigerant circuit. Such a refrigerant circuit is required to have sufficient stress endurance so that the air conditioner can retain its performance as well as the refrigerant could be prevented from affecting the outside environment in some form due to leakage. The pressure of the refrigerant is preferably observed just after being compressed by the compressor. For this purpose, some air conditioners employ a pressure stat, which is also referred to as an HPS (high pressure switch) unit, in the outdoor unit together with the compressor. The pressure stat is a combinational device of a pressure sensor and an electrical switch. When the pressure sensor detects high pressure over a predetermined threshold, the electrical switch shuts down the electrical circuit that is configured to drive actuators of the refrigerant circuit.

[0003] Clearly it is more desirable in order to restrain leakage that an air conditioner should employ a plurality of pressure stats in case of malfunction and/or breakdown of one of the pressure stats.

Problem to be solved by the invention

[0004] However, the compressor installed in the refrigerant circuit often generates vibration that may induce reciprocating, circular, or other motions of the pressure stats. In combination with such motions, mounting an increased number of pressure stats on a refrigerant pipe may cause heavier damage on the refrigerant pipe. In particular, if the pressure stats have been connected to the same portion of the refrigerant pipe altogether, large stress is likely to be applied to the single connection portion of the refrigerant pipe, which may therefore rupture.

[0005] It is therefore an object of the present invention to provide an air conditioning system which employs a plurality of pressure stats to prevent refrigerant leakage due to an increase of pressure in a more secure manner while maintaining a high stress endurance of the refrigerant circuit at the same time.

Means for solving the problem

[0006] According to the first aspect of the invention, there is provided an air conditioning system comprising a refrigerant circuit, and an electrical circuit. The refrigerant circuit includes an indoor heat exchanger, an outdoor heat exchanger, a compressor, a refrigerant pipe, and a plurality of pressure stats. The refrigerant pipe is

connected to the compressor and forming at least part of the refrigerant circuit. The plurality of pressure stats is configured to detect pressure of the refrigerant in the refrigerant pipe. The electrical circuit is configured to drive the refrigerant circuit. Each of the plurality of the pressure stats includes a pressure sensor and an electrical switch. The pressure sensor is configured to detect pressure of the refrigerant in the refrigerant pipe. The electrical switch is configured to stop the electrical circuit from driving the refrigerant circuit at least partially in accordance with the pressure detected by the respective pressure sensor. The plurality of the pressure stats is connected to different connection portions of the refrigerant pipe, respectively. The connection portions are spaced out from each other.

[0007] With this configuration, the plurality of pressure stats is connected to the different connection portions of the refrigerant pipe in a separated manner. Accordingly, stress caused by vibration of the plurality of the pressure stats is restrained from concentrating on a certain portion of the refrigerant pipe. Thereby the refrigerant pipe is less likely to be damaged due to vibration of the compressor and the induced motions of the plurality of the pressure stats. In addition, the pressure of the refrigerant is detected in a more secured manner by the plurality of pressure stats.

[0008] Preferably, the electrical switches of the plurality of the pressure stats are electrically connected in series. Shutdown of the electrical circuit can be achieved by operation of either one of the plurality of electrical switches.

[0009] Preferably, the air conditioning system has an outdoor unit that accommodates the outdoor heat exchanger, the compressor, the refrigerant pipe, and the plurality of the pressure stats.

[0010] According to a preferred embodiment of the air conditioning system mentioned above, the refrigerant pipe includes a first pipe having a first diameter and a second pipe having a second diameter larger than the first diameter. The first pipe is connected to the compressor. The second pipe is connected to the first pipe. At least one of the connection portions is located at the second pipe.

[0011] With this configuration, at least one of the connection portions is located at the second pipe. Preferably, all connection portions are located at the second pipe. Accordingly, the connection portion is arranged in a region with high stress endurance. Preferably, at least the second pipe has a diameter of 3/8 inch or more.

[0012] According to another preferred embodiment of any one of the air conditioning systems mentioned above, the air conditioning system further comprises a reinforcement joint mounted on the refrigerant pipe, wherein the reinforcement joint is located at at least one of the connection portions.

[0013] With this configuration, the reinforcement joint is located at at least one of the connection portions arranged at the refrigerant pipe. Preferably, the reinforcement joint has at least one branching portion at the po-

sition corresponding to one of the connection portions so as to be connected with one of the pressure stats. Accordingly, the one of the connection portions shows stress endurance due to the reinforcement joint.

[0014] The reinforcement joint is preferably arranged around a hole formed on the outer surface of the refrigerant pipe. The branching portion of the reinforcement joint is positioned at the hole of the refrigerant pipe. Further preferably, the reinforcement joint has two branching portions which are positioned at the holes formed on the outer surface of the refrigerant pipe.

[0015] According to another preferred embodiment of any one of the air conditioning systems mentioned above, each of the plurality of the pressure stats has a body and a connection pipe. Each body accommodating a pressure sensor. The connection pipe connecting the body with respective one of the connection portions.

[0016] With this configuration, with regard to each of the plurality of the pressure stats, the connection pipe keeps a certain distance between the connection portion and the pressure sensor. Accordingly, in the process of brazing, in which the molten metal is applied to the tip of the connection pipe in order to mount the connection pipe on the refrigerant pipe, excessive heat is restrained from being conducted from the molten metal to the pressure sensor, lowering the risk of damaging the pressure sensor.

[0017] According to a further preferred embodiment of the air conditioning system having the pressure stats with a body and a connection pipe, a hole is formed at each connection portion of the refrigerant pipe. Each of the connection pipes is connected to the refrigerant pipe via respective one of the holes.

[0018] With this configuration, each of the plurality of the pressure stats can be mounted on the refrigerant pipe by inserting the connection pipe into the hole. Accordingly, the air conditioning system, or the outdoor unit in many cases, can be easily manufactured. Preferably, at least one of the holes is provided with a burring formed on the refrigerant pipe so as to surround the hole.

[0019] According to an even further preferred embodiment of the air conditioning system having the refrigerant pipe with a hole, the holes are spaced out from each other by an interval more than 0.4 times as a length of the connection pipe.

[0020] With this configuration, adjacent pressure stats are spaced away from each other by a sufficiently long distance. Accordingly, even if the vibration of the compressor shakes the pressure stats, they are restrained from colliding with each other into breakdown.

[0021] According to another preferred embodiment of any one of the air conditioning systems mentioned above, the refrigerant pipe has a laterally extending portion, and at least one of the connection portions is located at the laterally extending portion.

[0022] With this configuration, at least one of the connection pipes can be oriented vertically in connection with the laterally extending portion of the refrigerant pipe. Ac-

cordingly, the laterally extending portion receives less stress from the pressure stats due to the gravitational force.

[0023] According to another further preferred embodiment of the air conditioning system having the laterally extending portion of the refrigerant pipe, the laterally extending portion inclines at an inclination angle less than ± 10 degree with regard to a horizontal plane.

[0024] With this configuration, the laterally extending portion is arranged to extend along a substantially horizontal plane. This arrangement enables the connection pipes to be oriented substantially vertically in connection with the laterally extending portion of the refrigerant pipe. Accordingly, the laterally extending portion receives less stress from the pressure sensors due to the gravitational force.

[0025] According to another preferred embodiment of any one of the air conditioning systems mentioned above, the plurality of pressure stats is fixed to each other at least partially.

[0026] With this configuration, the pressure stats move together when they receive vibration from the compressor. Accordingly, the pressure stats are restrained from colliding with each other into breakdown.

[0027] According to a further preferred embodiment of the air conditioning system where the pressure stats are fixed at least partially, each of the plurality of the pressure stats has a body and a connection pipe. Each body accommodates a pressure sensor. The connection pipe connects the body with respective one of the connection portions. The bodies of the plurality of pressure stats are fixed to each other.

[0028] With this configuration, the pressure stats are fixed to each other at their bodies. An example of a fixing means to fixing the bodies is a banding band to fasten the bodies altogether. Alternatively, some kind of deformable and/or sticky material may be used as such a fixing means. Accordingly, the bodies are stably fixed. Preferably, the connection pipes of each of the plurality of pressure stats are individually connected to respective connection portion of the refrigerant pipe.

[0029] According to another further preferred embodiment of the air conditioning system where the pressure stats are fixed at least partially, each of the plurality of the pressure stats has a body and a connection pipe. Each body accommodates a pressure sensor. The connection pipe connects the body with respective one of the connection portions. The bodies of the plurality of pressure stats are integrally formed.

[0030] With this configuration, the bodies of the pressure stats are integrally formed as one piece having a plurality of pressure sensors. This formation may be performed by integral molding, for example. Accordingly, the pressure stats are firmly fixed and are easier to be mounted on the refrigerant pipe. Preferably, the integrally formed bodies have two or more connection pipes which are individually connected to respective connection portions of the refrigerant pipe.

[0031] According to another preferred embodiment of any one of the air conditioning systems mentioned above, the outdoor unit includes two pressure stats.

[0032] With this configuration, the number of the pressure stats is two. Accordingly, refrigerant leakage due to an increase of pressure is restrained at low cost and in a more secure manner.

[0033] According to another preferred embodiment of any one of the air conditioning systems mentioned above, wherein the refrigerant is flammable.

[0034] With this configuration, the refrigerant used in the refrigerant circuit is flammable. An example of such a flammable refrigerant is R32. Such a flammable refrigerant is preferably used for the above-mentioned air conditioning system which reduces the risk of refrigerant leakage.

Brief description of the drawings

[0035]

Fig. 1 is a schematic diagram of the refrigerant circuit 40 of the air conditioning system 100 according to the first embodiment of the present invention.

Fig. 2 is a schematic diagram of the electrical circuit 50 of the air conditioning system 100.

Fig. 3 is a schematic diagram of the structure of the pressure-related operation unit 18.

Fig. 4 is a schematic diagram of the structure of the pressure-related operation unit 18.

Fig. 5 is a schematic diagram of the structure of the first pressure stat 181.

Fig. 6 is a schematic diagram of the structure of the second pressure stat 182.

Fig. 7 is a top view of the refrigerant circuit 40 in the outdoor unit 10.

Fig. 8 is a side view of the refrigerant circuit 40 in the outdoor unit 10.

Fig. 9A is a cross-sectional view of the pressure-related operation unit 18 of the air conditioning system 100 according to the second embodiment of the present invention.

Figs. 9B-9D are cross-sectional views of the pressure-related operation unit 18 of the air conditioning system 100 according to first, second, and third variations of the second embodiment of the present invention, respectively.

Figs. 10A-10C are the schematic views the pressure-related operation unit 18 of the air conditioning system 100 according to the third embodiment, a first variation thereof, and a second variation thereof of the present invention, respectively.

Detailed description of preferred embodiments of the invention

<First Embodiment>

(1) Overall configuration

[0036] Fig. 1 is a schematic diagram of the air conditioning system 100 according to the first embodiment of the present invention. The air conditioning system 100 serves to cool the room air in the cooling mode whereas heat the room air in the heating mode. The air conditioning system 100 has a refrigerant circuit 40, which circulates refrigerant to perform refrigerant cycles. The refrigerant circuit 40, includes an outdoor unit 10, a first indoor unit 20a to a fifth indoor unit 20e, and a group of refrigerant transportation pipes 30, each of which connects the outdoor unit 10 and the respective one of the plurality of indoor units, i.e. the first indoor unit 20a to the fifth indoor unit 20e. Moreover, the air conditioning system 100 has an electrical circuit 50, which will be discussed with reference to Fig. 2 later.

[0037] The refrigerant is R32 refrigerant, for example, which is flammable to some extent.

(2) Detailed configuration

(2-1) Outdoor unit 10

[0038] The outdoor unit 10 shown in Fig. 1 is configured to be installed outside of the room or building and serves as a heat source, which is specifically a cold heat source in the cooling mode or a hot heat source in the heating mode.

[0039] The outdoor unit 10 includes a compressor 11, a four way valve 12, an outdoor heat exchanger 13, an outdoor fan 14, and a first outdoor expansion valve 15a to a fifth outdoor expansion valve 15e, as major components of the refrigerant circuit 40. The outdoor unit 10 further includes an outdoor heat exchanger temperature sensor 16, a refrigerant discharge pipe 171, a refrigerant suction pipe 172, a pressure-related operation unit 18, and an outdoor air temperature sensor 19.

(2-1-1) Compressor 11

[0040] The compressor 11 has a discharge port 111 and a suction port 112. The compressor 11 suctions gas-state refrigerant from the suction port 112 through the refrigerant suction pipe 172, compresses the gas-state refrigerant, and discharges it from the discharge port 111 through a refrigerant discharge pipe 171, along the arrow shown in Fig. 1.

(2-1-2) Four way valve 12

[0041] The four way valve 12 serves to change the connection of the refrigerant circuit 40 to switch the air

conditioning system 100 from the cooling mode to the heating mode, or conversely. The four way valve 12 makes the connection depicted as solid lines in Fig. 1 for the cooling mode whereas it produces the connection depicted as dashed lines for the heating mode.

(2-1-3) Outdoor heat exchanger 13

[0042] The outdoor heat exchanger 13 performs heat exchange between the refrigerant and the surrounding air. The outdoor heat exchanger 13 functions as a condenser in the cooling mode whereas it acts as an evaporator in the heating mode.

(2-1-4) Outdoor fan 14

[0043] The outdoor fan 14 facilitates the heat exchange by causing the surrounding air to contact the outdoor heat exchanger 13.

(2-1-5) First outdoor expansion valve 15a to fifth outdoor expansion valve 15e

[0044] The plurality of outdoor expansion values, i.e. the first outdoor expansion valve 15a to the fifth outdoor expansion valve 15e, correspond to the plurality of indoor units, i.e. the first indoor unit 20a to the fifth indoor unit 20e, respectively. All of the first outdoor expansion valve 15a to the fifth outdoor expansion valve 15e serve to decompress the refrigerant. The degree of the decompression is adjusted by controlling the actuator that is configured to change the opening degree of the outdoor expansion valve.

(2-1-6) Refrigerant discharge pipe 171

[0045] The refrigerant discharge pipe 171 is connected to the discharge port 111 of the compressor 11 and serves to guide the compressed refrigerant that is discharged out of the compressor 11 toward the four way valve 12. The refrigerant discharge pipe 171 may include a muffler 173 to reduce the noise caused by the fluctuation of the refrigerant flow although the muffler 173 is not essential.

(2-1-7) Refrigerant suction pipe 172

[0046] The refrigerant suction pipe 172 is connected to the suction port 112 of the compressor 11 and serves to guide the refrigerant from the four way valve 12 to enter the compressor 11. The refrigerant suction pipe 172 may include an accumulator 174, which can abstract and store some liquid-state refrigerant contained in the flowing gas-state refrigerant in order to restrain the compressor 11 from being damaged.

(2-1-8) Pressure-related operation unit 18

[0047] The pressure-related operation unit 18 serves to restrain the refrigerant from leaking out of the refrigerant circuit 40. As shown in Fig. 1, the pressure-related operation unit 18 is mounted on the refrigerant discharge pipe 171. The detailed configuration of the pressure-related operation unit 18 will be discussed later.

(2-1-9) Temperature sensors

[0048] The outdoor heat exchanger temperature sensor 16 serves to monitor the temperature of the refrigerant flowing through the outdoor heat exchanger 13. The outdoor air temperature sensor 19 serves to detect the temperature of the atmosphere outside the room or building.

(2-2) First indoor unit 20a to fifth indoor unit 20e

[0049] Fig. 1 shows five indoor units, i.e. the first indoor unit 20a to the fifth indoor unit 20e. The first indoor unit 20a to the fifth indoor unit 20e serve to provide temperature-adjusted air for users in corporation with the outdoor unit 10. The five indoor units are typically installed inside of different rooms. Alternatively, at least part of the five indoor units may be installed inside of the same room. It is clear that the number of the indoor units may be other than five, meaning one or two, for example.

[0050] Hereinafter, only the first indoor unit 20a will be discussed, and the explanation will be omitted with regard to the remaining indoor units 20b to 20e, each of which has a substantially similar structure to that of the first indoor unit 20a.

[0051] The first indoor unit 20a includes an indoor heat exchanger 22, an indoor fan 23, an indoor heat exchanger temperature sensor 26, and an indoor air temperature sensor 29.

(2-2-1) Indoor heat exchanger 22

[0052] The indoor heat exchanger 22 performs heat exchange between the refrigerant and the room air. The indoor heat exchanger 22 functions as an evaporator in the cooling mode whereas it acts as a condenser in the heating mode.

(2-2-2) Indoor fan 23

[0053] The indoor fan 23 facilitates the heat exchange by making the room air contact the indoor heat exchanger 22.

(2-2-3) Temperature sensors

[0054] The indoor heat exchanger temperature sensor 26 serves to monitor the temperature of the refrigerant flowing through the indoor heat exchanger 22. The indoor air temperature sensor 29 serves to detect the temper-

ature of the air inside the room.

(2-3) Refrigerant transportation pipes 30

[0055] The group of refrigerant transportation pipes 30 has a plurality of liquid-state refrigerant transportation pipes 31 a to 31e and a plurality of gas-state refrigerant transportation pipes 32a to 32e. Each of the liquid-state refrigerant transportation pipes 31 a to 31e connects the outdoor unit 10 with the respective one of the plurality of indoor units, i.e. the first indoor unit 20a to the fifth indoor unit 20e, to allow passage of the refrigerant in a liquid-state or a gas-liquid two-phase state. Each of the gas-state refrigerant transportation pipes 32a to 32e connects the outdoor unit 10 with the respective one of the indoor units to allow passage of the refrigerant in a gas-state.

(2-4) Electrical circuit 50

[0056] The electrical circuit 50 shown in Fig. 2 drives and controls a variety of actuators that are employed in the refrigerant circuit 40. Specifically, the electrical circuit 50 controls the rotational speed of the motor of the compressor 11, the connection of the four way valve 12, the rotational speed of the motor of the outdoor fan 14, the opening degrees of the first outdoor expansion valve 15a to the fifth outdoor expansion valve 15e, as well as the rotational speed of the motor of the indoor fan 23 for each of the first indoor unit 20a to the fifth indoor unit 20e.

[0057] The electrical circuit 50 also detects the state of the electrical switches 630, 730 of the pressure-related operation unit 18, which are connected in series. If the open-circuit state occurs between the terminal SW+ and the terminal SW-, which means both ends of the serially connected electrical switches, at least part of the electrical circuit 50 shuts down, stopping supply of the power to the actuators.

[0058] In addition, the electrical circuit 50 monitors the outdoor heat exchanger temperature sensor 16 and the outdoor air temperature sensor 19 of the outdoor unit 10, as well as the indoor heat exchanger temperature sensor 26 and the indoor air temperature sensor 29 for each of the first indoor unit 20a to the fifth indoor unit 20e, to properly control the air temperature in each of the rooms.

[0059] The electrical circuit 50 may be located entirely in any one of the outdoor unit 10 and the first indoor unit 20a to the fifth indoor unit 20e. Alternatively, the electrical circuit 50 may be divided into at least part of the outdoor unit 10 and the first indoor unit 20a to the fifth indoor unit 20e.

(3) Detailed configuration of pressure-related operation unit 18

(3-1) General configuration

[0060] As shown in Fig. 3, the pressure-related operation unit 18 includes a first pressure stat 181 and a sec-

ond pressure stat 182, which are mounted on the refrigerant discharge pipe 171 at the first connection portion 301 and the second connection portion 302, respectively.

[0061] The first connection portion 301 includes a first hole 311 formed on the refrigerant discharge pipe 171 and a first burr portion 312 surrounding the first hole 311. Similarly, the second connection portion 302 includes a second hole 321 formed on the refrigerant discharge pipe 171 and a second burr portion 322 surrounding the second hole 321.

[0062] The first pressure stat 181 and a second pressure stat 182 are mounted onto the refrigerant discharge pipe 171 by inserting the connection pipe 610 of the first pressure stat 181 into the first hole 311 as well as inserting the connection pipe 710 of the second pressure stat 182 into the second hole 321. Additional brazing may be performed to secure the mounting by applying the molten metal to the first connection portion 301 and the second connection portion 302.

[0063] Fig. 4 shows the state after the mounting of the first pressure stat 181 and the second pressure stat 182 onto the refrigerant discharge pipe 171 is completed. In this figure, the metal material used in the brazing process is omitted.

(3-2) First pressure stat 181

[0064] Fig. 5 shows the structure of the first pressure stat 181. The first pressure stat 181 includes a connection pipe 610 and a body 620. The body 620 includes a pressure sensor 630 and an electrical switch 640. The pressure sensor 630 includes a sensing chamber 631, a membrane member 632, and a transmission rod 633. The electrical switch 640 includes a first terminal 641 that is connected to a movable conductor 642 with a first contact 643, and a second terminal 644 with a second contact 645.

[0065] The connection pipe 610 serves to guide the refrigerant from the refrigerant discharge pipe 171 to the body 620 so that the pressure sensor 630 can detect the pressure of the refrigerant. While the pressure of the refrigerant filling the sensing chamber 631 is lower than the threshold specifically designed for the first pressure stat 181, the first contact 643 and the second contact 645 keep in contact with each other, making electrical connection between the first terminal 641 and the second terminal 644, that is, the ON-state, or the close-circuit state, of the electrical switch 640. Here, the threshold is 4.0 MPa with a tolerance ranging from the lower limit -0.15 MPa to the upper limit +0.0 MPa, for example. In other words, the actual value of the threshold of the first pressure stat 181 can be within the range from 3.85 MPa to 4.0 MPa.

[0066] When the pressure of the refrigerant filling the sensing chamber 631 exceeds the threshold, the membrane member 632 deforms and push the transmission rod 633 and hence the movable conductor 642, leading to electrical disconnection of the first terminal 641 from

the second terminal 644, that is, the OFF-state, or the open-circuit state, of the electrical switch 640.

[0067] The first pressure stat 181 is of automatically re-operative type. After the electrical switch 640 turns into the OFF-state, the electrical switch 640 can automatically return to the ON-state under a certain condition, such as the pressure of the refrigerant in the sensing chamber 631 falling below the threshold level reduced by a hysteresis, which is 3.0 MPa with a tolerance ranging from the lower limit -0.15 MPa to the upper limit +0.15 MPa, for example.

(3-3) Second pressure stat 182

[0068] Fig. 6 shows the structure of the second pressure stat 182. The second pressure stat 182 includes a connection pipe 710 and a body 720. The body 720 includes a pressure sensor 730, an electrical switch 740, and a re-operation mechanism 750. The pressure sensor 730 includes a sensing chamber 731, a membrane member 732, and a transmission rod 733. The electrical switch 740 includes a first terminal 741 that is connected to a movable conductor 742 with a first contact 743, and a second terminal 744 with a second contact 745. The re-operation mechanism 750 includes a push button 751, a push bulk 752, and a spring 753.

[0069] The connection pipe 710 serves to guide the refrigerant from the refrigerant discharge pipe 171 to the body 720 so that the pressure sensor 730 can detect the pressure of the refrigerant. When the pressure of the refrigerant filling the sensing chamber 731 is lower than the threshold specifically designed for the second pressure stat 182, the first contact 743 and the second contact 745 are in contact with each other, making electrical connection between the first terminal 741 and the second terminal 744, that is, the ON-state, or the close-circuit state, of the electrical switch 740. Here, the threshold is 4.17 MPa with a tolerance ranging from the lower limit -0.15 MPa to the upper limit +0.0 MPa, for example. In other words, the actual value of the threshold of the second pressure stat 182 can be within the range from 4.02 MPa to 4.17 MPa.

[0070] In this way, because the tolerance ranges do not overlap with regard to the first pressure stat 181 and the second pressure stat 182, the relationship of the threshold levels is prevented from reversing with regard to the first pressure stat 181 and the second pressure stat 182.

[0071] When the pressure of the refrigerant filling the sensing chamber 731 exceeds the threshold, the membrane member 732 deforms and push the transmission rod 733 and hence the movable conductor 742, leading to electrical disconnection of the first terminal 741 from the second terminal 744, that is, the OFF-state, or the open-circuit state, of the electrical switch 740. At this time, the second terminal 744 is also pressed by the transmission rod 733 and shift upward, together with the components of the re-operation mechanism 750.

[0072] The second pressure stat 182 is of manually re-operative type. Once the electrical switch 740 turns into the OFF-state, the electrical switch 740 does not return to the ON-state unless the technician executes re-operation treatment. This is because, once an OFF-state is realized, the second terminal 744 is located upward compared to the original position, being spaced apart from the movable conductor 742 that is now restored.

[0073] For re-operation treatment, the technician uses the re-operation mechanism 750. Specifically, the technician pushes the push button 751 together with the push bulk 752, making the second terminal 744 slide back to the original position so that the first contact 743 and the second contact 745 can get in touch again.

(3-4) Mounting structure

(3-4-1) Different connection portions

[0074] As will be understood from Fig. 4, the first pressure stat 181 and the second pressure stat 182 are individually connected to the refrigerant discharge pipe 171 at the different connection portions, i.e. the first connection portion 301 and the second connection portion 302, which are spaced away from each other.

(3-4-2) Long connection pipes

[0075] As shown in Fig. 5 and Fig. 6, the connection pipe 610 and the connection pipe 710 have a certain length, which is desirable in particular when the first pressure stat 181 and the second pressure stat 182 are secured to the refrigerant discharge pipe 171 by brazing using hot molten metal. Due to the molten metal applied to the first connection portion 301 and the second connection portion 302, the temperature of such connection portions becomes extremely high. The certain length of the connection pipe 610 and the connection pipe 710 desirably restrains the functional portions, such as the pressure sensor 630, the electrical switch 640, the pressure sensor 730, and the electrical switch 740, from being damaged due to such extreme heat.

(3-4-3) Close to the compressor

[0076] The pressure-related operation unit 18 is preferably mounted close to the compressor 11.

[0077] Fig. 7 shows the structure of the refrigerant circuit 40 in the outdoor unit 10. The outdoor unit 10 has a casing 101 surrounding the inner space, which is divided into the heat exchanger room 102 and the actuator room 103 by means of a separation wall 104. In the actuator room 103 is accommodated the compressor 11, the four way valve 12, the refrigerant discharge pipe 171 with the muffler 173, the accumulator 174, the pressure-related operation unit 18, and so on.

[0078] It should be noted that the pressure-related operation unit 18 is arranged in the actuator room 103 so

as to be located close to the discharge port 111 of the compressor 11 along the refrigerant discharge pipe 171. This close arrangement helps secure detection of abnormal rise of the refrigerant pressure. If the distance between the compressor 11 and the pressure-related operation unit 18 is designed long, such a long flow path may cause some pressure loss, which may reduce the pressure values detected by the first pressure stat 181 and the second pressure stat 182, and therefore inhibit detection of rise of the refrigerant pressure.

(3-4-4) Laterally extending portion

[0079] Fig. 8 shows the structure of the refrigerant circuit 40 in the actuator room 103. The refrigerant discharge pipe 171 includes several portions, such as the outlet portion 171 a, the muffler 173 which can be omitted, the U-shaped portion 171b, the vertically extending portion 171c, the laterally extending portion 171 d, and portions that are invisible in this figure. The outlet portion 171 a is a pipe directly connected to the discharge port 111 of the compressor 11. The U-shaped portion 17b is connected the outlet of the muffler 173. The vertically extending portion 171 c extends right after the U-shaped portion 172. The laterally extending portion 171d extends generally in the horizontal direction and specifically inclines at the angle within the range from -10 degree to +10 degree with regard to the horizontal plane, for example.

[0080] It should be noted that the pressure-related operation unit 18 is mounted at the laterally extending portion 171d. This arrangement, in which the connection pipe 610 and the connection pipe 710 are oriented vertically, restrains the stress due to the gravitation from applying to the first connection portion 301 and the second connection portion 302 on the refrigerant discharge pipe 171, thereby reducing the risk that the refrigerant discharge pipe 171 may rupture.

[0081] In addition, the diameter of the laterally extending portion 171 d may be made larger than the diameter of the outlet portion 171 a, which can be directly/indirectly connected to the laterally extending portion 171 d. It is advantageous to arrange the first connection portion 301 and the second connection portion 302 on the laterally extending portion 171d having a larger diameter and therefore an enhanced strength in terms of stress endurance. Preferably, the laterally extending portion 171d has a diameter of 3/8 inch or more.

(3-4-5) Interval S

[0082] As shown in Fig. 4, the connection pipe 610 of the first pressure stat 181 and the connection pipe 710 of the second pressure stat 182 have a length L. At the same time, the connection pipe 610 and the connection pipe 710 are mounted on the refrigerant discharge pipe 171 with an interval S. Preferably, the interval S is equal to or larger than 0.4 times as the length L of the connec-

tion pipe 610, 710.

(4) Operation of the pressure-related operation unit 18

[0083] If the pressure of the refrigerant rises to an abnormal level in the refrigerant discharge pipe 171, such abnormal state can be detected by any one of the first pressure stat 181 and the second pressure stat 182, which can shut down at least part of the electrical circuit 50.

[0084] Accordingly, at least part of the actuators, such as the compressor 11, is quickly deactivated, and then the pressure of the refrigerant is restrained from increasing any longer. In this way, refrigerant leakage is restrained from occurring.

[0085] Since the first pressure stat 181 has a lower threshold than that of the second pressure stat 182, the first pressure stat 181 essentially tends to detect the abnormal pressure faster than the second pressure stat 182.

(5) Characteristics

(5-1)

[0086] The first pressure stat 181 and the second pressure stat 182 are connected to the different connection portions, i.e. the first connection portion 301 and the second connection portion 302, of the refrigerant discharge pipe 171 in a separated manner.

[0087] Accordingly, stress caused by vibration of the first pressure stat 181 and the second pressure stat 182 is restrained from concentrating on a certain portion of the refrigerant discharge pipe 171. Thereby the refrigerant discharge pipe 171 is less likely to be damaged due to vibration of the compressor 11 and the induced motions of the first pressure stat 181 and the second pressure stat 182. In addition, the pressure of the refrigerant is detected in a more secured manner by the plurality of pressure stats, i.e. the first pressure stat 181 and the second pressure stat 182.

(5-2)

[0088] The refrigerant discharge pipe 171 includes a first pipe, i.e. the outlet portion 171 a, having a first diameter and a second pipe, i.e. the laterally extending portion 171 d, having a second diameter larger than the first diameter. All of the first connection portion 301 and the second connection portion 302 are located at the second pipe. Alternatively, at least one of the first connection portion 301 and the second connection portion 302 may be located at the second pipe. Preferably, at least the second pipe has a diameter of 3/8 inch or more.

[0089] Accordingly, at least one of the first connection portion 301 and the second connection portion 302 is arranged in a region with high stress endurance.

(5-3)

[0090] The first pressure stat 181 has a body 620 and a connection pipe 610. The second pressure stat 182 has a body 720 and a connection pipe 710. Hence, with regard to the first pressure stat 181, the connection pipe 610 keeps a certain distance between the first connection portion 301 and the pressure sensor 630. Similarly, with regard to the second pressure stat 182, the connection pipe 710 keeps a certain distance between the second connection portion 302 and the pressure sensor 730.

[0091] Accordingly, in the process of brazing, in which the molten metal is applied to the tips of the connection pipe 610 and the connection pipe 710 in order to mount the connection pipe 610 and the connection pipe 710 on the refrigerant discharge pipe 171, excessive heat is restrained from being conducted from the molten metal to the pressure sensor 630 and the pressure sensor 730, lowering the risk of damaging the pressure sensor 630 and the pressure sensor 730.

(5-4)

[0092] The first pressure stat 181 can be mounted on the refrigerant discharge pipe 171 by inserting the connection pipe 610 into the first hole 311. Similarly, the second pressure stat 182 can be mounted on the refrigerant discharge pipe 171 by inserting the connection pipe 710 into the second hole 321. Preferably, at least one of the first hole 311 and the second hole 321 is provided with a burring formed on the refrigerant discharge pipe 171, such as the first burr portion 312 and the second burr portion 322 which surround the first hole 311 and the second hole 321, respectively.

[0093] Accordingly, the air conditioning system 100 or the outdoor unit 10 can be easily manufactured.

(5-5)

[0094] The first pressure stat 181 and the second pressure stat 182 are spaced away from each other by a sufficiently long distance, i.e. the length L.

[0095] Accordingly, even if the vibration of the compressor 11 shakes the first pressure stat 181 and the second pressure stat 182, they are restrained from colliding with each other into breakdown.

(5-6)

[0096] At least one of the connection pipe 610 and the connection pipe 710 can be oriented vertically in connection with the laterally extending portion 171d of the refrigerant discharge pipe 171.

[0097] Accordingly, the laterally extending portion 171d receives less stress from the first pressure stat 181 or the second pressure stat 182, due to the gravitational force.

(5-7)

[0098] The laterally extending portion 171d is arranged to extend along a substantially horizontal plane. This arrangement enables the connection pipe 610 and the connection pipe 710 to be oriented substantially vertically in connection with the laterally extending portion 171d of the refrigerant discharge pipe 171.

[0099] Accordingly, the laterally extending portion 171d receives less stress from the first pressure stat 181 or the second pressure stat 182 due to the gravitational force.

(5-8)

[0100] The number of the pressure stats is two. Accordingly, refrigerant leakage due to an increase of pressure is restrained at low cost and in a more secure manner.

(5-9)

[0101] The refrigerant used in the refrigerant circuit is flammable. Such a flammable refrigerant is preferably used for the air conditioning system 100 which reduces the risk of refrigerant leakage.

(6) Variations

(6-1) Order of the pressure stats

[0102] In the air conditioning system 100 according to the above-mentioned embodiment, the first pressure stat 181 is mounted closer to the compressor 11 than the second pressure stat 182. On the contrary, however, in the air conditioning system, the second pressure stat 182 may be mounted closer to the compressor 11 than the first pressure stat 181.

[0103] With this configuration, the second pressure stat 182 may be less susceptible to a pressure loss, which reduces the pressure of the refrigerant at a farther location from the discharge port 111 along the refrigerant discharge pipe 171. Thus, the second pressure stat 182 tends to react quickly. Accordingly, the second pressure stat 182 may detect the abnormal pressure faster, and in some cases faster than even the first pressure stat 181. Therefore, refrigerant leakage can be restrained more securely, involving call of the technician more frequently for checking the air conditioning system 100.

(6-2) Number of the pressure stats

[0104] The air conditioning system 100 according to the above-mentioned embodiment employs two pressure stats. However, the air conditioning system may have more than three pressure stats. With this configuration, refrigerant leakage can be restrained more securely.

<Second Embodiment>

(1) Configuration

[0105] The air conditioning system 100 according to the second embodiment differs from the first embodiment only in the structure of the pressure-related operation unit 18, while being common in the other features.

[0106] Fig. 9A shows the pressure-related operation unit 18 according to the second embodiment. In this figure, brazing molten metal to fix the first pressure stat 181 and the second pressure stat 182 onto the refrigerant discharge pipe 171 is omitted.

[0107] The pressure-related operation unit 18 includes a reinforcement joint 33A mounted on the refrigerant discharge pipe 171. The reinforcement joint 33A securely supports the connection pipe 610 and the connection pipe 710 with regard to the refrigerant discharge pipe 171. The reinforcement joint 33A has a first branching portion 332A and a second branching portion 333A both branching from a main portion 331 A. The first branching portion 332A is positioned at the first hole 311 of the refrigerant discharge pipe 171. Similarly, the second branching portion 333A is positioned at the second hole 321 of the refrigerant discharge pipe 171. The first branch portion 332A and the second branch portion 333A are configured to receive the connection pipe 610 and the connection pipe 710, respectively.

[0108] Accordingly, the first connection portion 301 and the second connection portion 302 show higher stress endurance due to the reinforcement joint 33A.

(2) First variation

[0109] Fig. 9B shows the pressure-related operation unit 18 according to a first variation of the second embodiment. The pressure-related operation unit 18 includes two separated reinforcement joints 33B, which are mounted on the refrigerant discharge pipe 171 and correspond to the first connection portion 301 and the second connection portion 302, respectively. Similarly, brazing molten metal is omitted in this figure.

[0110] With this configuration, higher stress endurance can be achieved for the first connection portion 301 and the second connection portion 302 by means of the two separated reinforcement joints 33B. This configuration is preferable for the case that the first connection portion 301 and the second connection portion 302 are spaced away from each other by a relatively long distance.

(3) Second variation

[0111] Fig. 9C shows the pressure-related operation unit 18 according to a second variation of the second embodiment. Brazing molten metal is omitted in this figure.

[0112] Similarly to the original configuration of the second embodiment, the pressure-related operation unit 18

includes a reinforcement joint 33A mounted on the refrigerant discharge pipe 171. The reinforcement joint 33A securely supports the connection pipe 610 and the connection pipe 710 with regard to the refrigerant discharge pipe 171.

[0113] In this variation, the refrigerant discharge pipe 171 is divided into two parts. The gap between these two parts contains the first connection portion 301 and the second connection portion 302, which are specifically embodied by the first branch portion 332A and the second branch portion 333A, respectively.

[0114] With this configuration, the pressure-related operation unit 18 can be assembled in advance of the first pressure stat 181, the second pressure stat 182, and the reinforcement joint 33A. Accordingly, it is easy for the worker to mount the pressure-related operation unit 18 on the refrigerant discharge pipe 171.

(4) Third variation

[0115] Fig. 9D shows the pressure-related operation unit 18 according to a third variation of the second embodiment. Similarly to the first variation of the second embodiment, the pressure-related operation unit 18 includes two separated reinforcement joints 33B, which are mounted on the refrigerant discharge pipe 171 and correspond to the first connection portion 301 and the second connection portion 302, respectively. Brazing molten metal is omitted in this figure.

[0116] In this variation, the refrigerant discharge pipe 171 is divided into a plurality of parts. The gaps between these parts contribute to constitution of the first connection portion 301 and the second connection portion 302.

[0117] With this configuration, the first pressure stat 181, the second pressure stat 182, and the two reinforcement joints 33B can be at least partly assembled in advance. Accordingly, it is easy for the worker to mount the pressure-related operation unit 18 on the refrigerant discharge pipe 171.

<Third Embodiment>

(1) Configuration

[0118] The air conditioning system 100 according to the third embodiment differs from the first and second embodiments only in the structure of the pressure-related operation unit 18, while being common in the other features.

[0119] Fig. 10A shows the pressure-related operation unit 18 according to the third embodiment. In this figure, brazing molten metal to fix the first pressure stat 181 and the second pressure stat 182 onto the refrigerant discharge pipe 171 is omitted.

[0120] The pressure-related operation unit 18 includes a first pressure stat 181 and a second pressure stat 182 arranged relatively close to each other. The body 620 of the first pressure stat 181 are fixed to the body 720 of

the second pressure stat 182 by means of the banding band 183A, which functions as a fixing means. The connection pipe 610 of the first pressure stat 181 and the connection pipe 710 of the second pressure stat 182 are individually connected to respective connection portion 301, 302 of the refrigerant discharge pipe 171.

[0121] With this configuration, the first pressure stat 181 and the second pressure stat 182 move together when they receive vibration from the compressor 11. Accordingly, the first pressure stat 181 and the second pressure stat 182 are restrained from colliding with each other into breakdown.

[0122] Further, the first pressure stat 181 and the second pressure stat 182 are fixed to each other at their bodies 620, 720. Accordingly, the bodies are stably fixed.

(2) Variations

(2-1) First variation

[0123] Fig. 10B shows the pressure-related operation unit 18 according to a first variation of the third embodiment. The body 620 of the first pressure stat 181 is fixed to the body 720 of the second pressure stat 182 by means of a deformable and/or sticky material 183B.

[0124] With this configuration, the first pressure stat 181 and the second pressure stat 182 move together when they receive vibration from the compressor 11. Accordingly, the first pressure stat 181 and the second pressure stat 182 are restrained from colliding with each other into breakdown.

(2-2) Second variation

[0125] Fig. 10C shows the pressure-related operation unit 18 according to a second variation of the third embodiment. The body 620 of the first pressure stat 181 and the body 720 of the second pressure stat 182 are integrally formed with a resin material 183C.

[0126] With this configuration, the body 620 of the first pressure stat 181 and the body 720 of the second pressure stat 182 are integrally formed as one piece having a plurality of pressure sensors, i.e. the pressure sensor 630 and the pressure sensor 730. This configuration may be produced by integral molding, for example. The integrally formed bodies have two or more connection pipes which are individually connected to respective connection portions of the refrigerant discharge pipe 171.

[0127] Accordingly, the first pressure stat 181 and the second pressure stat 182 are firmly fixed and are easier to be mounted on the refrigerant discharge pipe 171.

(2-3) Other variations

[0128] Instead of the banding band 183A, the deformable and/or sticky material 183B, or the resin material 183C, the pressure-related operation unit 18 can employ other types of fixing means, such as a metal member, or

a combination of the fixing means mentioned so far.

[0129] Accordingly, such a variety of fixing means enable the first pressure stat 181 and the second pressure stat 182 to be stably fixed in a more desirable manner.

5

11

13

23

33A, 33B

10 40

50

100

171

171a

15 171d

181

182

301

302

20 610, 710

620, 720

630, 730

640, 740

25

Claims

1.

An air conditioning system (100) comprising:

a refrigerant circuit (40) including:

an indoor heat exchanger (23),

an outdoor heat exchanger (13),

a compressor (11),

a refrigerant pipe (171) connected to the

compressor and forming at least part of the

refrigerant circuit,

a plurality of pressure stats (181, 182) con-

figured to detect pressure of the refrigerant

in the refrigerant pipe; and

an electrical circuit (50) configured to drive the

refrigerant circuit;

wherein

each of the plurality of the pressure stats in-

cludes:

a pressure sensor (630, 730) configured to

detect pressure of the refrigerant in the re-

frigerant pipe; and

an electrical switch (640, 740) configured to

stop the electrical circuit from driving the re-

frigerant circuit at least partially in accord-

ance with the pressure detected by the re-

spective pressure sensor,

the plurality of the pressure stats is connected

to different connection portions (301, 302) of the

11

13

23

33A, 33B

10 40

50

100

171

171a

15 171d

181

182

301

302

20 610, 710

620, 720

630, 730

640, 740

25

refrigerant pipe, respectively, and
the connection portions are spaced out from
each other.

2. The air conditioning system according to Claim 1,
wherein
the refrigerant pipe includes a first pipe (171 a) hav-
ing a first diameter and a second pipe (171 d) having
a second diameter larger than the first diameter,
the first pipe is connected to the compressor,
the second pipe is connected to the first pipe, and
at least one of the connection portions is located at
the second pipe. 5
3. The air conditioning system according to any one of
Claims 1 to 2, further comprising a reinforcement
joint (33A, 33B) mounted on the refrigerant pipe,
wherein the reinforcement joint is located at at least
one of the connection portions. 10
4. The air conditioning system according to any one of
Claims 1 to 3, wherein
each of the plurality of the pressure stats has a body
(620, 720) and a connection pipe (610, 710),

each body accommodating a pressure sensor
(630, 730), and
the connection pipe connecting the body with
respective one of the connection portions. 15
5. The air conditioning system according to Claim 4,
wherein
a hole (311, 321) is formed at each connection por-
tion of the refrigerant pipe, and
each of the connection pipes is connected to the re-
frigerant pipe via respective one of the holes. 20
6. The air conditioning system according to Claim 5,
wherein the holes are spaced out from each other
by an interval (S) more than 0.4 times as a length
(L) of the connection pipe. 25
7. The air conditioning system according to any one of
Claims 1 to 6, wherein the refrigerant pipe has a lat-
erally extending portion (171 d), and at least one of
the connection portions is located at the laterally ex-
tending portion. 30
8. The air conditioning system according to Claim 7,
wherein the laterally extending portion inclines at an
inclination angle less than ± 10 degree with regard
to a horizontal plane. 35
9. The air conditioning system according to the any one
of Claims 1 to 8, wherein the plurality of pressure
stats is fixed to each other at least partially. 40
10. The air conditioning system according to Claim 9, 45

wherein
each of the plurality of the pressure stats has a body
and a connection pipe, each body accommodating
a pressure sensor,
the connection pipe connecting the body with re-
spective one of the connection portions; and
the bodies of the plurality of pressure stats are fixed
to each other.

11. The air conditioning system according to Claim 9,
wherein
each of the plurality of the pressure stats has a body
and a connection pipe, each body accommodating
a pressure sensor,
the connection pipe connecting the body with re-
spective one of the connection portions; and
the bodies of the plurality of pressure stats are inte-
grally formed. 50
12. The air conditioning system according to Claims 1
to 11, wherein the outdoor unit includes two pressure
stats. 55
13. The air conditioning system according to any one of
Claims 1 to 12, wherein the refrigerant is flammable.

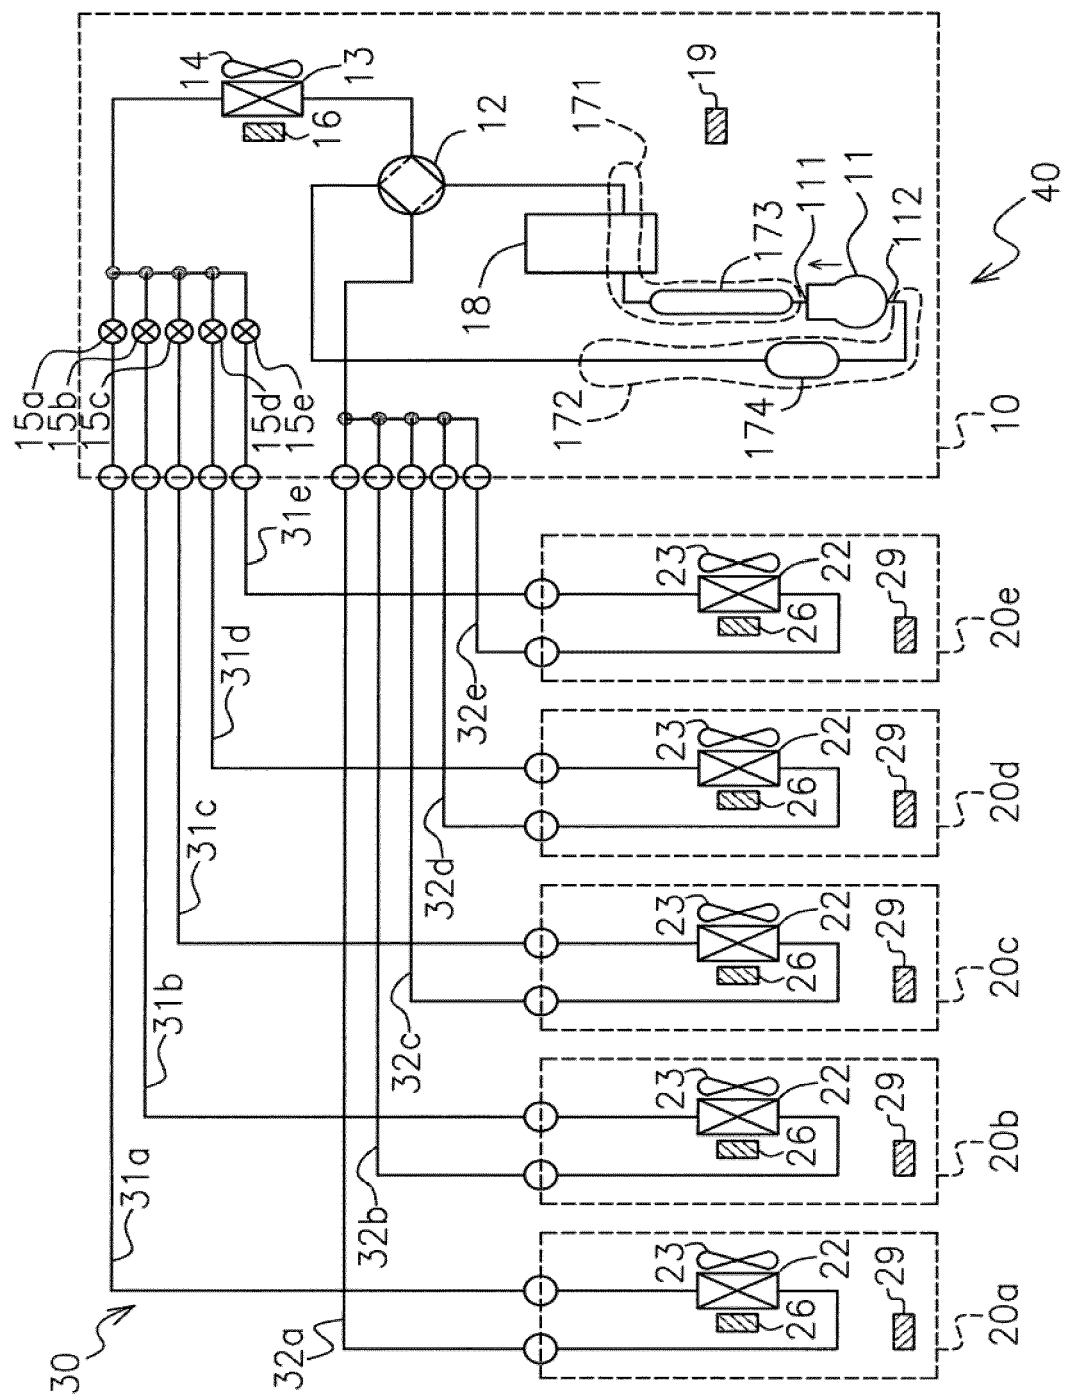
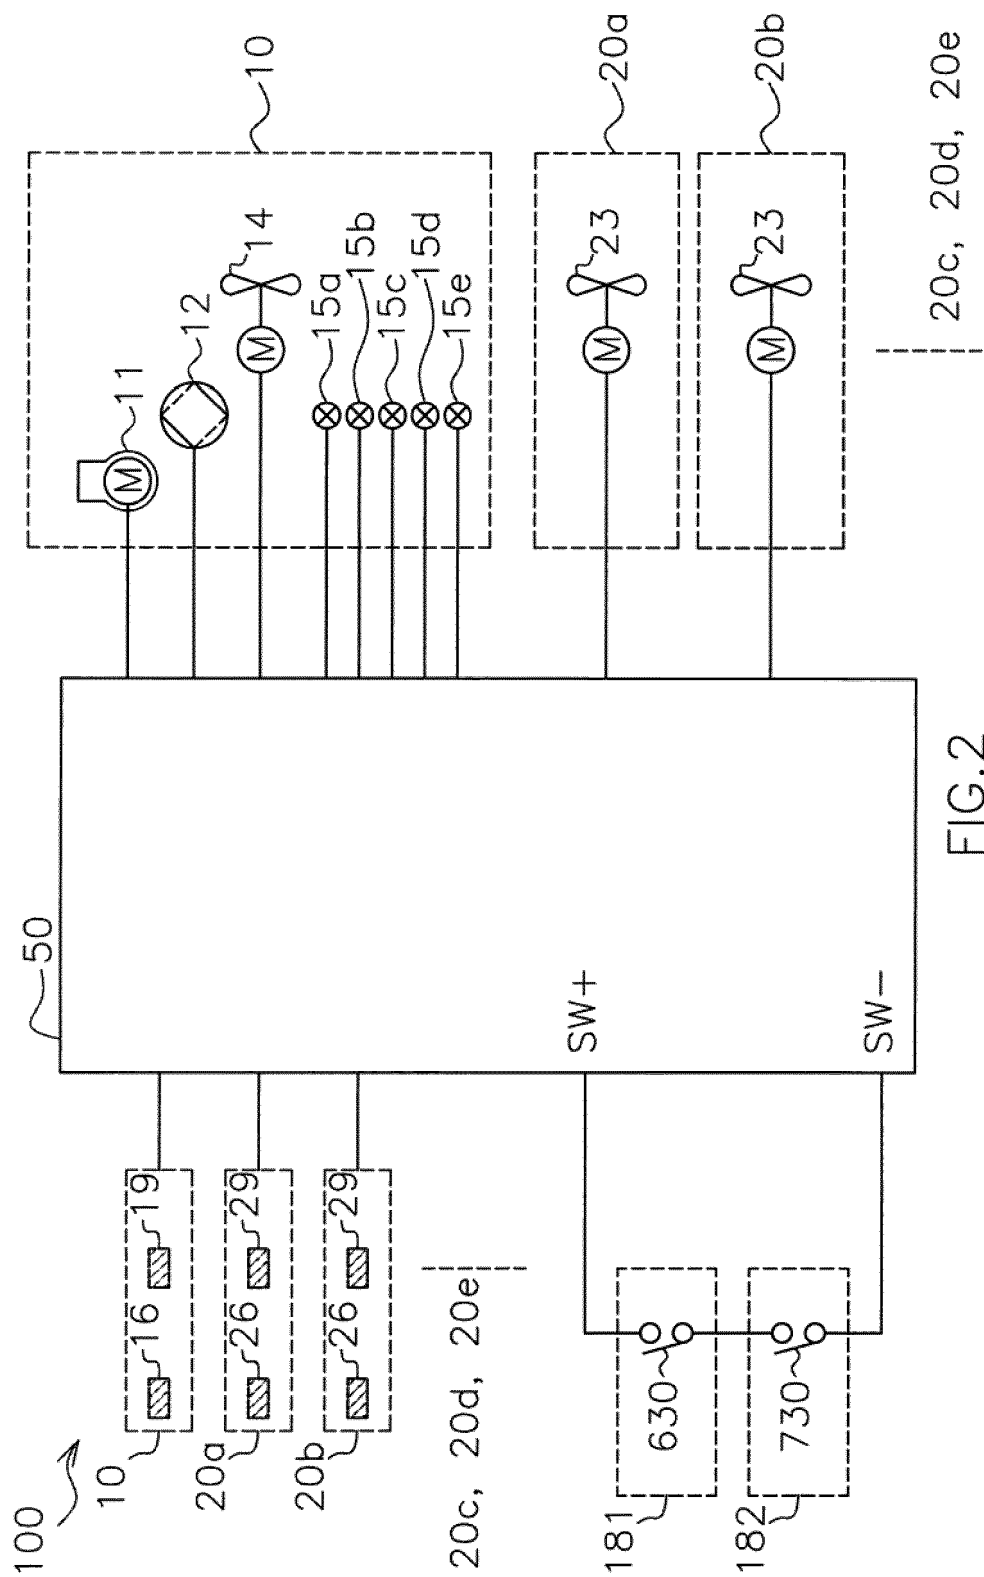


FIG.1



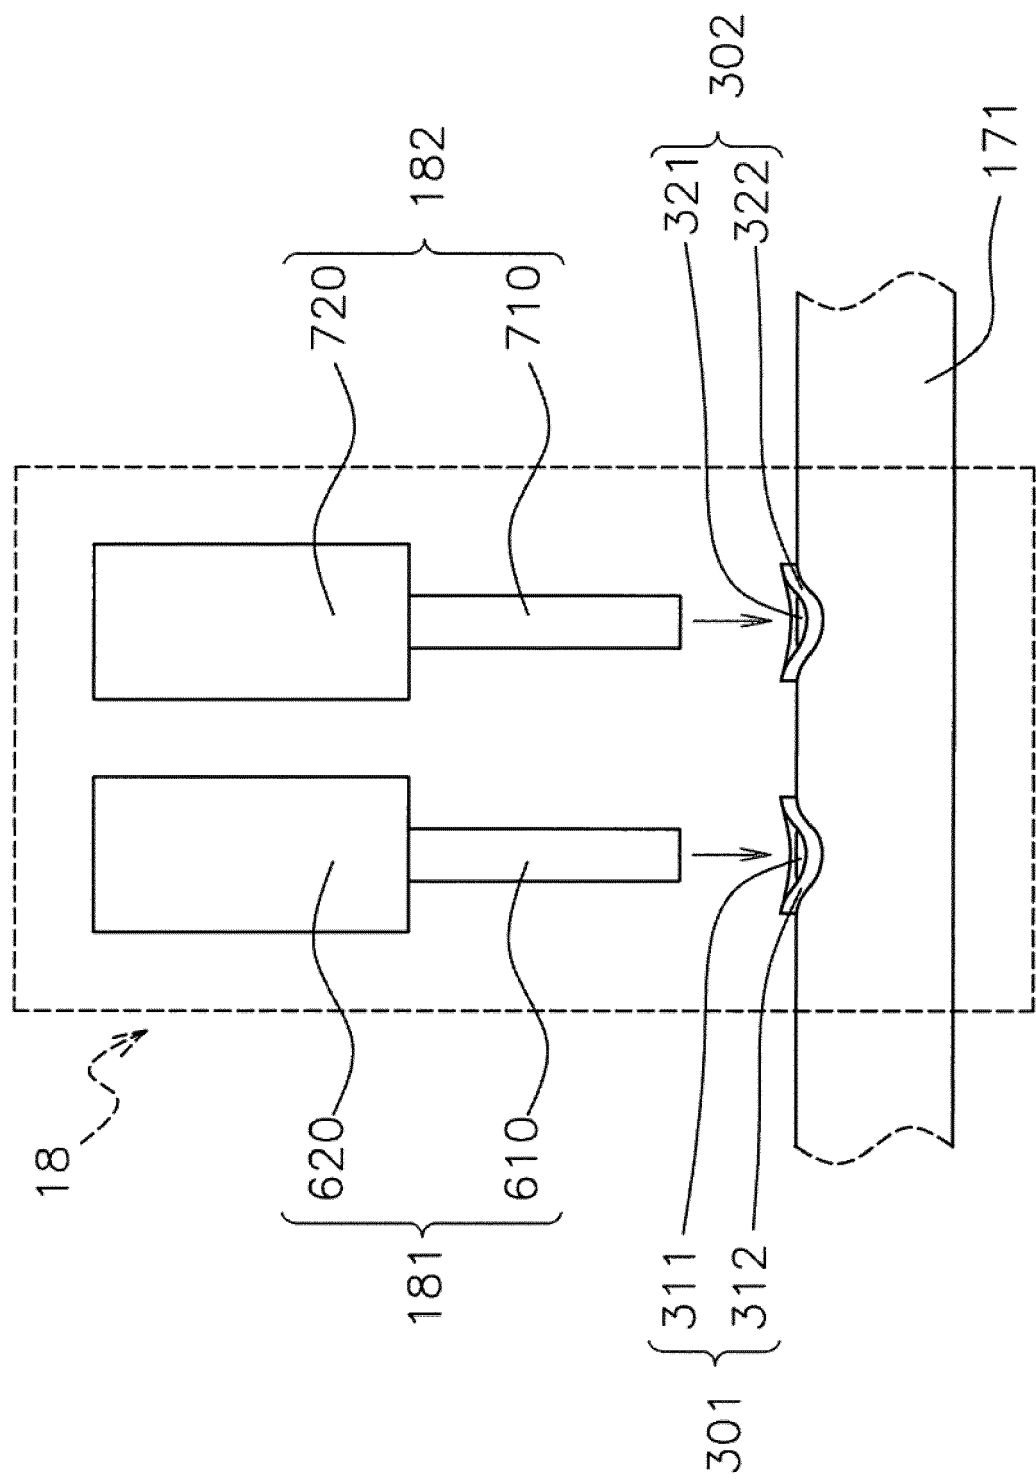


FIG. 3

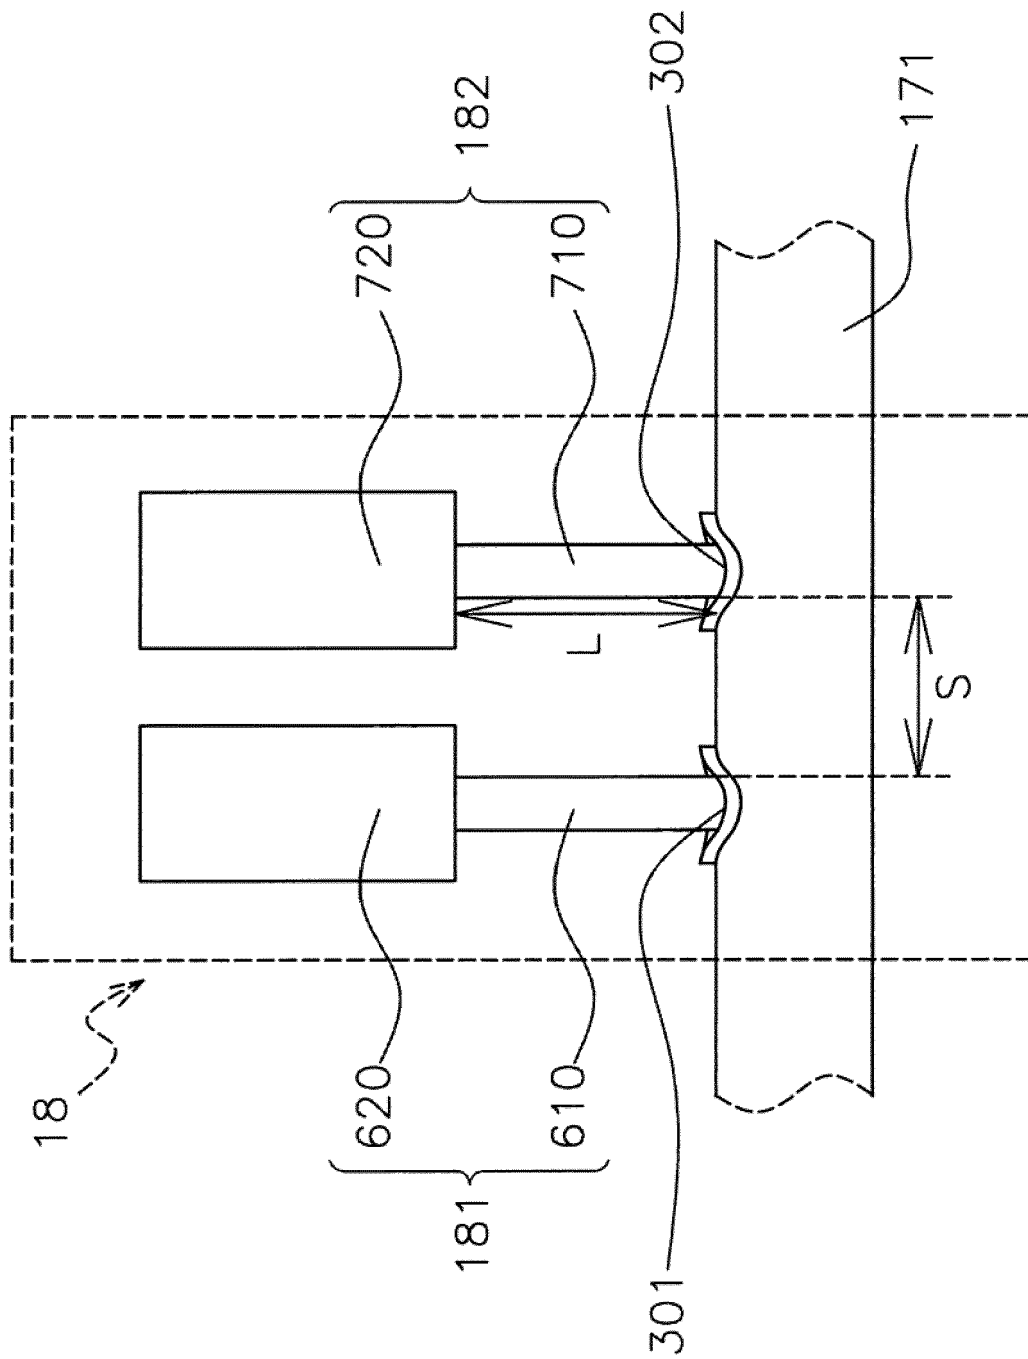


FIG. 4

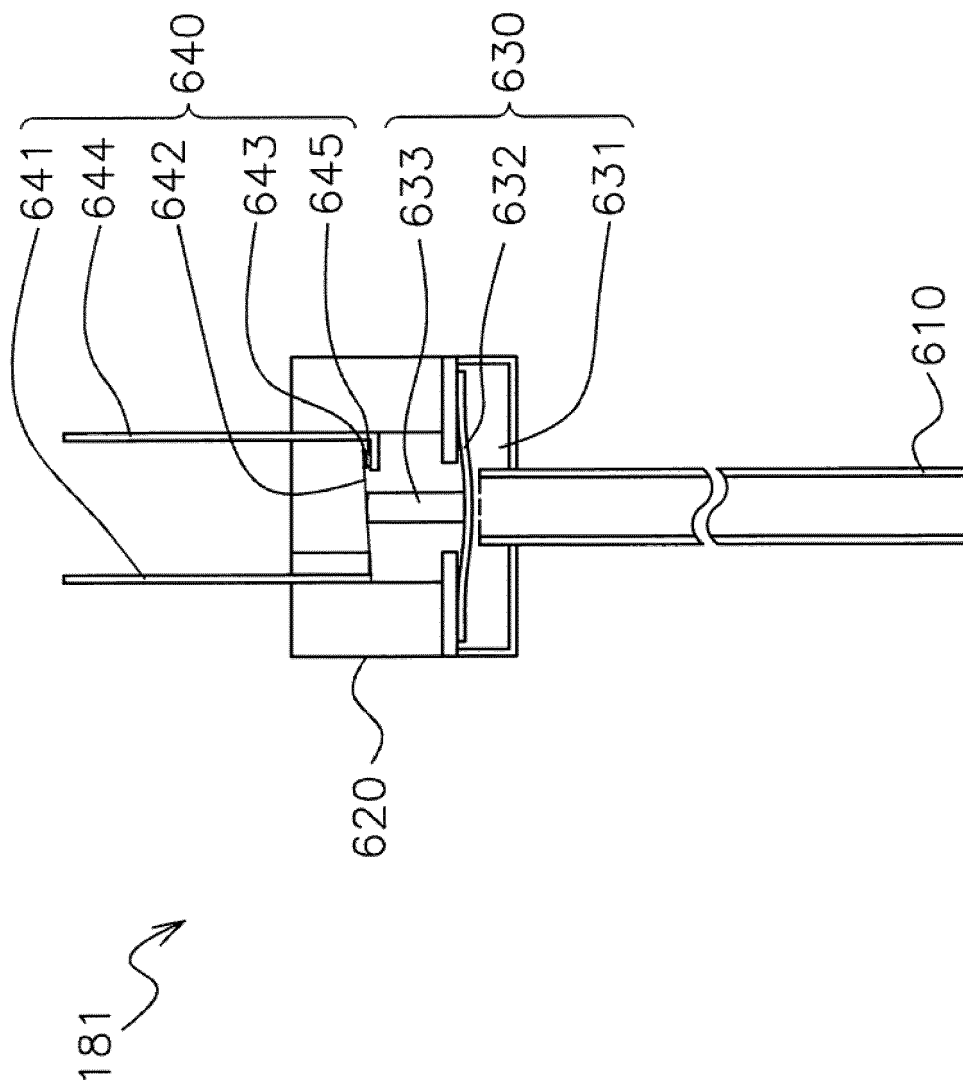


FIG.5

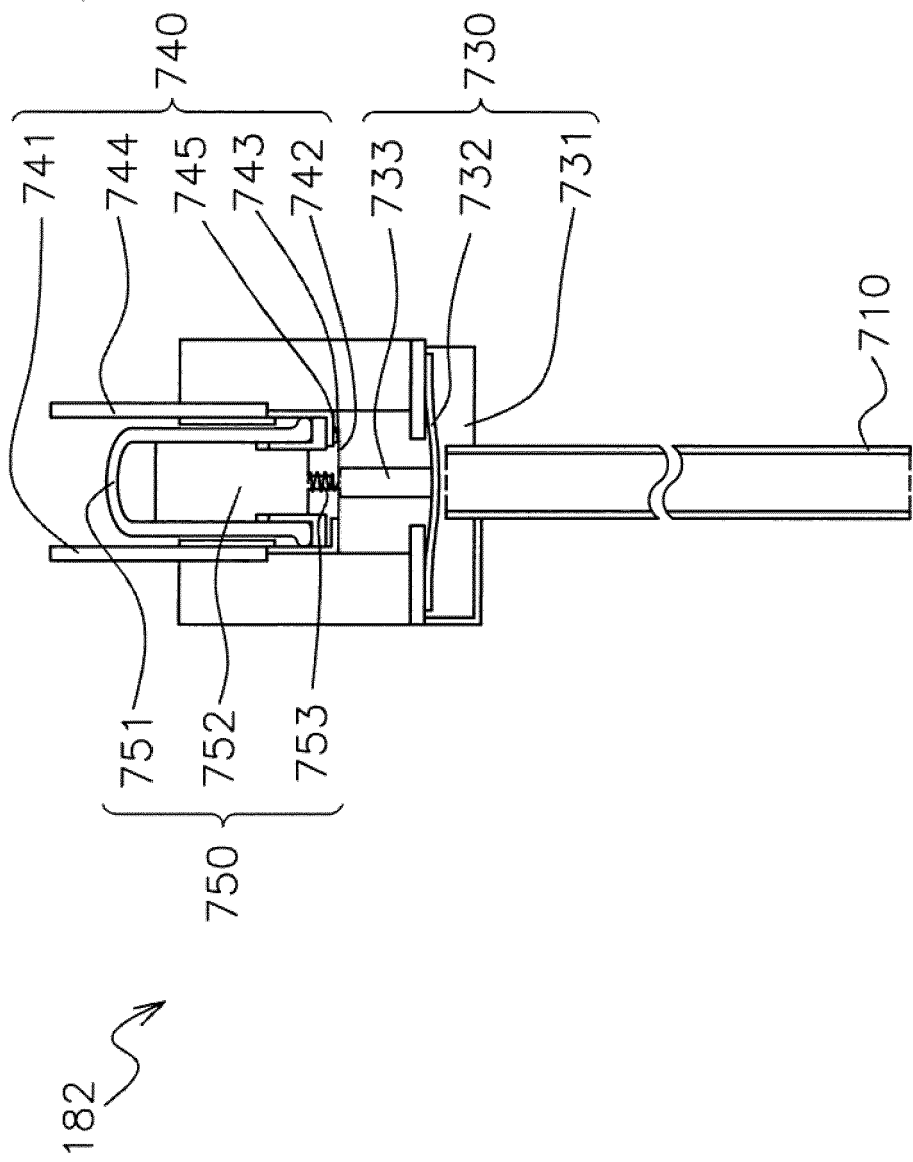


FIG.6

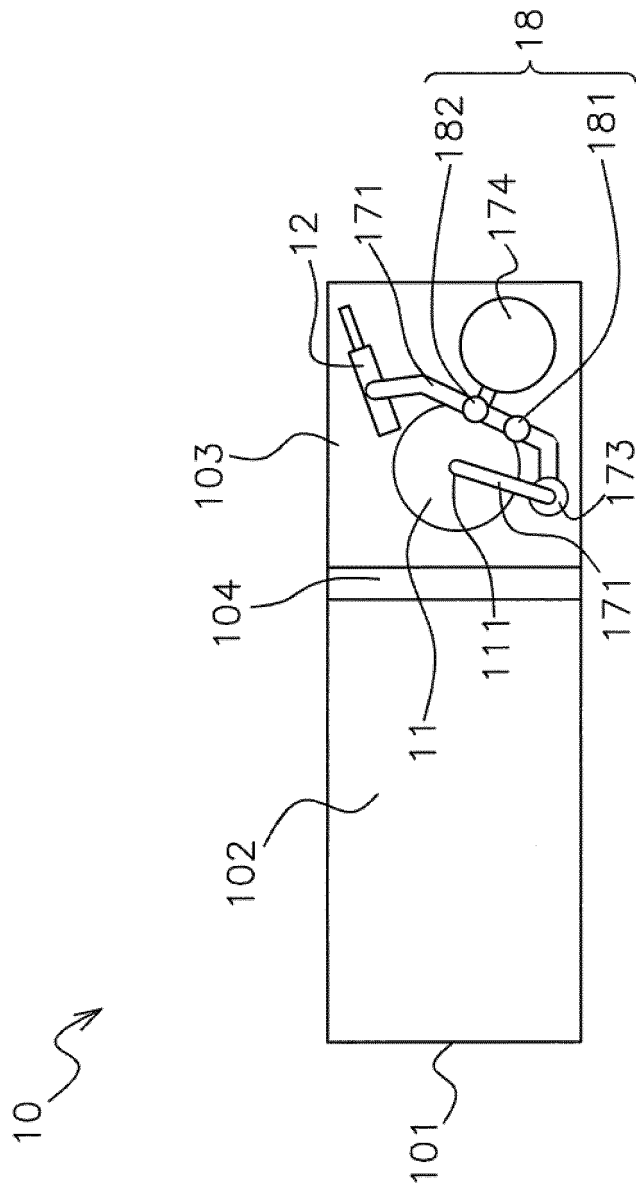
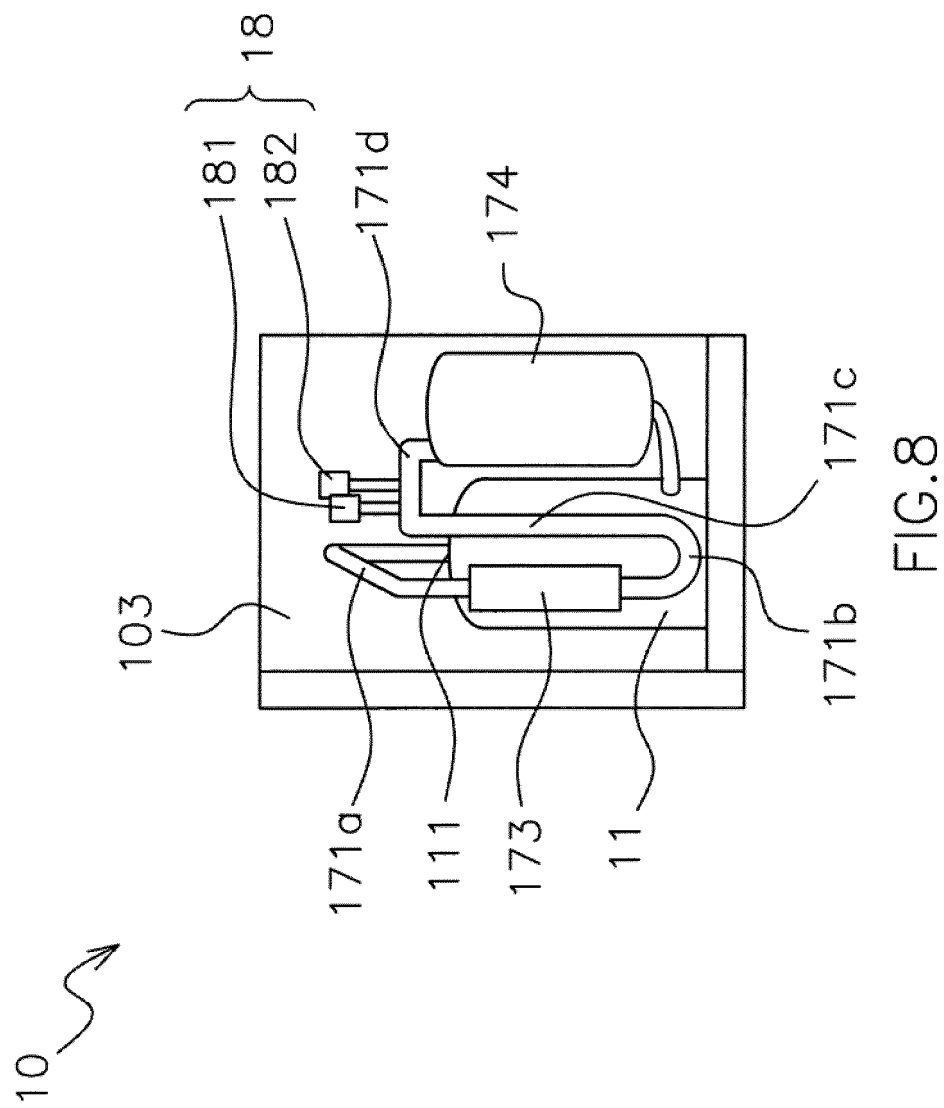


FIG. 7



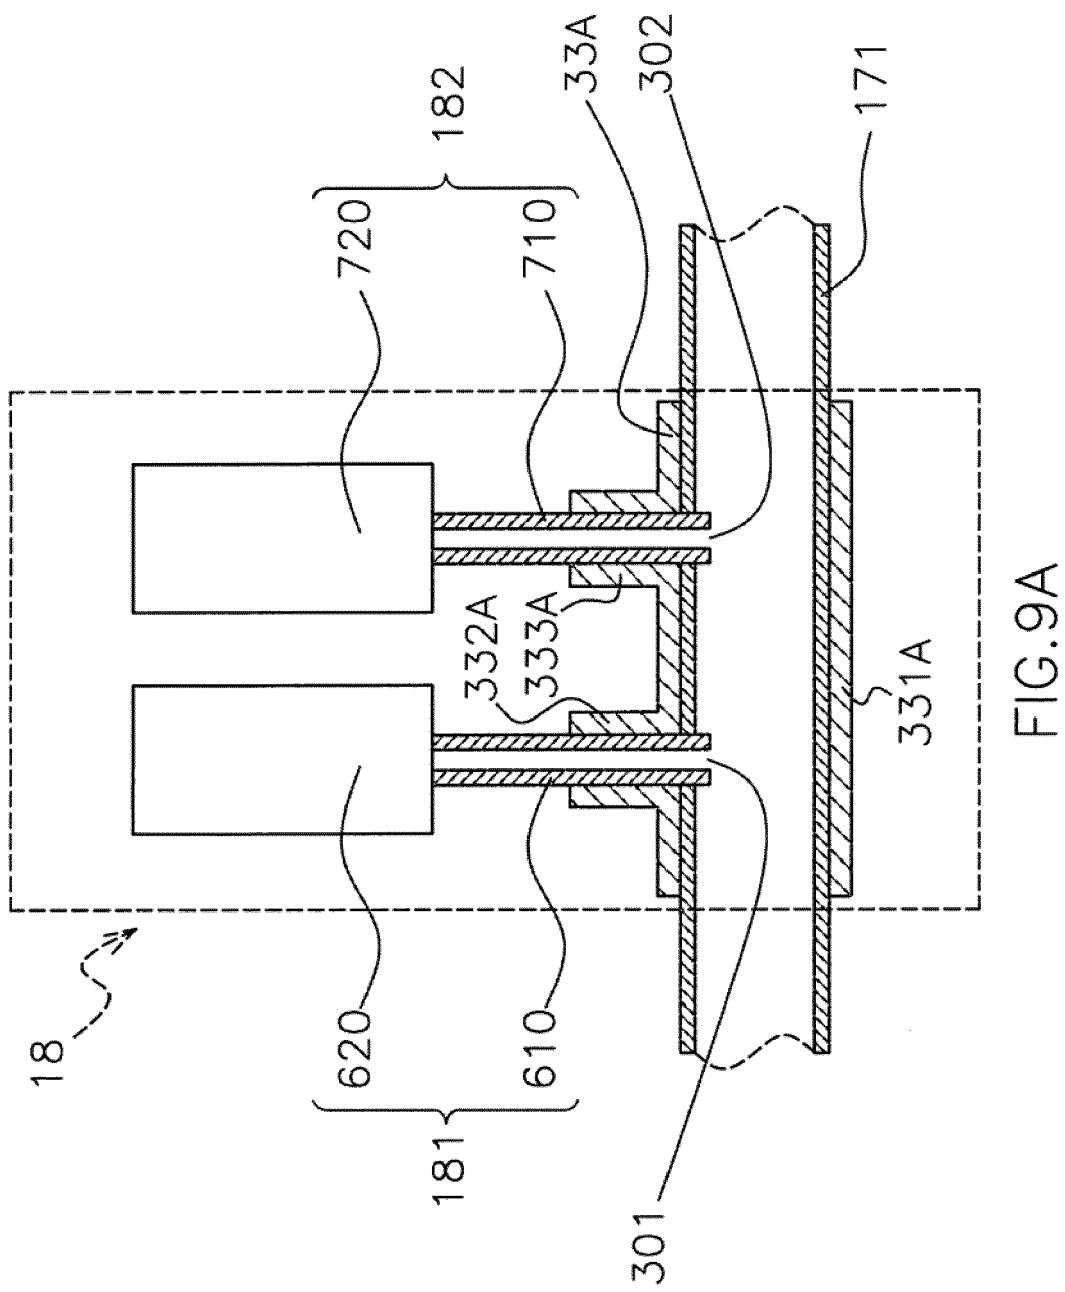


FIG. 9A

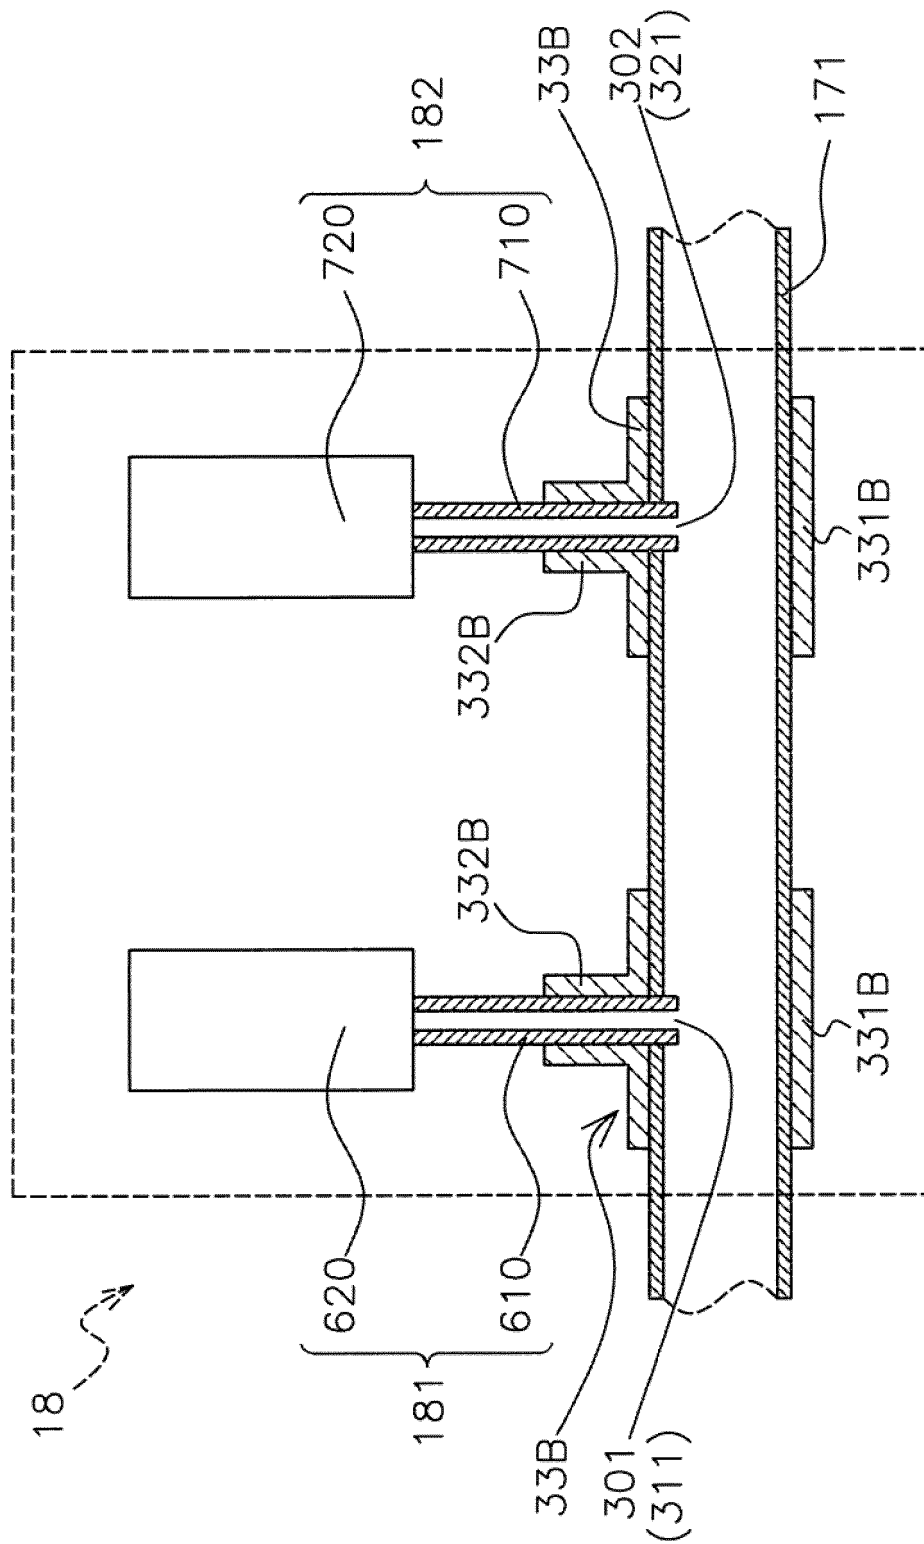


FIG. 9B

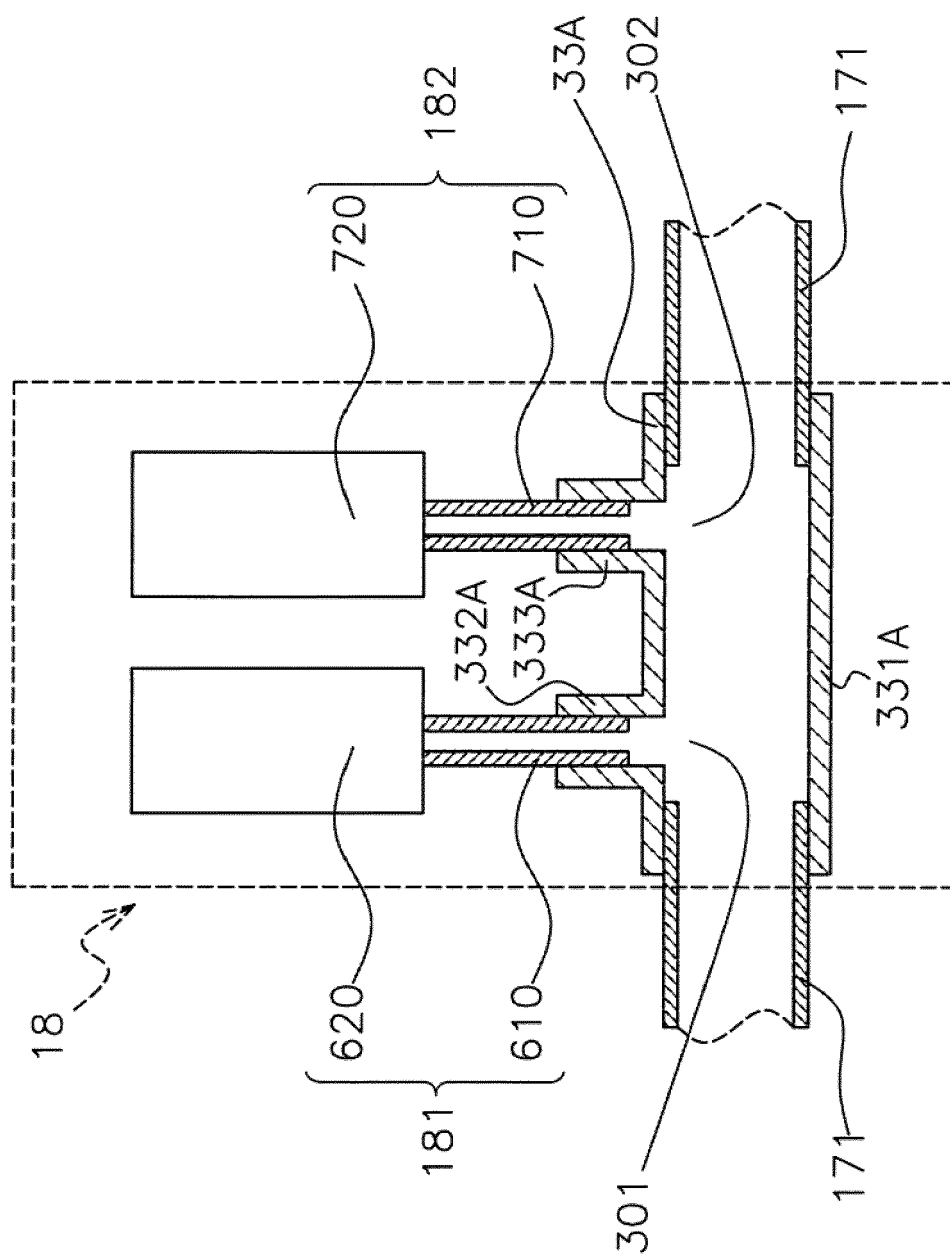


FIG. 9C

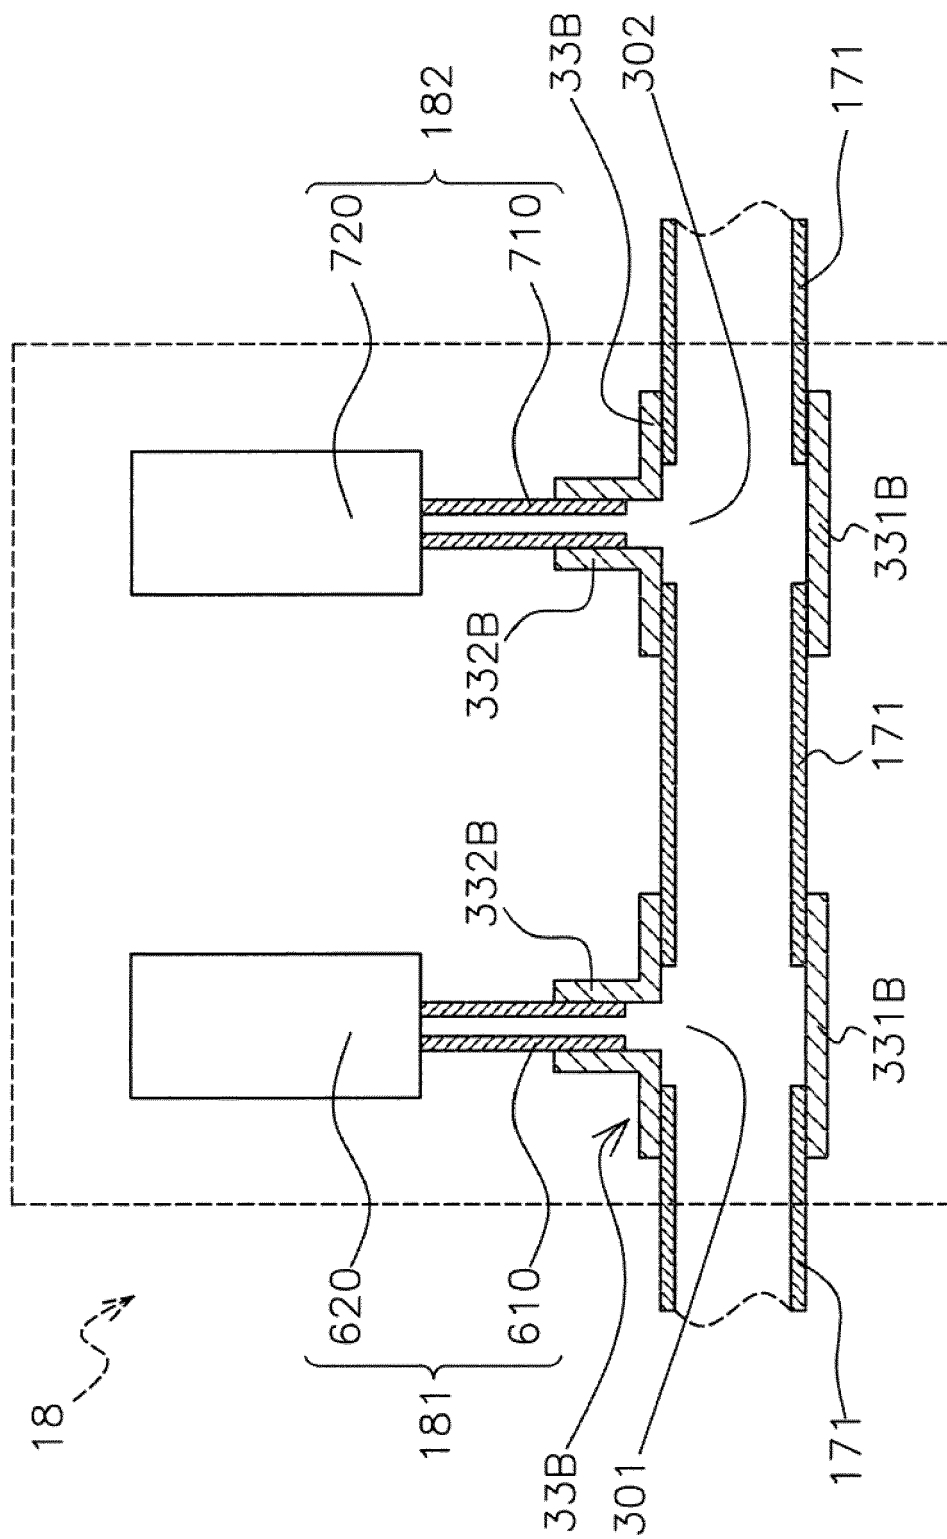


FIG. 9D

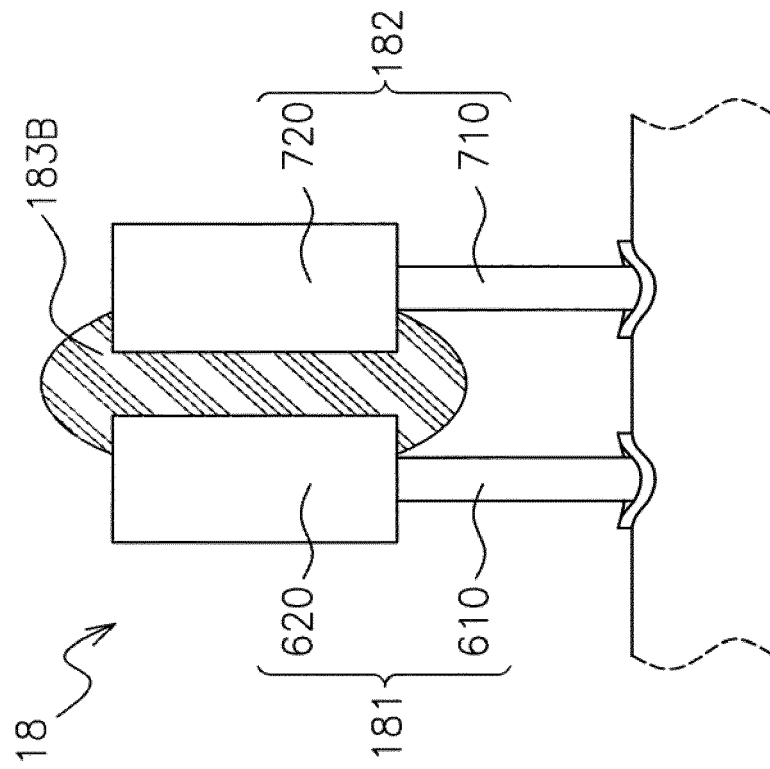


FIG. 10A

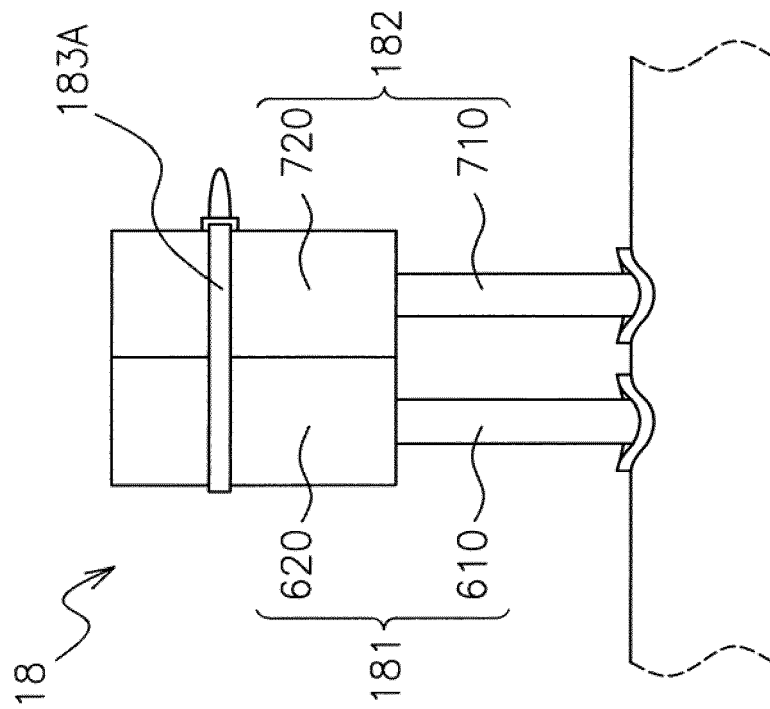


FIG. 10B

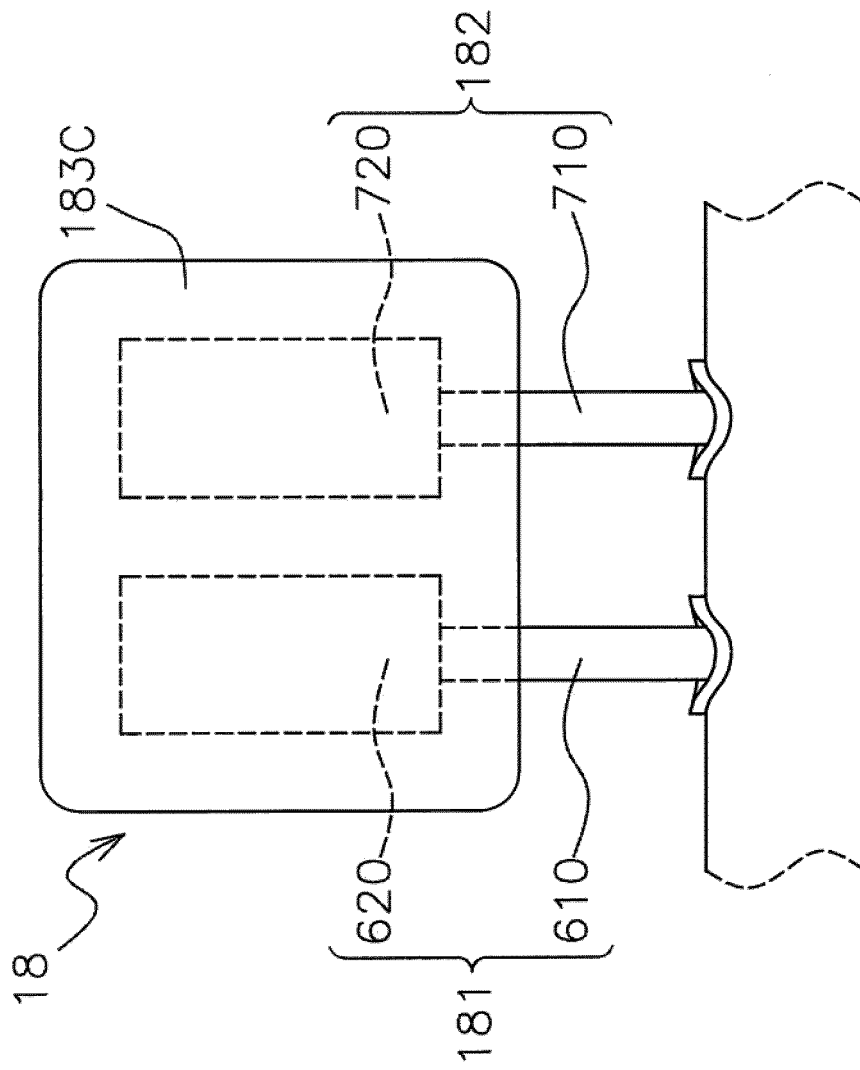


FIG. 10C



EUROPEAN SEARCH REPORT

 Application Number
 EP 16 15 3414

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2008/264080 A1 (CREED JOHN L [US] ET AL) 30 October 2008 (2008-10-30) * the whole document *	1-13	INV. F25B13/00 F25B49/02 F25B49/00 H01H35/24
X	US 2011/048041 A1 (ASPROVSKI ZVONKO [US] ET AL) 3 March 2011 (2011-03-03) * the whole document *	1-13	
X	EP 0 488 775 A2 (SANDEN CORP [JP]; JAPAN ELECTRONIC CONTROL SYST [JP]) 3 June 1992 (1992-06-03) * the whole document *	1-13	
A	US 4 614 087 A (NADAMOTO HIROYASU [JP] ET AL) 30 September 1986 (1986-09-30) * the whole document *	1-13	
A	EP 1 212 769 A2 (NE MA S P A [IT]) 12 June 2002 (2002-06-12) * the whole document *	1-13	
			TECHNICAL FIELDS SEARCHED (IPC)
			F25B H01H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 21 July 2016	Examiner Lucic, Anita
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 15 3414

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-07-2016

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008264080 A1	30-10-2008	US 2008264080 A1	30-10-2008
		US 2010138049 A1	03-06-2010
		US 2010205989 A1	19-08-2010
US 2011048041 A1	03-03-2011	CN 101918773 A	15-12-2010
		EP 2245392 A1	03-11-2010
		HK 1151578 A1	13-12-2013
		JP 5295267 B2	18-09-2013
		JP 2011510254 A	31-03-2011
		US 2011048041 A1	03-03-2011
		WO 2009091397 A1	23-07-2009
EP 0488775 A2	03-06-1992	EP 0488775 A2	03-06-1992
		JP H04203866 A	24-07-1992
US 4614087 A	30-09-1986	DE 3429329 A1	28-02-1985
		FR 2550641 A1	15-02-1985
		US 4614087 A	30-09-1986
EP 1212769 A2	12-06-2002	AT 240583 T	15-05-2003
		AU 7967101 A	02-01-2002
		DE 60100273 D1	18-06-2003
		DE 60100273 T2	08-04-2004
		EP 1212769 A2	12-06-2002
		IT T020000590 A1	20-12-2001
		WO 0199134 A2	27-12-2001