

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 September 2007 (27.09.2007)

PCT

(10) International Publication Number  
**WO 2007/109538 A2**

(51) International Patent Classification: **Not classified**

92127-1899 (US). PRASAD, Keshava, A. [US/US];  
16399 W. Bernardo, San Diego, CA 92127-1899 (US).

(21) International Application Number:  
PCT/US2007/064171

(74) Agents: HAYMOND, W., Bradley et al.; Hewlett-Packard Company, Intellectual Property Administration, P.O. Box 272400 Mail Stop 35, Fort Collins, CO 80527-2400 (US).

(22) International Filing Date: 16 March 2007 (16.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/384,053 17 March 2006 (17.03.2006) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) Applicant (for all designated States except US):  
**HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; 20555 S.H. 249, Houston, TX 77070 (US).


(72) Inventors; and

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(75) Inventors/Applicants (for US only): **SARKISIAN, George** [US/US]; 16399 W. Bernardo, San Diego, CA

[Continued on next page]

(54) Title: AN INKJET INK SYSTEM

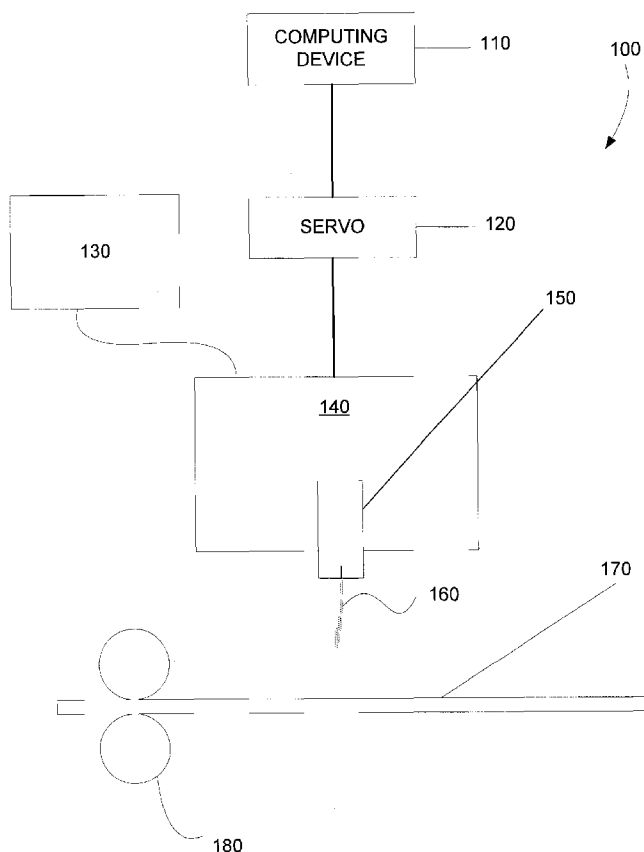

(57) Abstract: In one aspect of the present system and method, a jettable ink composition includes between 0.1 and 3% of a binder system; between 1 and 6% colorant; between 1 and 20% solvents with a vapor pressure less than 0.01 mmHg; a surfactant having a hydrophilic-lipophilic balance below about 13; and water.

WO 2007/109538 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

— *without international search report and to be republished upon receipt of that report*

**Declarations under Rule 4.17:**

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **An Inkjet Ink System**

### **BACKGROUND**

**[0001]** Inkjet printing has become a popular way of recording images on various media surfaces, particularly paper, for a number of reasons, including, low printer noise, capability of high-speed recording, and multi-color recording. Additionally, these advantages of inkjet printing can be obtained at a relatively low price to consumers. Though there has been great improvement in inkjet printing, improvements are followed by increased demands from consumers for higher speeds, higher resolution, full color image formation, increased stability, and the like.

**[0002]** With respect to inkjet ink chemistry, the majority of commercial inkjet inks are water-based. Thus, their constituents are generally water-soluble (as in the case with many dyes) or water dispersible (as in the case with many pigments). Because of their water-based nature, inkjet ink systems, in general, tend to exhibit poorer image fade and durability when exposed to water or high humidity compared to other photographic or printing methods.

**[0003]** There has been great improvement in the area of water durability of inkjet inks through incorporation of certain inkjet compatible polymer colloids. However, many inkjet inks still deliver less than desirable optical density, durability, and/or wet smudge in response to highlighters.

### **SUMMARY**

**[0004]** In one aspect of the present system and method, a jettable ink composition includes between 0.1 and 3% of a binder system; between 1 and

6% colorant; between 1 and 20% solvents with a vapor pressure less than 0.01 mmHg; a surfactant having a hydrophilic-lipophilic balance below about 13; and water.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0005]** The accompanying drawing illustrates various embodiments of the present system and method and is a part of the specification. The illustrated embodiment is merely an example of the present system and method and does not limit the scope thereof.

**[0006]** **Fig. 1** is a simple block diagram illustrating an inkjet material dispensing system, according to one exemplary embodiment.

**[0007]** Throughout the drawing, identical reference numbers designate similar, but not necessarily identical, elements.

#### DETAILED DESCRIPTION

**[0008]** Before particular embodiments of the present system and method are disclosed and described, it is to be understood that the present system and method are not limited to the particular process and materials disclosed herein as such may vary to some degree. It is also to be understood that the terminology used herein is used for the purpose of describing particular embodiments only and is not intended to be limiting, as the scope of the present system and method will be defined only by the appended claims and equivalents thereof.

**[0009]** In the present specification, and in the appended claims, the following terminology will be used:

**[0010]** The singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a pigment" includes reference to one or more of such materials.

**[0011]** The terms "about" and "approximately," when referring to a numerical value or range is intended to encompass the values resulting from experimental error that can occur when taking measurements.

**[0012]** As used herein, "liquid vehicle" is defined to include liquid compositions that can be used to carry colorants, including pigments, to a substrate. Liquid vehicles are well known in the art, and a wide variety of liquid vehicle components may be used in accordance with embodiments of the present system and method. Such liquid vehicles may include a mixture of a variety of different agents, including without limitation, surfactants, co-solvents, buffers, biocides, viscosity modifiers, sequestering agents, stabilizing agents, and water. Though not liquid *per se*, the liquid vehicle can also carry other solids, such as polymers, UV curable materials, plasticizers, salts, etc.

**[0013]** As used herein "colorant" can include dyes, pigments, and/or other particulates that may be suspended or dissolved in an ink vehicle. Dyes are typically water soluble, and therefore, can be desirable for use in many embodiments. However, pigments can also be used in other embodiments. Pigments that can be used include self-dispersed pigments and non self-dispersed dispersed pigments. Self-dispersed pigments include those that have been chemically surface modified with a charge or a polymeric grouping. This chemical modification aids the pigment in becoming and/or substantially remaining dispersed in a liquid vehicle. The pigment can also be a non self-dispersed pigment that utilizes a separate and unattached dispersing agent (which can be a polymer, an oligomer, or a surfactant, for example) in the liquid vehicle or physically coated on the surface of the pigment.

**[0014]** The term "decap" is a measure of how long a nozzle may remain inactive before plugging and how many inkjet architecture firings are required to re-establish proper drop ejection.

**[0015]** Concentrations, amounts, and other numerical data may be presented herein in a range format. It is to be understood that such range format is used merely for convenience and brevity and should be interpreted flexibly to include not only the numerical values explicitly recited as the limits of the range, but also to include all the individual numerical values or sub-ranges

encompassed within that range as if each numerical value and sub-range is explicitly recited. For example, a weight range of approximately 1 wt% to approximately 20 wt% should be interpreted to include not only the explicitly recited concentration limits of 1 wt% to approximately 20 wt%, but also to include individual concentrations such as 2 wt%, 3 wt%, 4 wt%, and sub-ranges such as 5 wt% to 15 wt%, 10 wt% to 20 wt%, etc.

**[0016]** In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present system and method for producing and using a solvent/latex binder system for heated inkjet printing. It will be apparent, however, to one skilled in the art, that the present method may be practiced without these specific details. Reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment. The appearance of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

### **Exemplary Structure**

**[0017]** FIG. 1 illustrates an exemplary system (100) that may be used to apply an inkjet ink (160) to an ink receiving medium (170) according to one exemplary embodiment. As shown in FIG. 1, the present system includes a computing device (110) controllably coupled through a servo mechanism (120) to a moveable carriage (140) having an inkjet dispenser (150) disposed thereon. A material reservoir (130) is also coupled to the moveable carriage (140) and, consequently, to the inkjet print head (150). A number of rollers (180) are located adjacent to the inkjet dispenser (150) configured to selectively position an ink receiving medium (170). While the present exemplary system (100) is described in the context of applying an inkjet ink (160) onto an ink receiving medium (170), the present system and method may be used to mark any number of items with the present inkjet ink. The above-mentioned components

of the present exemplary system (100) will now be described in further detail below.

**[0018]** The computing device (110) that is controllably coupled to the servo mechanism (120), as shown in FIG. 1, controls the selective deposition of an inkjet ink (160) on an ink receiving medium (170). A representation of a desired image or text may be formed using a program hosted by the computing device (110). That representation may then be converted into servo instructions that are housed in a processor readable medium (not shown). When accessed by the computing device (110), the instructions housed in the processor readable medium may be used to control the servo mechanisms (120) as well as the movable carriage (140) and inkjet dispenser (150). The computing device (110) illustrated in FIG. 1 may be, but is in no way limited to, a workstation, a personal computer, a laptop, a personal digital assistant (PDA), or any other processor containing device.

**[0019]** The moveable carriage (140) of the present printing system (100) illustrated in FIG. 1 is a moveable material dispenser that may include any number of inkjet material dispensers (150) configured to dispense the present pigment-based inkjet ink (160). The moveable carriage (140) may be controlled by a computing device (110) and may be controllably moved by, for example, a shaft system, a belt system, a chain system, etc. making up the servo mechanism (120). As the moveable carriage (140) operates, the computing device (110) may inform a user of operating conditions as well as provide the user with a user interface.

**[0020]** As an image or text is printed on an ink receiving medium (170), the computing device (110) may controllably position the moveable carriage (140) and direct one or more of the inkjet dispensers (150) to selectively dispense an inkjet ink at predetermined locations on ink receiving medium (170) as digitally addressed drops, thereby forming the desired image or text. The inkjet material dispensers (150) used by the present printing system (100) may be any type of inkjet dispenser configured to perform the present method including, but in no way limited to, thermally actuated inkjet dispensers, mechanically actuated inkjet dispensers, electrostatically actuated

inkjet dispensers, magnetically actuated dispensers, piezoelectrically actuated dispensers, continuous inkjet dispensers, etc.

**[0021]** As ink is retained in the inkjet dispenser (150), the solvent in the ink begins to evaporate. After some period, the ink may become sufficiently viscous that initial actuation of the inkjet dispenser (150) may not cause ink to be dispensed. Each actuation of the inkjet dispenser (150) may be referred to as a "spit". One performance metric of an ink may be measured by actuating the inkjet dispenser (150) to form a line or other pattern, pausing actuation of the inkjet dispenser for a predetermined period of time while ink remains in the nozzle of the inkjet dispenser (150), and then determining the number of spits performed by the inkjet dispenser before the inkjet dispenser (150) begins to form the line or predetermined pattern. It may be desirable for the inkjet dispenser (150) to begin forming the line or pattern on the first spit.

**[0022]** FIG. 1 also illustrates the components of the present system that facilitate reception of the inkjet ink (160) onto the ink receiving medium (170). As shown in FIG. 1, a number of positioning rollers (180) may transport and/or positionally secure an ink receiving medium (170) during a printing operation. Alternatively, any number of belts, rollers, substrates, or other transport devices may be used to transport and/or positionally secure the ink receiving medium (170) during a printing operation, as is well known in the art. Additionally, any number of heated pick-up rollers (not shown), hot air fans (not shown), or radiation devices (not shown) may be used to apply thermal energy to fix an image on an ink receiving medium.

**[0023]** Another performance metric may be determined by running a highlighter over a standardized test mark on the ink receiving medium (170). The optical density of any resulting smear may then be measured. It may be desirable to maximize the retained optical density of the standardized test mark. Thus, it may be desirable to reduce the optical density of the smear.

### **Exemplary Composition**

**[0024]** In accordance with the present system and method, a system for printing images on a substrate can include an inkjet ink (160) and a

printhead or other material dispenser (150) loaded with the inkjet ink. According to several exemplary embodiments, compositions will be discussed that include a solvent and a surfactant with a low hydrophilic-lipophilic balance (HLB). According to several exemplary embodiments, the composition includes water dispersed polymer colloid particulates and water solubilized styrene-acrylic and/or acrylic polymeric binders with low acid numbers. Such a composition may include a binder system, a low HLB surfactant, a dye or pigment, solvents, and water. In particular, the compositions may include about 0-3% of a binder system with binders having acid numbers below about 250, 0.01- 2% of a low HLB surfactant or surfactant combinations with HLB below about 12, 1-6% colorants, 1-20% solvents, such as glycols, pyrrolidones, or glycol ethers, and the balance water. Further, one embodiment includes a composition having between 2-5% polymer-attached pigment, 5-15% of a solvent mixture of Dantocol DHE and glycerol propoxylate, 0.2-2% surfactant or surfactant mixture such as Surfynol SEF and Surfynol CT-211, 0.4-2% of a binder system comprising a mixture of Joncryl 586 and a high Mw polyurethane with an acid number below 100, and the balance water. Such a composition may provide for high optical density and increased dot gain under hot and/or dry printing conditions, as well as providing increased durability for highlighter smear and wet smudge.

**[0025]** Additionally, according to one exemplary embodiment, the present inkjet ink system may include a cationic fixer fluid configured to fix the ink on a desired substrate. According to one exemplary embodiment, the cationic fixer includes, but is in no way limited to, a crashing agent such as a metal salt or a cationic polymer. In addition to the above-mentioned components, the present exemplary inkjet ink composition may include any number of surfactants, buffering agents, biocides, sequestering agents, viscosity modifiers, humectants, stabilizing agents, and/or other known additives. Further details of each of the above-mentioned inkjet ink components will be provided below.

*Solvent*

**[0026]** The present exemplary inkjet ink system also includes between approximately 1 and 20% solvents. According to one exemplary embodiment, the solvents included in the present exemplary inkjet ink system include a solvent having a vapor pressure less than approximately 0.01 mmHg. According to one exemplary embodiment, a solvent having a vapor pressure less than approximately 0.01 mmHg may include, but is in no way limited to glycerol propoxylate and Dantocol DHE. Other suitable solvents may include, but are not limited to glycols, polyols, pyrrolidones, glycol ethers, and combinations thereof.

*Low HLB Surfactants*

**[0027]** Surfactants may used alone or in combination to achieve an HLB of less than about 12. For example, surfactants may include, without limitation, surfynol surfactants such as Surfynol 465, Surfynol CT 211, and Surfynol SEF; Zonyl FSO, Tergitol TMN -3 (HLB 8.1), Tergitol TMN-6 (HLB 11.6), Surfynol 104 (HLB 4.0), Tergitol 15-s-3 (HLB 8.3), Tergitol 15-s-5 (HLB 10.5), Tergitol 15-s-7 (HLB 12.1), and the like, which are combined to form a surfactant or surfactant combination having HLB of less than about 13.

*Styrene-Acrylic or Acrylic Binder*

**[0028]** As mentioned above, the present exemplary inkjet ink system includes between approximately 0 and 2% styrene-acrylic or acrylic binder with an acid number below approximately 250. According to one exemplary embodiment, the styrene-acrylic or acrylic binder may include, but is in no way limited to styrene-acrylic binders sold under the name Acronal by BASF having an acid number below approximately 250, S C Johnson's Joncryl 678 acrylic resin which has an acid number of 215, and/or acrylic binder emulsions such as S C Johnson's DFC 3030 or S C Johnson's Joncryl 624 acrylic emulsions which have acid numbers of 64 and 50, respectively.

*Colorant*

**[0029]** According to one exemplary embodiment, the present exemplary inkjet ink system includes between approximately 1 to 6% colorant by volume. Specifically, the present exemplary inkjet ink system may include a number of anionic dyes and/or pigments.

**[0030]** Examples of suitable anionic dyes include a large number of water-soluble acid and direct dyes. Specific examples of anionic dyes include Direct Yellow 86, Acid Red 249, Direct Blue 199, Direct Black 168, Direct Yellow 132, Reactive Black 31, Direct Yellow 157, Reactive Yellow 37, Acid Yellow 23, Reactive Red 180, Acid Red 52, Acid Blue 9, Direct Blue 86, Reactive Red 4, Reactive Red 56, Acid Red 92, Reactive Red 31 the Pro-Jet series of dyes available from Avecia Ltd., including Pro-Jet Yellow I, Pro-Jet Magenta I, Pro-Jet Cyan I, Pro-Jet Black I, and Pro-Jet Yellow 1-G; Aminyl Brilliant Red F-B (Sumitomo Chemical Co.); the Duasyn line of "salt-free" dyes available from Hoechst, such as Duasyn Direct Black HEF-SF, Duasyn Black RL-SF, Duasyn Direct Yellow 6G-SF VP216 (, Duasyn Brilliant Yellow GL-SF VP220, Duasyn Acid Yellow XX-SF VP413, Duasyn Brilliant Red F3B-SF VP218, Duasyn Rhodamine B-SF VP353, Duasyn Direct Turquoise Blue FRL-SF VP368, and Duasyn Acid Blue AE-SF VP344; mixtures thereof; and the like. Further examples include Tricon Acid Red 52, Tricon Direct Red 227, and Tricon Acid Yellow 17 (Tricon Colors Incorporated), Bernacid Red 2BMN, Pontamine Brilliant Bond Blue A, BASF X-34, Pontamine, Food Black 2, Catodirect Turquoise FBL Supra Conc. , Carolina Color and Chemical), Special Fast Turquoise 8GL Liquid, Mobay Chemical), Intrabond Liquid Turquoise GLL , Crompton and Knowles), Cibracron Brilliant Red 38-A, Aldrich Chemical), Drimarene Brilliant Red X-2B, Pylam, Inc.), Levafix Brilliant Red E-4B (Mobay Chemical), Levafix Brilliant Red E-6BA (Mobay Chemical), Pylam Certified D&C Red #28, Pylam), Direct Brill Pink B Ground Crude (Crompton & Knowles), Cartasol Yellow GTF Presscake (Sandoz, Inc.), Tartrazine Extra Conc. (FD&C Yellow #5, Acid Yellow 23, Sandoz, Inc.), Catodirect Yellow RL , Carolina Color and Chemical), Cartasol Yellow GTF Liquid Special 110 (Sandoz, Inc.), D&C Yellow #10 (Yellow 3, Tricon), Yellow Shade 16948 (Tricon), Basacid Black X34

(BASF), Carta Black 2GT (Sandoz, Inc.), Neozapon Red 492 (BASF), Orasol Red G (Ciba-Geigy), Direct Brilliant Pink B (Crompton-Knolls), Aizen Spilon Red C-BH (Hodagaya Chemical Company), Kayanol Red 3BL (Nippon Kayaku Company), Levanol Brilliant Red 3BW (Mobay Chemical Company), Levaderm Lemon Yellow (Mobay Chemical Company), Aizen Spilon Yellow C-GNH (Hodagaya Chemical Company), Spirit Fast Yellow 3G, Sirius Supra Yellow GD 167, Cartasol Brilliant Yellow 4GF (Sandoz), Pergasol Yellow CGP (Ciba-Geigy), Orasol Black RL (Ciba-Geigy), Orasol Black RLP (Ciba-Geigy), Savinyl Black RLS (Sandoz), Dermacarbon 2GT (Sandoz), Pyrazol Black BG (ICI Americas), Morfast Black Conc A (Morton-Thiokol), Diazol Black RN Quad (ICI Americas), Orasol Blue GN (Ciba-Geigy), Savinyl Blue GLS (Sandoz, Inc.), Luxol Blue MBSN (Morton-Thiokol), Sevron Blue 5GMF (ICI Americas), and Basacid Blue 750 (BASF); Levafix Brilliant Yellow E-GA, Levafix Yellow E2RA, Levafix Black EB, Levafix Black E-2G, Levafix Black P-36A, Levafix Black PN-L, Levafix Brilliant Red E6BA, and Levafix Brilliant Blue EFFA, all available from Bayer; Procion Turquoise PA, Procion Turquoise HA, Procion Turquoise Ho5G, Procion Turquoise H-7G, Procion Red MX-5B, Procion Red H8B, Procion Red MX 8B GNS, Procion Red G, Procion Yellow MX-8G, Procion Black H-EXL, Procion Black P-N, Procion Blue MX-R, Procion Blue MX-4GD, Procion Blue MX-G, and Procion Blue MX-2GN, all available from ICI Americas; Cibacron Red F-B, Cibacron Black BG, Lanasol Black B, Lanasol Red 5B, Lanasol Red B, and Lanasol Yellow 46, all available from Ciba-Geigy; Baslien Black P-BR, Baslien Yellow EG, Baslien Brilliant Yellow P-3GN, Baslien Yellow M-6GD, Baslien Brilliant Red P-3B, Baslien Scarlet E-2G, Baslien Red E-B, Baslien Red E-7B, Baslien Red M-5B, Baslien Blue E-R, Baslien Brilliant Blue P-3R, Baslien Black P-BR, Baslien Turquoise Blue P-GR, Baslien Turquoise M-2G, Baslien Turquoise E-G, and Baslien Green E-6B, all available from BASF; Sumifix Turquoise Blue G, Sumifix Turquoise Blue H-GF, Sumifix Black B, Sumifix Black H-BG, Sumifix Yellow 2GC, Sumifix Supra Scarlet 2GF, and Sumifix Brilliant Red 5BF, all available from Sumitomo Chemical Company; Intracron Yellow C-8G, Intracron Red C-8B, Intracron Turquoise Blue GE, Intracron Turquoise HA, and Intracron Black RL, all available from Crompton and Knowles, Dyes and

Chemicals Division; Pro-Jet 485; Magenta 377; mixtures thereof; and the like. This list is intended to be merely exemplary, and should not be considered limiting .

**[0031]** Similarly, suitable pigments can be black pigments, white pigments, cyan pigments, magenta pigments, yellow pigments, or the like. Further, pigments can be organic or inorganic particles as is well known in the art. Suitable inorganic pigments include, for example, carbon black. However, other inorganic pigments may be suitable such as titanium oxide, cobalt blue ( $\text{CoO-Al}_2\text{O}_3$ ), chrome yellow ( $\text{PbCrO}_4$ ), and iron oxide. Suitable organic pigments include, for example, azo pigments including diazo pigments and monoazo pigments, polycyclic pigments (e.g., phthalocyanine pigments such as phthalocyanine blues and phthalocyanine greens, perylene pigments, perynone pigments, anthraquinone pigments, quinacridone pigments, dioxazine pigments, thioindigo pigments, isoindolinone pigments, pyranthrone pigments, and quinophthalone pigments), insoluble dye chelates (e.g., basic dye type chelates and acidic dye type chelate), nitropigments, nitroso pigments, and the like. Representative examples of phthalocyanine blues include copper phthalocyanine blue and derivatives thereof (Pigment Blue 15). Representative examples of quinacridones include Pigment Orange 48, Pigment Orange 49, Pigment Red 122, Pigment Red 192, Pigment Red 202, Pigment Red 206, Pigment Red 207, Pigment Red 209, Pigment Violet 19 and Pigment Violet 42. Representative examples of anthraquinones include Pigment Red 43, Pigment Red 194 (Perinone Red), Pigment Red 216 (Brominated Pyranthrone Red) and Pigment Red 226 (Pyranthrone Red). Representative examples of perylenes include Pigment Red 123 (Vermillion), Pigment Red 149 (Scarlet), Pigment Red 179 (Maroon), Pigment Red 190 (Red), Pigment Violet 19, Pigment Red 189 (Yellow Shade Red) and Pigment Red 224. Representative examples of thioindigoids include Pigment Red 86, Pigment Red 87, Pigment Red 88, Pigment Red 181, Pigment Red 198, Pigment Violet 36, and Pigment Violet 38. Representative examples of heterocyclic yellows include Pigment Yellow 1, Pigment Yellow 3, Pigment Yellow 12, Pigment Yellow 13, Pigment Yellow 14, Pigment Yellow 17, Pigment Yellow 65, Pigment Yellow 73, Pigment Yellow 74,

Pigment Yellow 151, Pigment Yellow 117, Pigment Yellow 128 and Pigment Yellow 138. Such pigments are commercially available in either powder or press cake form from a number of sources including, BASF Corporation, Engelhard Corporation and Sun Chemical Corporation.

**[0032]** Examples of black pigments that can be used include carbon pigments. The carbon pigment can be almost any commercially available carbon pigment that provides acceptable optical density and print characteristics. Carbon pigments suitable for use in the present system and method include, without limitation, carbon black, graphite, vitreous carbon, charcoal, and combinations thereof. Such carbon pigments can be manufactured by a variety of known methods such as a channel method, a contact method, a furnace method, an acetylene method, or a thermal method, and are commercially available from such vendors as Cabot Corporation, Columbian Chemicals Company, Degussa AG, and E.I. DuPont de Nemours and Company. Suitable carbon black pigments include, without limitation, Cabot pigments such as MONARCH 1400, MONARCH 1300, MONARCH 1100, MONARCH 1000, MONARCH 900, MONARCH 880, MONARCH 800, MONARCH 700, CAB-O-JET 200, CAB-O-JET 300, REGAL, BLACK PEARLS, ELFTEX, MOGUL, and VULCAN pigments; Columbian pigments such as RAVEN 7000, RAVEN 5750, RAVEN 5250, RAVEN 5000, and RAVEN 3500; Degussa pigments such as Color Black FW 200, RAVEN FW 2, RAVEN FW 2V, RAVEN FW 1, RAVEN FW 18, RAVEN S160, RAVEN FW S170, Special Black 6, Special Black 5, Special Black 4A, Special Black 4, PRINTEX U, PRINTEX 140U, PRINTEX V, and PRINTEX 140V; and TIPURE R-101 available from Dupont. The above list of pigments includes unmodified pigment particulates, small molecule attached pigment particulates, and polymer-dispersed pigment particulates.

**[0033]** Similarly, a wide variety of colored pigments can be used with the present system and method, therefore the following listing is not intended to be limiting. For example, colored pigments can be blue, brown, cyan, green, white, violet, magenta, red, orange, yellow, as well as mixtures thereof. The following color pigments are available from Cabot Corp.: CABO-JET 250C,

CABO-JET 260M, and CABO-JET 270Y. The following color pigments are available from BASF Corp.: PALIOGEN Orange, PALIOGEN Orange 3040, PALIOGEN Blue L 6470, PALIOGEN Violet 5100, PALIOGEN Violet 5890, PALIOGEN Yellow 1520, PALIOGEN Yellow 1560, PALIOGEN Red 3871K, PALIOGEN Red 3340, HELIOGEN Blue L 6901F, HELIOGEN Blue NBD 7010, HELIOGEN Blue K 7090, HELIOGEN Blue L 7101F, HELIOGEN Blue L6900, L7020, HELIOGEN Blue D6840, HELIOGEN Blue D7080, HELIOGEN Green L8730, HELIOGEN Green K 8683, and HELIOGEN Green L 9140. The following pigments are available from Ciba-Geigy Corp.: CHROMOPHTAL Yellow 3G, CHROMOPHTAL Yellow GR, CHROMOPHTAL Yellow 8G, IGRAZIN Yellow 5GT, IGRALITE Rubine 4BL, IGRALITE Blue BCA, MONASTRAL Magenta, MONASTRAL Scarlet, MONASTRAL Violet R, MONASTRAL Red B, and MONASTRAL Violet Maroon B. The following pigments are available from Heubach Group: DALAMAR Yellow YT-858-D and HEUCOPHTHAL Blue G XBT-583D. The following pigments are available from Hoechst Specialty Chemicals: Permanent Yellow GR, Permanent Yellow G, Permanent Yellow DHG, Permanent Yellow NCG-71, Permanent Yellow GG, Hansa Yellow RA, Hansa Brilliant Yellow 5GX-02, Hansa Yellow-X, NOVOPERM Yellow HR, NOVOPERM Yellow FGL, Hansa Brilliant Yellow 10GX, Permanent Yellow G3R-01, HOSTAPERM Yellow H4G, HOSTAPERM Yellow H3G, HOSTAPERM Orange GR, HOSTAPERM Scarlet GO, HOSTAPERM Pink E, Permanent Rubine F6B, and the HOSTAFINE series. The following pigments are available from Mobay Corp.: QUINDO Magenta, INDOFAST Brilliant Scarlet, QUINDO Red R6700, QUINDO Red R6713, and INDOFAST Violet. The following pigments are available from Sun Chemical Corp.: L74-1357 Yellow, L75-1331 Yellow, and L75-2577 Yellow. Other examples of pigments can include Normandy Magenta RD-2400, Permanent Violet VT2645, Argyle Green XP-111-S, Brilliant Green Toner GR 0991, Sudan Blue OS, PV Fast Blue B2GO1, Sudan III, Sudan II, Sudan IV, Sudan Orange G, Sudan Orange 220, Ortho Orange OR 2673, Lithol Fast Yellow 0991K, Paliotol Yellow 1840, Lumogen Yellow D0790, Suco-Gelb L1250, Suco- Yellow D1355, Fanal Pink D4830, Cinquasia Magenta, Lithol Scarlet D3700, Toluidine

Red, Scarlet for Thermoplast NSD PS PA, E. D. Toluidine Red, Lithol Rubine Toner, Lithol Scarlet 4440, Bon Red C, Royal Brilliant Red RD-8192, Oracet Pink RF, and Lithol Fast Scarlet L4300. These pigments are available from commercial sources such as Hoechst Celanese Corporation, Paul Uhlich, BASF, American Hoechst, Ciba-Geigy, Aldrich, DuPont, Uguine Kuhlman of Canada, Dominion Color Company, Magruder, and Matheson. Examples of other suitable colored pigments are described in the Colour Index, 3rd edition (The Society of Dyers and Colourists, 1982).

**[0034]** Other pigments not specifically listed can also be suitable for use with the present exemplary system. The above-illustrated pigments can be used singly or in combination of two or more. Typically, the pigments of the present system and method can be from about 10 nm to about 10  $\mu$ m and in one aspect can be from 10 nm to about 500 nm in diameter, although sizes outside this range can be used if the pigment can remain dispersed and provide adequate color properties. In one detailed aspect of the present system and method, the pigment can comprise from about 1% to about 6% by weight of the inkjet ink composition.

#### *Water*

**[0035]** As mentioned above, the balance of the present exemplary inkjet ink system includes water. According to one exemplary embodiment, the balance of the present exemplary inkjet ink system is comprised of de-ionized water.

**[0036]** In addition to water, the balance of the present exemplary inkjet ink system may also include any number of buffering agents and/or biocides. Any number of commonly known buffers may be used to establish a desired pH level in the inkjet ink system. Additionally, various biocides can be used to inhibit growth of undesirable microorganisms. Several examples of suitable biocides include, but are in no way limited to, benzoate salts, sorbate salts, commercial products such as NUOSEPT (Nudex, Inc., a division of Huls America), UCARCIDE (Union Carbide), VANCIDE (RT Vanderbilt Co.), and PROXEL (ICI Americas) and other known biocides. Typically, such biocides

comprise less than about 5 wt% of the inkjet ink composition and often from about 0.05 wt% to about 2 wt%.

#### *Cationic Fixing Fluid*

**[0037]** As mentioned previously, a cationic fixing fluid may also be associated with the present exemplary inkjet ink system configured to fix the ink on a desired substrate. According to the present exemplary embodiment, the cationic fixing fluid may be a solution composition that comprises a liquid vehicle and a "crashing agent." According to one exemplary embodiment, the liquid vehicle combined with the crashing agent may be configured to be chemically stable, and can be configured for inkjet printing. The crashing agent can be a cationic polymer, a multivalent metal ion or ionic group, and/or an organic acid. The crashing agent is typically configured to precipitate with at least one compositional component of an associated inkjet ink (to be overprinted or under-printed on a substrate therewith). The compositional component that precipitates with the crashing agent can be an anionic dye or a surfactant, for example.

**[0038]** According to one exemplary embodiment, the fixer composition can be stored separately from the inkjet ink, and the fluid dispensing system can be configured for overprinting or under-printing the fixer composition with respect to the inkjet ink. Further, the present exemplary inkjet ink and the cationic fixer fluid can be present in two separate inkjet pens, or alternatively, can be present in two separate reservoirs of a common inkjet pen.

**[0039]** According to the present exemplary embodiment, the crashing agent included in the cationic fixing fluid may be any single chemical or combination of chemicals in a fixer composition that can facilitate the desolubilization or precipitation of one or more component(s) of an inkjet ink. Precipitation of the anionic dye can impact the waterfastness of the inkjet image. Precipitation of non-colorants, such as anionic surfactants, can provide advantages in bleed control. The desolubilizing can be accomplished by proton transfer from collision or close proximity of the crashing agent with the colorant and/or another inkjet ink component, or alternatively, the desolubilizing can be

accomplished by component associations induced by the crashing agent and/or component associations occurring with the crashing agent. Other crashing or reaction mechanisms can also occur.

**[0040]** As mentioned, according to one exemplary embodiment, the crashing agent may be a cationic polymer, a multivalent ion or ionic group, or an acid, for example. Many possible crashing agents within these categories, or others, can be used to crash one or more components of the inkjet ink. For example, if the crashing agent is a cationic polymer, it can be one or more of polyvinylpyridines, polyalkylaminoethyl acrylates, polyalkylaminoethyl methacrylates, poly(vinyl imidazole), polyethyleneimines, polybiguanides, polyguanides, polyvinylamines, polyallylamines, polyacrylamines, polyacrylamides, polyquaternaryamines, cationic polyurathenes, aminecelluloses, and/or polysacchride amines.

**[0041]** Alternatively, if the crashing agent includes a multivalent ion or ionic group, it can be provided by one or more of multivalent metal nitrates (such as aluminum nitrates, calcium nitrates, and magnesium nitrates), EDTA salts, phosphonium halide salts, organic acids, and/or chloride salts. The chloride salt can be, for example, calcium chloride, magnesium chloride, or aluminum chloride.

**[0042]** Further, according to one exemplary embodiment, If the crashing agent is an acid, it can be provided by one or more of succinic acid, glycolic acid, citric acid, nitric acid, hydrochloric acid, phosphoric acid, sulfuric acid, polyacrylic acid, acetic acid, malonic acid, maleic acid, ascorbic acid, glutaric acid, fumaric acid, tartaric acid, lactic acid, nitrous acid, boric acid, carbonic acid, carboxylic acids such as formic acid, chloroacetic acid, dichloroacetic acid, trichloroacetic acid, fluoroacetic acid, trimethylacetic acid, methoxyacetic acid, mercaptoacetic acid, propionic acid, butyric acid, valeric acid, caprioc acid, caprylic acid, capric acid, lauric acid, myristic acid, palmitic acid, stearic acid, oleic acid, rinolic acid, rinoleic acid, cyclohexanecarboxylic acid, phenylacetic acid, benzoic acid, o-toluic acid, m-toluic acid, p-toluic acid, o-chlorobenzoic acid, m-chlorobenzoic acid, p-chlorobenzoic acid, o-bromobenzoic acid, m-bromobenzoic acid, p-bromobenzoic acid, o-nitrobenzoic

acid, m-nitrobenzoic acid, p-nitrobenzoic acid, oxalic acid, adipic acid, phthalic acid, isophthalic acid, terephthalic acid, salicylic acid, p-hydrobenzoic acid, anthranilic acid, m-aminobenzoic acid, p-aminobenzoic acid, benzenesulfonic acid, methylbenzenesulfonic acid, ethylbenzenesulfonic acid, dodecylbenzenesulfonic acid, 5-sulfosalicylic acid, 1-sulfonaphthalene, hexanesulfonic acid, octanesulfonic acid, dodecanesulfonic acid, amino acids such as glycine, alanine, valine,  $\alpha$ -aminobutyric acid,  $\alpha$ -aminobutyric acid,  $\alpha$ -alanine, taurine, serine,  $\alpha$ -amino-n-caprioc acid, leucine, norleucine, and/or phenylalanine.

### EXAMPLE

**[0043]** The following example illustrates the embodiments of the system and method that are presently best known. However, it is to be understood that the following is only exemplary or illustrative of the application of the principles of the present system and method. Numerous modifications and alternative compositions, methods, and systems may be devised by those skilled in the art without departing from the spirit and scope of the present system and method. The appended claims are intended to cover such modifications and arrangements. Thus, while the present system and method has been described above with particularity, the following example provides further detail in connection with what is presently deemed to be the most practical and preferred embodiments of the present system and method.

#### Example 1

**[0044]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 1. The components were combined to form an inkjettable ink:

Table 1

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.8
Avecia PU resin	1.0

Zonyl FSO surfactant	0.02
Surfynol 465 surfactant (HLB: 13)	0.30
Dantocol DHE	6.0
LEG-1	1.5
Water	Balance

**[0045]** The above mentioned inkjet ink formulation was printed on four standard sheets of office paper with a cationic fixer fluid. This combination of ink and fixer provides high optical density and near laser durability for highlighter smear and wet smudge on office paper when printed with a heated printing system. Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.30. Further, it was found the composition had a one-pass highlighter smear of about 33 mOD and a two-pass highlighter smear of about 94 mOD. The composition also exhibited an average or two spits to recover after a one second inactivity interval and five spits to cover after a ten second inactivity interval. The Joncryl and PU resins may be used to improve highlighter smear, but they may be omitted as desired.

**[0046]** The polymer-attached pigment has a styrene-acrylic polymer attached with an acid number of 100 to 250 and a molecular weight of 1,000 to 20,000. The PU resin has an acid number of 40 to 150 and a molecular weight of 3000 to 400,000.

**[0047]** A standardized test was performed with a control ink without a low HLB surfactant. The standardized test ink included components combined as follows:

Table 2

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	1.8
Zonyl FSO surfactant	0.02
Surfynol SEF surfactant (HLB: 4-5)	1.5
2-Pyrroldone	7.0
1,2-Hexanediol	4.0
LEG-1	1.5
Water	balance

**[0048]** Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.32. The composition had a one-pass highlighter smear of about 23 mOD and a two-pass highlighter smear of about 99 mOD. The composition also exhibited an average or two spits to recover after a one second inactivity interval and five spits to recover after a ten second inactivity interval.

#### Example 2

**[0049]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 3. The components were combined to form an inkjettable ink:

Table 3

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.4
Avecia PU resin	1.0
Zonyl FSO surfactant	0.02
Surfynol CT 211 surfactant (HLB: 8-11)	0.20
Dantocol DHE	9.0
LEG-1	1.5
Water	balance

**[0050]** Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.42. Further, it was found composition had a one-pass highlighter smear of about 25 mOD and a two-pass highlighter smear of about 83 mOD. The composition also exhibited an average or two spits to recover after a one second inactivity interval and four spits to recover after a ten second inactivity interval.

#### Example 3

**[0051]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 4. The components were combined to form an inkjettable ink:

Table 4

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.4
Avecia PU resin	1.0
Zonyl FSO surfactant	0.02
Surfynol SEF surfactant (HLB: 4-5)	0.50
Dantocol DHE	9.0
LEG-1	1.5
Water	balance

**[0052]** It was found that resulting mark had an average black optical density (KOD) of about 1.38. Further, it was found the composition had a one-pass highlighter smear of about 18 mOD and a two-pass highlighter smear of about 70 mOD. The composition also exhibited an average or three spits to recover after a one second inactivity interval and five spits to recover after a ten second inactivity interval.

#### Example 4

**[0053]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 5. The components were combined to form an inkjettable ink:

Table 5

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.4
Avecia PU resin	1.0
Zonyl FSO surfactant	0.02
Surfynol CT 211 surfactant (HLB: 8-11)	0.50
Surfynol SEF surfactant (HLB: 4-5)	0.20
Dantocol DHE	6.0
LEG-1	1.5
Water	balance

**[0054]** Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.37. Further, it was found composition had a one-pass highlighter smear of about 16 mOD and a two-pass

highlighter smear of about 48 mOD. The composition also exhibited an average or three spits to recover after a one second inactivity interval and six spits to cover after a ten second inactivity interval.

#### Example 5

**[0055]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 6. The components were combined to form an inkjettable ink:

Table 6

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.4
Avecia PU resin	1.0
Zonyl FSO surfactant	0.02
Surfynol CT 211 surfactant (HLB: 8-11)	1.00
Dantocol DHE	6.0
LEG-1	1.5
Water	balance

**[0056]** Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.38. Further, it was found composition had a one-pass highlighter smear of about 10 mOD and a two-pass highlighter smear of about 54 mOD. The composition also exhibited an average or three spits to recover after a one second inactivity interval and five spits to cover after a ten second inactivity interval.

#### Example 6

**[0057]** An inkjet ink in accordance with the present system and method was prepared using components within the ranges shown in Table 7. The components were combined to form an inkjettable ink:

Table 7

Cabot Polymer-attached pigment	3.0
Joncryl 586 resin	0.4
Avecia PU resin	1.0
Zonyl FSO surfactant	0.02
Surfynol SEF surfactant (HLB: 4-5)	1.00
Dantocol DHE	6.0
LEG-1	1.5
Water	balance

**[0058]** Upon examination, it was found that resulting mark had an average black optical density (KOD) of about 1.36. Further, it was found composition had a one-pass highlighter smear of about 10 mOD and a two-pass highlighter smear of about 40 mOD. The composition also exhibited an average or three spits to recover after a one second inactivity interval and six spits to cover after a ten second inactivity interval. Accordingly, as demonstrated in the above examples, formulation of an inkjet ink with an HLB of less than about 13 provides for increased optical density while allowing for decreased smear and acceptable decap recovery.

**[0059]** The preceding description has been presented only to illustrate and describe exemplary embodiments of the present system and method. It is not intended to be exhaustive or to limit the system and method to any precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the system and method be defined by the following claims.

## CLAIMS


## WHAT IS CLAIMED IS:

1. A jettable ink composition, comprising:  
between 0.1 and 3% of a binder system;  
between 1 and 6% colorant;  
between 1 and 20% solvents with a vapor pressure less than 0.01 mmHg;  
a surfactant having a hydrophilic-lipophilic balance below about 13; and  
water.
2. The composition of claim 1, wherein said binder system has an acid number below 250.
3. The composition of claim 1, wherein said colorant comprises an anionic dye.
4. The composition of claim 1, wherein said colorant comprises an anionic pigment.
5. The composition of claim 1, wherein said solvent comprises Dantocol DHE and glycerol propoxylate.
6. The composition of claim 1, further comprising a cationic fixer fluid including a crashing agent.
7. The composition of claim 1, wherein said binder system comprises Joncryl 586 and a high Mw urethane with an acid number below 100.
8. The composition of claim 1, wherein said inkjet ink system is free of hexanediol.

9. The composition of claim 1, wherein said colorant includes 2-5% polymer-attached pigment, said solvent includes 5-15% of a mixture including Dantocol DHE and glycerol propoxylate; said surfactant includes 0.2-2% of Surfynol SEF and Surfynol CT-211, and said binder comprises 0.4-2% of a binder system including Joncryl 586 and a high Mw polyurethane with an acid number below 100.

10. An inkjet ink system, comprising:  
an anionic jettable ink; and  
a cationic fixer fluid;  
wherein said anionic jettable ink includes:  
    between 0.1 and 3% of a binder system;  
    between 1 and 6% colorant;  
    between 1 and 20% solvents with a vapor pressure less than 0.01 mmHg;  
    a surfactant having a hydrophilic-lipophilic balance below about 13; and  
    water.

1/1

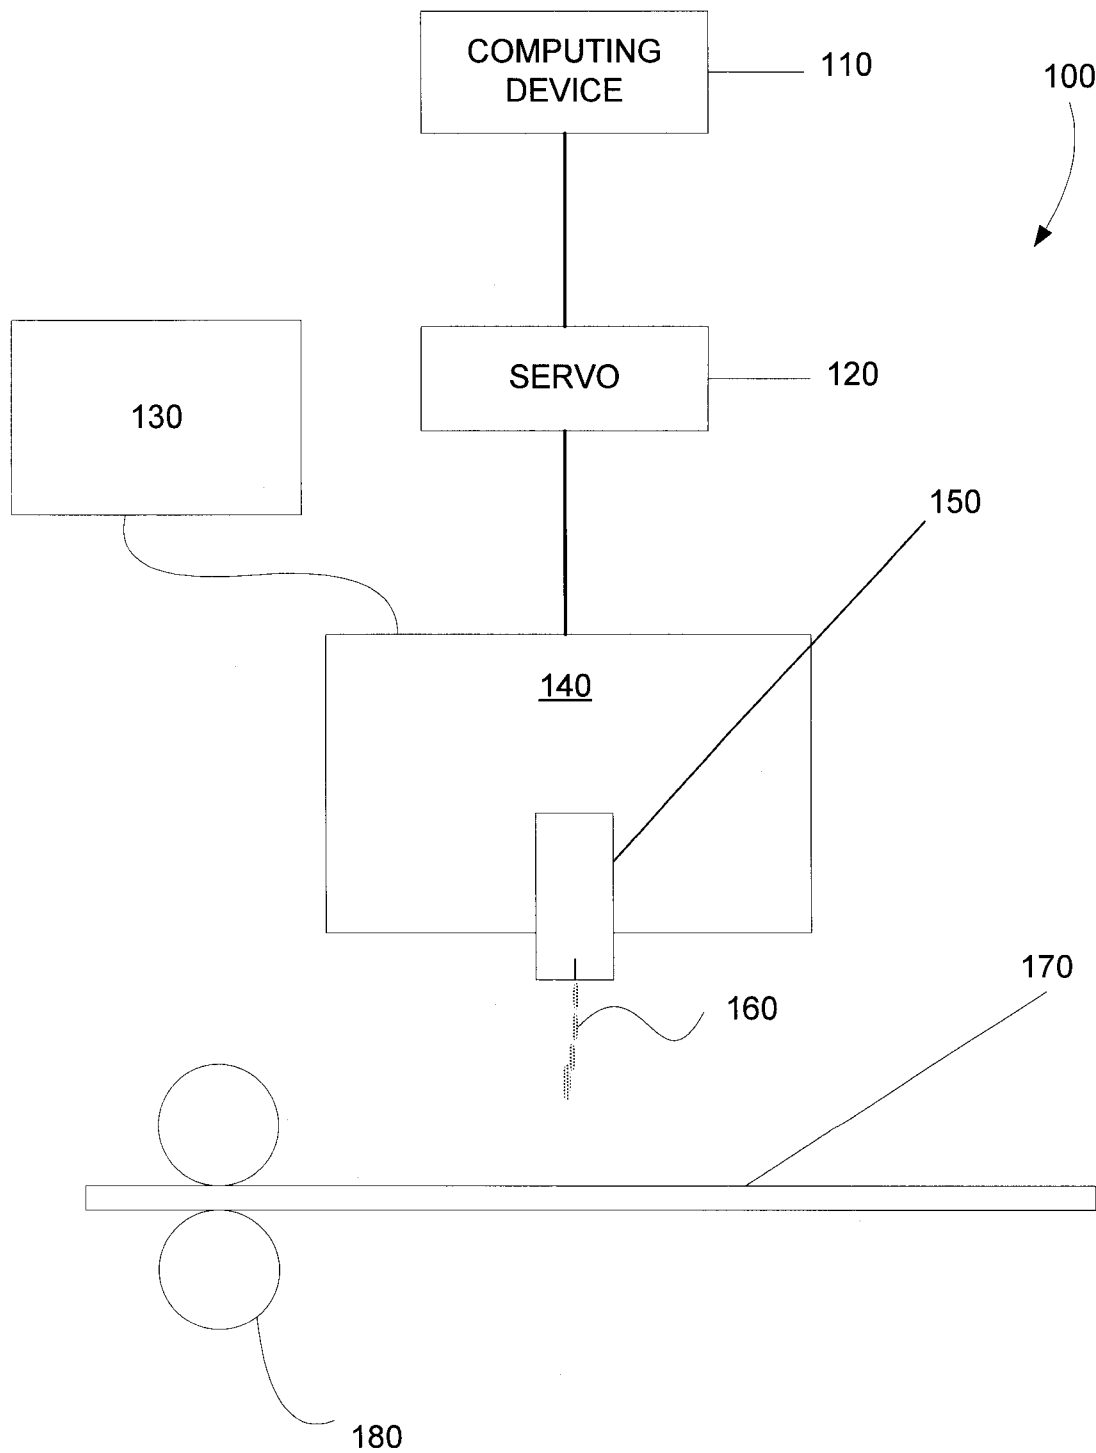

**FIG. 1**