

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 010 873 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.05.2005 Bulletin 2005/19

(51) Int Cl.7: **F01P 5/10, F01P 7/16**

(21) Application number: **99125269.3**

(22) Date of filing: **17.12.1999**

(54) **Cooling water circulating apparatus**

Kühlwasserzirkulationsgerät

Appareil de circulation pour l'eau de refroidissement

(84) Designated Contracting States:
DE FR GB

(30) Priority: **18.12.1998 JP 36099898**

(43) Date of publication of application:
21.06.2000 Bulletin 2000/25

(73) Proprietor: **AISIN SEIKI KABUSHIKI KAISHA**
Kariya City Aichi Pref. (JP)

(72) Inventors:
• **Hara, Naohiro**
Chita-gun, Aichi-ken (JP)

• **Ozawa, Yasuo**
Kariya-shi, Aichi-ken (JP)

(74) Representative: **Pellmann, Hans-Bernd, Dipl.-Ing.**
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4-6
80336 München (DE)

(56) References cited:
US-A- 4 662 320 **US-A- 4 768 484**
US-A- 5 095 855

EP 1 010 873 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] This invention relates to a cooling water circulating apparatus adapted to send out cooling water flowing thereto to an engine or a radiator by a water pump.

DESCRIPTION OF THE RELATED ART

[0002] The known cooling apparatuses for internal combustion engines include an apparatus disclosed in Japanese Patent Laid-Open No. 88582/1997. The techniques included in this apparatus are to reduce the limitation placed on the arrangement of various auxiliary machines driven via a crankshaft, a belt and a chain, by driving a cooling water supply pump by a cam shaft, fix the water pump to a cylinder head so as to join a discharge port of the water pump to an inlet port of a cooling water passage on a suction side of the cylinder head and thereby form the suction side cooling water passage as a water passage on a discharge side of the water pump, whereby, even when a resistance of the suction side cooling water passage is large, a negative pressure on a suction side of the water pump increases to prevent the occurrence of cavitation therein.

[0003] However, in such a related art apparatus, the cooling water is circulated by a water pump alone which is driven by a cam shaft rotated with a rotational frequency 1/2 times as high as that of the crankshaft, so that, when the temperature of the cooling water increases higher than a predetermined level, a required flow rate of the cooling water cannot be secured unless the capacity of the water pump is increased. In order to secure a required flow rate of the cooling water, the cooling water discharge performance (head) of the pump has to be improved, and, in order to increase the pump head, the dimensions of the water pump have to be increased. This causes a driving force of the water pump to increase, so that the fuel consumption also increases.

SUMMARY OF THE INVENTION

[0004] Therefore, the technical problem to be solved by the present invention is how to provide a cooling water circulating apparatus capable of securing a required flow rate of cooling water without increasing the heads of water pumps.

[0005] To solve the problem, the invention provides a cooling water circulating apparatus as defined in claim 1. The apparatus is adapted to circulate cooling water through an engine or a radiator, including a first water pump which has a first supply port for supplying thereto cooling water which is to flow through the interior of an engine, and a first discharge port for discharging therefrom the supplied cooling water to the engine

again, and which is connected to and rotated with a cam shaft of the engine, a control mechanism adapted to cut off a flow of the cooling water, which is directed from a radiator to the first supply port, when the temperature of the cooling water is not higher than a predetermined level, and communicate the radiator and first supply port with each other when the temperature of the cooling water is higher than the predetermined level, and a second water pump which has a second supply port for supplying thereto cooling water which is to flow through the interior of the engine, and a second discharge port for discharging therefrom the supplied cooling water to the supply port of the first water pump, and which is electrically rotated in accordance with the temperature of the cooling water.

[0006] According to the first aspect, when the temperature of the cooling water is not higher than a predetermined level, the first water pump is rotated with the cam shaft of the engine, and receives the supply of cooling water from the first supply port and discharge the same toward the first discharge port. The discharged cooling water cools the engine on the inner side thereof. When the temperature of the cooling water becomes higher than a predetermined level, the radiator and first supply port are communicated with each other by the control mechanism, and the cooling water discharged from the first water pump is supplied to the engine and radiator. Since the cam shaft is rotated with a rotational frequency 1/2 times as high as that of the crankshaft, it is considered that, when the cooling water is discharged to the engine and radiator, a discharge rate of the first water pump becomes short in some cases. According to the invention, the second water pump is rotated electrically in accordance with the temperature of the cooling water. Therefore, when the driving of the first water pump alone causes a discharge rate of the cooling water to become short, the second water pump is rotated to enable the shortage of the discharge rate to be filled up. Owing to this operation, a suitable quantity of cooling water can always be circulated. Since the second water pump is electrically operated, the rotational frequency thereof can be controlled, and the flow rate of the cooling water can also be arbitrarily regulated.

[0007] A case where the second water pump is set so that it is not rotated when the temperature of the cooling water is not higher than a predetermined level, and rotated electrically when the temperature of the cooling water is higher than a predetermined level as described in the statement of a second aspect of the invention will be discussed. When the temperature of the cooling water becomes higher than a predetermined level, the second water pump is driven, and the control mechanism communicates the radiator and first supply port with each other. Consequently, the cooling water is supplied from the second supply port, and discharged from the second discharge port.

[0008] Since the cooling water is thus circulated at a required flow rate through both the engine and radiator

by rotating the electrically driven second water pump, it becomes possible to secure a required flow rate of the cooling water without increasing the dimensions of the first water pump even when the first water pump is driven with the cam shaft.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

Fig. 1 is a system diagram of a mode of embodiment of the cooling water circulating apparatus according to the present invention;

Fig. 2 is a sectional view of a first water pump in the mode of embodiment;

Fig. 3 is a sectional view of a second water pump in the mode of embodiment; and

Fig. 4 is a side view taken in the direction of an arrow A in Fig. 3.

DESCRIPTION OF THE PREFERRED EMBODIMENT:

[0010] A mode of embodiment of the present invention will now be described with reference to the drawings. Figs. 1 to 4 are drawings showing the cooling water circulating apparatus of a mode of embodiment of the present invention, wherein Fig. 1 is a system diagram of a cooling water circulating apparatus 1, Fig. 2 a sectional view of a first water pump, Fig. 3 a sectional view of a second water pump, and Fig. 4 a characteristic diagram of the second water pump.

[0011] The cooling water circulating apparatus 1 is an apparatus for circulating cooling water through an engine 2 and a radiator 3, and provided with a first water pump 4 which has a first supply port 5 for supplying cooling water flowing through the engine 2, and a first discharge port 6 for discharging the supplied cooling water to the engine 2 again, and which is connected to and rotated with a cam shaft 2A (two-dot chain lines in Fig. 2) of the engine 2, a thermostat 7 as a control mechanism adapted to cut off a flow of the cooling water which is supplied from the radiator 3 to the first supply port 5 when the temperature of the cooling water is not higher than a predetermined level, and communicate the radiator 3 and first supply port 5 when the temperature of the cooling water is higher than a predetermined level, and a second water pump 8 which has a second supply port 9 for supplying the cooling water flowing through the interior of the engine 2, and a second discharge port 10 for discharging the supplied cooling water toward the first supply port 5 of the first water pump 4, and which is not rotated when the temperature of the cooling water is not higher than a predetermined level, and rotated electrically when the temperature of the cooling water is higher than a predetermined level, the cooling water being circulated through the interior of the radiator 3 in accordance with the temperature of the cooling water.

[0012] The construction of each constituent part will

be described in detail. As shown in Fig. 2, the first water pump 4 is formed of a driving shaft 11 rotated with the cam shaft 2A, a rotor 12 mounted on a free end portion of the driving shaft 11, first supply port 5 for supplying the cooling water therefrom, and the first discharge port 6 for discharging the supplied cooling water to the engine 2, and this water pump 4 is rotated with the same rotational frequency as the cam shaft 2A, i.e., with a rotational frequency 1/2 of that of the crankshaft.

[0013] As shown in Fig. 3, the second water pump 8 is a DC brushless motor provided with a metal rotor 15 for sucking and discharging the cooling water, a rotary shaft 17 which has the rotor 15 mounted fixedly on a free end portion thereof, and which is rotated with the rotor 15, a housing 18 fixed to the engine 2, bearings 19, 20 supporting the rotary shaft 17 on the housing 18 so that the rotary shaft 17 can be rotated relatively to the housing 18, a magnet 16 formed on an outer circumferential surface of the rotary shaft 17, cores 21 arranged on an inner circumference of the housing 18, and a plurality of coils 22 wound around each core 21 and forming a magnetic circuit with the magnet 16. The second water pump 8 is formed so that, when an electric current flows in the coils 22, the rotary shaft 17 is rotated with the magnet 16 with the rotor 15 also rotated, whereby the cooling water flowing from the second supply port 9 is discharged from the second discharge port 10. The rotational frequency of the rotor 15 can be varied arbitrarily within the volume of the pump in accordance with the level of the electric current flowing in the coils 22. In this mode of embodiment, a CPU (not shown) rotates the second water pump 8 by controlling the electric current, which flows in the coils 22, in accordance with the temperature of the cooling water.

[0014] The construction of the second water pump 8 will further be described with reference to Fig. 4. As shown in Fig. 4, the second discharge port 10 is formed so as to deviate from the center of rotation of the rotor 15, and blades 15a of the rotor 15 so as to extend radially with respect to the mentioned center of rotation. The direction of rotation of the rotary shaft 17 is switched by changing the direction of the electric current flowing in the coils 22.

[0015] In the cooling water circulating apparatus 1 in this mode of embodiment, a hot water type heater 23 is provided between the engine 2 and second supply port 9, and the warmed cooling water is subjected to heat exchange in the heater 23, a blower (not shown) being operated to warm the interior of a vehicle. Since the second water pump 8 is electrically driven, the rotational frequency can be controlled with a high accuracy, and a flow rate of the cooling water sent to the heater 23 is secured, so that the performance of the heater is improved.

[0016] The thermostat 7 is a wax type thermostat adapted to switch the circulation and cut off of the cooling water, which is sent from the radiator 3 to the first water pump 4, from one to the other by utilizing the ex-

pansion and contraction, which occur in accordance with the temperature, of thermowax.

[0017] The operation of the cooling water circulating apparatus 1 will be described. When the engine 2 is started to cause the driving shaft 11 and the rotor 12 of the first water pump 4 to be rotated in accordance with the rotation of the cam shaft 2A, the cooling water is supplied from the first supply port 5 owing to pumping actions of the first water pump 4, and the supplied cooling water is discharged toward the first discharge port 6.

[0018] When the temperature of the cooling water during a cooling operation is lower than a predetermined level, the cooling water is not circulated in the radiator 3 so as to rapidly warm the engine 2. In this case, the thermostat 7 is closed to cut off a flow of the cooling water from the radiator 3 to the first supply port 5. The second water pump 8 is not rotated. During this time, the cooling water is discharged from the first discharge port 6 of the first water pump 4 into the interior of the engine 2, and flows in the interior of the engine 2 and then into the supply 9 port of the second water pump 8 via the heater 23. Since the second water pump 8 is not rotated, the cooling water flows from the second supply port 9 into the second discharge port 10, and then into the first supply port 5 of the first water pump 4, and the cooling water is thereafter discharged from the first discharge port 6 owing to the pumping actions. The cooling water discharged from the first discharge port 6 flows in the interior of the engine 2, and then returns to the first supply port 5 via the thermostat 7, the resultant cooling water being then circulated in the interior of the engine 2 again. This operation is repeated until the temperature of the cooling water reaches a predetermined level.

[0019] When the temperature of the cooling water in the engine 2 in this condition becomes not lower than a predetermined level, it is necessary to regulate this temperature so as to maintain the temperature of the water in the engine 2 at a predetermined level. In this case, the thermostat 7 is opened, and the radiator 3 and first supply port 5 communicate with each other, so that the cooling water cooled in the radiator 3 is supplied to the first water pump 4 with the cooling water circulated through the engine 2. The cooling water flowing through the interior of the engine 2 and warmed is sent to the heater 23, and then passes through the second supply port 9 of the second water pump 8, the resultant cooling water being discharged from the second discharge port 10 thereof. The cooling water is then supplied to the first supply port 5 of the first water pump 4, and to the interior of the engine 2 again. Therefore, the cooling water cooled by the radiator 3 and heater 23 is supplied to the engine 2, and the temperature of the water in the engine 2 is thereby maintained at a suitable level. Since the second water pump 8 is driven when the temperature of the cooling water attains a level not lower than a predetermined level, the pump head of the cooling water circulating apparatus 1 as a whole becomes equal to the sum of the pump head of the first water pump 4 and that of

the second water pump 8, and a flow rate of the cooling water to the engine 2 and radiator 3 is secured.

[0020] According to this mode of embodiment, using the electrically driven second water pump 8 makes it possible to secure a flow rate of the cooling water circulated through the radiator 3 and engine 2, without increasing the head of the first water pump 4 rotated with the cam shaft 2A. This enables the fuel consumption to be improved.

[0021] Moreover, in this mode of embodiment, the second discharge port 10 of the second water pump 8 is formed so as to deviate from the center of rotation of the rotor 15, and the blades 15a of the rotor 15 so as to extend radially with respect to the same center of rotation. Accordingly, it becomes possible to control the flow of the cooling water by rotating the rotor 15 both forward and backward. Owing to this construction, the cooling water flows, from the second water pump 8 to the first water pump 4 without passing through the thermostat 7 when the cooling water flowing out from the engine 2 is sent to the first water pump 4. Therefore, the thermostat 7 can be formed so that the cooling water flowing out from the engine 2 is not supplied thereto. This enables one of the valves of the thermostat 7 to be omitted, and the resistance of the cooling water exerted on the thermostat 7 to be lowered, whereby the durability of the thermostat 7 is improved.

[0022] A mode of embodiment of the present invention has been described above. The cooling water circulating apparatus according to the invention is not intended to be limited to the above-described mode of embodiment. Any mode of embodiment is within the scope of the present invention as long as it is in agreement with the gist of the invention.

[0023] According to the first aspect, when the cooling water is circulated through both the engine and radiator, the electrically driven second water pump is rotated, whereby the circulation of the cooling water is carried out at a required flow rate. Therefore, when the driving of the first water pump alone causes a discharge rate of the cooling water to become short, the second water pump is rotated to enable the shortage of the discharge rate to be filled up. Owing to this operation, a suitable quantity of cooling water can always be circulated. Since the second water pump is electrically driven, the rotational frequency can be controlled, and the flow rate of the cooling water can also be arbitrarily regulated.

[0024] According to a preferable feature, the cooling water is circulated at a required flow rate through both the engine and radiator by rotating the electrically driven second water pump. Therefore, it becomes possible to secure a required flow rate of the cooling water without increasing the dimensions of the first water pump even when the first water pump is driven with the cam shaft, this invention thus proving to be preferable.

[0025] The present invention provides a cooling water circulating apparatus capable of securing a required flow rate of cooling water without increasing the heads

of water pumps, the apparatus including a first water pump which has a first supply port for supplying thereinto cooling water which is to flow through the interior of an engine, and a first discharge port for discharging therefrom the supplied cooling water to the engine again, and which is connected to and rotated with a cam shaft of the engine, a control mechanism adapted to cut off a flow of the cooling water, which is directed from a radiator to the first supply port, when the temperature of the cooling water is not higher than a predetermined level, and communicate the radiator and first supply port with each other when the temperature of the cooling water is higher than the predetermined level, and a second water pump which has a second supply port for supplying thereinto cooling water which is to flow through the interior of the engine, and a second discharge port for discharging therefrom the supplied cooling water to the supply port of the first water pump, and which is not rotated when the temperature of the cooling water is not higher than a predetermined level, and electrically rotated when the temperature of the cooling water is higher than the predetermined level.

Claims

1. A cooling water circulating apparatus adapted to circulate cooling water through an engine (2) or a radiator (3) comprising:
 - a first water pump (4) which has a first supply port for supplying thereinto cooling water which is to flow through the interior of an engine, and a first discharge port connected for discharging therefrom the supplied cooling water to the engine (2) again, and which is connected to and rotated with a cam shaft of the engine (2),
 - a control mechanism (7) adapted to cut off a flow of the cooling water, which is directed from a radiator (3) to the first supply port, when the temperature of the cooling water is not higher than a predetermined level, and communicate the radiator (3) and first supply port with each other when the temperature of the cooling water is higher than the predetermined level, and
 - a second water pump (8) which has a second supply port for supplying thereinto cooling water which is to flow through the interior of the engine, and a second discharge port connected for discharging therefrom the supplied cooling water to the supply port of the first water pump (4), and which second water pump is electrically rotated in accordance with the temperature of the cooling water.
2. A cooling water circulating apparatus according to Claim 1, wherein the second water pump is not rotated when the temperature of the cooling water is

not higher than the predetermined level, and electrically rotated when the temperature of the cooling water is higher than the predetermined level.

3. A cooling water circulating apparatus according to Claim 1, wherein a heater is provided between the engine and the second supply port of the second water pump.
4. A cooling water circulating apparatus according to Claim 1, wherein blades of a rotor of the second water pump are formed so as to extend radially with respect to the center of rotation of the rotor, the direction of rotation of the rotor being able to be switched from a forward direction to a backward direction, and vice versa.
5. A cooling water circulating apparatus according to Claim 4, wherein the second discharge port of the second water pump is formed in the portion thereof which deviates from the center of rotation of the rotor thereof.

Patentansprüche

1. Kühlwasserzirkulationsgerät zum Zirkulieren von Kühlwasser durch einen Motor (2) und einen Kühler (3), umfassend
 - eine erste Wasserpumpe (4) mit einer ersten Zuführöffnung zum Zuführen von Kühlwasser, das durch das Innere eines Motors strömt, und eine erste Ausgabeöffnung, die zur Ausgabe des von ihr ausgegebenen, zugeführten Kühlwassers wieder mit dem Motor verbunden ist, und die mit einer Nockenwelle des Motors (2) verbunden ist und sich mit ihr dreht,
 - eine Steuereinrichtung (7) zum Unterbrechen einer Kühlwasserströmung, die von einem Kühler (3) zur ersten Zuführöffnung gerichtet ist, wenn die Temperatur des Kühlwassers nicht höher als ein bestimmtes Niveau ist, und die den Kühler (3) und die erste Zuführöffnung miteinander verbindet, wenn die Temperatur des Kühlwassers höher als ein bestimmtes Niveau ist, und
 - eine zweite Wasserpumpe (8) mit einer zweiten Zuführöffnung zum Zuführen von Kühlwasser, das durch das Innere des Motors strömt, und eine zweite Ausgabeöffnung, die zur Ausgabe des von ihr ausgegebenen, zugeführten Kühlwassers mit der Zuführöffnung der ersten Wasserpumpe (4) verbunden ist, und wobei die zweite Wasserpumpe elektrisch entsprechend der Temperatur des Kühlwassers angetrieben wird.
2. Kühlwasserzirkulationsgerät nach Anspruch 1, wobei die zweite Wasserpumpe nicht angetrieben wird, wenn die Temperatur des Kühlwassers nicht

höher als das bestimmte Niveau ist, und elektrisch angetrieben wird, wenn die Temperatur des Kühlwassers höher als das bestimmte Niveau ist.

3. Kühlwasserzirkulationsgerät nach Anspruch 1, wobei eine Heizung zwischen dem Motor und der zweiten Zuführöffnung und der zweiten Wasserpumpe vorgesehen ist.
4. Kühlwasserzirkulationsgerät nach Anspruch 1, wobei Flügel des Rotors der zweiten Wasserpumpe so ausgebildet sind, dass sie sich radial in Bezug auf den Drehmittelpunkt des Rotors erstrecken, wobei die Drehrichtung des Rotors von vorwärts nach rückwärts und umgekehrt schaltbar ist.
5. Kühlwasserzirkulationsgerät nach Anspruch 4, wobei die zweite Ausgabeöffnung der zweiten Wasserpumpe in dem Teil der Wasserpumpe ausgebildet ist, der von dem Drehmittelpunkt ihres Rotors abweicht.

Revendications

1. Appareil de circulation d'eau de refroidissement adapté pour faire circuler l'eau de refroidissement à travers un moteur (2) ou un radiateur (3) comprenant :

une première pompe à eau (4) qui comporte un premier orifice d'alimentation pour alimenter dans celle-ci l'eau de refroidissement qui doit circuler à travers l'intérieur du moteur, et d'un premier orifice de décharge connecté pour décharger de celle-ci l'eau de refroidissement délivrée au moteur (2) de nouveau, et qui est connectée et mise en rotation avec un arbre à cames du moteur (2),

un mécanisme de commande (7) adapté pour couper un écoulement de l'eau de refroidissement, qui est dirigé depuis un radiateur (3) vers le premier orifice d'alimentation, lorsque la température de l'eau de refroidissement n'est pas plus élevée qu'un niveau prédéterminé, et pour faire communiquer le radiateur (3) et le premier orifice d'alimentation l'un avec l'autre lorsque la température de l'eau de refroidissement est plus élevée que le niveau prédéterminé, et

une seconde pompe à eau (8) qui comporte un second orifice d'alimentation pour délivrer dans celle-ci l'eau de refroidissement qui doit s'écouler à travers l'intérieure du moteur, et un second orifice de décharge connecté pour décharger de celle-ci l'eau de refroidissement délivrée à l'orifice d'alimentation de la première pompe à eau (4) et qui est une seconde pompe à eau de

mise en rotation électriquement en conformité avec la température de l'eau de refroidissement.

2. Appareil de circulation de l'eau de refroidissement selon la revendication 1, dans lequel la seconde pompe à eau n'est pas mise en rotation lorsque la température de l'eau de refroidissement n'est pas plus élevée que le niveau prédéterminé, et mise en rotation électriquement lorsque la température de l'eau de refroidissement est plus élevée que le niveau prédéterminé.
3. Appareil de circulation de l'eau de refroidissement selon la revendication 1, dans lequel un dispositif de chauffage est disposé entre le moteur et le second orifice d'alimentation de la seconde pompe à eau.
4. Appareil de circulation de l'eau de refroidissement selon la revendication 1, dans lequel les pales d'un rotor de la seconde pompe à eau sont formées de façon à s'étendre radialement par rapport au centre de rotation du rotor, la direction de rotation du rotor étant apte à être commuter d'une direction avant à une direction arrière, et vice versa.
5. Appareil de circulation de l'eau de refroidissement selon la revendication 4, dans lequel le second orifice de décharge de la seconde pompe à eau est formé dans cette partie qui dévie du centre de rotation de son rotor.

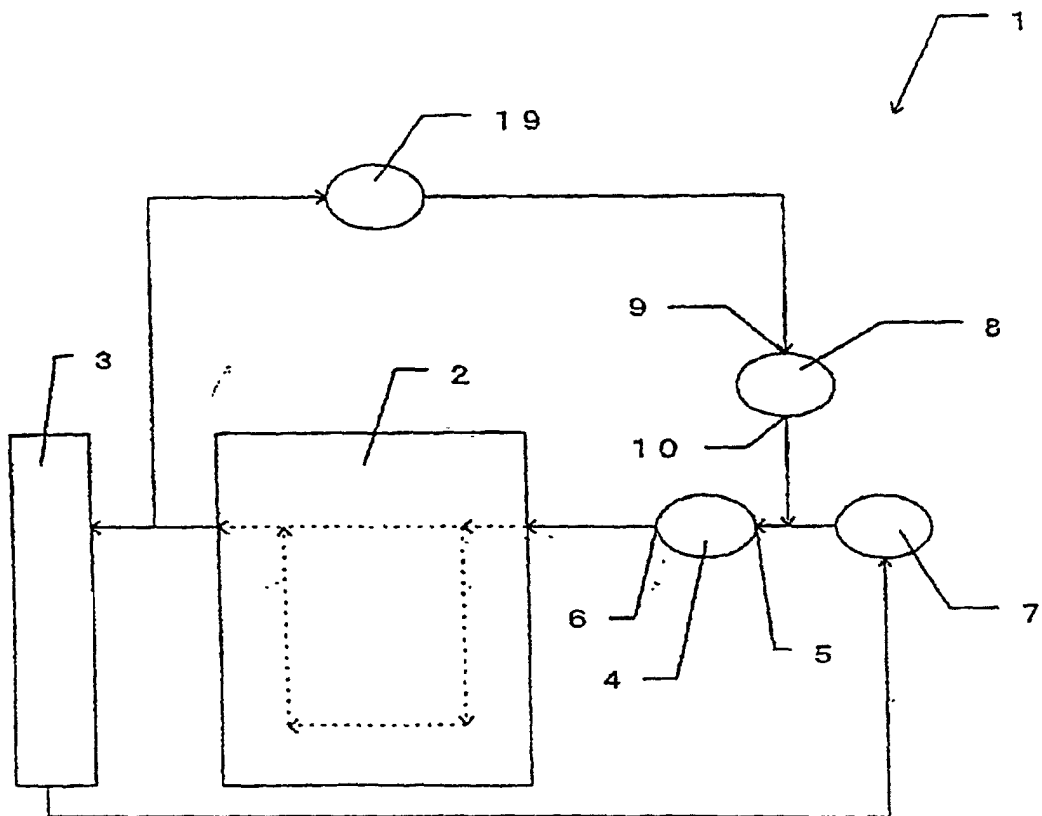


Fig. 1

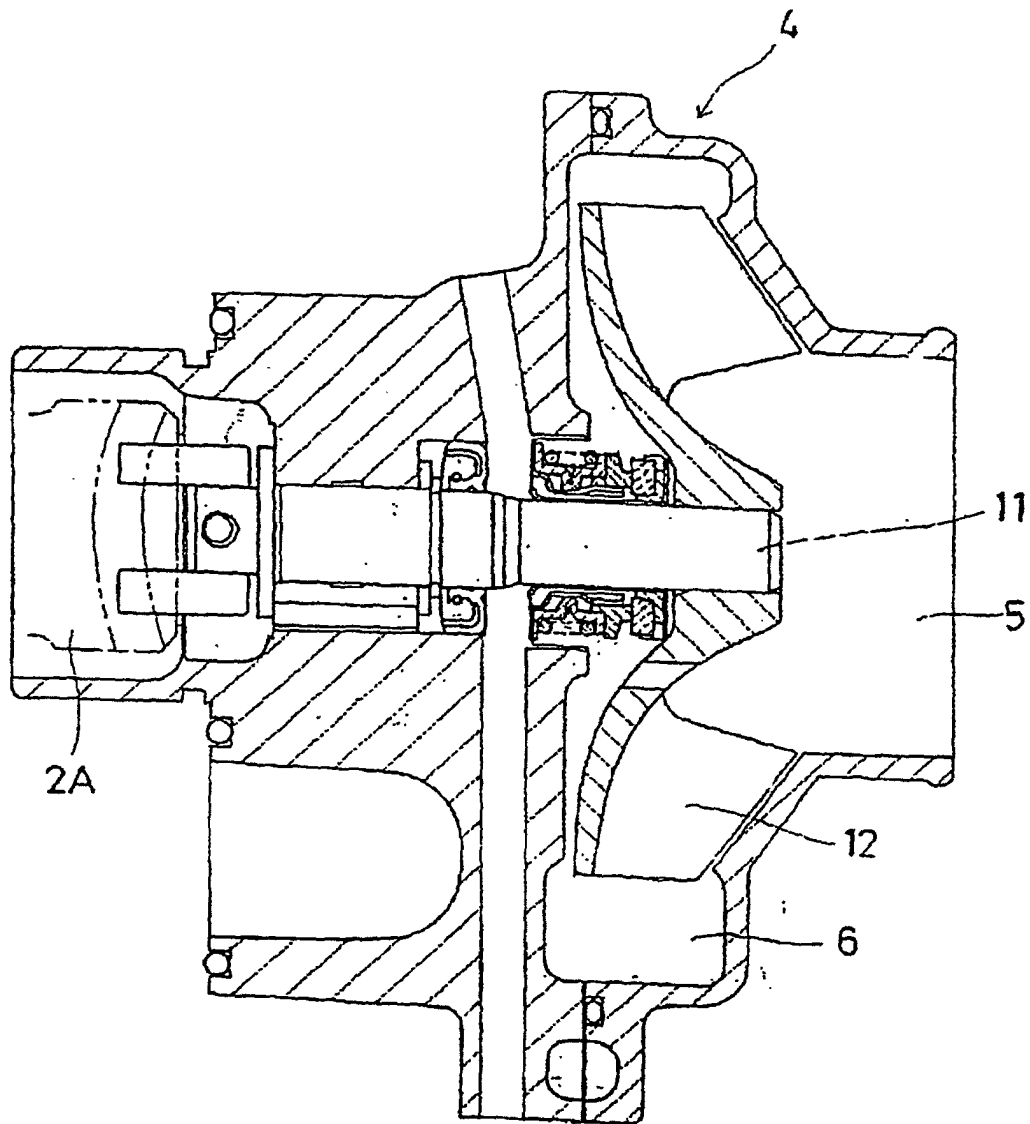


Fig. 2

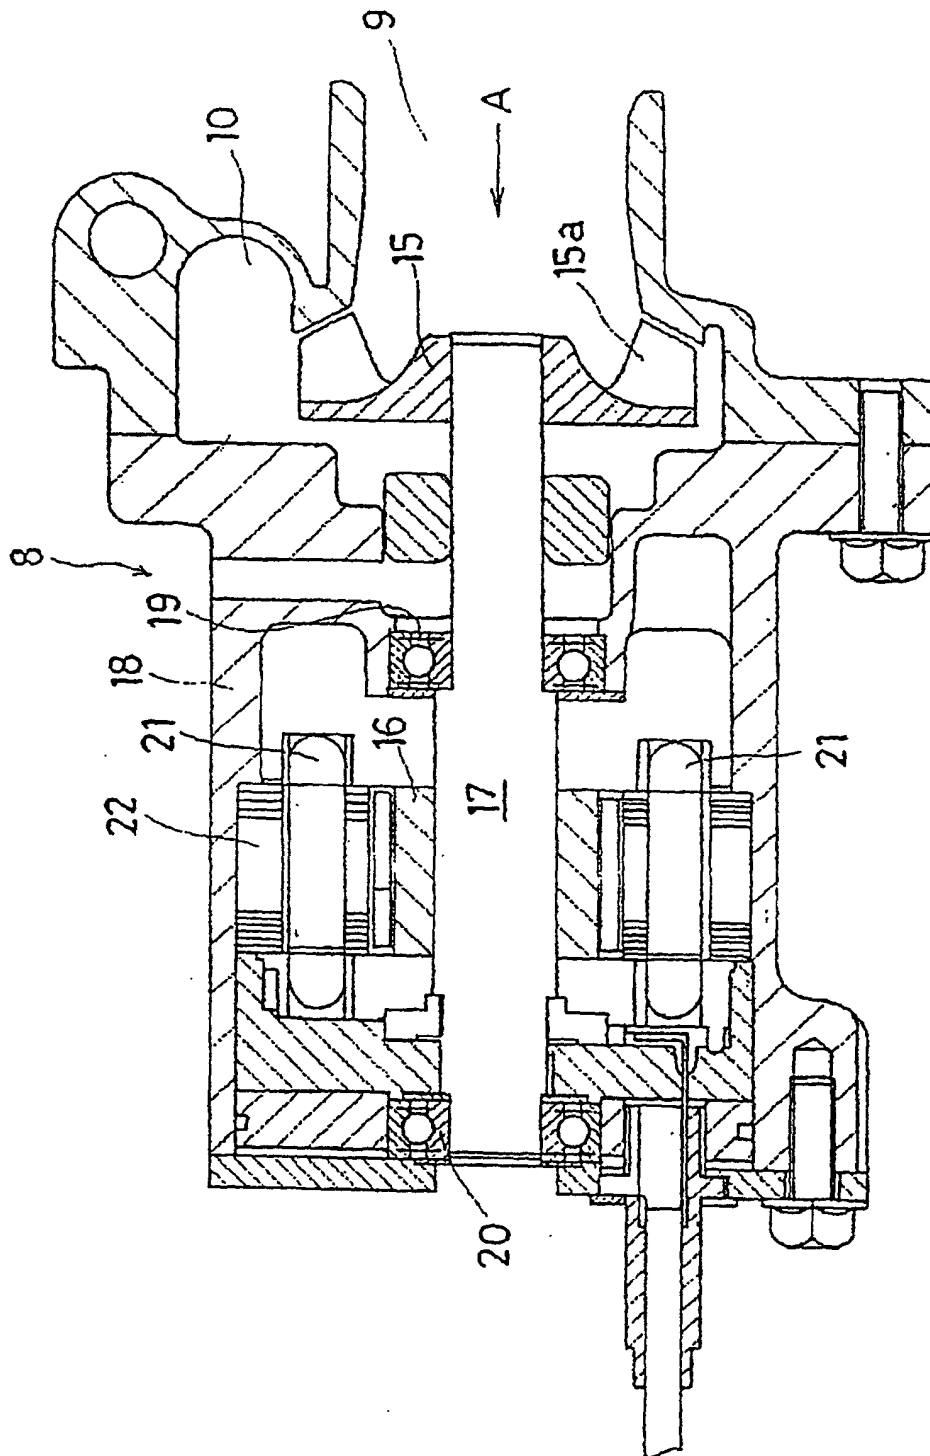


Fig. 3

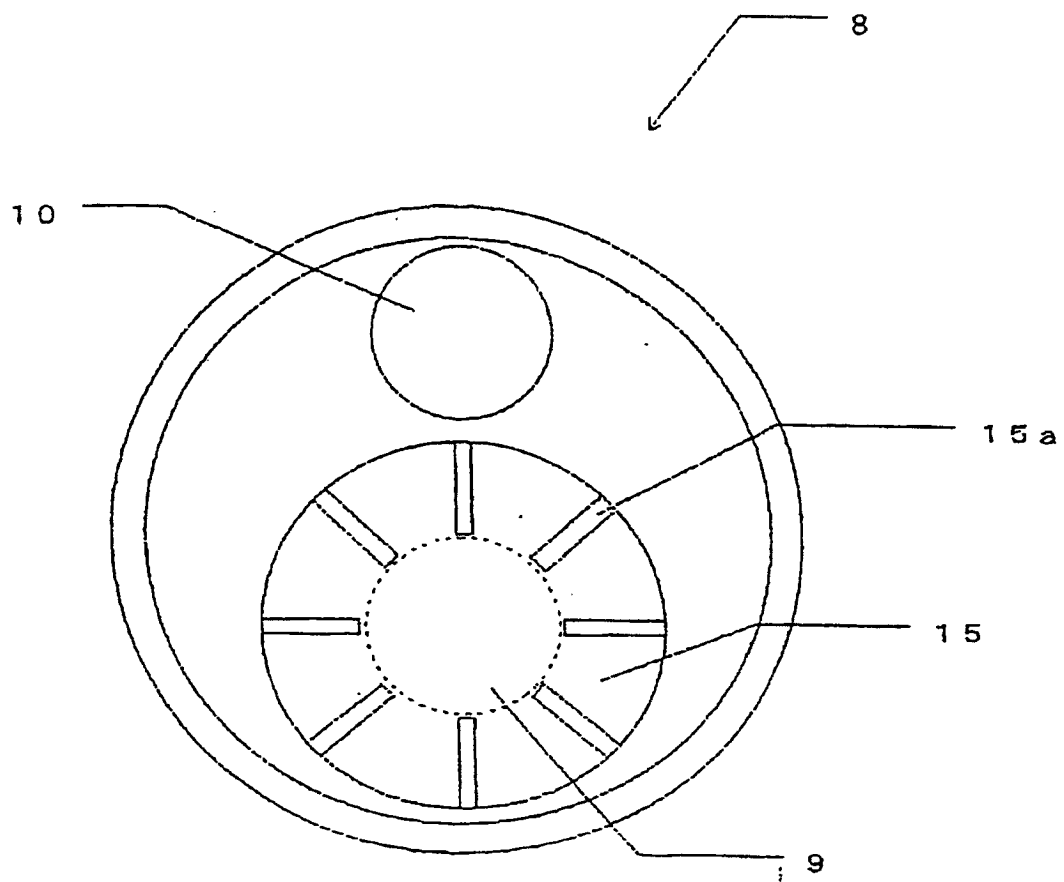


Fig. 4