United States Patent [19]

Chaffin

[11] **3,887,020**

[45] **June 3, 1975**

[54] **APPARATUS FOR GEOLOGICAL DRILLING AND CORING**

[76] Inventor: **John D. Chaffin,** 851 Haverford Ave., Pacific Palisades, Calif. 90272

[22] Filed: **Jan. 15, 1973**

[21] Appl. No.: **323,852**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 132,001, April 7, 1971, abandoned.

[52] **U.S. Cl.** **175/206;** 175/60; 175/212; 175/213

[51] **Int. Cl.** **E21b 21/00;** E21c 7/02

[58] **Field of Search** 175/60, 213, 206, 207, 175/212, 217, 218, 171

[56] **References Cited**

UNITED STATES PATENTS


682,939	9/1901	Ivens	175/213
1,668,327	5/1928	Manning	175/60 X
2,167,393	7/1939	Muncy	175/60 X
2,277,989	3/1942	Kinnear	175/213 X
2,839,273	6/1958	Holman et al.	175/206
2,849,213	8/1958	Farling	175/215 X
2,975,847	3/1961	Feucht	175/213 X
3,291,229	12/1966	Houston	175/60

Primary Examiner—David H. Brown

[57] **ABSTRACT**

Apparatus and method for complete reverse air vacuum drilling by entrainment of chips and dust in a high velocity air stream created by applying a vacuum to the drill stem or the annulus of a drilled hole, removing the drilled particles by entrainment in the flow of air created by the vacuum and collection of the drilled particles for visual or other analysis.

10 Claims, 7 Drawing Figures

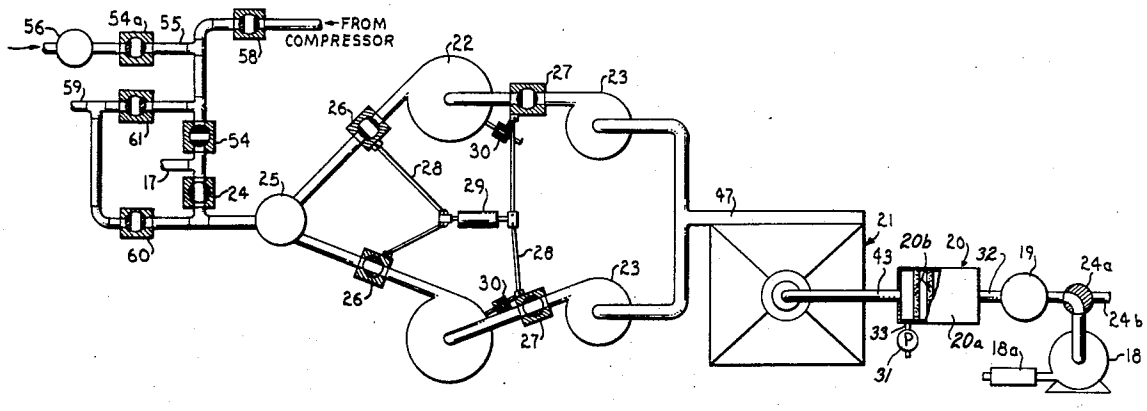

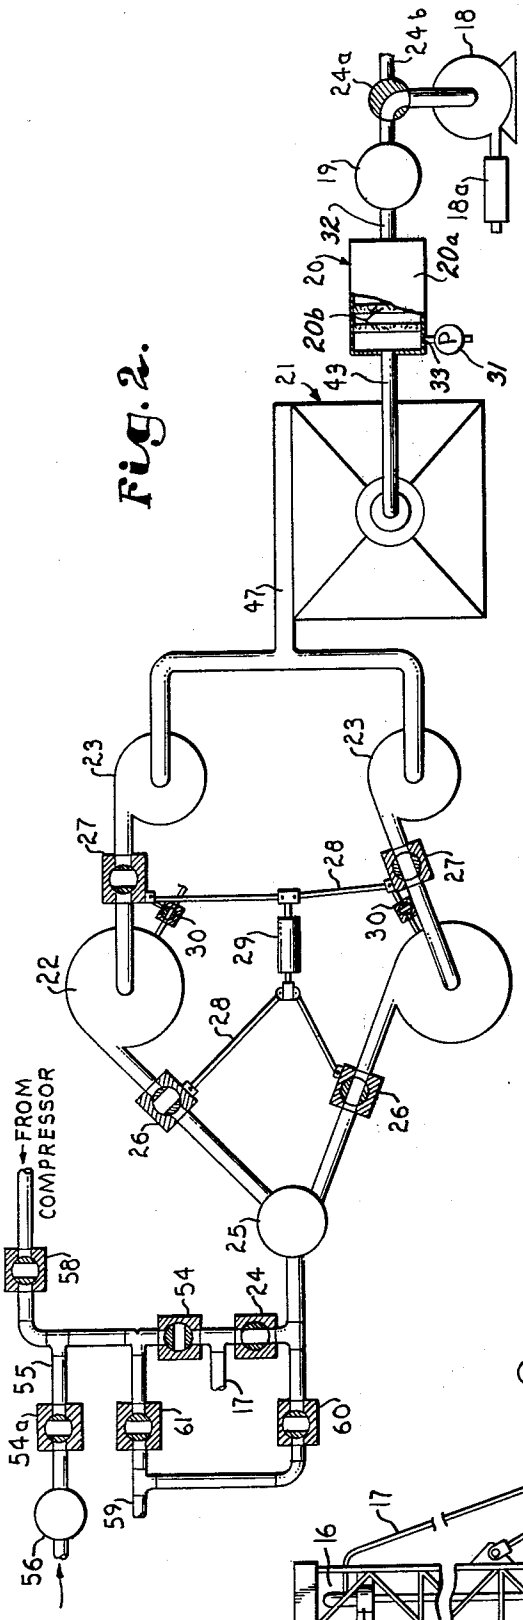


Fig. 2.

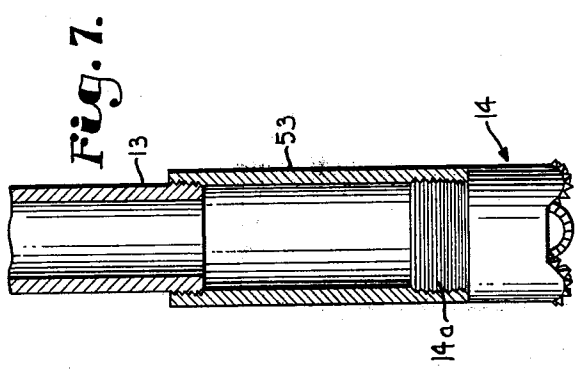


Fig. 7.

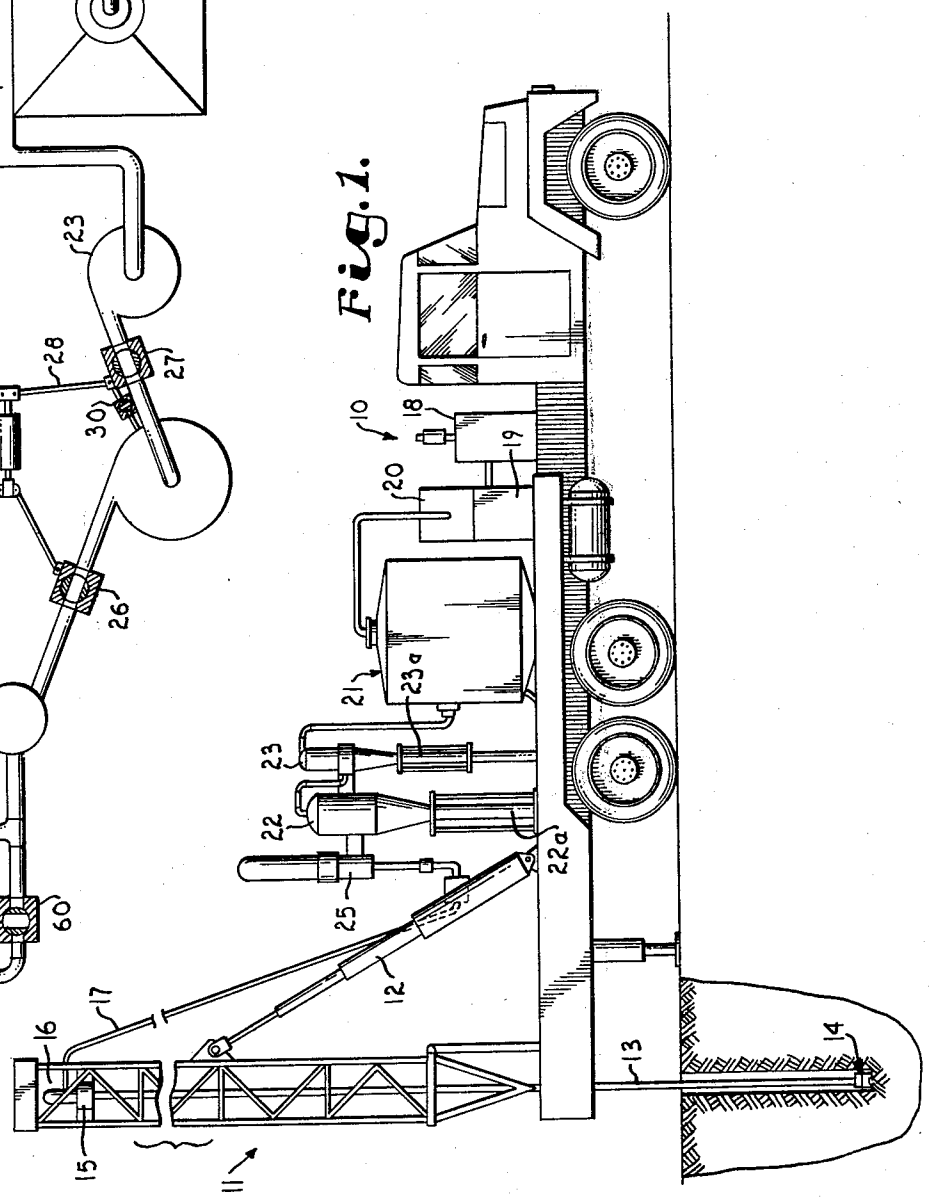


Fig. 1.

Fig. 6.

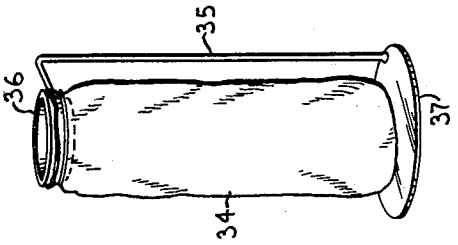


Fig. 5.

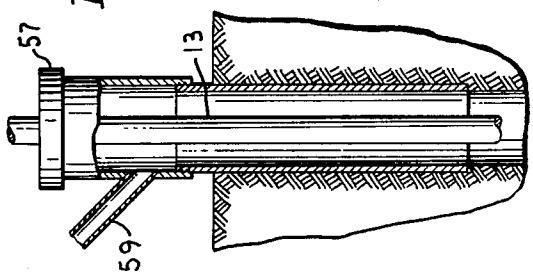


Fig. 4.


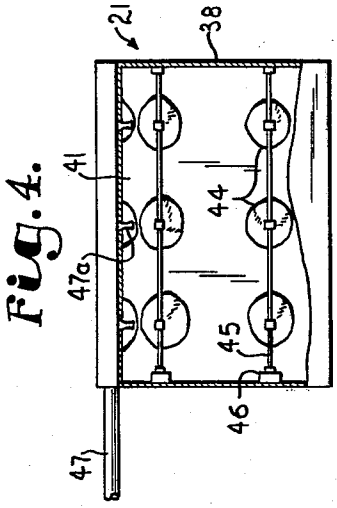


Fig. 3.

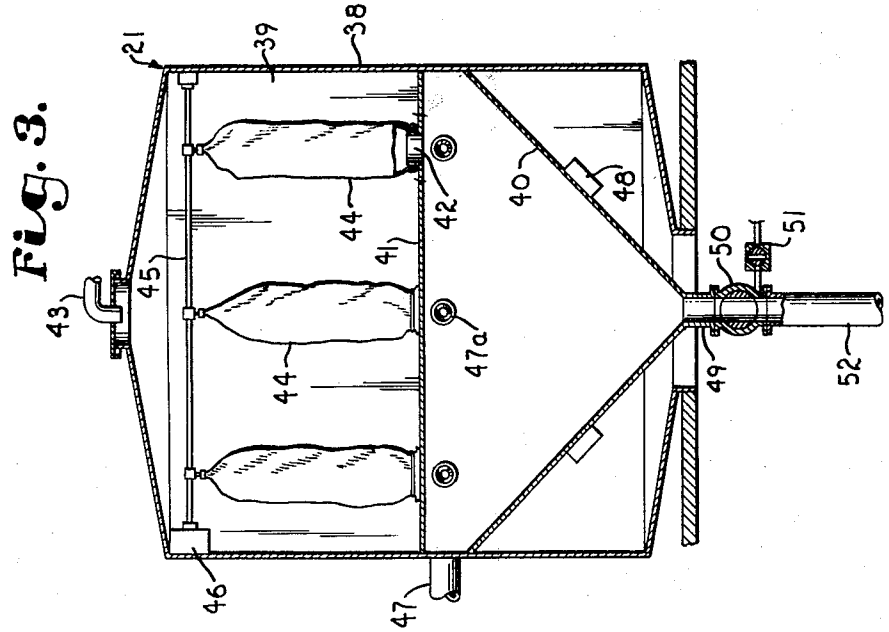

APPARATUS FOR GEOLOGICAL DRILLING AND CORING

This application is a continuation-in-part of my co-pending application, Serial No. 132,001, filed now abandoned, April 7, 1971.

FIELD OF THE INVENTION

The field of the invention is the drilling and coring of geological structures and obtaining continuous and rapid delivery of strata material as it is being drilled.

DESCRIPTION OF PRIOR ART

Drilling apparatus and methods involving creating an airflow through the drill stem in a drilled hole for withdrawing the drilled particles upward from the bottom of the hole are known. For example, see U.S. Pat. No. 3,291,229, issued Dec. 13, 1966. However, collection of the sampled material, using the known systems, has been very costly and time-consuming with a relatively low degree of accuracy in obtaining a sample which is readily indicative of the subterranean formations. Furthermore, there is no known apparatus or method for switching from the dry method to other methods of drilling in a matter of seconds. Ordinarily, this operation would require lengthy delays while very complex machinery transfers could be undertaken.

OBJECTS OF THE INVENTION

It is a general object of the present invention to provide a new and novel machine and method for removing strata material from any geological surface and collecting it in an accurate, fast and easy manner without interrupting the drilling process.

It is a further object of the present invention to provide for drilling geological samples without polluting the atmosphere with dust particles.

It is another object to obtain 100 percent recovery of the sample material.

It is yet another object of this invention to provide a more rapid visual correlation between the sample taken and the depth at which the sample was extracted.

Still another object of this invention is a machine having a manifold means which allows switching from dry drilling when water or other unsatisfactory conditions are encountered, and switching back to dry drilling when the conditions have been overcome.

Another object of this invention is an apparatus and method which permits continuous drilling even through "thief" formations or old tunnels.

Other objects and advantages will become apparent from the following descriptions and drawings.

DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic side elevation view of a preferred drilling apparatus according to the invention;

FIG. 2 is a functional schematic of the apparatus showing the relationships of the components;

FIG. 3 is a sectional view, on an enlarged scale, of the final dry collector unit showing also a portion of the truck bed on which it is carried;

FIG. 4 is a top plan view, on a reduced scale, of the collector unit, parts being broken away for purposes of illustration;

FIG. 5 is a schematic view showing an arrangement at the top of the hole for utilization in applying a reverse vacuum or supplying air to the annulus;

FIG. 6 is a perspective view showing a stand for and a collector bag; and

FIG. 7 is a partly sectional view of a preferred drilling bit and connector assembly.

The method of drilling and recovery of geological material by the reverse air vacuum system reduces the amount of time and work required in taking geologic samples because a vacuum system which results in air velocities upward through the drill stem of 5,000 to 15,000 fpm, is more efficient in lifting the particulate material to the surface than the old high pressure air or water methods. As a result, larger particles can be lifted with attendant reduction in costs associated with drilling to the smaller particle size required by high pressure systems. Also, high pressure systems are more dangerous to persons working around them, while the reverse air vacuum is positively dust free. Lastly, the reverse air vacuum system will allow exploration of previously unexplorable locations because as compared to conventional equipment, the apparatus is smaller, more compact, lighter in weight, and more easily transported into areas which were previously too costly to explore.

Drilling with the reverse air vacuum system provides a high velocity air stream to suck the cuttings off the roller bit or drag bits from their cutting edge and thereby the hole is kept cleaner and the drill can be kept on a solid bottom at all times. Also, when fissures, cracks or tunnels are encountered down the hole, it is impossible to lose circulation. The drill bit can drop through tunnels or open space and keep on drilling. When water in excess of that which can be atomized and drawn out using the vacuum system is encountered, it is only necessary to pack off above the water or fissure or crack and force a quick-setting chemical agent into the formation and then clean out the hole and proceed with vacuum drilling. If too much water is encountered, the vacuum attachments are pulled out of the hole, casing is set and a diamond drill bit with standard wire line coring barrel is used until such water-bearing formation is passed and then a casing or fast-setting chemical is placed in the hole to block off the formation that is causing trouble and the vacuum attachments are lowered down the hole, all mud and water sucked out of the hole, and drilling on the reverse air vacuum is resumed.

The apparatus of this invention is a result of 17 years of field research. I have examined every known core drilling machine, and have concluded that apparatus made and operated in accordance with the instant invention is cheaper to operate, per foot of drilled hole, more efficient, faster, safer, more accurate, and does not contribute in any way to the pollution of the atmosphere or contaminate the wall of the hole. Because of the critical shortage of minerals and oil in the world today, and because of the high cost of exploration and development of mining areas, the present invention will be a boon to mankind. Many areas in arid and dry climates such as Arizona, Nevada, desert and mountainous country, and most of Australia, require transporting water for hundreds of miles before conventional hard rock core drilling can be accomplished. With the reverse air vacuum system, hard rock drilling can be accomplished with staggering economic savings. Another adaptation of the present method and apparatus is in drilling in the permafrost on the north slope of Alaska to provide holes for the H beams that support the pipe sections. The drilling of permafrost with any

other method requires saline mud, air which melts the ice, or chemicals that coat the walls of the drill hole, keeping other material such as melting permafrost or cement from adhering to the wall of the hole; consequently, high gas pressure or constant vibration will loosen the H beams or the conductor pipe. With reverse air vacuum, the walls of the hole are uncontaminated and, by melting the drilled cuttings to form a "soup" and pouring them back into the hole around the conductor pipe or H beams, it will adhere and become solid permafrost.

In high velocity reverse air vacuum drilling according to the instant invention, there is near 100 percent visual sample recovery of all drilled ore bodies with the sample being deposited in clear polyethylene bags or clear plastic tubes, without any loss or contamination of samples as in other systems. It is more accurate than convention air, mud or diamond drilling, less expensive, dust free, faster and much less expensive. The system is so efficient that it is impossible to lose circulation, under the most adverse conditions, in dry formations. Approximately one hundred per cent of the cuttings is recovered, even in broken, open fissure of cavernous conditions.

Vacuum drilling in the preferred method and apparatus of the present invention is accomplished by reverse circulation of high velocity air on the vacuum suction side. Clear, uncontaminated air is pulled down the annulus between the drill string and the wall of the hole. The air then travels upward at 10,000 fpm or higher, up the inside of the flush I.D. drill string, carrying chips, dust, and all pertinent elements to a separation and collection system wherein the material is automatically accumulated at the cyclonic separators in, for example, polyethylene bags, where a replication of the uncontaminated mineral stratification in granular form can be examined immediately and accurately.

Trouble encountered with forced air drilling is reduced to a minimum by reverse air vacuum drilling. The system's dustfree operation protects drilling personnel and greatly reduces the possibility of their contracting silicosis, pneumoconiosis, phthisis, or other diseases common in the drilling field. Furthermore, it gives equipment longer operational life.

Longer operational life of the bit is accomplished by the reverse air flow of free uncontaminated, above-the-ground-temperature air down the annulus. This keeps the bit 50 to 75 percent cooler than any other method of air drilling.

Geologists are able to record accurately and scientifically, the stratifications as they are drilled. This is possible because the geologists can see at once the changes in formation as the sample comes into the plastic tubes at the cyclonic separators. This process provides, therefore, a continuous visual log of the drilled hole, eliminating the necessity to stop drilling operations for core sampling. If a core sample is desired, in dry formation, a vacuum wire line core barrel is lowered to take such a core.

The apparatus of this invention, with the combination of wire line diamond drill attachment with water or vacuum, driven by a top head drive from 0–1100 rpm, makes it possible to drill to 5,000 feet and beyond. The apparatus has the capacity of regular standard wire line diamond core drilling with water or air assist, or vacuum in dry formations, down-the-hole hammer drilling with exclusive vacuum recovery, and built-in wire line diamond drill to follow up any vacuum drill hole, in order to finish the hole when water is encountered.

Referring to the drawings, the apparatus shown in FIG. 1 includes a truck **10** carrying at the rear a portable drilling tower **11.** The tower **11** can be of conventional construction; in the embodiment shown it includes a hydraulic jack **12** which can be operated to fold the tower on the truck for movement to a new location.

The tower supports a hollow drill stem **13,** at the lower end of which is a drill bit **14.** This bit in the preferred embodiment differs from the conventional tricone bit in the provision of an additional heavy skirting between the rollers as shown at **14*a*** in FIG. 7 to assist in the production of a high velocity air stream and the ready pickup of drilled particles adjacent the drill piece and in the provision of an interior opening of equal crosssectional area with the interior of the drill pipe. The stem is rotated by an elevated Kelly-type drive **15** through which the upper end of the stem extends. The upper end of the stem includes at its upper end a surge chamber **16** to momentarily remove the air velocity to which is connected the hose line **17** which is utilized during reverse vacuum drilling to apply a vacuum to the drill stem.

The source of vacuum for the system is a positive displacement type suction pump or blower means **18** which is mounted on the bed of the truck **10** and which discharges through a muffler **18a.** The suction side of the blower is connected with an air cleaning system including an oil-bath air filter **19,** an air washer unit **20,** a final dry collector unit **21** and cyclonic separators **22,** 23. The manner in which these various components are associated with one another will be subsequently described. All of these units or components are conveniently mounted on the truck bed; and, as will be seen, they cooperate with one another to bring about the desired collection of the drill cuttings and the return to the atmosphere of clean, uncontaminated air.

In the general operation of the system, with the valves set as in FIG. 2, and as has earlier been briefly alluded to, the suction pump or blower means **18** operates to apply a continuous vacuum to the hose line **17** connected with the top of the drill stem. The entrained particles leaving the drill stem are carried first through a valve **24** (See FIG. 2), then to a manifold **25** to one or the other of the cyclone separator sets. The paths to the cyclone separators are under the control of the valves **26, 27** which are linked by links such as **28** to a common control **29,** which may be a bank of hydraulic cylinders or the like. The common control also serves to operate bleeder valves **30,** more of which will be said later. These valves are of quick snap acting ball type so that they rapidly and practically instantaneously close and open and provide a flow path equal in area to the flow area of the pipes or conduits; such valves as such for other uses are known to those skilled in the art, and the details of their construction play no part in my invention.

As will be subsequently explained in somewhat greater detail, the cyclonic separators serve as the point of initial collection of drill cuttings. After leaving the cyclone separator sections, the air stream (relieved of the major and most fine particles) is delivered to the final dry collector section **21,** where the very fine particles are captured and can be collected. The stream then moves on into the air washing and oil-bath air fil-

ter sections **20, 19** respectively, and thence to and out the discharge of the blower.

The air washer comprises a casing **20***a* having an input conduit **43** at one end and an exhaust conduit **32** at the opposite end. A water pump **43** is connected with a source of water (not shown) and delivers it under high pressure to a series of spray atomizing nozzles **33** adjacent the input ends. A series of transverse baffles in the form of excelsior packs **20***b* are spaced along the casing. These act to collect any moistened dust carried on past the final dry collector section. The casing **20***a* is provided with a removable cover or wall so that the packs **20***b* can be removed and washed, and the residue collected for analysis.

Collection of particles at the cyclone separators is preferably done in transparent bags such as polyethylene bags **34,** the general nature of which is illustrated in FIG. **6.** The bag is shown in a metal wire holder or stand **35,** the open mouth of the bag being secured to a ring on the holder by an internal tapered wedge ring **36** with a bottom plate **37** providing a standard. These bags can be slipped up inside a hollow plastic tube **22***a*, **23***a* located at the lower or discharge end of the cyclone separators, an air tight sliding bottom support plate or trapdoor being used to hold the bags in place within the tubes during collection. However, in many cases collection may be made in the tubes without the use of the bags.

The structure of the final dry collector **21** is generally shown in FIG. **3** and **4.** Basically it comprises an outer housing **38** which is sub-divided into an upper bag compartment **39** and a lower hopper section **40** by a horizontal partition **41.** The partition is substantially air tight except for two rows of openings **42** having flanges which project upwardly within the bag chamber. Vacuum is imposed to the bag compartment **39** through the line **43.**

Within the bag chamber are mounted two rows of finely woven fabric bags **44.** The closed upper ends of these bags are suspended from a rod **45,** which is mounted for rapid longitudinal oscillation under the influence of oscillating motor **46,** which may be an electric motor. The lower, open, ends of the bags are sleeved over and secured to the flanges at the partition openings. As will be evident, air is drawn through the bags from the chamber below and any particles carried by the air will be intercepted by and deposited on the insides of the bags.

The airstream from the cyclone separtors enters the hopper section **40** through the line **47,** which comes from the second or smaller of the cyclone separators. As can be seen particularly from FIG. **4,** the line **47** runs along the side of the collector and venturi nozzles **47***a* communicate with openings in the line so that the air, as it enters the chamber, is given added velocity to distribute it more uniformly across the chamber.

The hopper has a sloping hopper bottom which preferably is of highly polished interior construction, or alternatively, coated with Teflon, stainless steel or similar material. Agitators in the form of electrically driven vibrators **48** are mounted on the hopper in order to cause gravity movement of material deposited on the hopper walls toward the discharge **49** of the hopper. A ball valve **50** controls discharge. In addition, a bleeder valve **51** is located below valve **50** so that when the latter is closed, the vacuum can be relieved in the space below the valve. The space below the valve is occupied by another collector tube **52** which can be fitted in any desired way to the discharge and can be removed therefrom once the valve is closed.

The particles cut in the hole and drawn up through the hollow drill stem **13** range in size from microns to one-half inch and above. Drilling with 10,000 to 30,000 pounds of pressure on the bit, the cuttings consist approximately 99 percent above the micron size. Tests based on flow through transparent tubes show all cuttings, including fines and the coarse material, traveling in the center of the plastic tube at such velocities that it is almost impossible to detect any separation; an ordinary flour sifter can be utilized to determine the percentages of powder, the size of the cuttings and the condition of the cutters on the bit by sifting a portion of a "grab" sample from one of the large cyclones.

The velocity of air passing through the drill stem ranges from 5,000 to 15,000 fpm, and the internal diameter of the drill stem may be from less than 1 inch to more than 10 inches. Particles collected at the cyclone separators and dropped into the collector tubes reflect very closely the actual stratification within the hole, since the material is delivered within seconds to the tubes in the same order that it has been cut. We have found that changes in depth are reflected by the changing color.

In a typical example, a one and one-half inch drill stem was used with similar diameter hose, and the large cyclones were approximately six inches in diameter. This provides a sufficient drop in velocity so that the cuttings will spin out and drop into the collector tubes.

In vacuum drilling in any kind of rock, the drill bit **14** preferably is such that the normal openings between the three legs of the tri-cone are closed up or skirted down as close to the center or below center in order to build up the velocity of the free air entering between the teeth and under the skirt. This is in order to assist in picking up the cuttings as quickly as they are cut and deliver them through the orifice in the drill bit, which is the same inside diameter as the drill pipe inside diameter. The drill bit according to the preferred embodiment is shown in FIG. **7.** The body of the bit is the same size as the connector **53,** known in the drilling art as a double female drill sub. The bit has what is known in the drilling art as a threaded pin **14**a, as does the drill pipe which has a pin at the lower end. This arrangement insures a high velocity air stream on the vacuum side which moves the particulate drilled material at over 5,000 fpm. depending on the inside diameter of the drill stem. This velocity is maintained up to delivery to the cyclone separators. By utilizing high velocity, and particularly, increasing the velocity in the vicinity of the bit, the drill bit is kept cooler than in high pressure forced air systems or even water. As a result, it is possible to use three cone vacuum roller drill bits or drag bits at much greater depths and for longer periods.

Also, it is possible to use a common vacuum type drill bit (not shown). Inside such a bit there are three air or mud passage holes going directly to each roller bearing. These are provided so that in conventional wet drilling, the rollers will be kept clean of dirt, rock or mud. On the reverse air vacuum, these same passages are used to keep dust out of the bearings, keeping them free to roll and not freeze up. This, in combination with washing the oil out of the bearings before the bit goes into the hole, makes the vacuum bit re-tippable as high as

seven times before the bearings go out, with a result in economy to the driller and his client.

The jack means **12** of FIG. **1** may be used to position the drill tower at any conventional angle to drill angled holes. In fact, using high velocity air on the vacuum side, the problems of angle drilling are minimized because the particles are moving at such high relative velocities there is little or no drag or accumulation on the side of the drill stem. Also, conventional means are employed to automatically control the weight of the drill bit on the drilled material to insure optimum cutting. Since the readout of strata material at the cyclone collector tubes is virtually instantaneous, the operator can vary the weight of the drill bit more rapidly to avoid temporary heat buildup.

When drilling through "thief" formations or loose fissure material, using the high velocity vacuum system, there is no loss of circulation. In conventional high pressure air drilling, the hugh volume of air required to pressurize the hole "bleeds" the cuttings off into the thief formation, the drill chips are not removed from the drill bit with consequent damage to the drill bit and loss of hole-making capacity, sometimes resulting in stuck drill stem or drill pipe. In the reverse air vacuum system as thus far described, the annulus is not pressurized, and therefore there is no bleed-off into the fissure.

In operation, the apparatus of the present invention permits drilling and recovery of sample material using high velocity air on the vacuum side down to 5,000 feet or beyond. If water is reached having a flow of less than eight gallons per minute, the high vacuum system will continue to remove the drilled material and merely requires the additional step of removing the water from the drilled material.

If water is encountered while drilling with reverse air vacuum, and it exceeds the litting capacity of the high velocity air (or from 2 to 8 gallons per minute, depending on the inside diameter of the drill pipe: 1 inch, 2 gallons per minute; 1½ inch, 4 gallons per minute; 2 inch, 5½ gallons per minute; 2½ inch, 8 gallons per minute) the valves 24, **24***a*, **54** and **54***a* are operated to disconnect the vacuum drilling system and switch to other types of drilling procedures which may utilize drilling fluid supplied through line 55 and pump 56. The vacuum system blower can in fact be kept running if desired, drawing outside air through the system through the line **24***b* at valve **24***a*, which is just ahead of the blower **18.** It is quite important that valves **24** and **24***a* be operated simultaneously, by direct linking, common control, or otherwise.

A standard wire line coring apparatus (not shown) can be employed after casing has been set to keep the diamond drill pipe from flopping around. After passing through the water table, the hole can be underreamed and casing can be pushed to the bottom of the hole, or chemical can be grouted into the formation and after holding pressure for a given period of time, the pressure is released. If the hole holds pressure, then casing can be removed after all water and mud has been vacumed out of the hole and the diamond drilling apparatus has been removed and the system can be switched back to the reverse air vacuum system through use of valves **54, 58** and **24***a*.

As earlier mentioned, the drill cuttings can be collected in plastic bags at the cyclone separators **22, 23** and in plastic bags or tubes at the final dry collector **21.** The cuttings are deposited essentially in stratified form, reflecting the strata which has been drilled through. The bags, which are removed from the cyclonic separators which filled, can be laid end-to-end to give an replication of the geologic strata being bored. Also, it is possible to correlate the depth from which the sample is taken with the sampled material.

FIG. **5** shows an arrangement wherein the reverse aid vacuum system can be employed with a down-the-hole hammer drill bit (not shown). A drill stem seal **57** seals off the annulus of the drilled hole and provides an air tight rotary seal with drill stem **13.** Using a down-the-hole hammer, which is well known in the art and forms no part of the present invention, air is forced down the drill stem to operate the cylinder of the hammer. This is effected (refer to FIG. **2**) by closing valve **24** and opening valves **54** and **58.** The cuttings, chips and particles are removed from the hole by high velocity air caused by applying the vacuum system of FIG. **2** through opening valve **60,** which provides a path to a line **59,** which connects with the annulus (FIG. **5**). When valve **60** is opened, valve **24a** should be shifted to reconnect the suction side of the blower with the system. As in the previous case, the drilled particles are deposited in the visual receptacles in the cyclonic separators and the final dry collector.

It will be apparent that by using the arrangement of FIG. **5,** vacuum drilling fluid or compressed air can selectively be applied to either the annulus or stem, and by the same token, using either the FIG. **1** arrangement or FIG. **5** arrangement, drilling mud or compressed air can be supplied to the drill string with vacuum or no vacuum on the drill string. Thus drilling fluid can be used in the conventional manner of drilling, pumping it down through the stem and up through the annulus by closing valve **24,** and opening valves **54** and **54***a*. Valve **61** would remain closed, as would valve **60.** A switch can be made from drilling fluid to compressed air by reclosing valve **54** and opening valve **58.** Compressed air can be supplied to the annulus in the FIG. **5** arrangement while a vacuum is imposed on the string by opening valves **58** and **61** with valves **60, 54** and **54***a* remaining closed.

Detecting means may be employed within or in the vicinity of the collection of the cuttings to detect various changes occurring within the drilled strata. For instance, galvanometer means may be positioned such that the particulate matter passing thereover would indicate the presence of water. This is of distinct advantage because the high velocity air vacuum drilling could be interrupted by manipulation of the valves heretofore described, and the diamond drill attachments brought into drilling position for drilling the wet strata. Also, from a geochemical standpoint, it is important to know whether or not the Ph of certain of the strata is basic or alkaline and ordinary testing methods may be employed on a continuous basis for this purpose. When drilling for uranium samples, it is possible when using the present apparatus and method, and because of the dry condition of the samples, to place a Geiger counter or other radiation detecting device near the polyethylene bag or the collection tube and thereby constantly monitor the drilling for any indications or uranium. When using conventional diamond drilling for uranium samples, water or drilling mud is employed to cool the bit and carry the drill cuttings and chips to the surface. This tends to dilute and contaminate the sample, and in many cases gives erroneous indications.

The sealing arrangement of FIG. 5 can also be used, as earlier noted, in conjunction with the vacuum arrangement wherein the cuttings are drawn upwardly through the drill stem **13**. With the sealing arrangement, air from blower **18** (or from a separate source) can be applied to the annulus in order to assist the vacuum in lifting the material through the drill stem. Also, and as earlier described, it is possible to pull a vacuum on the annulus and remove the cuttings from the bore hole by vacuum with air assist and entrain material up the annulus and out the annulus through the seal to the separator means. While not shown in the drawings, it is envisioned that additional pipes or casing may be placed in the hole to provide for controlled cross sectional area during pulling of vacuum on the annulus.

The recovered material in the plastic tubes may be split by a "Jones" splitter to give the geologist smaller samples for analysis. Also, it is possible to take "grab" samples by quickly changing back and forth from one set of the cyclonic separators to the other set. The bleeder valves **30** operate to relieve the vacuum in the respective cyclonic separators when the valves **26, 27** are closed, thus permitting access to the collection tubes **22***a*, **23***a*.

From the foregoing, it will be seen that this invention is one well adapted to attain all of the ends and objects hereinabove set forth together with other advantages which are obvious and which are inherent to the structure.

It will be understood that certain features and subcombinations are of utility and may be employed without reference to other features and subcombinations.

As many possible embodiments may be made of the invention without departing from the scope thereof, it is to be understood that all matter herein set forth or shown in the accompanying drawings is to be interpreted as illustrative and not in a limiting sense.

Having thus described my invention, I claim:

1. An apparatus for drilling and recovering geological samples comprising:

A. rotary drilling means having a hollow drill stem and a drill bit secured to the lower end thereof for forming continuous bore holes in the earth;

B. means for raising and lowering said drill stem and means for rotating said drill stem and bit;

C. means for creating a vacuum in said hollow stem whereby a current of air is sucked down through an annulus formed between the drill stem and the earth and is drawn up the inside of said drill stem while entraining the drilled material from the bore hole:

D. separator means for removing the drilled material from the air stream;

E. means for guiding the air and entrained material from the top of the drill stem to the separator means; and

F. means selectively positionable for disconnecting the vacuum means, the separator means and the entrained material guiding means and for connecting a drilling fluid pump to the drill stem for pumping drilling fluid down the drill stem.

2. The apparatus of claim **1**, including collection means associated with said separator means for collecting the drilled material.

3. The apparatus of claim **1** including a surge chamber on the drill stem drive means for reducing the velocity of the air and entrained material as it leaves the drill stem.

4. The apparatus according to claim **1** wherein the means for guiding the air and entrained material includes a fast-acting valve assembly for switching from a first collector means to a second collector means and back again when one of said collector means becomes full.

5. The apparatus of claim **1** wherein the drill bit is a roller cone drill bit.

6. The apparatus of claim **5** wherein the center portion of the roller cone drill bit has the same internal diameter as the drill stem.

7. The apparatus of claim **1** further including a seal means for sealing off the annulus and means for pumping air down the annulus to assist the vacuum in lifting the drilled material up the drill stem.

8. The apparatus according to claim **7** and further including means for connecting a vacuum means to the seal means to thereby create a vacuum in the annulus and means for disconnecting the vacuum means from the drill stem and means for guiding the air and entrained material from the annulus to the separator means.

9. An apparatus for drilling and recovering geological samples in wet or dry formation at depths of more than **5,000** feet, comprising:

A. rotary drilling means having a hollow drill stem;

B. vacuum pump or blower means for creating a vacuum in the drill stem for sucking the drilled material from the formation;

C. separator and collecting means for separating and collecting the drilled material from the air being sucked up the drill stem;

D. drilling fluid pump means for forcing drilling fluid down the drill stem; and

E. valve means for selectively connecting the vacuum pump and separator and collecting means and the drilling fluid pump means to the drill stem.

10. Apparatus for drilling in wet, dry or caving formations with near 100 percent geologic sample recovery in dry formation and for taking core samples in wet formation, comprising:

A. a hollow stem rotary drill;

B. means for creating a vacuum in the drill stem for creating a current of air down around the drill stem and up the inside thereof to entrain the drilled material and raise it to the surface;

C. separator means for separating the drilled material from the air;

D. collection means for collecting the drilled material;

E. conduit means connecting the drill stem to the separator, collector and vacuum means;

F. means for switching the hollow stem rotary drill from the vacuum means when wet formations are encountered, comprising:

a. a valve assembly;

b. drilling fluid pump; and

c. conduit means connecting said drilling pump to the hollow drill stem.

* * * * *