



US00D734885S

(12) **United States Design Patent**
Brown et al.

(10) **Patent No.:** **US D734,885 S**

(45) **Date of Patent:** **** Jul. 21, 2015**

(54) **LIGHTING DEVICE**

(71) Applicant: **Eveready Battery Company, Inc., St.**
Louis, MO (US)

(72) Inventors: **John R. Brown, Mosman (AU); Samuel**
James Weise, Maitland Vale (AU)

(73) Assignee: **Eveready Battery Company, Inc., St.**
Louis, MO (US)

(**) Term: **14 Years**

(21) Appl. No.: **29/487,010**

(22) Filed: **Apr. 4, 2014**

(51) **LOC (10) Cl.** **26-02**

(52) **U.S. Cl.**
USPC **D26/49**

(58) **Field of Classification Search**
USPC D26/37, 38, 40-44, 49, 46; 362/157,
362/158, 183, 184, 194-196, 200-208
CPC F21V 33/00; F21V 14/025; F21V 21/406;
F21Y 2101/02; F21L 2003/00; F21L 2005/00;
F21L 12/00; F21L 4/00; F21L 4/005; F21L
17/00; F21L 13/08
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D414,887 S	10/1999	McDonald et al.	
D423,129 S	4/2000	Nakagawa	
D449,395 S	10/2001	Dalton et al.	
6,366,028 B1	4/2002	Wener et al.	
D467,022 S *	12/2002	Fritz	D26/49
D476,437 S *	6/2003	Dalton et al.	D26/37
D480,826 S *	10/2003	Englert et al.	D26/49
D482,151 S *	11/2003	Shiu	D26/49
D492,807 S *	7/2004	Dalton et al.	D26/49
D493,008 S *	7/2004	Brent	D26/49
D494,298 S	8/2004	Brent	
D494,299 S	8/2004	Dalton et al.	

D501,056 S *	1/2005	Dalton et al.	D26/49
D506,848 S *	6/2005	Kung	D26/49
D512,168 S	11/2005	Suzuki	
D531,337 S	10/2006	Dalton et al.	
D595,438 S *	6/2009	Duszynski	D26/46
D600,841 S *	9/2009	Kung	D26/46
D606,221 S *	12/2009	Kung	D26/49
D608,482 S	1/2010	Brown et al.	
D610,727 S *	2/2010	Nyssen	D26/46
D617,024 S *	6/2010	Brown et al.	D26/49
D638,157 S *	5/2011	Lee	D26/49
D673,708 S *	1/2013	Yeh	D26/46

(Continued)

FOREIGN PATENT DOCUMENTS

CN	3134821	1/2000
CN	3146278	4/2000
CN	3324976	9/2003

(Continued)

Primary Examiner — Ian Simmons

Assistant Examiner — Carissa C Fitts

(74) *Attorney, Agent, or Firm* — Eveready Battery
Company, Inc.

(57) **CLAIM**

We claim the ornamental design for a lighting device, as
shown and described.

DESCRIPTION

FIG. 1 is a front perspective view of the design;

FIG. 2 is a rear perspective view of the design;

FIG. 3 is a left side view of the design;

FIG. 4 is a right side view of the design;

FIG. 5 is a top view of the design;


FIG. 6 is a bottom view of the design;

FIG. 7 is a front view of the design; and,

FIG. 8 is a back view of the design.

Any broken lines shown are for illustrative purposes only and
form no part of the claimed design.

1 Claim, 3 Drawing Sheets

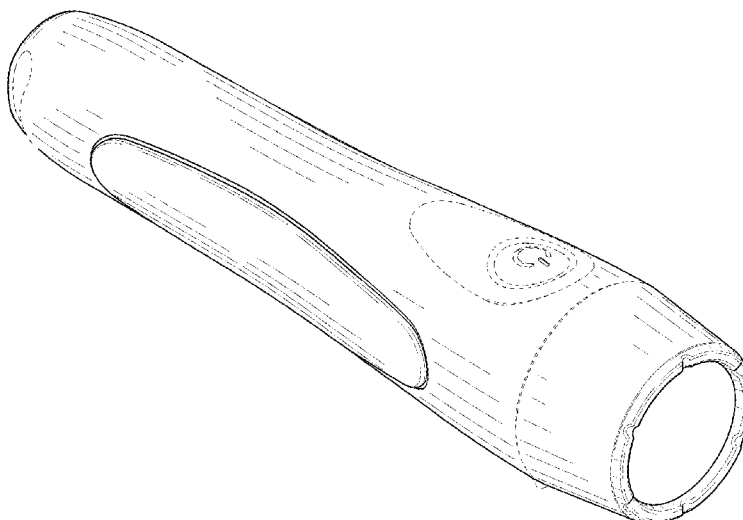

US D734,885 S

Page 2

(56)

References Cited

U.S. PATENT DOCUMENTS

D716,482 S * 10/2014 Ma D26/49
D716,983 S * 11/2014 Ma D26/49

FOREIGN PATENT DOCUMENTS

CN 3354070 2/2004
CN 3391084 9/2004
CN 3678597 8/2007
CN 300725733 12/2007

CN	300730725	1/2008
CN	301131073	2/2010
CN	301286594	7/2010
CN	301532258	4/2011
CN	301635760	8/2011
CN	302022666	8/2012
CN	302124746	10/2012
CN	302234363	12/2012
EM	0000693800001	9/2008
EM	0010293260003	10/2008
EM	0011919100001	1/2010
EM	0005568400004	7/2011

* cited by examiner

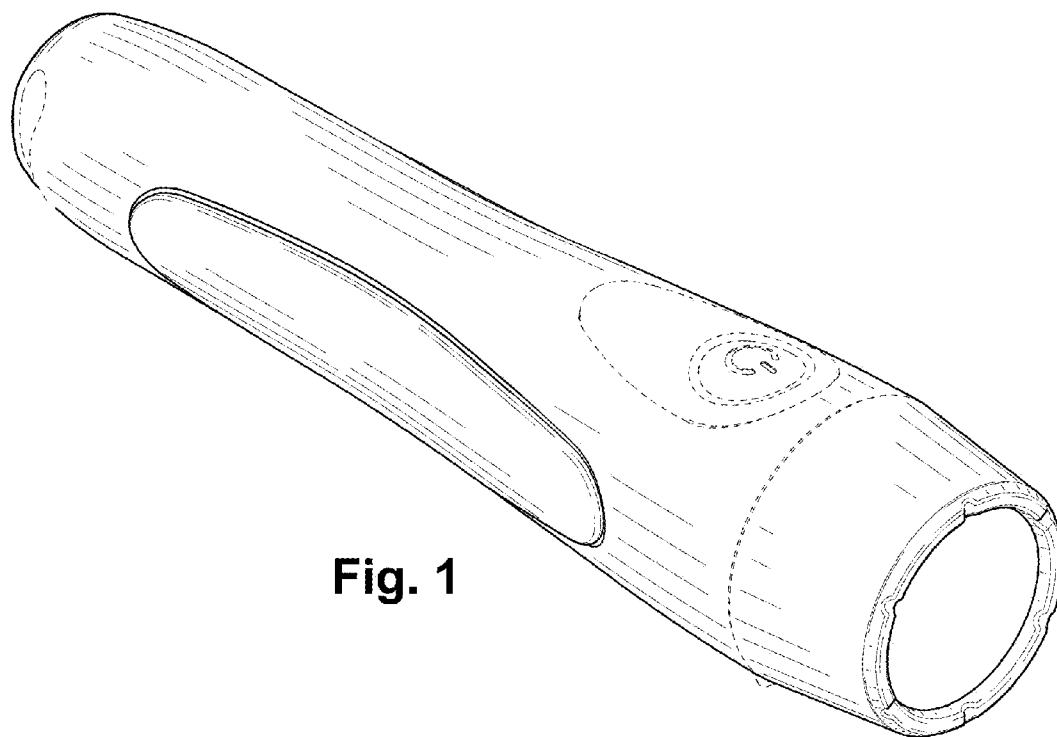


Fig. 1

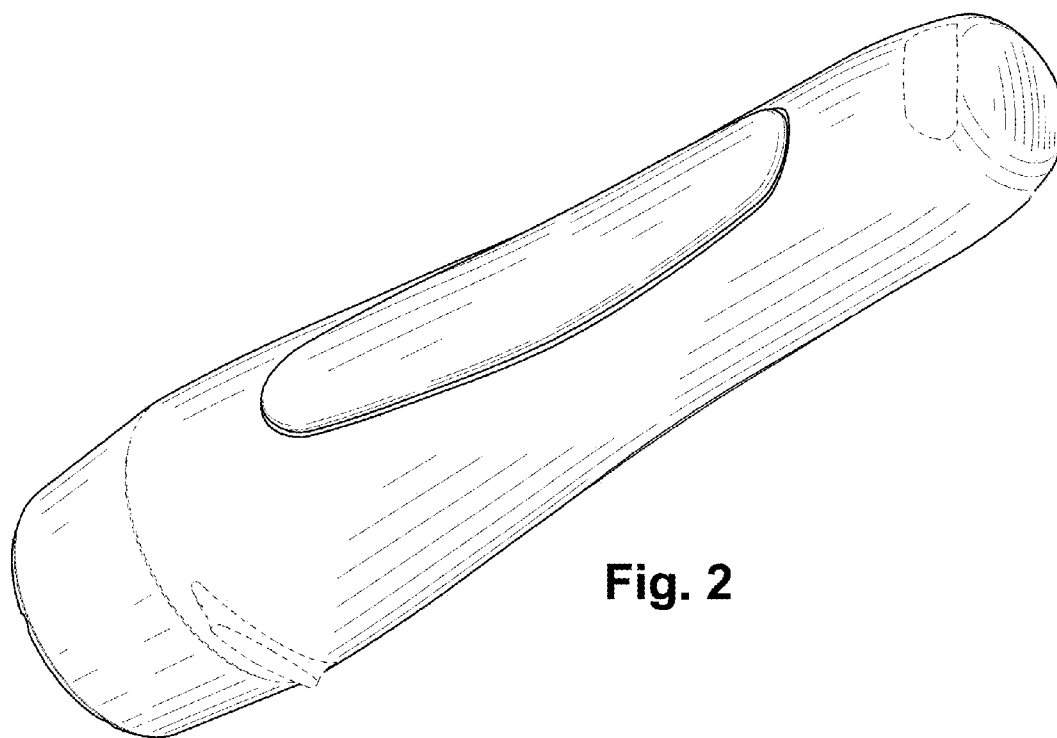


Fig. 2

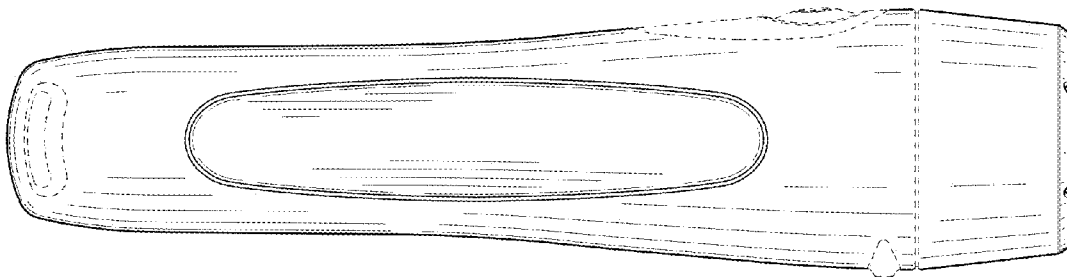


Fig. 3

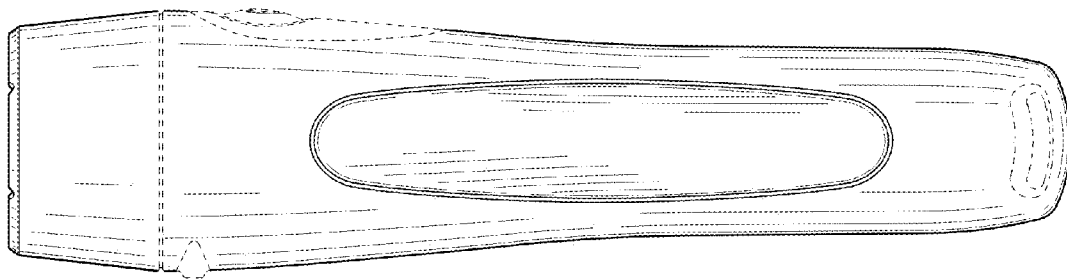


Fig. 4

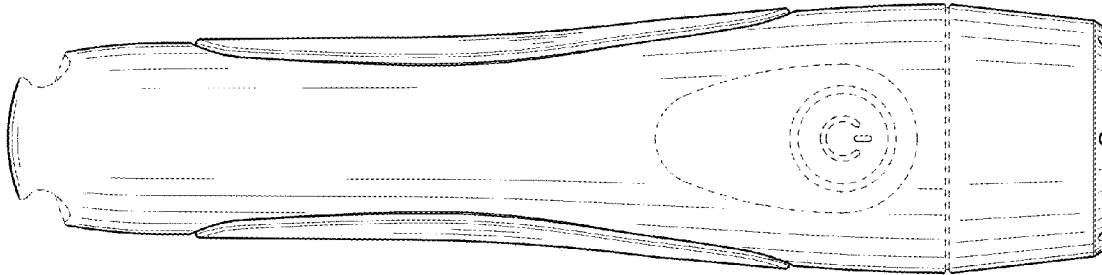


Fig. 5

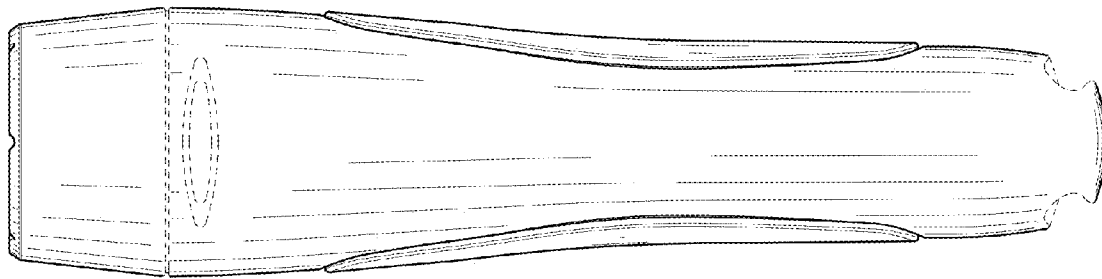


Fig. 6




Fig. 7




Fig. 8