


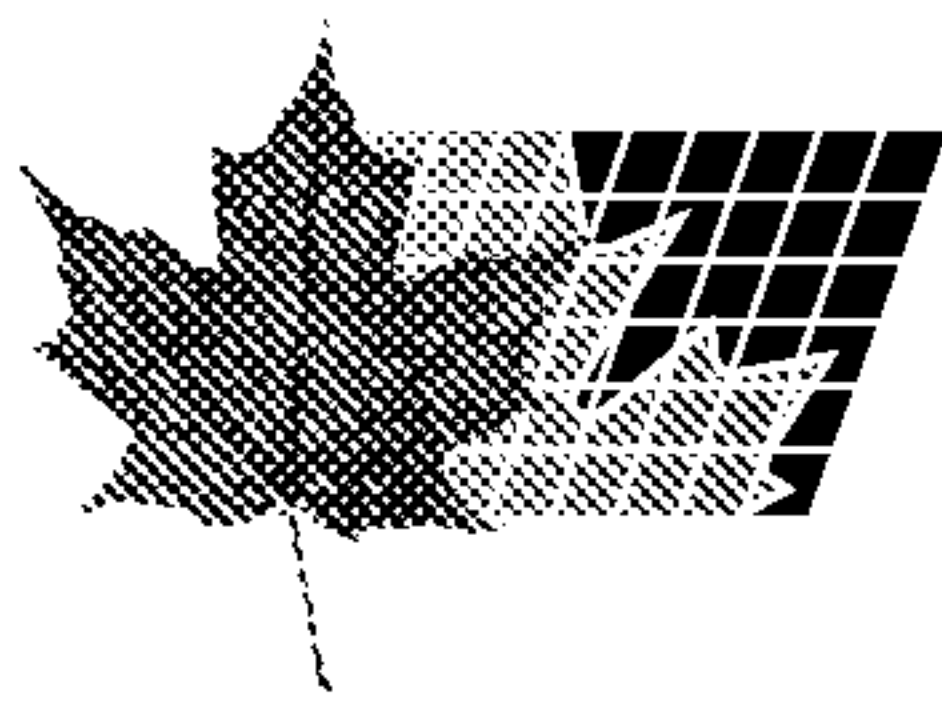

(11) (21) (C) **2,132,471**
(22) 1994/09/20
(43) 1995/05/18
(45) 2000/04/11

(72) Fisli, Tibor, US

(72) Guerin, Jean-Michel, US

(72) Maeda, Patrick Y., US

(72) Quant, Donald J., US


(73) XEROX CORPORATION, US

(51) Int.Cl.⁵ G03G 15/04

(30) 1993/11/17 (154881) US

(54) **SYSTEME DE BALAYAGE DE TRAME A GRANDE
EFFICACITE**

(54) **HIGH EFFICIENCY MULTISPOT FACET TRACKED RASTER
OUTPUT SCANNING SYSTEM**

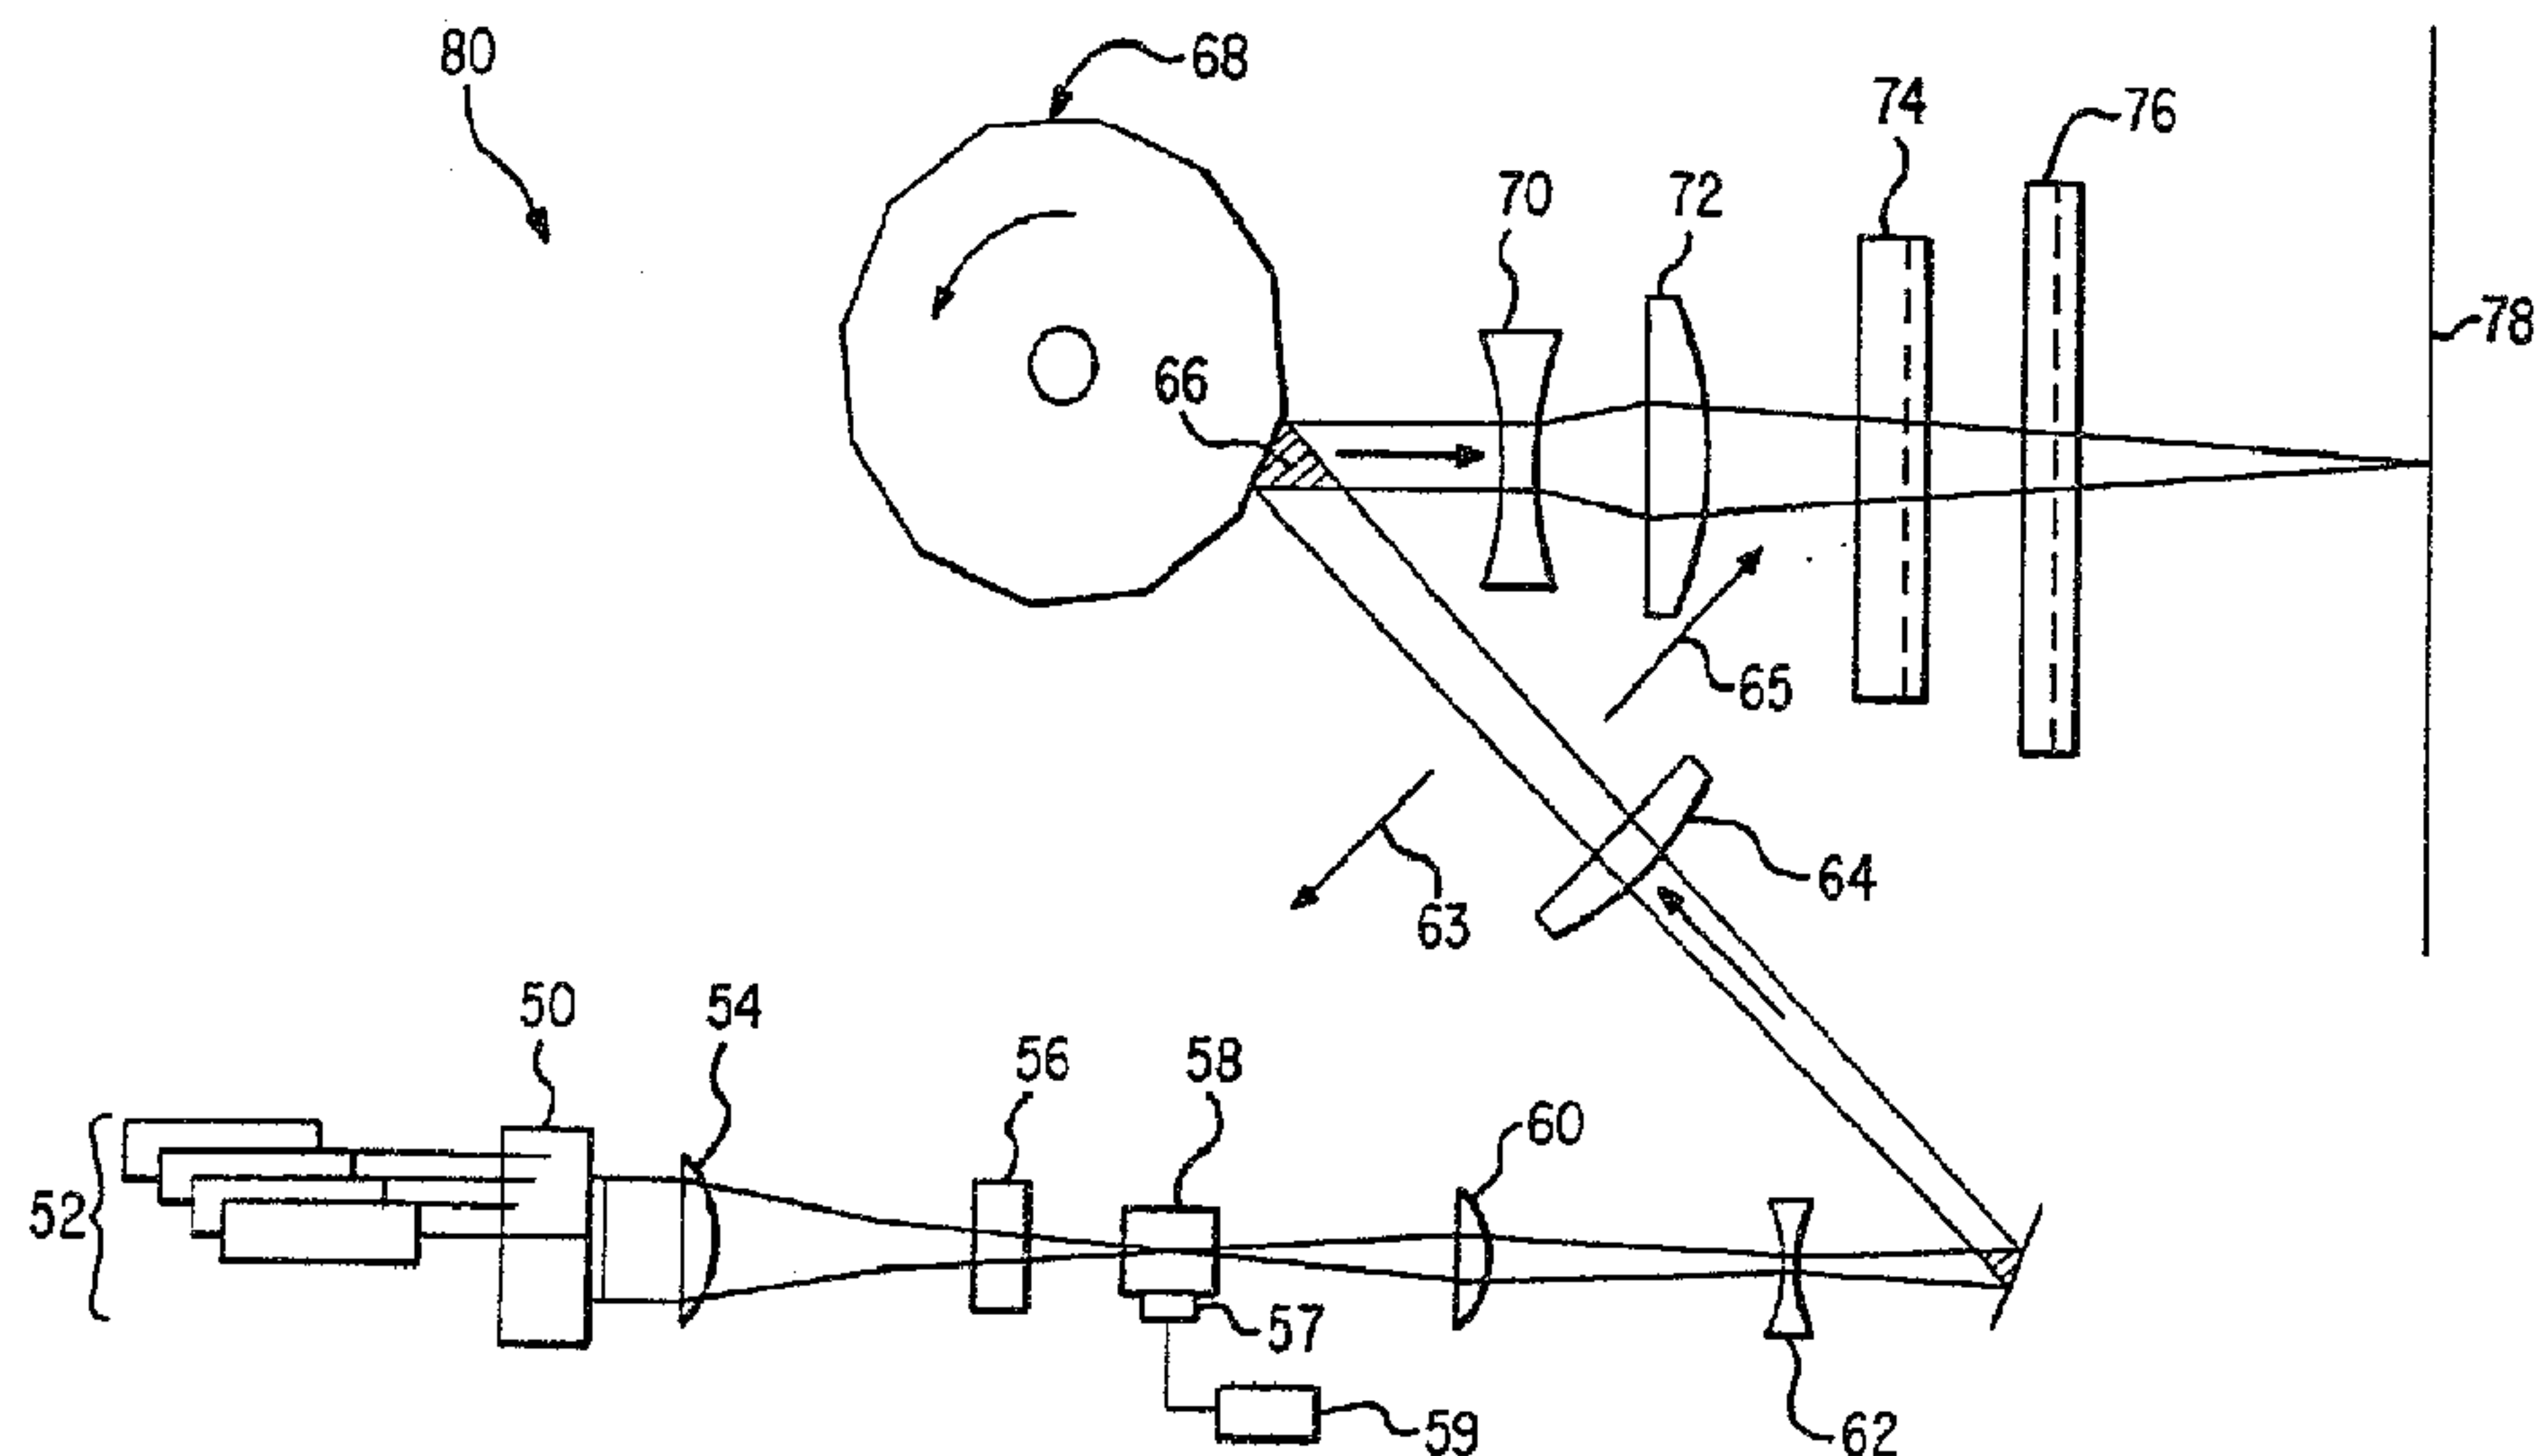

(57) The present invention is a novel raster output scanner (ROS) configuration that employs modulated laser diodes as the light source. Each laser diode is coupled to a dedicated driver that modulates the light beam according to digital video signal data. The present invention employs a single-channel acoustic-optic cell that deflects the multiple beams to maintain proper facet tracking. A single transducer is coupled to the single-channel acoustic-optic cell that generates the necessary acoustic wave to maintain proper tracking.



2132471

ABSTRACT

5 The present invention is a novel raster output scanner (ROS) configuration
that employs modulated laser diodes as the light source. Each laser diode is
coupled to a dedicated driver that modulates the light beam according to
digital video signal data. The present invention employs a single-channel
acoustic-optic cell that deflects the multiple beams to maintain proper facet
tracking. A single transducer is coupled to the single-channel acoustic-optic
10 cell that generates the necessary acoustic wave to maintain proper tracking.

15

20

25

2132471

**HIGH EFFICIENCY MULTISPOT FACET TRACKED RASTER
OUTPUT SCANNING SYSTEM**

Field of the Invention

5

The present invention relates in general to xerographic systems using raster optical scanning (ROS) and, in particular, to xerographic systems employing multispot laser diodes in a facet tracked ROS architecture.

10

Background of the Invention

Xerographic printing employing raster output scanners (ROS) has evolved along the lines of greater efficiency, higher data throughput rates, improved print quality, lower cost of manufacture, and smaller packaging. These
15 metrics of improved xerographic printing are influenced by various factors. The goal of designing a ROS system is to choose some combination of factors that produces a system that optimizes these metrics.

Efficiency of a ROS system has, in general, two major components: power
20 throughput efficiency and scanning efficiency. Power throughput efficiency is defined as the ratio of the power output of the laser to the power of the beam received at the photoreceptor, as calculated in a "non-dynamic" mode (i.e. no polygon movement). Primarily, power throughput efficiency is a function of the type of illumination the facet receives and of optical element
25 surface losses.

2132471

Optical element surface loss is due to undesirable absorption, reflection, and transmission in the various optical elements. While these factors can be controlled to some extent, there comes a point at which no further efficiencies may be achieved at the optical element level. Instead, there are certain system design choices that can be made with the goal of maximizing scanning efficiency.

Three methods of polygon facet illumination are currently practiced in ROS systems: over-filled, under-filled, and facet tracked. As regards efficiency, facet tracking has certain advantages over the other two designs. For example, facet tracking avoids the power throughput loss of over-filled scanning while nearly adopting its perfect scanning efficiency. Likewise, facet tracking avoids the scanning inefficiencies of under-filled scanning while adopting its high power throughput. Thus, facet tracking is generally a better choice of scanning techniques when designing an optimally efficient system.

As mentioned above, another metric of xerographic printing is data throughput. To improve data throughput rates, many present systems employ multiple laser beams to concurrently "write" on the surface of a photoreceptor. The speed-up of the printing process is generally proportional to the number of independently addressable beams writing on the photoreceptor.

25

2132471

One prior art system employing multiple, independently addressable beams in a facet tracked configuration is detailed in sagittal view in Figure 1. System 10 employs a gas laser 12 as its light source. A pre-modulator lens
5 14 provides the correct shape of the beam for beam splitter 16a which then splits the input beam into multiple beams (e.g. beams 18a and 18b). The acoustic-optic modulator cell 20 provides multi-channel modulation (e.g. channel 22a and 22b) for the multiple beams.

10 As will be discussed in greater detail below, A-O cell 20 accomplishes two functions: it modulates the light according to an input video signal and deflects the beams to maintain facet tracking. The output beams from the A-O cell are recombined in beam combiner 16b, transmitted through post modulation optics 24, and reflected by a mirrored facet on a rotating polygon
15 26. The reflected beams 28 are transmitted through the focusing and polygon wobble correcting optics 30 and imaged onto the surface of photoreceptor 32.

Figure 2 shows the workings of the A-O cell 20 in greater detail. In order to
20 provide multi-channel modulation, the A-O cell is partitioned into regions (e.g. regions 44 and 46), allowing the various beams (e.g. beams 18a and 18b) to be independently addressable.

To create the partitioning for the different optical channels, individual
25 transducers (e.g. transducers 34 and 36) are coupled to A-O cell. Each

2132471

transducer transmits the sound wave (e.g. wave 42) that propagates through the channel. As is well known, the frequency of the sound wave determines the angle of deflection of the light beam.

5 The sound wave for a given channel is generated by a separate driver (e.g. drivers 38 and 40). The drivers accept their own digital video data input in order to modulate the light beams. As mentioned above, the modulation of separate channels by corresponding drivers allows each beam to be individually addressable.

10

The system, depicted in Figures 1 and 2, is not optimal from the standpoint of several metrics. For example, the use of beam splitters and separate acoustic channels operated by dedicated drivers adds greatly to the cost of system manufacture. Moreover, the use of a gas laser as the light source
15 increases the packaging size of the system. For example, gas lasers generally have a minimum size of one inch in diameter and 6 to 8 inches in length. These dimensions represent a lower bound on the size of a optical system employing gas lasers.

20 Thus, there is a need for a multiple, independently addressable beam ROS system that is not as complex or costly to manufacture. Additionally, there is a need for a multiple beam ROS system that has less of a space requirement than current systems.

25

It is therefore an object of an aspect of the present invention to provide a system that employs a multiple, independently addressable beam **ROS** system that does not require beam splitting and recombining.

5

It is an object of an aspect of the present invention to provide a multiple beam, facet tracking **ROS** system having a lower cost of manufacture.

10 It is an object of an aspect of the present invention to provide a multi-beam, facet tracked **ROS** system having a reduced packaging size for the system optics.

15 It is an object of an aspect of the present invention to provide a system that employs a method of modulation having faster switching characteristics than a typical A-O cell.

Summary of the Invention

20 In summary, the present invention in one aspect thereof is a novel facet tracking **ROS** architecture that uses multiple laser diodes as the light source. The laser diodes are individually addressed and modulated at the source by directly switching the diode current, in response to input digital video data signals. The modulated beam
25 is then deflected by an A-O cell to induce proper tracking of the beam on the effective facet surface. Because the laser light is modulated at the diodes, the present invention need only use a single-channel A-O cell having a single transducer to drive the cell.

30

Another aspect of this invention is as follows:

An apparatus for raster output scanning in a facet tracking architecture, the apparatus comprising:

- 5 a rotating mirror polygon having trackable facets;
- a plurality of laser diodes each configured to emit a laser beam directed toward trackable facets of the rotating mirror polygon;
- 10 a plurality of dedicated drivers, with each of said plurality of laser diodes coupled to at least one dedicated driver to modulate intensity of the laser beam; and
- a single-channel acoustic-optic cell positioned between trackable
15 facets of the rotating mirrored polygon and the plurality of laser diodes, the single-channel acoustic-optic cell being controlled to deflect the laser beams as required to maintain facet tracking of trackable facets of the rotating mirror polygon.
- 20 One advantage of an aspect of the present invention is greater data throughput. The present invention modulates the individual laser diodes with electronic switching of the diode current. In general, electronic switching is much faster than the acoustic switching provided a multi-channel A-O cell. Thus, the data throughput rate
25 is greatly increased.

An advantage of an aspect of the present invention is power throughput efficiency. The present invention employs laser diodes as opposed to a split beam gas laser source. When, according to
30 the input video data, no useful writing is to be accomplished at

2132471

the photoreceptor, the present invention turns off the current to the laser diode which has a negligible delay as a laser element. Turning the diode off reduces power consumption. By contrast, a gas laser has a much greater delay as a lasing element which makes
5 direct modulation impractical. To avoid writing to the photoreceptor with a gas laser, the beam is deflected to a "stop" to insure that it does not reach the photoreceptor. The beam from the gas laser, however, is not turned off and, consequently power is consumed.

10

15

20

25

30

An advantage of an aspect of the present invention is smaller package size. Multispot laser diode packages, in general, are cubic on the order of a quarter inch per side. Thus, a quad pack of laser diodes would take up
5 considerably less space than a gas laser source of one inch in diameter and 6 to 8 inches long.

An advantage of an aspect of the present invention is lower cost of manufacture. Because multiple laser diodes are independently modulated, there is no need for beam
10 splitters, beam combiners, and multiple channel A-O devices in the present invention. This simplified optical system reduces the cost of manufacture.

Additional objects and features of the present invention will be more readily apparent from the following detailed
15 description of an exemplary embodiment thereof, as illustrated in the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a layout of a prior art facet tracking ROS system that employs multiple laser beams. The single gas
20 laser source beam is split into multiple beams using a beam splitter.

Figure 2 shows the design of a multiple channel acoustic-optic cell as used in the system depicted in Figure 1. Each channel is modulated by a dedicated transducer in
25 order to make each beam individually addressable.

Figure 3 is a tangential view of the optical path of a preferred embodiment made in accordance with the principles of the present invention.

2132471

Figure 4 is an unfolded sagittal view of the optical path displayed in Figure 3.

5 Figure 5A is a cut-away perspective drawing of a single-channel A-O cell having one transducer. Four light beams are depicted traversing the cell.

Figure 5B is a cut-away, sagittal view of a single-channel A-O cell. The sagittal waists of the four beams are shown.

10

Detailed Description of the Preferred Embodiments

The following description is presented to enable any person skilled in the art to make and use the invention, and is provided in the context of a particular
15 application and its requirements. Various modifications to the preferred embodiment will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention as defined by the appended claims. Thus, the present invention is
20 not intended to be limited to the embodiment shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

Referring to Figure 3, a tangential view of the optical path of the presently preferred embodiment 80 is shown. The light source of the system is a quad-
25 pack of laser diodes 50 with each diode positioned on top of one another in

2132471

the sagittal plane (as seen clearly in Figure 4). It will be appreciated that various configurations of laser diodes are well known in the art and that the present invention should not be limited to the particular four-by-one configuration disclosed in the presently preferred embodiment. For
5 example, quad-packs with diodes positioned two-by-two are also well known.

To be independently addressable, separate drivers 52 are dedicated to each individual laser diodes in the quad-pack. As is well known in the art, diodes are modulated by switching the current to the diode on and off, according to
10 input video signal data. The speed of switching is limited, in general, by the speed of the driver electronics, since the speed of the laser diode itself is practically unlimited. However, electronic switching, in general, is much faster than the acoustic switching provided in Figure 2. Thus, the data throughput of the present invention is much greater than previous multiple
15 beam ROS systems.

As the light emanates from laser diodes 50, the light is focused onto single-channel A-O cell 58 by cylindrical lenses 54 and 56. Because the light from the diodes is individually modulated, there is no need in the present
20 invention for an A-O cell with multiple channels driven by separate transducers. Instead, A-O cell 58 is driven by a single transducer 57 which, in turn, is driven by a single driver 59 that smoothly induces the input beams to deflect through an angle to maintain proper facet tracking. The path of beam deflection is depicted as moving along tracking arrow 65 and
25 return arrow 63. It will be appreciated that the method of maintaining a

2132471

proper angle and subsequent parallel beam displacement for facet tracking is well known in the art.

After the light beams have been deflected by A-O cell 58, the beams are
5 focused in the sagittal meridian onto effective facet 66 by spherical lens 60,
cylindrical lens 62 , and spherical lens 64. The effective facet is caused to
move through an angular and translational displacement as polygon 68
rotates. Facet tracking insures that the beams stay centered on the facet
throughout all positions in which the facet may effectively reflect light to
10 the photoreceptor 78.

After the light is thus reflected, the beams are again focused by cylindrical
lenses 70 and 72, negative cylindrical lens 74 and concave cylindrical mirror
76. The focused beams impinge upon the surface of photoreceptor 78 to
15 produce the effective "writing" of the system.

A sagittal view of a presently preferred embodiment 80 is shown in Figure 4.
As can be seen from this view, the laser diodes are positioned so that their
beams ride on top of each other in this plane. Dedicated drivers 52 are
20 coupled to individual diodes 50 to provide individual addressability. Also
seen, the four light beams image the photoreceptor surface 78 on top of each
other. It will be appreciated that the beams could be staggered by some
interlacing scheme in order to accommodate the optical system design as
well as to produce a smoother output to the human eye. It will also be
25 appreciated that other optical design configurations are possible. For

2132471

example, lenses 54 and 56, lenses 60 and 62, and lenses 70 and 72 could each be constructed as single elements. Other optical design modifications are possible without detracting from the thrust of the present invention. Thus, the present invention should not be limited to the particular embodiment
5 shown in Figure 3 and 4.

Figure 5A is a cut-away, perspective view of the single-channel A-O cell as used in the present invention. As can be seen, the four light beams 100 enter the A-O cell and are deflected by a single-channel 101 that is produced by
10 transducer 57. Because transducer 57 is driven by a single driver 59, all the beams that are in the channel 101 at the same time are affected the same. It will be appreciated that because the beams are modulated at the source, there will be times in which not all four beams illuminate the A-O cell simultaneously. Figure 5B is a sagittal view of the single-channel A-O cell
15 shown in Figure 5A.

In summary, the present invention provides a novel system architecture which improves on the typical facet tracking ROS configuration. The present invention employs a set of laser diodes which are individually
20 modulated at the source. Because the system modulates its multiple laser diodes at the source, the optical system of the present invention can use a single-channel A-O cell to achieve the necessary beam deflection for proper facet tracking, as opposed to a multiple channel/multiple transducer A-O cell. Additionally, the present invention does not need to use beam splitters

25

2132471

and recombiners to produce multiple beams from one source. Thus, the cost of manufacturing the present invention is less than previous systems.

5 The present invention also improves the data throughput rate as compared with previous systems. The switching speed of the electronics need to modulate the individual laser diodes is faster than the acoustic switching used in a multiple channel A-O cell.

10 The present invention reduces the required packaging size of multiple beam facet tracking ROS systems. Laser diodes are in general orders of magnitude smaller than their gas laser counterparts.

15

20

25

WHAT IS CLAIMED:

1. An apparatus for raster output scanning in a facet tracking architecture, the apparatus comprising:

a rotating mirror polygon having trackable facets;


a plurality of laser diodes each configured to emit a laser beam directed toward trackable facets of the rotating mirror polygon;

a plurality of dedicated drivers, with each of said plurality of laser diodes coupled to at least one dedicated driver to modulate intensity of the laser beam; and

a single-channel acoustic-optic cell positioned between trackable facets of the rotating mirrored polygon and the plurality of laser diodes, the single-channel acoustic-optic cell being controlled to deflect the laser beams as required to maintain facet tracking of trackable facets of the rotating mirror polygon.


2. An improved apparatus as recited in claim 1 wherein dedicated drivers provide an output stream of signals that correspond to video data.

2132471

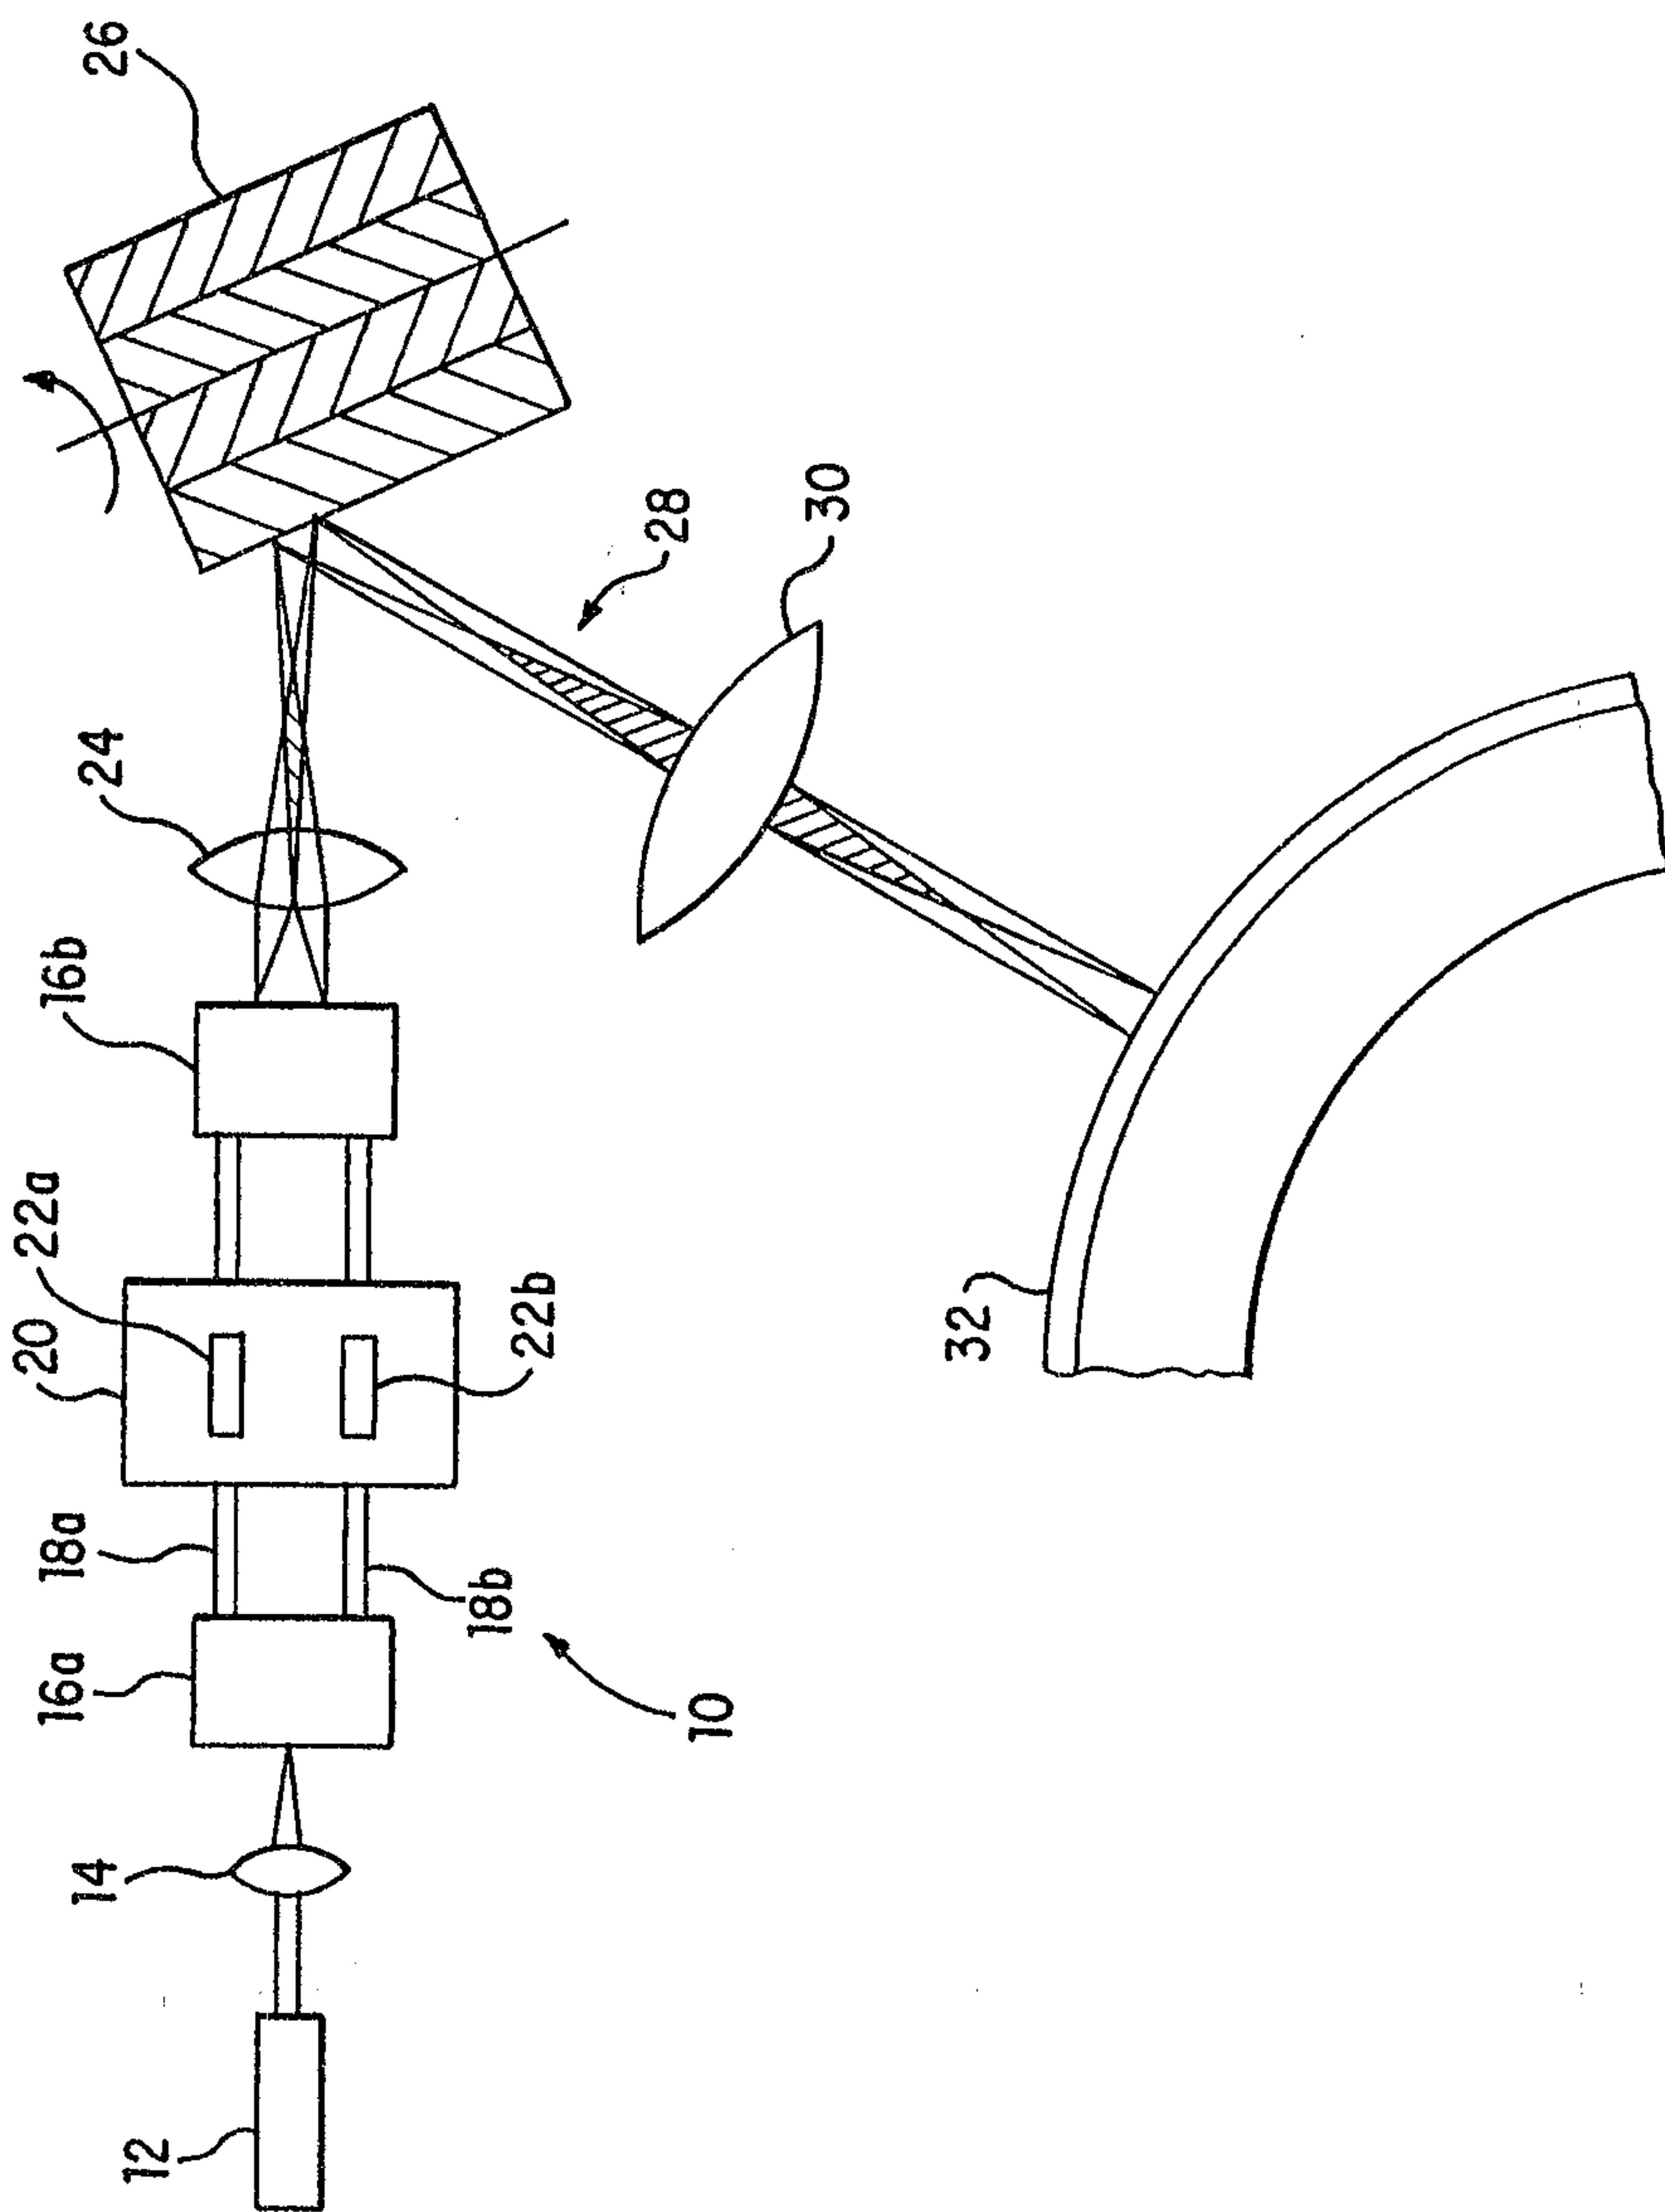


Sent to Mr. Bureau


2132471

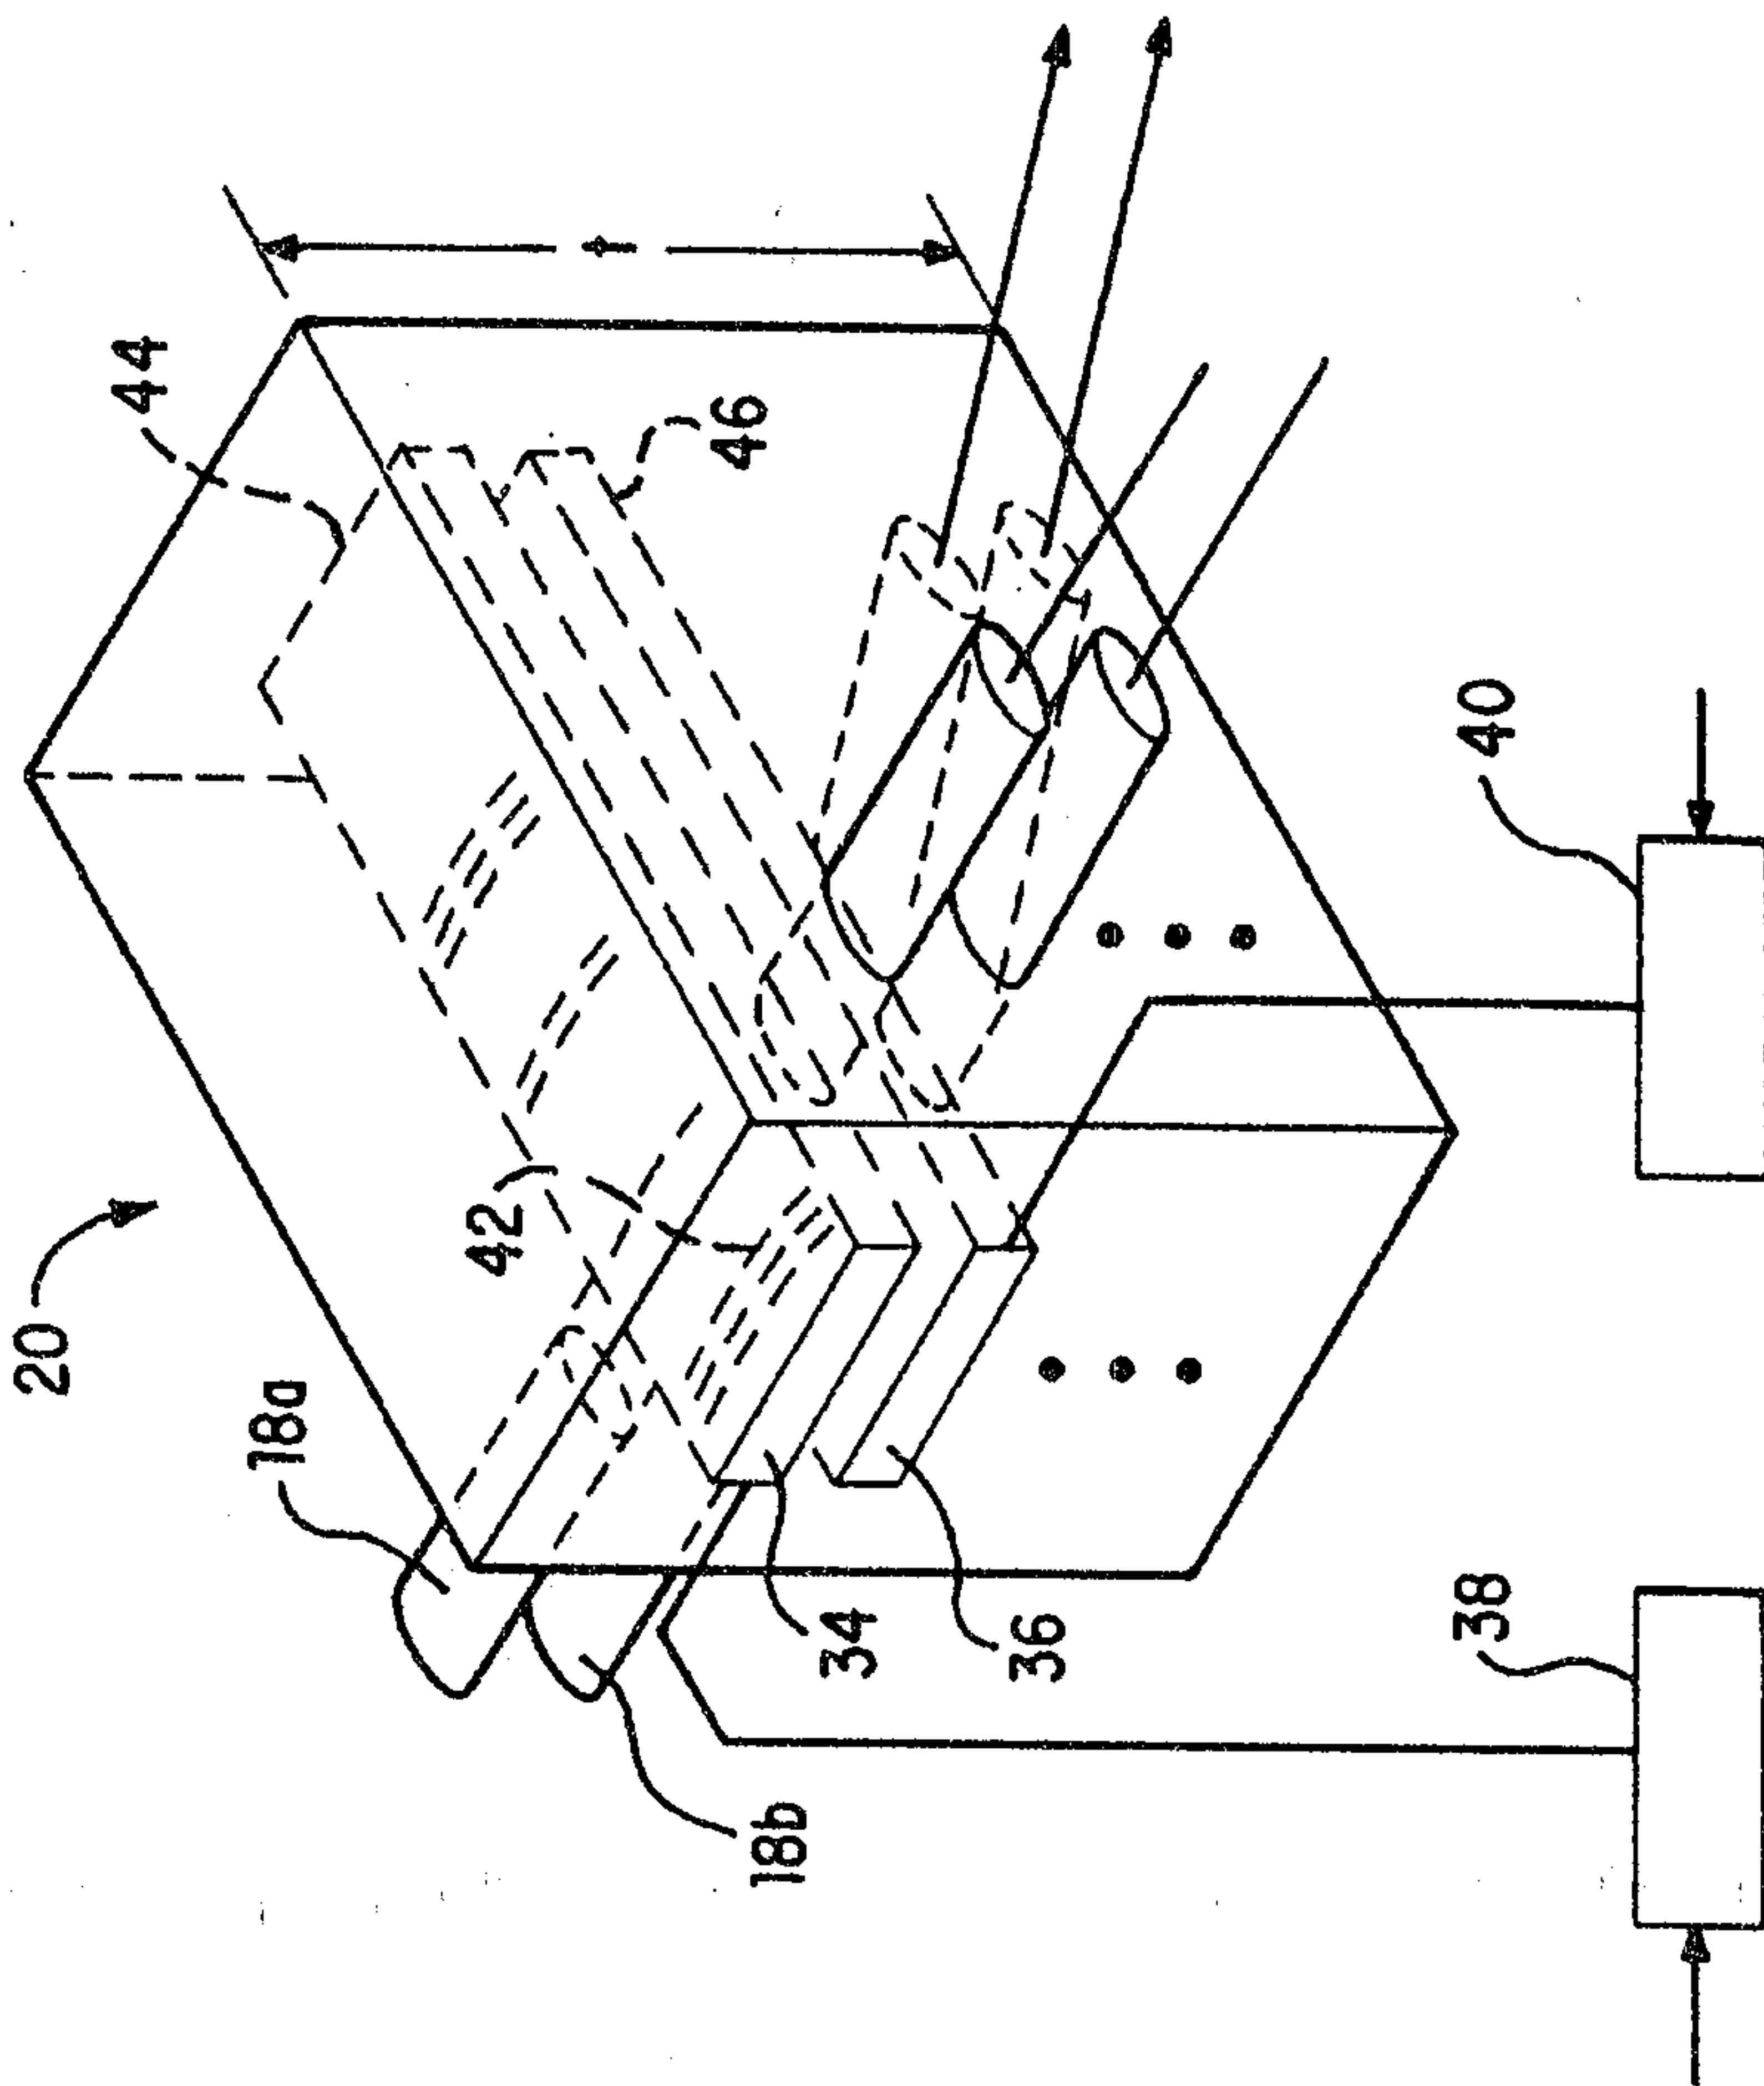

Sent to Mr. Bureau

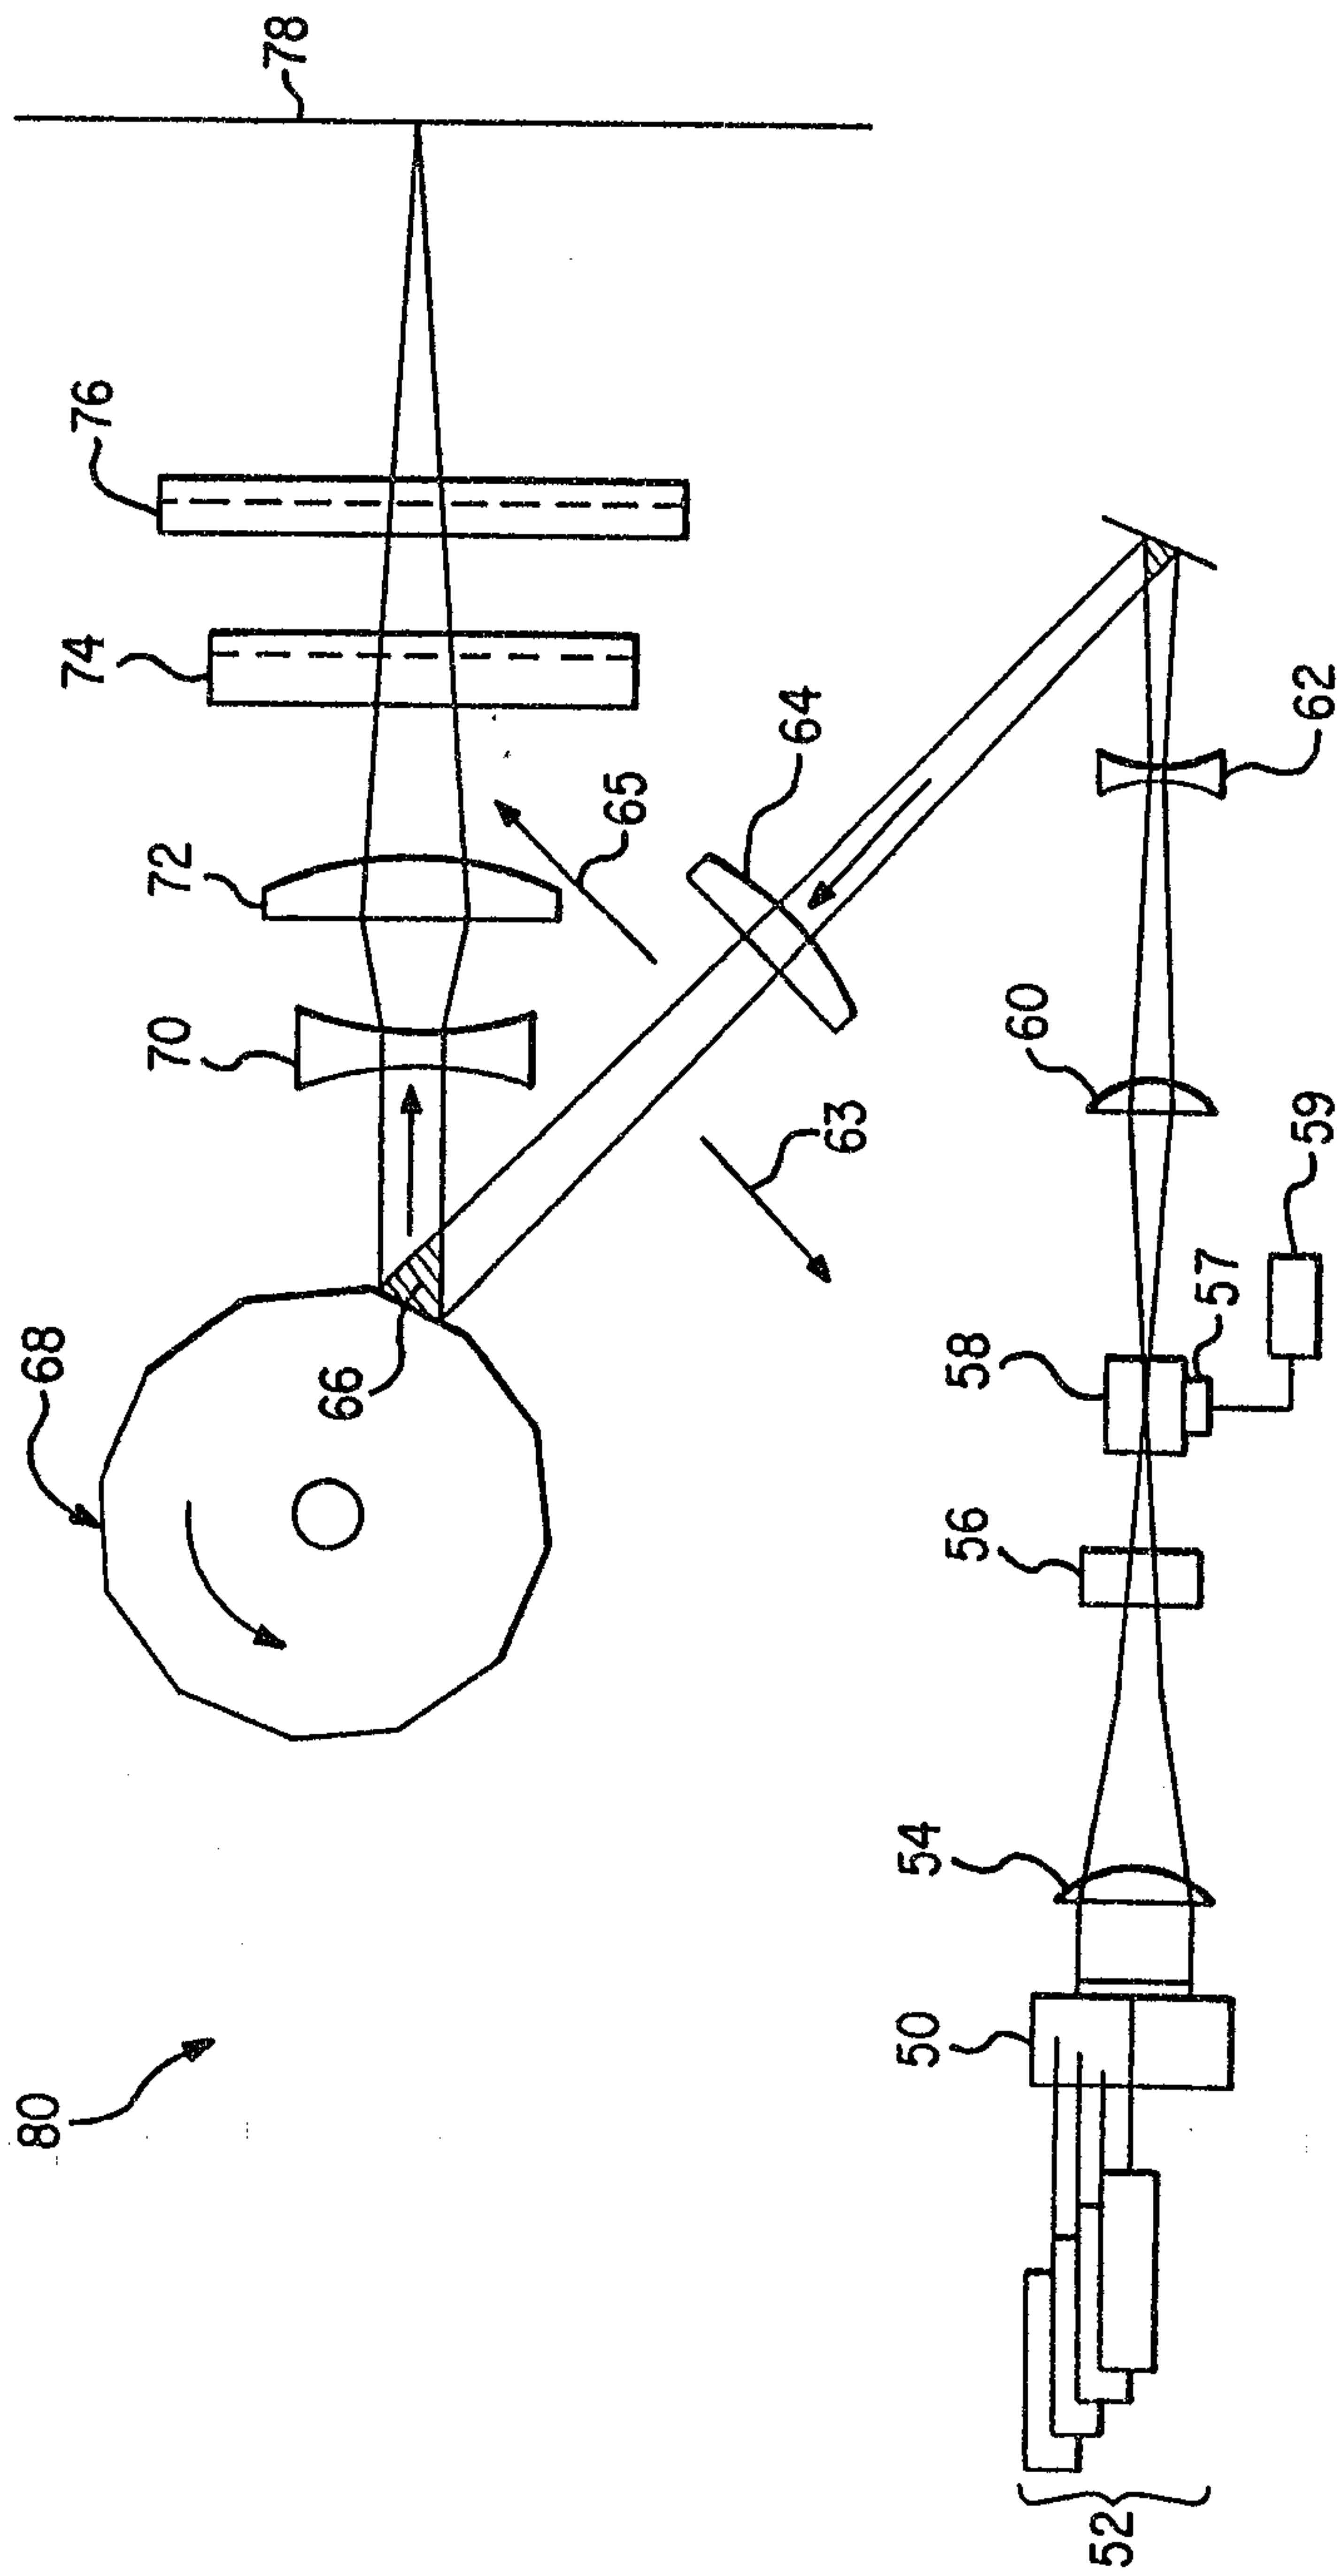


Signed: *M. C. Burnell*

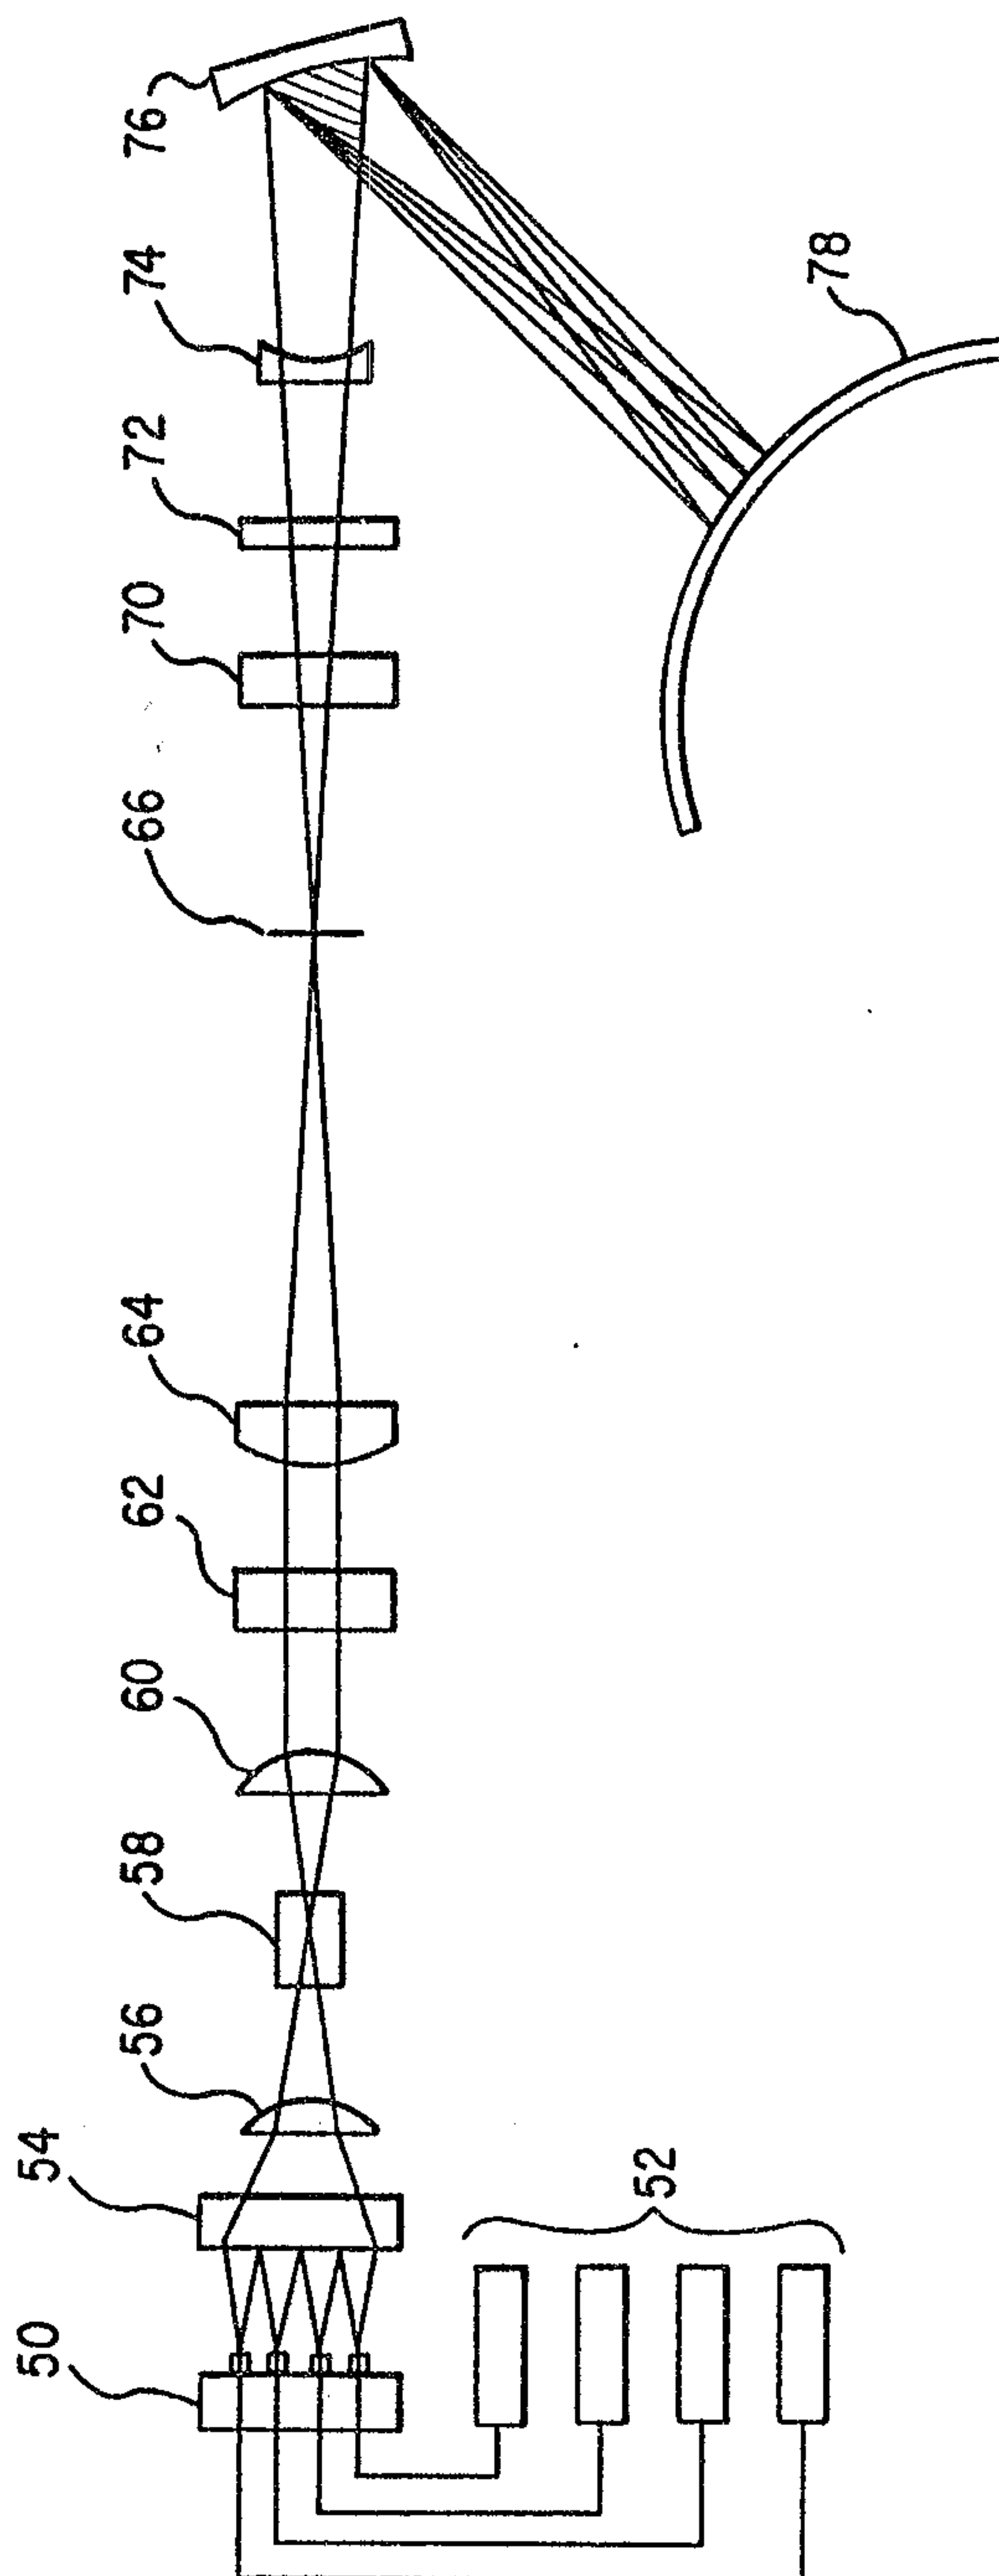


Sent to Mr. Bureau

2132471

5A

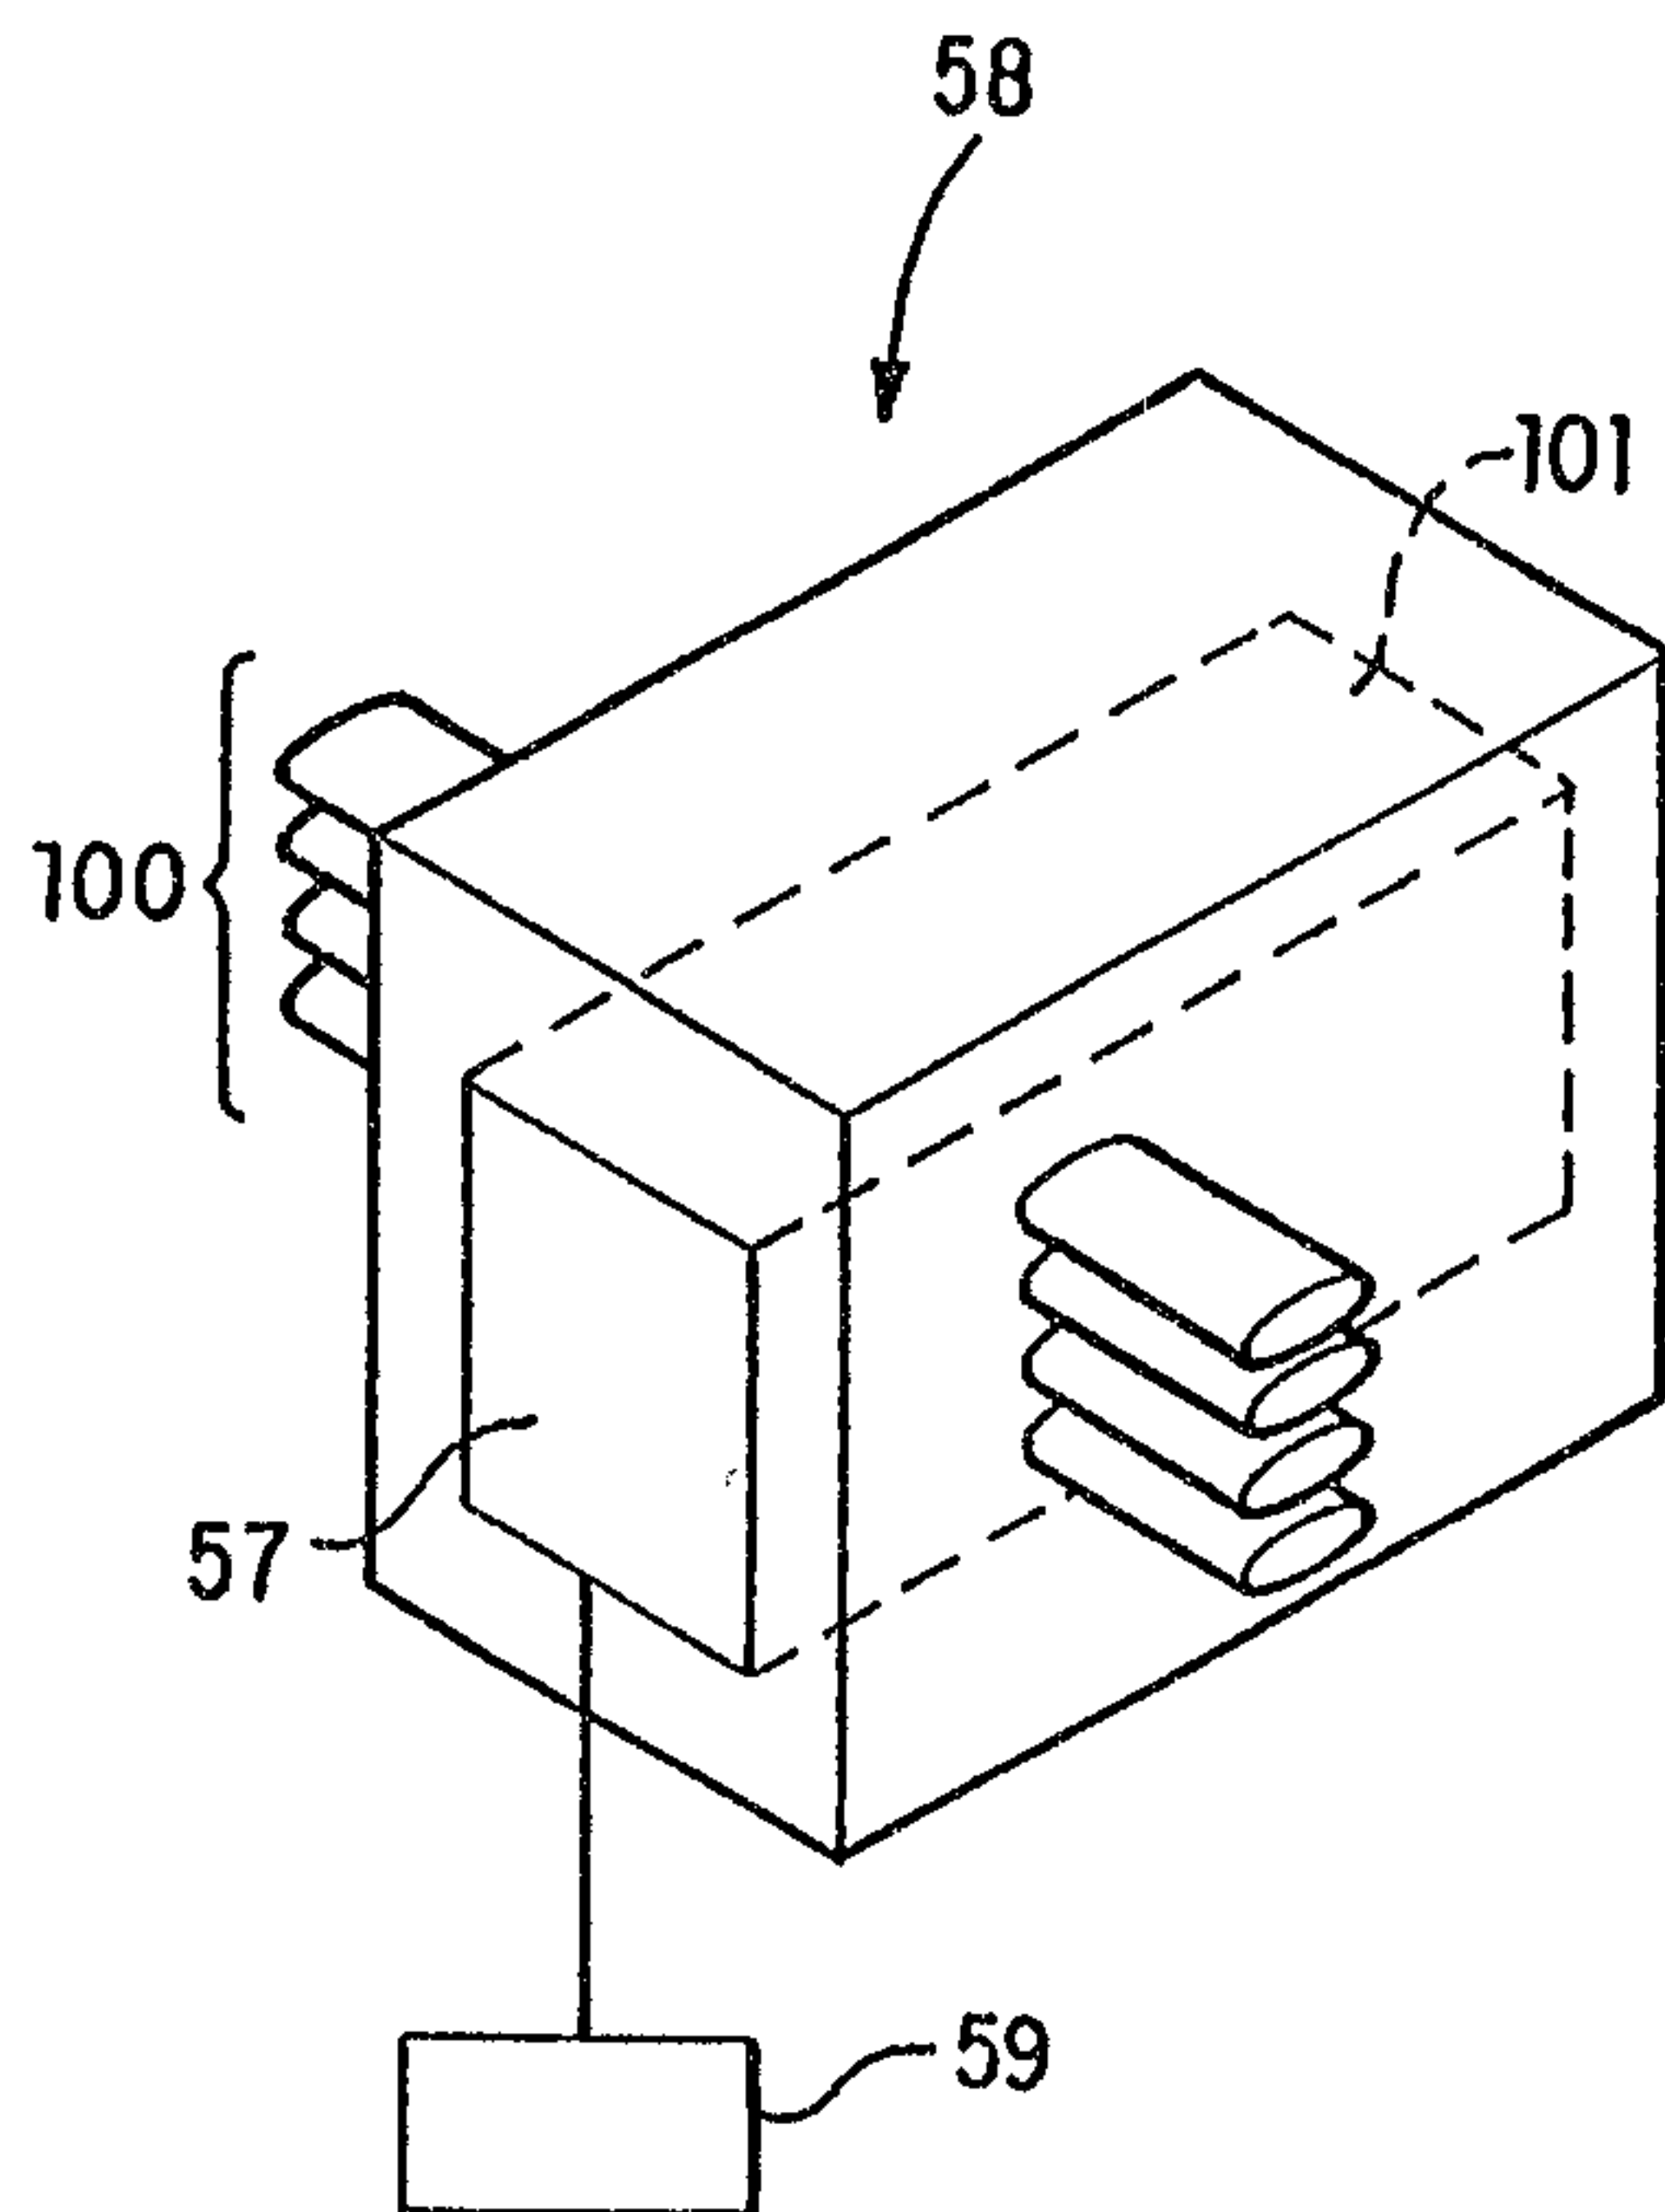

5B

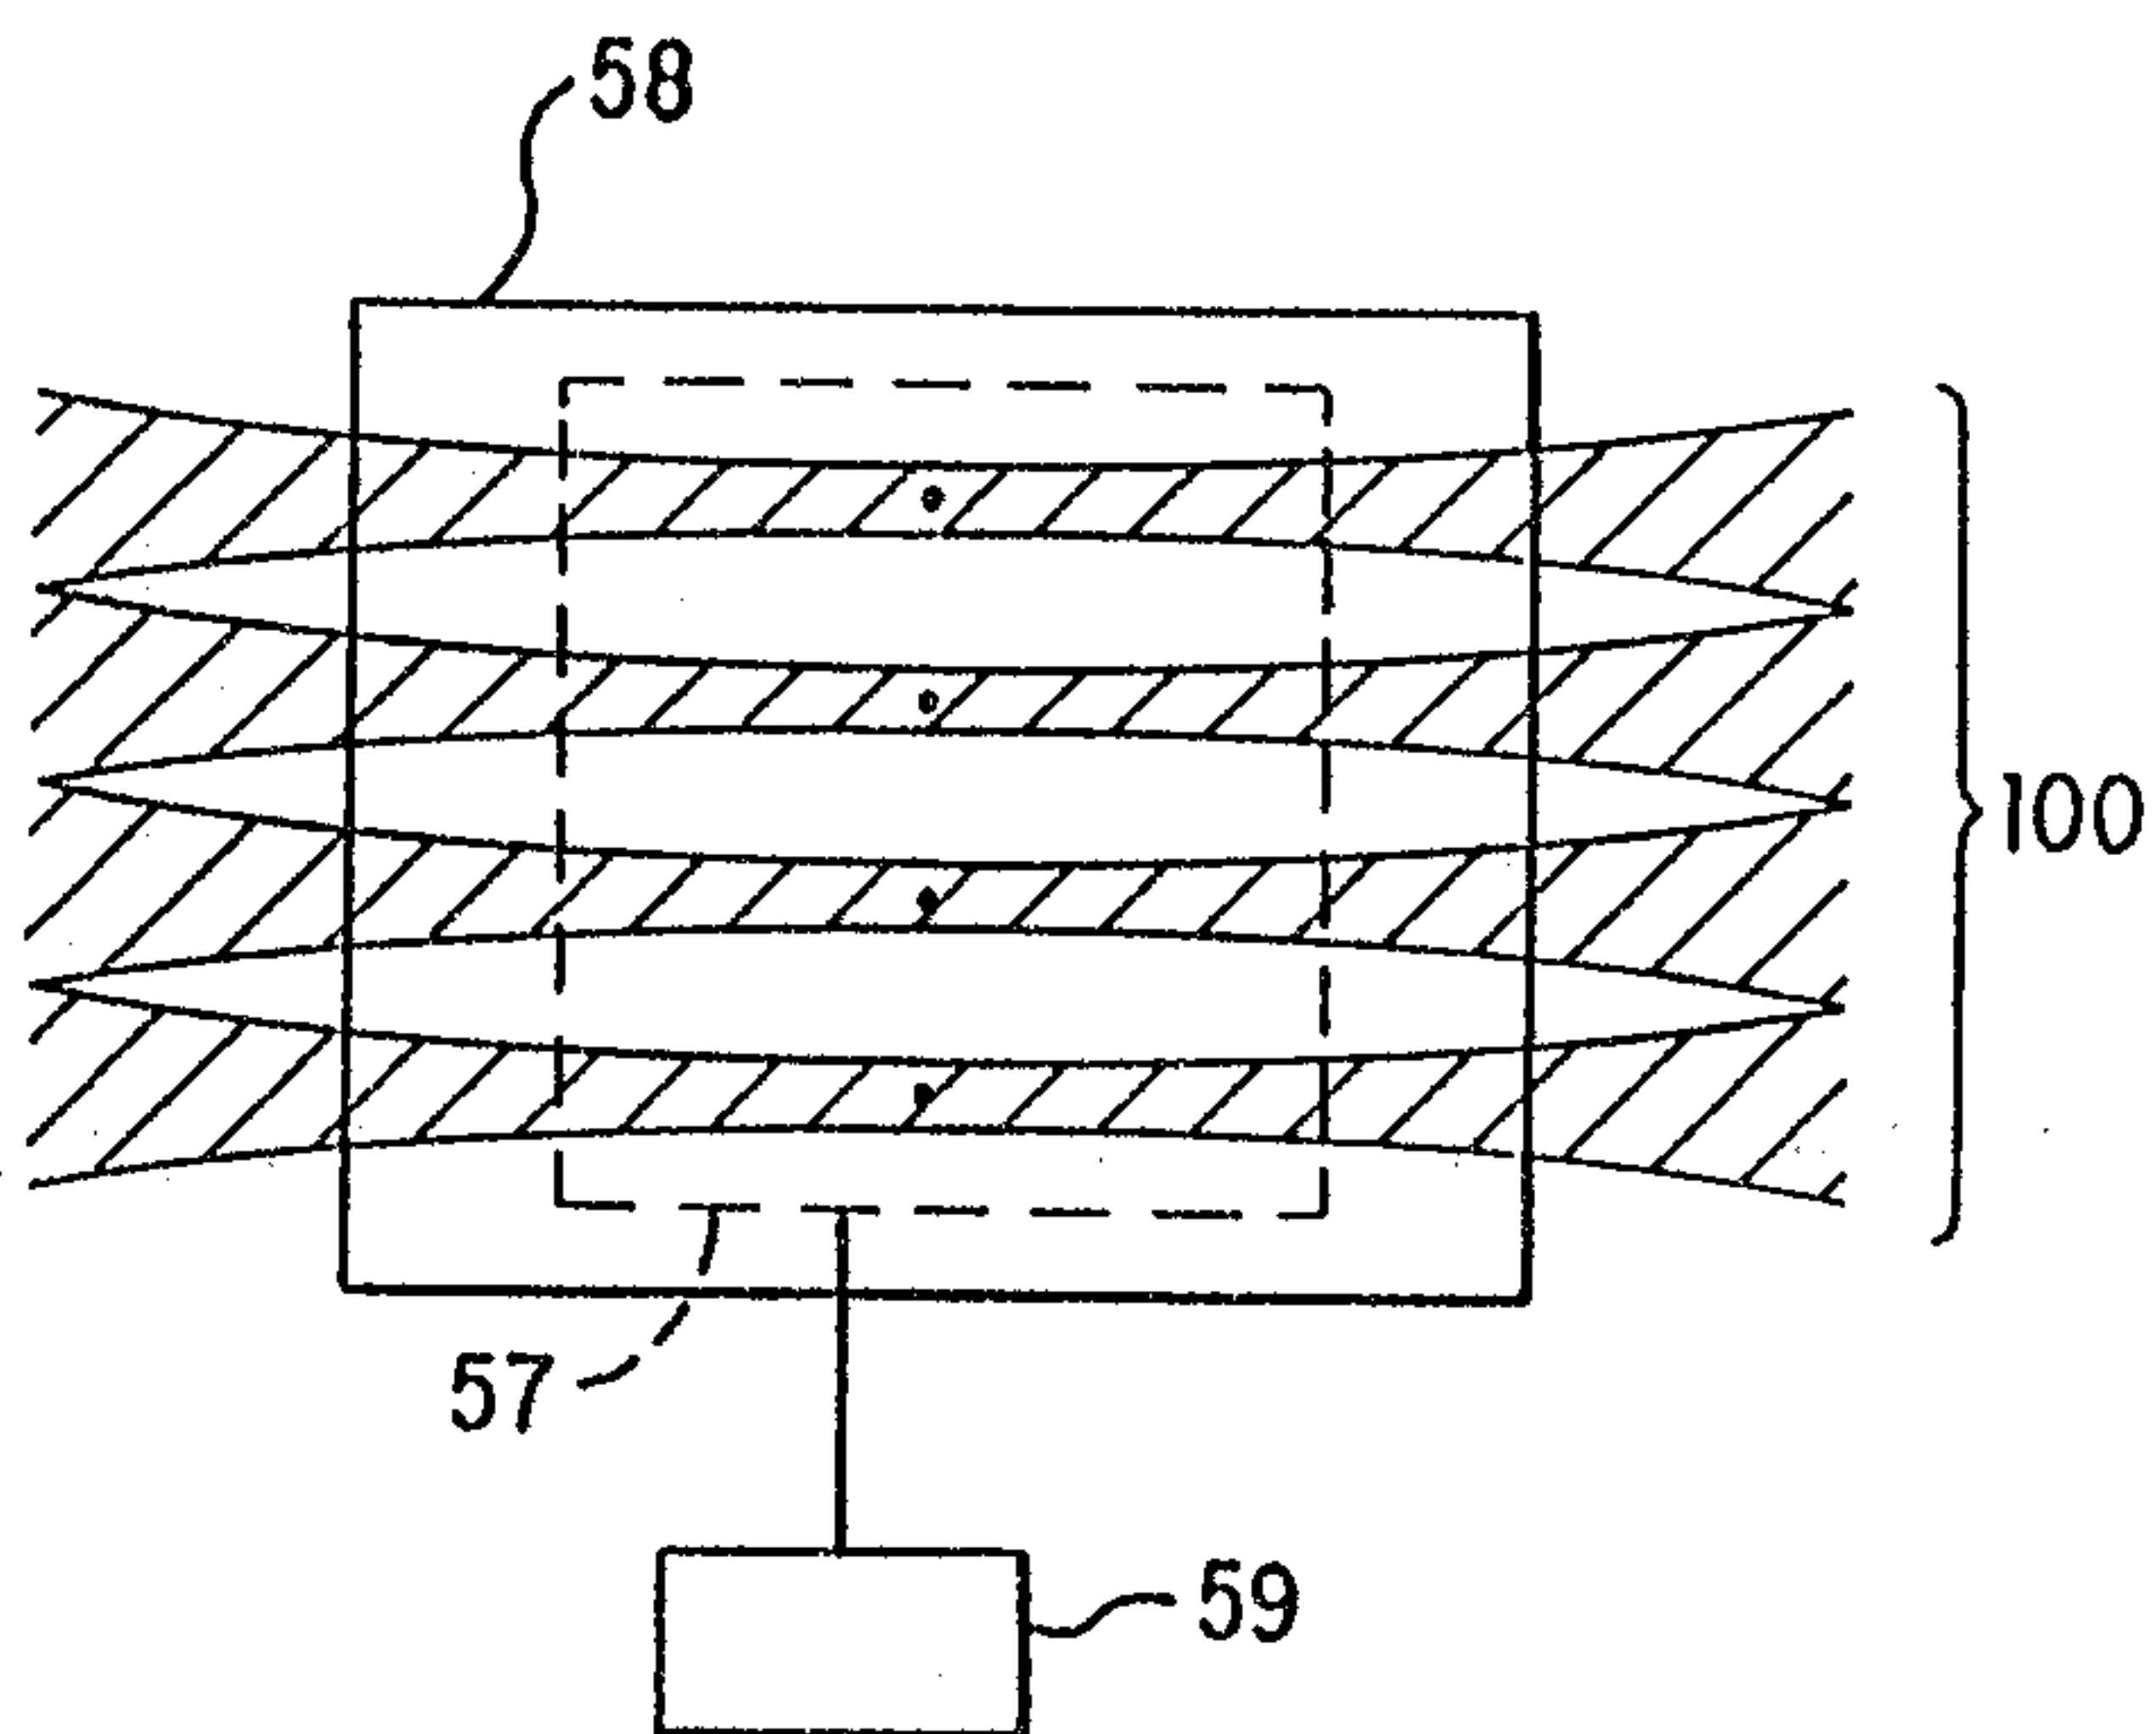

Signed: W. C. Burnell