

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/36191 A1

(51) International Patent Classification⁷: **B32B 13/12**

Coronado Street, Upland, CA 91786 (US). **MERKLEY, Donald, J.** [US/US]; 5054 Klusman Avenue, Alta Loma, CA 91733 (US).

(21) International Application Number: PCT/US00/31729

(22) International Filing Date:
20 November 2000 (20.11.2000)

(74) Agent: **ALTMAN, Daniel, E.**; Knobbe, Martens, Olson and Bear, LLP, 16th Floor, 620 Newport Center Drive, Newport Beach, CA 92660 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/166,513 19 November 1999 (19.11.1999) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **JAMES HARDIE RESEARCH PTY LTD.** [AU/AU]; 2nd Floor, 1 Grand Avenue, Camelia, New South Wales 2142 (AU).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **PENG, Weiling** [CA/US]; Apt. E201, 28450 Hancock Avenue, Murrieta, CA 92562 (US). **GLEESON, James, A.** [AU/US]; 1169

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: PREFABRICATED DURABLE BUILDING MATERIAL

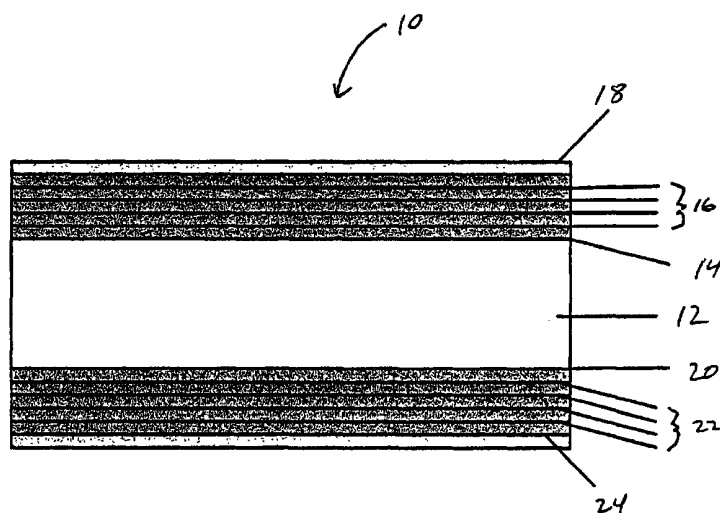

(57) Abstract: A pre-finished, moisture resistant and durable building material is provided. In one embodiment the building material includes a fiber cement substrate having a first side and a second side, at least one resin impregnated paper over at least one of the first and second sides, and a stress-relieving polymeric film between the fiber cement substrate and the at least one resin impregnated paper, the polymer film acting as a stress relaxer between the fiber cement substrate and the at least one resin impregnated paper. In another embodiment, a stress-relieving polymeric coating or film is provided between resin penetrated sheets and a substrate. In another embodiment, a process for bonding the resin penetrated sheets to the substrate is provided.



WO 01/36191 A1



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*

PREFABRICATED DURABLE BUILDING MATERIAL

Background of the InventionField of the Invention

5 This invention relates to building materials, and more particularly, to a building material comprising a fiber cement substrate, a polymer film and a plurality of resin impregnated sheets that is both pre-finished and durable.

Description of the Related Art

10 Fiber cement in recent years has become popular for use as a building material instead of more conventional materials such as wood, metal and plastics. Fiber cement has better water resistance than wood and is more resistant to rotting, cracking or splitting than wood. Also, fiber cement does not rust like metal, and is more durable to weathering than plastics. For instance, fiber cement products such as James Hardie Building Products' HARDIPLANK® install just as easily as wood siding, but offer a lifetime of low maintenance. Fiber cement siding is a durable, attractive alternative to traditional wood composite, cedar, vinyl, brick or stucco sidings.

15 Despite these advantages, fiber cement may not always have the desired exterior look and feel for a particular application. Moreover, conventional fiber cement materials are often painted or subject to other types of post-production or on-site finishing to give the material its desired appearance and exterior protection. However, exposure of paint to natural weathering and other factors can lead to chalking of the surface and loss of polymer in the paint film. Paint surfaces are also very thin, generally on the order of one to two mils, and because of that are subject to chipping, peeling and scratching from surface abuse.

20 Laminates comprised of a core having a sheet laminate comprised of a plurality of resin impregnated paper sheets adhered to the core are known in the art. Known core materials include engineered wood panels such as MDF (medium density fiber board) and particle boards. These products may perform satisfactorily in dry areas, but in areas subject to moisture these products have a tendency to swell, which misaligns the edges of the structure.

25 U.S. Patent No. 5,425,986 discloses a laminate structure comprising a core of fiber cementboard laminated to resin impregnated sheets. The differential dimensional movement of the core and the laminate through various environmental conditions can lead to induced stresses between the fiber cement and resin impregnated sheets which often leads to splitting of the core or delamination. This is exaggerated by environments which experience high moisture followed by periods of dryness or heat and low humidity.

30 Accordingly, what is needed is a building material incorporating the durability and moisture resistance of fiber cement while also having a desired exterior look and feel. In addition, what is needed is a building material having an exterior surface that is pre-finished and durable to scratch and wear, while also maintaining strong adhesion to the fiber cement, and does not split, crack or delaminate when exposed to severe environmental conditions or wet/dry cycling.

Summary of the Invention

One embodiment of the present invention relates to a building material comprising a fiber cement substrate having a first side and a second side, at least one resin impregnated paper over at least one of the first and second sides, and a stress-relieving polymeric film between the fiber cement substrate and the at least one resin impregnated paper, the polymer film acting as a stress relaxer between the fiber cement substrate and the at least one resin impregnated paper.

In another embodiment, a film for joining fiber cement to a resin penetrated paper is provided. This film comprises a polymer adapted to balance stresses between the fiber cement and the resin penetrated paper.

In another embodiment, a method is provided for bonding a fiber cement substrate having a surface to at least one resin impregnated paper to form a building material. The method comprises coating at least a portion of the surface of the fiber cement substrate with a stress-relieving polymer film, the polymer film being capable of preventing delamination between the substrate and the at least one resin impregnated paper. The at least one resin impregnated paper is pressed against the polymer film and the substrate.

Brief Description of the Drawings

FIGURE 1 is a cross-sectional view of a building material incorporating a fiber cement core having a plurality of resin impregnated papers laminated thereto according to one embodiment of the invention.

Detailed Description of the Preferred Embodiments

The preferred embodiments of the present invention relate to a pre-finished, moisture resistant and durable building material, preferably comprising laminating fiber cement to one or a plurality of resin penetrated papers or sheets such as FORMICA®. In one embodiment, a pre-finished and durable building material is provided. In another embodiment, a polymeric coating or film is provided between resin penetrated sheets and a substrate. In another embodiment, a process for bonding the resin penetrated sheets to the substrate is provided.

The pre-finished building material preferably combines three components: (1) a substrate, (2) a polymer film or coating, and (3) resin penetrated papers. These components formed together provide a building construction material that is both pre-finished and durable. The resin penetrated papers may be provided on either one side of the substrate or both sides.

The substrate is most preferably fiber cement, but may also be wood, metal such as aluminum, concrete or other cementitious material, plastic such as polyvinyl chloride, composite material such as fiber reinforced plastics, engineered wood material such as hardboard or oriented strand board and gypsum board. In one embodiment, the fiber cement substrate is about 20% to 60% Portland cement, about 20% to 70% ground silica sand, about 0% to 12% cellulose fiber, and about 0% to 6% select additives such as mineral oxides, mineral hydroxides and water. Platelet or fibrous additives, such as, for example, wollastonite, mica, glass fiber or mineral fiber, may be added to improve the thermal stability of the fiber cement. The dry density fiber cement sheet is typically about 1.3 to 1.4 g/cm³ but can be modified by pressing the material to dry densities up to 2.0 g/cm³ or by addition of density modifiers such as

unexpanded or expanded vermiculite, perlite, clay, shale or low bulk density (about 0.06 to 0.7 g/cm³) calcium silicate hydrates or aeration.

The polymeric film is preferably polyurethane, acrylic, acrylic-styrene, polyester, polyether, polyvinyl and their modified films. Other films that may be used include but are not limited to films formed from thermosetting polymers and thermoplastic polymers, such as epoxy, polyamide, polyimide, polysulfide, silicon based polymer, natural polymers such as starch. The film may be an individual film with or without an adhesive on its surface, or may be a film formed from water based solution, solvent based solution or 100% solid polymers. In one embodiment, the thickness of the film is from about 0.2 mil to 5 mil.

The polymeric film is preferably flexible, with a glass transition temperature T_g preferably between about -90°C and 50°C, more preferably below 0°C, with good strength. The polymeric film advantageously has good adhesion to both fiber cement and resin penetrated sheets such as FORMICA®. Alternatively, when a separate adhesive is placed on one or both sides of the polymeric film, this adhesive should have good adhesion to the fiber cement and/or resin penetrated sheet.

The cellulose paper is preferably penetrated with resin of melamine-formaldehyde and phenol-formaldehyde, and may also be treated by other polymer resins, such as polyester. The thickness of the penetrated paper in one embodiment is from about 0.05 mm to 1 mm. The amount of resin in the paper is preferably from about 10% to 70%.

The process is preferably to laminate the resin penetrated papers, the polymer film and the substrate together all at the same time (direct method). Another process that may be used laminates the resin penetrated papers first, and then laminates this sheet of laminated papers, the polymer film and the substrate together (indirect method).

The invention relates in one embodiment to laminating resin impregnated papers such as FORMICA® to a fiber cement core. Lamination may occur at different pressures, and may be accomplished by direct and indirect lamination as discussed above. The invention also relates to the product of FORMICA® or similar materials laminated to fiber cement.

One problem experienced with laminating resin impregnated papers to fiber cement without a specially selected polymeric film is that the laminate suffers from delamination. For instance, after melamine-formaldehyde (MF) and phenol-formaldehyde (PF) impregnated papers are pressed in a pressure machine, the resin will cure and the lamination will have a much larger dimensional movement than the fiber cement panel under heat and moisture. Because of the differential movement, the lamination of resin impregnated paper to fiber cement will delaminate under dry conditions, high humidity or with heating up as the forces on the material tear the lamination apart.

The preferred embodiments of the present invention overcome this problem by developing a method to treat the surface of fiber cement by using a polymer coating or film to successfully stop the delamination on FORMICA® laminated fiber cement whether the product is made from direct or indirect lamination. The polymer coating is preferably a non-rigid, stress-relieving material, and is more preferably an elastomeric material, even more preferably having the properties described above, that acts as a stress relaxer to relieve the stress between the fiber cement and

the resin impregnated sheets. Laminates incorporating this coating are less susceptible to delamination and/or splitting or cracking.

Optionally, the fiber cement substrate may be pressed flat in the green state or sanded after curing to obtain a smooth surface on which a minimal number (e.g., 1 or 2) of resin impregnated papers may be bonded incorporating a coating, as described above. By machining or sanding the surface smooth prior to coating, this enables a fewer number of resin impregnated papers to be used to obtain the desired flat finish. Such product has the differential stresses between the fiber cement and the resin impregnated papers more adequately balanced to resist cracking or splitting of the core.

FIGURE 1 illustrates one embodiment of a building material constructed in accordance with the present invention. This building material 10 includes a substrate 12, which in one embodiment is a fiber cement panel, the panel 12 having a first side and a second side. On the first side of the panel 12, a first layer of elastomeric adhesive 14 is provided, such as described above. A plurality of resin impregnated papers 16 is preferably provided over the elastomeric adhesive 14. In the embodiment shown, four layers 16 of phenol-formaldehyde impregnated papers are provided. Over the layers 16 a layer of melamine-formaldehyde penetrated paper 18 is preferably provided.

On the second side of the panel 12, a second layer of elastomeric adhesive 20 is provided. As with the first side, in one embodiment a plurality of resin impregnated papers 22, more preferably four layers of phenol-formaldehyde impregnated papers, are provided over the second layer of elastomeric adhesive 20. A layer of melamine-formaldehyde penetrated paper 24 is preferably provided over the layers 22.

The elastomeric material used for the adhesives 14, 20 preferably can be stretched and pressed without damaging the elastomeric material under limited force. The elastomeric material preferably recovers to its original shape after relieving of the force. In one embodiment, the elastomeric material used has an elongation between about 20% and 1200%, more preferably between about 100% to 1000%. The modulus of elasticity of the material at 100% elongation is preferably between about 10 to 10,000 psi, more preferably about 50 to 8,000 psi.

It will be appreciated that the embodiment shown in FIGURE 1 is purely exemplifying, and thus, other types of resin impregnated papers in varying quantities may be provided. Thus, in one embodiment, resin impregnated papers may be provided only to one side of the panel 12. In addition, each side may preferably have a fewer number or larger number of phenol-formaldehyde penetrated papers, for example, 0 to 4. In the embodiment above, it will also be appreciated that additional layers of melamine-formaldehyde penetrated papers may be provided, for example 1 to 3.

Further examples of a building material 10 similar to that shown in FIGURE 1 are described below.

Example 1

One example of a building material using a direct lamination method according to this invention is herein described. A fiber cement panel having a thickness of $\frac{1}{4}$ " is roller-coated with Bayhydrol PR 240 (40% of solid) on both sides of the panel. Bayhydrol 240 PR is a water-based polyurethane elastomeric adhesive available from Bayer Corp. of Pittsburgh, PA. One layer of melamine-formaldehyde (MF) resin impregnated paper and four layers of phenol-

formaldehyde (PF) impregnated papers are put on top of the coated fiber cement panel, and one layer of MF impregnated paper and one layer of PF impregnated paper is put on the bottom of the coated fiber cement. The layers and the panel together are pressed at 350°F for 5 min at pressure of 750 psi. The laminated panel is then placed in an oven of 60°C for 3 days.

5 The resulting building material showed no delamination. A building material fabricated in accordance with the embodiments described above was subjected to three types of delamination tests:

1. The building material was placed in a room temperature desiccator (humidity less than 10%) for 2 days.
2. The building material was placed in a dry oven at 60°C for 3 days.
- 10 3. The building material was subjected to 5 dry/wet cycles, such as 24 hours in an oven at 60°C and 24 hours soaked in water.

It has been found that when no polymer film is placed between the fiber cement and FORMICA®, delamination occurs in about 2 hours in an oven at about 60°C. With the film, no delamination occurred under the above-described three tests.

15 Example 2

Another example uses an indirect lamination method for laminating decorative paper to fiber cement. The phenol-formaldehyde impregnated papers and melamine-formaldehyde impregnated papers were pressed in hot press with high pressure (for example, about 1500 psi) or with medium pressure (for example, about 1000 psi) to get paper based decorative laminates. The thickness of the paper based laminate may vary from about 0.5 mm to 3 mm.

20 A fiber cement sheet having a thickness of about ¼" was coated with WC-0682-M-449 adhesive (H.B. Fuller, St. Paul, Minnesota) by using a brush. WC-0682-M-449 is a water-based acrylic elastomeric adhesive. The solid percentage of the adhesive was about 48%. The amount of glue on fiber cement was about 7 g/ft² (wet based weight, i.e. 7 g of 48% adhesive) for each side. A thickness of about 0.5 mm of paper based laminate was put on both sides of the coated fiber cement. The paper based laminates and fiber cement core were pressed at about 50 psi for about 1 min. The temperatures of top platen and bottom platen in the press were about 350°F.

25 The laminated panel was then placed in different environment conditions for testing adhesion and delamination. The laminated panel showed excellent adhesion and had no delamination. As a comparison, instead of using an elastomeric adhesive, urea-formaldehyde adhesive, such as described in U.S. Patent No. 5,425,986, was used to make the same laminates. Delamination occurred at the fiber cement core when the laminate was dried in oven of 30 60°C for about 2 hours.

In general, the preferred embodiments of the present invention enable a building material to take advantage of the durability and other properties of fiber cement while pre-finishing the material by laminating the fiber cement to resin impregnated sheets such as FORMICA® or similar material. The pre-finished surface eliminates the need for painting, either at the building construction site or paint priming and/or paint finishing coating in the factory.

FORMICA[®] and similar materials have the advantage over common interior and exterior house paints (such as acrylic paints) of being more durable to surface scratch and wear. Moreover, the elastomeric polymer film between the fiber cement and the FORMICA[®] or similar material relieves stresses therebetween and prevents delamination of the building material.

5 The embodiments illustrated and described above are provided merely as examples of certain preferred embodiments of the present invention. Various changes and modifications can be made from the embodiments presented herein by those skilled in the art without departure from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A building material, comprising:
a fiber cement substrate having a first side and a second side;
at least one resin impregnated paper over at least one of said first and second sides; and
5 a stress-relieving polymeric film between said fiber cement substrate and said at least one resin impregnated paper, said polymer film acting as a stress relaxer between said fiber cement substrate and said at least one resin impregnated paper.
2. The building material of Claim 1, wherein the fiber cement substrate comprises cellulose fibers.
3. The building material of Claim 1, wherein the polymeric film is selected from the group consisting of
10 polyurethane, acrylic, acrylic-styrene, polyester, polyether, polyvinyl and their modified films, epoxy, polyamide, polyimide, polysulfide, silicon based polymer and natural polymers.
4. The building material of Claim 1, wherein the polymeric film is an elastomer.
5. The building material of Claim 4, wherein the elastomer has an elongation between about 20% and 1200%.
- 15 6. The building material of Claim 5, wherein the elastomer has an elongation between about 100% and 1000%.
7. The building material of Claim 4, wherein the elastomer has a modulus of elasticity at 100% elongation of between about 10 and 10,000 psi.
8. The building material of Claim 7, wherein the elastomer has a modulus of elasticity at 100% elongation of between about 50 and 8,000 psi.
- 20 9. The building material of Claim 1, wherein the polymeric film has a glass transition temperature between about -90 and 50°C.
10. The building material of Claim 4, further comprising an adhesive on a surface of the polymer film.
11. The building material of Claim 1, wherein the resin impregnated paper includes a cellulose paper
25 penetrated with resin selected from the group consisting of melamine-formaldehyde and phenol-formaldehyde.
12. The building material of Claim 1, wherein a resin impregnated paper is laminated to both said first and second sides.
13. The building material of Claim 1, comprising at least one layer of phenol-formaldehyde penetrated
30 paper over the first side of the fiber cement substrate, and at least one layer of melamine-formaldehyde penetrated paper over the at least one layer of phenol-formaldehyde penetrated paper.
14. A film for joining fiber cement to a resin penetrated paper, comprising a polymer adapted to balance stresses between the fiber cement and the resin penetrated paper.

15. The film of Claim 14, wherein the polymer is selected from the group consisting of polyurethane, acrylic, acrylic-styrene, polyester, polyether, polyvinyl and their modified films, epoxy, polyamide, polyimide, polysulfide, silicon based polymer and natural polymers.

16. The film of Claim 14, wherein the polymer is a water based polyurethane elastomeric adhesive.

5

17. The film of Claim 14, wherein the polymer is a water based acrylic elastomeric adhesive.

18. A method for bonding a fiber cement substrate having a surface to at least one resin impregnated paper to form a building material, the method comprising:

10

coating at least a portion of the surface of the fiber cement substrate with a stress-relieving polymer film, the polymer film being capable of preventing delamination between the substrate and the at least one resin impregnated paper; and

pressing at least one resin impregnated paper against the polymer film and the substrate.

19. The method of Claim 18, wherein the fiber cement has a thickness of about $\frac{1}{4}$ ".

20. The method of Claim 18, wherein the at least one resin impregnated paper includes a plurality of resin impregnated papers.

15

21. The method of Claim 20, further comprising pressing the plurality of papers together prior to pressing said papers against the polymer film and the substrate to form a paper-based laminate.

22. The method of Claim 21, wherein the paper-based laminate has a thickness of between about 0.5 mm to 3 mm.

20

23. The method of Claim 21, wherein pressing the plurality of papers together takes place at about 350°F for about 1 minute at a pressure of about 50 psi.

24. The method of Claim 18, wherein pressing occurs at about 350°F for about 5 minutes at a pressure of about 750 psi.

25. The method of Claim 24, further comprising, after pressing, heating the building material at about 60°C for about 3 days.

25

26. The method of Claim 18, further comprising smoothening the surface of fiber cement prior to coating.

27. The method of Claim 18, wherein the polymer film is elastomeric.

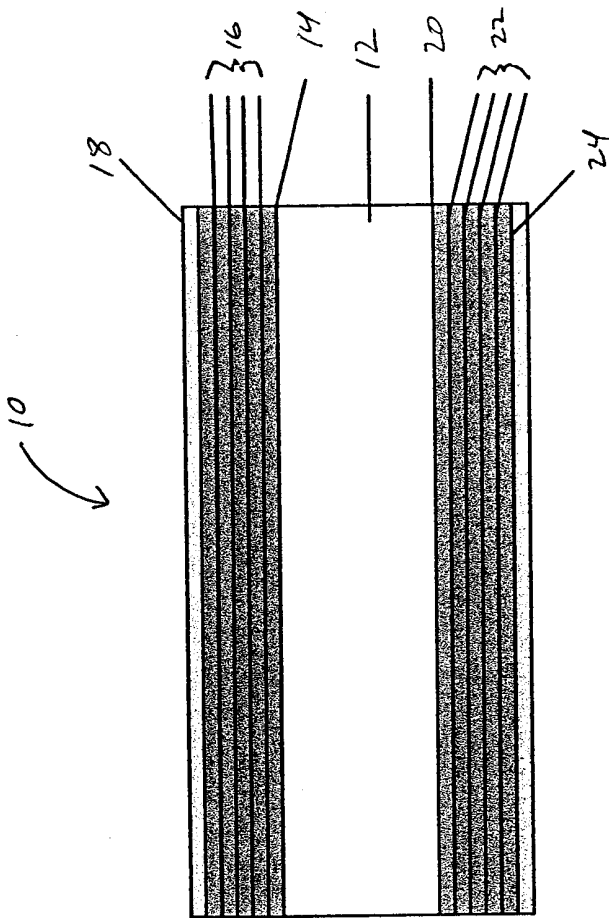


FIG. 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/31729

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B32B13/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E04C C04B B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 425 986 A (GUYETTE JOHN M) 20 June 1995 (1995-06-20) column 2, line 42 - line 45 column 3, line 35 -column 4, line 26 column 6, line 15 - line 20 column 7, line 27 - line 46 ----	1-3,11, 12,14, 15, 18-22,24
A	GB 2 078 611 A (HELLENIC IND TECH COMM) 13 January 1982 (1982-01-13) page 1, line 29 -page 2, line 74 -----	1-27

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

21 February 2001

Date of mailing of the international search report

02/03/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stinchcombe, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/31729

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5425986 A	20-06-1995	AT 149427 T	15-03-1997
		AU 667122 B	07-03-1996
		AU 4681093 A	14-02-1994
		CA 2119259 A	03-02-1994
		DE 69308528 D	10-04-1997
		DE 69308528 T	13-11-1997
		EP 0608400 A	03-08-1994
		KR 9701182 B	29-01-1997
		WO 9402315 A	03-02-1994
GB 2078611 A	13-01-1982	GR 65511 A	12-09-1980
		GR 65512 E	12-09-1980
		BE 889361 A	16-10-1981
		ES 498442 A	16-11-1981
		FR 2485516 A	31-12-1981
		IT 1171322 B	10-06-1987
		NL 8005290 A	18-01-1982