



(22) **Date de dépôt/Filing Date:** 2014/11/12

(41) **Mise à la disp. pub./Open to Public Insp.:** 2015/09/15

(45) **Date de délivrance/Issue Date:** 2015/12/29

(51) **Cl.Int./Int.Cl.** *G01M 17/10* (2006.01)


(72) **Inventeur/Inventor:**  
VAN DER MERWE, FRANK C., CA

(73) **Propriétaire/Owner:**  
VAN DER MERWE, FRANK C., CA

(74) **Agent:** NA

(54) **Titre : AUTOMATISATION DU MECANISME DE DETECTION DE DEFAILLANCE DE ROUE SISMIQUE DE TRAIN EN MOUVEMENT**

(54) **Title: AUTOMATED IN MOTION RAILWAY SEISMIC WHEEL FAILURE DETECTION SYSTEM**

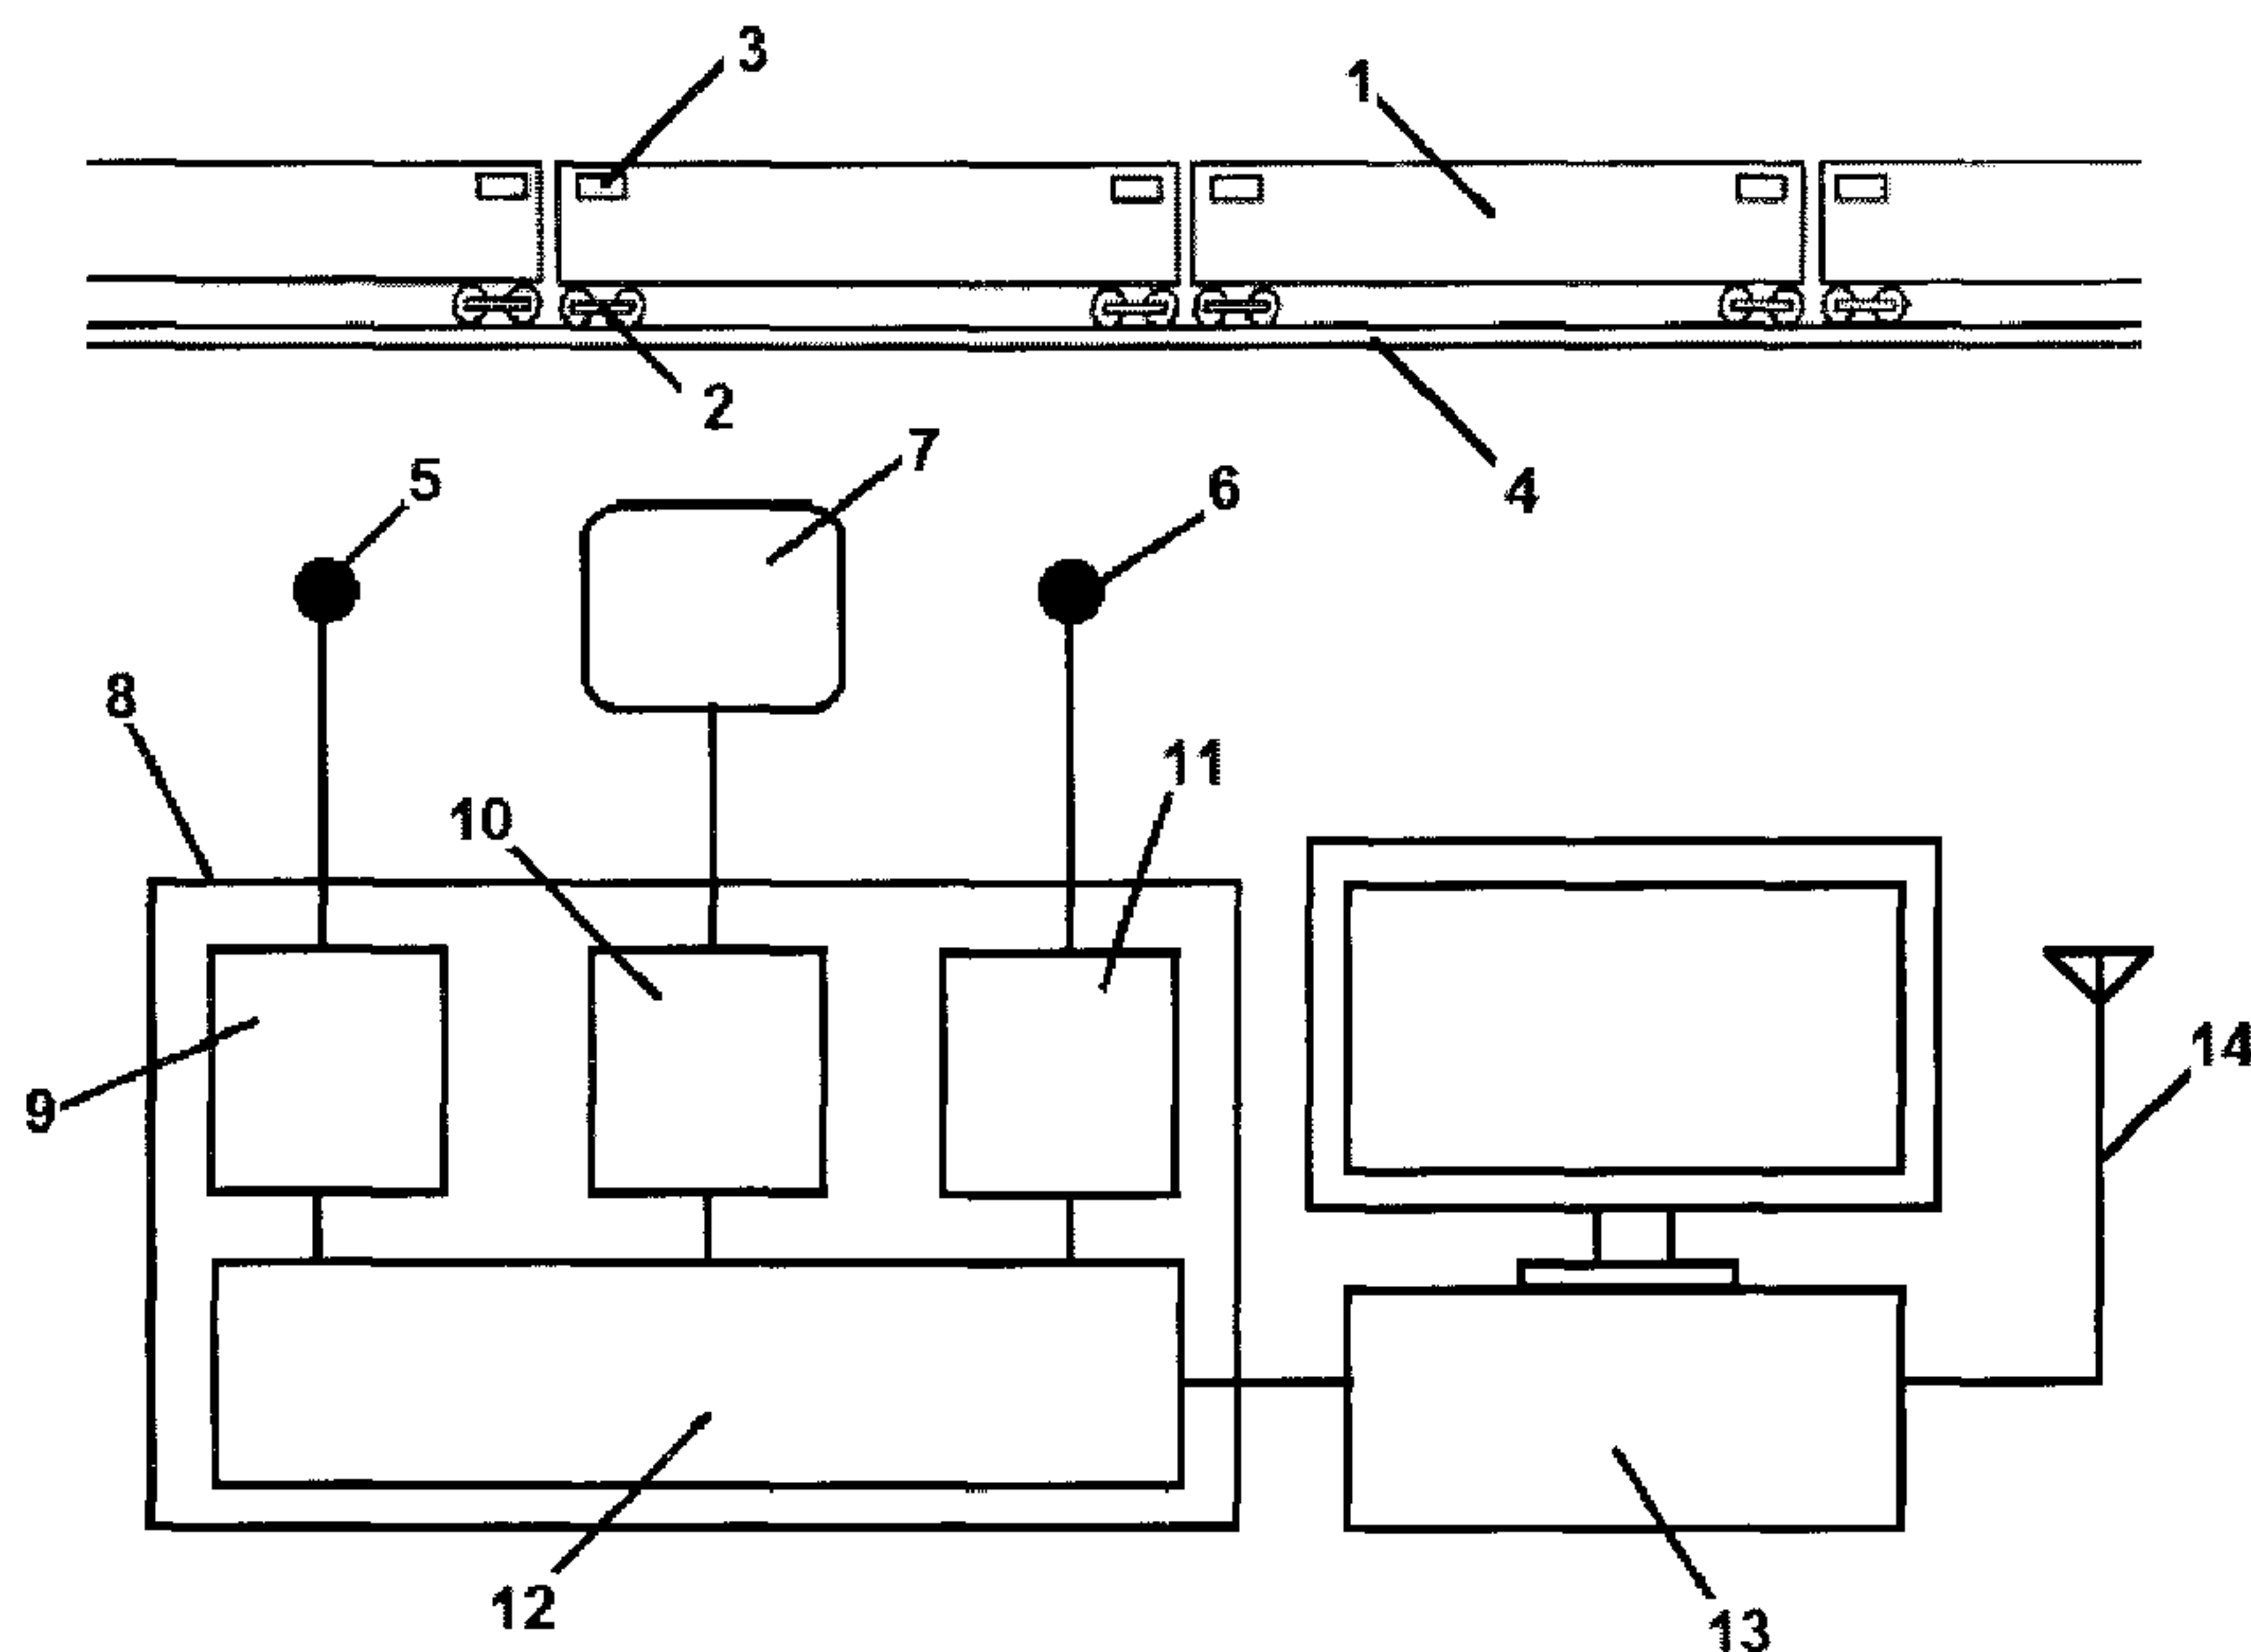

(57) **Abrégé/Abstract:**

Systems and methods for detecting in motion railcar seismic data generated by defective railcar axles of a train traveling on a track. The method uses two or more seismic sensors on the side of the track to capture seismic noise generated by railcar wheels. A

**(57) Abrégé(suite)/Abstract(continued):**

wheel that exceeds a preset seismic noise threshold in amplitude, will trigger a wheel tracking algorithm that calculates seismic phase shift data related to the actively tracked wheel noise level, to determine the precise location, in real time, of the faulty wheel carriage while moving. Knowing the precise location of the tracked wheel allows the system to isolate the railcar and capture the railcar and wheel carriage identification information.

Subsequently, a railcar log is made on a computer database with the railcar identification information and made available to control centers via ground or satellite links.

# **Automated in motion railway seismic wheel failure detection system**

## **Abstract Of The Disclosure**

Systems and methods for detecting in motion railcar seismic data generated by defective railcar axles of a train traveling on a track. The method uses two or more seismic sensors on the side of the track to capture seismic noise generated by railcar wheels. A wheel that exceeds a preset seismic noise threshold in amplitude, will trigger a wheel tracking algorithm that calculates seismic phase shift data related to the actively tracked wheel noise level, to determine the precise location, in real time, of the faulty wheel carriage while moving. Knowing the precise location of the tracked wheel allows the system to isolate the railcar and capture the railcar and wheel carriage identification information.

Subsequently, a railcar log is made on a computer database with the railcar identification information and made available to control centers via ground or satellite links.

## **Technical Field Of The Invention**

The present invention relates to a sensing and communication system that monitors railcar wheel seismic noise levels in real time while moving along a train rail track.

## Background Of The Invention

Rail is an ever expanding and increasingly important method of transporting goods and people. With the ever expanding urban areas, existing railways often carry hazardous materials very close to urban areas. Train derailments, the added danger of hazardous material contaminants, and the risk of explosions can be very costly to society and fragile ecosystems, and may cause irreversible damage to the environment and aquatic life. Faulty railcar wheel carriages also greatly contribute to noise pollution in densely populated urban areas.

Existing methods of inspecting railcars which are stationary, make it very difficult and time consuming to detect railcar axle and wheel deformations that can only be effectively detected if the railcar is moving. Installing vibration sensors on the railcar itself is costly and requires regular maintenance and calibration.

The invention is directed to cost effectively and with relative ease track the state of railcars. It provides a low cost inspection solution to scan railcars for compliance in order to mitigate the risk of environmental damage caused by derailments, and to lower train noise levels.

Since the invention works on the principle of seismic ground wave phase analysis, the sensors do not have to be installed on the rail track but can be installed within a convenient distance parallel to the track. The system can be installed as a permanent installation or through mobile deployable stations.

These sensor stations can then be deployed strategically across major rail arteries.

## Summary Of The Invention

Systems and methods pertain to the detection of seismic noise generated by in motion railcars linked together in a train traveling on a track. The method uses at least two seismic sensors on the side of any rail track to capture seismic noise generated by railcar wheels. A wheel that exceeds a preset seismic noise threshold in amplitude will trigger a wheel tracking algorithm which calculates seismic phase data related to the actively tracked wheel noise interval, to determine the precise location of the faulty wheel or axle carriage in real time, and use this information to predict where exactly the wheel will be while within the bounds of the seismic sensors. Knowing the precise location of the faulty wheel in real time, allows the system to capture the railcar and carriage identification information while discriminating against background seismic noise.

The seismic phase information makes it possible to synchronously strobe and trigger digital cameras or sensors to record information on a specific tracked wheel carriage under investigation.

Subsequently, a railcar identification data recording is made on a computer database and made available to control centers.

The benefit of this system is a very cost effective highly accurate solution to monitor railcar compliance.

## **Brief Description Of The Drawings**

Fig. 1 is a schematic view of the rail monitoring system block diagram made in accordance with the present invention;

Fig. 2 is a schematic view of the seismic sensors relative to the railcar as it pertains to the phase measurements at three different points in time; and

Fig. 3 is a schematic view of the signal detection, envelope recording and calculating the phase difference relationship for each seismic event interval.

## Detailed Description Of The Invention

With reference to the drawings and, in particular, with reference to Figs 1-3, the present invention is a system that in real time monitors and detects railcars in motion for noisy and potentially faulty wheels causing major seismic ground waves. Starting with Fig. 1, to measure these ground waves and in order to precisely locate and track a noisy wheel **2** that exceeds a set seismic noise amplitude threshold **40**, we need at least two seismic sensors **5, 6** on the side of a rail track **4** in order to measure the phase **45** of the approaching signal source **2, 42** of interest caused by a wheel and discriminate against background noise. These seismic sensors **5, 6** can be embedded in the ground in a place with good seismic ground wave propagation on the side of a rail track or attached directly to a rail track.

Each seismic sensor has a fast acting analog to digital signal processing unit **9, 11** that is identically calibrated to give the exact same signal amplitude for a given seismic impulse event **42, 48** when placed identical distances **23, 21** from the seismic sensors **25, 26**.

As the railcar moves along the track past the sensors, each sensor will then record the same analog seismic wave, however the seismic wave envelopes **43, 44** will be out of phase **20, 45** due to the time delay of the seismic wave propagation as illustrated in Fig.3, where the first sensor signal is represented by impulse **43** and the signal for the second sensor represented by impulse **44**. The main processing unit **12** a.k.a the controller, will measure whether a preset seismic amplitude threshold **40, 41** has been reached and this will cause the main processing unit **12** to lock on to the said seismic signal source **2** – this is known as an event **42**. A unique seismic envelope signature **46** will be recorded in memory to compare and track, using the phase information **45**, the position of the railcar wheel in real time while within the bounds of the seismic sensors **25,26**.

At the point of zero phase shift **23**, the railcar wheel **21** of interest will be positioned in the center of the two seismic sensor **25, 26** locations.

The main processing unit **12** can use the periodic event intervals **42** to calculate the distance traveled by the wheel between each event interval **42**. The speed and phase information **45** can be used to calculate where exactly the wheel will be at any given time while the wheel remains within the bounds of the seismic sensors **25,26**. This phased time **45** calculation can be used to predict exactly when the wheel will be correctly aligned with a sensor, in order to trigger a phase timed programmable strobe output **10,12,7** to synchronize with, for example, a digital camera to take a precisely timed picture of the faulty wheel and any visual identification codes near the railcar wheel carriage assembly on the side of the railcar. This information plus additional identification information and the unique seismic envelope profile **48** can then be logged to a database **13** and forwarded to a processing center to determine what action should be taken, such as whether or not the train should be halted, or if it will be allowed to continue for later inspection. The system may also be programmed to signal the train directly if the level of error passes a set of pre-determined criteria.

The seismic sensor interface **8** can also detect from which direction the train **1** is traveling in order to correctly capture railcar identification information **3,7**.

Once an event is triggered **42**, the system has enough information to identify the railcar and the carriage axle in question **2, 7, 10**. It is then up to the railcar inspector to determine the exact nature of the source of the noise related to the railcar in question.

This system can be deployed as a mobile unit or as a permanent installation.

Field calibration parameters must be entered into the system **8, 13** such as the exact location of the sensors **5, 6** in relation to the rail track **4** in order to make the phase measurements **45** work correctly.

**The Embodiments Of The Invention In Which An Exclusive Property Or Privilege Is Claimed Are Defined As Follows:**

1. A System for monitoring and tracking in motion seismic waves created by noisy railcar wheels comprising:

At least two seismic sensors placed parallel to a rail track;

with the seismic sensors measuring seismic wave signals generated by a noisy railcar wheel carriage axle, on a rail track; the wheel carriage defined as the signal source; and

with the sensors spaced from each other such that seismic phase time propagation delays between sensors, in relation to the signal source, can be measured; and

a controller having associated software and in communication with the seismic sensors, the controller adapted to use signals from the seismic sensors to detect a peak amplitude threshold and to measure the phase time of the signal source due to approaching seismic wave propagation, using this phase information to track the location and identify a noisy railcar wheel carriage axle while in motion; and

with the controller also adapted to use the phase time information to provide a programmable phase timed strobe output for external synchronizations.

2. The system of claim 1, wherein the sensors are any electronic sensor capable of converting seismic signals to electrical high frequency waves to be processed by the controller.
3. The system of claim 2, wherein the seismic sensors include more than two seismic sensors for higher accuracy.
4. The system of claim 1, wherein the controller is part of a terminal that further includes a display for providing information about detected railcars.
5. The system of claim 4, wherein the system further comprises a database for storing affected railcar information.
6. The system of claim 5, where the system includes wired or wireless communication so that railcar information can be accessed remotely.

7. A system for detecting and analyzing coupled-in-motion railcar seismic noise waves comprising:

At least two seismic sensors placed parallel to a rail track;

with the seismic sensors measuring seismic wave signals generated by a noisy railcar wheel carriage axle, on a rail track; the wheel carriage defined as the signal source; and

with the sensors spaced from each other such that seismic phase time propagation delays between sensors, in relation to the signal source, can be measured; and

a controller having associated software and in communication with the seismic sensors, the controller adapted to use signals from the seismic sensors to detect a peak amplitude threshold and to measure the phase time of the signal source due to approaching seismic wave propagation, using this phase information to track the location and identify a noisy railcar wheel carriage axle while in motion; and

with the controller also adapted to use the phase time information to provide a programmable phase timed strobe output for external synchronizations.

8. The system of claim 7, wherein the sensors are any electronic sensor capable of converting ground seismic signals to electrical high frequency waves to be processed by the controller.
9. The system of claim 8, wherein the seismic sensors can include more than two seismic sensors to increase accuracy.
10. The system of claim 7, wherein the controller is part of a terminal that further includes a display for providing information about detected railcars.
11. The system of claim 10, wherein the system further comprises a database for storing railcar information.
12. The system of claim 11, where the system includes wired or wireless communication so that railcar information can be accessed remotely.

13. A method for detecting, tracking and identifying coupled-in-motion railcar seismic noise waves created by railcar wheels comprising:

Positioning at least two seismic sensors on the side of a rail track;

measuring seismic wave signals generated by a noisy railcar wheel carriage on a track; the wheel carriage defined as the signal source; and

spacing these sensors from each other such that seismic phase time propagation delays between sensors, in relation to the signal source, can be measured; and

measuring seismic waves from the signal source, to determine if the wheel of a railcar exceeds a peak amplitude threshold in order to trigger an event; then calculating using the phase difference of the sensors' seismic propagation time, the exact wheel carriage position relative to the seismic sensors, as well as the direction and speed of movement of the railcar; and

using a controller having associated software and in communication with the seismic sensors; using signals from the seismic sensors to detect a peak amplitude threshold; measuring the phase time of the wheel signal source due to approaching seismic wave propagation; using this phase information to track the location of the faulty wheel in real time, identifying a noisy wheel carriage axle while in motion; and

using the phase time information to provide a programmable phase timed strobe output for external synchronizations.

14. The method of claim **13**, wherein the controller is part of a terminal that further includes a display with, information about detected railcars being displayed.
15. The method of claim **13**, wherein storing the faulty railcar information in a database associated with the terminal, the terminal further including wired or wireless communication functionality so that railcar data can be exported or accessed remotely across the internet.
16. The method of claim **13**, wherein the controller analyzes recorded seismic data by the controller, determine in real time the railcar speed, direction of movement, carriage location and seismic amplitude profiles.
17. The method of claim **16**, wherein characterizing the amplitude profiles with types of wheel failures, and allowing a profile database match to identify known railcar carriage wheel faults.

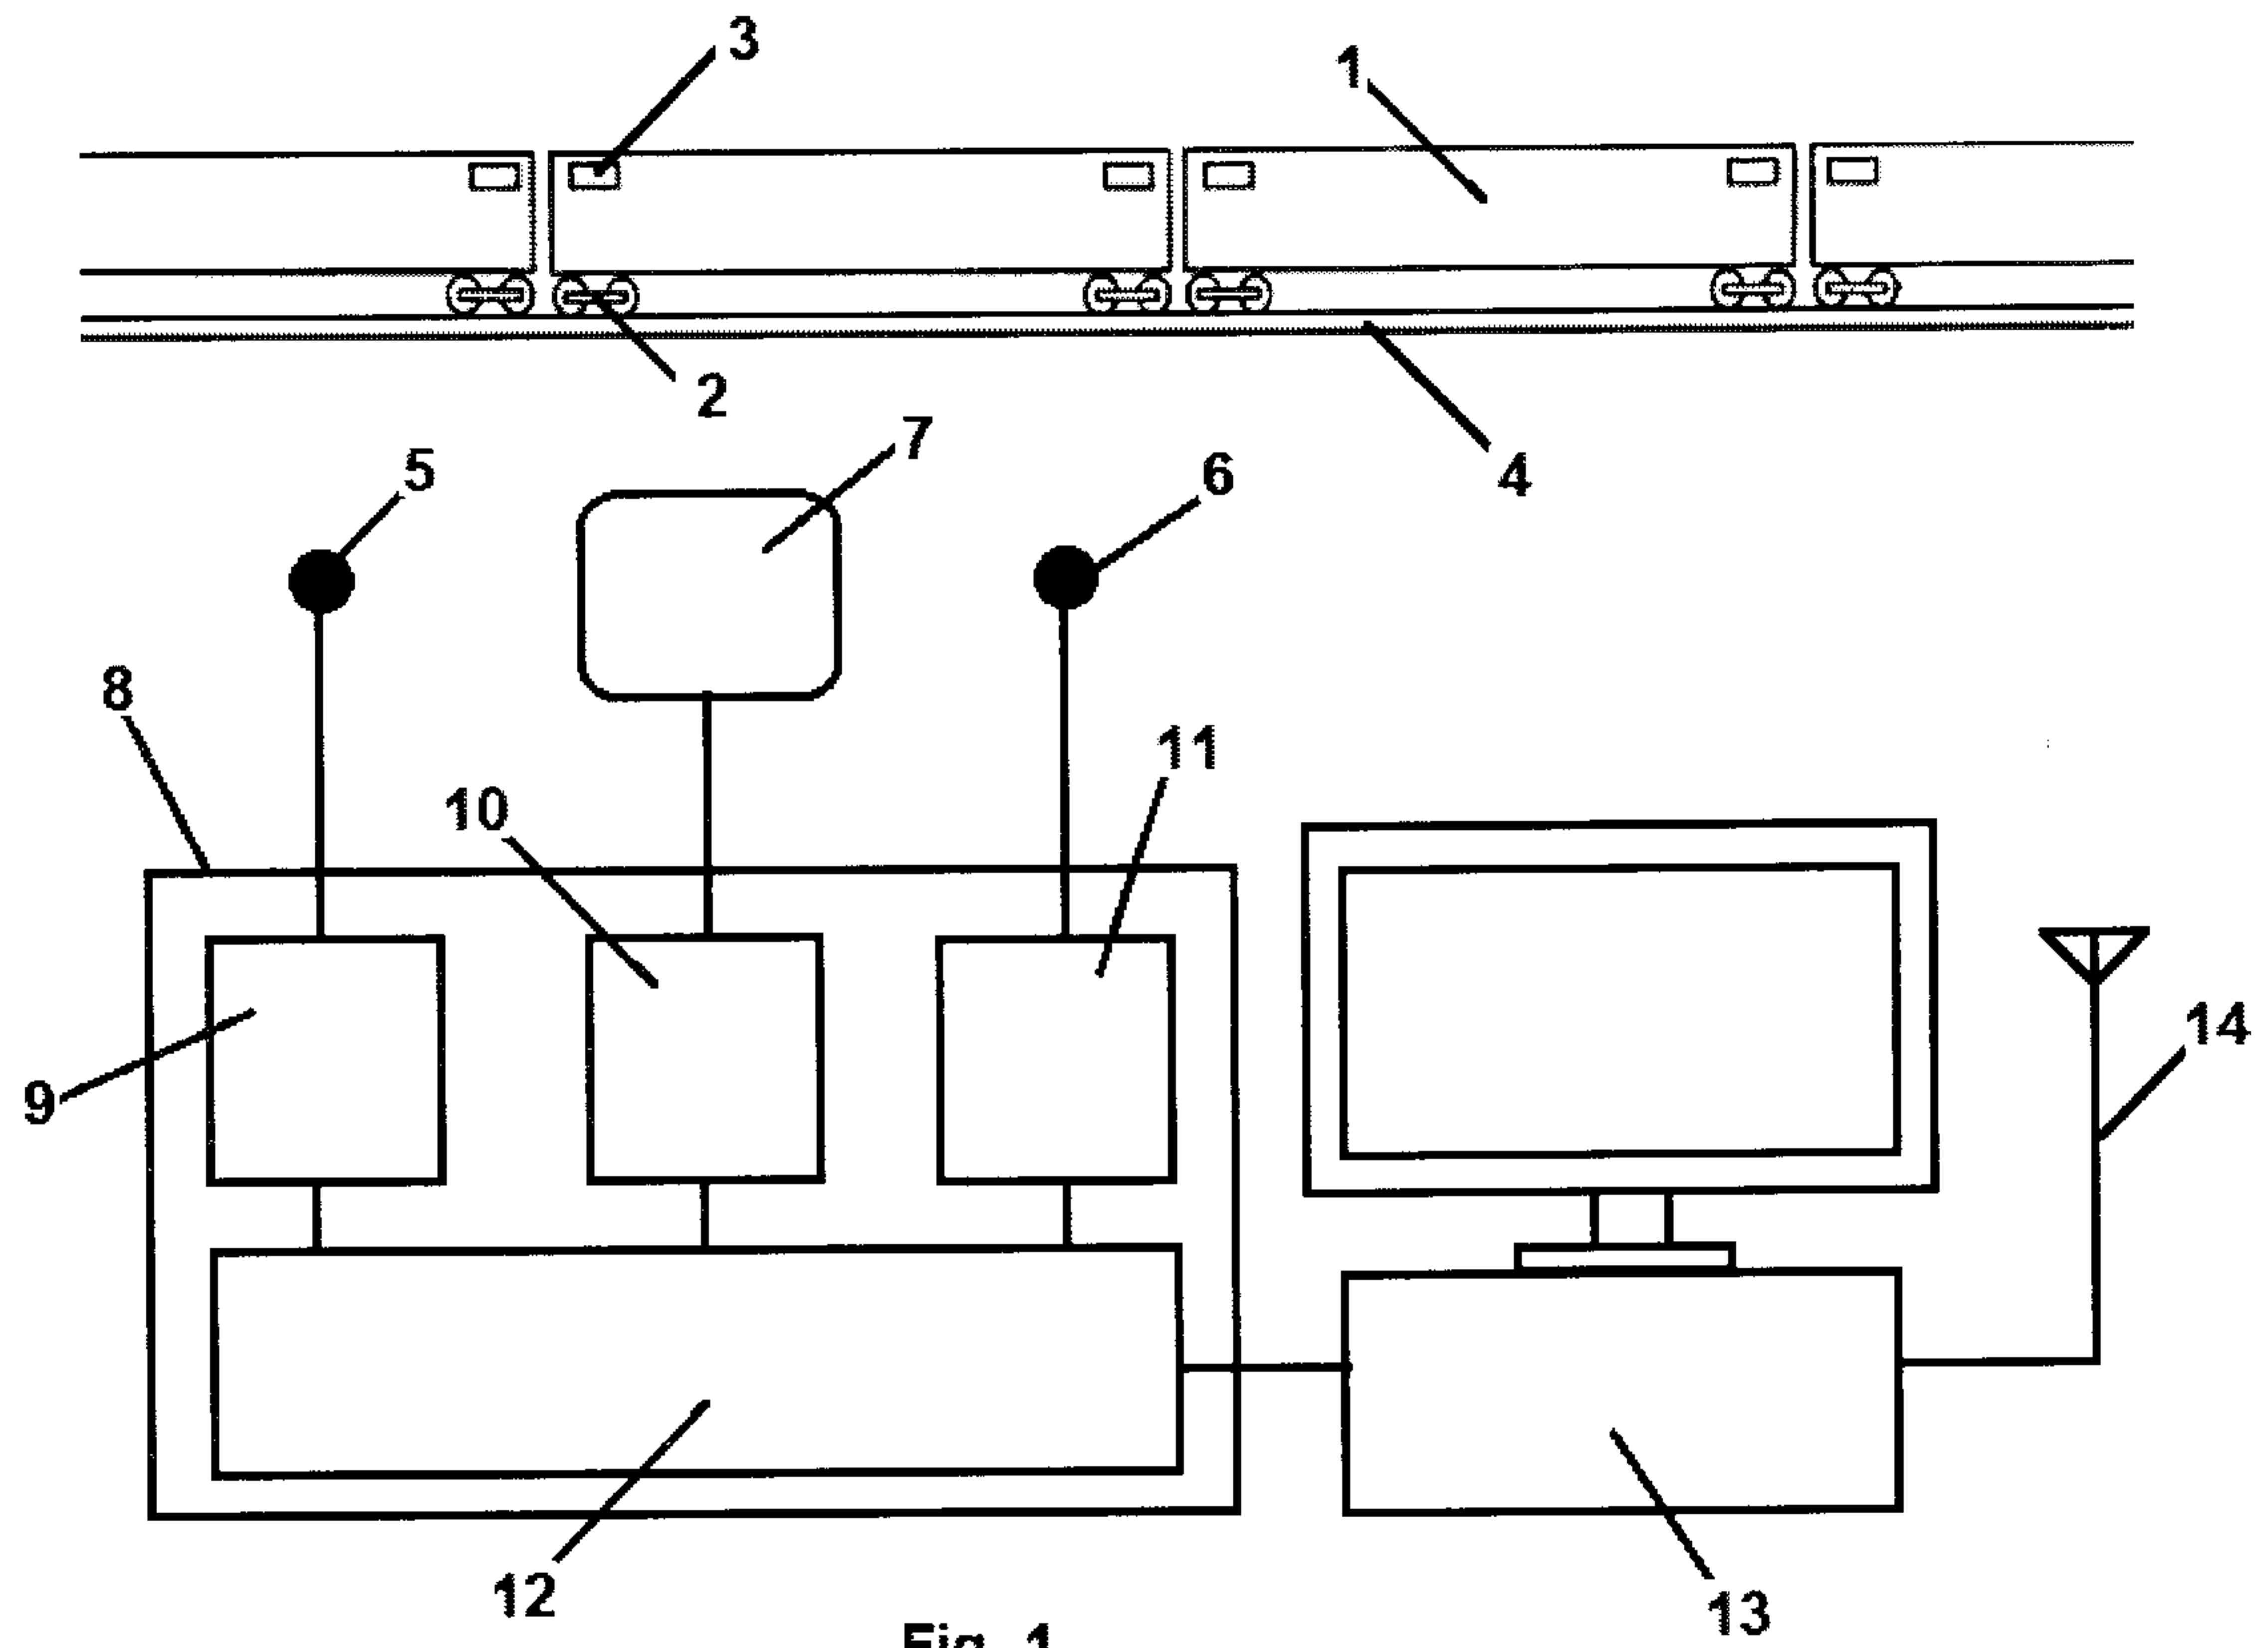


Fig. 1

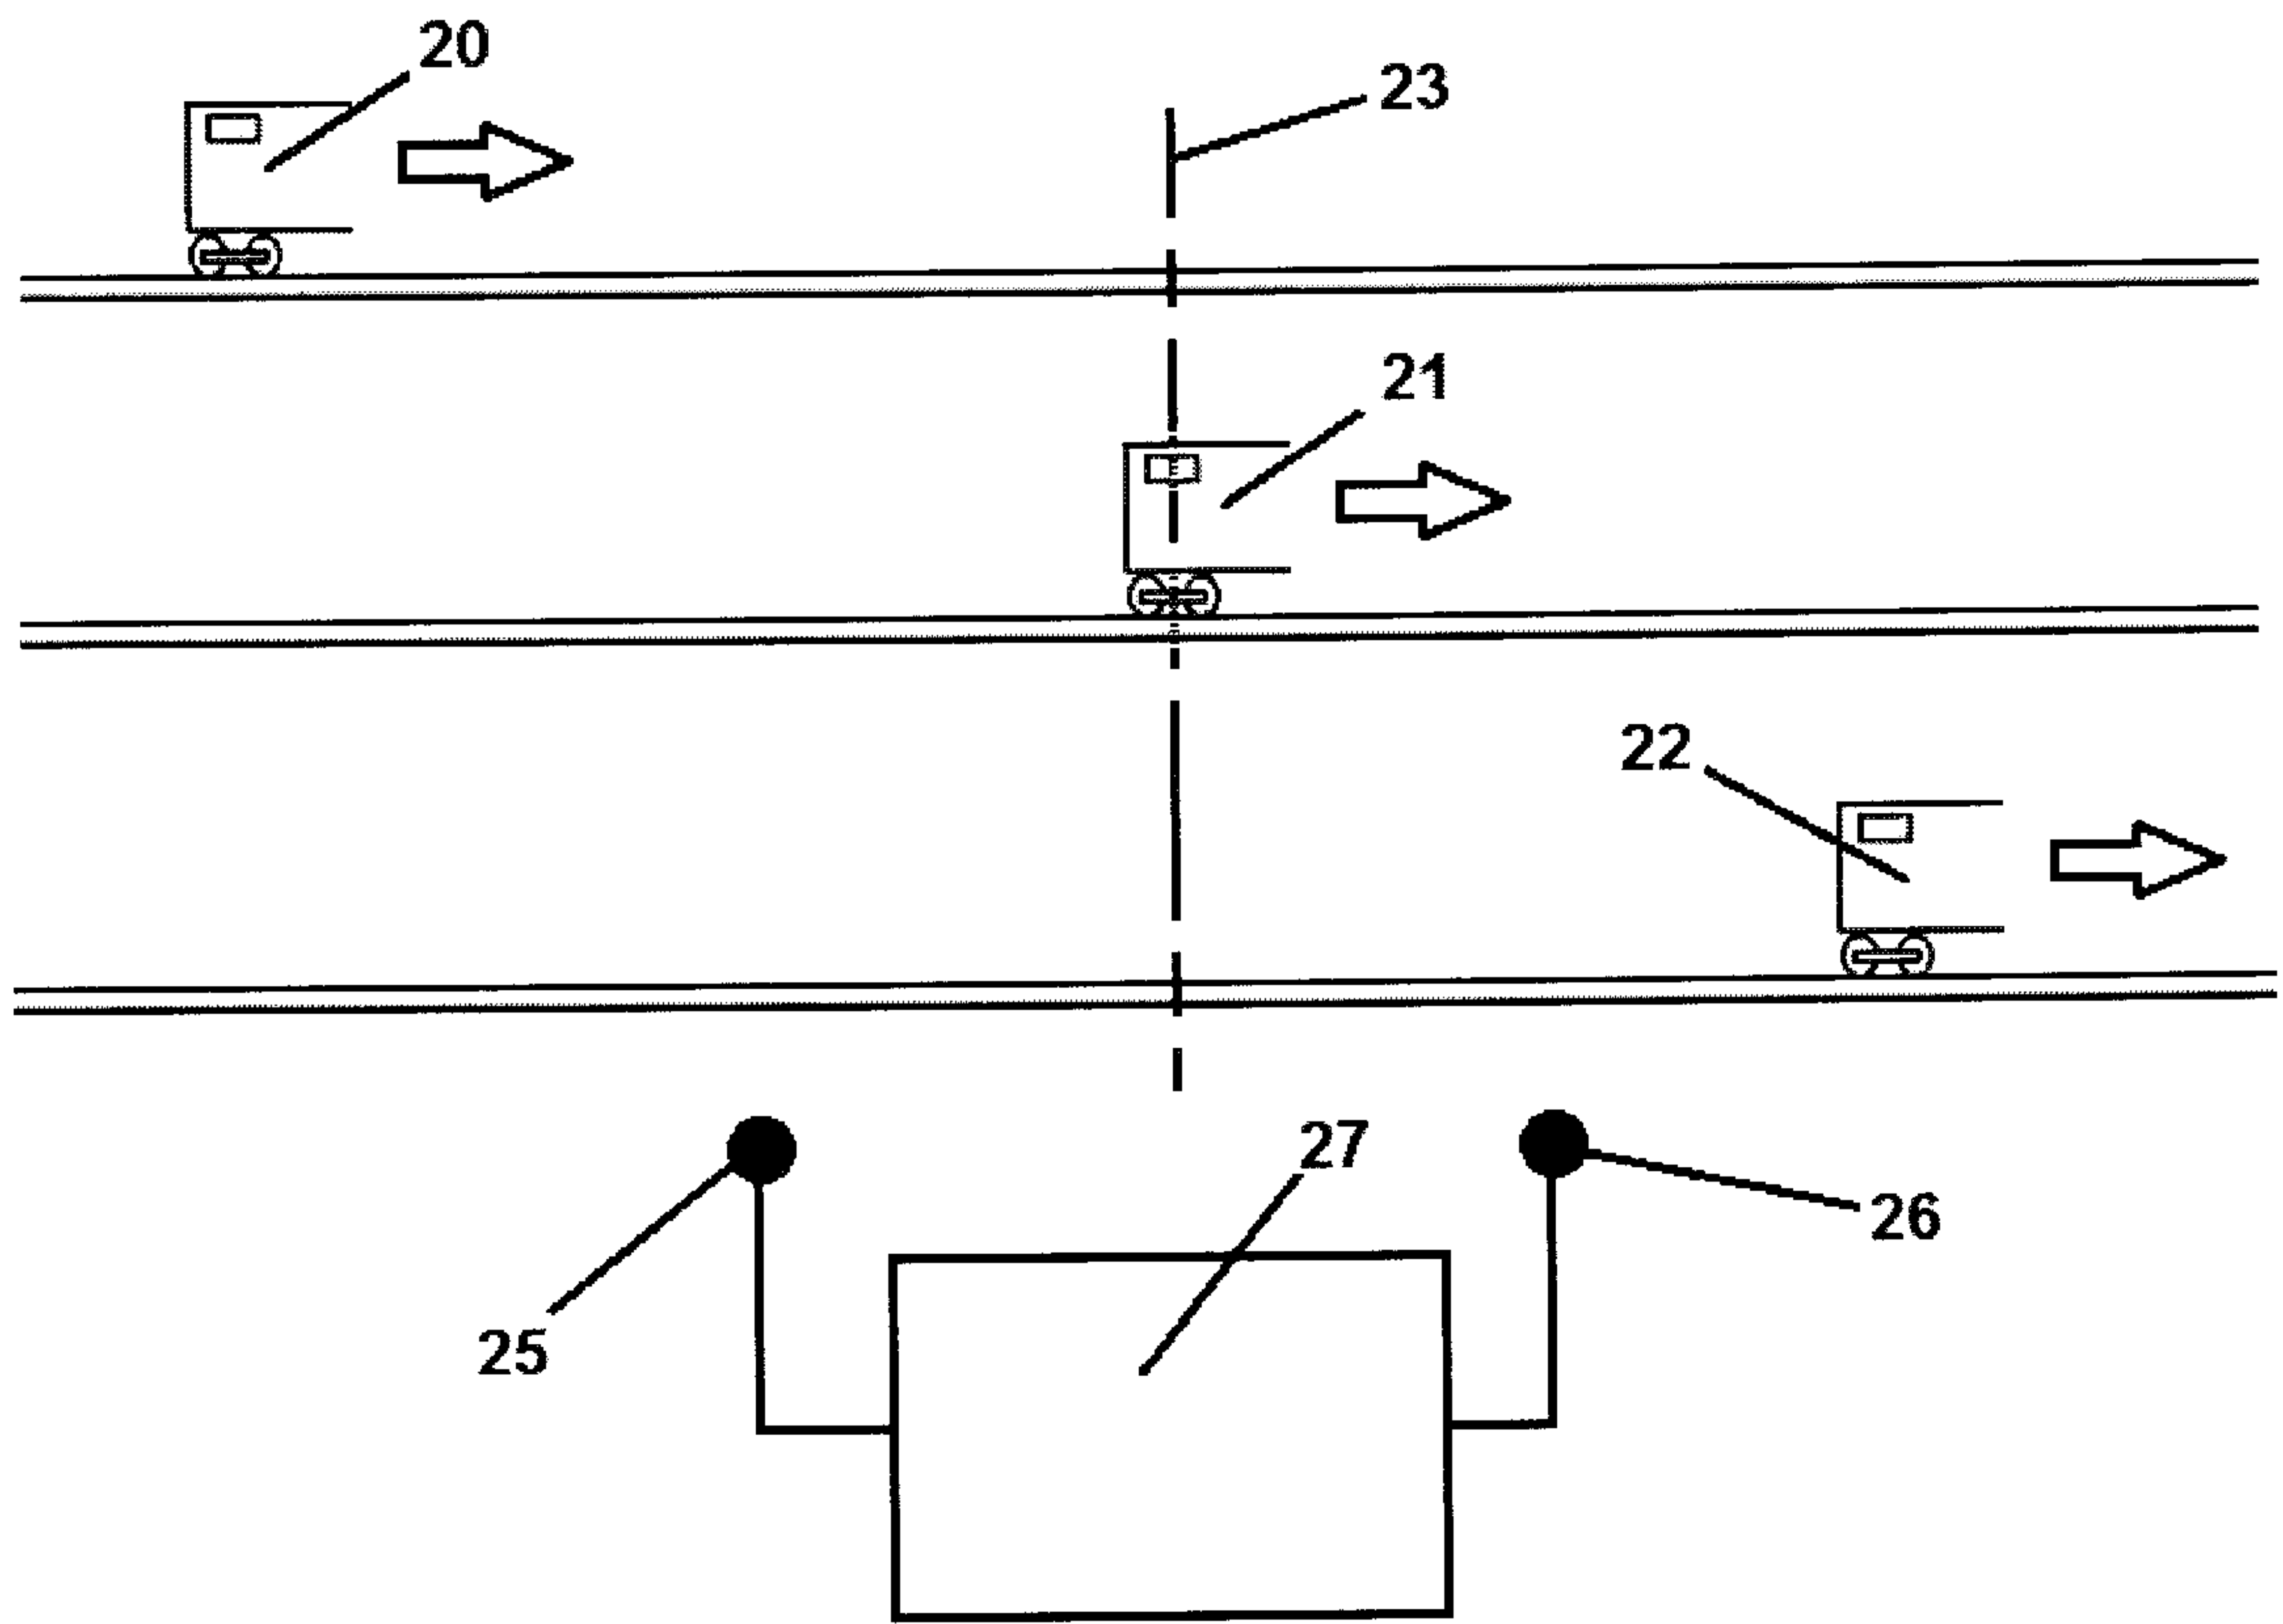


Fig. 2

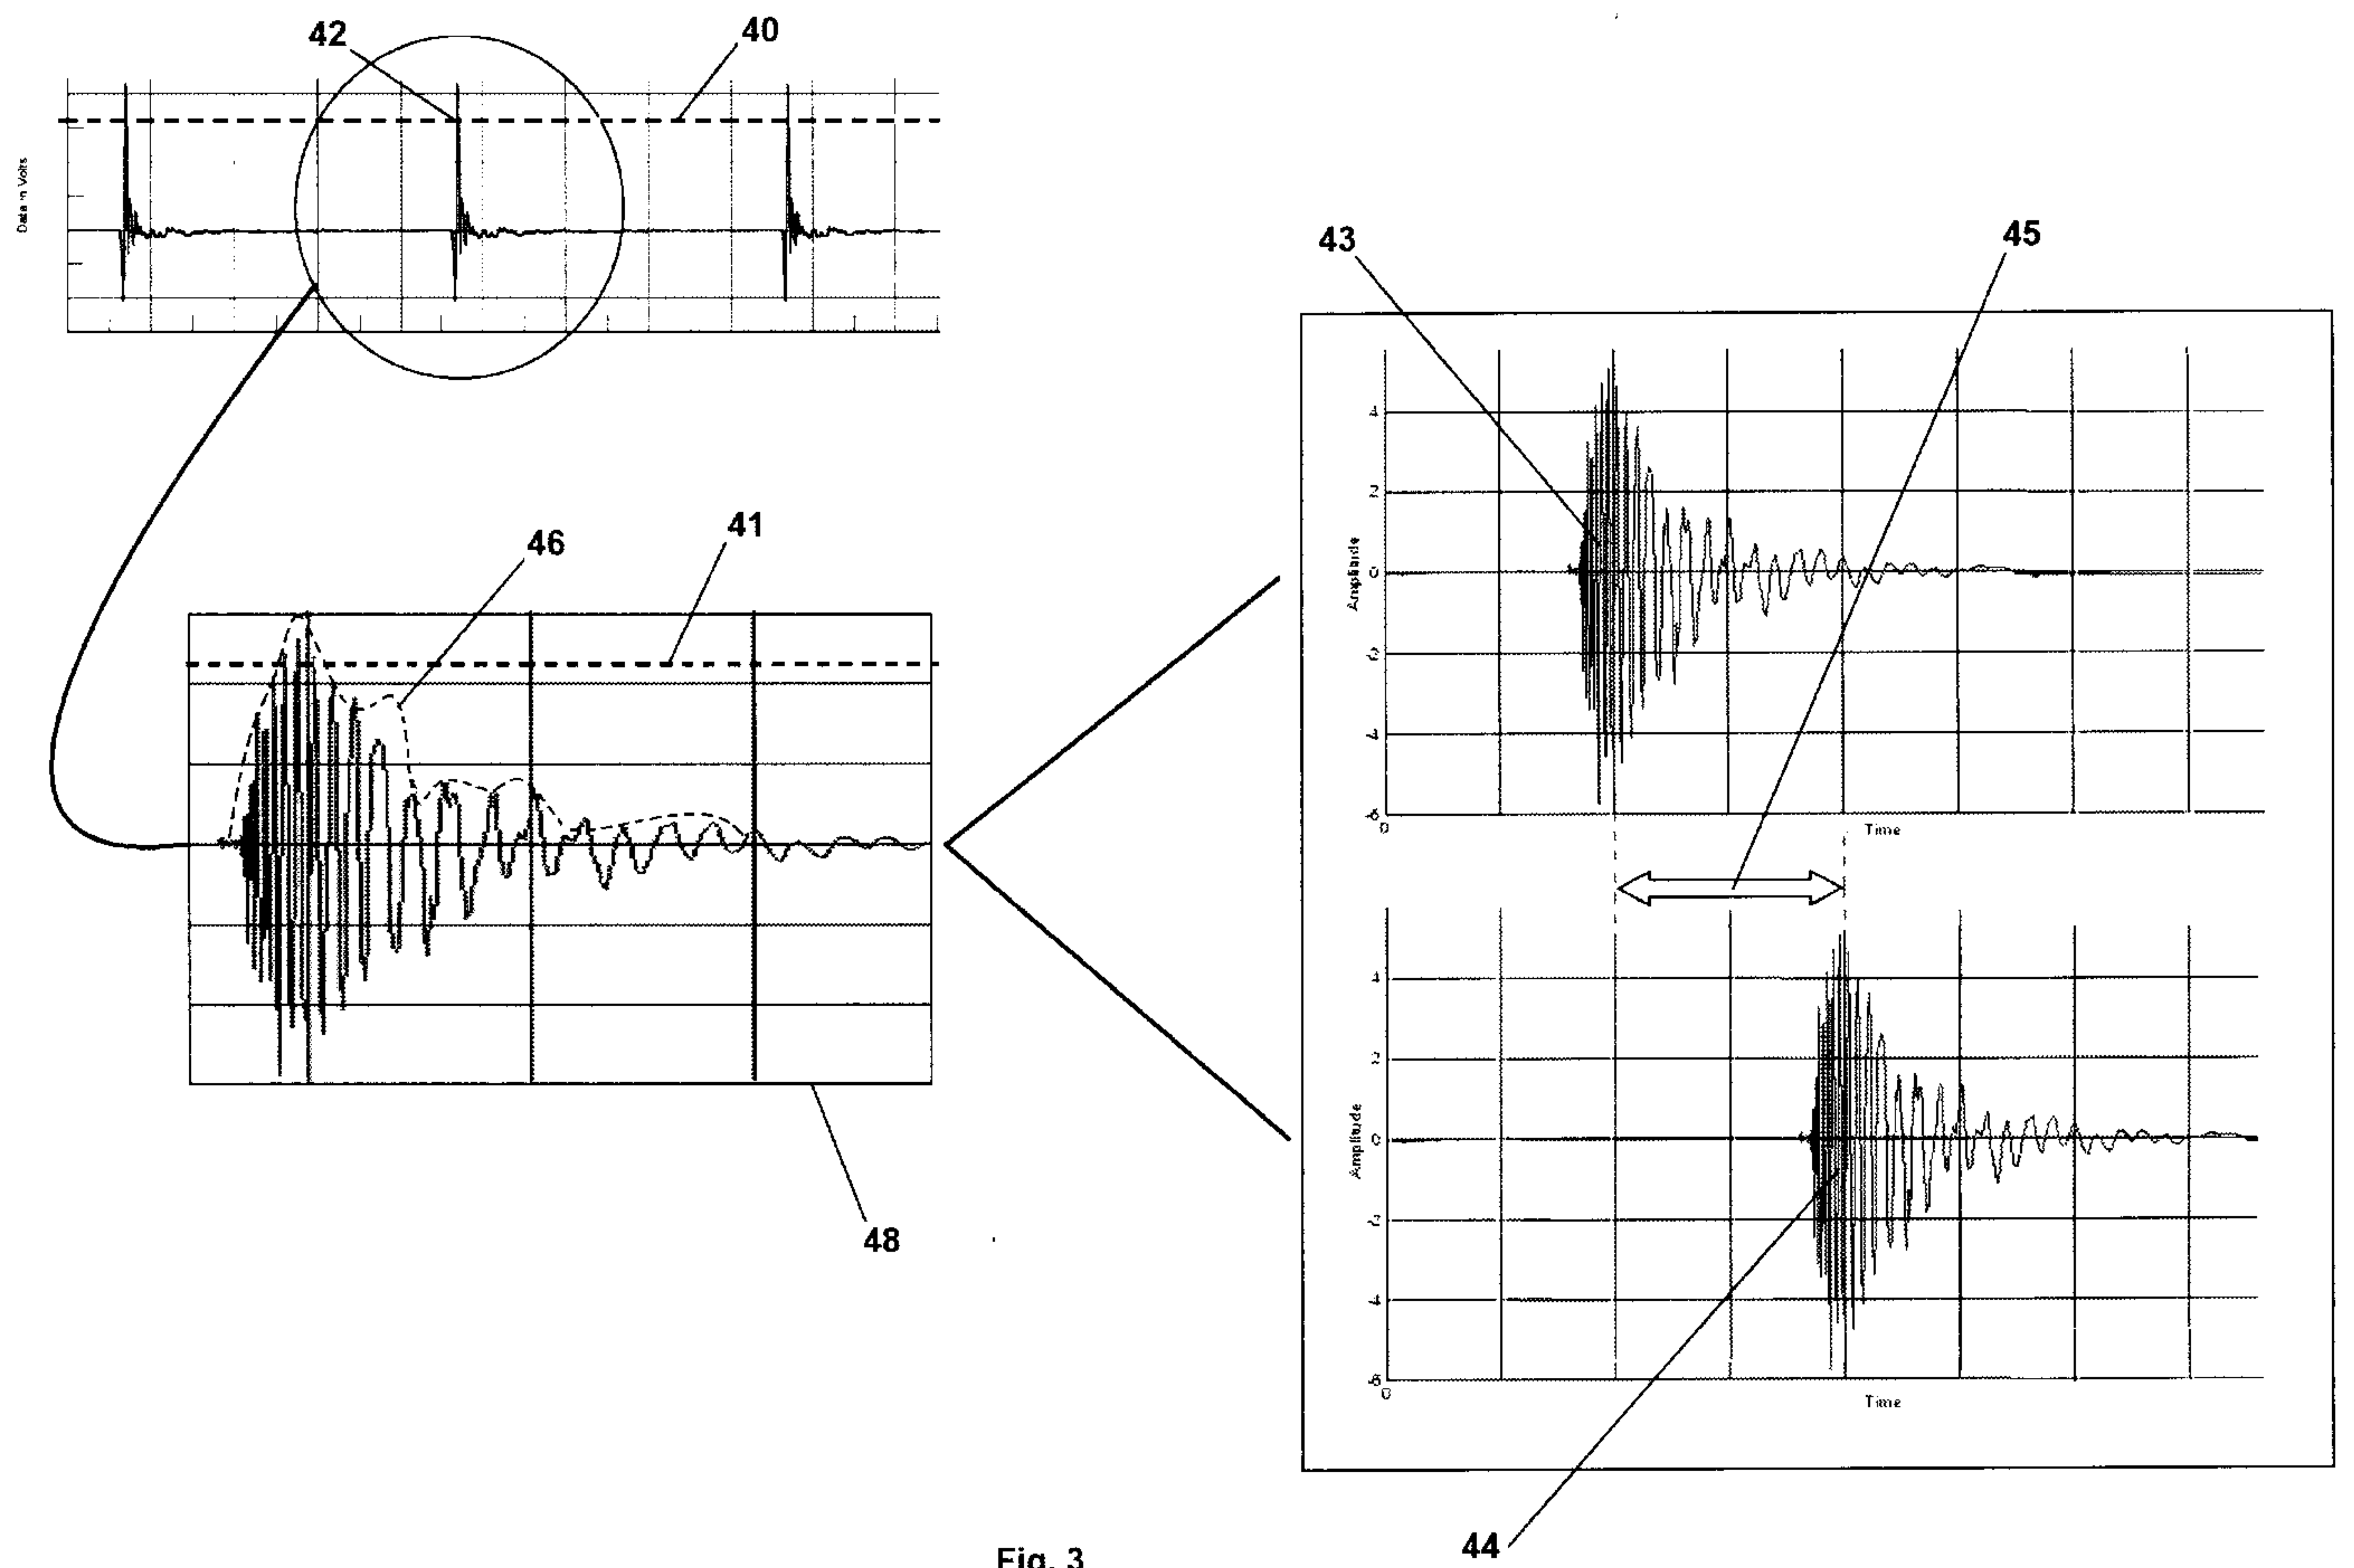


Fig. 3

