




(86) **Date de dépôt PCT/PCT Filing Date:** 2013/07/29
 (87) **Date publication PCT/PCT Publication Date:** 2014/01/30
 (45) **Date de délivrance/Issue Date:** 2020/07/07
 (85) **Entrée phase nationale/National Entry:** 2015/01/27
 (86) **N° demande PCT/PCT Application No.:** NZ 2013/000135
 (87) **N° publication PCT/PCT Publication No.:** 2014/017929
 (30) **Priorité/Priority:** 2012/07/27 (US61/676,391)

(51) **Cl.Int./Int.Cl. G01N 21/00** (2006.01),
C12M 1/34 (2006.01), **C12M 1/42** (2006.01),
C12N 5/076 (2010.01), **F15D 1/00** (2006.01),
G01N 21/64 (2006.01), **G01N 33/48** (2006.01)
 (72) **Inventeurs/Inventors:**
 SIMPSON, MIRIAM CATHER, NZ;
 ROHDE, CHARLES ALAN, US
 (73) **Propriétaire/Owner:**
 ENGENDER TECHNOLOGIES LIMITED, NZ
 (74) **Agent:** OYEN WIGGS GREEN & MUTALA LLP

(54) **Titre : PROCEDURE ET SYSTEME POUR ORIENTATION ET/OU TRI DE PARTICULES MICROFLUIDIQUES**
 (54) **Title: METHOD AND SYSTEM FOR MICROFLUIDIC PARTICLE ORIENTATION AND/OR SORTING**

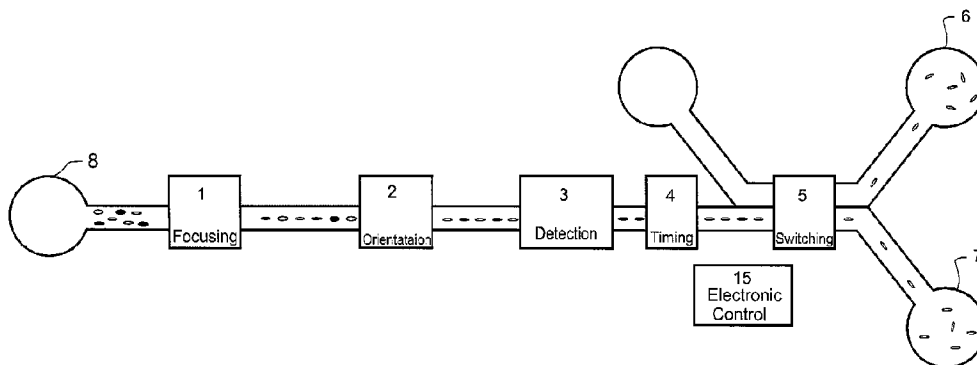

(57) **Abrégé/Abstract:**

A system for orienting particles in a microfluidic system includes one or more radiation pressure sources arranged to expose particles to radiation pressure to cause the particles to adopt a particular orientation in the fluid. A system for sorting particles in a microfluidic system includes a detection stage arranged to detect at least one difference or discriminate between particles in the fluid flow past the detection stage, and one or more radiation pressure sources past which the particles move sequentially and a controller arranged to switch radiation energy to cause a change in direction of movement of selected particles in the fluid flow to sort the particles. The particles may be biological particles such as spermatazoa. The radiation pressure may be optical pressure and may be from one or more waveguides which may extend across a channel of the microfluidic system.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2014/017929 A1(43) International Publication Date
30 January 2014 (30.01.2014)

(51) International Patent Classification:

G01N 21/00 (2006.01) F15D 1/00 (2006.01)
G01N 21/64 (2006.01) G01N 33/48 (2006.01)

(21) International Application Number:

PCT/NZ2013/000135

(22) International Filing Date:

29 July 2013 (29.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/676,391 27 July 2012 (27.07.2012) US

(72) Inventors; and

(71) Applicants : SIMPSON, Miriam Cather [US/NZ]; 22 St Peters Street, Northcote, Auckland, 0627 (NZ). ROHDE, Charles Alan [US/US]; 248 Maynard St, Apt 5, Santa Fe, New Mexico 87501 (US).

(74) Agents: BROWN, Hadleigh, R et al.; A J Park, PO Box 949, Wellington, 6140 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND SYSTEM FOR MICROFLUIDIC PARTICLE ORIENTATION AND/OR SORTING

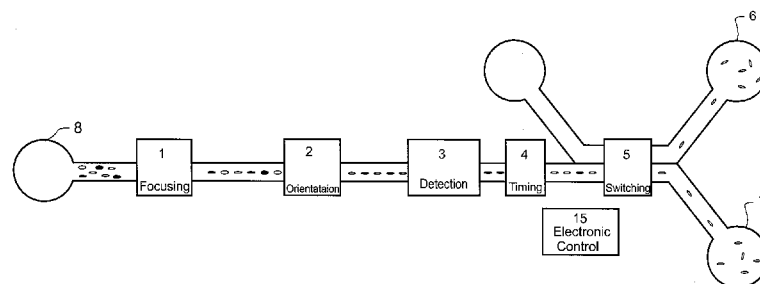


FIGURE 1

(57) Abstract: A system for orienting particles in a microfluidic system includes one or more radiation pressure sources arranged to expose particles to radiation pressure to cause the particles to adopt a particular orientation in the fluid. A system for sorting particles in a microfluidic system includes a detection stage arranged to detect at least one difference or discriminate between particles in the fluid flow past the detection stage, and one or more radiation pressure sources past which the particles move sequentially and a controller arranged to switch radiation energy to cause a change in direction of movement of selected particles in the fluid flow to sort the particles. The particles may be biological particles such as spermatazoa. The radiation pressure may be optical pressure and may be from one or more waveguides which may extend across a channel of the microfluidic system.

WO 2014/017929 A1

METHOD AND SYSTEM FOR MICROFLUIDIC PARTICLE ORIENTATION AND/OR SORTING

FIELD OF INVENTION

5 The invention relates to a method and system for particle orientation and/or sorting in a microfluidic system.

BACKGROUND

10 Developments in commercial and academic medical and biotechnology have driven a strong focus on methods for biological cell sorting. The two main approaches that have emerged – bulk separation and single cell sorting – both enrich a population of cells with a targeted subset with specific physicochemical (*i.e.* size, volume, light scattering properties, etc.), immunological, or functional characteristics. Bulk sorting generally focuses upon a single discriminating cellular feature. Examples include cell filtration, centrifugation / sedimentation and affinity-based panning
15 methods. The main disadvantages of bulk sorting are lower purity, loss of cells during the sorting process, difficulty in sorting out relatively rare cells, and difficulty in discriminating among similar sub-populations of cells. Bulk sorting, however, is a relatively simple method that offers high throughput. In contrast, single cell methods, the most important of which is fluorescence activated cell sorting (FACS) by flow cytometry, examine each cell individually to target the desired
20 subpopulation for isolation and then guide them into different output streams. The reduction in throughput is offset by major advantages in specificity of sorting that is tunable to the desired outcome, generally higher recovery of cells, the ability to sort rare or only weakly discriminated cell populations, and the availability of multi-target sorting based on an array of multiple cellular features (*i.e.* several types of surface receptor, each tagged with a different fluorescent label). One important
25 challenge faced by FACS flow cytometric methods is the damage incurred by some cells in the flow (shear stress) and sorting (electric field damage) processes. An important example is the reduced fertility of sorted sperm samples that can be attributed to these disruptive physical processes.

30 In the agriculture sector, cell discrimination is particularly important in livestock species where artificial insemination is commonly practised such as cattle. The use of sexed semen facilitates control of offspring gender for commercial benefit. The current commercially important method for sperm sorting uses FACS flow cytometry, in which sperm are discriminated by their differences in DNA content. The DNA of each spermatozoon is stained with a fluorescent dye in proportion to the DNA content. As the X chromosome is larger (*i.e.* has more DNA) than the Y chromosome,

the "female" (X-chromosome bearing) spermatozoa will absorb a greater amount of dye than the "male" (Y-chromosome bearing) spermatozoa and as a consequence when exposed to UV light during flow cytometry will fluoresce with higher intensity than the Y spermatozoa. Before detection or discrimination the sperm may be oriented hydrodynamically and the sperm may be separated into individual droplets that then may be electrically charged. After detection or discrimination, the sperm are sorted by electric field – charged droplet interactions.

SUMMARY OF THE INVENTION

In broad terms in one aspect the invention comprises a method of orienting particles in a microfluidic system, which includes exposing the particles to radiation pressure in a microfluidic system to cause at least a majority of the particles to adopt a particular orientation in the fluid.

In broad terms in another aspect the invention comprises a system for orienting particles in a microfluidic system, which includes one or more radiation pressure sources arranged to expose particles in the microfluidic system to radiation pressure to cause at least a majority of the particles to adopt a particular orientation in the fluid.

The particles may be biological or non-biological particles. Typically the particles are asymmetric particles. The asymmetry may be in any physical property that leads to an asymmetric interaction with the incident radiation, including but not limited to asymmetry in physical dimensions of the particles. In some embodiments the particles may be sperm, red blood cells, or bacteria, for example.

The radiation pressure may be optical pressure and may be from one or more waveguides which may extend across a channel of the microfluidic system, for example across above, below or across the side walls of the channel, or may abut a channel from above, below or the side. The waveguide(s) may be one or more optical waveguides are connected to a light source, such as a laser, to transport light and generate the radiation pressure also referred to as optical force, photon pressure or electromagnetic pressure. The one or more waveguides may be manufactured as part of the intrinsic process of fabricating the microfluidic system, or may be inserted as fibre optic units in the construction of the final system.

A microfluidic system for orienting particles as above may also comprise a pre-stage for focusing and/or singulating the particles into a particular location within the channel. This system may be hydrodynamic or radiation pressure based.

- 5 In broad terms in another aspect the invention comprises a method of sorting particles in a microfluidic system, which includes:
- detecting at least one difference or discriminating between particles, and
 - switching based on an input from the detection or discrimination, one or more radiation pressure sources past which the particles move sequentially to cause a change in direction of
- 10 movement of selected particles in the fluid flow to sort the particles.

The particles may be directed into two or more than two different outputs.

The one or more radiation pressure sources may be one or more waveguides, which may extend

15 across a channel of the microfluidic system, for example across above, below or across the sidewalls of the channel, or may abut a channel from above, below or the side.

The step of detecting at least one difference or discriminating between particles may comprise an optical technique for assessing a characteristic of the particle, the technique may be a fluorescence-

20 based detection technique.

The method may also comprise singulating particle flow and may also comprise focusing the particles to a particular location within the channels. The forces may be hydrodynamic or radiation pressure based.

25

The method may also comprise causing at least a majority of the particles to first adopt a particular orientation in the fluid before detecting, where the particles are asymmetric particles. The orientation step may comprise exposing the particles to radiation pressure such as optical pressure to cause at least a majority of the particles to adopt a particular orientation in the fluid.

30

In broad terms in another aspect the invention comprises a system for sorting particles in a microfluidic system, which includes:

- a detection stage arranged to detect at least one difference or discriminate between particles in the fluid flow past the detection stage, and

- one or more radiation pressure sources past which the particles move sequentially and a controller arranged to switch based on an input from the detection or discrimination stage, radiation energy in the one or more radiation pressure sources to cause a change in direction of movement of selected particles in the fluid flow to sort the particles.

5

The system may be arranged to switch or sort the particles so that each particle is directed into one of two or one of more than two different outputs.

10 The one or more radiation pressure sources may be one or more waveguides which may extend at least partway across a channel of the microfluidic system, for example across above, below or across the side walls of the channel, or may abut the channel from above, below or the side.

The detection stage may be arranged to detect or discriminate particles by an optical technique such as a fluorescence-based detection technique.

15

The particles may be biological or non-biological particles. Typically the particles are asymmetric particles. The asymmetry may be in any physical property that leads to an asymmetric interaction with the optical force, including but not limited to asymmetry in physical dimensions. In some embodiments the particles may be sperm, red blood cells, bacteria, or nanoparticles for example.

20

A microfluidic system for orienting particles as above may also comprise a pre-stage singulating particle flow and may also comprise a pre-stage for focusing the particles into a particular location within the channel. This system may be hydrodynamic or optical.

25 The system may also comprise an orientation stage arranged to cause at least a majority of the particles to first adopt a particular orientation in the fluid, particularly where the particles are asymmetric particles. The orientation stage may comprise one or more waveguides arranged to in use expose particles to radiation such as optical pressure to cause at least a majority of the particles to adopt a particular orientation in the fluid.

30

In broad terms in another aspect the invention comprises a microfluidic system for sexing sperm which includes:

- one or more orienting radiation pressure sources arranged to expose sperm to pressure to cause individual sperm to adopt a common orientation in the fluid

- a fluorescence-based detection stage arranged to discriminate male and female sperm in the fluid flow past the detection stage, and
- one or more switching radiation pressure sources past which the individual sperm subsequently move, and
- 5 • a controller arranged receive an input from the detection stage and to control radiation energy in the one or more switching radiation pressure sources to separately direct male and/or female sperm.

A microfluidic system for orienting particles as above may also comprise a pre-stage for singulating sperm flow and a pre-stage for focusing the sperm into a particular location within the channel. This system may be hydrodynamic or optical.

The term “comprising” as used in this specification means “consisting at least in part of”. When interpreting statements in this specification which include that term, the features prefaced by that term in each statement all need to be present but other features can also be present. Related terms such as “comprise” and “comprised” are to be interpreted in the same manner.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is further described with reference to the accompanying figures in which:

20 Figure 1 schematically illustrates an embodiment of a microfluidic system of the invention for particle sorting,

Figures 2a and 2b schematically illustrate embodiments for particle orientation in which a single waveguide – Figure 2a, or multiple waveguides – Figure 2b, abut the microchannel from above, below or from a side of the channel,

25 Figure 3a and 3b schematically illustrate embodiments for particle orientation in which a single waveguide – Figure 3a, and multiple waveguides – Figure 3b, extend across the microchannel above, below or along a side wall of the channel,

Figure 4a and 4b schematically illustrate embodiments for sorting or switching selected particles in a fluid flow in a microchannel, in which multiple waveguides abut the channel from above, below or from a side of the channel,

30 Figures 5a and 5b schematically illustrate embodiments for sorting or switching selected particles in a fluid flow in a microchannel, in which multiple waveguides extend across the channel above, below or along the side wall of the channel,

Figure 6a shows an embodiment of a microfluidic chip the invention for performing orientation and separation of sperm and Figure 6b shows an array of individual sorting chips may arranged for massively parallel microfluidic implementation to sort sperm according to sex,

Figure 7a and 7b are computational geometries used in FEM simulations referred to on the

5 subsequent description of experimental work, Figure 7a - elliptical cylinder in water placed along the optical axis of waveguide 40 μm from terminus of waveguide and Figure 7b - elliptical cylinder placed above an SU8 photo-epoxy waveguide with a small gap separating the cylinder from the waveguide,

Figure 8 shows torque on elliptical cylinder in water at a variety of distances from the terminus of a waveguide, referred to on the subsequent description of experimental work,

Figure 9 shows torque on an elliptical cylinder in water above a waveguide at 3 separation distances, referred to on the subsequent description of experimental work,

Figure 10 shows F_x and F_y forces on an elliptical cylinder in water at the terminus of a waveguide in the vertical orientation for a variety of separation distances, referred to on the subsequent description of experimental work,

Figure 11 shows F_x and F_y optical forces on an elliptical cylinder in water above a waveguide for a variety of separation distances, referred to on the subsequent description of experimental work,

Figures 12a – c show symmetrical particle displacement by an optical field as the particle flows past the end of a wave-guide terminus in a microfluidic channel referred to on the subsequent description of experimental work,

Figures 13a and b show an asymmetrical particle displacement by, and oriented by an optical field as the particle flows past the end of a wave-guide terminus in a microfluidic channel, referred to on the subsequent description of experimental work, and

Figure 14 shows the measured displacement efficiency as a function of particle flow speed for symmetric particles - Figure 14a, and asymmetric particles - Figure 14b.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1 the microfluidic system typically provided on a microfluidic chip for particle orientation and sorting comprises focusing, orientation, detection of a discriminating feature that may be fluorescence, and timing and switching stages sequentially along a microchannel along which the particles move with the fluid flow in the channel, from one stage to the next.

In the embodiment shown a hydrodynamic focusing and/or singulating stage 1 places the particles in a particular location in the channel.

If the particles are asymmetric, such as sperm for example, the initial orientation of the particles may be random, and an orientation stage 2 orients the particles substantially all or at least a majority with a common orientation predetermined relative to the channel geometry. In the schematic figure the particles are shown being oriented vertically. In a preferred embodiment the particles are oriented at the orientation stage by optical forces such as from an optical waveguide as will be further described. One or more waveguides may extend across the channel, for example across above, below or along the side wall of the channel, or may abut the channel from above, below or from the side of the channel. The waveguide may form part of the channel wall, or may be physically separated from the microfluidic chamber.

In this embodiment the detection stage 3 is a fluorescence-based detection stage and the particles are previously stained with a fluorescent dye, and the fluorescence detection stage 3 evaluates the fluorescence intensity of each particle and passes fluorescence information to timing and switching stages 4 and 5, which switch or sort the particles so that each particle is directed into one of two different outputs 6 and 7. The timing and switching stages 4 and 5 are controlled by an electronic controller 15. For example the particles may be sperm and male sperm may be directed to output 6 and female sperm to output 7 for example. Alternatively particles may be sorted to select one particle type which is desired from another particle type which is non-desired for the particular application, such as to select red blood cells for example and in such an embodiment the desired particles may be directed to collection or to further processing while the undesired particles may be directed to waste or an outlet to waste or some other processing.

The particles enter the microfluidic system from source 8. In the figure the source 8 and outputs 6 and 7 are schematically shown as collection volumes such as chambers for containing the particles, but the particles may enter the system or the sorting section of the microfluidic system, from a microfluidic channel or channels from a prior processing stage and exit the sorting section to microfluidic channels carrying the particles to other subsequent processing for example.

Figures 2a and 2b schematically illustrate embodiments for particle orientation in which a single waveguide – Figure 2a, or multiple waveguides – Figure 2a, abut the microchannel from a side (above, below or from either side) of the channel, which may be used in the orientation stage 2 of the system of Figure 1. In Figure 2a, a radiation waveguide 9 such as an optical fibre connected to a source such as a laser abuts the channel from one side of the channel. The waveguide may form part

of the wall of the channel or may be physically separated from the microfluidic chamber. As asymmetric particles in random orientation pass the terminus of the waveguide 9, they are subjected to an optical force which tends to cause the asymmetric particles to orient with a common and predetermined orientation. In the embodiment of Figure 2b, the particles pass three waveguides 9a – 9c in a series, which cumulatively orient the particles. The optical force from the first waveguide 9a may cause each particle to begin rotating towards a desired orientation, while optical force from subsequent waveguides 9b and 9c continues to cause the particle to move to the desired orientation. Figure 2a shows a single waveguide abutting the side of the channel and Figure 2b three waveguides abutting the side of the channel but alternative embodiments may comprise two or more than three waveguides, and the waveguides may abut the channel from above, below or from either side.

Waveguides may be manufactured as part of the device (i.e. in situ) or inserted during device assembly (i.e. fibre optic components). Typically the waveguides may apply optical force in an optical wavelength range from the visible to near-infrared (500 nm – 2 μ m), and laser sources will be CW emission sources with output powers of less than 1 W / waveguide, to minimise the optical forces applied in each interaction with the particle. The emission of the laser light may be controlled electronically, to switch on and off as desired to generate pulses on the microsecond to millisecond timescale.

Figures 3a and 3b schematically illustrate embodiments for particle orientation in which a single waveguide 10a – Figure 3a, and multiple waveguides 10a – 10d – Figure 3b, extend across the microchannel above or below the channel. The waveguide(s) extend above, below or along a side wall of the microchannel so that the particles pass by the waveguides, and in doing so are subject to radiation emanating from the waveguides and which applies photon pressure to orient the particles described above. Optical radiation may be supplied to the waveguide(s) from a coupling lens 12 as shown.

An advantage of the waveguide-based orientation embodiments described above, over particle orientation via hydrodynamic pressure as commonly used in sperm sexing with conventional flow cytometry for example, is that less force is applied to the particles such as sperm to orient them, so that there is a lower likelihood of particle damage during or as a result of the particle orientation. This may be particularly so for the embodiments of figures 2b and 3b which orient the particles via a series of sequential waveguides each applying lower radiation pressure than would be required to

orient the same particles with radiation pressure from a single waveguide. This may be particularly advantageous for biological particles such as sperm, and cells for example.

5 Figures 4a and 4b show an embodiment for sorting or switching selected particles to change the direction of movement in the fluid flow in the microchannel, in which the multiple waveguides 11a – 11e abut the channel from a side of (or above or below) the channel. Figures 5a and 5b show an embodiment for sorting or switching selected particles to change the direction of movement in the fluid flow in the microchannel, in which the multiple waveguides extend across the channel above, below or along side of the channel. After the fluorescence detection stage 3 (Figure 1), in the
10 switching stage 4 (Figure 1) each particle passes a series of waveguides 11a-11e which enter the microchannel from the side in Figures 4a and 4b, or 13a-13d which pass below or above the microchannel in the embodiment of Figures 5a and 5b. The waveguides in Figures 4a, 4b, 5a and 5b may form part of the wall of the channel or may be physically separated from the microfluidic chamber.

15

Referring to Figures 4a and 5a, when a particle desired to be switched to a particular output 6 or 7 passes through the switching stage 5 (see Figure 1), the energy source to each of the waveguides 11a-11e or 13a-13d is switched on. As the particle passes the first waveguide, it is deflected by the optical force, and is further deflected as it passes the subsequent waveguides. All of the waveguides
20 may be energised together, from a common laser source through a coupling lens 12 as shown in Figures 5a and 5b for example, or in a higher speed system particle movement may be timed with switching of each of waveguides 11a-11e or 13a-13d so that each waveguide is energised, one after the other, as the selected particle passes each individual waveguide. Controller 6 (see Figure 1) with input(s) from timing stage 4 (see figure 1) sequences the energising of the switching waveguides
25 with the passing the switching stage of the selected particles. In the embodiment shown, there is a laminar flow through the channel and, referring to Figures 4a and 5a, the waveguides when energised act to deflect selected particles from the flow on one side towards output 7 across the flow boundary and into the flow towards output 6. When the waveguides are not excited, there is no deflection of the particles which therefore continue move towards output 7, as shown in Figures 4b
30 and 5b. In the embodiments shown the system is arranged to switch or sort the particles so that each particle is directed into one of two outputs 6 and 7 but in alternative embodiments the system may be arranged to switch or sort the particles between more than two different outputs such as three or four outputs for example. For example the waveguides when sequentially energised may deflect selected particles from the flow on one side across a first flow boundary and into a second

flow and then across a second flow boundary and into a third flow towards a third output. Switching or sorting may be based on ternary rather than binary characteristics of the particles for example. Also in alternative embodiments the waveguides may operate to cause selected particles to deflect to turn into a different channel or channels instead of collection volumes for example.

5

Figure 6a shows a microfluidic chip that incorporates an embodiment of the invention to perform orientation and separation of bovine sperm. The sperm sample, with DNA already stained and rinsed, enters the chip at Sample in, along with two sheath fluid flows Sh. The sperm sample and sheath flows are cooled by a Peltier cooling stage (not shown) beneath the chip, and maintained at low temperature throughout the on-chip processing. The sperm are focused into the desired region of the channel in region FF. They are then oriented at O using the radiation pressure from a fibre bank FB1. In this example, the fibre bank abuts the channel from the side and four single-mode fibres are shown. These fibres transmit light from a laser into the chip. After orientation, the fluorescence intensity of the sperm DNA is evaluated using a UV LED L1 illuminating the detection region from beneath the chip. The fluorescence is coupled out of the channel using single mode fibre SMF and sent to photomultiplier tube detector PMT. The output of photomultiplier tube detector PMT is used to control switching system Sw. If a sperm is selected to be directed to a new output channel, the laser sends light through second fibre bank FB2 to move the sperm in the channel to a new flow stream. The sperm then flow across a second thermal gradient to raise the temperature in a controlled fashion to a desired temperature Such as room or body temperature - note that the serpentine path required for thermal equilibrium with the gradient is not shown for the output channels for clarity. The output channels also include flow outputs for the sheath fluid and a waste stream, as well as for the X- and Y-chromosomal sperm. A white light source L2 beneath the output channels induces scattering from particles that enter the individual output channels. That scattering is detected using a third bank of fibres FB3 so that the sperm switching can be detected by Si PIN diodes and sent to the controller for counting.

10
15
20
25

Figure 6b shows how an array of individual sorting chips may be used to achieve bulk sorting of sperm samples. The controlling electronics, laser sources, sensors, driver for the Peltier stage (T-control) and bulk fluid input and output flow are external to the sorting chip. In this diagram, only four chips are shown, for clarity only.

30

Again an advantage of the waveguide-based particle switching embodiments described above, over particle switching via hydrodynamic pressure for example, is that less force is applied to the

particles, and this may be particularly advantageous for biological particles such as sperm and cells for example. Thus while a waveguide-based particle switching stage as described above may be preceded by a hydrodynamic pressure-based particle orientation stage (if a particle orientation stage is required), and vice versa a waveguide-based particle orientation stage as described above may be followed by a hydrodynamic particle switching stage, in a preferred embodiment a system particularly for sorting asymmetric biological particles such as sperm may comprise a waveguide-based orientation stage arranged to orient the sperm by radiation pressure, a detection stage such as a fluorescence-based detection stage, and a waveguide-based switching stage which uses optical force to separately direct male and female sperm. The system will also have an electronic such as a microprocessor-based control system. The fluorescence detection stage 3 may be arranged to irradiate the sperm previously contacted or stained with a fluorescent marker dye which binds to the DNA of each spermatozoon, and comprises a detector to detect the intensity of the resulting fluorescence. The female absorb a greater amount of dye than the male sperm, and therefore fluoresce with higher intensity and enabling discrimination.

Systems which are comprised of only a single waveguide are restricted in their processing speed by the limited impulse (force x time) of the optical force on the particle of interest. The interaction time is limited by the physical size of the waveguide and the flow speed of the particles. The manipulation force is limited by the optical trapping potential of the waveguide. Higher forces lead to complete optical trapping, in which particles are no longer free to move with the surrounding fluid. This sets the typical use of single waveguide particle manipulation to low throughput, high precision processing of particles. Multiple waveguide orientation and switching embodiments, such as described above offer the advantage of continuous application of a well controlled optical force over an extended time without the occurrence of optical trapping. This allows for arbitrarily high throughput (particle flow speed) of particles by the serial addition of optical force producing waveguides increasing the impulse applied to the particle.

A microfluidic system of the invention for sorting sperm or the particles may have at least one microchannel with a sorting section in which the particles are processed as described above, or arrays of such sorting sections to increase throughput. Systems are preferably embodied in a small microfluidic device or chip prepared by micromachining, polymer processing techniques or other microfabrication technologies to form the microfluidic structures, and comprises supporting pumps, valving and instrumentation. Typically the microchannel(s) may have a width in the range 10 to 500 microns, or 100 to 400 microns, and a depth in the range 5 to 250 microns, for example. The

dimensions of the microfluidic flow channels support laminar flow, with minimal turbulence. In the embodiments described and illustrated in the figures, the microstructure has a planar form with in-plane length and width greater than depth transverse to the plane. In alternative embodiments, the depth may be greater than the length and/or width of the microchannel and reservoir and other
5 cavities of the microsystem. In alternative embodiments, the microchannels may extend in three directions, and may feature curved segments as well as angles. In the embodiments shown in the figures the microcavities have a rectangular or square cross-section but in alternative embodiments the microstructures may have a circular or oval cross-section for example, or a cross-section of other shape.

10

EXPERIMENTAL

The invention is further illustrated by way of example by the following description of simulation and trials work.

15 Example 1

Simulations were conducted using the finite element method (FEM) to approximate the action of optical forces on asymmetric particles. Specifically, the optical forces applied to elliptical particles situated near waveguides such as those described above were calculated. The orienting angular torques were calculated and the trapping/propulsive forces were also calculated. 2-dimensional (2D)
20 approximations of elliptical particles (a cylinder) with a $10\mu\text{m} : 2\mu\text{m}$ major:minor axis were placed at the terminus of the 2D approximation of a single mode optical fiber, a slab waveguide - Figure 7a. The resulting torque applied to such an elliptical particle as a function of its orientation with respect to the waveguide optical axis is shown in Figure 7b. The applied input power in the waveguide is 50mW. Waveguide modes polarized parallel (TM) and perpendicular to (TE) the plane
25 of simulation are shown. The same 2D particle approximation was placed above a 2D approximation of a ridge waveguide, as shown in Figure 8, and the resulting torque as a function of orientation parallel to the waveguide optical axis is shown in Figure 9. Both results show that the particle is oriented (has no applied torque) when its minor axis is parallel to the optical axis of the waveguides. That is, when it is in the vertical (angle = 90°) orientation. Further the graphs show that
30 the torque is restoring (in opposition to direction of motion) about that orientation angle. This is equilibrium orientation of the particle due to the applied optical forces. The resulting optical force applied to the above elliptical cylinder in water when at the terminus of a waveguide is shown in Figure 10. The optical force applied to the same elliptical cylinder in water when above a waveguide is shown in Figure 11. These optical forces are shown separated into direction parallel to (F_x) and

perpendicular to (F_y) the waveguide optical axes for a variety of particle/waveguide separations for both TM and TE polarized waveguide modes. The particles are in the vertical/equilibrium orientation as described above.

5 **Example 2**

The images of Figures 12a – c which show symmetrical particle displacement by an optical field as a particle P moved past the end of a wave-guide terminus W in a 100 μm wide rectangular microfluidic channel flow F were collected with a 10x microscope objective imaged onto a CMOS digital camera sensor. The particle was a 10 μm diameter polystyrene spherical bead, and is shown
10 flowing from top to bottom in Figure 12. Figure 12a shows the particle in the fluid flow before the waveguide. The particle interacted with the optical beam (250 mW of 532 nm coupled into a single mode fibre at >50% efficiency) diverging from the waveguide terminus. This interaction generated the strong scattering seen saturating the image of Figure 12b. The optical force pushed the particle by displacement d as shown in Figure 12c without stopping the flow of the particle along the
15 microfluidic channel.

Example 3

Figure 13 illustrates the orienting effects of the optical field at the terminus of a waveguide W adjacent to the wall of a microfluidic channel. A particle P with an asymmetric shape specifically a
20 bovine spermatozoa, was carried in a fluid flow from top to bottom in a fluid flow F in a microfluidic channel. The particle was inert and unable to move under its own propulsion. As shown in Figure 13a the spermatozoa initially presented a dark scattering orientation to the imaging system. After passing through and interacting with the optical field at the terminus of the optical waveguide (outlined in Figure 13) the spermatozoa continued to flow down the microfluidic channel
25 with a new orientation and a displacement from its initial position. The particle was moved away from the channel wall after the interaction and rotated to a new orientation, but continued to flow down the channel. The new orientation of the spermatozoa presented a white head, indicating a rotation of 90 degrees about the long axis of the particle after interacting with the optical field.

30 Multiple interaction events such as those observed in Figure 12 and Figure 13 were analysed frame-by-frame and the results presented in Figure 14. Image processing was used to measure the particle position and orientation before and after interacting with the optical field. Figure 14 shows the measured displacement efficiency as a function of particle flow speed for symmetric particles namely a 10 μm diameter polystyrene bead - Figure 14a, and asymmetric particles namely non-motile bovine

spermatozoa- Figure 14b. For example these particles are flowing past the terminus of a single waveguide with less than 200mW output power at a wavelength of 532nm. Offset indicates distance from fibre termination to the edge of the microfluidic channel.

CLAIMS:

1. A system for sorting particles in a microfluidic system, which includes:
at least one channel configured for flowing a fluid flow between at least one input source
5 and at least two outputs;
an orientation stage arranged downstream from the at least one input source, and
comprising at least one optical waveguide configured to expose the particles contained in
the flow to radiation pressure for causing at least a majority of the particles to adopt a
particular orientation in the fluid flow;
10 a detection stage arranged downstream from the orientation stage and comprising an
optical detector configured to detect at least one difference or discriminate between
particles in the fluid flow past the detection stage, and
a switching stage comprising a plurality of optical waveguides arranged and configured to
expose the particles to radiation pressure to cause a change in direction of movement of
15 selected particles in the fluid flow to sort the particles into one of the at least two output
sources based on input from the detection stage.

2. A system according to claim 1, wherein the optical waveguides are connected to a laser or
lasers.
20

3. A system according to either one of claims 1 or 2, wherein the waveguides extend across the
channel or abut the channel of the microfluidic system.

4. A system according to any one of claims 1 to 3, further comprising a controller, wherein the
25 controller is arranged to activate the radiation pressure from the optical waveguides.

5. A system according to claim 4, wherein the radiation pressure deflects a particle from a flow
on one side, across a flow boundary or boundaries, and into a flow towards a selected output.

- 30 6. A system according to any one of claims 1 to 5, wherein the optical detector is arranged to
detect or discriminate particles by a fluorescence-based detection technique.

7. A system according to any one of claims 1 to 6, further comprising a focusing stage arranged
before the orientation stage, in fluid communication with the at least one input source, the focusing

stage comprising an apparatus configured to provide at least one of a hydrodynamic pressure force and a radiation pressure force, to focus the particles to a particular location within the fluid.

8. A system according to claim 3, wherein the plurality of optical waveguides about the channel
5 from above, below or along the side walls of the channel.

9. A system according to any one of claims 1 to 8, further comprising a cooling stage capable of cooling the fluid and the particles within the fluid.

10 10. A system according to any one of claims 1 to 9, wherein the at least one channel has a width of about 10 μ m to about 500 μ m.

11. A system according to any one of claims 1 to 10, wherein the at least one channel has a depth of about 5 μ m to about 500 μ m.

15

12. A system according to any one of claims 1 to 11, further comprising before the orientation stage a singulating stage arranged to singulate particles in the fluid.

13. A system according to any one of claims 1 to 12, wherein the particles are sperm.

20

14. A system according to claim 13, wherein:
the optical detector of the detection stage is configured to discriminate between X and Y sperm in the flow;
the plurality of optical waveguides of the switch stage are configured to expose sperm in
25 the flow to radiation pressure for causing a change in direction of movement of selected X or selected Y sperm in the flow so as to sort the selected X or selected Y sperm into one of the at least two outputs based on input from the detection stage.

15. A system according to any one of claims 1 to 14, wherein the plurality of optical
30 waveguides for the switching stage are sequentially arranged.

16. A system according to any one of claims 1 to 15 implemented on a microfluidic chip.

17. A method of sorting particles in a microfluidic system, comprising:

forcing particles to adopt a particular orientation in fluid flow within at least one channel of the microfluidic system by contacting the particles with a radiation force produced by at least one optical waveguide;

5 following orientation, detecting at least one difference or discriminating between the particles in the fluid flow, and

causing a change in the direction of movement of selected particles in the fluid flow to sort the particles based on the at least one difference or discrimination detected, wherein the change in direction is caused by contacting the particles with a radiation force produced by a plurality of optical waveguides.

10

18. A method according to claim 17 where the particles are asymmetric particles and also comprising causing at least a majority of the particles to first adopt a particular orientation in the fluid before detecting.

15 19. A method according to either one of claims 17 or 18, wherein the particles are biological particles.

20. A method according to any one of claims 17 to 19, wherein the particles are sperm.

20 21. A method according to claim 20, wherein the sperm are sorted by sex.

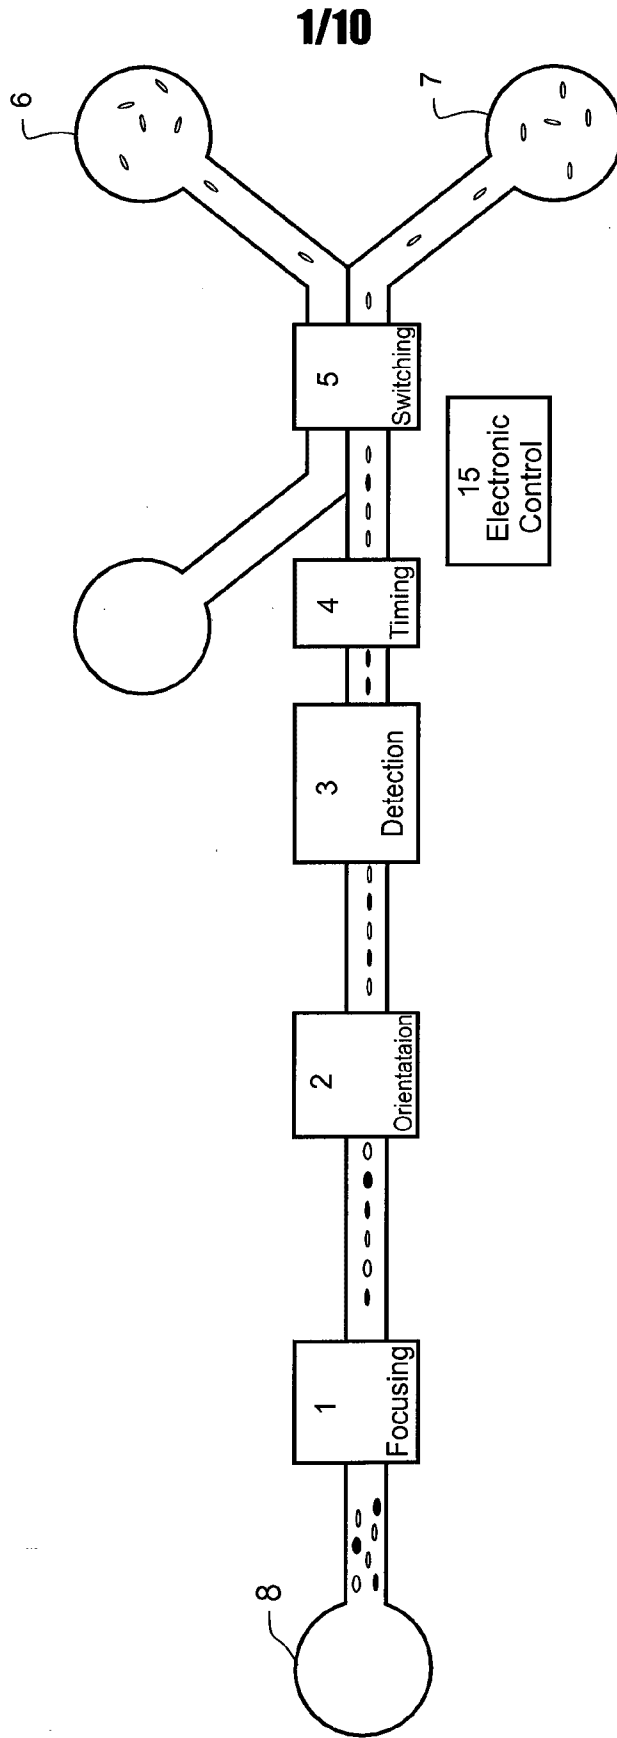


FIGURE 1

2/10

FIGURE 2A

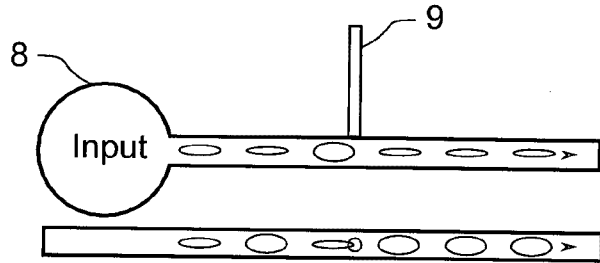


FIGURE 2B

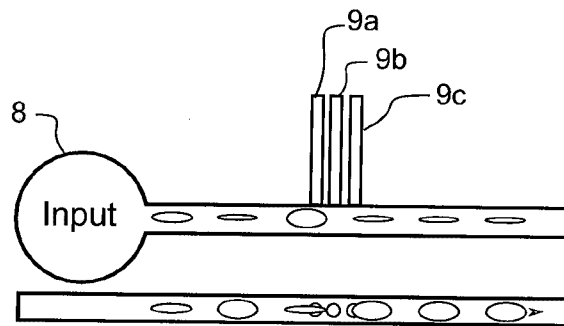


FIGURE 3A

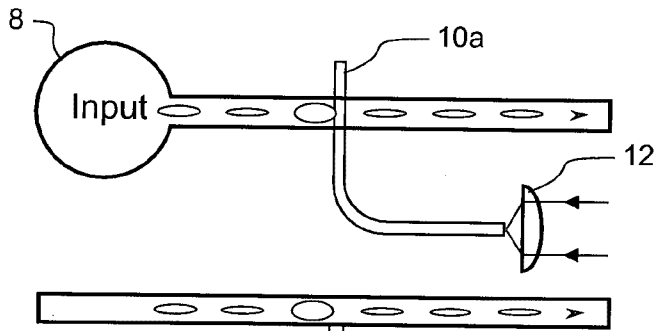
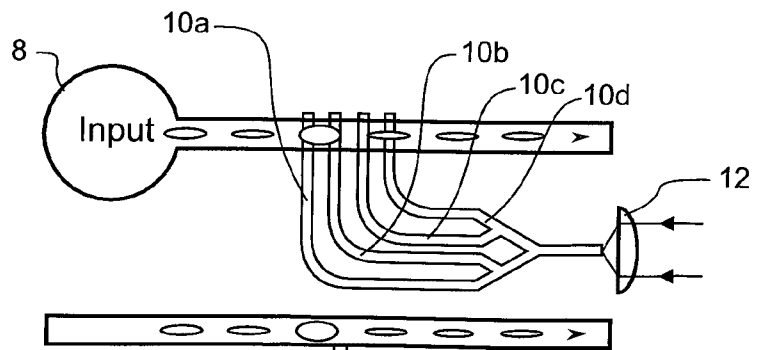


FIGURE 3B



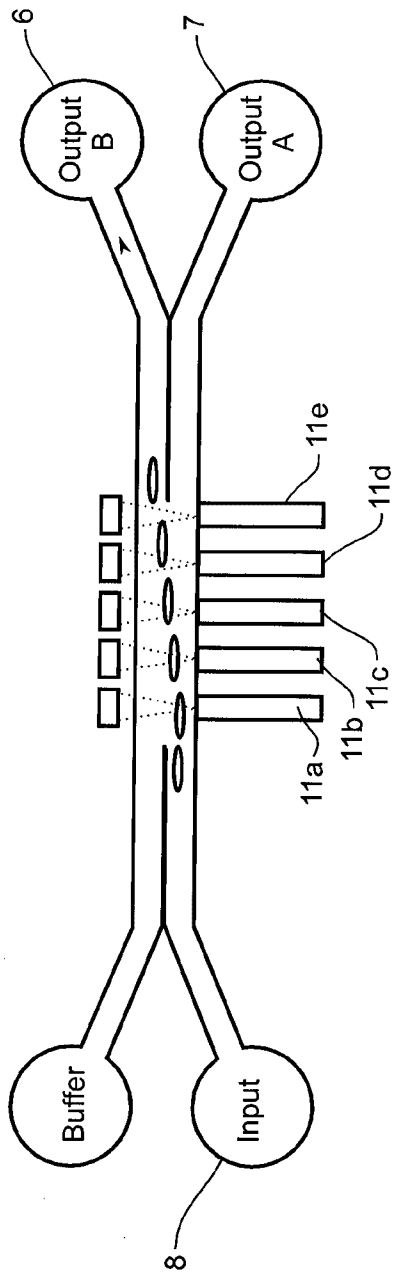


FIGURE 4A

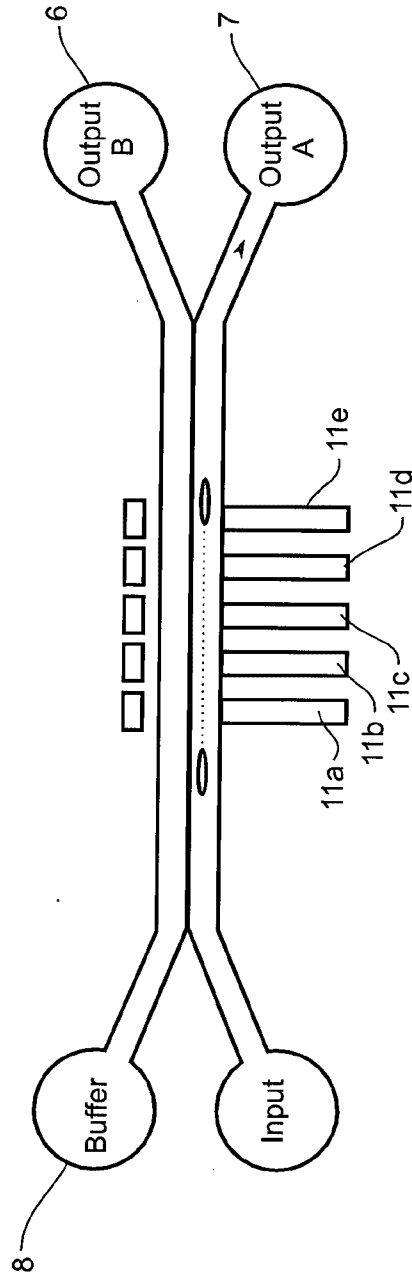


FIGURE 4B

4/10

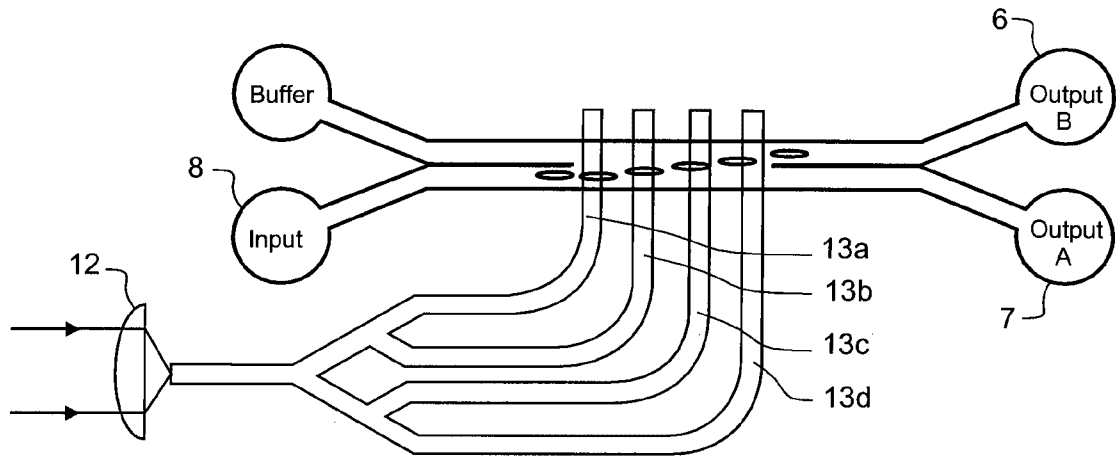


FIGURE 5A

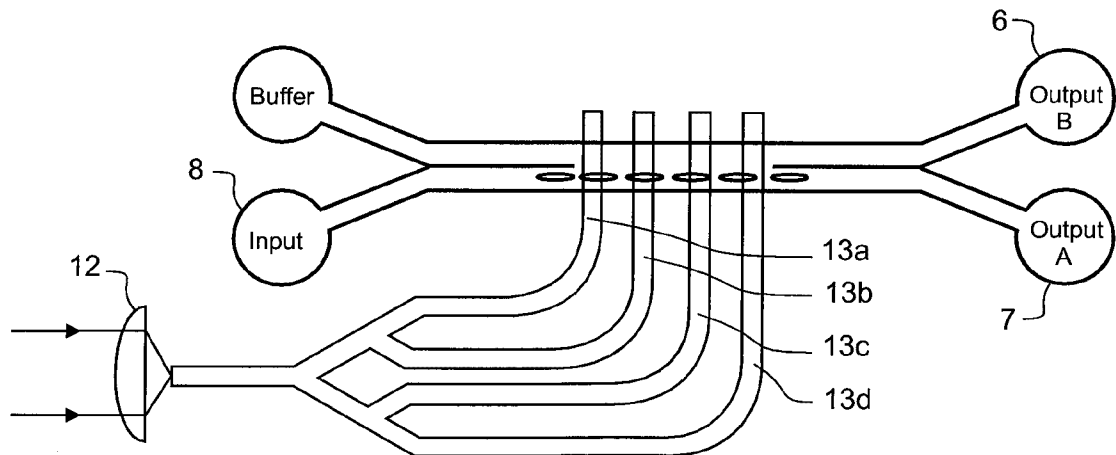


FIGURE 5B

5/10

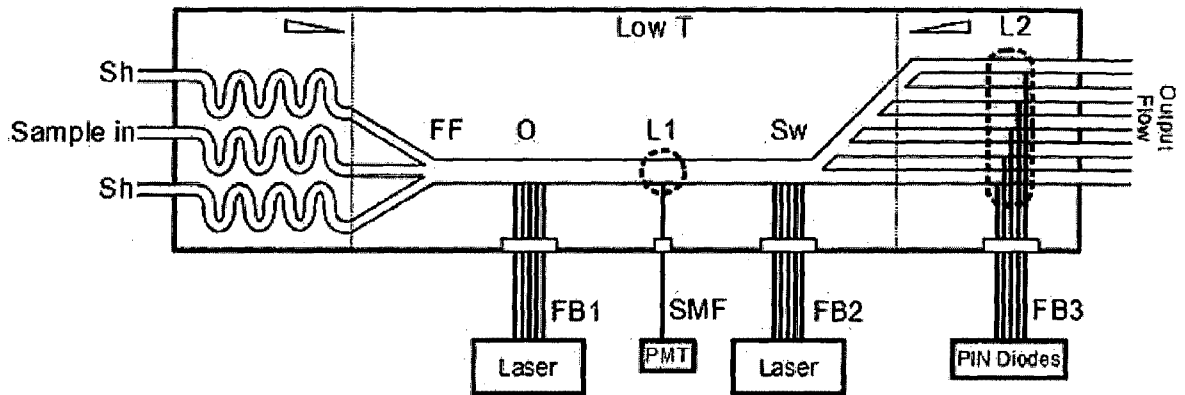


FIGURE 6A

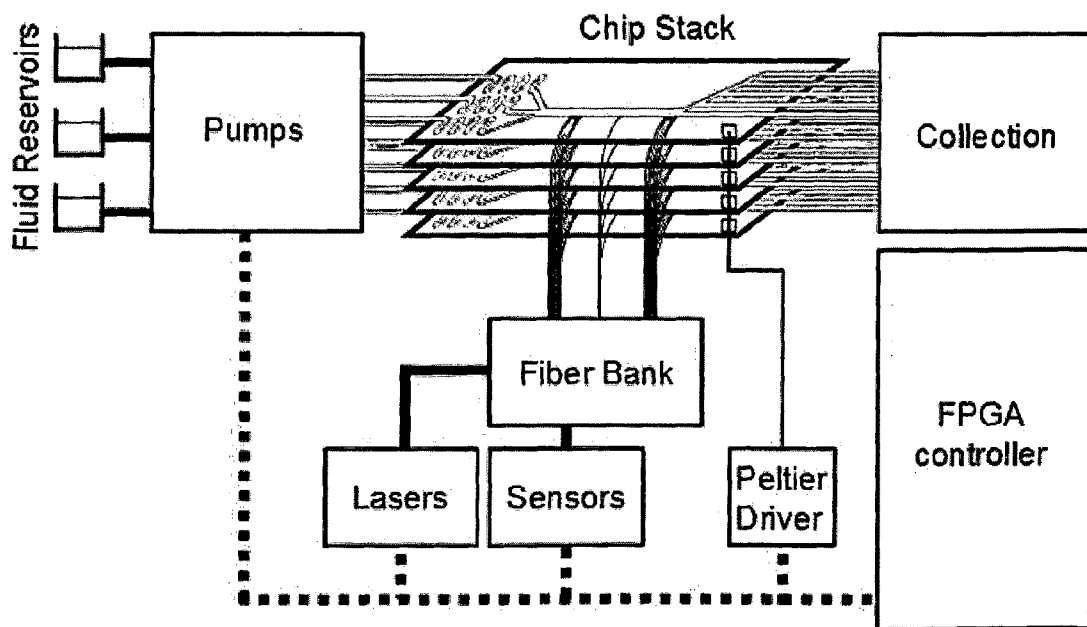


FIGURE 6B

6/10

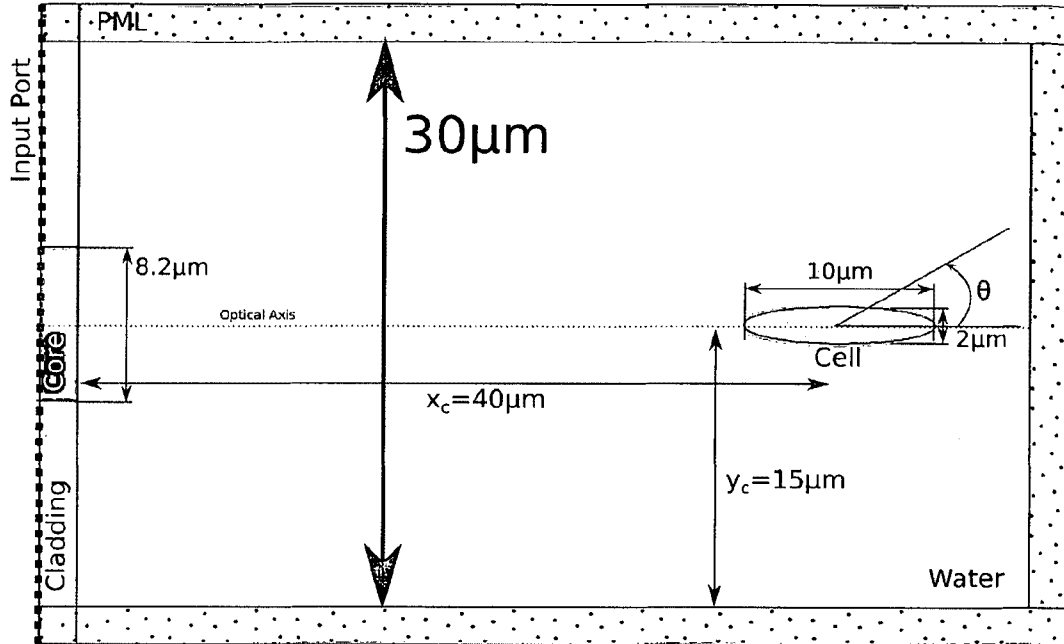


FIGURE 7A

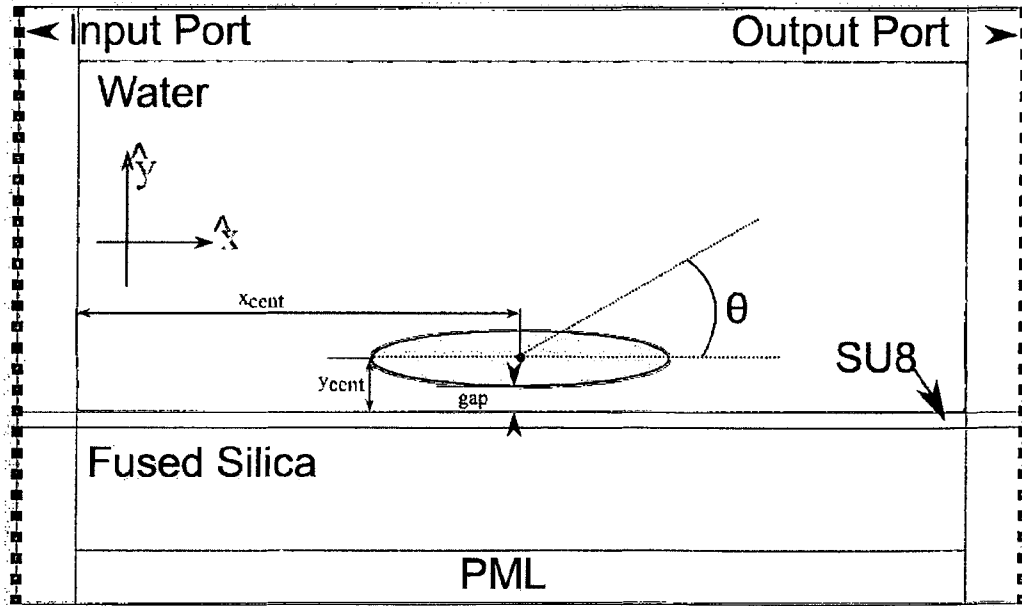


FIGURE 7B

7/10

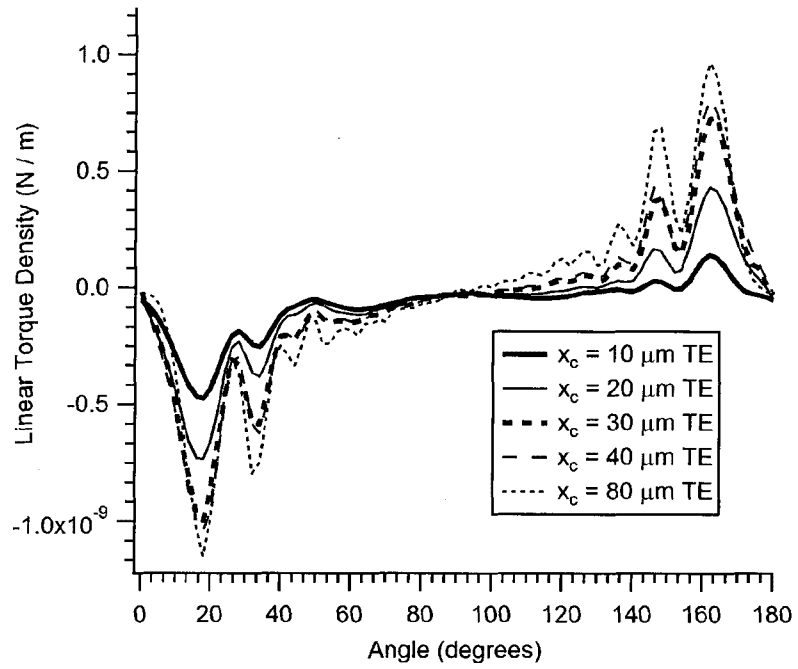


FIGURE 8

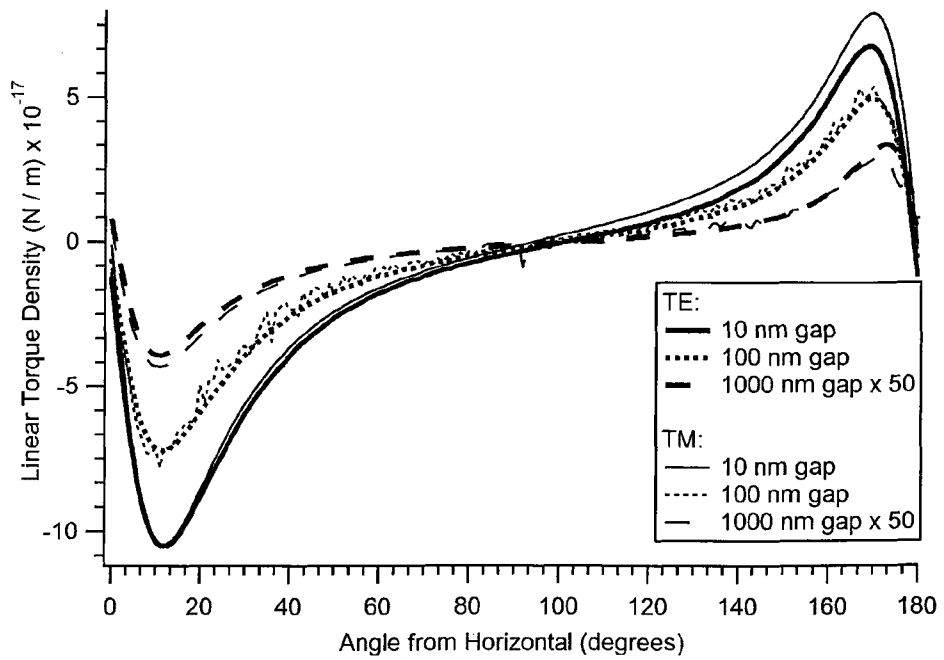


FIGURE 9

8/10

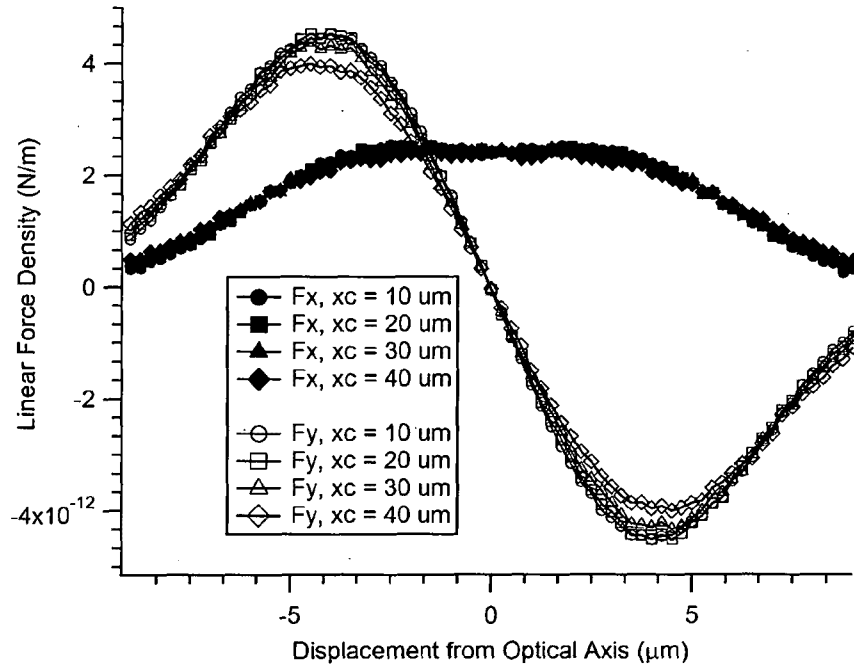


FIGURE 10

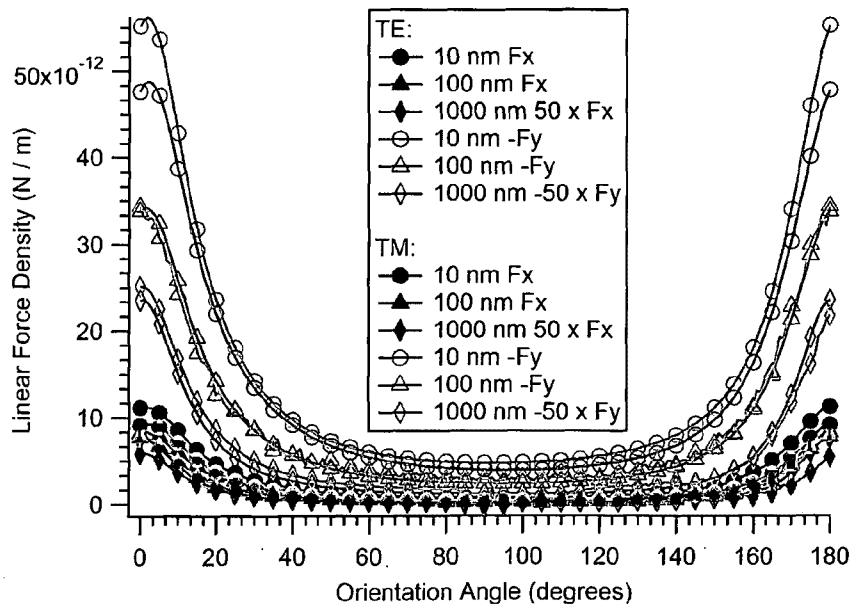


FIGURE 11

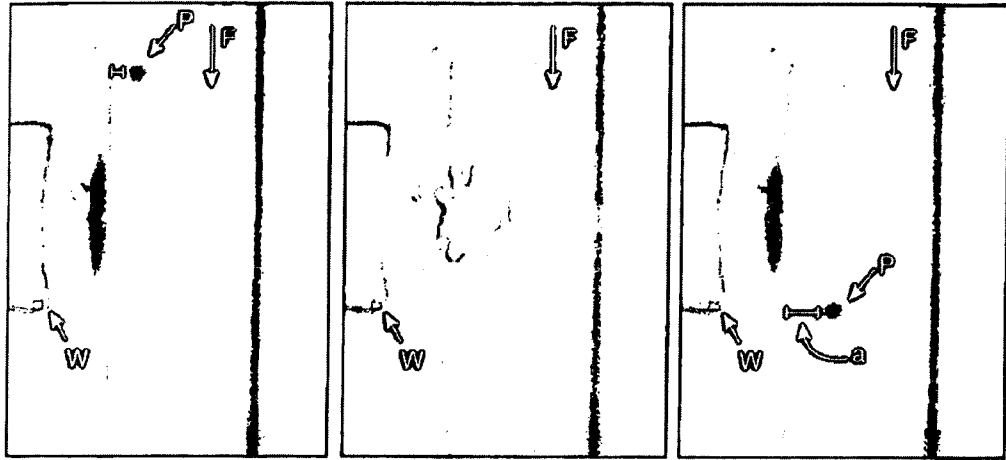


FIGURE 12A FIGURE 12B FIGURE 12C

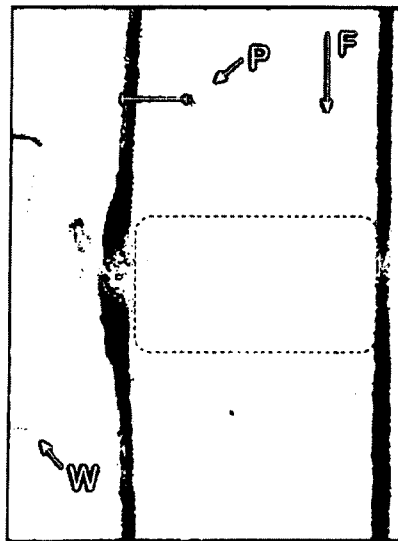


FIGURE 13A

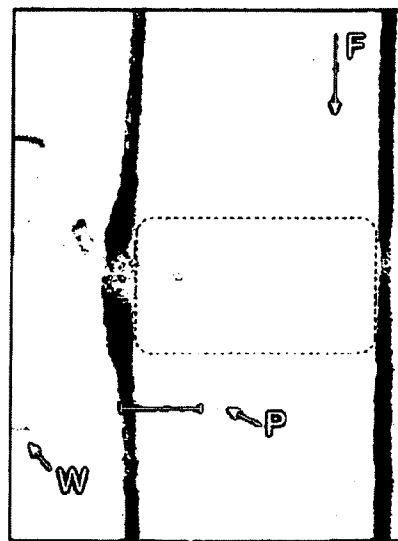


FIGURE 13B

10/10

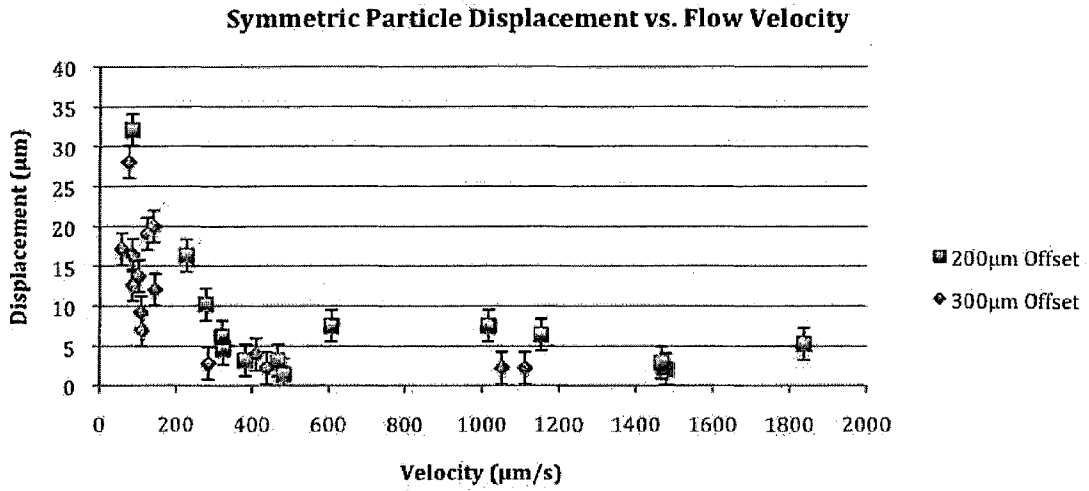


FIGURE 14A

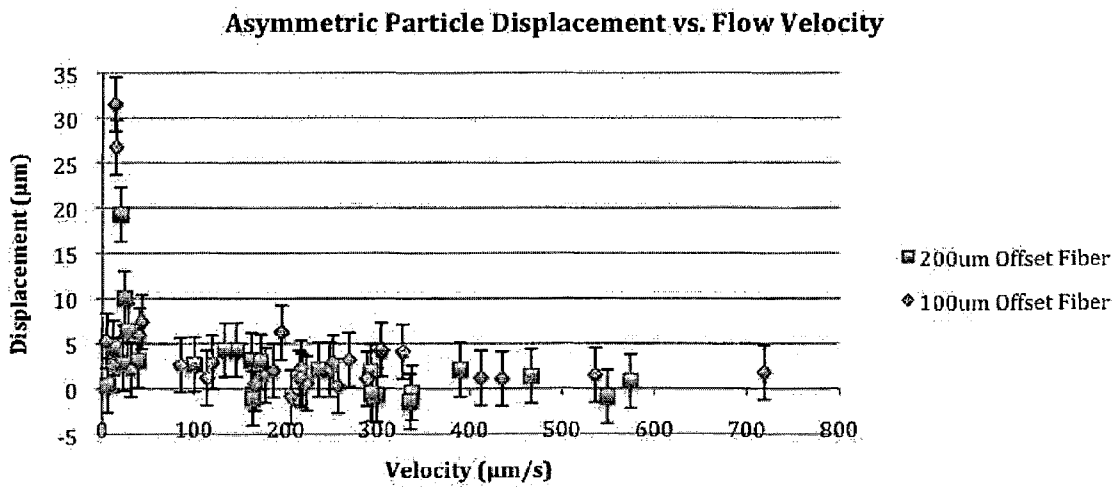


FIGURE 14B

