

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/105474 A1

(43) International Publication Date

3 July 2014 (03.07.2014)

WIPO | PCT

(51) International Patent Classification:

A62B 18/02 (2006.01) A62B 9/00 (2006.01)
A62B 18/08 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/US2013/075315

(22) International Filing Date:

16 December 2013 (16.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/727,923 27 December 2012 (27.12.2012) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).


(72) Inventor: DUFFY, Dean R.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: HANSON, Karl G., et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

Published:

— with international search report (Art. 21(3))

(54) Title: FILTERING FACE-PIECE RESPIRATOR HAVING FOLDED FLANGE

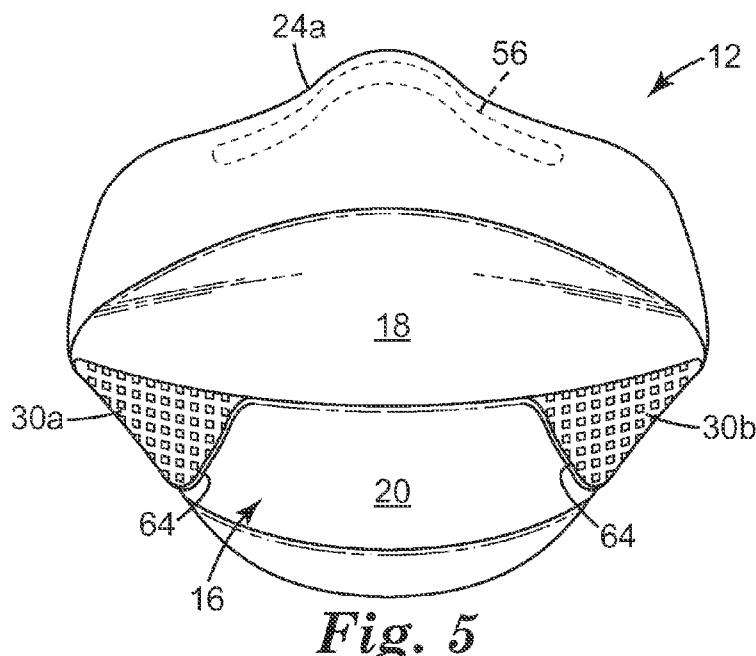

(57) Abstract: A filtering facepiece respirator 10 that includes a harness 14 and a mask body 12 that has a filtering structure 16 that contains one or more layers of filter media 62 and that has a perimeter 24. The mask body also has first and second flanges 30a, 30b located on opposing sides of the filtering structure 16. The first and second flanges 30a, 30b each have a leading edge 33 and are each folded inwardly in contact with the filtering structure 16. The in-contact configuration exists when the mask body 12 is open in an in-use configuration. The leading edge 33 of each flange 30a, 30b is configured to match the mask body perimeter 24 when the flanges 30a, 30b are folded inwardly in contact with the filtering structure 16.

WO 2014/105474 A1

FILTERING FACE-PIECE RESPIRATOR HAVING FOLDED FLANGE

[0001] The present invention pertains to a filtering face-piece respirator that has a folded external flange, which flange has a leading edge that matches a perimeter segment of the mask body.

BACKGROUND

[0002] Respirators are commonly worn over a person's breathing passages for at least one of two common purposes: (1) to prevent impurities or contaminants from entering the wearer's respiratory system; and (2) to protect other persons or things from being exposed to pathogens and other contaminants exhaled by the wearer. In the first situation, the respirator is worn in an environment where the air contains particles that are harmful to the wearer, for example, in an auto body shop. In the second situation, the respirator is worn in an environment where there is risk of contamination to other persons or things, for example, in an operating room or clean room.

[0003] A variety of respirators have been designed to meet either (or both) of these purposes. Some respirators have been categorized as being "filtering face-pieces" because the mask body itself functions as the filtering mechanism. Unlike respirators that use rubber or elastomeric mask bodies in conjunction with attachable filter cartridges (see, e.g., U.S. Patent RE39,493 to Yuschak et al.) or insert-molded filter elements (see, e.g., U.S. Patent 4,790,306 to Braun), filtering face-piece respirators are designed to have the filter media cover much of the whole mask body so that there is no need for installing or replacing a filter cartridge. These filtering face-piece respirators commonly come in one of two configurations: molded respirators and flat-fold respirators.

[0004] Molded filtering face piece respirators have regularly comprised non-woven webs of thermally-bonding fibers or open-work plastic meshes to furnish the mask body with its cup-shaped configuration. Molded respirators tend to maintain the same shape during both use and storage. These respirators therefore cannot be folded flat for storage and shipping. Examples of patents that disclose molded, filtering, face-piece respirators include U.S. Patents 7,131,442 to Kronzer et al, 6,923,182, 6,041,782 to Angadjivand et al., 4,807,619 to Dyrud et al., and 4,536,440 to Berg.

[0005] Flat-fold respirators — as their name implies — can be folded flat for shipping and storage. They also can be opened into a cup-shaped configuration for use. Examples of flat-fold respirators are shown in U.S. Patents 6,568,392 and 6,484,722 to Bostock et al., and 6,394,090 to Chen.

[0006] Although flat-fold respirators are convenient in that they can be folded flat for shipping and storage, these respirators tend to have more difficulty in maintaining their cup-shaped configuration during use. Flat-fold respirators have been designed, therefore, with weld lines, seams, and folds, to help maintain their cup-shaped configuration during use. Stiffening members also have been incorporated into panels of the mask body (see U.S. Patent Application Publications 2001/0067700 to Duffy et al., 2010/0154805 to Duffy et al., and U.S. Design Patent 659,821 to Spoo et al.). Flat-fold respirators need to be carefully unfolded so that they fit properly during use. The present invention, as described below, provides yet another method of improving the structural integrity of a non-molded, filtering, face mask

during use, and also provides a respiratory mask that has a clean appearance and that is easily placed into its in-use configuration.

SUMMARY OF THE INVENTION

[0007] The present invention provides a new filtering facepiece respirator that comprises a mask body and a harness. The mask body comprises a filtering structure that contains one or more filter media layers and that has a perimeter. The mask body also has first and second flanges located on first and second opposing sides thereof. The first and second flanges each have a leading edge, and each flange is folded inwardly in contact with the mask body filtering structure. This contact occurs when the mask body is in an in-use configuration. The leading edge of each flange is configured to match the mask body perimeter when the flanges are folded inwardly in contact with the filtering structure.

[0008] The present invention is different from known filtering face piece respirators in that the flanges located on opposing sides of the mask body are folded inwardly to contact the filtering structure such that the leading edge of the folded flange matches the perimeter of the filtering structure. The folding of the flanges inwardly allows a mask body to be created which has extraordinary structural integrity. The mask body exhibits great resistance to collapse, and therefore it can maintain its intended configuration for extended time periods, despite excessive exposure to moist, warm air. The matching of the leading edge of the flange to the mask body perimeter enables a clean finish to be achieved on the resulting respirator, which finish is aesthetically pleasing. The close proximity between the flange and mask body also reduces opportunities for the mask body to strike other objects when in use. Finally, the folded flanges provide the mask body with a structure that approximates a molded mask body. As such, the inventive respirator is easy for the wearer to don. And when a curved or radiusd perimeter is provided where the upper portion of the mask body meets the lower portion, a smooth face-fitting curvature is provided around the whole mask body perimeter.

Glossary

[0009] The terms set forth below will have the meanings as defined:

[0010] "comprises (or comprising)" means its definition as is standard in patent terminology, being an open-ended term that is generally synonymous with "includes", "having", or "containing". Although "comprises", "includes", "having", and "containing" and variations thereof are commonly-used, open-ended terms, this invention also may be suitably described using narrower terms such as "consists essentially of", which is semi open-ended term in that it excludes only those things or elements that would have a deleterious effect on the performance of the inventive respirator in serving its intended function;

[0011] "clean air" means a volume of atmospheric ambient air that has been filtered to remove contaminants;

[0012] "contaminants" means particles (including dusts, mists, and fumes) and/or other substances that generally may not be considered to be particles (e.g., organic vapors, et cetera) but which may be suspended in air;

[0013] "crosswise dimension" is the dimension that extends laterally across the respirator, from side-to-side when the respirator is viewed from the front;

[0014] "cup-shaped configuration" means any vessel-type shape that is capable of adequately covering the nose and mouth of a person;

[0015] "exterior gas space" means the ambient atmospheric gas space into which exhaled gas enters after passing through and beyond the mask body and/or exhalation valve;

[0016] "filtering face-piece" means that the mask body itself is designed to filter air that passes through it; there are no separately identifiable filter cartridges or insert-molded filter elements attached to or molded into the mask body to achieve this purpose;

[0017] "filter" or "filtration layer" means one or more layers of air-permeable material, which layer(s) is adapted for the primary purpose of removing contaminants (such as particles) from an air stream that passes through it;

[0018] "filter media" means an air-permeable structure that is designed to remove contaminants from air that passes through it;

[0019] "filtering structure" means a generally air-permeable construction that filters air;

[0020] "first side" means an area of the mask body that is located on one side of a plane that bisects the mask body normal to the cross-wise dimension;

[0021] "flange" means a protruding part that imparts structural integrity or strength to the body from which it protrudes;

[0022] "folded inwardly" means being bent back towards the part from which extends;

[0023] "frontally" means extending away from the mask body perimeter;

[0024] "harness" means a structure or combination of parts that assists in supporting the mask body on a wearer's face;

[0025] "integral" means being manufactured together at the same time; that is, being made together as one part and not two separately manufactured parts that are subsequently joined together;

[0026] "interior gas space" means the space between a mask body and a person's face;

[0027] "leading edge" means an unattached edge;

[0028] "line of demarcation" means a fold, seam, weld line, bond line, stitch line, hinge line, and/or any combination thereof;

[0029] "major portion" means the cup-shaped portion of the mask body;

[0030] "mask body" means an air-permeable structure that is designed to fit over the nose and mouth of a person and that helps define an interior gas space separated from an exterior gas space (including the seams and bonds that join layers and parts thereof together);

[0031] "match" means to substantially follow a similar path as;

[0032] "nose clip" means a mechanical device (other than a nose foam), which device is adapted for use on a mask body to improve the seal at least around a wearer's nose;

[0033] "perimeter" means the outer edge of the mask body, which outer edge would be disposed generally proximate to a wearer's face when the respirator is being donned by a person;

[0034] "pleat" means a portion that is designed to be or is folded back upon itself;

[0035] "polymeric" and "plastic" each mean a material that mainly includes one or more polymers and that may contain other ingredients as well;

[0036] "plurality" means two or more;

[0037] "respirator" means an air filtration device that is worn by a person to provide the wearer with clean air to breathe;

[0038] "second side" means an area of the mask body that is located on one side of a plane that bisects the mask body normal to the cross-wise dimension (the second side being opposite the first side);

[0039] "snug fit" or "fit snugly" means that an essentially air-tight (or substantially leak-free) fit is provided (between the mask body and the wearer's face);

[0040] "tab" means a part that exhibits sufficient surface area for attachment of another component; and

[0041] "transversely extending" means extending generally in the crosswise dimension.

BRIEF DESCRIPTION OF THE DRAWINGS

[0042] FIG. 1 is a front perspective view of a flat-fold filtering face-piece respirator **10**, in accordance with the present invention, being worn on a person's face;

[0043] FIG. 2 is a bottom view of the respirator **10** shown in FIG. 1 in a pre-opened configuration;

[0044] FIG. 3 is a cross-sectional view of the mask body **12** taken along lines 3-3 of FIG. 2;

[0045] FIG. 4 is a cross-sectional view of the filtering structure **16** taken along lines 4-4 of FIG. 3;

[0046] FIG. 5 is a front view of the mask body **12**, which may be used in connection with the present invention;

[0047] FIG. 6 is a left side view of the respirator **10** in accordance with the present invention; and

[0048] FIG. 7 is a bottom view of a mask body blank **67**.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0049] In practicing the present invention, a filtering face-piece respirator is provided that has first and second flanges disposed on first and second opposing sides of the mask body, respectively. The first and second flanges have been discovered to be beneficial in providing improved structural integrity to the mask body to keep it in a spaced, cup-shaped configuration, away from the wearer's mouth during use. Flat-fold respirators are not molded into a permanent face-fitting shape, and therefore they may have a tendency to lose their desired face-fitting configuration after being worn for extended time periods. The wearer, for example, may inadvertently cause the mask body to bump into external objects during use. The moisture in the warm, exhaled air, and in the surrounding environment, may contribute to loss of mask rigidity, which may allow the mask body interior to contact the wearer's face. The provision of first and second flanges, which are folded inwardly to contact the major portion of the mask body, assist in

maintaining the desired off-the-face, cup-shaped face configuration. The flanges also have a leading edge that is configured to match the mask body perimeter, at least along a portion thereof when the flange is folded in contact with the major portion of the mask body. This matching of a leading edge of the curved flange to a curved perimeter provides a clean look that improves aesthetics and also makes a more rounded face-fitting perimeter, which can be more comfortable to the wearer.

[0050] FIG. 1 shows an example of a filtering face-piece respirator **10** that may be used in connection with the present invention to provide clean air for the wearer to breathe. The filtering face-piece respirator **10** includes a mask body **12** and a harness **14**. The mask body **12** has a filtering structure **16** through which inhaled air must pass before entering the wearer's respiratory system. The filtering structure **16** removes contaminants from the ambient environment so that the wearer breathes clean air. The mask body **12** includes a top portion **18** and a bottom portion **20**. The top portion **18** and the bottom portion **20** are separated by a line of demarcation **22**. In this particular embodiment, the line of demarcation **22** is a fold or pleat that extends transversely across the central portion of the mask body from side-to-side. The mask body **12** also includes a perimeter **24** that includes an upper segment **24a** and a lower segment **24b**. The harness **14** has a first, upper strap **26** that is secured to the top portion **18** of mask body **12** by a staple **29** adjacent to the perimeter **24a**. The harness **14** also has a second, lower strap **27** that is secured by a staple **29** to a flange **30a**.

[0051] FIG. 2 shows that the respirator **10** has first and second flanges **30a** and **30b** located on opposing sides **31a** and **31b**, respectively, of the mask body **12**. A plane **32** bisects the mask body **12** to define the first and second sides **31a**, **31b**. The second strap **27** is stapled to each flange **30a**, **30b**. The flanges **30a** and **30b** are folded inwardly towards the filtering structure **16** in contact therewith. The flanges **30a** and **30b** each have a leading edge **33** that matches the mask body perimeter lower segment **24b** within bracketed area **34**. Each flange typically occupies a surface area of about 1 to 15 square centimeters, more typically about 2 to 12 square centimeters, and still more typically about 5 to 10 square centimeters. An integral flange can have welds or bonds **35** provided thereon to increase flange stiffness. Alternatively, an adhesive layer may be used to increase flange stiffness. The flanges may have a flexural modulus of at least 10 Mega Pascals (MPa), more typically at least 20 MPa when bent along a major surface of the flange. At the upper end, the flexural modulus is typically less than 100 MPa, more typically less than 60 MPa. The flanges **30a**, **30b** also typically extend away from a demarcation line **36a**, **36b** on the mask body **12** at least 2 millimeters (mm), more typically at least 5 mm, and still more typically at least 1 to 2 centimeters (cm). The flanges **30a**, **30b** may be integrally or non-integrally connected to the major portion of the mask body **12** and may comprise one or more or all of the various layers that comprise the mask body filtering structure **16**. Unlike the filtering structure **16**, the layers that comprise the flanges **30a**, **30b** may be compressed, rendering them nearly fluid impermeable. The flanges **30a**, **30b** may be an extension of the material used to make the mask body filtering structure **16**, or they may be made from a separate material such as a rigid or semi-rigid plastic. The flanges also may extend inwardly from the mask body perimeter **24** within the bracketed area **37**. The mask body

perimeter segment **24b** also may have a series of bonds or welds **35** to join the various layers of the mask body **12** together. This perimeter segment **24b** therefore may not be very fluid permeable. Perimeter segment **24a** (FIGs. 1, 3 and 5) also may have a series of bonds or welds to join the various layers together and also to maintain the position of a nose clip. The remainder of the filtering structure **16** – inwardly from the perimeter – may be fully fluid permeable over much of its extended surface, with the possible exception of areas where there are bonds, welds, or fold lines. The mask body **12** also includes first and second lines of demarcation **36a**, **36b** located on first and second sides of the mask body **12**. The first and second flanges **30a**, **30b** are joined to the mask body **12** at the first and second lines of demarcation **36a**, **36b** and may be rotated or folded about an axis generally parallel to these demarcation lines, respectively. The leading edge **33** begins in a location where the lines of demarcation **36a**, **36b** meet the perimeter **24**. The leading edge **33** matches the perimeter **24** moving in a direction towards the plane **32** that bisects the mask body **12**. The leading edge **33** substantially matches the perimeter **24** for approximately 10 to 50% of its total length. The first and second lines of demarcation **36a**, **36b** are offset at an angle α from a plane **32** that extends perpendicular to the perimeter **24** of the mask body **12** when viewing the mask body from a top or bottom view in a folded condition. The angle α may be from zero to about 60 degrees, more typically about 30 to 45 degrees. The bottom portion **20** may include one or more pleat lines that extend from the first line of demarcation **36a** to the second line of demarcation **36b** transversely.

[0052] FIG. 3 illustrates an example of a pleated configuration of a mask body **12** in accordance with the present invention. As shown, the upper portion or panel **18** of the mask body **12** also may include pleats **22**, **38**, and **40**. The lower portion or panel **20** of the mask body **12** may include pleats **22**, **42**, **44**, **46**, **48**, **50**, and **52**. Pleat **22** separates the upper and lower portions **18** and **20** of mask body **12**. The lower portion **20** of the mask body **12** may include the same or more filter media surface area than the upper portion **18**. The mask body **12** may include a perimeter web **54** that is secured to the mask body along its perimeter. The perimeter web **54** may be folded over the mask body at the perimeter segments **24a**, **24b**. The perimeter web **54** may also be an extension of the inner cover web **58** folded and secured around the edge of perimeter segments **24a** and **24b**. A nose clip **56** may be disposed on the upper portion **18** of the mask body centrally adjacent to the perimeter between the filtering structure **16** and the perimeter web **54**. The nose clip **56** may be made from a pliable metal or plastic that is capable of being manually adapted by the wearer to fit the contour of the wearer's nose.

[0053] FIG. 4 shows that the filtering structure **16** may include one or more layers such as an inner cover web **58**, an outer cover web **60**, and a filtration layer **62**. The inner and outer cover webs **58** and **60** may be provided to protect the filtration layer **62** and to preclude fibers from the filtration layer **62** from coming loose and entering the mask interior. During respirator use, air passes sequentially through layers **60**, **62**, and **58** before entering the mask interior. The air that is disposed within the interior gas space of the mask body may then be inhaled by the wearer. When a wearer exhales, the air passes in the opposite direction sequentially through layers **58**, **62**, and **60**. Alternatively, an exhalation valve (not shown) may

be provided on the mask body to allow exhaled air to be rapidly purged from the interior gas space to enter the exterior gas space without passing through filtering structure **16**. Typically, the cover webs **58** and **60** are made from a selection of nonwoven materials that provide a comfortable feel, particularly on the side of the filtering structure that makes contact with the wearer's face. The construction of various filter layers and cover webs that may be used in conjunction with the support structure of the present invention are described below in more detail. The filtering structure also may have a structural netting or mesh juxtaposed against at least one or more of the layers **58**, **60**, or **62**, typically against the outer surface of the outer cover web **60**. The use of such a mesh is described in U.S. Patent Application Publication No. 2010/0154806A1. To improve wearer fit and comfort, an elastomeric face seal can be secured to the perimeter of the filtering structure **16**. Such a face seal may extend radially inward to contact the wearer's face when the respirator is being donned. Examples of face seals are described in U.S. Patents 6,568,392 to Bostock et al., 5,617,849 to Springett et al., and 4,600,002 to Maryyanek et al., and in Canadian Patent 1,296,487 to Yard. The mask body perimeter **24** also may be folded upon itself in the nose region to achieve a snug fit — see U.S. Patent Application Publication 2011/0315144A1.

[0054] FIG. 5 shows the mask body **12** in an in-use configuration. During use, the flanges **30a**, **30b** are disposed in contact with the first and second sides of the mask body **12**. The flanges **30a**, **30b** may be folded inward towards the mask body. If desired, the mask body **12** and/or the contacting side of the flanges **30a**, **30b** may have a securing means that enables each flange **30a**, **30b** to be secured to the mask body **12** on an inner major surface **64** (FIG. 3) of the flange. Such a securing means may include an adhesive, a hook-and-loop type fastener, a staple **29** (FIG. 1) that secures the strap **26**, or any other suitable chemical, physical, or mechanical type fastener. When the flange is physically secured in permanent fashion to the major portion of the mask body **12**, the respirator **10** behaves as a molded respirator rather than a flat-fold respirator. That is, the respirator takes on a rather permanent cup-shaped configuration capable of expansion as the pleats become unfolded during use. Thus, a respirator of the invention, having the flanges **30a**, **30b**, secured to the mask body is, in a sense, a hybrid between a molded respirator and a flat-fold respirator.

[0055] FIG. 6 too shows the flange **30a** folded downwardly in contact with the bottom portion **20** of the filtering structure **16** of mask body **12**. The flange extension along line **36a** and its in-contact placement with the bottom portion **20** of the filtering structure **16** contribute to the illustrated cup-shaped configuration. The mask body **12** can maintain this desired shape during many hours of use in a moist environment without risk of collapse. As shown, the leading edge **33** of flange **30a** matches the contour of the perimeter segment **24b** in segment **66**. Typically, the leading edge **33** will match the mask body perimeter **24** over a distance of at least 1 centimeter, more typically over a distance of at least 2 cm, and up to about 3 to 4 or centimeters.

The Filtering Structure

[0056] The filtering structure that is used in connection with the present invention may take on a variety of different shapes and configurations. The filtering structure typically is adapted so that it

properly fits against or within the support structure. Generally the shape and configuration of the filtering structure corresponds to the general shape of the mask body. Although a filtering structure has been illustrated with multiple layers that include a filtration layer and two cover webs, the filtering structure may simply comprise a filtration layer or a combination of filtration layers. For example, a pre-filter may be disposed upstream to a more refined and selective downstream filtration layer. Additionally, sorptive materials such as activated carbon may be disposed between the fibers and/or various layers that comprise the filtering structure. Further, separate particulate filtration layers may be used in conjunction with sorptive layers to provide filtration for both particulates and vapors. The filtering structure may include one or more stiffening layers that assist in providing a cup-shaped configuration. The filtering structure also could have one or more horizontal and/or vertical lines of demarcation that contribute to its structural integrity. The first and second flanges when used in accordance with the present invention, however, may make unnecessary the need for such stiffening layers and lines of demarcation.

[0057] The filtering structure that is used in a mask body of the invention can be of a particle capture or gas and vapor type filter. The filtering structure also may be a barrier layer that prevents the transfer of liquid from one side of the filter layer to another to prevent, for instance, liquid aerosols or liquid splashes (e.g. blood) from penetrating the filter layer. Multiple layers of similar or dissimilar filter media may be used to construct the filtering structure of the invention as the application requires. Filters that may be beneficially employed in a layered mask body of the invention are generally low in pressure drop (for example, less than about 195 to 295 Pascals at a face velocity of 13.8 centimeters per second) to minimize the breathing work of the mask wearer. Filtration layers additionally may be flexible and may have sufficient shear strength so that they generally retain their structure under the expected use conditions. Examples of particle capture filters include one or more webs of fine inorganic fibers (such as fiberglass) or polymeric synthetic fibers. Synthetic fiber webs may include electret-charged, polymeric microfibers that are produced from processes such as meltblowing. Polyolefin microfibers formed from polypropylene that has been electrically-charged provide particular utility for particulate capture applications. An alternate filter layer may comprise a sorbent component for removing hazardous or odorous gases from the breathing air. Sorbents may include powders or granules that are bound in a filter layer by adhesives, binders, or fibrous structures — see U.S. Patents 6,334,671 to Springett et al. and 3,971,373 to Braun. A sorbent layer can be formed by coating a substrate, such as fibrous or reticulated foam, to form a thin coherent layer. Sorbent materials may include activated carbons that are chemically treated or not, porous alumina-silica catalyst substrates, and alumina particles. An example of a sorptive filtration structure that may be conformed into various configurations is described in U.S. Patent 6,391,429 to Senkus et al.

[0058] The filtration layer is typically chosen to achieve a desired filtering effect. The filtration layer generally will remove a high percentage of particles and/or other contaminants from the gaseous stream that passes through it. For fibrous filter layers, the fibers selected depend upon the kind of substance to be filtered and, typically, are chosen so that they do not become bonded together during the molding operation. As indicated, the filtration layer may come in a variety of shapes and forms and

typically has a thickness of about 0.2 millimeters (mm) to 1 centimeter (cm), more typically about 0.3 mm to 0.5 cm, and it could be a generally planar web or it could be corrugated to provide an expanded surface area — see, for example, U.S. Patents 5,804,295 and 5,656,368 to Braun et al. The filtration layer also may include multiple filtration layers joined together by an adhesive or any other means. Essentially any suitable material that is known (or later developed) for forming a filtering layer may be used as the filtering material. Webs of melt-blown fibers, such as those taught in Wente, Van A., *Superfine Thermoplastic Fibers*, 48 Indus. Engn. Chem., 1342 et seq. (1956), especially when in a persistent electrically charged (electret) form are especially useful (see, for example, U.S. Pat. No. 4,215,682 to Kubik et al.). These melt-blown fibers may be microfibers that have an effective fiber diameter less than about 20 micrometers (μm) (referred to as BMF for "blown microfiber"), typically about 1 to 12 μm . Effective fiber diameter may be determined according to Davies, C. N., *The Separation Of Airborne Dust Particles*, Institution Of Mechanical Engineers, London, Proceedings 1B, 1952. Particularly preferred are BMF webs that contain fibers formed from polypropylene, poly(4-methyl-1-pentene), and combinations thereof. Electrically charged fibrillated-film fibers as taught in van Turnhout, U.S. Patent Re. 31,285, also may be suitable, as well as rosin-wool fibrous webs and webs of glass fibers or solution-blown, or electrostatically sprayed fibers, especially in microfilm form. Electric charge can be imparted to the fibers by contacting the fibers with water as disclosed in U.S. Patents 6,824,718 to Eitzman et al., 6,783,574 to Angadjivand et al., 6,743,464 to Insley et al., 6,454,986 and 6,406,657 to Eitzman et al., and 6,375,886 and 5,496,507 to Angadjivand et al. Electric charge also may be imparted to the fibers by corona charging as disclosed in U.S. Patent 4,588,537 to Klasse et al. or by tribocharging as disclosed in U.S. Patent 4,798,850 to Brown. Also, additives can be included in the fibers to enhance the filtration performance of webs produced through the hydro-charging process (see U.S. Patent 5,908,598 to Rousseau et al.). Fluorine atoms, in particular, can be disposed at the surface of the fibers in the filter layer to improve filtration performance in an oily mist environment — see U.S. Patents 6,398,847 B1, 6,397,458 B1, and 6,409,806 B1 to Jones et al. Typical basis weights for electret BMF filtration layers are about 10 to 100 grams per square meter. When electrically charged according to techniques described in, for example, the '507 Angadjivand et al. patent, and when including fluorine atoms as mentioned in the Jones et al. patents, the basis weight may be about 20 to 40 g/m^2 and about 10 to 30 g/m^2 , respectively.

[0059] An inner cover web can be used to provide a smooth surface for contacting the wearer's face, and an outer cover web can be used to entrap loose fibers in the mask body or for aesthetic reasons. The cover web typically does not provide any substantial filtering benefits to the filtering structure, although it can act as a pre-filter when disposed on the exterior (or upstream to) the filtration layer. To obtain a suitable degree of comfort, an inner cover web preferably has a comparatively low basis weight and is formed from comparatively fine fibers. More particularly, the cover web may be fashioned to have a basis weight of about 5 to 50 g/m^2 (typically 10 to 30 g/m^2), and the fibers may be less than 3.5 denier (typically less than 2 denier, and more typically less than 1 denier but greater than 0.1). Fibers used in the cover web often have an average fiber diameter of about 5 to 24 micrometers, typically of about 7 to 18 micrometers, and more typically of about 8 to 12 micrometers. The cover web material may have a

degree of elasticity (typically, but not necessarily, 100 to 200% at break) and may be plastically deformable.

[0060] Suitable materials for the cover web may be blown microfiber (BMF) materials, particularly polyolefin BMF materials, for example polypropylene BMF materials (including polypropylene blends and also blends of polypropylene and polyethylene). A suitable process for producing BMF materials for a cover web is described in U.S. Patent 4,013,816 to Sabee et al. The web may be formed by collecting the fibers on a smooth surface, typically a smooth-surfaced drum or a rotating collector — see U.S. Patent 6,492,286 to Berrigan et al. Spun-bond fibers also may be used.

[0061] A typical cover web may be made from polypropylene or a polypropylene/polyolefin blend that contains 50 weight percent or more polypropylene. These materials have been found to offer high degrees of softness and comfort to the wearer and also, when the filter material is a polypropylene BMF material, to remain secured to the filter material without requiring an adhesive between the layers. Polyolefin materials that are suitable for use in a cover web may include, for example, a single polypropylene, blends of two polypropylenes, and blends of polypropylene and polyethylene, blends of polypropylene and poly(4-methyl-1-pentene), and/or blends of polypropylene and polybutylene. One example of a fiber for the cover web is a polypropylene BMF made from the polypropylene resin "Escorene 3505G" from Exxon Corporation, providing a basis weight of about 25 g/m² and having a fiber denier in the range 0.2 to 3.1 (with an average, measured over 100 fibers of about 0.8). Another suitable fiber is a polypropylene/polyethylene BMF (produced from a mixture comprising 85 percent of the resin "Escorene 3505G" and 15 percent of the ethylene/alpha-olefin copolymer "Exact 4023" also from Exxon Corporation) providing a basis weight of about 25 g/m² and having an average fiber denier of about 0.8. Suitable spunbond materials are available, under the trade designations "Corosoft Plus 20", "Corosoft Classic 20" and "Corovin PP-S-14", from Corovin GmbH of Peine, Germany, and a carded polypropylene/viscose material available, under the trade designation "370/15", from J.W. Suominen OY of Nakila, Finland.

[0062] Cover webs that are used in the invention preferably have very few fibers protruding from the web surface after processing and therefore have a smooth outer surface. Examples of cover webs that may be used in the present invention are disclosed, for example, in U.S. Patent 6,041,782 to Angadjivand, U.S. Patent 6,123,077 to Bostock et al., and WO 96/28216A to Bostock et al.

Respirator Components

[0063] The strap(s) that are used in the harness may be made from a variety of materials, such as thermoset rubbers, thermoplastic elastomers, braided or knitted yarn/rubber combinations, inelastic braided components, and the like. The strap(s) may be made from an elastic material such as an elastic braided material. The strap preferably can be expanded to greater than twice its total length and be returned to its relaxed state. The strap also could possibly be increased to three or four times its relaxed state length and can be returned to its original condition without any damage thereto when the tensile forces are removed. The elastic limit thus is preferably not less than two, three, or four times the length

of the strap when in its relaxed state. Typically, the strap(s) are about 20 to 30 cm long, 3 to 10 mm wide, and about 0.9 to 1.5 mm thick. The strap(s) may extend from the first tab to the second tab as a continuous strap or the strap may have a plurality of parts, which can be joined together by further fasteners or buckles. For example, the strap may have first and second parts that are joined together by a fastener that can be quickly uncoupled by the wearer when removing the mask body from the face. Alternatively, the strap may form a loop that is placed around the wearer's ears — see e.g., U.S. Patent 6,394,090 to Chen et al. An example of a strap that may be used in connection with the present invention is shown in U.S. Patent 6,332,465 to Xue et al. Examples of fastening or clasping mechanism that may be used to joint one or more parts of the strap together is shown, for example, in the following U.S. Patents 6,062,221 to Brostrom et al., 5,237,986 to Seppala, and EP1,495,785A1 to Chien. The harness also may be in the form of a reusable carriage or an adhesive layer that is provided on the internal surface of the perimeter.

[0064] As indicated, an exhalation valve may be attached to the mask body to facilitate purging exhaled air from the interior gas space. The use of an exhalation valve may improve wearer comfort by rapidly removing the warm moist exhaled air from the mask interior. See, for example, U.S. Patents 7,188,622, 7,028,689, and 7,013,895 to Martin et al.; 7,428,903, 7,311,104, 7,117,868, 6,854,463, 6,843,248, and 5,325,892 to Japuntich et al.; 6,883,518 to Mittelstadt et al.; and RE37,974 to Bowers. Essentially any exhalation valve that provides a suitable pressure drop and that can be properly secured to the mask body may be used in connection with the present invention to rapidly deliver exhaled air from the interior gas space to the exterior gas space.

[0065] A nose clip that is used in the present invention may be essentially any additional part that assists in improving the fit over the wearer's nose. Because the wearer's face exhibits in the nose region, a nose clip may be used to better assist in achieving the appropriate fit in this location. The nose clip may comprise, for example, a pliable dead soft band of metal such as aluminum, which can be shaped to hold the mask in a desired fitting relationship over the nose of the wearer and where the nose meets the cheek. An example of a suitable nose clip is shown in U.S. Patent 5,558,089 and Des. 412,573 to Castiglione. Other nose clips are described in U.S. Patent Application 12/238,737 (filed September 26, 2008); U.S. Publications 2007-0044803A1 (filed August 25, 2005); and 2007-0068529A1 (filed September 27, 2005).

EXAMPLES

Mask Compression Toughness Test

[0066] A mask compression toughness test was used to determine the collapse resistance of a mask under a gradual crushing load. Testing was conducted with the perimeter of the mask body attached to an elliptical platform. The platform simulated a two-dimensional plane of a wearer's face when in contact with the perimeter of a donned respirator. With the mask mounted on the fixture, the assembly was aligned vertically in the compression testing apparatus. A compressive load was then gradually applied to the mask body through a plate, attached to a load cell, which was aligned parallel to the platform and along the center axis of the mask body. The plate was configured such that it over- extended the mask

body around its full perimeter so that full contact to the mask body was maintained throughout the compression cycle. The test apparatus used was a TA-XT plus Texture Analyzer available from Micro Systems, Scarsdale, New York. The elliptical mask mounting fixture had a major axis length of 140 mm and a minor axis length of 75 mm and a thickness of 3 mm. The mask body perimeter was fixed to the perimeter of the fixture. With the mask body fixed to the plate, the assembly was rigidly mounted into the test apparatus, and the compression cycle was initiated. The x-head speed of the compression plate was 5 mm per second, and the compression load was recorded in grams-force (g_f) from the point of contact with the mask body up to crush point of 25 mm. The crushing force was recorded at points over the full compression cycle, and the area under the curve represented by those points was calculated and given as the area under the force-displacement curve. This area value gives a perspective of crush resistance, or toughness, of the test mask and is given in units of mm- g_f .

EXAMPLE 1

Respirator Assembly

[0067] A respirator filtering structure was formed from three layers of nonwoven material and other respirator components. The inventive mask was assembled in two operations – preform making and mask finishing. The preform making stage included the steps of (a) lamination and fixing of nonwoven fibrous webs, (b) formation of pleat crease lines, and (c) assembly of perimeter web material and the nose clip. The mask finishing operation included folding of pleats along embossed crease lines, fusing both the lateral mask edges and reinforced flange material, cutting the final form, and attaching a headband.

[0068] In the preform making stage, three layers of nonwoven material were plied in face to face orientation. In the example, individual materials that formed the layers were assembled in the following order:

1. Outer netting/scrim
2. Filter material
3. Inner cover web

[0069] The outer cover web was a lamination of a Thermanet 5103 netting, (available from Conwed, Minneapolis, MN) that was bonded to a 17 grams/meter square (gms) Elite 050 scrim, from Leggett and Platt-Hanes Industries, Carthage, Missouri. The outer cover web (indicated as **60** in FIG. 4) was formed in a thermal bonding step that used heat and compression to melt-bond the strands of the netting onto the scrim. The outer cover web had a total thickness of 0.12 mm, with the scrim thickness being 0.10 mm. Filter material (indicated as **62** in FIG. 4) used in the preform was an electret-charged blown microfiber polypropylene web that had a basis weight of 35 gms, a solidity of 8%, and an effective fiber size of 4.75 micrometers. The inner cover web (**58**, FIG. 4) was a 17 gms spun-bonded polypropylene scrim, available from BBA Nonwovens, Charlotte, North Carolina. The preform was made by plying, in the desired order, layers of each material that was then cut into 20 cm by 33 cm sheets and ultrasonically welded together using a point-bonded pattern. Operating against an anvil with flat-top square pegs, having individual face areas of 1.6 square millimeters, arranged in a grid pattern with spacing of

approximately one-centimeter-on-center of the pegs, the flat-faced horn of the welder acted against the anvil at a contact pressure of approximately 6 MPa. With the layers of nonwoven fixed, crease lines that define pleat location were embossed on the fixed layers of nonwoven. Embossing of the crease lines was done using a die cutting machine, Hytronic Cutting Machine Model B, from USM Corporation, Haverhill, Massachusetts, at 15 tons of force and with a rule die. The die had nine bars with radius edges that traversed the preform length and when pressed into the preform created lines into the nonwoven layers. The embossed lines compressed the webs together at the point of contact and did not fuse or penetrate the material. As a final step in the preform making operation, bands of perimeter web, BBA Nonwovens, 51 gms spun-bonded polypropylene scrim, 4 cm wide and 36 cm long were wrapped around the top and bottom edges of the preform and ultrasonically welded into place. Operating against an anvil with a contact surface area of 4.1 cm², using the specified ram pressure and horn conditions, resulted in contact pressures of 8.5 MPa to bond the materials of the preform. The anvil area used to bond the perimeter web material was configured in flat-top square pegs, having individual face areas of 1.6 square millimeters that were arranged in a weld pattern 35 shown in FIG. 7. The flat-faced horn of the welder acted against an anvil, fixing the perimeter web to the preform. Using this process, a nose clip was attached to the top of the preform, and it was encapsulated between the preform and the perimeter web. The nose clip was a malleable, plastically-deformable aluminum strip (9 cm long by 0.5 cm wide by 1 mm thick) that had the shape shown in FIG. 1.

[0070] In the mask finishing operation, pleats were folded along crease lines as shown in FIG. 3. Pleats located above the central fold of the mask, were folded such that the exterior folds faced downwards with the mask open, this was done to help prevent accumulation of gross matter in the mask folds when worn. With the preform properly pleated and folded around the center fold, the preform was ultrasonically welded to fuse the lateral edges of the mask body (36a and 36b in FIG. 2) and to create the bonded layers of the stiffening flange (30a and 30b in FIG. 2). The contact area of the anvil for bonding the flange material was configured in flat-top square pegs, having individual face areas of 1.6 square millimeters that were spaced 1.27 millimeters apart from their flat sides, to create the bond pattern shown in FIG. 7. The anvil bars that formed the lateral edge bonds of the mask were 95.25 millimeters long and 9.525 millimeters wide. The flat-faced welder horn acted against the anvil resulting in the formation of a weld pattern bonded flange layers. Angled bar elements of the anvil sealed the lateral edges of the mask body and pin welding surfaces fused and stiffened the flange material. As a final step in the mask finishing operation, the stiffening flanges were cut to a desired shape from the mask body blank 67, as shown in FIG. 7. The cut line of the leading edge 33 of the flange on either side of the mask body, were configured such that when the flanges were folded back onto the body of the opened mask, the contour of the flanges and the mask perimeter segment 24a would align edge-to-edge. Additionally, segments 70 of the perimeter 24 had radiused cuts (30 to 50 mm radius) that provided a rounded finish to the perimeter 24 when the mask body is opened for use. The radiused cuts are provided along the perimeter segments 24a and 24b (FIG. 1) where the top portion 18 of mask body 12 meets the lower portion 20 at the lines of

demarcation **36a**, **36b**. The smooth radius curve improved facial contact when the mask was donned. The radiused cut also enabled the leading edge to match the perimeter along at least a substantial portion thereof. Flanges were cut along a contoured line from the front of the mask at **72** towards the back **74**, to define a leading edge **33** as indicated in FIG. 7. The contour portion of the cut edge of the flange, between points **76** and **78** had a radius of curvature of about 40 millimeters (mm). The flanges were 2 cm wide at their furthest extent as measured perpendicular to the weld line (**36a**, **36b**, FIG. 2) and 7 cm long, running the full length of the weld line **36b** and had a nominal thickness of 1.8 mm. Angle α was 38 degrees. The flanges were able to rotate on an axis parallel to the line of attachment to the mask body and provided a more rigid mask body when folded inwardly towards the mask body during use.

[0071] To demonstrate the improved crush toughness of the mask, constructed as described above, the mask body was tested using the *Mask Compression Toughness Test* in two conditions: first, with the support flanges free of the mask body, and second, with the support flanges fixed to the mask body. To simulate the mask with flanges fixed, as they would be in use (second condition) with staples, adhesive or welds, the flanges were stapled to the mask body in a location similar to that shown in FIG. 6.

Compression toughness of the mask with the flanges free of the mask body was determined to be 2302 mm-g_f, where the same mask having the flanges fixed to the mask body attained a compression toughness of 4675 mm-g_f, an improvement of 103%. This more than doubling of the compression toughness clearly demonstrates the benefits attained with a folded-flange mask of the invention.

[0072] This invention may take on various modifications and alterations without departing from its spirit and scope. Accordingly, this invention is not limited to the above-described but is to be controlled by the limitations set forth in the following claims and any equivalents thereof.

[0073] This invention also may be suitably practiced in the absence of any element not specifically disclosed herein.

[0074] All patents and patent applications cited above, including those in the Background section, are incorporated by reference into this document in total. To the extent there is a conflict or discrepancy between the disclosure in such incorporated document and the above specification, the above specification will control.

What is claimed is:

1. A filtering face-piece respirator that comprises:
 - (a) a harness; and
 - (b) a mask body that comprises a filtering structure that contains one or more layers of filter media and that has a perimeter and first and second opposing sides, the mask body also having first and second flanges located on the first and second opposing sides, the first and second flanges each having a leading edge and each being folded inwardly to contact the filtering structure when the mask body is in an in-use configuration, the leading edge of each flange being configured to match the mask body perimeter when the flanges are folded inwardly in contact with the filtering structure.
2. The filtering face piece respirator of claim 1, wherein the first and second flanges are secured to the first and second lateral portions.
3. The filtering face respirator of claim 2, wherein the flanges are secured to the lateral portions by an adhesive.
4. The filtering face piece respirator of claim 1, wherein the mask body has a line of demarcation where the first and second flanges meet a major portion of the mask body.
5. The filtering face-piece respirator of claim 4, wherein the mask body perimeter has a radiused curve on at least one side of the line of demarcation.
6. The filtering face-piece respirator of claim 5, wherein the mask body perimeter has a radiused curve on both sides of the line of demarcation.
7. The filtering face-piece respirator of claim 1, wherein the mask body includes first and second lines of demarcation located on first and second sides of the mask body, the first and second flanges being joined to the mask body at the first and second lines of demarcation and being rotatable about an axis generally parallel to the lines of demarcation lines, respectively.
8. The filtering face-piece respirator of claim 7, wherein the leading edge begins where the lines of demarcation meet the perimeter.
9. The filtering face-piece respirator of claim 8, wherein the leading edge substantially matches the perimeter over 10 to 50% of the total length of the leading edge.

10. The filtering face-piece respirator of claim 9, wherein both the top and bottom portions contain one or more pleats that extend from the first side to the second side of the mask body.

11. The filtering face-piece respirator of claim 9, wherein the leading edge matches the mask body perimeter over a distance of at least 1 centimeter, more typically over a distance of at least 2 cm, and up to about 3 to 4 or centimeters

12. The filtering face-piece respirator of claim 11, wherein the leading edge matches the mask body perimeter over a distance of at least 2 centimeters.

13. The filtering face-piece respirator of claim 12, wherein the leading edge matches the mask body perimeter over a distance up to about 4 centimeters

14. The filtering face-piece respirator of claim 13, wherein the leading edge matches the mask body perimeter over a distance up to about 3 centimeters.

15. A filtering facepiece respirator that comprises:

(a) a harness; and

(b) a mask body that comprises a filtering structure that contains one or more layers of filter media and that has a perimeter and first and second opposing sides, the mask body also having first and second flanges located on the first and second opposing sides, the first and second flanges each having a leading edge and each being folded inwardly to contact the filtering structure when the mask body is in an in-use configuration, the perimeter comprising an upper segment and a bottom segment and each segment being curved where the segments meet each other.

16. The filtering face piece respirator of claim 15, wherein the mask body has a line of demarcation where the first and second flanges meet a major portion of the mask body.

17. The filtering face-piece respirator of claim 16, wherein the upper and lower perimeter segments each are curved on each side of the line of demarcation.

18. The filtering face-piece respirator of claim 17, wherein the mask body perimeter has a radius cut on each side of the line of demarcation.

19. The filtering face-piece respirator of claim 18, wherein the mask body includes first and second lines of demarcation located on first and second sides of the mask body, the first and second flanges being joined to the mask body at the first and second lines of demarcation and being rotatable about an axis generally parallel to the lines of demarcation lines, respectively.

1/3

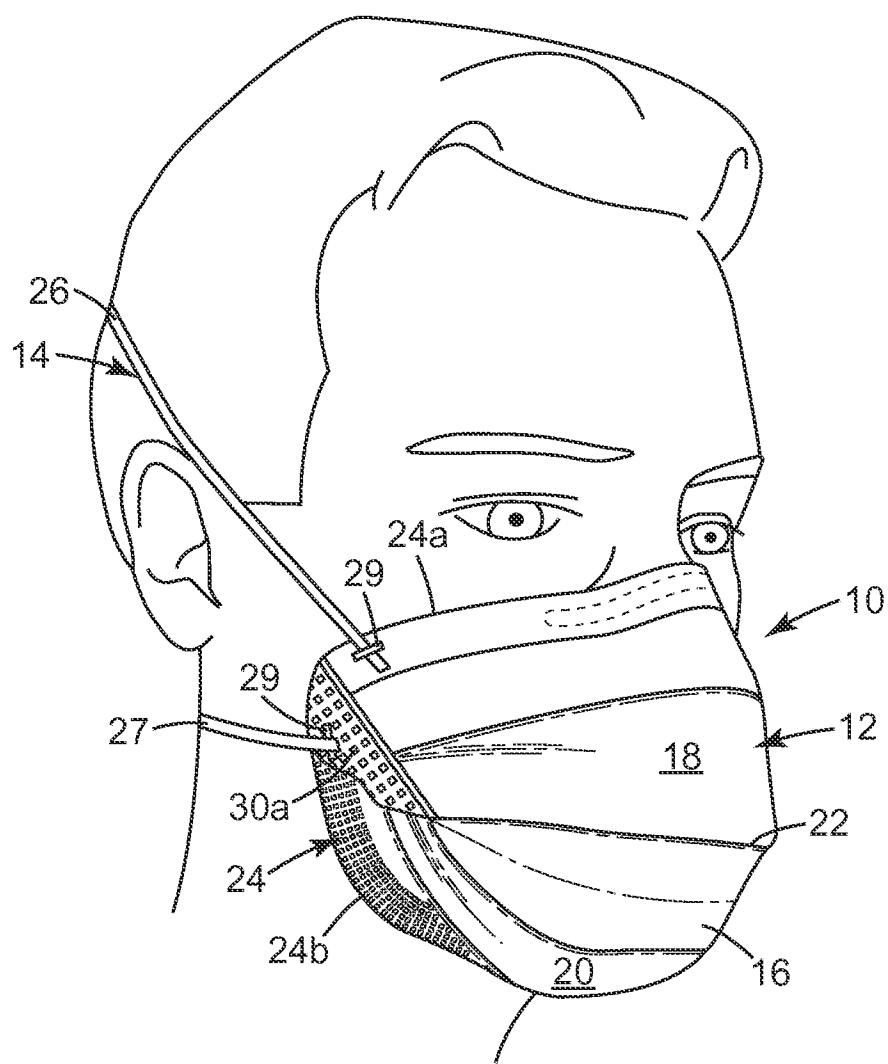


Fig. 1

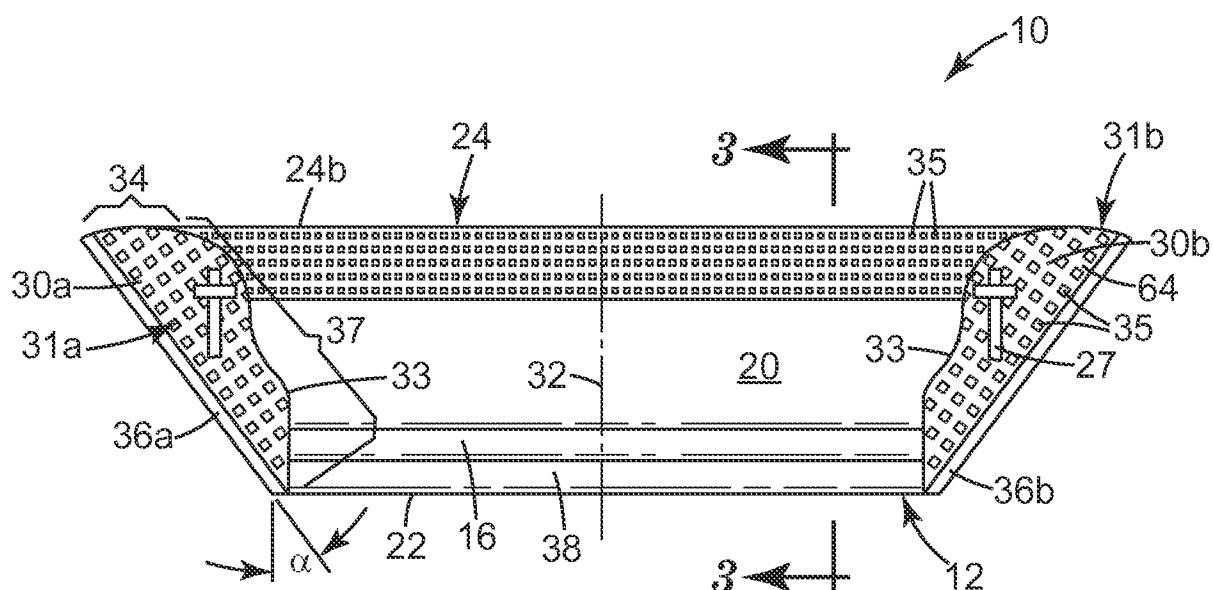


Fig. 2

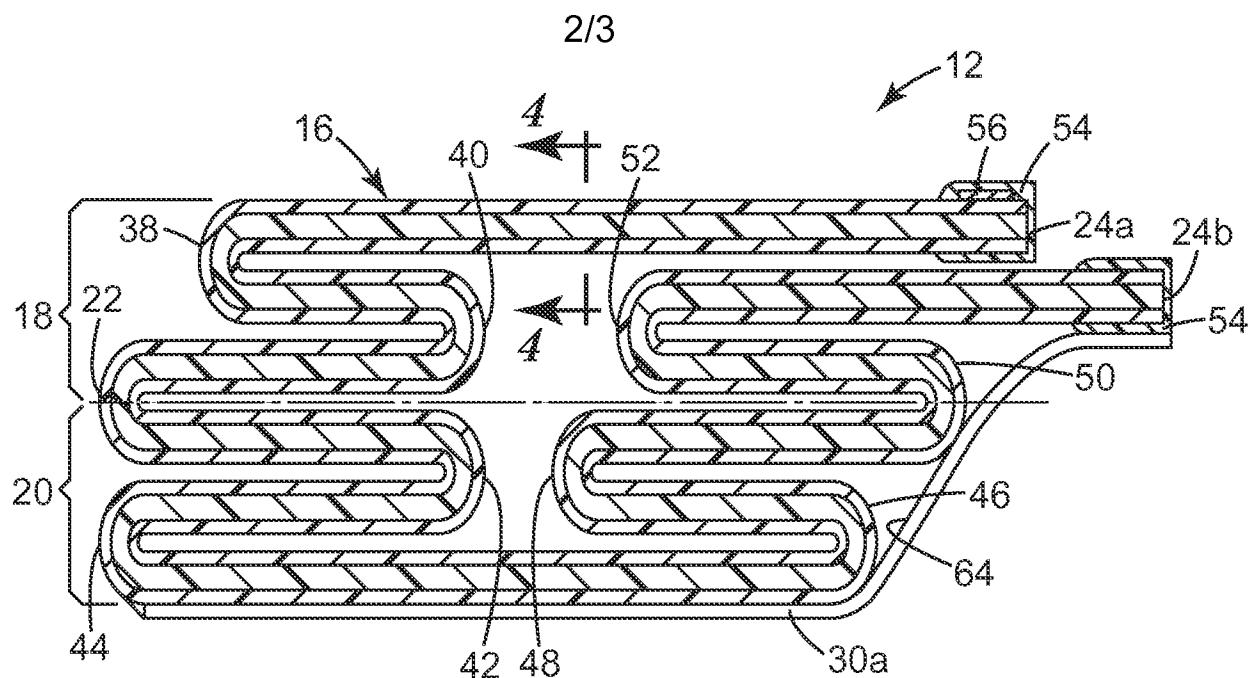


Fig. 3

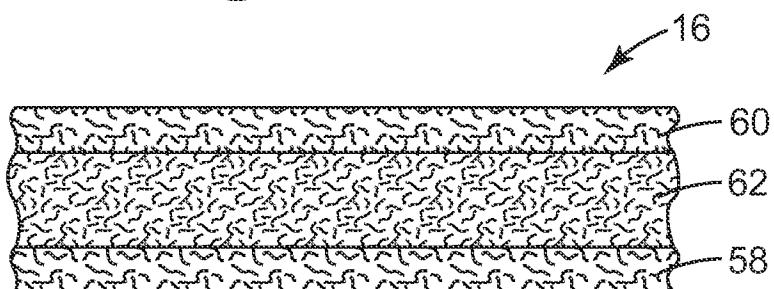


Fig. 4

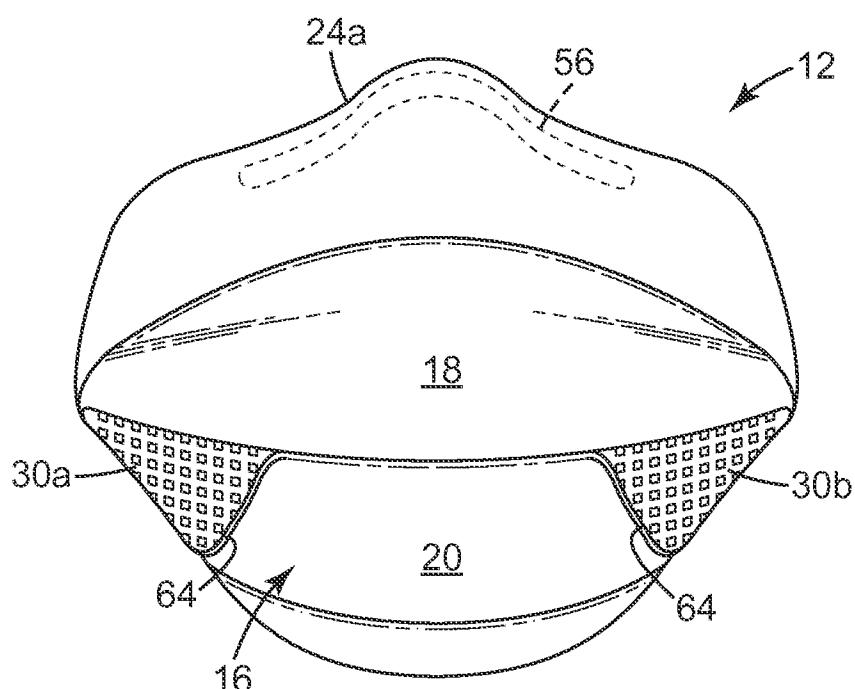


Fig. 5

3/3

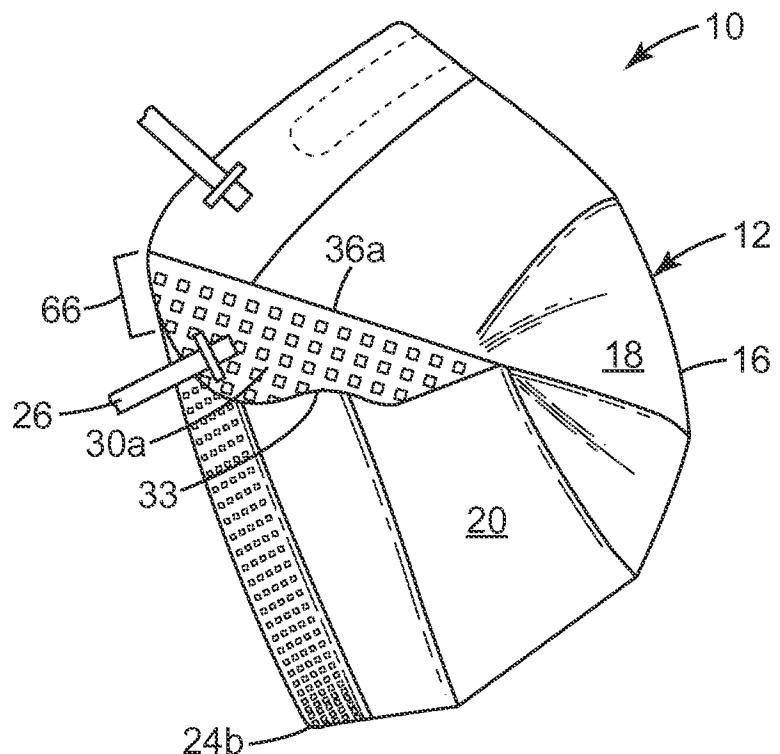


Fig. 6

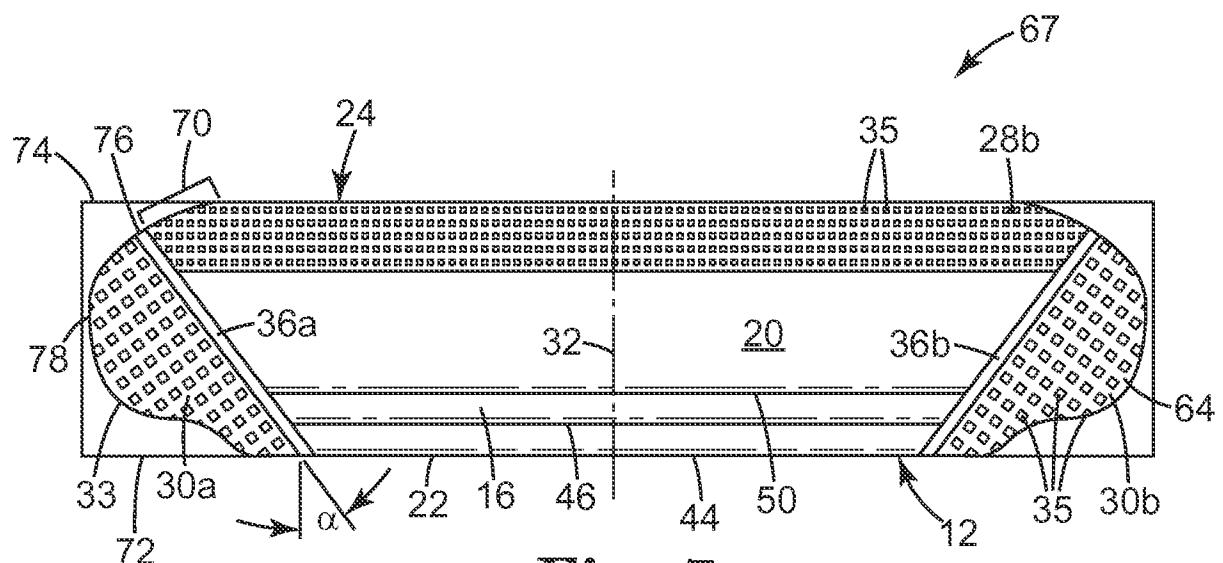


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/075315

A. CLASSIFICATION OF SUBJECT MATTER

A62B 18/02(2006.01)i, A62B 18/08(2006.01)i, A62B 9/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A62B 18/02; A62B 18/08; A62B 9/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: facepiece, respirator, filter, flange

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010-0154805 A1 (DUFFY et al.) 24 June 2010 See paragraphs [0048]–[0050], [0052]–[0054]; and figures 1, 3a, 5.	1–19
A	US 2011-0315144 A1 (EITZMAN et al.) 29 December 2011 See paragraphs [0047]–[0050]; claim 1; and figures 1–4.	1–19
A	US 2008-0271737 A1 (FACER et al.) 6 November 2008 See paragraphs [0048]–[0055]; and figure 1.	1–19
A	US 2012-0097167 A1 (ONO et al.) 26 April 2012 See claims 1, 3, 4; and figures 1, 4.	1–19
A	KR 10-2005-0069893 A (MEGATECH SCIENTIFIC PTE LTD.) 5 July 2005 See claim 1; and figure 1.	1–19

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 April 2014 (08.04.2014)

Date of mailing of the international search report

08 April 2014 (08.04.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer

CHANG, Bong Ho

Telephone No. +82-42-481-3353



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/075315

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0154805 A1	24/06/2010	AU 2009-313668 A1 AU 2009-313668 B2 CN 101909697 A CN 101909697 B EP 2358445 A1 JP 2012-512699 A KR 10-2011-0102138 A MX 2010006174 A RU 2460556 C2 WO 2010-080201 A1	08/07/2010 22/09/2011 08/12/2010 04/07/2012 24/08/2011 07/06/2012 16/09/2011 13/08/2010 10/09/2012 15/07/2010
US 2011-0315144 A1	29/12/2011	CN 102958570 A EP 2585177 A2 JP 2013-533024 A KR 10-2013-0122718 A WO 2011-163002 A2 WO 2011-163002 A3	06/03/2013 01/05/2013 22/08/2013 08/11/2013 29/12/2011 24/05/2012
US 2008-0271737 A1	06/11/2008	CN 101668444 A EP 2146595 A1 EP 2146595 B1 JP 2010-525876 A KR 10-2010-0017287 A WO 2008-137224 A1	10/03/2010 27/01/2010 11/12/2013 29/07/2010 16/02/2010 13/11/2008
US 2012-0097167 A1	26/04/2012	CN 102686283 A EP 2441494 A1 KR 10-2012-0036826 A TW 201043288 A WO 2010-143319 A1	19/09/2012 18/04/2012 18/04/2012 16/12/2010 16/12/2010
KR 10-2005-0069893 A	05/07/2005	CN 1636610 A CN 1636610 B GB 2409649 A JP 2005-192983 A US 2005-0139217 A1 US 7086401 B2	13/07/2005 16/02/2011 06/07/2005 21/07/2005 30/06/2005 08/08/2006