



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2002/0091982 A1**

Ohira et al.

(43) **Pub. Date: Jul. 11, 2002**

(54) **ERROR CORRECTION TRANSMISSION APPARATUS**

(30) **Foreign Application Priority Data**

Jul. 12, 1999 (JP) ..... 11-197023

(75) Inventors: **Masaki Ohira**, Yokohama-shi (JP);  
**Masatoshi Shibasaki**, Yokohama-shi (JP);  
**Yusuke Yajima**, Yokohama-shi (JP);  
**Takashi Mori**, Yokohama-shi (JP)

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **H03M 13/00**

(52) **U.S. Cl.** ..... **714/752**

Correspondence Address:

**KENYON & KENYON**

**Suite 700**

**1500 K Street, N.W.**

**Washington, DC 20005 (US)**

(73) Assignee: **Hitachi, Ltd.**, Tokyo (JP)

(21) Appl. No.: **10/062,404**

(22) Filed: **Feb. 5, 2002**

**Related U.S. Application Data**

(62) Division of application No. 09/387,895, filed on Sep. 1, 1999.

(57) **ABSTRACT**

An encoder adds an identifier, being different when the coding should be done or not, into a predetermined location in an original signal, while a decoder reads out the identifier added and detects the condition of coding, so as to decide the execution (ON) of the decoding process to be done or not, automatically. Further, in each of the encoder and the decoder, there is provided a delay output portion, which provides an output treated with only a specific delay but not executing the coding/decoding thereon, separately from a coding process portion or a decoding process portion, wherein a selection can be made, at which one of the signals from the respective process portions and the delay output portion should be outputted, by a setup in an outside operation system with use of a selector.

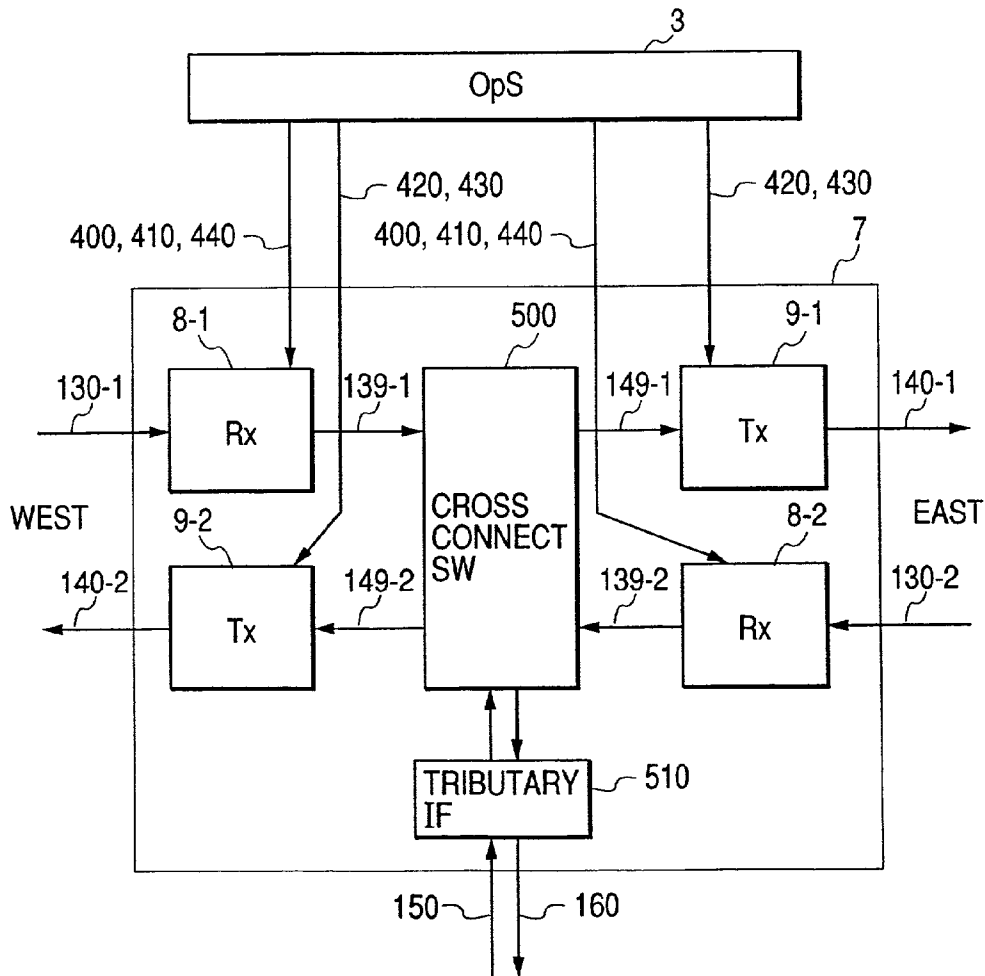


FIG. 1

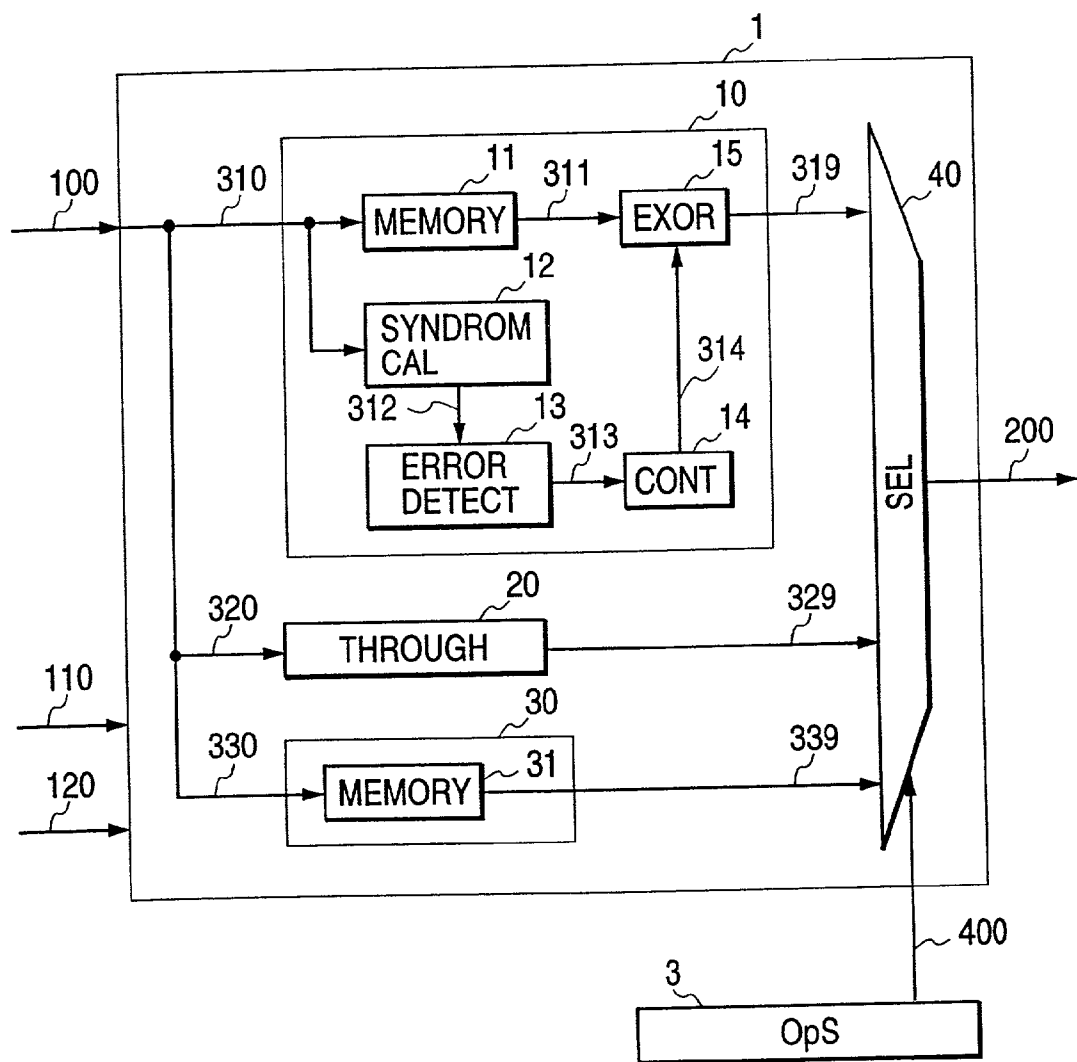


FIG. 2

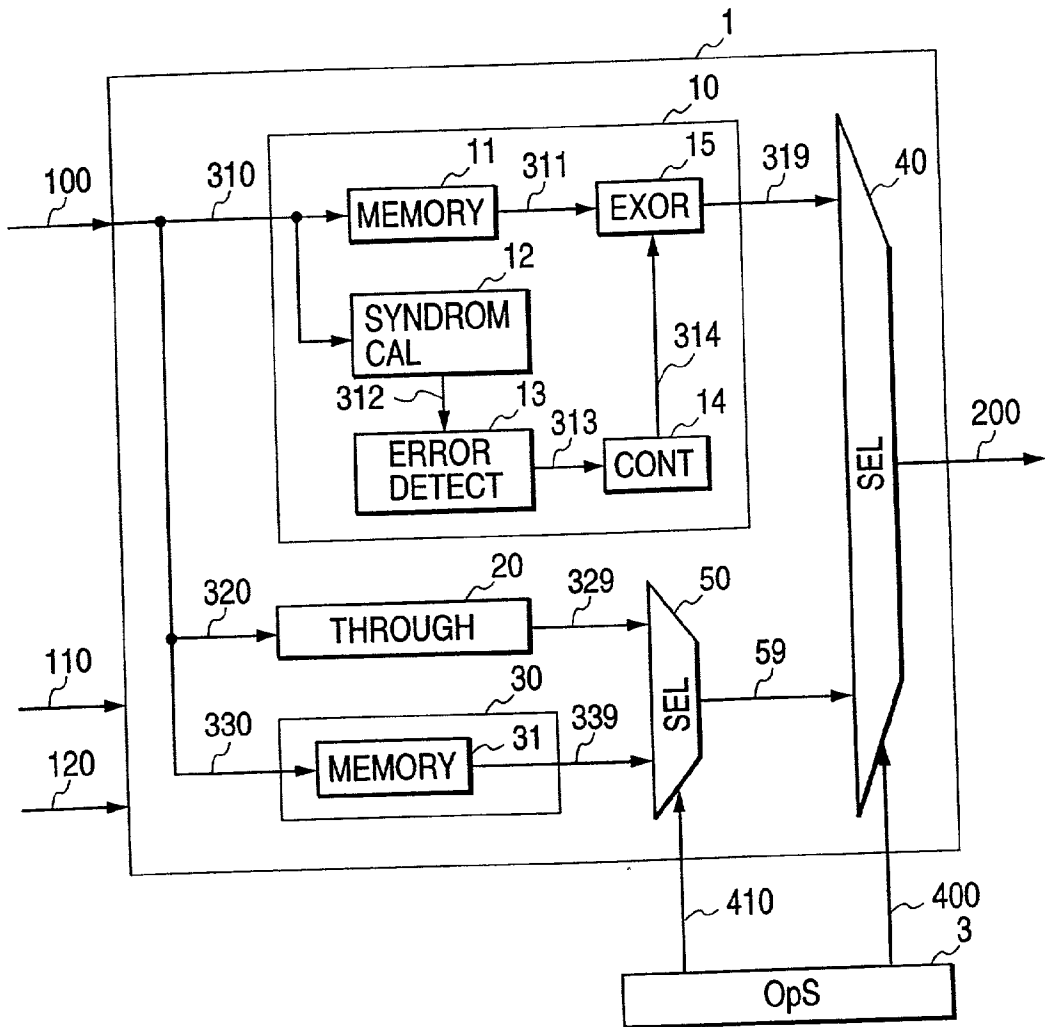
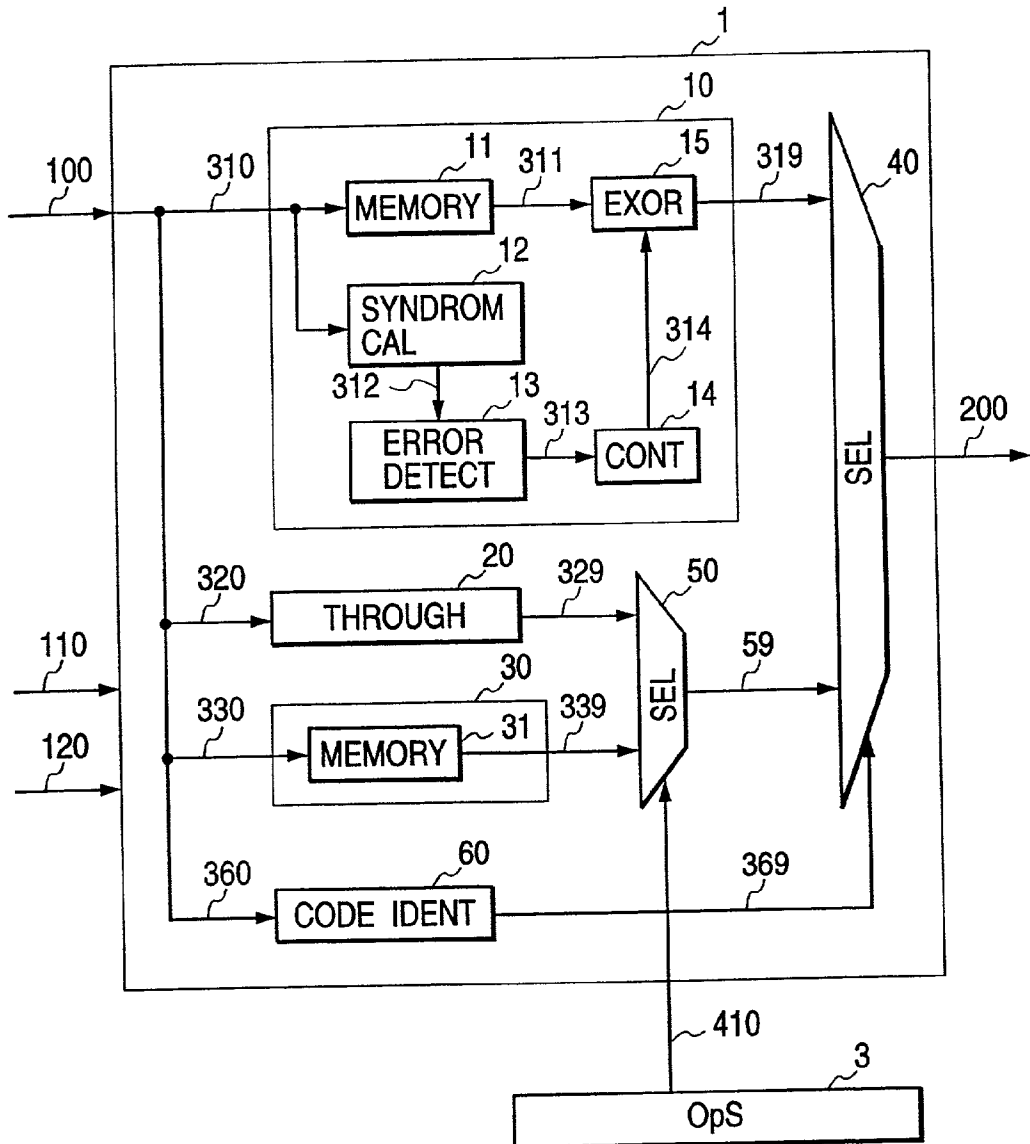


FIG. 3



**FIG. 4**

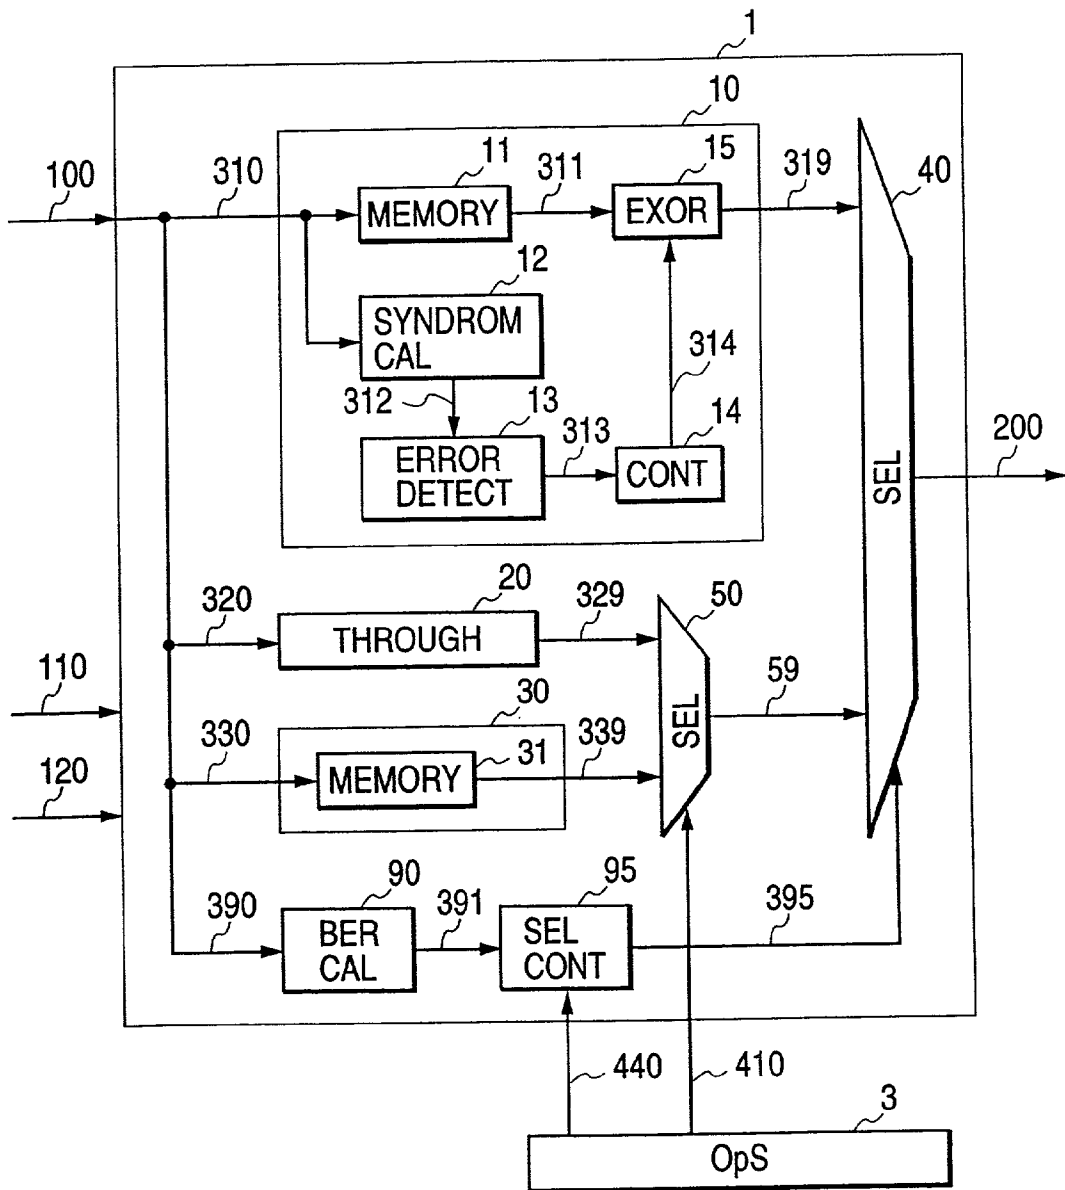


FIG. 5


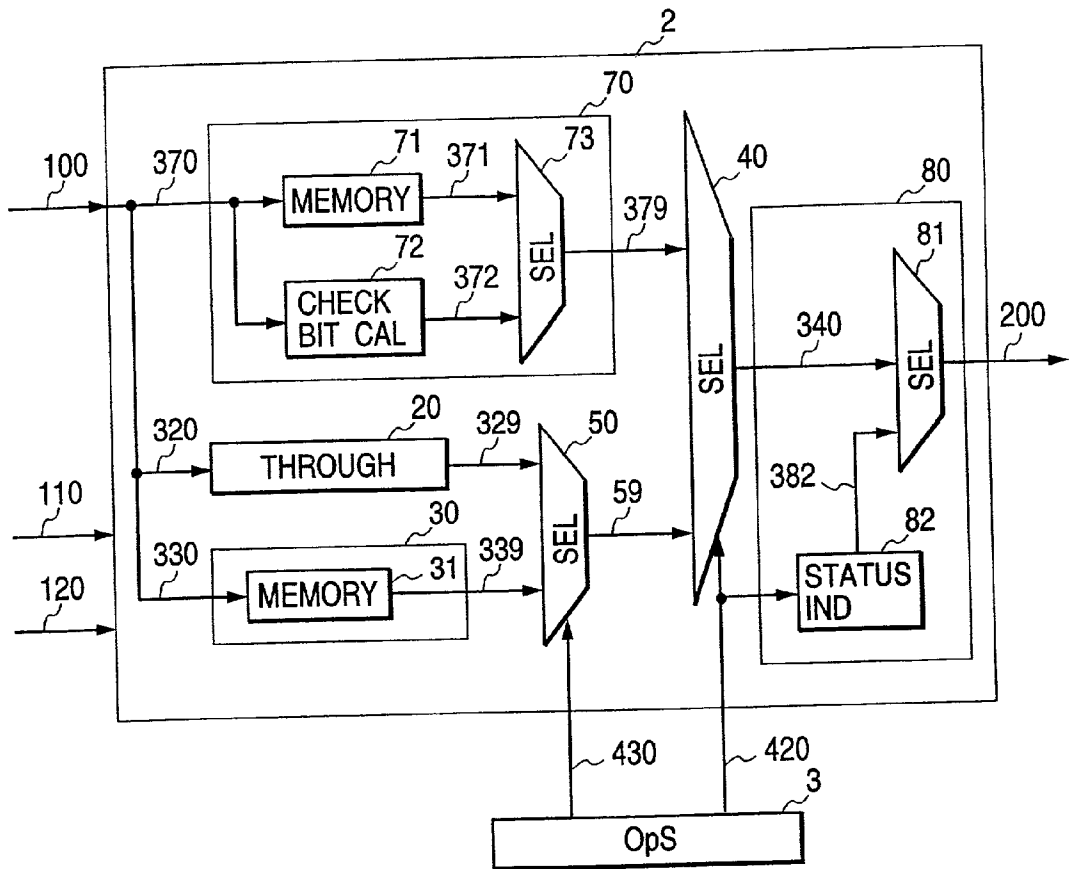


FIG. 6

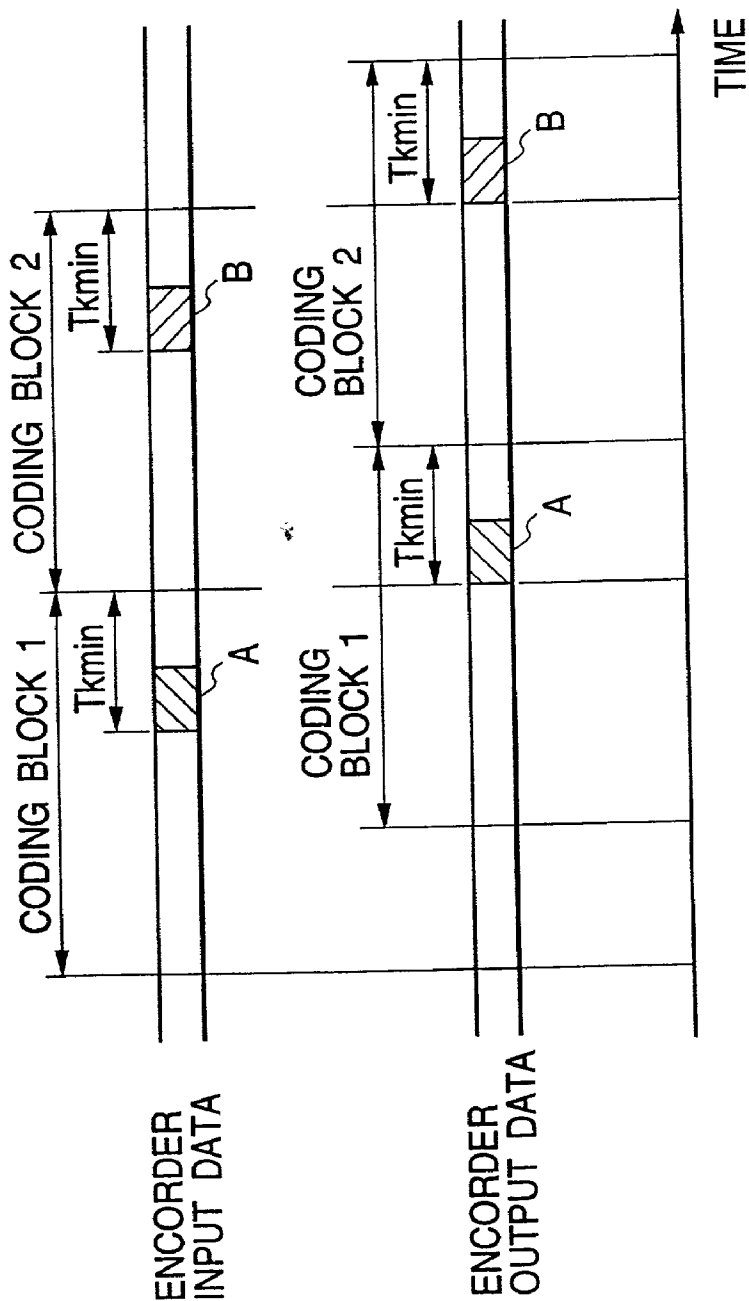

A: STORE FIELD OF CHECK BIT FOR CODING BLOCK 1  
B: STORE FIELD OF CHECK BIT FOR CODING BLOCK 2

FIG. 7

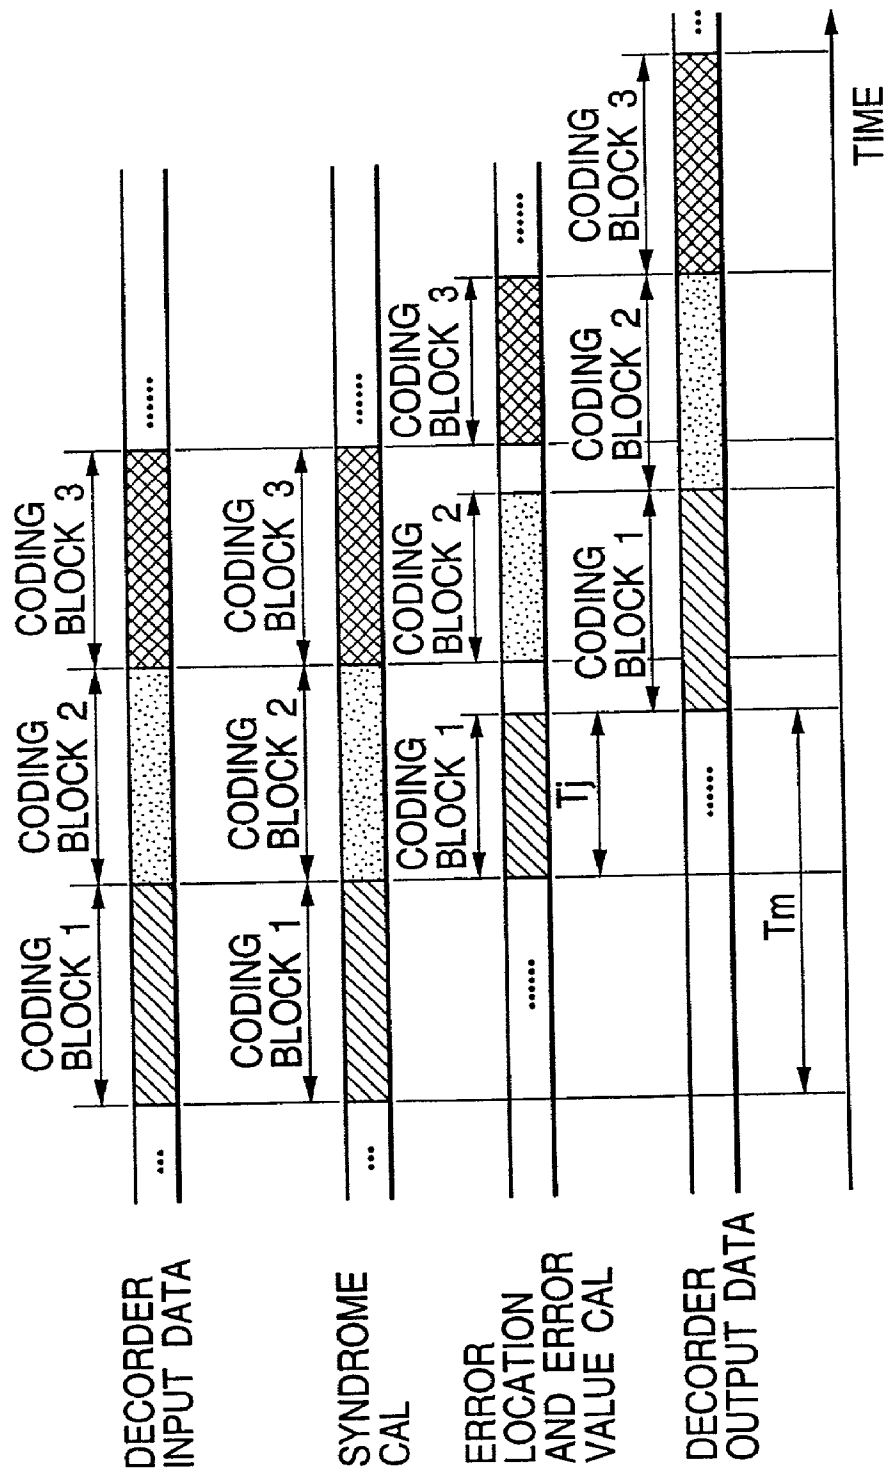
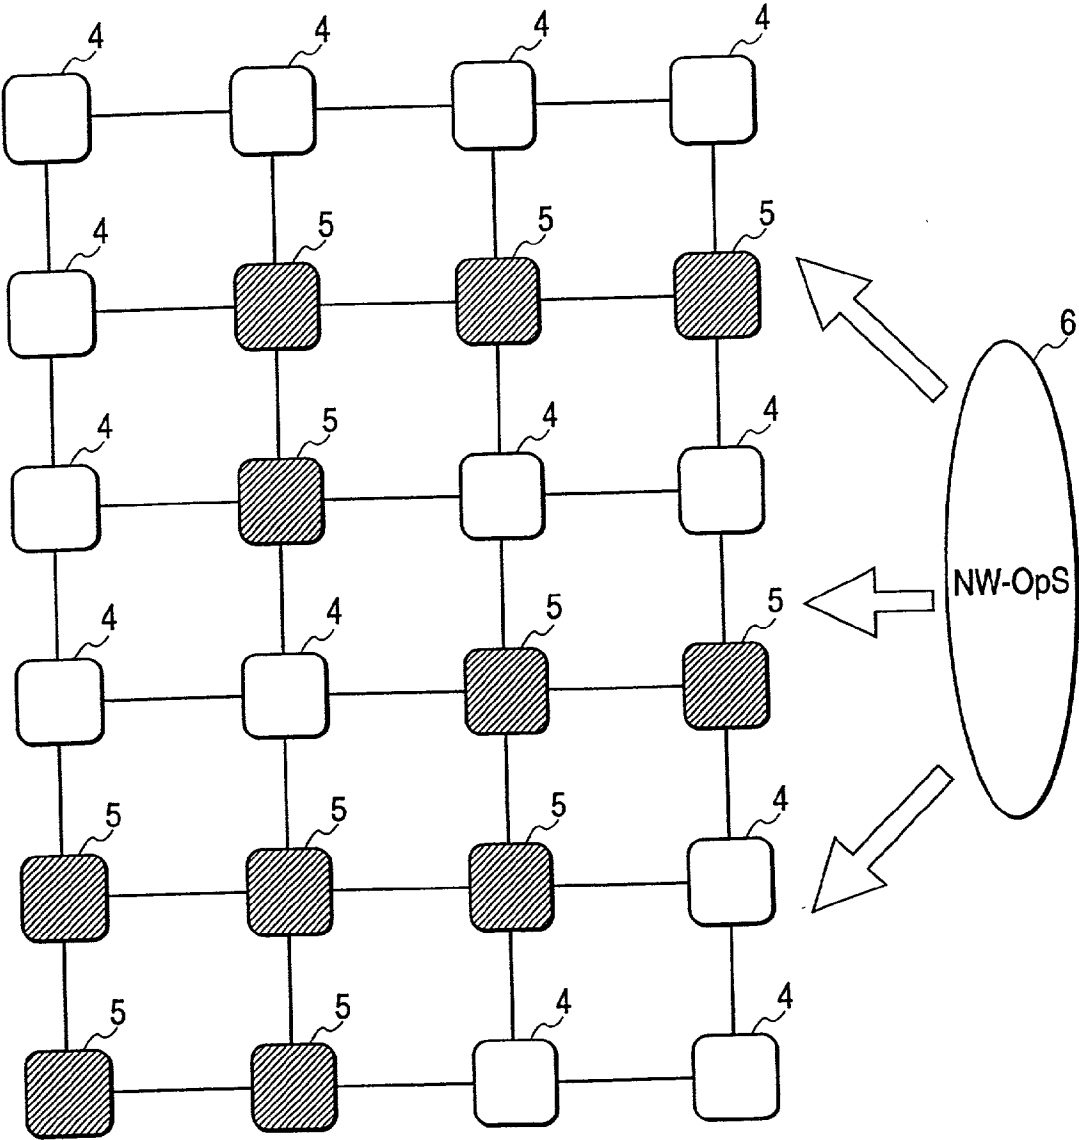




FIG. 8



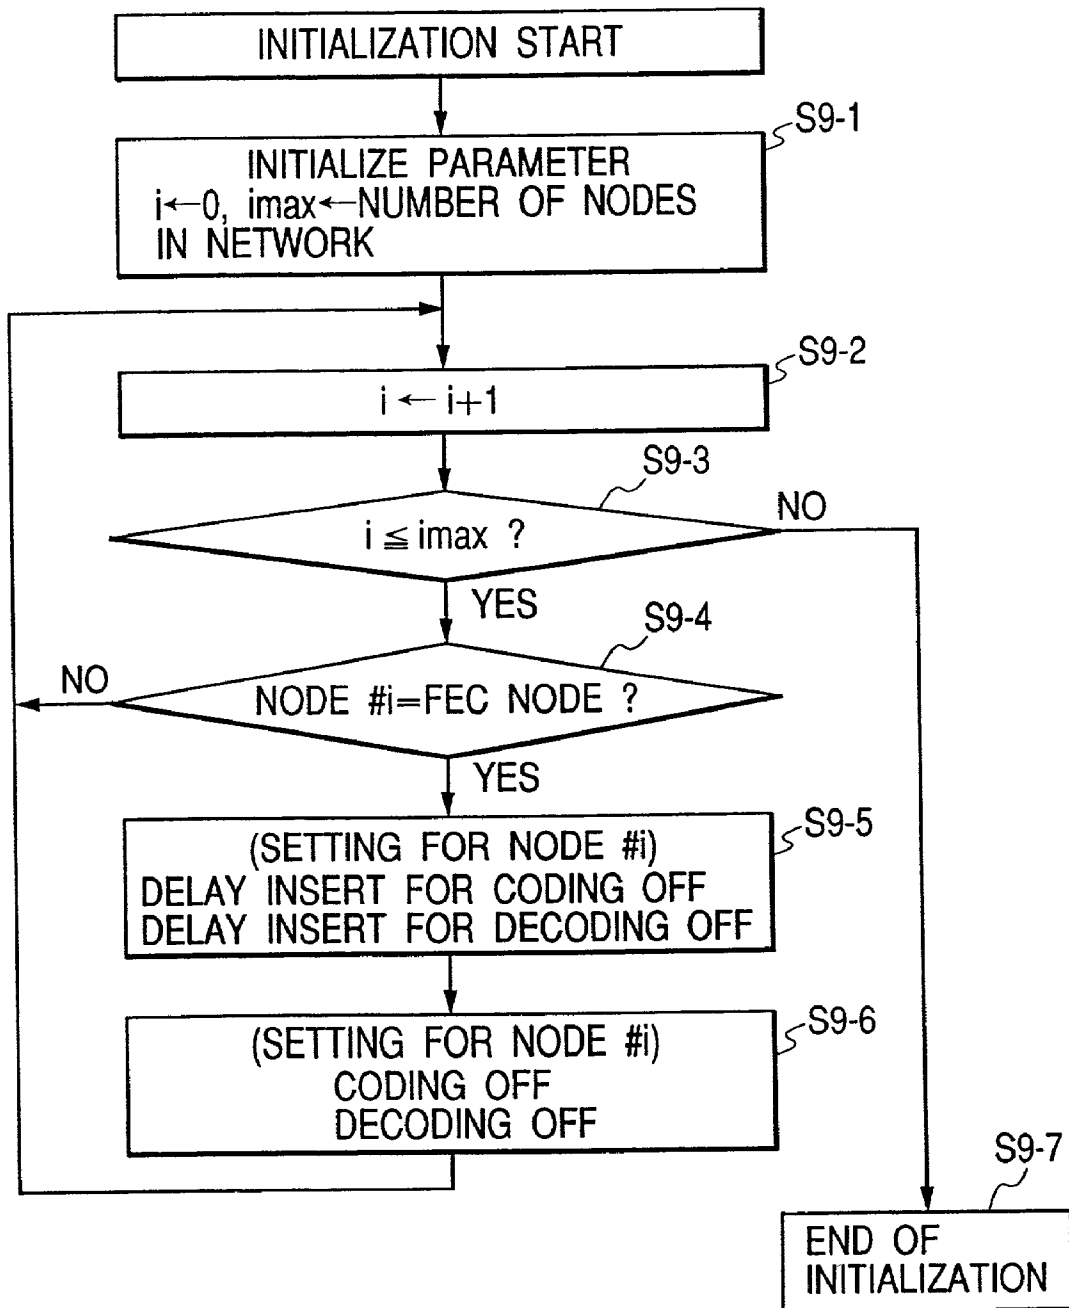
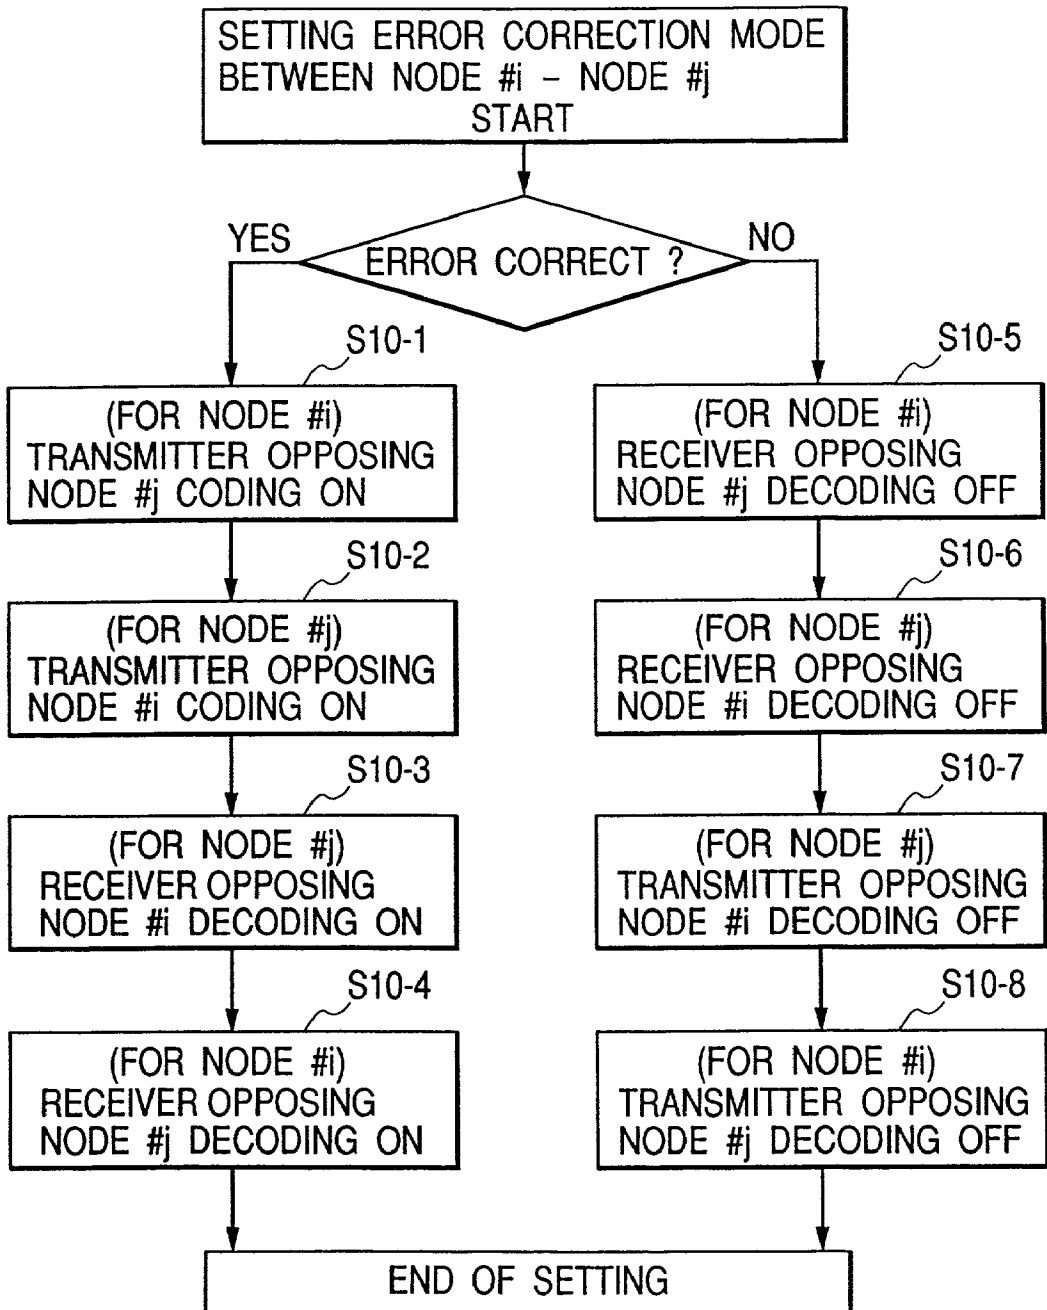
**FIG. 9**

FIG. 10



**FIG. 11**

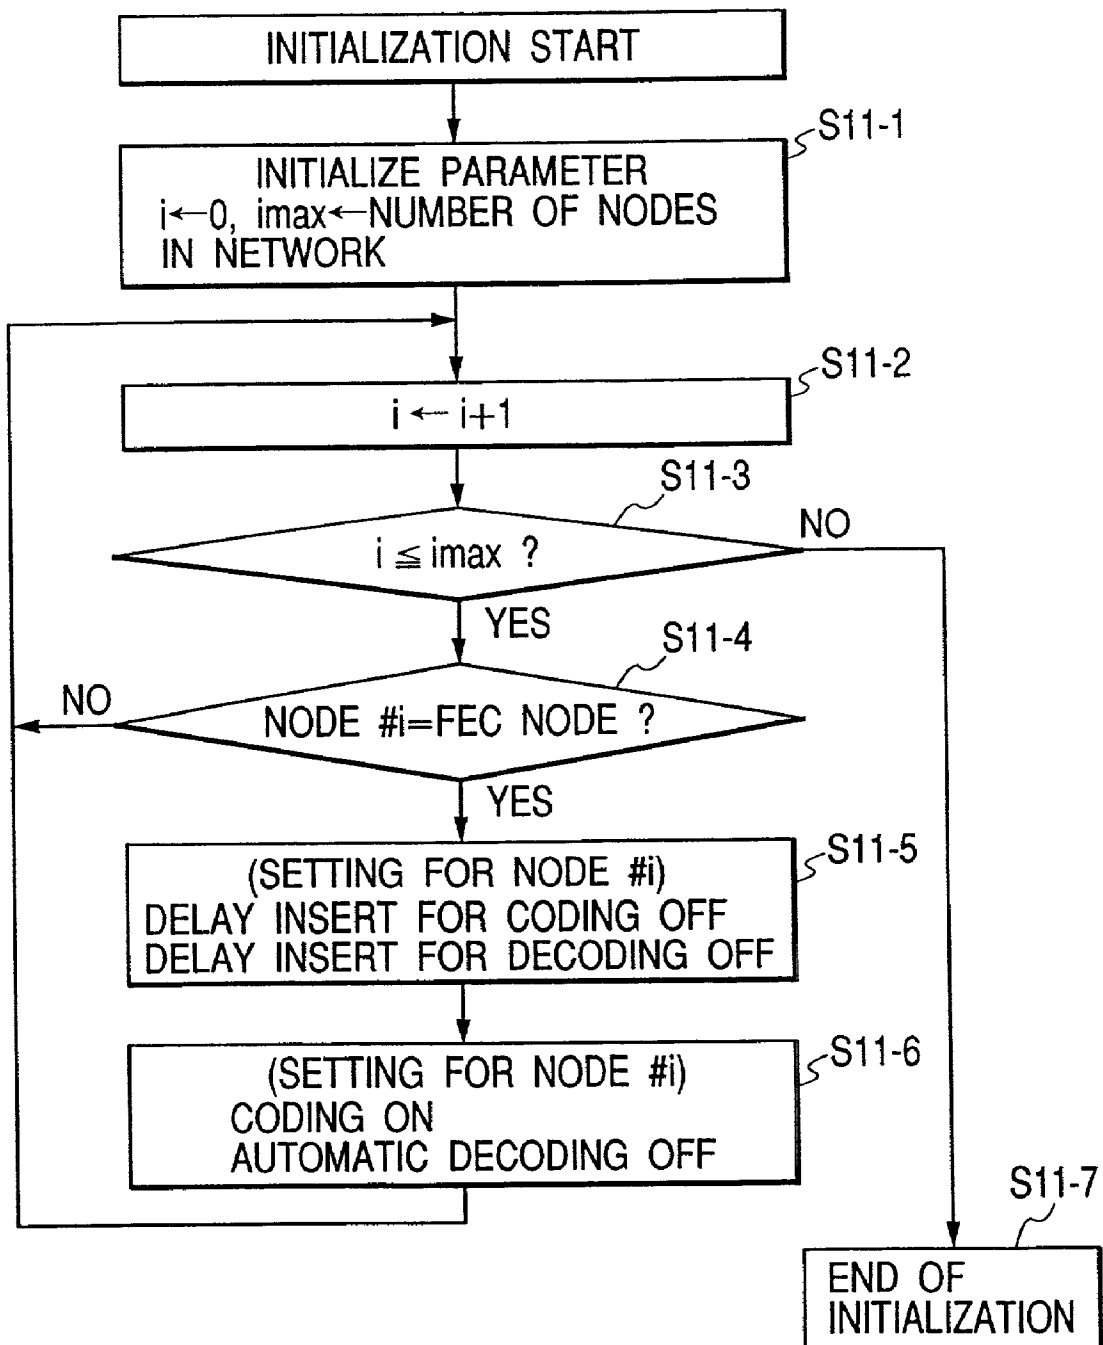


FIG. 12

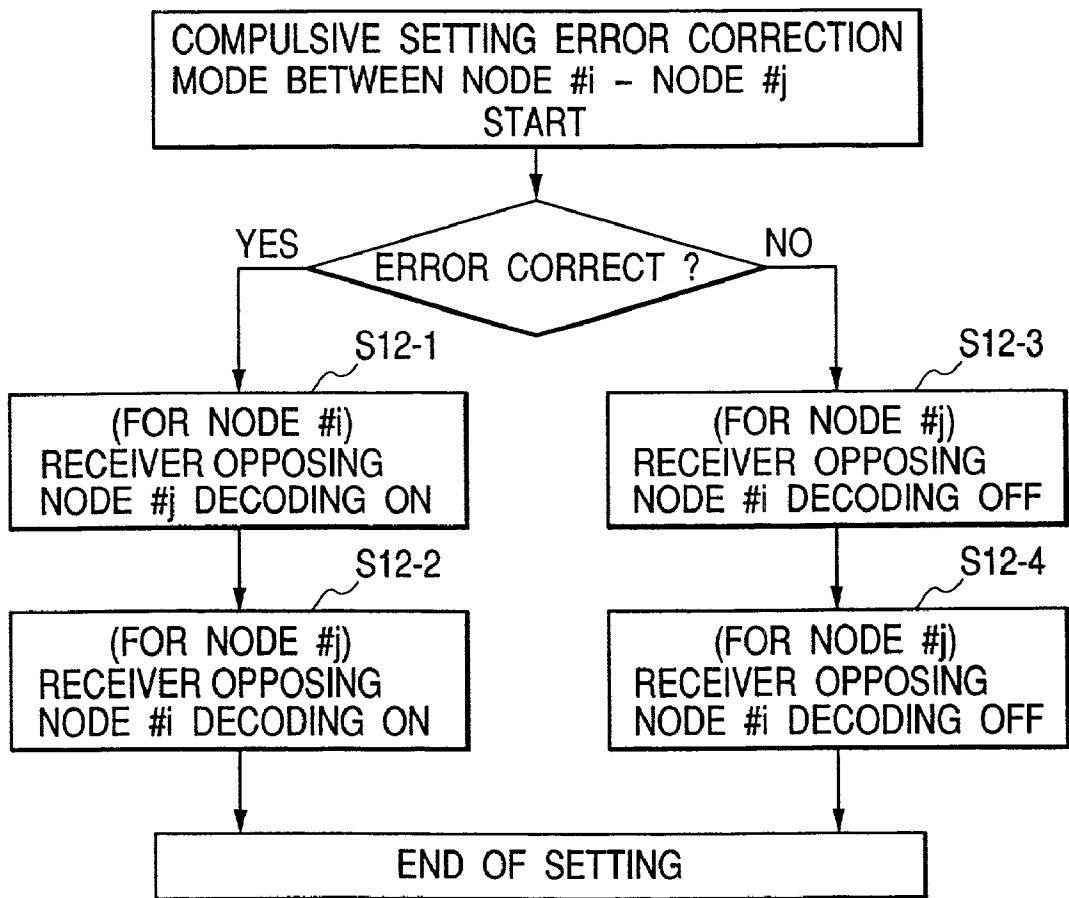


FIG. 13

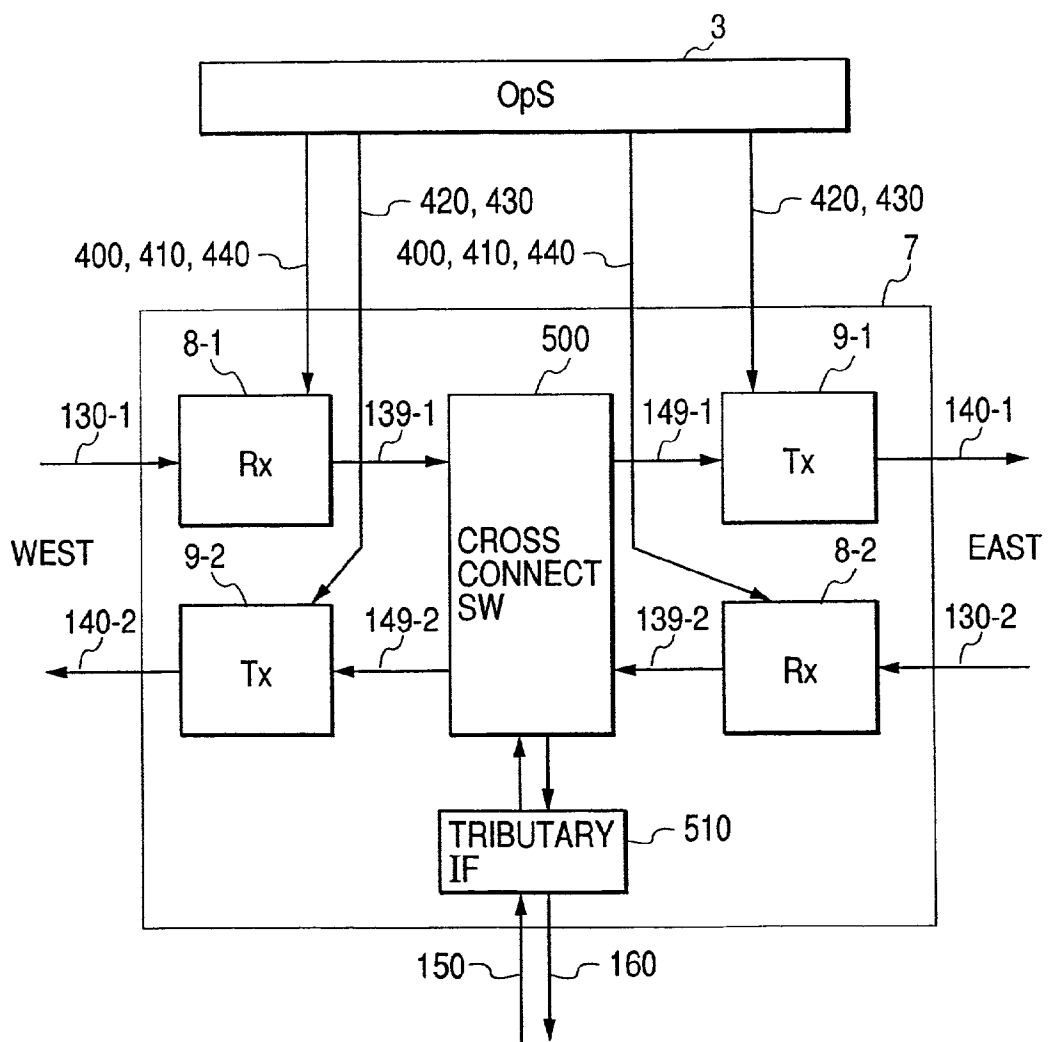


FIG. 14


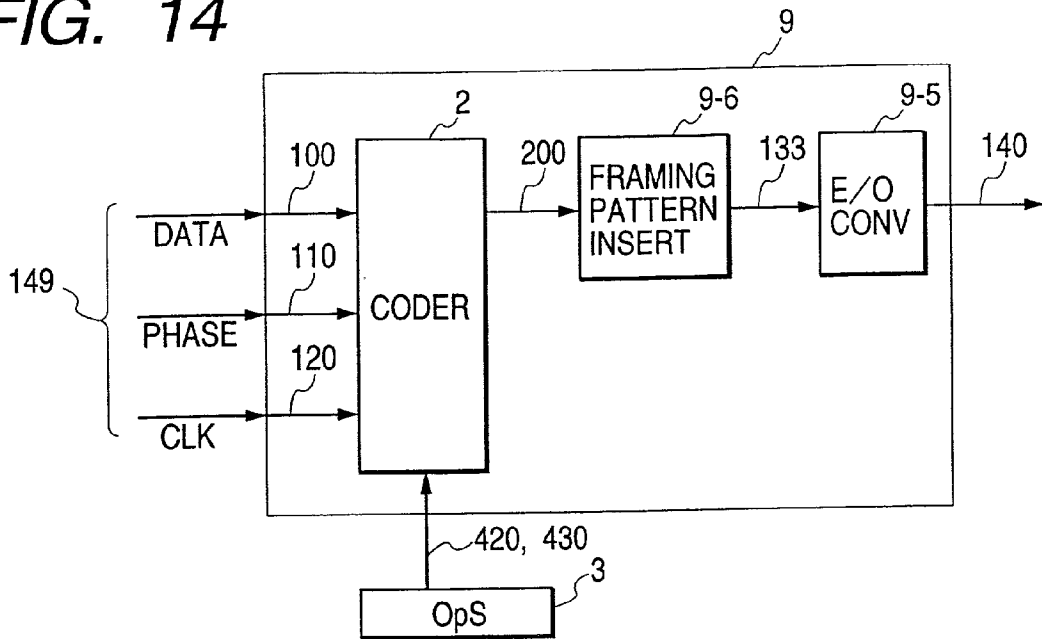


FIG. 15

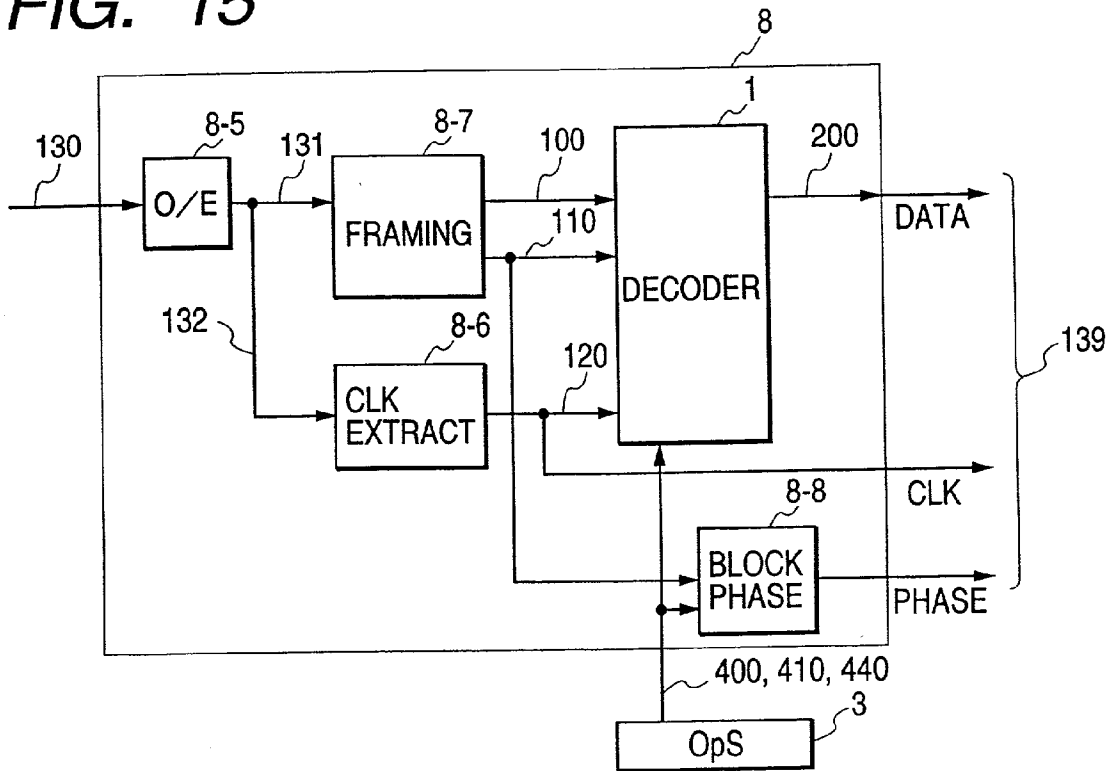

## ERROR CORRECTION TRANSMISSION APPARATUS

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to a forward error correcting code encoding equipment, a forward error correcting code decoding equipment and a transmission apparatus with use thereof, in particular, being suitable for an optical transmission network.

[0002] In those days, following the development of technologies in the field of digital signal processing, including such as a LSI and so on, the technologies of encoding and decoding of forward error correcting code are applied to or used widely in various technical fields for the purpose of ensuring high quality of signals. In particular, in an engineering field, a code, such as a so-called systematic code, is mainly used due to transparency of the information thereof, among the block codes having mathematically well-regulated systems therein. In this code, a series of continuous signals are divided into plurality of constant blocks, and are coded or encoded by each block, wherein it is characterized that only a check bit is added into a vacant area predetermined within the signal, but no operation is made on the original signal information. Of this kind of block codes were previously well-known a Hamming code, a BCH code, and a Reed-Solomon code, etc., and they are actually applied to. Hereinafter, the coding or decoding of the forward error correcting code is called only by coding or decoding.

[0003] Then, for a system introducing the forward error correcting code therein, it is established with an assumption of deterioration of signal quality due to mixture of noises in each of processes, including reading and reservation of signals, signal transmission, signal processing, etc. For example, in such a manner that the signal is always coded in the each process, and then it is always treated by decoding process thereafter.

[0004] On a while, optical transmission is widely spread in recent years, which enables data transmission with a large volume or capacity thereof. This optical transmission adopts optical fibers, i.e., a transmission path of relatively high quality, as a medium thereof, then bit error rate of it is equal or less than  $10^{-9}$ , therefore it is not necessary to presume the adoption of the forward error correcting codes in the system. As a representative one of such the optical transmission can be listed a digital synchronization transmission system, wherein regulations are existing in worldwide. This system is widely spread in the networks of truck or main line systems of the world, as SDH (Synchronous Digital Hierarchy) (established 1988) which was determined as the recommendation G.707 and so on by International Telecommunication Union (hereinafter, ITU-T), and as SONET (Synchronous Optical Network) (established 1991) which was determined as the standard T1.105 by American National Standardization Institute (hereinafter, ANSI). Those standards, except for a submarine transmission system wherein signals must be transferred very long distance, are not positive nor aggressive for adoption of the forward error correcting code.

[0005] However, following advances on the large capacity with time division multiplex in the digital synchronization

transmission method, the signal is narrowed in the bit length and is easily influenced by an affect due to various dispersions, as the inherent physical characteristics of the optical fiber, and as this result, the signals are deteriorated in quality thereof, as well as the transmission distance is limited therewith. Then, as a means effective to compensate the deterioration of the signal quality, the forward error correcting code is studied to be introduced into. As an example of the code, in Japanese patent Laying-Open No. Hei 7-280058 (1995) is shown the Reed-Solomon code for a single error correction.

[0006] Further, on the other hand, a method of wavelength division multiplex is also spread widely, but since a degree of separation is deteriorated when the lights transmitting in a piece of optical fiber come to close to each other in the distance of wavelength thereof, therefore the transmission distance is restricted thereby when the degree of multiplication is increased. In this instance, also introduction of the forward error correcting codes is an effective method for compensation thereof.

[0007] It is not necessarily true that in the optical transmission network, such as all of nodes (multiplexing equipment and regenerating equipment) constructing the digital synchronous transmission network, always support the same forward error correcting codes. Namely, all of the nodes are not necessarily supplied by the same producer or manufacturer, and also there can be a node(s) which cannot support the forward error correcting codes even if it(they) is supplied by the same producer or manufacturer, depending upon the difference of time of purchasing thereof.

[0008] In this manner, under the situation where there are mixed the nodes being different from one another in the transmission network, it cannot be guaranteed that the signals received at any node is necessarily coded, therefore it is impossible to execute the decoding always at the receiver side. This is because miss corrections is generated in the signals when the signals which are not coded properly are decoded compulsively.

[0009] Further, in general, by using the forward error correction, since miss corrections come to be large in the number when the error rate of the signals is high, there can be considered a method in which the decoding is performed only when the error rate is relatively low, while it is not performed when the error rate is deteriorated. Alternatively, with a transmission medium of relatively good quality, such as the optical fibers and so on, there also can be considered a method of using thereof, in which the decoding is performed only when the error rate is deteriorated in such degree that it does not cause the miss correction, but the decoding is not performed under the other situations than that.

[0010] From the above, for the decoding equipment are needed not only ON of the decoding operation (i.e., decode ON) but also a process of not decoding (i.e., decode OFF), and also there is a necessity that a network management system or an operator must setup ON/OFF of the decoding operation for each node of the network.

[0011] Regarding the coding, since it is systematic code, there is given no ill influence even if it executes the coding operation always, irrespective of the opposing node(s).

[0012] As an example of supervision of the above-mentioned error rate, in the transmission networks such as of the



SDH or SONET, the number of error bits is detected for each of multiplex sections and for each of regeneration sections on the basis of BIP (Bit Interleaved Parity) of B1 byte or B2 byte, therefore it is possible for the network management system or the operator to capture the number of error bits and the bit error rate between the respective nodes.

**[0013]** Next, if the transmission network comes to be complex or is altered in the construction thereof, it is difficult for the network management system which is managing the transmission network, to grasp in which node section the error correction is applicable or not, or to make an instruction to execute the error correction. This may sometimes cause that non-encoded signals are erroneously decoded compulsively, depending on the cases.

**[0014]** Further, in the decoding processes, there is caused delay time necessarily, corresponding to one coding block or the more than that. Here, explanation will be given on generation of the delay time by the decoding processes under the decode ON condition, by referring to **FIG. 7** of showing a timing chart for an explanation of generation of the delay.

**[0015]** The data inputted into a decoder is outputted therefrom, with a time delay "Tm", as indicated in Fig. Calculating syndrome on the data of the coding block 1 which is inputted into the decoder, the syndrome calculation of the coding block 1 is completed at the time when the bit at the end of the coding block 1 is inputted. Next, error positions and error values will be calculated upon the basis of the calculated syndrome, however there is needed a specific calculation time (Tj) being depending upon code format thereof, as well as a calculation circuit therefor. As a result of this, the time when starting the output of the corrected data of the coding block 1 is at a time point of counting up "time for 1 coding block+Tj" starting from a time point of inputting into the decoder, i.e., after the "Tm". For the coding blocks flowing thereafter, there are also generated the delay "Tm"s in the same manner.

**[0016]** On the other hand, the delay will not occur under the condition of the decode OFF. This is because the data inputted into the decoder is outputted as it is, with the same phase thereof, therefore it can be considered that a time relationship between the input data and the output data is kept to be equal to each other.

**[0017]** When the network management system or the operator exchanges or alters the decoding operation from OFF condition into ON condition, there occurs a jump in the phase corresponding to the decoding delay mentioned in the above. In more details, said information is shifted backwards by the "Tm" on the time axis, therefore a portion of the signal is outputted in duplicate. For example, when exchange is made at a time point during the input of the coding block 2 (i.e., during when outputting it at the same time), the data of the coding block 1 is outputted from on a way thereof just after the coding block 2 is outputted until on the way thereof. Accordingly, the portion of data of the coding block 1, being outputted previously, and a portion of data of the coding block 2, being also outputted previously, (sum of the both is equal to the Tm in time) are outputted, again (not shown in figure).

**[0018]** Also, on the contrary to this, when the decoding operation is exchanged from ON condition into OFF con-

dition, there also occurs a jump in the phase, and said information is shifted forwards on the time axis, therefore the signals are outputted with omission of a part thereof. For example, in **FIG. 7**, if it is exchanged at the time point when outputting the coding block 1 during the inputting of the coding block 2, a portion of data of the coding block 1 which has not yet inputted, all data of the coding block 2, and a portion of data of the coding block 3 which was inputted previously (the sum of those three is equal to the Tm in time) will not be outputted. Accordingly, the coding block 3 is outputted from on a halfway thereof just after the data of the coding block 1 is outputted on the way thereof, thereby causing the loss or omission of the data.

**[0019]** In any event, the phase jump, for one (1) coding block at the lowest, can be observed at an upper client side (i.e., a side which receives the signal in down stream) through the exchange operation between ON and OFF in the decoding operation, and there would be caused a condition of instantaneous or abrupt interruption, such as a miss-synchronization of the frame, thereby bringing about large problems in reliability of the network.

#### SUMMARY OF THE INVENTION

**[0020]** An object, according to the present invention, is to provide a transmission system, as well as a transmission apparatus, an encoder and a decoder for constructing such the transmission system, wherein an operator managing the network can easily keep the system in operation, without necessity of deciding whether the decoding is available for each of the transmission sections, even when the structure of the network becomes complex or is altered.

**[0021]** Further, another object, according to the present invention, is to provide a transmission apparatus, an encoder and a decoder, and a management method for a transmission network, wherein a control of changing over ON/OFF between the coding and the decoding can be performed freely, without giving ill influence due to the phase jump upon the signals on a circuit under the operation of service thereof.

**[0022]** For achieving such the objects mentioned above, in an encoder and a decoder according to the present invention, there is provided a delay circuit portion, which provides an output treated with only a specific delay but not executing the coding/decoding thereon, separately from a coding process portion or a decoding process portion. And, when the coding/decoding should not be executed on the nodes each constructing the network, a network management system or an operator outside can select an output from that delay circuit portion.

**[0023]** Further, the encoder according to the present invention adds an identifier, being different in a case when the coding should be done or not, into a predetermined location in an original signal, while the decoder reads out the identifier added and detects the condition of coding, so as to decide the execution of the decoding process, automatically.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0024]** Preferred embodiments of the present invention will now be described in conjunction with the accompanying drawings, in which;

**[0025]** **FIG. 1** shows a block diagram of a decoder of an embodiment according to the present invention;

[0026] FIG. 2 shows a block diagram of another decoder of an embodiment according to the present invention;

[0027] FIG. 3 shows a block diagram of another decoder of an embodiment according to the present invention;

[0028] FIG. 4 shows a block diagram of a further other decoder of an embodiment according to the present invention;

[0029] FIG. 5 shows a block diagram of an encoder of an embodiment according to the present invention;

[0030] FIG. 6 shows a timing chart for showing delay occurring in the encoding operation;

[0031] FIG. 7 shows a timing chart for showing delay occurring in the decoding operation;

[0032] FIG. 8 shows a block diagram of a network into which a management method for the transmission network according to an embodiment of the present invention is applied;

[0033] FIG. 9 shows a flow chart for explaining initialization steps in a network management system according to an embodiment of the present invention;

[0034] FIG. 10 shows a flow chart for explaining exchange of the setups of coding and decoding operations in the network management system according to the embodiment of the present invention;

[0035] FIG. 11 shows a flow chart for explaining initialization steps in a network management system according to another embodiment of the present invention;

[0036] FIG. 12 shows a flow chart for explaining exchange of setups of the coding and decoding operations in the network management system according to the another embodiment of the present invention;

[0037] FIG. 13 shows a block diagram for explaining the construction of a node according to the embodiment of the present invention;

[0038] FIG. 14 shows a block diagram for explaining the construction of a transmitter according to the embodiment of the present invention; and

[0039] FIG. 15 shows a block diagram for explaining the construction of a receiver according to the embodiment of the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0040] Hereinafter, embodiments according to the present invention will be fully explained by referring to the attached drawings.

[0041] Signals which are applied into the present embodiments are ones upon which can be applicable the systematic coding thereof, i.e., each series of signals can be divided into coding blocks of a constant length, and each includes a vacant area for each of the coding blocks, being enough to store check bits therein. For example, a transmission signal of SDH is a signal which is framed by a cycle of 125 microseconds, and it can be divided into the code clocks of the constant length arbitrarily, wherein the check bit can be stored in an area (non-regulation area) where a method or

manner of using thereof is not defined in a multiplex section overhead and a regeneration section overhead thereof, therefore it can be contained in the category mentioned-above.

[0042] An embodiment of a decoder according to the present invention is shown in FIG. 1. Here, FIG. 1 shows a block diagram of the decoder.

[0043] An input data 100 is a signal to be subject to decoding, and a block phase 110 is a trigger signal which indicates a head location of the coding block. And, an input clock 120 is a clock input having a rate same to the bit rate of the input data 100. Here, in a case where the head location of the coding block comes to be the same within a one frame cycle, the block phase 110 can be a trigger indicating the frame phase. In this case, it is enough to count up the head locations of the coding blocks within the decoder 1 upon the basis of the frame phases. Also, the input clock 120 may be as large as times of an integer of that of the input data 100 in the cycle of one (1) bit thereof, and if it is more than two (2) times thereof, it is enough to divide the input clock 120 in the cycle thereof within the decoder 1 so as to make it the bit rate of the input data 100.

[0044] The input data 100 is divided into three series of data 310, 320 and 330, being synchronized with one another, and each is inputted into a forward error correction process portion 10, into a through output portion 20, and into a delay output portion 30, respectively. From the forward error correction process portion 10, the through output portion 20, and the delay output portion 30 are outputted data 319, 329 and 339, respectively, so that they are inputted into a selector 40. In the selector 40, one of the data 319, 329 and 339 is selected upon the basis of an external control signal 400, so as to be provided as an output data 200 of the decoder.

[0045] The block phase 110 is used for the purpose of indicating where the head location of the coding block is positioned in the series of data, for the forward error correction process portion 10 and the delay output portion 30. Also, the decoder 1 is operated by the phase of the clock 120, i.e., the velocity thereof.

[0046] The feature of the present embodiment lies in the delay output portion 30. Hereinafter, every portion thereof will be explained in more detail.

[0047] While dividing the inputted data 310 into two (2) series so as to store them into a memory 11 one by one, the forward error correction process portion 10 inputs them into a syndrome computer or calculator 12. The syndrome computer 12 calculates out the syndrome upon the basis of the inputted data 310, and also outputs the result thereof as a syndrome 312 into an error computer 13. The error computer 13 calculates out the positions and the values of the errors existing in the coding blocks on the basis of the inputted syndrome 312, and outputs the result thereof as an error evaluation result 313 into an error correction controller 14. With the error evaluation result 313, in a case where the code is for a plural forward error correcting codes, there exist a set of error positions, as well as a plurality set of the error values therein.

[0048] On the other hand, the data which are stored in the memory 11 are read out as the data 311 after passing a constant time "Tm" from the time when the data is written into, so that they come to be the same data series of the original data 310, and are outputted into a logical exclusive

OR gate 15. The error correction controller 14 outputs a correction data 314 into the logical exclusive OR gate 15 on the basis of the error evaluation result 313 inputted. The correction data 314 is theoretically equal to the corresponding error value at the time when the location at which the error exists is outputted from the memory 11, while it is theoretically to be "zero" at the time when the location at which the error does not exist is outputted therefrom. The logical exclusive OR gate 15 outputs a logical exclusive summation of the output data from the memory 11 and the correction data 314 from the error correction controller 14, as a data 319 thereof.

[0049] Here, the "Tm" is a time in which the error correction controller 14 can necessarily output the correction data 314 for the coding block A from the time point when an arbitrary coding block A is inputted into the syndrome computer 12 among the signal series of the data 310, wherein it is an essential condition that it is at least more than the cycle of the coding block.

[0050] However, since the way of calculating the syndrome and the method of error evaluation are well-known, therefore, here the explanations thereon are omitted. In particular, when the code is a single forward error correcting cycle redundancy code, it is also well-known that, the syndrome computer 12, the error computer 13 and the error correction controller 14 are able to be achieved by simple feedback shift registers.

[0051] Next, the through output portion 20 outputs the data 329 just after inputting the data without operating on the contents of the data 320 inputted.

[0052] The delay output portion 30 writes the inputted data 330 into a memory 31. And in the same manner as in the memory 11, the data is read out as the data 319 so as to be made the data series same to the original data 330, after passing the constant time "Tm" from the time of writing.

[0053] The selector 40 selects the data 319 when the external control signal indicates the decoding, or the data 329 when it indicate non-execution of the decoding and no-delay, and it selects the data 339 when it indicates non-execution of the decoding and with the delay, so as to output as the data 200, respectively. Also, no delay operation is treated within the selector. The external control signal 400 is a control signal from a device management system(s), a network management system(s) and an operator(s).

[0054] According to the present embodiment, an operator outside can obtain continuous data without such the phase jump as the output data 20 even when she/he exchanges the decoding operation between execution (ON) and non-execution (OFF) on the input data 100, by selecting the data 319 when she/he wishes to execute the decoding or by selecting the data 339 when she/he does not execute the decoding, with the control of the selector 40 through the operating system 3, thereby enabling to avoid the ill influence due to the phase jump onto the input data 100 which is under the operation of service.

[0055] Further, the memory 31 of the delay output portion 30 in FIG. 1 and the memory 11 of the error correction process portion 10 can be provided in common. In such instance, the input 339 to the selector 40 is obtained by dividing the output 311 from the memory 11.

[0056] An another embodiment of the decoder according to the present invention is shown in FIG. 2. Here, FIG. 2 is the block diagram of the decoder.

[0057] The present embodiment is similar to that shown in FIG. 1, in the structure and the operation thereof, and only differs from it in an aspect that a selector 50 is provided at a front stage of the selector 40. That difference will be described in more detail below. The selector 50 receives the data 329 and 339 from the through output portion 20 and the delay output portion 30, respectively, and select one of them upon the basis of the external control signal 410 so as to output it to the selector 40 as the data 59 thereto. Here, the selector 50 does not treat any delay in the inside thereof, in the same manner as in the selector 40.

[0058] The selector 40 receives the data 319 and 59 from the error correction process portion 10 and the selector 50, respectively, and it selects one of them upon the basis of the external control signal 400 so as to output it as the data 200. Namely, the selector 50 controls the selection of whether the delay operation should be treated or not when the decoding operation should not be executed, while the selector 40 only controls the selection of whether the decoding operation should be executed or not.

[0059] From this, the operator outside can control the selector 40 with ease, and also she/he can obtain the continuous data as the output data 20 without such the phase jump, even when exchanging the decoding operation between ON and OFF thereof on the input data 100, only by controlling through the operating system 3, so that the data 339 is selected in advance by the selector 50, thereby enabling to avoid the ill influence due to the phase jump upon the input data 100 which is under the operation of service thereof.

[0060] An other embodiment of the decoder according to the present invention is shown in FIG. 3. Here, FIG. 3 is the block diagram of the decoder.

[0061] The present embodiment is similar to that shown in FIG. 2, in the structure and the operation thereof, and it only differs from it in an aspect that the selector 40 can be controlled automatically. That difference will be described in more detail below.

[0062] First, the input data 100 is divided into four (4) series, i.e., the three (3) series of the data 310, 320 and 330, and a data 360 in addition thereof, and the data 360 is inputted into a coding identifier portion 60. This coding identifier portion 60 decides whether the inputted data 360 is coded or not, so that it outputs the result thereof as a coding identification result 369. Namely, when it is decided to be coded, the coding identification result 369 is outputted so that the selector 40 selects the data 319, while when it is decided not to be coded, the coding identification result 369 is outputted so that the selector 40 selects the data 59. The decision in the coding identifier portion 60 is made on the basis of an identifier given when it is coded in an encoder outside corresponding to the present decoder. Namely, the encoder not shown in the figure inserts an identification pattern corresponding to the coding into a predetermined position in the vacant area where no information resides as the identifier, for each coding block. For example, in a case where the identifier is 1 byte, (AA)hex is inserted when it is to be coded, while (00)hex is inserted when not to be coded.

Here, ( )hex is an expression by hexadecimal notation. The coding identifier portion **60** of the decoder is able to decide whether it is coded or not by reading this identifier into.

[**0063**] With this, the operator outside can obtain the continuous data with no such the phase jump as the output data **200**, irrespective of the coding condition of the input data **100**, without paying her/his attention to whether it can be decoded or not, since the decoding operation/non-decoding operation is automatically selected depending upon the coding condition of the received signal, thereby enabling to avoid the ill influence due to the phase jump upon the input data **100** which is under the operation of service thereof.

[**0064**] Further, in the decision in the coding identifier portion **60** can be added a protection condition in addition thereto. For example, when the pattern corresponding to the "coding" (for instance, the (AA)hex in the above-mentioned example) is detected continuously by n times or more, it is decided to be coded. Or, alternatively when the pattern corresponding to the "non-coding" (for instance, the (00)hex in the above-mentioned example) is detected continuously by m times or more, it is decided to be not coded. And if it is not in any one of those cases mentioned above, the condition being decided just before is maintained, and so on. Here, the n and m are arbitrary natural numbers, respectively, and they can be equal to each other.

[**0065**] Further, setting the value m to be smaller than n in the above protection condition, it is possible to immediately decide the non-coding condition so as to turn OFF the decoding operation, thereby reducing the period during when the miss correction may occurs therein.

[**0066**] A further other embodiment of the decoder according to the present invention is shown in **FIG. 4**. Here, **FIG. 4** is the block diagram of the decoder.

[**0067**] The present embodiment is similar to that shown in **FIG. 2**, in the structure and the operation thereof, but it differs therefrom in an aspect that the selector **40** can be controlled automatically on the basis of the error rate of the received data. That difference will be described in more detail below. First of all, it is assumed that the input data **100** includes BIP byte or CRC byte, each being an error detection code for detecting the error number. For example, in the SDH or the SONET signal, the number of parity inconsistencies can be detected by parity calculation by using B1 byte or B2 byte, and also the error number and the error rate can be obtained therefrom.

[**0068**] This input data **100** is divided into four (4) series, i.e., the three (3) series of the data **310**, **320** and **330**, and a data **390** in addition thereof, and the data **390** is inputted into an error rate calculation portion **90**. The error rate calculation portion **90** calculates out the error number of the input data upon the basis of the error detection codes of the input data and converts it into the error rate so as to output it to the selector controller portion **95** as a detected error rate **391**. The selector controller portion **95**, in which a threshold value is setup in advance by the external control signal **440**, compares the threshold value of the error rate to the detected error rate, so that a selector control signal **395** is outputted for controlling the selector **40**. The selector control signal **395**, for example, selects the data **319** from the error correction process portion **10** when it is less than the threshold value, while selects the data **59** from the selector **50** when it exceeds the threshold value, or vice versa.

[**0069**] Also, it is possible to use the forward error correction codes in place of using the error detection codes for the purpose of calculation of the error number. In this case, since the error number can be seen easily from the error estimation result **313** as the result of the calculation by the error calculating portion **13**, it is enough for the error rate calculating portion **90** to convert it into the error rate.

[**0070**] Further, in place of the above-mentioned error rate, it is also possible to detect the error bit number or the error block number, so as to control the selector **40** by comparing it with the threshold value.

[**0071**] According to the present embodiment, the operator outside can obtain continuous data as the output data **20** without such the phase jump even when she/he exchanges the decoding operation between ON and OFF thereof on the input data **100**, only by controlling the selector **50** in advance so that the data **339** is selected thereby, i.e., the execution or non-execution of the operation is automatically selected depending upon the error rate of the received signal, without paying attention to the fact whether the decoding can be executed or not, thereby enabling to avoid the ill influence due to the phase jump upon the input data **100** which is under the operation of service thereof.

[**0072**] However, in the each of the embodiments shown in **FIGS. 2 through 4**, the memory **31** of the delay output portion **30** and the memory **11** of the error correction processing portion **10** may be provided in common. In this case, the input **339** into the selector **50** is divided from the output **311** of the memory **11**.

[**0073**] An embodiment of the encoder according to the present invention is shown in **FIG. 5**. Here, **FIG. 5** is the block diagram of the encoder.

[**0074**] In the present embodiment, there is shown the structure of the encoder of "outside", which is explained in the embodiment shown in **FIG. 3**. The structure of the encoder **2** of the present embodiment differs from that of the decoder **1**, being as the embodiment shown in **FIG. 2**, in aspects that the error correction process portion **10** is replaced by a coding process portion **70**, and that an identifier insertion portion **80** is further added therein. The differences will be described in more detail below. However, in the explanation of the present embodiment, the reference numerals are given in similarity to the circuitry of the decoder **1** mentioned in the above. Therefore, the input **100** and the output **200** of the equipment are given with the same reference numerals. However, the input and output of the encoder equipment and those of the decoder equipment are, of course, different to one another in the signals.

[**0075**] While dividing the data **370** into two (2) series thereof and storing them into the memory **71** one by one, which data is dividedly inputted from the input data **100**, the coding process portion **70** of the encoder **2** inputs it into a check bit calculation portion **72**. The data stored in the memory **71** is read out after passing the constant time "Tk" from the time of writing thereof so that it comes to be the same data series of the original data **370** and is outputted to the selector **73**. The check bit calculation portion **72** calculates out the check bits on the basis of the inputted data **370** and stores the result thereof, and further it outputs the check bit result **372** to the selector **73** one by one, in synchronism with the check bit area within the corresponding coding block among the data series outputted from the memory **71**.

[0076] Further, the check bit calculation portion 72, as is well-known in the art, executes division by a generated polynomial, and the check bit result 372 is the remainder by the division, being outputted in an order from the coefficient at the higher order side thereof in sequence. The selector 73 outputs the data 371 inputted as it is, as the data 379, at the timing of the areas except for the check bit, while it outputs the data 372 as the data 379 at the timing of the check bit area.

[0077] Here, when storing the check bit for coding into the corresponding coding block, it is enough that the "Tk" is equal or greater than a time difference  $T_{k_{min}}$ , from the time period when the check bit area appears first within the coding block until the time point when the last bit to be coded appears within the coding block. FIG. 6 shows the manner in which the delay  $T_{k_{min}}$  is generated. Since the calculation of the check bit is completed at the time point when all the bit values in the coding block are inputted, it is possible to minimize the delay in coding by beginning the output of the check bit at the stage when completing the input of the last bit to be coded (the end of the coding block in FIG. 6) of the coding block.

[0078] For example, in a case where the check bit areas are disposed at the end of the coding block concentrically, the last bit to be coded of the coding clock comes to be just a front of the check bit area, therefore " $T_{k_{min}}$ " is zero (0). Then, the "Tk" may be zero (0), i.e., the memories 71 and 31 are not necessary and they can be constructed with the through connections. This technique of making the "Tk" zero (0) is well-known, in general.

[0079] Also, in a case where the check bit for coding is stored into the coding block following the said coding block by shifting it one by one, though only the check bit is delayed by one (1) coding block, there is no necessity to delay the data except for the check bit, then the "Tk" may be zero (0), i.e., the memories 71 and 31 are not necessary and they can be constructed with the through connections.

[0080] The delay output portion 30 writes the inputted data 330 into the memory 31. And, in the same manner as in the memory 71, the portion reads out it as the data 339 so that it comes to be the same data series of the original data 330 after passing the constant time "Tk" from the time of writing. However, if the "Tk" is zero (0), the memory 31 is not necessary, and it also can be constructed with the through connection.

[0081] Operations in the through output portion 20 and the selector 50 are same to those in the decoder according to the embodiment shown in FIG. 2. Further, the operation of the selector 40 is also same to that of the decoder shown in FIG. 2, except that it receives the data 379 from the coding processing portion 70. Namely, in the selector 50, it is selected whether the delay should be dealt with or not when without executing the coding, through the control by the operator outside, and in the selector 40, it is selected only whether the coding operation should be executed or not, through the control by the operator outside.

[0082] A code status identifier insert portion 80 inserts a code status identifier into the area of the identifier which is defined for the each coding block. An status identify pattern generation portion 82 generates pattern signals 382, being different when the coding should be done and when no coding should be done. For example, if the identifier is one byte, the (AA)hex is generated when the coding should be done, while the (00)hex is generated when no coding should

not be done. The selector 81 selects and outputs the input data 340 when the input data 340 from the selector 40 is outside the area of the identifier in the timing thereof, while it selects and outputs the pattern signal 382 from the status identify pattern generating portion 82 when the input pattern 340 is within the area of the identifier in the timing thereof.

[0083] According to the present embodiment, the operator outside can exchange the coding operation between ON and OFF thereof on the input data 100 with ease, and also can obtain the continuous data as the output data 20 without such the phase jump even at the moment when it is exchanged, by controlling the selector 50 in advance so that the data 339 is selected therewith, thereby enabling to avoid the ill influence due to the phase jump upon the input data 100 which is under the operation of service thereof. Further, there can be provide a means for deciding the automatic decoding operation on the basis of the identifier, for the outside decoder which receives the output data 200.

[0084] Further, in the present embodiment, the memory 31 of the delay output portion 30 and the memory 71 of the coding process portion 70 can be provided or used in common. In this instance, the input 339 to the selector 50 is divided from the output 371 of the memory 71.

[0085] FIG. 8 shows the network configuration, into which is applied the management method for transmission network according to the present invention. Each of the nodes shown is either an edge node having multiplexing/demultiplexing function therein, or a regenerating node having regenerating function therein.

[0086] Between the nodes is defined a transmission path, wherein the communication between the nodes may be performed in both-sided direction or in one-sided direction. The transmission network is shown as in a form of a so-called mesh type network here, however it also can be applied to other than that, such as a linear-type network, a ring-type network, a star type network, or a type combining some of them. The transmission system in FIG. 8 is constructed with nodes (hereinafter, described by FEC node) having the encoders and the decoders which are indicated by hatching line in the drawing, and nodes (hereinafter, described by non-FEC node) having no such the encoder and the decoder therein. Also, the error correction is available between the FEC nodes, but unavailable between the other nodes. Of course, all the nodes constructing the network can be the FEC nodes.

[0087] In the present embodiment, as the encoder and the decoder of each of the FEC nodes can be applied to the encoder shown in FIG. 5 and also one of the decoders shown in FIGS. 1 to 4, respectively. However, the encoder and the decoder should not be limited only to such structures as described in those embodiments.

[0088] A network management operator makes setups in selection of the coding, in selection of the execution of the decoding, and in selection of insertion of the delay into each of the FEC nodes, with use of a network management system (NW-OpS).

[0089] In more details, first, in an initial setting, the insertion of the delay for turning OFF the coding and the insertion of the delay for turning OFF the decoding are set to ON. Namely, each of the selectors 50 which are included in the each FEC node is controlled to select and output the data signal 339 from the delay output portion 30. However, this setup operation cannot be performed to the FEC node(s) in

which the decoder shown in **FIG. 1** is applied to, since there is provided no such the selector **50** therein.

[0090] Explanation will be given by referring to **FIG. 9**. Here, **FIG. 9** is a flow chart for explaining steps of the initial setting of the network system.

[0091] First, initialization of parameter is executed, wherein the node number within the network is set to be imax (in **S9-1**). While incrementing a node number *i*, the steps below are repeated until the *i* comes to be the imax. (**S9-2, 3**) Decision is made on whether the node number *i* is the FEC node or not (**S9-4**), and the delay for coding OFF and the delay for decoding OFF are inserted when it is the FEC node (**S9-5**), and further the coding OFF and the decoding OFF are setup (**S9-6**), thereby completing the initial settings.

[0092] After setting up as mentioned above, the settings are made on the ON/OFF selection of the coding and on the ON/OFF selection of the decoding. Here, when it is desired to execute the error correction in any one of the transmission sections, i.e., between the nodes neighboring to each other, after selecting the coding of the node being at the up stream side of the transmission section into ON, the decoding of the node at the down stream side thereof is selected into ON. This is because, if the decoding is turned ON in the node at the down stream side before, the error will occurs until the setting ON of the coding in the node at the up stream side.

[0093] The ON/OFF selection of the coding is setup separately for each FEC node. In more details, the selector **40** of the encoder shown in **FIG. 5**, which is provided in each FEC node, is controlled, so that the data signal **379** from the coding process portion **70** is selected and outputted when the coding is ON, on the contrary to this, the data signal **59** from the selector **50** is selected and outputted when the coding is OFF.

[0094] The ON/OFF selection of the decoding is also setup separately for each FEC node. In more details, the selector **40** of the decoder shown in **FIG. 1** or **FIG. 2**, which is provided in each FEC mode, is controlled, so that the data signal **319** from the error correction process portion **10** is selected and outputted when the decoding is ON. On the contrary to this, it is controlled so that the data signal **59** from the selector **50** is selected and outputted when the decoding is OFF (in the case of applying the decoder shown in **FIG. 2**), or the data signal **339** from the delay output portion **30** is selected and outputted when the decoding is OFF (in the case of applying the decoder shown in **FIG. 1**). However, the present setting cannot be performed for the FEC nodes, in which the decoder shown in **FIG. 3** or **FIG. 4** is applied.

[0095] Now, explanation will be given on this by referring to **FIG. 10**. Here, **FIG. 10** shows a flowchart for explaining the steps of changing or alternating the settings of the coding and decoding in the network system.

[0096] The steps for changing the settings of the error correction between the node *i* and the node *j* will be described below. First of all, when changing from the non-execution (OFF) of the error correction into the execution (ON), the coding of a transmitter of the node *i* opposing to the node *j* is turned ON (**S10-1**). Next, the coding of the transmitter of the node *j* opposing to the node *i* is turned ON (**S10-2**), and the decoding of a receiver opposing to the node *i* is turned ON (**S10-3**). Thereafter, the receiver of the node *i* opposing to the node *j* is turned ON (**S10-4**).

[0097] Next, when exchanging from the execution (ON) of the error correction into the non-execution (OFF), first the decoding of the receiver of the node *i* opposing to the node *j* is turned OFF (**S10-5**). Next, the decoding of the receiver of the node *j* opposing to the node *i* is turned OFF (**S10-6**), and the coding of the transmitter opposing to the node *i* is turned OFF (**S10-7**).

[0098] Thereafter, the coding of the transmitter of the node *i* opposing to the node *j* is turned OFF (**S10-8**).

[0099] As is mentioned in the above, by setting the insertion of delay for the coding and decoding OFF into ON in advance, it is possible to freely control the ON/OFF of the coding and the decoding, without bringing about the phase jump in the signal data, even when the circuit of each transmission path comes to be under the operation of service, thereafter.

[0100] However, the setting steps of the above can be performed successively by the network management operator, or can be installed into the network management system in advance as the form of software thereof. In the case of the latter, if the operator selects whether the error correction should be executed or not between the FEC nodes, for example, the series of the setting operations mentioned above are executed by the program, and so on.

[0101] Further, it is also possible, as the initial setting, to setup the coding into the ON condition for all of the FEC nodes, as well as the delay insertion for the coding and decoding OFF for all of the FEC nodes. In doing so, it is enough to control only the ON/OFF exchange of the decoding for the each FEC node, and it is not necessary to take into consideration the order of the coding control and the decoding control, thereby obtaining simplification in the network management system.

[0102] This will be explained by referring to **FIGS. 11 and 12**. Here, **FIG. 11** shows the flowchart for explaining the steps of initial setting of the network management system, and **FIG. 12** shows the flowchart for explaining the steps of changing in the setting of the coding and the decoding in the network management system.

[0103] Referring to **FIG. 11**, first the initialization is executed on the parameters so as to set the node number within the network into the imax (**S11-1**). While incrementing the node number *i*, the following steps are repeated until it reaches to the imax. (**S11-2, 3**) Deciding whether the node number *i* is the FEC node or not (**S11-4**), the delay for the coding OFF and the delay for the decoding OFF are inserted if it is the FEC node (**S11-5**), and the coding ON and the automatic decoding ON are setup (**S11-6**), thereby completing the initial setting (**S11-7**).

[0104] Steps of changing the settings of the error correction between the node *i* and the node *j* will be described below, by referring to **FIG. 12**. First of all, when exchanging from the non-execution (OFF) of the error correction into the execution (ON), the decoding of the receiver of the node *i* opposing to the node *j* is turned ON (**S12-1**). Thereafter, the receiver of the node *j* opposing to the node *i* is turned ON (**S12-2**). Those orders can be reversed verse visa.

[0105] Next, when exchanging from the execution (ON) of the error correction into the non-execution (OFF), first the decoding of the receiver of the node *i* opposing to the node *j* is turned OFF (**S12-3**). Next, the decoding of the receiver of the node *j* opposing to the node *i* is turned OFF (**S12-4**). Those orders also can be reversed verse visa.

[0106] Further, with applying the decoder according to the embodiment shown in FIG. 3 or FIG. 4 into the decoder of the FEC node, it is not necessary for the network management system or the operator to designate the selection of the decoding for each of the FEC nodes, thereby achieving a very easy and simple network management system in which only needed is the initial setting.

[0107] Also, when the network management system supervises the error rate for each of the transmission sections, the ON/OFF exchange of the coding and the ON/OFF exchange of the decoding for the each FEC node can be setup on the basis of the error rate and/or error number in the corresponding transmission section. For example, the threshold value of the error rate is setup for the network management system and is memorized therein in advance, and the decoding of the corresponding FEC node is set into the ON condition only when the error rate of the transmission section exceeds the threshold value, or into the OFF condition, and so on. However, this control cannot be performed for the FEC nodes into which the decoder of the embodiment shown in FIG. 3 or FIG. 4 is applied.

[0108] An another embodiment of the node according to the present embodiment will be explained by referring to FIGS. 13, 14 and 15. Here, FIG. 13 shows the block diagram for explaining the structure of the node, FIG. 14 the block diagram for explaining the structure of the transmitter, and FIG. 15 the block diagram for explaining the structure of the receiver.

[0109] The present embodiment is a node which is called by add drop multiplexer (ADM) 7 and is applied into a ring network system. An optical signal transmitted from the left-hand side in the drawing (i.e., West side) is converted into an electric signal within the receiver 8-1 and is sent out into a cross connect switch 500. In the same manner, the optical signal transmitted from the right-hand side (i.e., East side) is also converted into an electric signal within the receiver 8-2 and is sent out into the cross connect switch 500. Also, the signal inserted from the distribution side is sent out into the cross connect switch 500 from an interface at the distribution side.

[0110] The cross connect switch 500 sends out the signal into the transmitters 9-1, 9-2 or the interface of the distributor side, depending upon the destination of sending thereof. The signal sent out into the transmitter 9-1 is converted into an optical signal, and is sent out into the transmission path at the left-hand side (West side). In the same manner, the signal sent out into the transmitter 9-2 is also converted into the optical signal and sent out into the transmission path at the right-hand side (East side). The signal sent out into the interface of the distribution side is dropped out by decreasing the transmission velocity thereof.

[0111] The receiver 8 and the transmitter 9 constructing the add drop multiplexer 7 can be exchanged in the execution (ON)/non-execution (OFF) of the coding and execution (ON)/nonexecution (OFF) of the decoding through the control from the operating system 3. This will be explained by referring to FIGS. 14 and 15.

[0112] The transmitter shown in FIG. 14 is constructed with an encoder 2, a frame pattern insertion portion 9-6, and an electric-photo converter portion 9-5. The encoder 2 exchanges the execution (ON)/non-execution (OFF) of the coding through the control from the operation system 3.

[0113] The receiver shown in FIG. 15 is constructed with a photo-electric converter portion 8-5, a clock sampling and

dividing portion 8-6 for extracting a clock from the electric signal, a frame synchronization process portion 8-7 for obtaining frame synchronization, a block phase generator portion 8-8, and a decoder 1 which inputs the data 100 from the frame synchronization process portion 8-7 and the clock from the clock sampling and dividing portion 8-6. The decoder 1 exchanges the execution (ON)/non-execution (OFF) of the decoding through the control from the operation system 3.

[0114] The embodiment of the transmission apparatus shown in FIG. 14 or FIG. 15 is not only applicable to the add drop multiplexer shown in FIG. 13, but is also applicable to, such as a 1:1 transmission. Also, it is applicable to the linear-type network, the ring-type network, the star-type network, and further to the transmission apparatus of combined networks of the plurality thereof.

[0115] The transmission apparatus explained in either one of FIGS. 13 to 15 includes the encoder or the decoder, having a delay circuit therein. Because of this, the phase jump, such as the omission or duplication of the data will not occur when changing over the execution (ON)/non-execution (OFF) of the coding or the execution (ON)/non-execution (OFF) of the decoding.

[0116] With use of the encoder and the decoder according to the present invention, there can be constructed a transmission system, wherein an operator managing the network can easily kept in operation thereof, without necessity of deciding whether the decoding is available for each of the transmission sections, even when the structure of the network becomes complex or altered. Further, according to the present invention, there also can be provided a transmission apparatus and an encoder and a decoder thereof, in which the coding and the decoding can be freely changed or turned to be executed (ON) or not executed (OFF), without such ill influence upon the signals on the circuit under the operation of service due to the phase jump.

What is claimed is:

1. A transmission apparatus, comprising:

a first optical signal receiver which receives a first optical signal transmitted from a first transmission path;

a second optical signal receiver which receives a second optical signal transmitted from a second transmission path;

a first optical signal transmitter which transmits a third optical signal onto a third transmission path;

a second optical signal transmitter which transmits a fourth optical signal onto a fourth transmission path;

an interface for distribution system; and

a cross connect switch which exchanges electric signals from said first and second optical signal receivers and said interface for distribution system, and which sends out them into said first or second optical signal transmitter, or into said interface for distribution system, wherein,

a decoder for error correcting code of said first or second optical signal receiver and an encoder for error correcting code of said first or second optical signal transmitter are independently controllable for each.

\* \* \* \* \*