(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 October 2021 (28.10.2021)

WIPO | PCT

(10) International Publication Number
WO 2021/216600 A1

(51) International Patent Classification:
C01B 17/64 (2006.01) *C01C 1/22* (2006.01)
C01B 21/093 (2006.01) *C01C 1/24* (2006.01)
B01F 3/04 (2006.01)

(21) International Application Number:
PCT/US2021/028230

(22) International Filing Date:
20 April 2021 (20.04.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/015,332 24 April 2020 (24.04.2020) US
63/017,848 30 April 2020 (30.04.2020) US

(71) Applicant: **CLARKE RAJCHEL ENGINEERING, LLC** [US/US]; P.O. Box 2497, Laramie, Wyoming 80273-2497 (US).

(72) Inventors: **RAJCHEL, Marcus**; P.O. Box 2497, Laramie, Wyoming 80273-2497 (US). **RAJCHEL, Olivia**; P.O. Box 2497, Laramie, Wyoming 80273-2497 (US). **RAJCHEL, Sydney**; P.O. Box 2497, Laramie, Wyoming 80273-2497 (US).

(74) Agent: **WITT, Evan**; 36 South State Street, Suite 1900, Salt Lake City, Utah 84111 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,

(54) Title: PROCESS TO PRODUCE AMMONIUM THIOSULFATE

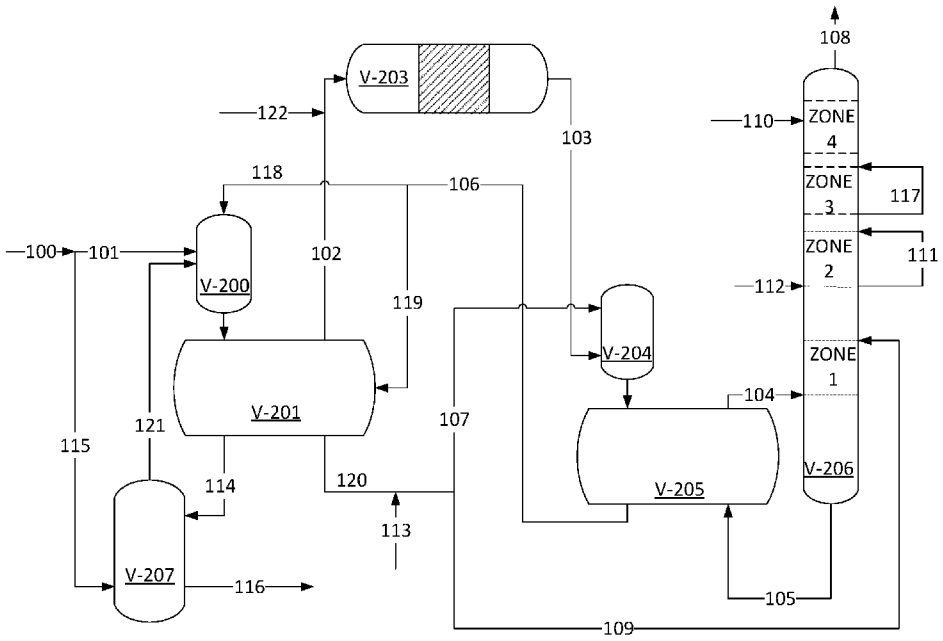


Fig. 4

(57) **Abstract:** A process to produce an aqueous solution containing ammonium thiosulfate from a feed gas containing hydrogen sulfide (H_2S) and ammonia (NH_3). Sufficient separation of feed gas H_2S from NH_3 is achieved by controlling individual NH_3 and H_2S absorption mass-transfer rates in a single co-current stage, whereby a first gas contacts a first liquid containing ammonium bisulfite (ABS). Substantially more NH_3 is absorbed than H_2S, converting ABS to diammonium sulfite (DAS). A portion of DAS reacts with a sufficiently small portion of H_2S to produce ATS and leaves as a second liquid stream. A larger portion of H_2S leaves as a second gas stream. The second gas stream is oxidized to sulfur dioxide (SO_2) comprising a third gas stream. The third gas stream contacts the second aqueous stream in a second contact stage whereby DAS in the second liquid stream is converted to ABS and returned to the first contacting zone.

WO 2021/216600 A1

[Continued on next page]

KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

PROCESS TO PRODUCE AMMONIUM THIOSULFATE

TECHNICAL FIELD

[0001] This process is in the field of ammonium thiosulfate (ATS) production from a gaseous process feed stream containing an arbitrary mixture of hydrogen sulfide gas (H_2S) and ammonia gas (NH_3) and water vapor arising from, for example, a typical refinery sour water stripper (also known as "Sour Water Stripper Gas" or SWSG).

BACKGROUND

[0002] Certain byproduct/waste gas streams produced by, for example, oil and gas refining processes contain mixtures of hydrogen sulfide gas (H_2S), ammonia gas (NH_3), water vapor and small quantities of other non-reactive gasses such as carbon dioxide gas (CO_2). Hydrogen sulfide and ammonia, being poisonous and/or greenhouse gases, cannot be vented to atmosphere and therefore must normally be removed and treated before being discharged as refinery effluents. Common methods of removing hydrogen sulfide include: (1) Chemical solvent processes that react with acid gasses in a reversable acid-base neutralization using regenerable reagents such as di-ethanolamine (DEA) or methyl-di-ethanolamine (MDEA), (2) Physical Solvent Processes that do not react with the gasses, and that are generally less energy intensive than chemical solvent processes. These include those such as Universal Oil Products' (UOP) Selexol Process, Fluor's Fluor Solvent (Propylene carbonate) process, hot potassium carbonate pressure-swing processes such as CATACARB. These H_2S recovery processes are normally combined with a sulfur conversion unit such as a Claus or Modified Claus process that converts the recovered hydrogen sulfide to elemental sulfur. While it is feasible for ammonia gas burned in the reaction furnace of a Claus unit, there are well-known operating problems associated with processing ammonia containing streams in conventional Claus units.

[0003] Other treatment methods produce sulfur directly through (3) wet-oxidation processes that oxidize H_2S to elemental sulfur by passing the gas through a solution containing a regenerable reagent such as the iron-based "catalyst" in Merichem's Lo-Cat process and Shell's Sulferox process, or vanadium-oxide Stretford processes where pentavalent vanadium ($V^{(V)}$) is used to oxidize H_2S to S^0 and the resulting tetravalent vanadium ($V^{(IV)}$) is regenerated by aerating the solution.

[0004] In all the above cases, the presence of ammonia is not addressed. These processes do not capture NH_3. Ammonia cannot be released to the environment; it is a strong greenhouse gas.

[0005] A class of treatment processes, including the method of the present invention, rely on the well-known chemistry involving ammonia, reduced sulfur, usually S^0 or H_2S, and sulfur dioxide (U.S. Patent No. 3,431,070, et al.) for producing ATS.

[0006] The challenge in treating a mixed feed gas stream to produce ammonium thiosulfate lies in the requirement to separate (or reject) sufficient H_2S from the feed stream in the ATS-producing step while absorbing substantially all of the feed NH_3 so that the rejected H_2S can be used to produce the aqueous ammonium bisulfite and diammonium sulfite (ABS/DAS) containing reagent required for the ATS production reaction.

[0007] Some of the mixed feed-to-ATS processes rely on first separating NH_3 from H_2S using tall, multi-stage sour water stripping towers that are quite capital intensive. After the separation of the feed components, the feeds are further processed and re-combining in a separate ATS producing process.

[0008] Other proposed processes have attempted, but have failed, to eliminate the above NH_3-H_2S separation process and its associated equipment. These other processes instead attempt to treat the mixed feed by effecting a preferential absorption of NH_3 over H_2S in an ATS-producing step. Previous technological approaches for treating the mixed feed have all generally failed in this critical step owing to their use of some form of counter-current packed/trayed tower for gas-liquid contacting.

[0009] To clarify, the challenge in achieving preferential absorption in this first contacting step is the requirement that substantially all ammonia must be recovered through reactive absorption with ABS contained in the absorbing solution, creating diammonium sulfite (DAS). At the same time in this first contacting step, no more than 26% and 32% of the feed H_2S can be absorbed into the solution where its reaction with ABS and DAS converts it to ATS. The balance of non-absorbed H_2S would then be burned to make sulfur dioxide (SO_2), then the SO_2 would be used to create "new" ABS, and this new ABS would replace the ABS consumed by H_2S absorbed in the first contacting step. However, typical, industry standard counter-current packed or trayed column operation does not lend itself to such objectives since the counter-current effect uses multiple "equilibrium" stages. Each of the stages operate at some reduced fraction of equilibrium (or tray efficiency) and thus require the column to be designed using multiple stages to affect the desired degree of NH_3 absorption. The problem with using towers lies with the objective of their operation: in combination with stage inefficiencies, counter-

current contact in reactive absorption processes favors chemical equilibrium. Column operation where reactive absorption of both NH_3 and H_2S can occur therefore tends to be indiscriminate and leads to excessive absorption of H_2S and over-consumption of ABS and DAS. Moreover, because of the over-consumption of ABS and DAS, the feed gasses stop being absorbed within the process equipment and the ATS Unit stops producing ATS and the process fails.

[0010] In prior art (e.g., as described in U.S. Patent No. 6,159,440), ATS production from refinery sour-gas streams (i.e., H_2S-only and mixed H_2S/NH_3 SWSG) has only been feasible by assuring that no more than about 1/3 of the feed gas to the production unit consist of SWSG and no less than 2/3 of the feed sulfur comes from a substantially NH_3-free (clean) supply of H_2S. The consequence to the process is that 2/3 or more of the stoichiometric ammonia requirement must be fed from an external purchased supply. The impact on both the technical and commercial efficacy to large-scale operations using previous approaches are broad ranging. It is far better, practically and commercially, to apply technology that treats the mixed feed (e.g., SWSG) alone, without any significant requirement for outside reagents.

[0011] It will be appreciated that there is a need in the art for systems and processes for treating a gaseous process feed stream containing an arbitrary mixture of hydrogen sulfide gas and ammonia gas to produce ammonium thiosulfate with no or minimal requirement for outside H_2S and/or NH_3 reagents.

[0012] It would be a further advancement in the art to contact the gaseous process feed stream with a first liquid containing ammonium bisulfite (ABS) under conditions where substantially more NH_3 is absorbed than H_2S.

[0013] The disclosed invention addresses the shortcomings of prior art ATS production by eliminating or substantially reducing the requirements for outside clean H_2S and/or NH_3 reagents. The disclosed methods of the current invention significantly limit absorption of H_2S fed to the first gas-liquid contact stage where ATS is produced while absorbing substantially all of the NH_3 carried with the gaseous process feed stream.

SUMMARY OF THE INVENTION

[0014] The disclosed invention relates to a process for producing ammonium thiosulfate-containing solutions from a feed gas containing a mixture of hydrogen sulfide (H_2S) and ammonia (NH_3). More specifically the disclosed invention produces highly concentrated ammonium thiosulfate (ATS) solutions from an arbitrary feed mixture of H_2S and NH_3 in a

gas-liquid absorption process that includes liquid phase chemical reactions. The produced ATS solutions may be used as a liquid-applied agricultural fertilizer.

[0015] Various embodiments are listed below. It will be understood that the embodiments listed below may be combined not only as listed below, but in other suitable combinations in accordance with the scope of the invention.

[0016] One disclosed aspect of the invention includes a method for making an aqueous solution of ammonium thiosulfate (ATS). The method includes a step of co-currently contacting a first gas feed stream containing hydrogen sulfide (H_2S) and ammonia (NH_3) with a first liquid stream containing an aqueous solution of ammonium bisulfite (ABS) and di-ammonium sulfite (DAS) within a first gas-liquid contact stage. The first gas feed stream and the first liquid stream are contacted under controlled physical conditions to cause the following liquid chemical reactions to occur and to produce a second gas stream and a second liquid stream:

$$NH_3 + ABS \leftrightarrow DAS \quad (1)$$

$$H_2S + DAS \rightarrow AHS + ABS \quad (2)$$

$$2\ AHS + 4\ ABS \rightarrow 3\ ATS + 3\ H_2O \quad (3)$$

[0017] The physical conditions are controlled within the first gas-liquid contact stage to control relative absorption mass-transfer rates for NH_3 and H_2S to favor absorption of NH_3 into the liquid phase and cause reaction (1) and to limit absorption of H_2S into the liquid phase and thereby limit the formation of ammonium hydrosulfide (AHS) in reaction (2) and limit the formation of ATS in reaction (3).

[0018] The physical conditions which may be controlled are selected from a temperature of the first gas stream, a temperature of the first liquid stream, a ratio of feed rates of the first gas feed stream and first liquid feed stream, a concentration of dissolved ABS and DAS in the first liquid stream, pH of the first liquid stream, a first liquid stream buffer capacity, and combinations thereof.

[0019] The second gas stream contains unreacted H_2S and the second liquid stream contains a mixture of DAS, ATS, and ABS.

[0020] A first fraction of the second liquid stream is removed to recover the aqueous solution of ATS.

[0021] The disclosed method may also include the step of oxidizing H_2S in the second gas stream to form SO_2 and produce a third gas stream. The third gas stream containing SO_2 may be contacted with a second fraction of the second liquid stream within a second gas-liquid contact stage to cause the following chemical reaction to occur:

$$SO_2 + DAS \rightarrow 2\ ABS \qquad (4)$$

[0022] A fourth gas stream and a third liquid stream containing ABS and DAS are produced.

[0023] A portion of the third liquid stream may be recycled to the first gas-liquid contact stage as the first liquid stream.

[0024] In an aspect of the disclosed method, the quantity of hydrogen sulfide absorbed in the 1st gas-liquid contact stage may be sufficiently limited so that no more H_2S is hydrolyzed to AHS and then converted to ATS than the maximum amount allowed by the ATS reaction stoichiometry in the 1st gas-liquid contacting stage as defined by the 1st Gas H_2S Absorption/Rejection Ratio, according to:

$$\frac{mols\ H_2S\ into\ 2^{nd}\ Gas}{mols\ H_2S\ absorbed\ into\ 1^{st}\ Liquid} = 1^{st}\ Gas\ H_2S \frac{Rejection}{Absorption} Ratio$$

where, the 1st Gas H_2S Rejection/Absorption Ratio is calculated as:

$$1^{st}\ Gas\ H_2S \frac{Rejection}{Absorption} Ratio = \left[\frac{{}^4/_3\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right) + \left(\frac{C_{B,mass}}{MW_{ABS}}\right) + \left(\frac{C_{AS,mass}}{MW_{AS}}\right)}{{}^2/_3\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right)}\right]$$

where in the 1st Gas H_2S Rejection/Absorption Ratio equation: $C_{ATS,mass}$, $C_{B,mass}$, and $C_{AS,mass}$ is in units of mass of solute-per-mass of aqueous solution, MW is molecular weight of each in consistent units, such that the quantity of hydrogen sulfide present in the 2nd gas stream, when oxidized to sulfur dioxide, can be converted to aqueous ammonium bisulfite and returned to the 1st gas-liquid contact stage.

[0025] In an aspect of the disclosed method, the H_2S-rich 2nd gas stream is oxidized to provide a 3rd gaseous stream that is rich in SO_2, that is fed together with the DAS-rich 2nd liquid to a 2nd gas-liquid contacting zone where the molar quantity of SO_2 is hydrolyzed with an equal-molar portion of DAS, and converting each species to aqueous ABS, and the effluent liquid of

from the 2nd gas-liquid contact stage comprises the 1st liquid feed for recycle back to the 1st gas-liquid contact stage, and the vapor effluent comprises a 4th gas stream.

[0026] In an aspect of the disclosed method, a separate source of hydrogen sulfide is added to the 2nd gas stream to satisfy the ABS production requirement for the ATS reaction in the 1st gas-liquid contacting stage in the case where the H_2S rejection requirement, as defined by the 1st Gas H_2S Rejection/Absorption Ratio equation, has not been met. Alternatively, a separate source of aqueous ABS may be added to the 1st or 2nd liquid stream, as a substitute for the addition hydrogen sulfide gas.

[0027] In an aspect of the disclosed method, in the case that the 1st feed gas contains a molar excess of H_2S relative to its molar rate of NH_3, whereby the quantity of DAS produced in the 2nd liquid is insufficient for conversion of all SO_2 in the 3rd gas stream to ABS, a separate source of NH_3 may be added to either the 1st or 2nd liquid stream, converting a portion of the stream's ABS to DAS. In an embodiment, the excess H_2S may be split as a purge stream from the 2nd gas prior to oxidation and removed from the process and no separate source of NH_3 is added.

[0028] In the disclosed method, the type of gas-liquid contact stage may be a Venturi-type fume scrubber. In the disclosed method, the type of gas-liquid contact stage may be a co-current contact stage, such as a static mixer.

[0029] In the disclosed method, two or more single stage co-current contactors may be operated sequentially as the 1st gas-liquid contact stage.

[0030] In the disclosed method, the 4th gas stream, containing SO_2 and some NH_3, may be recovered and returned to the 1st or 2nd liquid streams, in a chemically reactive absorption stage using a separate source of ammonia and water as a scrubbing agent, returning an ABS/DAS buffer solution to the process and to prevent SO_2 and NH_3 release in the 5th gas stream to the environment.

[0031] In the disclosed method, the absorption stage may comprise four counter currently organized sequential gas-liquid stages comprising:

a. Zone 1 (bottom) where a portion of 2nd liquid stream is directed to the contact zone and the 4th gas stream flows counter currently through and exits toward Zone 2;
b. Zone 2 (lower-mid) where a packed or trayed and including a trap-tray and circulation pump, anhydrous or aqua ammonia, is added to the circulating solution on pH feedback control, a dilute ABS-DAS solution, overflows the trap tray with the liquor supplementing the liquid feed to Zone 1, and the 4th gas stream leaves the

stage toward Zone 3 and has, comparatively more NH_3 than SO_2, and this section captures most of the SO_2 in the 4th gas stream;

c. Zone 3 (upper-mid) whereby utilizing a packed or trayed section and including a trap-tray and circulation pump, a dilute solution captures NH_3 and very small quantities of SO_2 in the vapor leaving Zone 2, whereby this section removes most NH_3 and SO_2 that would be considered important before environmental release, and the further scrubbed 4th gas stream then flows into Zone 4 and the very dilute liquor becomes the liquid feed to Zone 2; and

d. Zone 4 (upper) where process make-up water is added to a top tray and whereby small, ppm-level quantities of NH_3 and SO_2 are absorbed as the 4th gas stream flows counter currently to the liquid, and the NH_3 and SO_2 are removed to very low concentrations since each are completely hydrolyzed into the make-up water.

[0032] In the disclosed method, the 1st feed liquid buffer concentration may be controlled to between 3 wt.% and 25 wt.% to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S Rejection/Absorption Ratio equation.

[0033] In the disclosed method, the ratio of 1st feed liquid rate to the 1st feed gas rate may be between 15:1 and 75:1 on a weight-to-weight basis in order to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S Rejection/Absorption Ratio equation while simultaneously achieving substantially complete absorption of the 1st feed gas ammonia.

[0034] In the disclosed method, the temperature may be increased to increase the fraction of feed gas H_2S to the 1st gas-liquid contact stage rejected to the 2nd gas stream or decreased to decrease the fraction rejected to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S Rejection/Absorption Ratio equation.

[0035] In the disclosed method, the measured pH of the concentrated aqueous 1st liquid feed may be controlled to be in the range between 5.3 and 5.8, or when measured in a 5,000:1 or greater dilution, a pH between 6.3 and 6.9, such that substantially all of the 1st feed gas ammonia is absorbed in the 1st gas-liquid contact stage and is recovered into the 2nd liquid stream effluent from the stage.

[0036] In the disclosed method, the value of the 1st feed gas ratio of ammonia-to-hydrogen sulfide may be used to modify other process independent parameters of feed flow, temperature, pH, and buffer concentration, to optimize ammonia absorption in the 1st gas-liquid contact stage.

[0037] In the disclosed method, the temperature of the reaction zone may be sufficiently high (i.e. temperatures around 90 °C) to increase the velocity of gas traffic through the contact stage, such that the residence time of the feed streams in the reaction zone is decreased.

[0038] In the disclosed method, during a time interval where the first feed gas flow rate and composition to the first gas-liquid stage are constant and the first liquid feed to the first gas-liquid contactor is also constant, changes in the measured difference between the pH of the liquid feed to the first gas-liquid contactor and the pH of the liquid feed to the second gas-liquid contactor may be interpreted as a change in the buffer concentration, of either liquid stream, in the interval between measurements of the pH difference between the two streams.

[0039] It is to be understood that both the foregoing brief description and the following detailed description are examples and explanatory and are not restrictive of the invention, as claimed. It should also be understood that the embodiments may be combined, or that other embodiments may be utilized and that structural changes, unless so claimed, may be made without departing from the scope of the various embodiments of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] In order that the manner in which the above-recited and other features and advantages of the invention are obtained will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments thereof that are illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

[0041] Fig. 1 is a schematic representation of a pilot-scale apparatus used to test the disclosed process for treating a mixed feed of H_2S and NH_3 to produce ammonium thiosulfate.

[0042] Fig. 2 is a simplified schematic illustrating the process of this invention.

[0043] Fig. 3 is a simplified schematic illustrating the process of this invention with a modification to the liquid flow configuration of the first gas-liquid contact stage

[0044] Fig. 4 is a simplified schematic representation of the apparatus shown in Fig. 2, but with the inclusion of a finishing column to create a higher concentration ATS product.

[0045] Figs. 5-8 illustrate the pH and buffer concentration dependence upon the concentration of NH_3 and SO_2 over 77 °C buffer solutions of ABS/DAS

[0046] Fig. 9 is a chart comparing changes in the buffer concentration of process absorbing solutions during commercial plant start-up for this invention vs. previous technology

DETAILED DESCRIPTION OF THE INVENTION

[0047] The disclosed invention relates to production of ammonium thiosulfate solutions from a feed gas containing hydrogen sulfide (H_2S) and ammonia (NH_3). Sufficient separation of feed gas H_2S from feed gas NH_3 is achieved by controlling individual NH_3 and H_2S absorption mass-transfer rates in a single co-current stage, whereby the feed gas contacts a first liquid containing ammonium bisulfite (ABS). Substantially more NH_3 is absorbed than H_2S, converting ABS to diammonium sulfite (DAS). A portion of DAS reacts with a sufficiently small portion of H_2S to produce ATS and leaves as a second liquid stream. A larger portion of H_2S leaves as a second gas stream. The second gas stream is oxidized to sulfur dioxide (SO_2) comprising a third gas stream. The third gas stream contacts the second aqueous stream in a second contact stage whereby DAS in the second liquid stream is converted to ABS and returned to the first contacting zone.

[0048] Terminology Definitions:

[0049] Ammonium Bisulfite: ABS = $(NH_4)HSO_3$ $MW_{(ABS)}$ = 99.11 kg/kg-mol

[0050] Diammonium Sulfite: DAS = $(NH_4)_2SO_3$ $MW_{(DAS)}$ = 116.14 kg/kg-mol

[0051] Ammonium Bisulfide: AHS = $(NH_4)HS$ $MW_{(AHS)}$ = 51.11 kg/kg-mol

[0052] Ammonium Thiosulfate: ATS = $(NH_4)_2S_2O_3$ $MW_{(ATS)}$ = 148.20 kg/kg-mol

[0053] Ammonium Sulfate: AS = $(NH_4)SO_4$ $MW_{(AS)}$ = 132.14 kg/kg-mol

[0054] Buffer Conc., C_B: Total sulfite buffer concentration, the sum of concentration of both ABS + DAS, expressed as ABS in solution, in units of mass of solute per mass of solution:

$$C_{B,mass} = \frac{kg(ATS) + kg(DAS) \times {MW_{(ABS)}}/{MW_{(DAS)}}}{kg(Solution)}$$

or in moles of solute per mass of solution:

$$C_{B,mol} = \frac{kmol(ATS) + kmol(DAS)}{kg(Solution)}$$

Some practitioners or ATS customers refer to the mass concentration, $C_{B,mass}$, in weight percent by multiplying by 100.

[0055] Buffer Capacity, mC_B: Buffer Concentration multiplied by mass rate of solution, m, in kg/hr of ABS-containing aqueous solution.

[0056] "Neat" pH: The pH that would be measured using as standard laboratory pH for concentrated ABS/DAS/ATS-containing process solutions.

[0057] Dilute pH: pH of an "infinite dilution" of a concentrated ABS/DAS/ATS-containing process solution.

[0058] Essential Aqueous-Phase Chemical Reactions:

[0059] ABS: $SO_2 + DAS \rightarrow 2\ ABS$

[0060] DAS: $NH_3 + ABS \leftrightarrow DAS$

[0061] AHS: $H_2S + DAS \rightarrow AHS + ABS$

[0062] ATS: $2\ AHS + 4\ ABS \rightarrow 3\ ATS + 3\ H_2O$

[0063] Relationship Between Buffer Capacity and pH:

[0064] The buffer capacity for absorbing NH_3 is directly proportional to the concentration of ABS in solution and its pH. The solution pH is used as an indicator of the distribution of ABS and DAS in solution. For dilute solutions, using the literature value for pKa = 6.91, the acid-base equilibrium expression can be re-written in terms of the molar ratio of ABS and DAS concentrations as a function of pH:

$$Ratio\ of\ ABS{:}DAS\ (dilute\ solutions) = R_{dilute} = \left(\frac{ABS}{DAS}\right) = 10^{(6.91-pH)}$$

and as mole-fractions,

$$x_{ABS} = \frac{R}{(1+R)}$$

$$and$$

$$x_{DAS} = 1 - x_{ABS}$$

[0065] This ABS:DAS ratio/pH relationship set forth above is not accurate for the highly concentrated solutions typically found in the process that normally have total dissolved salt concentrations of between 60 to 70 wt.% and are highly non-ideal. Empirically, it has been found for highly concentrated solutions, modifying the value for pKa by (– 1.1 +/- 0.1) gives acceptable estimates of the ratio of ABS:DAS.

$$Ratio\ of\ ABS{:}DAS\ (conc.soln.) = R_{conc.} = \left(\frac{ABS}{DAS}\right) = 10^{(5.81-pH)}$$

[0066] For example, for a typical process solution that measured "neat" at 5.8, the "dilute" expression estimates the ratio of ABS:DAS ≅ 13, but it is not accurate. The above "conc. soln." expression delivers a value of ABS:DAS = 1.0:1, which is very close to the correct value.

Laboratory testing confirms, by performing a 5,000:1 dilution with water on a sample of "neat" solution, the diluted sample will measure close to pH ≅ 6.9, indicating ABS:DAS ≅ 1.0:1, as expected the total normality of dissolved sulfite salts in the diluted sample will fall into the valid range for ideal solution behavior.

[0067] To maximize absorption of NH_3 from the process feed gas according to the disclosed invention, a sufficient excess ABS must be present as buffer capacity in order to accept all feed NH_3 for conversion to DAS and preferably at least 1.5-times the molar feed rate of NH_3.

$$Buffer\ Capacity\ for\ NH_3 = m_{soln} \times C_B \times x_{ABS}$$

where buffer capacity is expressed in appropriate units of moles-per-unit time. ABS can react to absorb ammonia whereas DAS is not useful for ammonia absorption.

[0068] Similarly, for absorption of SO_2, a sufficient excess buffer capacity with regard to DAS for conversion of SO_2 to ABS. Again, the pH of the absorbing solution gives a leading indicator of the ratio of ABS:DAS and the value of $R_{conc.}$ is useful for computing the buffer concentration of DAS, and the buffer capacity for SO_2 absorption can be calculated as follows:

$$Buffer\ Capacity\ for\ SO_2 = m_{soln} \times C_B \times x_{DAS}$$

where buffer capacity is expressed in appropriate units of moles-per-unit time. DAS can react to absorb SO_2 whereas ABS is not useful for SO_2 absorption.

[0069] Description of Test Apparatus (Fig. 1)

[0070] A pilot scale apparatus as shown in Fig. 1 was used to test aspects of the disclosed invention. The apparatus included a feed gas mixing system, a "Venturi Scrubber-type" model absorber, a tail gas scrubber, and instrumentation to measure and control feed/product flows and temperatures. The feed gas bottles of H_2S, NH_3 and N_2 were placed on scales and included pressure control and flow measurement instrumentation. The feed gasses were fed through electric heaters H-50 and H-60 and combined with a feed steam line. The combined gas was then fed to the J1 Eductor. The feed solution was placed in TK-102 on a scale and heated by heating coil E-70. The feed solution was pumped to Eductor J1 via pump P-10. The liquid and vapor from Eductor J1 enter the Vapor/Liquid Disengagement Tank TK-101 with the liquid then draining to the Product Tank TK-103. The vapor produced from Eductor J1 flows to the tail gas Scrubber V-101 to capture any unabsorbed H_2S and NH_3. The Tail Gas Scrubber V-

101 is fed a circulating, pre-prepared buffer solution from TK-105. The buffer solution recirculates in the Tail Gas Scrubber V-101 via Pump P-20. At the end of a test run, the Tail Gas Scrubber is then drained to the Scrubber Effluent Tank TK-104. Effluent gas from the Tail Gas Scrubber is vented to a building scrubber.

[0071] Description of the Apparatus for Implementing the Invention

[0072] The function of this invention is to sufficiently separate hydrogen sulfide from ammonia from a mixed feed gas in a single stage, First Co-current Contact Stage (V-200) using a sulfite-bisulfite containing solution. The co-current contact stage can be comprised from a venturi contact stage, co-current static mixer or other similar single stage reactor. Fig. 2 shows a preferred embodiment of the process in schematic form. The central feature of the process of this invention is the preferential and substantial absorption of the feed gas ammonia to convert ABS to DAS along with a portion of the feed gas hydrogen sulfide that converts a portion of ABS/DAS to ATS in the First Co-current Contact Stage. The quantities of ammonia and hydrogen sulfide absorbed into solution depend on several independent control variables such as absorbing solution pH and temperature, gas and absorbing liquid flow rate, and concentration of the ABS and DAS entering the contact stage. Conditions are controlled to reject sufficient hydrogen sulfide for subsequent combustion to sulfur dioxide that is used to replenish ABS consumed in the First Contact Stage. The SO_2 produced from the rejected H_2S is then re-combined with the absorbed ammonia from the First Co-Current Contact stage in a second reaction zone to produce sulfite reagent required for the ATS reaction.

[0073] Fresh reagent "make-up" water is added to a final counter-current gas/liquid contact stage (referred to as a Vent Scrubber) just prior to the point of discharge of the benign-inert process gasses to the environment. There are three important process functions that the Vent Scrubber serves: (1) Added water is required to control the ATS Product dissolved ammonium salt concentration. In the preferred embodiments, most of the required water is added to the Vent Scrubber since its liquid effluent transfers into the ATS process' circulating streams and becomes part of the ATS Product leaving the system; the quantity of make-up water added is controlled to provide the optimal solution density of the product. (2) Water added to the Vent Scrubber also serves to recover and prevent loss of SO_2 for production of ABS/DAS buffer. Any SO_2 that passes into the Vent Scrubber is recovered and returned to the process as buffer reagent. (3) Counter-current addition of make-up water in the Vent Scrubber, coupled as required with addition of an external source of NH_3, prevents discharge of SO_2 to the environment. The solutions in the Vent Scrubber, being minimally buffered, are sensitive to small quantities of sulfur dioxide in the passing gas stream; to prevent SO_2 from being emitted

to the environment, ammonia may be added to the make-up water in the Vent Scrubber's gas/liquid contacting zones. The vent scrubber pH is maintained at a relatively higher pH of 6.0 or higher in order to prevent SO_2 emissions to the atmosphere.

[0074] Detailed Description of Fig. 2: In a simplified, non-limiting embodiment, Fig. 2 schematically depicts details of a process within the scope of this invention. The feed gas to be treated is stream 101. Stream 101 is comprised of H_2S and NH_3 gas with some amount of non-reactive gases such as CO_2 or water vapor. Stream 101 is first contacted in the first gas-liquid stage, V-200, with liquid stream 118. The temperature of stream 118 is controlled for optimum absorption of NH_3 while limiting absorption of H_2S according to the methods of this invention, by first passing stream 106 through a heat exchanger, typically using air or cooling water as the cooling medium; if required, the medium may be changed to provide heating. Stream 106 is a relatively lower pH stream containing a relatively high buffer strength, for example C_B > 6.0 wt.%, a portion of which is consumed by absorbed H_2S to make ATS while another portion of the buffer's ABS is converted to DAS by absorbed NH_3. The Stream 106/118 pH is measured using a temperature-compensated process pH analyzer (pH-2). The liquid leaving V-200 falls into vessel V-201 having a higher pH and with a higher ratio of DAS:ABS: it is then combined with stream 115. A portion of the solution leaving V-201 is removed as the aqueous ATS liquid product of the process as stream 117 with the balance of the liquid exiting as stream 116. The pH of stream 116 is elevated relative to stream 114 and its pH is measured using a temperature compensated process pH analyzer (pH-1). Changes in the differential of pH measurements by pH-1 and pH-2 may monitored as a measure of changes in the buffer strength of the circulating solutions according to methods of this invention; an increase in the measured difference between pH-1 and pH-2 indicates decreasing buffer strength whereas a decrease in the differential indicates increasing buffer capacity; decreasing buffer concentration can be corrected by adding a flow of pure H_2S via stream 122 to produce additional SO_2 and NH_3, either anhydrous or aqua ammonia, can be added to adjust Stream122 to its target pH. The rejected H_2S gas leaves V-201 as stream 102, which is fed to a burner, V-203, where H_2S is oxidized to SO_2. Stream 116 leaving V-201 and carrying with it NH_3 recovered in V200, having a higher pH solution and higher ratio of Di-ammonium Sulfite, is split to provide stream 107 and stream 109. The SO_2 containing stream 103, is then fed to a second reaction zone, V-204 for contact with stream 107. In V-204, SO_2 reacts with DAS to create new ABS, lowering the pH of the solution that from V-204 into vessel V-205 where it is combined with stream 105. The solution leaves V-205 as stream 114. A portion of stream 114 is split as stream 106, according to the methods of the invention, to the first reaction zone V-200, with the balance

flow comprising stream 115 being directed to V-201. Relatively small amounts of SO_2 and NH_3 gas in stream 104 feeds V-206 and are recovered by first scrubbing with stream 109 solution in a lower scrubbing section and then scrubbed with fresh make-up water in a second, upper scrubbing section. The scrubbing solution collected and leaving the bottom of vessel V-206 as stream 105 is a relatively dilute mixture of ATS, ABS AS, and water and is combined with the V-204 effluent and providing the proper degree of dilution, ultimately to achieve the proper final concentration of the ATS Product leaving as Stream 117. Stream 110 is a make-up water stream fed to V-206 in a quantity that controls the density/concentration of the circulating and product solutions and therefore, final ATS Product concentration. Stream 108 is clean treated gas for discharge to the environment. Stream 111 is a circulation loop of mostly clean water to monitor pH to achieve optimum control of emissions. The pH of Stream 112, referred to as the "upper pump around loop" is controlled with relatively small quantities of additional NH_3 (aqua or anhydrous) for the purpose of ensuring that the solution in the upper pump-loop has adequate capacity for neutralization of any SO_2 in the gas before it is vented to the environment as stream 108.

[0075] Detailed Description of Fig. 3: In another non-limiting embodiment, depicted in Figure 3, Stream 317, containing an ABS-rich solution resulting from the second gas-liquid contact stage is split as stream 306 in a quantity dictated by practice of the methods of this invention and admitted into V-401 with balance of the solution being directed to and mixed with solution leaving V-401 to produce stream 315.

[0076] The solution in stream 306 mixes with the liquid in V-401. A portion of the solution leaving V-401 as stream 314 is pumped, with a small portion having been withdrawn from Stream 319 as the liquid ATS Product of the process, to V-400. V-400 is the co-current first gas-liquid contact stage as the first liquid stream where it is brought into contact with stream 301, the first gas stream. The gas-liquid mixture leaves V-400 and falls into V-401. Liquid leaving V-401 as Stream 315, in a quantity similar in size to V-401's feed Stream 306, exits and is combined with stream 318 to become stream 320.

[0077] The Fig. 3 configuration distinguishes itself from that of Fig. 2 in that the effluent of the first contact stage is mixed with the liquid contents of V-401, a portion of which is recirculated back to V-400 as stream 314; that is, the first liquid stream contains material that has been previously processed through the first gas-liquid contact stage. In this configuration, the pH of stream 314 is higher than that of the similar stream 118 from Figure 2. The higher pH of the liquid feeding the first gas-liquid contact stage leads to some reduced effectiveness for ammonia absorption over the process of Fig. 2. Importantly, the effect of recycling material

to the first gas-liquid contact stage results in increased conversion of H_2S to ATS over the process depicted in Fig. 2. The resulting paucity of H_2S in the gas leaving the first gas-liquid contact stage, ultimately as stream 302, renders it difficult to satisfy the minimum requirements defined by the 1st Gas H_2S Rejection/Absorption Ratio equation. Whenever this is true, the quantity of ABS required to maintain steady-state operations cannot be produced from the quantity of H_2S in stream 302 and the required amount may be supplemented from an external source such as shown by stream 322, usually a flow of pure H_2S. The inclusion of H_2S from and external supply will normally, by material balance, necessitate further addition of ammonia, either as a liquid or gaseous supply such as shown with Stream 313. In the event that these external reagent requirements are acceptable to the practitioner of this invention, the configuration does provide a benefit to product stream 316, namely that its higher conversion to ATS and elevated pH relative to that of stream 117 in the configuration of Fig. 2 and may provide a commercially acceptable ATS Product solution that does not require further processing.

[0078] The balance of the configuration depicted in Fig. 3, namely H_2S oxidation in V-403, SO_2 absorption in V-404, absorbing solution recycle from V-405, and effluent gas scrubbing in V-406, is substantially similar to that of Fig. 2.

[0079] Detailed Description of Fig. 4: Another non-limiting embodiment is depicted in Fig. 4. The process depicted in Fig. 4 shares many similarities with Fig. 2, but with the inclusion of a finishing stage, V-207, that modifies and improves the final ATS Product solution by reducing the buffer concentration and increasing the ATS content in the solution. The type of equipment used as V-207 can be chosen as from a variety of typical co-current or counter-current gas-liquid contacting systems based upon engineering judgment of the designer. Another difference in Fig. 4 relates to improved gas scrubbing in V-206.

[0080] In the Fig. 4 embodiment, Stream 100 splits into Stream 101 and 115. Stream 101, similar to Fig. 2, is fed to the co-current gas-liquid contact stage V-200. The much smaller Stream 115 is directed to V-207, the finishing gas-liquid contact stage, where it is contacted with absorbing solution from Stream 114. Stream 114 is liquid from V-201, which has nominally the same composition as it does in Figure 2. Stream 116 has a low sulfite buffer concentration liquid resulting from the contact of Stream 114 and 115 in V-207. Un-absorbed feed gasses leaving V-207 are directed to V-200 for further contact with the absorbing liquid from Stream 118.

[0081] Environmental Control of Process Gas Effluents

[0082] Control of the environmentally polluting effluents, NH_3 and SO_2, leaving the process of this invention are strongly dependent upon the understanding of the relationships between pH, temperature, and buffer concentration. The liquid-gas mixture leaving the 2nd gas-liquid contacting stage, where SO_2 has been absorbed into an NH_3-rich liquid, are hot; typically, between 90 °C and 105 °C. The pH is also normally below 6.0, and preferably between 5.5 and 5.7, and the buffer concentration is normally between 6 wt.% and 15 wt.%. Such solutions will exhibit significant concentrations of either NH_3, SO_2, or both in the vapor above the solution.

[0083] The Figs. 5-8 illustrate the pH and buffer concentration dependence upon the concentration of NH_3 and SO_2 over 77 °C buffer solutions of ABS/DAS.

[0084] Using this dataset as an example, a typical 2nd gas-liquid contact stage liquid with a "neat" pH of 5.6 will express a 0.5 vol.% SO_2 vapor concentration in equilibrium with the liquid; far above what could be allowed for release to the environment. Through methods described further by the methods this invention, the design of a vent-gas scrubber can efficiently and effectively reduce the SO_2 concentration to less than 10 ppm at the vent-gas scrubber exit.

[0085] Calculation of Required H_2S Rejection/Absorption Ratio in 1st Gas-Liquid Contact Stage

[0086] The fractional quantity of the feed gas H_2S to absorb in the 1st gas-liquid contact stage for producing ATS-alone is 1/3 of feed H_2S absorbed with 2/3 being rejected. However, since the dissolved components in the product solution of this invention also include other dissolved oxo-sulfur species, namely ABS, DAS, and ammonium sulfate (AS), it follows that the optimal fractional quantity of feed gas H_2S to absorb in the 1st gas-liquid contact stage will always be less than 1/3 of the H_2S entering the process with the feed. The exact ratio of Absorbed-H_2S:Rejected-H_2S in the 1st gas-liquid contact stage is dependent upon both controlled and uncontrolled variables that affect the final composition of the product solution exiting the process. For typical conditions, with the objective of minimizing process requirements for external sources of either NH_3 or H_2S, it is generally preferred that between 68 to 74 mol% of the feed H_2S is rejected for subsequent oxidation. The general equation for the portion of H_2S fed the contact stage that must be rejected to the effluent for oxidation to SO_2/SO_3 is based upon the composition of the liquid effluent ATS/ABS/AS-containing solution, in order to produce such solution is:

$$\frac{mols\ H_2S\ in\ 2^{nd}\ Gas}{mols\ H_2S\ absorbed\ into\ 1^{st}\ Liquid} = 1^{st}\ Gas\ H_2S \frac{Rejection}{Absorption} Ratio$$

$$1^{st}\ Gas\ H_2S\ \frac{Rejection}{Absorption}\ Ratio = \left[\frac{{}^{4}/_{3}\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right) + \left(\frac{C_{B,mass}}{MW_{ABS}}\right) + \left(\frac{C_{AS,mass}}{MW_{AS}}\right)}{{}^{2}/_{3}\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right)}\right]$$

where in the 1st Gas H_2S Rejection/Absorption Ratio equation: $C_{ATS,mass}$, $C_{B,mass}$, and $C_{AS,mass}$ is in units of mass of solute-per-mass of aqueous solution, MW is molecular weight of each in consistent units.

[0087] Implications and outcomes indicated by the Rejection/Absorption Ratio equation include:

[0088] Low Feed Gas NH_3:H_2S Ratio: In the case where the molar content of NH_3 in 1st gas feed stream is lower than the stoichiometric requirement for all aqueous oxo-sulfur anions, and the actual Rejection/Absorption ratio is greater than the calculated requirement, then either an additional, separate supply of NH_3 to make-up for the shortfall is required, or a sufficient portion of the excess quantity of H_2S must be removed from the stream that is to be oxidized.

[0089] When the actual Rejection/Absorption ratio is less than calculated optimum ratio, then insufficient ABS will be produced to sustainably satisfy the ATS reaction stoichiometry from the 1st gas feed stream alone. The concentration of ABS in the circulating solutions of the present invention will fall toward zero unless additional ABS is either made or added to the process. When the actual ratio is greater than the calculated optimum, then ABS will be produced in excess of the requirement to satisfy the ATS reaction stoichiometry, and the concentration of ABS in the process circulating solutions will increase over the course of operation.

[0090] In the case where there is insufficient H_2S in the 2nd gas stream to satisfy the 1st Gas Rejection/Absorption ratio, the shortfall of H_2S may be satisfied with the addition of a separate supply of H_2S fed into the 2nd gas stream, or, a separate supply of aqueous ABS may be equivalently added to, preferably, the 1st liquid stream.

[0091] Under certain operating circumstances, e.g., low pH < 5.3, other oxo-sulfur compounds can be present, such as higher thionates (HT). If there are other such components evident in the product, the equation may be modified to accommodate additional terms according to the stoichiometry of formation, its mass concentration and its MW. In an example, using a nonspecific compound, the 1st Gas H_2S Rejection/Absorption Ratio equation is easily modified to accommodate additional solution components as follows:

$$1^{st}\ Gas\ H_2S\frac{Rejection}{Absorption}Ratio = \left[\frac{{}^{4}/_{3}\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right)+\left(\frac{C_{B,mass}}{MW_{ABS}}\right)+\left(\frac{C_{AS,mass}}{MW_{AS}}\right)+\left(\frac{C_{HT,mass}}{MW_{HT}}\right)}{{}^{2}/_{3}\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right)}\right]$$

where: $C_{HT,mass}$, is the concentration of an arbitrary ammonium oxo-sulfur compound in kg-HT/kg-solution and MW_{HT} is the molecular weight of the same.

[0092] Process Flow: Features of the process of this invention, to be described further below, will be exploited and integrated into a sustainable ATS – producing process that is generally applied as follows:

[0093] A portion of the 1st liquid stream, the size of which is dictated by the methods of this invention, containing an ABS-rich mixture of ABS and DAS is introduced to the 1st gas-liquid contact stage. The balance of the 1st liquid stream is directed to the effluent of the 1st gas-liquid contact stage.

[0094] At the point of 1st gas feed stream introduction, substantially all feed ammonia is reactively absorbed into the 1st liquid stream solution, using co-current gas-liquid contacting equipment, such as a venturi fume scrubber or static mixer, converting a portion of its ABS to DAS, enriching its concentration with newly-formed DAS.

(1) Hydrolysis of NH_3 with ABS: $NH_{3(aq)} + ABS \leftrightarrow DAS$

[0095] Simultaneously with NH_3 absorption, a 1st portion of H_2S in the first gas feed is absorbed into the 1st liquid stream solution, with the degree of absorption controlled by the methods of this invention, to satisfy the stoichiometric requirements defined by the "1st Gas H_2S Rejection/Absorption Ratio" equation. The liquid effluent from the 1st gas-liquid contact stage comprises the 2nd liquid stream buffer solution. The absorbed H_2S is hydrolyzed as ammonium bisulfide, AHS, within the 1st contact stage by consuming an equal-molar portion of DAS in the 1st liquid stream buffer solution, converting the portion of DAS to ABS.

(2) Hydrolysis of H_2S with DAS: $H_2S + DAS \rightarrow AHS + ABS$

[0096] The hydrolyzed sulfide reacts with two equal-molar portions ABS in the 1st liquid stream buffer solution to produce ammonium thiosulfate.

(3) ATS Reaction 1st contact stage: $AHS + 2\ ABS \rightarrow 1.5\ ATS + 1.5\ H_2O$

[0097] The solution leaving 1st gas-liquid contact stage is combined with the unused portion of the 1st liquid stream solution, becoming the 2nd liquid stream buffer solution. The 2nd liquid stream buffer solution is rich in DAS as compared to the 1st liquid stream buffer solution owing to absorption of NH_3 from contact with the 1st gas feed. The quantity of newly-formed DAS in the 2nd liquid stream solution will have been partially depleted by reaction with the absorbed portion of H_2S from the 1st gas feed.

[0098] The gas phase that exits the 1st contact stage contains the non-absorbed portion of H_2S from the feed gas, and leaves as 2nd gas stream that has been substantially depleted of the feed gas NH_3.

[0099] Hydrogen sulfide in the 2nd gas stream leaving the 1st gas-liquid contact stage is then oxidized in a reaction furnace, providing a 3rd gas stream, comprised predominantly of SO_2, water vapor and unreacted air. The 3rd gas stream is then combined with the DAS-enriched 2nd liquid stream buffer solution in a 2nd gas-liquid contacting stage. The SO_2 in the 3rd gas stream is absorbed into the 2nd liquid stream buffer solution and hydrolyzed in an acid-base neutralization with an equal molar quantity of DAS to form a two-molar quantity of ABS in solution.

(4) SO_2 Hydrolysis to ABS: $SO_2 + DAS \rightarrow 2\ ABS$

The solution leaving the 2nd gas-liquid contact stage has a composition that matches the quantities of ABS and DAS that comprise the 1st liquid stream buffer solution.

[0100] The solution leaving the 2nd gas-liquid contact stage, comprising the 1st liquid stream buffer containing solution is directed the 1st gas-liquid contacting zone, completing a recirculating ABS/DAS-containing buffer solution recycle loop and the process continually repeats from (a) above.

[0101] Exiting the recirculating process, by principles of material balance, a portion of the 2nd liquid stream must be withdrawn as a 3rd liquid stream as the intermediate or final product of the process of this invention. The 3rd liquid stream product will typically have a buffer concentration of between 5 wt.% and 10 wt.%.

[0102] A separate, optional 3rd gas-liquid contact stage can serve to refine the 3rd liquid stream to provide an improved product to by lowering the buffer concentration and increasing the final product ATS concentration by contacting the product with a small portion of the 1st feed gas. Sufficient 1st gas feed is added to the stage to reduce the buffer concentration to the typical agricultural product specification of between 1 wt.% and 2 wt.%.

[0103] A skilled practitioner of the methods of this invention should recognize that any deficiency found in the quantities of feed gas H_2S or NH_3 required to satisfy the stoichiometry of the underlying chemical reactions may be supplemented with external supplies of the deficient component, either NH_3 or H_2S.

[0104] The gas stream leaving the 2nd gas-liquid contacting stage, comprising a 4th gas stream is composed substantially of nitrogen, oxygen, water vapor, and quantities of either or both SO_2 and NH_3; with SO_2 typically being the larger fraction. Depending upon the chosen set of conditions in the contact stage, the SO_2 may be present in small concentrations, but that nonetheless require removal before discharge to environment, or, the quantities may be large enough to be important to the process; that is, if the SO_2 leaving the 2nd gas-liquid contact stage were not returned to the circulating 1st or 2nd liquid stream solutions, the criteria defined by the 1st Gas H_2S Rejection/Absorption Ratio equation would no longer be met and the process will fail due to insufficient buffer capacity.

[0105] Therefore, the 2nd gas-liquid contact vapor effluent is normally directed to counter-current scrubbing, typically a packed or trayed tower, to remove SO_2 and NH_3 to trace quantities prior to being vented to the atmosphere; here referred to as a "Vent Scrubber". Pure water, required to provide for an aqueous ATS product, is generally added to the top of the Vent Scrubber so that it can act as a final gas-scrubbing agent. The design of the tower itself can follow any of a number of general chemical engineering guidelines. Scrubbing with water alone is ineffective since small quantities of SO_2 will significantly acidify pure water and much or most of the SO_2 will pass through.

[0106] To accomplish these objectives, an amount of NH_3, either as anhydrous or aqua-ammonia, is normally added in a section of the Vent Scrubber to provide a reactive and complete absorption of SO_2. The pH of the solution leaving the section where NH_3 is added is maintained in the range between about 5.8 and 6.6.

[0107] There are a number of preferred embodiments. One preferred embodiment includes four distinct gas-liquid contact zones:

[0108] Zone 1 (bottom): Trayed or packed section. A portion of DAS-rich 2nd liquid stream solution is directed to the top of the contact zone and the 4th gas stream flows counter currently through and exits toward Zone 2.

[0109] Zone 2 (lower-mid): Packed or trayed section and including a trap-tray and circulation pump. Anhydrous or aqua ammonia, is added to the circulating solution on pH feedback control. Solution, a dilute ABS-DAS solution, overflows the trap tray with the liquor supplementing the liquid feed to Zone 1. The 4th gas stream leaves the stage toward Zone 3 and

has, comparatively more NH_3 than SO_2. This section captures most of the SO_2 in the 4th gas stream.

[0110] Zone 3 (upper-mid): Packed or trayed and including a trap-tray and circulation pump. Solution is very dilute and captures NH_3 and very small quantities of SO_2 in the vapor leaving. This section removes most NH_3 and SO_2 that would be considered important before environmental release. The further scrubbed 4th gas stream then flows into Zone 4 and the very dilute liquor becomes the liquid feed to Zone 2.

[0111] Zone 4 (upper): Trayed section. Process make-up water is added to the top tray. Small, ppm-level quantities of NH_3 and SO_2 are absorbed as the 4th gas stream flows counter currently to the liquid. The NH_3 and SO_2 are removed to very low concentrations since each are completely hydrolyzed into the make-up water.

[0112] Addressing the Consequences of Non-Stoichiometric Feed Gas Composition

[0113] The typical commercial feed gas to the process of the present invention will normally contain a stoichiometric excess of either H_2S or NH_3 required to produce the quantity and composition of components in the concentrated ATS product solution. In the case where the feed is insufficient in NH_3 to satisfy the quantity of sulfur anionic species, there are two recommended choices:

1. Include the required supplemental ammonia from an additional supply stream of either anhydrous NH_3 or an aqua ammonia, or
2. Remove a portion of the H_2S-rich stream leaving the 1st gas-liquid contact stage as a purge stream for processing separately in another process, such as a Claus Unit.

[0114] In the case where the quantity of H_2S in the feed gas is stoichiometrically insufficient to produce the quantity of ABS required for ATS production, there are also two recommended means of addressing the deficiency:

1. Include a separate source stream of H_2S to the H_2S-rich 2nd gas stream effluent of the 1st gas-liquid contact stage prior to oxidation to SO_2, or
2. Include a separate source stream of concentrated aqueous ABS to either the 1st or 2nd liquid streams in quantities that satisfy requirements to enable sustainable process operation.

[0115] Mass Transfer Considerations in the 1st Gas-Liquid Contact Stage

[0116] The technical challenge presented in converting arbitrary mixtures of H_2S and NH_3 to produce solutions of ATS in a from ABS/DAS containing solutions is that, in the 1st gas-liquid contacting zone, sufficient H_2S in the feed gas must be separated (rejected) while absorbing substantially all of the NH_3 in the feed gas. At the gas-liquid interface however,

ABS/DAS containing solutions show no preference for absorbing and hydrolyzing either ammonia or hydrogen sulfide. The challenge is then to provide an environment within the 1st gas-liquid contacting zone where NH_3 absorption is sufficiently preferred over H_2S. The innovations central to the process of the present invention are means to control and optimize individual NH_3 and H_2S absorption mass-transfer rates and to specify the physical configurations of processing equipment that will allow for such control. The inventors point to the two-film model for gas-liquid mass transfer to provide insight.

[0117] Mass Transfer in the Gas Film. In dilute gas phase, the diffusion coefficient for NH_3 is larger than that of H_2S by approximately one-order of magnitude. The principles of two-film gas absorption teach that NH_3 diffusing through an inert gas film will reach the gas-liquid interface at a higher rate than H_2S. The process of this invention takes advantage of the phenomena to create a mass-transfer environment that favors NH_3 absorption over H_2S in the 1st gas-liquid contacting stage.

[0118] Mass Transfer in the Liquid Film. The bulk liquid, containing ABS and DAS in varying quantities, can react with and hydrolyze both NH_3 and H_2S as they are absorbed at the liquid surface, depleting these aqueous reagents in the vicinity of the liquid surface, creating a liquid film resistance around the bulk solution phase of a droplet. By principles of two-film theory, a liquid-phase film mass transfer resistance develops as ABS/DAS are consumed. The reaction exotherm of absorption will raise the temperature to the bubble point if the droplet of the solution is not already at the bubble point as it enters the contact stage. Water vapor is released by the droplet, enhancing the gas-film thickness about the droplet.

[0119] Methods of the Invention to Control of Individual H_2S and NH_3 Mass Transfer Coefficients

[0120] Gas-Liquid Contact Control – Co-current Gas-Liquid Flow Regime

[0121] The critical step in the method of this invention centers within the 1st gas-liquid contact stage and is premised on the requirement that the feed gas and liquid reagents are not allowed to achieve full chemical equilibrium. The objective in the 1st gas-liquid contact stage configuration in the process of this invention is to bring the 1st gas feed and 1st liquid stream together in intimate contact concurrently under conditions that allow sufficient time to absorb substantially all of the feed gas NH_3 but not enough time to absorb more H_2S than required to sustain the process's ABS production requirements. Of the three main reactions occurring in the 1st gas-liquid stage,

(1) $NH_3 + ABS \rightarrow DAS$

(2) $H_2S + DAS \rightarrow (NH_4)HS + ABS$

(3) $(NH_4)HS + 2\ ABS \rightarrow 1.5\ ATS$

Only NH_3 absorption (1) is preferred to go to completion. By taking advantage of co-current contact and in combination with other methods of the disclosed invention, the processing objective of the 1st gas-liquid contact stage can be achieved.

[0122] Effect of Temperature in 1st Gas-Liquid Contact Stage

[0123] For the system where the feed gas is predominantly comprised of H_2S, NH_3, and H_2O vapor, the effect of temperature is strong. Operation at higher temperature leads to higher concentrations of water vapor within the 1st gas-liquid contact stage, increasing the gas-film thickness resistance to gas-phase mass transfer.

[0124] When feed temperature (either gas or liquid) is low enough to allow for condensation water vapor from the feed gas into the feed liquid within the contact stage, the gas phase mass transfer resistance is reduced since all three of main gas components will be condensing/absorbing into the liquid phase. The gas-phase absorption mass transfer coefficients for both H_2S and NH_3 will be comparatively large during this condition since the gas-film will be very thin or non-existent.

[0125] The effect is counterbalanced, to varying degrees, depending upon specific conditions such as the liquid feed flow, ABS concentration, and temperature, owing the reaction exotherm when both NH_3 and H_2S hydrolyze into solution and by the exotherm of the ATS reaction. The thickness of the gas film will increase as the reaction exotherm increases the temperature of the liquid to its bubble-point.

[0126] Increasing the feed liquid temperature to or above the bubble point of the droplet, for example, to 115 °C further enhances the gas-film resistance due to increased concentration of water vapor around the liquid in contact with the gas.

[0127] Effect of Liquid-to-Gas (L/G) Ratio

[0128] Increasing the feed L/G ratio increases absorption mass transfer mainly by reducing the liquid phase mass transfer resistance and supplies more sulfite buffer reagent for absorption per volume of feed gas fed, increasing the concentration of sulfite in the liquid-film and therefore reducing the liquid-phase mass transfer coefficient.

[0129] Changes in the feed L/G ratio change the absorption mass transfer rates for both H_2S and NH_3, but not equally. For a given increase in the ratio, the effect of increased absorption is greater with respect to NH_3.

[0130] Effect of Buffer Concentration in 1st Liquid Feed

[0131] The concentration of buffer (i.e., concentration of both ABS/DAS, expressed as ABS) was treated as an independent variable. Increases in buffer concentrations lead to increased concentrations of sulfite reagent in the liquid film and therefore increase the liquid-phase mass transfer coefficient for both NH_3 and H_2S absorption, but the effect is greater for absorption of NH_3 relative to H_2S.

[0132] Effect of pH in 1st Liquid Feed

[0133] In the range of pH for testing of the 1st gas-liquid contact stage, the pH of the first liquid absorbing feed solution had an effect on NH_3 absorption but showed no measurable effect on H_2S absorption. Changes in the feed absorbing solution pH demonstrates an inverse relationship with mass transfer of NH_3 absorption. As the feed solution pH is decreased, NH_3 absorption increases.

[0134] 1st Feed Gas NH_3:H_2S Ratio

[0135] Absorption of NH_3 in the 1st gas-liquid contacting zone exhibited a modest, but measurable inverse dependence on the ratio of NH_3:H_2S in the 1st feed gas. Higher NH_3:H_2S ratios lead to modestly reduced NH_3 recovery. H_2S absorption was insensitive to this ratio.

[0136] To compensate for changes in NH_3 recovery due to changes in this ratio, other of the independent process variables named here can be adjusted upward or downward.

[0137] Interactions Between Independent Variables

[0138] As expected, the main independent variables show independent effect, but also two-way and even three-way interactions were naturally incorporated into the experimental design. For example, it should be apparent that the effect of sulfite buffer concentration has a direct impact on gas absorption, but the effect of buffer capacity, the product of ABS concentration and feed liquid flow rate is a more meaningful measure and is a two-way interaction between independent variables. The form of the equations that were developed from testing takes this into account.

[0139] Example of Application to Mass Transfer Control

[0140] The following is a non-limiting example of how the methods of this invention may be applied to control individual mass transfer rates for absorption of NH_3 and rejection of H_2S from a mixed feed. In this example the required 1st Gas H_2S Rejection/Absorption Ratio has been computed to be 2.7:1, meaning that about 73% of the feed H_2S must be rejected from the 1st gas-liquid contact stage and it is desired to absorb at least 95% of the feed NH_3 in the liquid. For this example, the values for "H_2S Rejection" and "NH_3 Absorption" have been computed using the respective regression equations described in the "Laboratory Testing" section, below.

[0141] Table 1

Effect of Change in Operating Conditions on NH_3 Absorption and H_2S Rejection	Beginning Condition	Increase Temperature	Increase L/G Ratio	Increase Buffer wt%	Reduce pH	Increase L/G Ratio
Operating State	Initial	(1)	(2)	(3)	(4)	(5)
Wt.% Buffer as ABS	7.0%	7.0%	7.0%	**10.0%**	10.0%	10.0%
Liquid Feed Rate (kg/h)	92,000	92,000	**137,000**	137,000	137,000	**145,000**
Gas Feed Rate (Std. m^3/hr)	2,550	2,550	2,550	2,550	2,550	2,550
L/G (kg/h)÷(Std. m^3/hr)	36.1	36.1	53.7	53.7	53.7	56.9
pH of Feed Liquid	6.00	6.00	6.00	6.00	**5.80**	5.80
Temperature Liquid Feed (°C)	77	**85**	85	85	85	85
H_2S Rejection in 1st Contact	**66%**	86%	80%	74%	74%	**73%**
$\Delta(H_2S)$ on Changed Condition		20%	-5%	-7%	0%	-1%
NH_3 Absorption in 1st Contact	**87%**	57%	75%	87%	95%	**99%**
$\Delta(NH_3)$ on Changed Condition		-30%	18%	12%	8%	4%

[0142] Table 1 depicts a progression of operating changes, proceeding from the left column to the right, where in the initial operating state, the "Beginning Condition", has a constant sour water stripper gas (SWSG) feed gas rate of 2,550 standard-m^3/hr (SCMH) is fed to a first gas-liquid contactor (e.g., venturi fume scrubber) and where it contacts a liquid feed that has been co-currently sprayed into the reaction zone at 92,000 kg of absorbing solution per hour (kg/h), having a buffer concentration, C_B, expressed as 7.0 weight-percent of solution (wt.%), a feed temperature of 77 degrees Celsius (°C), and an undiluted measured pH of 6.0. For this example, the SWSG feed is assumed to have an NH_3:H_2S ratio of 1.0 : 1. The target feed gas H_2S rejection in the 1st Gas-Liquid contactor has been estimated by the Required H_2S Rejection-Absorption Ratio equation, to be 73%. In this non-limiting example, to achieve the required H_2S rejection and to maximize NH_3 absorption through application of the methods of this invention, one could follow a progression such as follows:

(0) In the Beginning Condition, the H_2S rejection is lower than desired. Operators of the process would understand this since the buffer concentration would have been continuously decreasing. Also, NH_3 absorption is lower than desired, and operators would understand this since requirements for addition external NH_3 would be elevated.

(1) Advance to Operating State (1): Increase the operating temperature in order to increase the degree H_2S rejection. The result is that H_2S rejection is increased from 66% beyond its target value to 86% and NH_3 absorption efficiency has gotten worse with only 57% recovered into the liquid. At this time, operators

would notice that the decline in buffer concentration had reversed and was now increasing, but the requirement for external NH_3 would have increased.

(2) Advance to Operating State (2): Operators increase the liquid rate to increase the L/G ratio to increase NH_3 absorption. The result is that H_2S rejection is still above the target while NH_3 absorption has improved, but is still low, at 75% recovered.

(3) Advance to Operating State (3): Operators increase the buffer concentration to increase NH_3 absorption. The result is that H_2S rejection has decreased, and though is still above target at 74%, the rate of change in buffer concentration would be very slow. NH_3 absorption has improved to 87% and would be indicated by a reduction in the requirement for external NH_3 addition.

(4) Advance to Operating State (4): Operators reduce the feed liquid pH to increase the NH_3 absorption. The result is the H_2S rejection remains the same and slightly above its target value and NH_3 absorption has improved to 95% of the feed recovered into the liquid.

(5) Advance to Operating State (5): Further increase the liquid rate to increase the NH_3 absorption and slightly decrease H_2S rejection. Operators would observe that the buffer concentration will be neither significantly rising nor falling, indicating that H_2S rejection had decreased to the desired target value of 73% of the feed-H_2S. In this example, NH_3 absorption increased to 99% of the feed SWSG NH_3 being recovered into the liquid and operators would observe that the requirement for external NH_3 will have been minimized.

[0143] This above example has been presented to show only a single illustration of how the independent operating parameters may be adjusted to realize the objectives of the method of this invention. The pathways that the practitioner of this invention uses to achieve optimal NH_3 absorption and H_2S rejection are numerous and are dependent upon the specific feedstock and configuration of equipment.

[0144] Method to Monitor Buffer Concentration/Capacity Using Process pH Instrumentation:

[0145] A standard means of monitoring buffer strength during operation of ATS-producing processes is via an analytical laboratory, wet-chemical, iodometric titration of a process sample. It is a labor intensive and time-consuming task where the analytical results may not be received by process operators in a timely manner. Although development of automatic online process analytical tools are available, such instruments are both very expensive and labor and

maintenance intensive. It is, however, possible to use simple and inexpensive inline process pH instrument to indicate buffer concentration directly during process operation.

[0146] During operation, while applying the methods of this invention, and comparing the solutions entering both the first gas-liquid contact stage and that which is entering the second gas-liquid contact stage, the measured values of pH (see figure 2, "pH-1" and "pH-2", for reference) will differ due to their respective ratios of ABS:DAS. Since for a given constant first feed gas rate and composition, the pH of a solution with higher buffer capacity will exhibit a smaller change in pH when it leaves the stage than a that of a first feed solution with a lower pH, it can be inferred by the operator of the process, during continuous operation, that when the difference in pH mentioned above is increasing over the course of operating time, the buffer capacity in the first feed solution is decreasing.

[0147] Observation of this differential in pH can be used by the practitioner of the methods of this invention to identify changes in the performance of the process and apply measures according to the methods of this invention to adjust or correct the performance to achieve the desired results. The differential pH can also be incorporated into an automated action designed to raise or lower the buffer capacity of the circulating solutions by, as a non-limiting example, automatically modulating the flow of H_2S to the oxidizer to provide either additional or reduced quantities of SO_2 for ABS production in the second liquid contact zone.

[0148] Environmental Controls

[0149] With decreases in pH, the equilibrium concentration of SO_2 in the vapor increases. The equilibrium concentration of sulfur dioxide over ABS-containing solutions, SO_2 is a function of: (1) Total sulfite concentration: As total sulfite concentration in solution increases, the equilibrium SO_2 in the vapor phase over the solution increases; (2) Solution Temperature: Increasing temperature increases SO_2 concentration in the vapor phase; and (3) Solution pH: As pH of solution is reduced, the equilibrium concentration of SO_2 in the vapor phase over the solution increases.

[0150] To absorb (capture into solution) substantially all SO_2, the equilibrium concentration of SO_2 over the absorbing solution must be sufficiently low so that SO_2 is not removed with the flowing gas stream as it leaves the process and is discharged to the environment. As required, the gas leaving the 2nd gas-liquid contact stage passes through 2 to 4 additional gas-liquid contact zones arranged in a counter-current series whereby process make-up water is introduced to the last gas-liquid contacting stage.

(1) In one or more of the intermediate stages, as required, ammonia may be added to the stage to enhance SO_2 removal. The dilute ammonium sulfite solution formed

in the contact stages passes back into the process and is ultimately combined with either the 1st or 2nd ABS/DAS containing solution.

(2) In the final gas/liquid contact stage before discharge to the environment, where both the total normality and sulfite concentrations are low (Tot Normality < 0.01 mol/L) it is preferred that the pH of the contacting liquid is maintained above pH values of 6.3.

[0151] The type of gas-liquid contact stage for any, excepting the 1st gas-liquid contact stage, can be any of the designs typical for gas-liquid absorption, including venturi-type spray contactors or counter-current contactors such as trayed or packed columns.

[0152] Laboratory Testing

[0153] Objectives. Laboratory engineering experiments were undertaken to gather data directed toward understanding absorption mass transfer of concentrated mixtures of NH_3 and H_2S in Sulfite Solutions with the objective of determining the conditions that lead to a mass-transfer-rate differential between the absorption of ammonia and hydrogen sulfide.

[0154] Test Work: Apparatus and Independent Variables Measured. A pilot scale apparatus as shown in Fig. 1 was used to test aspects of the disclosed invention. The apparatus consisted of:

(1) Feed Gas Mixing System

(2) "Venturi Scrubber-type" model Absorber.

(3) Tail Gas Scrubber

(4) Instrumentation to measure and control feed/product flows and temperatures.

[0155] Absorption Kinetics Test Matrix: For this work, the largest block of tests were structured in a sixteen-run, 2^5 one-half fractional factorial statistical experimental design (see Table 2, below). This particular matrix was chosen to allow for quantitative measurement of both main-effect variables two-way interactions between all of the independent variables.

[0156] Table 2 -- Direct Neutralization Test Matrix:

Test #	Liquid (kg/h)	H_2S (SCMH)	NH_3 (SCMH)	Nitrogen (SCMH)	Buffer (wt.%)	Steam (SCMH)
1	0.115	1.46	1.46	0.00	14.0%	1.70
2	0.191	1.46	1.46	0.00	8.0%	1.70
3	0.115	1.94	1.46	0.00	8.0%	1.70
4	0.191	1.94	1.46	0.00	14.0%	1.70
5	0.115	1.46	1.94	0.00	8.0%	1.70
6	0.191	1.46	1.94	0.00	14.0%	1.70
7	0.115	1.94	1.94	0.00	14.0%	1.70
8	0.191	1.94	1.94	0.00	8.0%	1.70
9	0.115	1.46	1.46	5.10	8.0%	1.70

10	0.191	1.46	1.46	5.10	14.0%	1.70
11	0.115	1.94	1.46	5.10	14.0%	1.70
12	0.191	1.94	1.46	5.10	8.0%	1.70
13	0.115	1.46	1.94	5.10	14.0%	1.70
14	0.191	1.46	1.94	5.10	8.0%	1.70
15	0.115	1.94	1.94	5.10	8.0%	1.70
16	0.191	1.94	1.94	5.10	14.0%	1.70
17	0.153	1.70	1.70	2.55	11.0%	1.70

Where: liquid is the absorbing solution flow rate in kilograms-per-hour, gas flows are in standard-cubic-meters-per-hour (SCMH), and Buffer is the total sulfite concentration expressed as ABS in weight-percent of the solution.

[0157] The features/characteristics of Table 2, Direct Neutralization Test Matrix are:

[0158] Main-Effect Independent Variables: Feed Liquor Flow Rate (to Scrubber); H_2S Volumetric Flow Rate; NH_3 Volumetric Flow Rate; N_2 Volumetric Flow Rate; and Feed Liquor ABS Concentration.

[0159] Dependent Variables: H_2S Absorption (measured vol. % absorbed) and NH_3 Absorption (measured vol. % absorbed)

[0160] Additional Tests Beyond Matrix Runs: Four replicate experiments at "center-point" conditions (Run #17) were included to provide a measure of statistical variance as well as detect non-linearity in the independent variable responses. One replicate of Run 2 (Run 2A) was performed with "cold" feed solution to measure the effect of temperature on mass transfer. The solution was fed at 51 °C instead of 85 °C as was the case for all other runs. One replicate of Run 17 was run with a higher-pressure (smaller orifice) spray nozzle. Six additional experiments were run two weeks later:

(1) Replicate of Run No. 4 as a measure, with new batch of feed solution experimental variability.

(2) Replicate of Run No. 4 with original feed material, as a measure experimental variability.

(3) Replicate of Run 4 (Run 104) at lower feed solution pH = 5.1.

(4) Replicate of Run 3 (Run 103) at lower feed solution pH = 5.1.

(5) Replicate of Run 6 (Run 106) at lower feed solution pH = 5.1.

(6) Replicate of Run 17 (Run 117-5) at lower feed solution pH = 5.1.

[0161] Operating Method:

[0162] Venturi Feed. In each experimental run, liquid and gas feed systems delivered feeds to the Venturi-type spray-absorber in a once-through fashion. Gas and Liquid feed stream concentrations and flow rates for testing had been calculated to be in the regions of normal

plant operations. Feed gasses were mixed at 85 °C or above to prevent bisulfide plugging. For each run, feed liquids and gasses were fed for six-minutes. Effluent liquids were quickly sequestered away from the reaction gasses and sampled for titration assays. Feed and effluent liquid streams were weighed and assayed for: ATS and Buffer concentrations, pH, and specific gravity.

[0163] Tail Gas Scrubber. Effluent gasses from the Spray Contactor were fed to the Tail Gas Scrubber, consisting of: a 100 mm diameter, 2 m tall column packed with 1.75 m of 9.5 mm polypropylene Intalox packing and irrigated with 7.5 L/min of circulating, nominally 15 wt.% buffer-only-containing solution. Samples of Scrubber solution were taken before and after each run and assayed for buffer concentration and ATS to determine the quantities of H_2S and NH_3 not captured in the Venturi scrubber. It was expected that no significant quantity of either H_2S nor NH_3 will pass through the Tail Gas Scrubber without being absorbed.

[0164] Assay Measurements and Material Balance Analysis: Total Individual Gas Feed quantities for each run were measured both with flow meters and gravimetrically. Spray Scrubber Liquid and Tail Gas Scrubber feed and effluent liquid quantities were measured and assayed (by iodometric titration). A material balance around each run was computed to determine the disposition of the feed gas components.

[0165] Summary of Results:

[0166] Effect of Feed Liquor and Feed Gas Flow Rate. For data analysis, these independent variables were combined into one independent variable representing the liquid-gas-ratio. Numerically it was expressed as (L/G) or kg/h-per-SCMH. The effect on L/G ratio was significant for both H_2S and NH_3 absorption. Increasing the L/G ratio leads to increased absorption of both, but the effect is stronger with respect to NH_3 absorption. The inventors attribute the increase in mass transfer mainly to an increase in the liquid-phase mass transfer coefficient.

[0167] Effect of Presence of Non-Condensable Gas in the Feed Gas. It was found that the presence of another non-condensable gas in the Venturi led to increased rejection of H_2S in the Venturi scrubber. It was determined that the quantities used in the eight runs that included it was far too great, leading to much higher rejection than was anticipated. Though they demonstrated the effect of increasing the mass-transfer resistance, not much analysis time was devoted to these experiments. The inventors attribute the decrease in the mass transfer mainly to a reduction in the gas-phase mass transfer coefficient.

[0168] Effect of Feed Liquor ABS Concentration. Increasing the ABS concentration in the feed liquor leads to increased absorption of both H_2S and NH_3, but the effect is greater for NH_3 over H_2S.

[0169] Effect of Spray Nozzle Type. In this test, a smaller diameter orifice was used to increase the atomization of droplets in the Venturi contactor to determine the effect on mass transfer. There was no measurable effect. No further work was done. The inventors acknowledge that the results of this single test are not definitive.

[0170] Effect of Feed Solution pH. The replicate test runs performed at nominally two different values of feed solution pH showed that H_2S absorption mass transfer was relatively insensitive to variations in pH in the range between pH = 5.0 and pH = 5.7. A modest, but significant, effect on NH_3 absorption mass transfer was observed over the same range.

[0171] Effect of Feed Solution Temperature. In a pair of pilot-scale laboratory tests using the testing apparatus shown in Figure 1, the effect of varying feed liquid temperature was compared. All other independent variables were held constant at the same conditions including the feed gas and liquid flow and compositions and the pH. In one test, the 1st liquid stream or ABS/DAS feed solution temperature was set at 83 °C. In the second test, the feed solution temperature was set at 51 °C. At the higher temperature, 16 mol% of the H_2S was absorbed while at lower temperature, 40 mol% of the feed H_2S was absorbed. When the temperature was lowered, NH_3 absorption increased from 87 mol% to approximately 100 mol%, showing that mass transfer of both H_2S and NH_3 increases with reduced temperature.

[0172] Without being bound by theory, it is believed the increase is attributed to a combination of effects within the contact zone. Reduced temperature leads to an increase in the fraction of all components, H_2S, NH_3, and H_2O, that are all condensing and absorbing into the solution together where in addition, conditions lead to longer residence time in the spray reaction zone for the gas phase in contact with the liquid (due to gas law volume reduction). During this time, the gas-phase mass transfer resistance is very low since the thickness of the gas-film thickness would be non-existent and total mass transfer would only be liquid-phase limited. Heat release upon absorption of all gas-phase components eventually arrests the effect in the within reaction zone due to evaporation of water and establishment of a gas-phase film resistance.

[0173] Effect of Feed Gas NH_3:H_2S Ratio. The matrix included, independently, variable flow rates for each the H_2S and NH_3 flows to the Venturi. This allowed for testing of the effect of the ratio of NH_3:H_2S in the feed gas. It was included since, in commercial practice, this ratio

shows some variability according the composition of refinery feedstocks that lead to the production Sour Water Stripper gas that would feed the process of this invention.

[0174] In the numerical analysis of the NH_3 and H_2S mass transfer response, these variables were combined into a single independent variable, NH_3:H_2S. It was found that H_2S absorption/rejection was insensitive to this ratio while NH_3 absorption showed a modest, but measurable response. Lower values of NH_3:H_2S showed higher NH3 mass transfer rates over higher values. The inventor attributes this to the liquid phase mass transfer resistance; i.e., limited capacity in the liquid film to accept and hydrolyze ammonia.

[0175] Interaction and Non-linearity of Response Variables. Non-linearity: The matrix center-point experiments show that the absorption mass transfer response to the independent variables are non-linear and lead to the selection of a "power law" regression equation. Interaction between independent variables, such as the case for liquid and gas flow rates, and ABS concentration with L/G.

[0176] Effect of Feed Gas Temperature on Reaction Zone Residence Time. As feed gas temperature increases, the residence time in a reaction zone necessarily decreases. The fact of decreased residence time will necessarily reduce conversion of both H_2S and NH_3 hydrolysis reactions at the interface due to gas film resistance limitations. The effect has not been quantified by itself from the laboratory work, but its effect is acknowledged.

[0177] Regression Equations for Absorption of H_2S and NH_3. Two equations were developed. Presented below is the equation for H_2S mass transfer, expressed as the fraction of feed H_2S rejected (not absorbed) in the venturi contactor as a function of liquid and gas flows and concentration of sulfite buffer in the feed liquor:

$$H_2S\ \%\ Rejected = ln\left(2.306(C_B)^{-0.188}\left[1{,}000 \times \left(\frac{L}{G}\right)\right]^{-0.133}\right)$$

Where: C_B is the concentration in weight percent of the solution of $(NH_4)HSO_3$ and $(NH_4)_2SO_3$ expressed as $(NH_4)HSO_3$ (i.e., as ABS) in the venturi feed solution, L is the liquid flow rate to the venturi in kilograms-per-hour, and G is the feed gas flow rate to the venturi in standard-cubic-meters-per-hour.

[0178] Presented below is the equation for NH_3 mass transfer, expressed as the fraction of feed NH_3 absorbed in the venturi contactor as a function of liquid and gas flows, concentration of sulfite buffer, feed solution pH, and the feed gas ammonia-to-hydrogen sulfide ratio:

$$NH_3\ \%\ Absorbed = 10.8\left[1{,}000 \times \left(\frac{L}{G}\right)\right]^{0.705} (C_B)^{0.407}(pH)^{-2.45}(NH_3{:}\,H_2S)^{-0.15}$$

Where: C_B, L, and G are previously defined, pH is the measured "neat" pH of the feed solution containing high concentrations of sulfite buffer and ATS (at solution densities in the range of 1.31 to 1.35 kg/L), and NH_3:H_2S is the molar ratio of each component in the gas feeding the venturi spray contactor.

[0179] The specific regressed coefficients are specific to the apparatus and should not be expected to precisely predict performance in other systems. The value of each constant would be expected to shift upward or downward depending upon numerous system-specific differences in configuration and measurement.

[0180] Example: Commercial Scale Demonstration Current Invention: Conversion of Existing Equipment from Non-Functional For ATS Production from Mixed NH_3-H_2S Feed Gas

[0181] A new commercial-scale facility was constructed for ATS production from a mixed feed of NH_3 and H_2S. The process employed a counter-current packed tower configuration for contacting the mixed feed gas with an ABS and DAS-containing buffer solution with the objective of recovering substantially all of the NH_3 while allowing the bulk of H_2S to pass through unabsorbed. All attempts to start-up and operate this facility using its originally installed technology had failed. Operators of the Unit found they were unable to maintain production of the primary reaction precursor buffer components, ABS and DAS. It became apparent to the operators of this facility that originally installed technology could not work. Furthermore, the final 15 attempts to start-up and operate included addition of an external source of H_2S in order to attempt to support ABS/DAS production within the Unit. Most of these start-up attempts also included an external source of NH_3 for the same purpose. In all cases, the initial starting buffer concentration fell toward zero after 1-4 hours of operation and the process was shut down.

[0182] Following the failed attempts to operate the commercial unit in its original configuration, key elements of the current invention were employed at this facility to enable stable operation via sustainable production of ABS and DAS using the mixed NH_3 + H_2S feed gas alone. A configuration substantially represented in Fig. 2 was used to implement aspects of the disclosed invention at a commercial scale. The NH_3 + H_2S feed gas Stream 100 was introduced to the co-current spray contactor, V-400, and mixed with an ABS/DAS containing absorbing solution, replacing the intended function of the original counter-current packed

tower. The mixed feed of NH_3 and H_2S provided all of the sulfur required to support ABS/DAS production with no requirement for external sources of H_2S.

[0183] Figure 9 compares changes in buffer concentration during the plant start-up interval for the last sixteen of nineteen start-up attempts using the Original Technology approach versus that of the disclosed invention. In the run, labeled "Current Invention Run #6", Fig. 9 shows that stable ABS/DAS buffer concentration was maintained while the buffer concentration fell in all cases where the Original Technology was employed.

[0184] Example: Commercial Scale Production

[0185] Operators of the commercial-scale ATS Production Unit chose to use an embodiment of the current invention that is substantially depicted in Fig. 3. Though this configuration is not as efficient and economical regarding recovery of the mixed feed gas components as the configuration depicted in either Fig. 2 or Fig. 4, the Fig. 3 configuration employed allows operation using existing equipment to gain a substantive benefit regarding chemical reagent costs without requiring further capital expenditures associated with the preferred Fig. 4 configuration. With this Fig. 3 configuration, fresh ABS-rich absorbing buffer solution (Stream 306) is continuously fed to a circulating loop (Stream 314) where it is co-currently spray contacted (using V-400) with the mixed NH_3 + H_2S feed. A small flow (Stream 316) is withdrawn as ATS Product and excess V-400 effluent becomes Stream 315 for recycle to V-404 to provide for further buffer production. Substantially all of the NH_3 and approximately 40% of the H_2S are absorbed from the mixed feed in the V-400 contact stage. Overall, approximately 70% of the total Product sulfur and 55% of the total ATS Product nitrogen is supplied by the mixed NH_3 + H_2S feed gas. Approximately 30% of the total ATS Product sulfur is supplied from an external source of H_2S via Stream 319 and approximately 45% of total ATS Product nitrogen is supplied from an external source of NH_3 via stream 313.

[0186] General Guidelines:

[0187] The first V-200 and second V-204 contact stages both require a mixture of ABS and DAS, however not in the same ratios. The first contact stage V-200 requires a mixture with a higher concentration of ABS and the second contact stage V-204 requires a higher concentration of DAS. The chemical reactions in the first contact stage V-200 creates a higher concentration of DAS which can then be circulated via stream 107 for use to the second contact stage V-204. The chemical reactions in the second contact stage V-204 creates higher concentrations of ABS which can then be circulated via stream 106 for use in the first contact stage V-200. The ABS and DAS solutions are circulated between the two reaction zones carrying the necessary ratios of ABS and DAS to each zone, regenerating each other in turn.

[0188] The optimal absorption of ammonia and rejection of hydrogen sulfide in the first contact stage V-200 is favored by a combination of one or more of the following factors:

1. Relatively higher temperatures. For example, gas liquid contact at 200 deg. F is better for H_2S rejection than contact at 150 deg. F.
2. Low pH. For example, absorption of ammonia and the rejection of hydrogen sulfide is better at a feed solution neat pH of 5.6 than at a pH of 5.9 or higher. However, SO_2 emission are difficult to control when the solution leaving the 2nd gas-liquid contact stage V-204 has a pH of less than about 5.5, therefore operation in V-200 is preferred to be between 5.5-5.8.
3. Relatively higher liquid rates favor ammonia absorption. Higher liquid rates translate to higher buffer capacity in the absorbing solution. There should be sufficient flow to V-200 in order to absorb substantially all of the ammonia in stream 101.
4. Relatively higher ABS concentrations favor ammonia absorption, and to a lesser degree hydrogen sulfide absorption. Feed solution to V-200 must have an ABS concentration as well as flow rate sufficiently greater than the quantities of ammonia in the feed gas, preventing an unnecessary passing-through of ammonia to the burner.

[0189] Operation at relatively higher temperatures results in higher concentrations of water vapor in the gas traffic through the absorption/reaction zone V-200. Higher concentrations of water vapor increase the resistance to mass transfer for both ammonia and hydrogen sulfide. However, the diffusion coefficient for ammonia is about an order of magnitude greater than for hydrogen sulfide, allowing for the ammonia to preferentially absorb into solution. Additionally, higher concentrations of water vapor in the contact stage V-200 also increases the velocity of the gas through the absorption zone, reducing the residence time for both of the gases. The lower residence time, coupled with a smaller diffusion coefficient for H2S, allows for the hydrogen sulfide to preferentially pass through while allowing NH3 to be preferentially absorbed into solution. The use of the single-stage co-current Contact stage takes advantage of these properties in a way that is not possible with other contact methods such a counter current column operation. It is within the scope of the disclosed invention to provide a second, smaller co-current stage added in series to affect a more complete absorption of NH_3 while still rejecting H_2S. The flow of absorbing liquid would be necessarily much smaller. This would help prevent NOx emissions.

[0190] Acidic conditions in the Contact stage feed solution stream 106 enhances the preferential absorption of ammonia by providing favorable conditions for hydrolyzing ammonia, a basic gas, to ammonium ion:

$$NH_3 + H^+ \rightarrow NH_4^+$$

while the hydrogen sulfide, a weak acid, is preferentially rejected due to the relative paucity of hydroxyl ions:

$$H_2S + OH^- \rightarrow HS^- + H_2O$$

[0191] The function of V-206 is as an environmental safeguard for the capture of SO_2. It also functions as a point for make-up water addition, serving for density control while, importantly, monitoring its solution pH as an indicator of changes in both SO_2 and/or NH_3 present in the gas traveling through. Water addition via stream 110 controls the density of the circulating solutions. Stream 111 is a water circulation pump around loop where pH is monitored in a dilute solution. The stream 111 loop that includes NH_3 addition also ensures that any SO_2 that may break through during a unit upset is captured, preventing emissions. Stream 109 pump around loop is also intended to capture SO_2 and NH_3 that may survive the contact stage V-204, by circulating a very dilute ABS/DAS solution. Stream 105 is the means by which the water from stream 110 is introduced to the circulating solutions to control density.

[0192] The Stream 111 circulation loop will also have a supply of NH_3 (aqua or anhydrous) stream 112, to safeguard against SO_2 emissions. This stream is meant to ensure sufficient capacity for neutralizing any SO_2 break-through that may occur during normal operations as well as be capable of handling any upset conditions.

[0193] While specific embodiments and examples of the present invention have been illustrated and described, numerous modifications come to mind without significantly departing from the spirit of the invention, and the scope of protection is only limited by the scope of the accompanying claims.

CLAIMS:

1. A method for making an aqueous solution of ammonium thiosulfate (ATS) comprising:

co-currently contacting a first gas feed stream containing hydrogen sulfide (H_2S) and ammonia (NH_3) with a first liquid stream containing an aqueous solution of ammonium bisulfite (ABS) and di-ammonium sulfite (DAS) within a first gas-liquid contact stage under controlled physical conditions to cause the following liquid chemical reactions to occur and to produce a second gas stream and a second liquid stream:

$$NH_3 + ABS \leftrightarrow DAS \quad (1)$$

$$H_2S + DAS \rightarrow AHS + ABS \quad (2)$$

$$2\ AHS + 4\ ABS \rightarrow 3\ ATS + 3\ H_2O \quad (3)$$

controlling the physical conditions within the first gas-liquid contact stage to control relative absorption mass-transfer rates for NH_3 and H_2S to favor absorption of NH_3 into the liquid phase and cause reaction (1) and to limit absorption of H_2S into the liquid phase and thereby limit the formation of ammonium hydrosulfide (AHS) in reaction (2) and limit the formation of ATS in reaction (3), wherein the second gas stream contains unreacted H_2S and the second liquid stream contains a mixture of DAS, ATS, and ABS, wherein the physical conditions are selected from a temperature of the first gas stream, a temperature of the first liquid stream, a ratio of feed rates of the first gas feed stream and first liquid feed stream, a concentration of dissolved ABS and DAS in the first liquid stream, pH of the first liquid stream, a first liquid stream buffer capacity, and combinations thereof; and

removing a first fraction of the second liquid stream to recover the aqueous solution of ATS.

2. The method of claim 1 further comprising:

oxidizing H_2S in the second gas stream to form SO_2 and produce a third gas stream;

contacting the third gas stream containing SO_2 with a second fraction of the second liquid stream within a second gas-liquid contact stage to cause the chemical reaction:

$$SO_2 + DAS \rightarrow 2\ ABS \qquad (4)$$

to occur, and to produce a fourth gas stream and a third liquid stream containing ABS and DAS; and

recycling a portion of the third liquid stream to the first gas-liquid contact stage as the first liquid stream.

3. The method of claim 2 wherein the quantity of hydrogen sulfide absorbed in the 1st gas-liquid contact stage has been sufficiently limited so that no more H_2S is hydrolyzed to AHS and then converted to ATS than the maximum amount allowed by the ATS reaction stoichiometry in the 1st gas-liquid contacting stage as defined by the 1st Gas H_2S Absorption/Rejection Ratio, according to,

$$\frac{mols\ H_2S\ into\ 2^{nd}\ Gas}{mols\ H_2S\ absorbed\ into\ 1^{st}\ Liquid} = 1^{st}\ Gas\ H_2S \frac{Rejection}{Absorption} Ratio$$

where, the 1st Gas H_2S Rejection/Absorption Ratio is calculated as:

$$1^{st}\ Gas\ H_2S \frac{Rejection}{Absorption} Ratio = \left[\frac{{}^4/_3\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right) + \left(\frac{C_{B,mass}}{MW_{ABS}}\right) + \left(\frac{C_{AS,mass}}{MW_{AS}}\right)}{{}^2/_3\left(\frac{C_{ATS,mass}}{MW_{ATS}}\right)}\right]$$

where in the 1st Gas H_2S Rejection/Absorption Ratio equation: $C_{ATS,mass}$, $C_{B,mass}$, and $C_{AS,mass}$ is in units of mass of solute-per-mass of aqueous solution, MW is molecular weight of each in consistent units, such that the quantity of hydrogen sulfide present in the 2nd gas stream, when oxidized to sulfur dioxide, can be converted to aqueous ammonium bisulfite and returned to the 1st gas-liquid contact stage.

4. The method of claim 2 where the H_2S-rich 2nd gas stream is oxidized to provide a 3rd gaseous stream that is rich in SO_2, that is fed together with the DAS-rich 2nd liquid to

a 2nd gas-liquid contacting zone where the molar quantity of SO_2 is hydrolyzed with an equal-molar portion of DAS, and converting each species to aqueous ABS, and the effluent liquid of from the 2nd gas-liquid contact stage comprises the 1st liquid feed for recycle back to the 1st gas-liquid contact stage, and the vapor effluent comprises a 4th gas stream.

5. The method of claim 2 where a separate source of hydrogen sulfide is added to the 2nd gas stream to satisfy the ABS production requirement for the ATS reaction in the 1st gas-liquid contacting stage in the case where the H_2S rejection requirement, as defined by the 1st Gas H_2S Rejection/Absorption Ratio equation, has not been met.

6. The method of claim 5 where a separate source of aqueous ABS is added to the 1st or 2nd liquid stream, is substituted for the addition hydrogen sulfide gas.

7. The method of claim 2 where, in the case that the 1st feed gas contains a molar excess of H_2S relative to its molar rate of NH_3, whereby the quantity of DAS produced in the 2nd liquid is insufficient for conversion of all SO_2 in the 3rd gas stream to ABS, a separate source of NH_3 is added to either the 1st or 2nd liquid stream, converting a portion of the stream's ABS to DAS.

8. The method of claim 7 where the excess H_2S is split as a purge stream from the 2nd gas prior to oxidation and removed from the process and no separate source of NH_3 is added.

9. The method of claim 1 where the type of gas-liquid contact stage is either a Venturi-type fume scrubber, other co-current contact stage such as a static mixer.

10. The method of claim 1 where two or more single stage co-current contactors are operated sequentially as the 1st gas-liquid contact stage.

11. The method of claim 4 where the 4th gas stream, containing SO_2 and some NH_3, are recovered and returned to the 1st or 2nd liquid streams, in a chemically reactive absorption stage using a separate source of ammonia and water as a scrubbing agent,

returning an ABS/DAS buffer solution to the process and to prevent SO_2 and NH_3 release in the 5th gas stream to the environment.

12. The method of claim 11 where the absorption stage comprises four counter currently organized sequential gas-liquid stages comprising:
    a. Zone 1 (bottom) where a portion of 2nd liquid stream is directed to the contact zone and the 4th gas stream flows counter currently through and exits toward Zone 2;
    b. Zone 2 (lower-mid) where a packed or trayed section and including a trap-tray and circulation pump, anhydrous or aqua ammonia, is added to the circulating solution on pH feedback control, a dilute ABS-DAS solution, overflows the trap tray with the liquor supplementing the liquid feed to Zone 1, and the 4th gas stream leaves the stage toward Zone 3 and has, comparatively more NH_3 than SO_2, and this section captures most of the SO_2 in the 4th gas stream;
    c. Zone 3 (upper-mid) whereby utilizing a packed or trayed section and including a trap-tray and circulation pump, a dilute solution captures NH_3 and very small quantities of SO_2 in the vapor leaving Zone 2, whereby this section removes most NH_3 and SO_2 that would be considered important before environmental release, and the further scrubbed 4th gas stream then flows into Zone 4 and the very dilute liquor becomes the liquid feed to Zone 2; and
    d. Zone 4 (upper) where process make-up water is added to a top tray and whereby small, ppm-level quantities of NH_3 and SO_2 are absorbed as the 4th gas stream flows counter currently to the liquid, and the NH_3 and SO_2 are removed to very low concentrations since each are completely hydrolyzed into the make-up water.

13. The method of claim 3 where the 1st feed liquid buffer concentration is controlled to between 3 wt.% and 25 wt.% to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S Rejection/Absorption Ratio equation.

14. The method of claim 3 where the ratio of 1st feed liquid rate to the 1st feed gas rate is between 15:1 and 75:1 on a weight-to-weight basis in order to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S

Rejection/Absorption Ratio equation while simultaneously achieving substantially complete absorption of the 1st feed gas ammonia.

15. The method of claim 3 wherein the temperature is increased to increase the fraction of feed gas H_2S to the 1st gas-liquid contact stage rejected to the 2nd gas stream or decreased to decrease the fraction rejected to provide the degree of H_2S rejection dictated by the requirement defined in the 1st Gas H_2S Rejection/Absorption Ratio equation.

16. The method of claim 1 wherein the measured pH of the concentrated aqueous 1st liquid feed has been controlled to be in the range between 5.3 and 5.8, or when measured in a 5,000:1 or greater dilution, a pH between 6.3 and 6.9, such that substantially all of the 1st feed gas ammonia is absorbed in the 1st gas-liquid contact stage and is recovered into the 2nd liquid stream effluent from the stage.

17. The method of claim 1 wherein the value of the 1st feed gas ratio of ammonia-to-hydrogen sulfide is used to modify other process independent parameters of feed flow, temperature, pH, and buffer concentration, to optimize ammonia absorption in the 1st gas-liquid contact stage.

18. The method of claim 1 wherein the temperature of the reaction zone is sufficiently high to increase the velocity of gas traffic through the contact stage, such that the residence time of the feed streams in the reaction zone is decreased.

19. The method of claim 1 wherein, during a time interval where the first feed gas flow rate and composition to the first gas-liquid stage are constant and the first liquid feed to the first gas-liquid contactor is also constant, changes in the measured difference between the pH of the liquid feed to the first gas-liquid contactor and the pH of the liquid feed to the second gas-liquid contactor may be interpreted as a change in the buffer concentration, of either liquid stream, in the interval between measurements of the pH difference between the two streams.

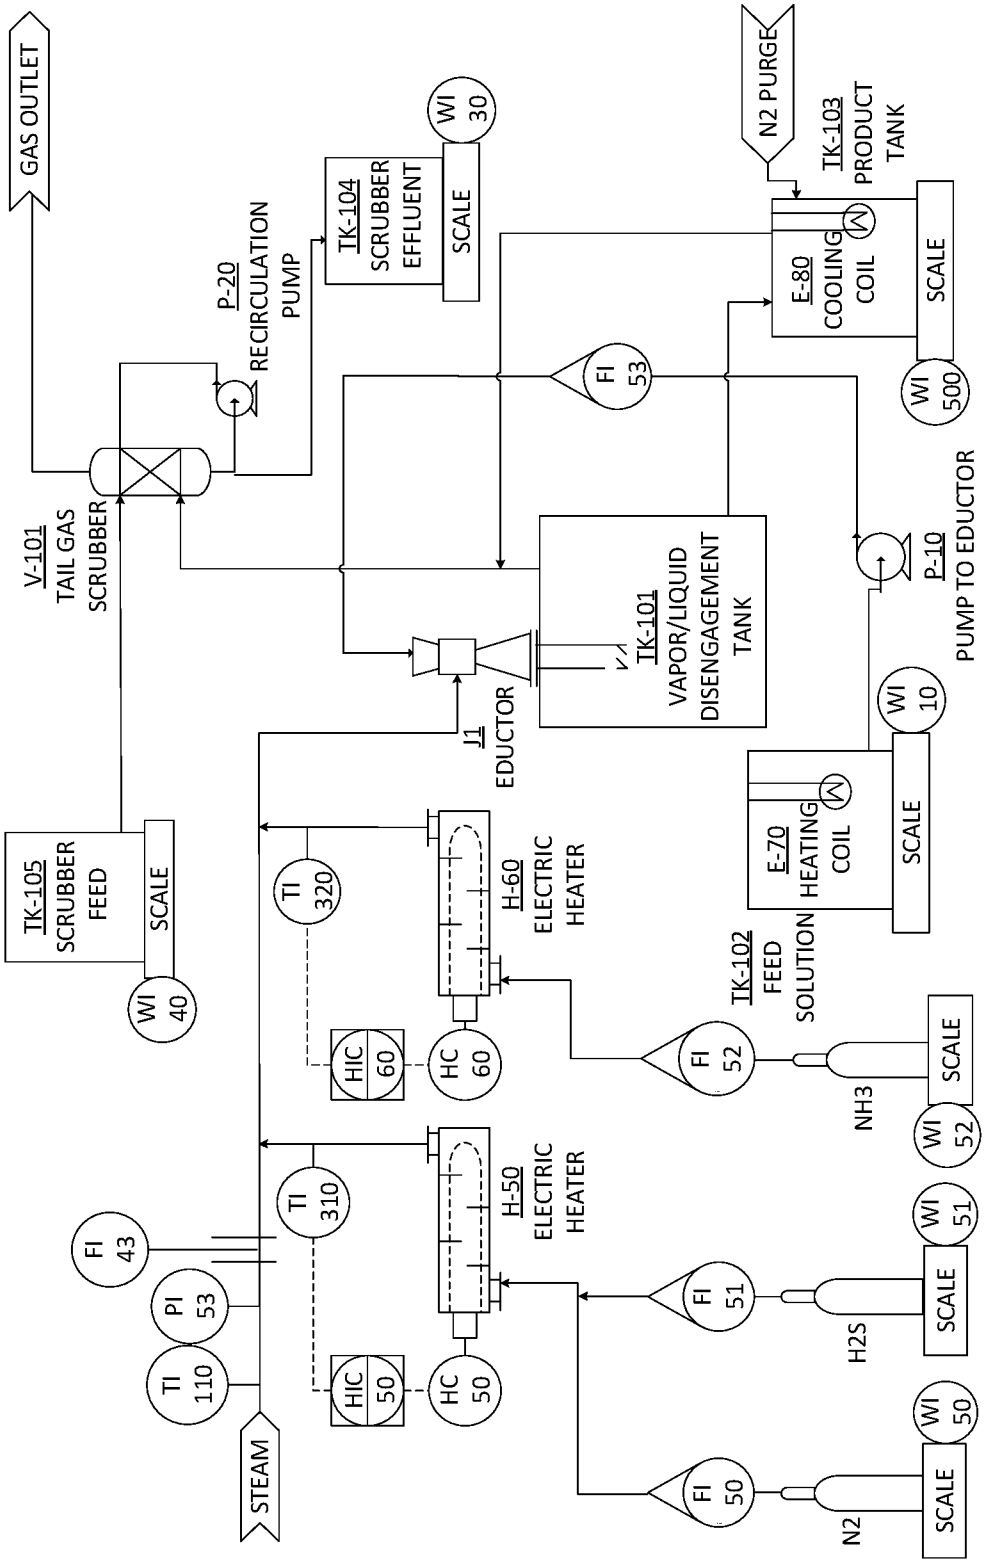

GAS OUTLET
V-101 TAIL GAS SCRUBBER
P-20 RECIRCULATION PUMP
TK-104 SCRUBBER EFFLUENT
WI 30
SCALE
N2 PURGE
TK-103 PRODUCT TANK
E-80 COOLING COIL
SCALE
WI 500
FI 53
P-10 PUMP TO EDUCTOR
TK-101 VAPOR/LIQUID DISENGAGEMENT TANK
J1 EDUCTOR
TK-105 SCRUBBER FEED
SCALE
WI 40
TI 320
H-60 ELECTRIC HEATER
HIC 60
HC 60
E-70 HEATING COIL
SCALE
WI 10
TK-102 FEED SOLUTION
FI 52
NH3
SCALE
WI 52
FI 43
PI 53
TI 110
TI 310
H-50 ELECTRIC HEATER
HIC 50
HC 50
FI 51
H2S
SCALE
WI 51
STEAM
FI 50
N2
SCALE
WI 50

Fig. 1

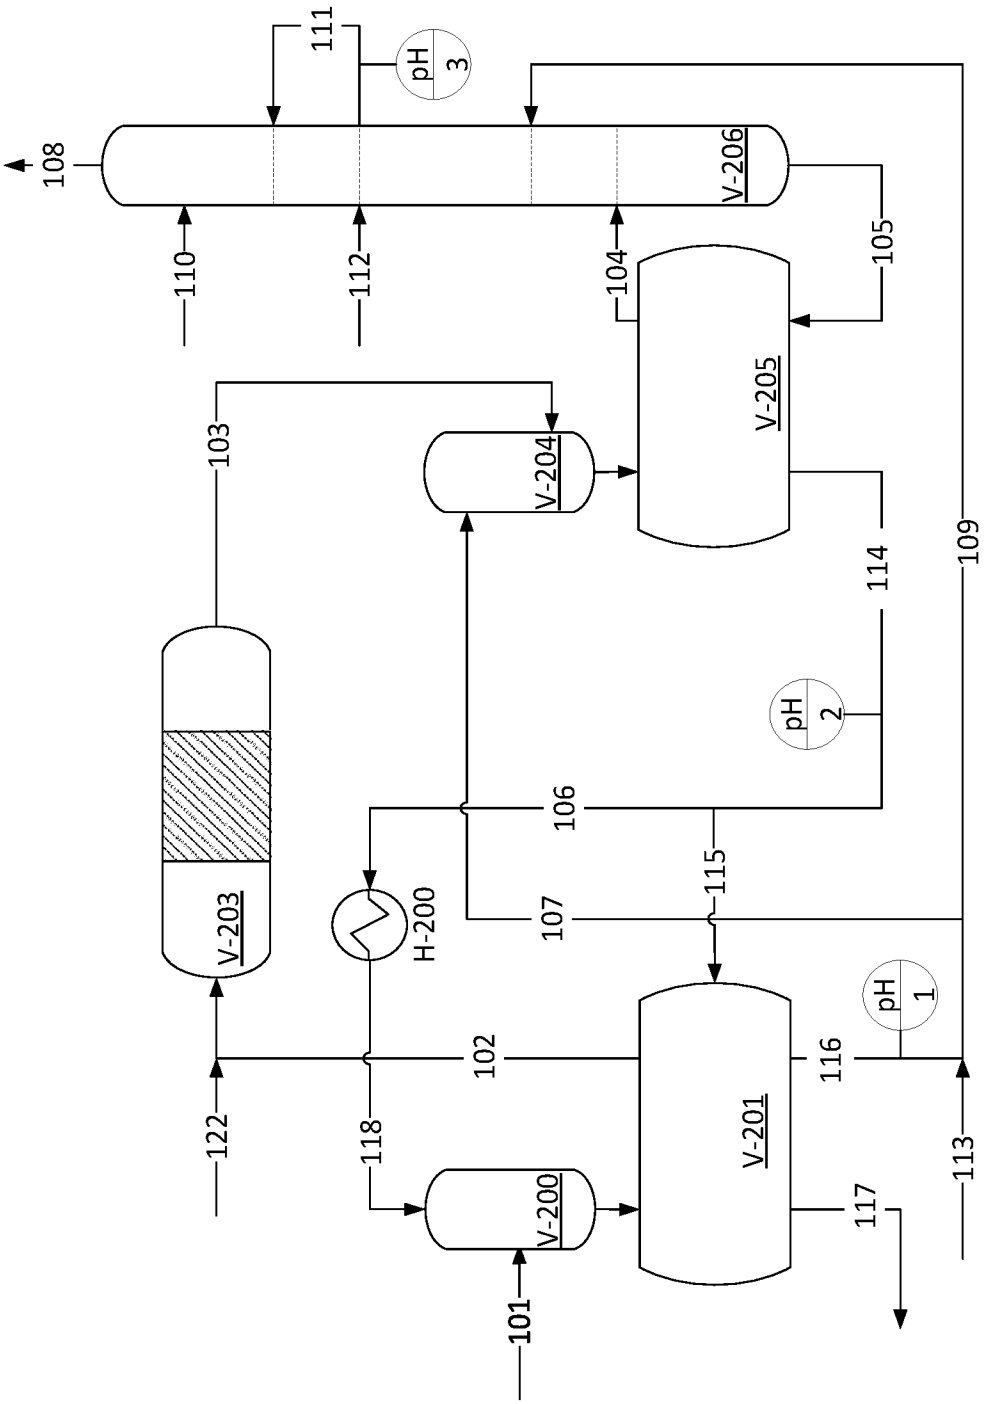

111
pH 3
108
V-206
110
112
104
105
V-205
103
V-204
114
109
pH 2
106
V-203
H-200
115
107
pH 1
102
116
122
118
V-201
113
V-200
117
101

Fig. 2

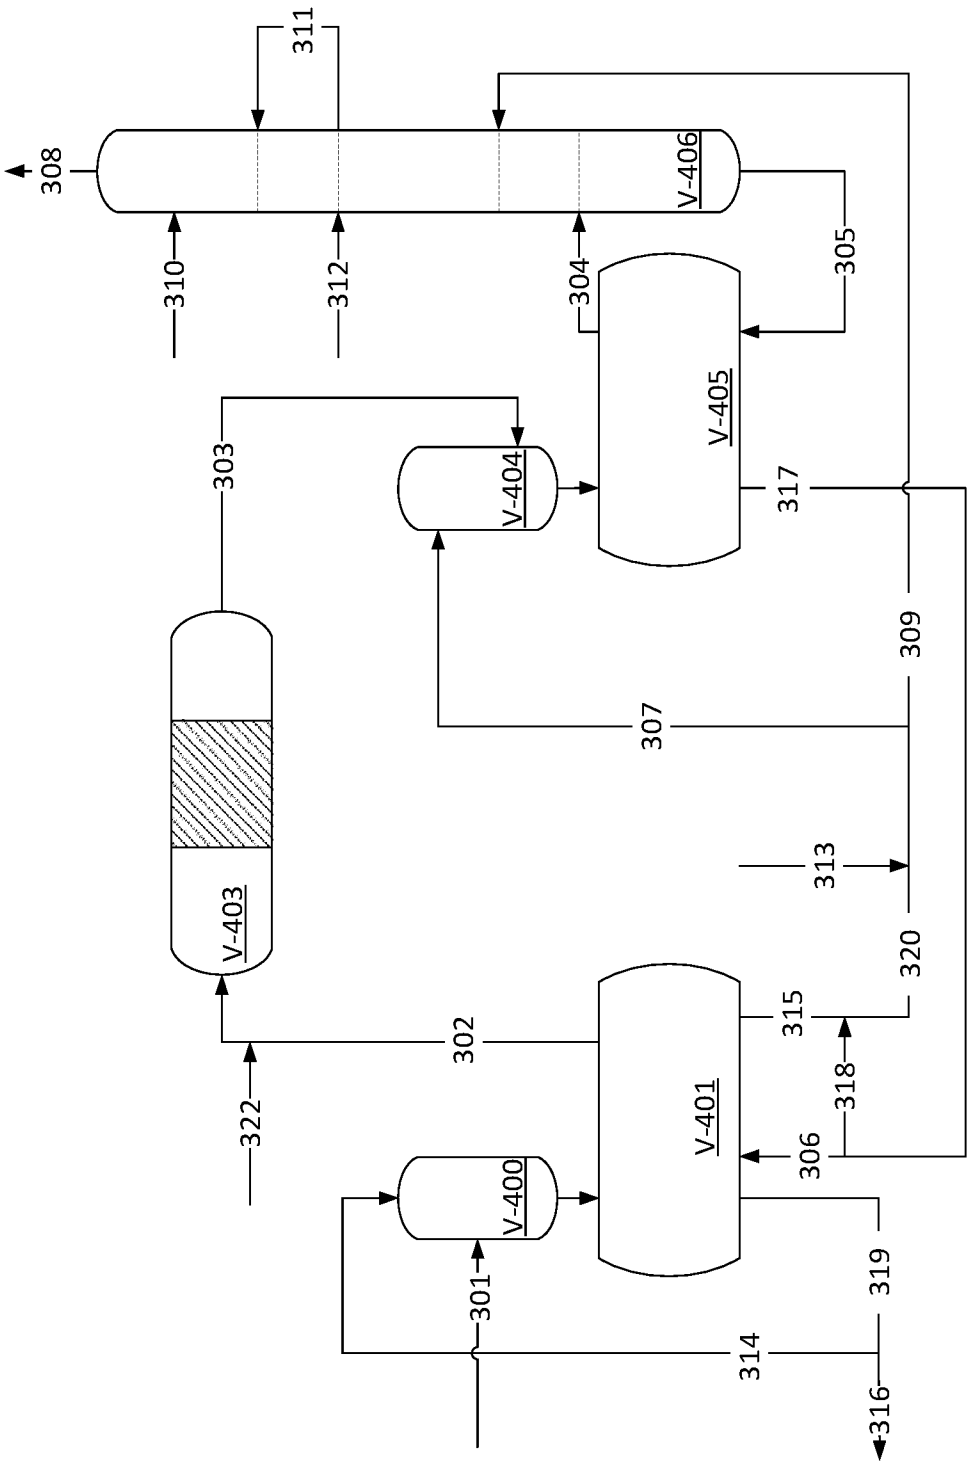

311
308
V-406
310
312
304
305
V-405
303
V-404
317
309
307
V-403
313
320
315
302
318
322
V-401
306
V-400
301
319
314
316

Fig. 3

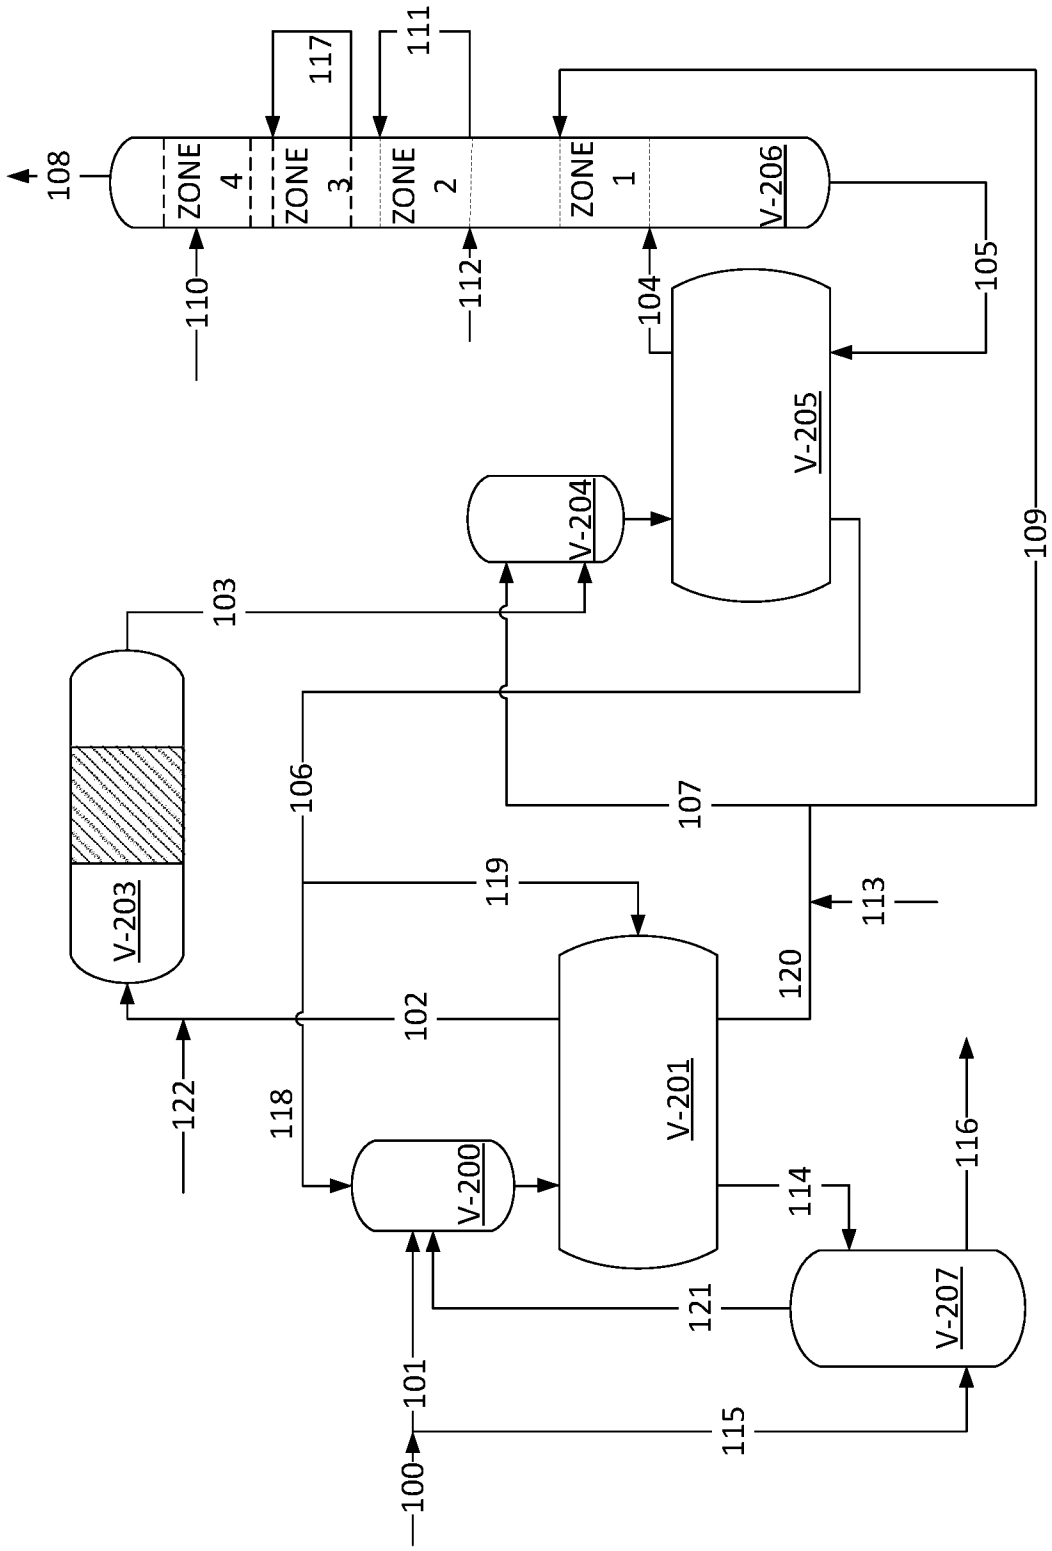

ZONE 4
ZONE 3
ZONE 2
ZONE 1
V-206
V-205
V-204
V-203
V-201
V-200
V-207
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122

Fig. 4

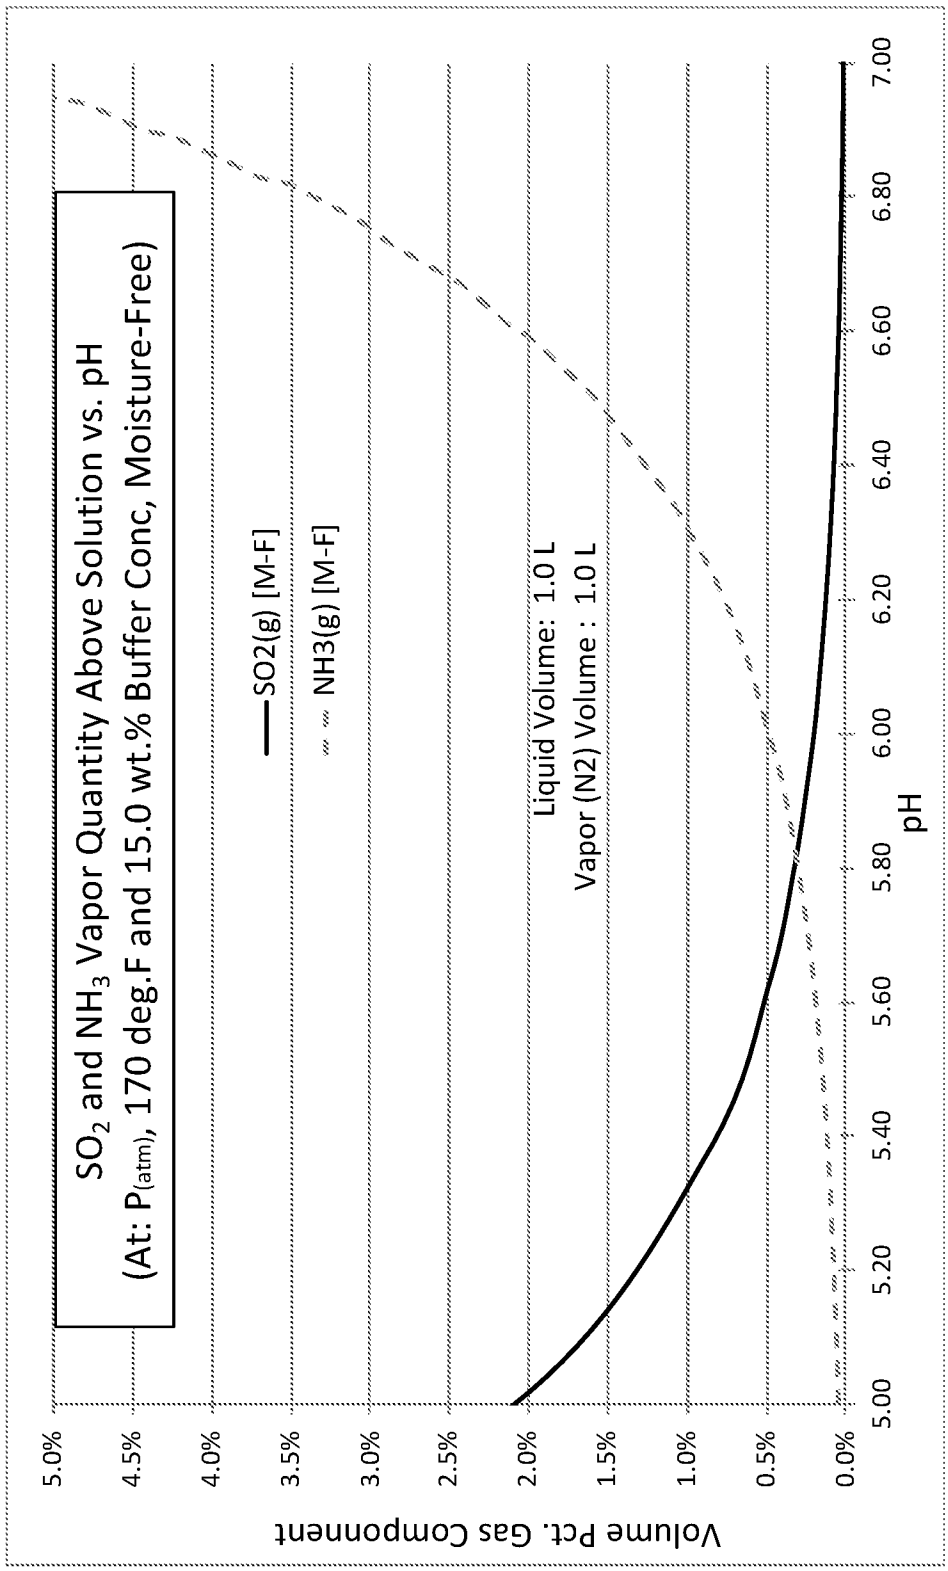

SO2 and NH3 Vapor Quantity Above Solution vs. pH
(At: P(atm), 170 deg.F and 15.0 wt.% Buffer Conc, Moisture-Free)
SO2(g) [M-F]
NH3(g) [M-F]
Liquid Volume: 1.0 L
Vapor (N2) Volume : 1.0 L
Volume Pct. Gas Component
5.0%
4.5%
4.0%
3.5%
3.0%
2.5%
2.0%
1.5%
1.0%
0.5%
0.0%
5.00
5.20
5.40
5.60
5.80
6.00
6.20
6.40
6.60
6.80
7.00
pH

Fig. 5

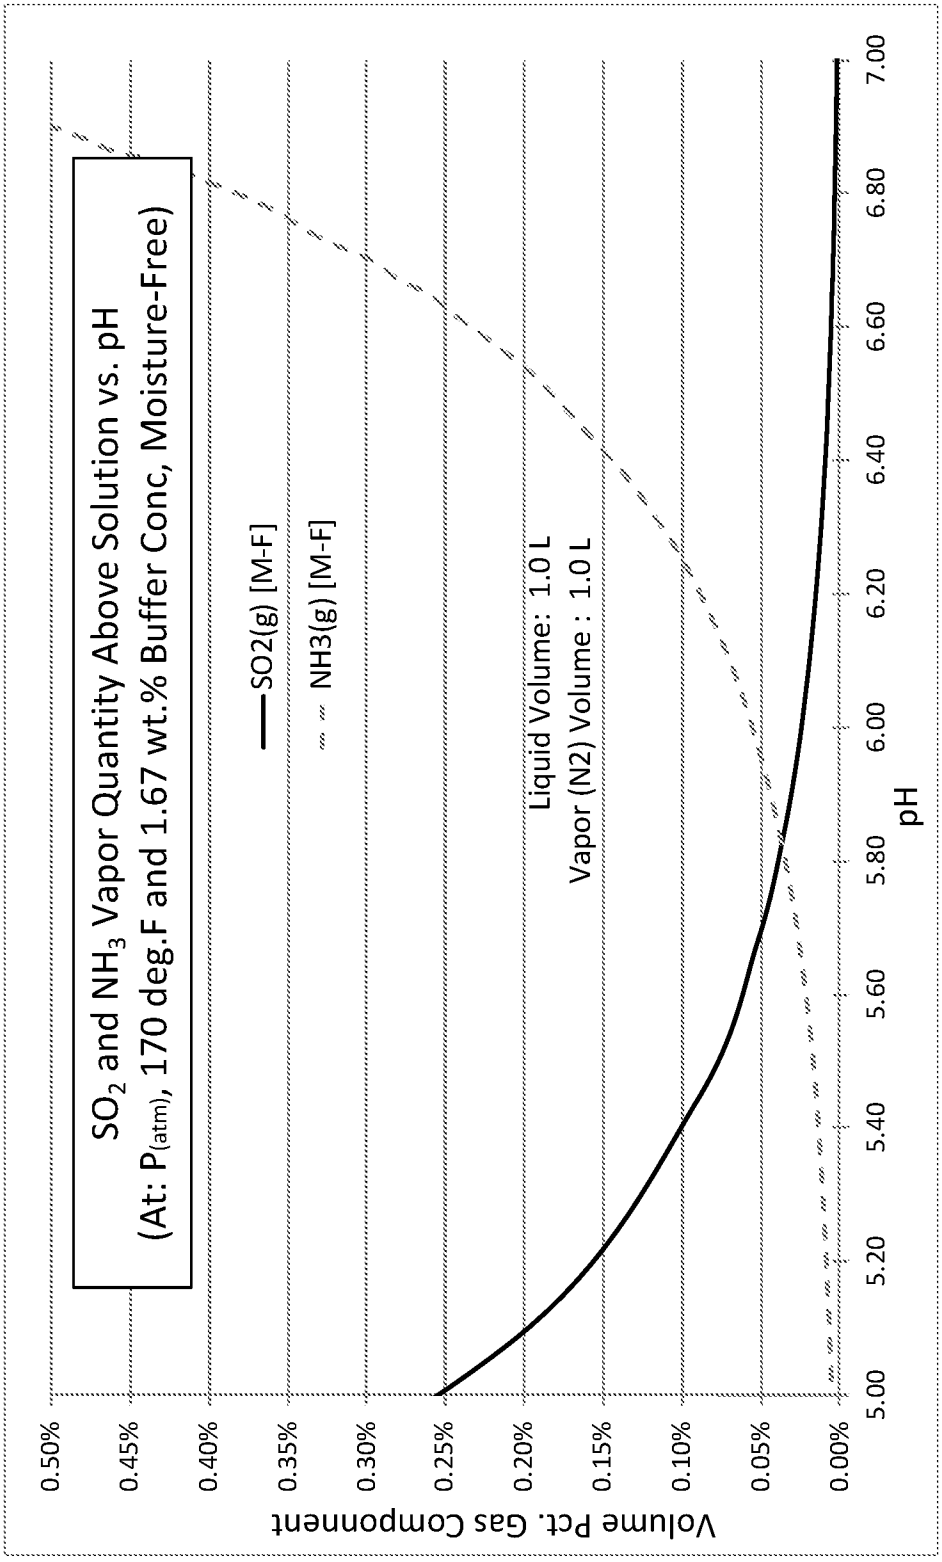

SO2 and NH3 Vapor Quantity Above Solution vs. pH
(At: P(atm), 170 deg.F and 1.67 wt.% Buffer Conc, Moisture-Free)
SO2(g) [M-F]
NH3(g) [M-F]
Liquid Volume: 1.0 L
Vapor (N2) Volume : 1.0 L
Volume Pct. Gas Component
pH
0.50%
0.45%
0.40%
0.35%
0.30%
0.25%
0.20%
0.15%
0.10%
0.05%
0.00%
5.00
5.20
5.40
5.60
5.80
6.00
6.20
6.40
6.60
6.80
7.00

Fig. 6

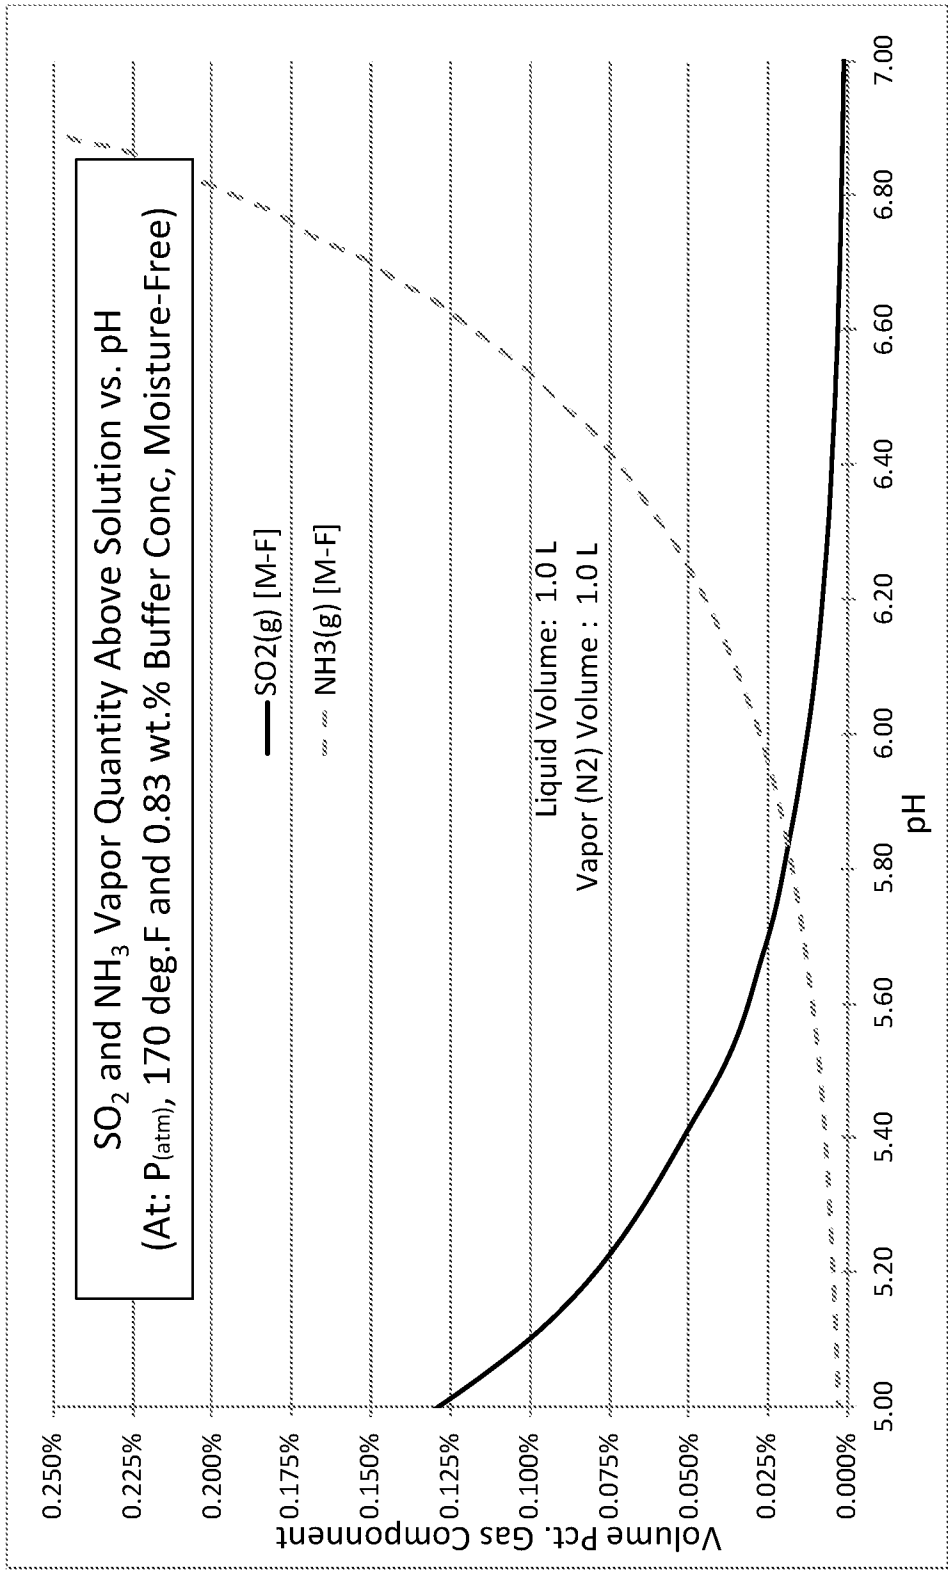

SO2 and NH3 Vapor Quantity Above Solution vs. pH
(At: P(atm), 170 deg.F and 0.83 wt.% Buffer Conc, Moisture-Free)
SO2(g) [M-F]
NH3(g) [M-F]
Liquid Volume: 1.0 L
Vapor (N2) Volume : 1.0 L
Volume Pct. Gas Component
pH
0.250%
0.225%
0.200%
0.175%
0.150%
0.125%
0.100%
0.075%
0.050%
0.025%
0.000%
5.00
5.20
5.40
5.60
5.80
6.00
6.20
6.40
6.60
6.80
7.00

Fig. 7

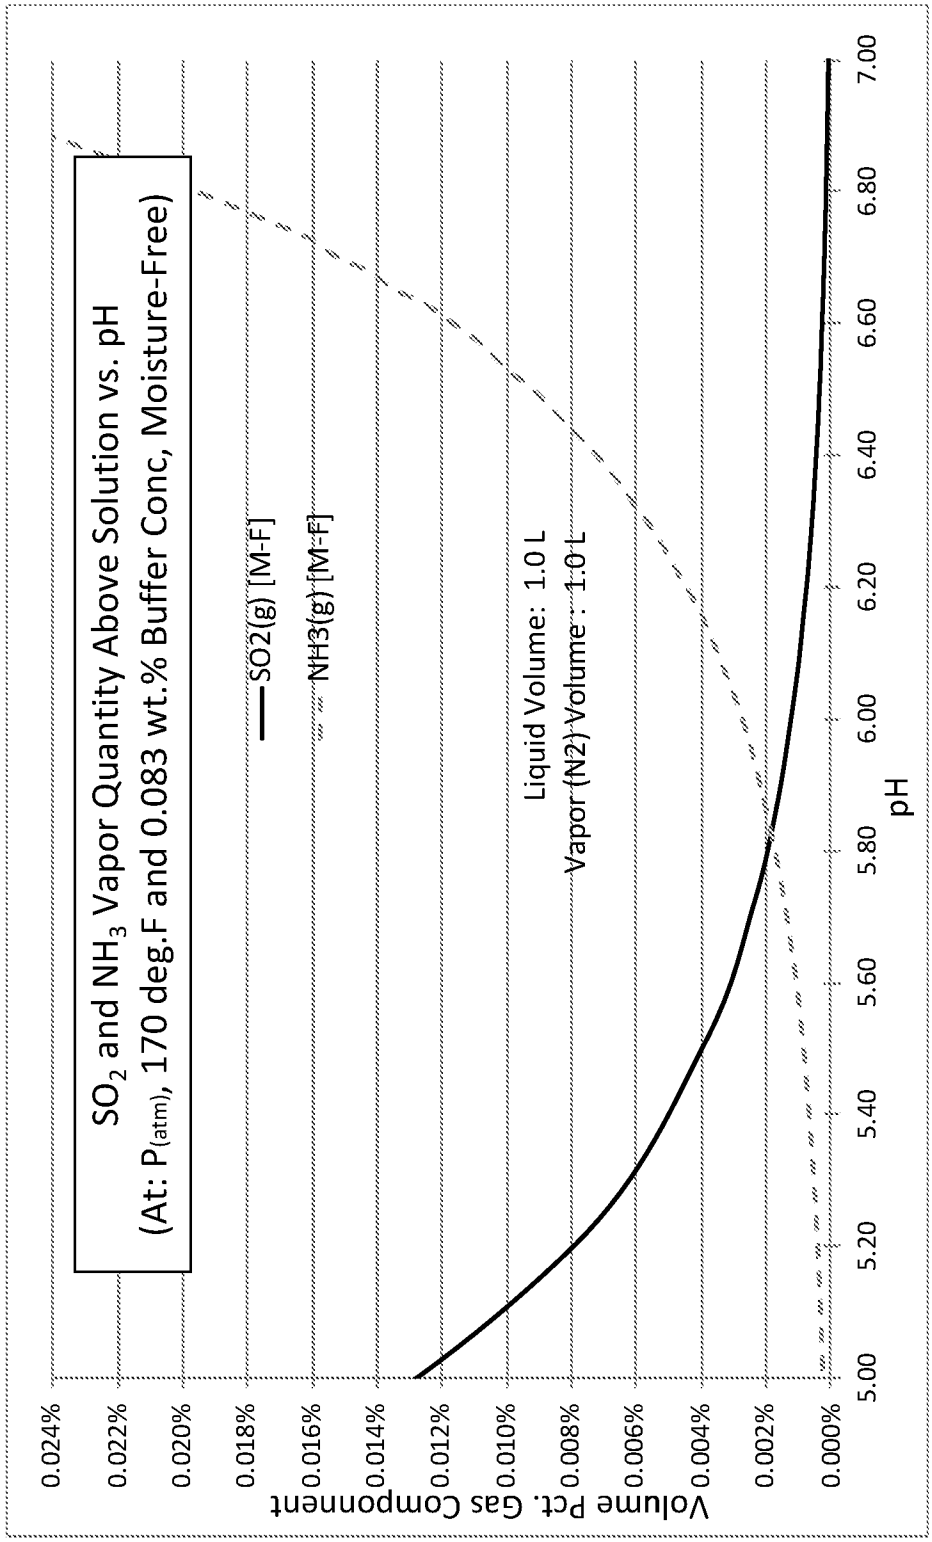

SO2 and NH3 Vapor Quantity Above Solution vs. pH
(At: P(atm), 170 deg.F and 0.083 wt.% Buffer Conc, Moisture-Free)
SO2(g) [M-F]
NH3(g) [M-F]
Liquid Volume: 1.0 L
Vapor (N2) Volume: 1.0 L
Volume Pct. Gas Component
pH
0.024%
0.022%
0.020%
0.018%
0.016%
0.014%
0.012%
0.010%
0.008%
0.006%
0.004%
0.002%
0.000%
5.00
5.20
5.40
5.60
5.80
6.00
6.20
6.40
6.60
6.80
7.00

Fig. 8

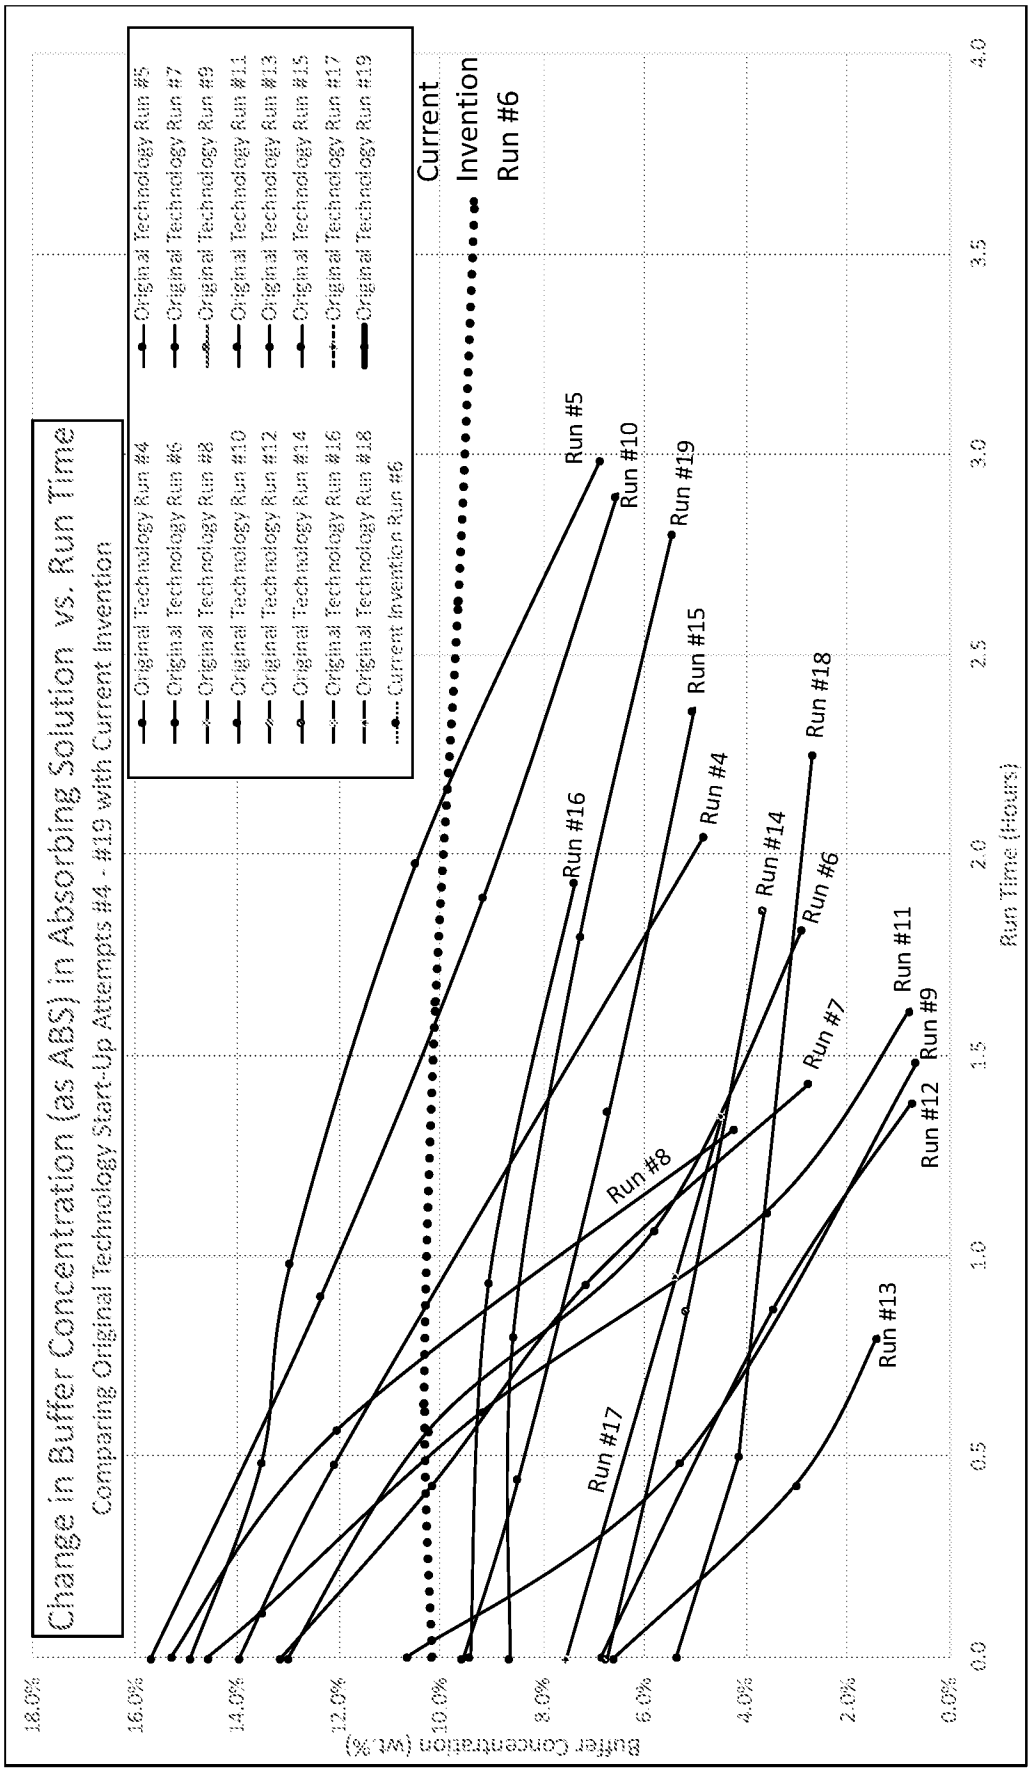

Change in Buffer Concentration (as ABS) in Absorbing Solution vs. Run Time
Comparing Original Technology Start-Up Attempts #4 - #19 with Current Invention
Original Technology Run #4
Original Technology Run #5
Original Technology Run #6
Original Technology Run #7
Original Technology Run #8
Original Technology Run #9
Original Technology Run #10
Original Technology Run #11
Original Technology Run #12
Original Technology Run #13
Original Technology Run #14
Original Technology Run #15
Original Technology Run #16
Original Technology Run #17
Original Technology Run #18
Original Technology Run #19
Current Invention Run #6
Run #5
Run #10
Run #19
Run #15
Run #18
Run #4
Run #14
Run #6
Run #11
Run #9
Run #7
Run #12
Run #8
Run #16
Run #17
Run #13
Buffer Concentration (wt.%)
Run Time (Hours)
18.0%
16.0%
14.0%
12.0%
10.0%
8.0%
6.0%
4.0%
2.0%
0.0%
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0

Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2021/028230

A. CLASSIFICATION OF SUBJECT MATTER

C01B 17/64 *(2006.01)*
C01B 21/093 *(2006.01)*
B01F 3/04 *(2006.01)*
C01C 1/22 *(2006.01)*
C01C 1/24 *(2006.01)*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C01B 17/64, C01B 21/093, B01F 3/04, C01C 1/22, C01C 1/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAPATIS, ESPACENET, PatSearch (RUPTO internal), USPTO, PATENTSCOPE, Reaxys, STNext

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1375422 A1 (HALDOR TOPSOE A/S) 02.01.2004, claim 1, [0011], [0013], [0015], [0019], [0022], [0025], [0027], figure 1	1-19
A	US 2003/0039606 A1 (HALDOR TOPSOE A/S) 27.02.2003	1-19
D, A	US 6159440 A (HALDOR TOPSOE A/S) 12.12.2000	1-19

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
12 July 2021 (12.07.2021)	05 August 2021 (05.08.2021)
Name and mailing address of the ISA/RU: Federal Institute of Industrial Property, Berezhkovskaya nab., 30-1, Moscow, G-59, GSP-3, Russia, 125993 Facsimile No: (8-495) 531-63-18, (8-499) 243-33-37	Authorized officer E. Prokhorova Telephone No. +7 (495) 531-64-81