



(11)

EP 2 358 251 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
17.08.2016 Bulletin 2016/33

(51) Int Cl.:
A47L 9/12 *(2006.01)* **A47L 5/24** *(2006.01)*
A47L 5/28 *(2006.01)* **A47L 9/20** *(2006.01)*

(21) Application number: **09819456.6**

(86) International application number:
PCT/SE2009/000435

(22) Date of filing: **05.10.2009**

(87) International publication number:
WO 2010/042002 (15.04.2010 Gazette 2010/15)

(54) **A DUSTCUP**

STAUBBEHÄLTER

COUPELLE À POUSSIÈRES

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **10.10.2008 SE 0802181**
16.10.2008 US 106072 P

(43) Date of publication of application:
24.08.2011 Bulletin 2011/34

(73) Proprietor: **Aktiebolaget Electrolux**
105 45 Stockholm (SE)

(72) Inventors:
• **ENGSTRÖM, Christer**
18432 Akersberga (SE)
• **INGRE, Torkel**
S-116 32 Stockholm (SE)

(74) Representative: **Samzelius, Roger Mikael**
AB Electrolux
Group Intellectual Property
105 45 Stockholm (SE)

(56) References cited:
EP-A1- 1 977 672 EP-A1- 1 977 672
EP-A2- 0 192 624 EP-A2- 1 070 478
EP-A2- 1 523 916 EP-A2- 1 523 916

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention generally relates to dust cups, and more particularly to a dust cup with a filter assembly comprising an inner filter which is slidably insertable into an outer filter. It also relates to a vacuum cleaner comprising such a dust cup.

Description of Related Art

[0002] Bagless dust cups are convenient for use in household appliances like vacuum cleaners. The bagless solution is often less expensive in the long run, as compared to dust cup arrangements having throwaway dust bags. Furthermore, it is convenient for the user since the bagless dust cups never run out of throwaway dust bags, and the user is never confronted with the problem in the convenient store of having to look for, and choose from, an abundance of varieties of dust bags which are available for dust cups in different models of e.g. vacuum cleaners. However, the bagless dust cups provide new challenges for the user. The dust cups need to be regularly emptied, and permanent filters, which are typically arranged within the dust cups, have to be cleansed.

[0003] Dust cups with permanent bagless filters, which are arranged in a filter assembly comprising a plurality of filters are known. A filter assembly may comprise a combination of an outer fine meshed (fine dust) filter and an inner wide-meshed filter or the opposite arrangement. The inner filter is slidably insertable into the outer filter, such that the inner filter and the outer filter complement each other and optimize the filtering function of the filter assembly. However, with the double filtering function, a problem arises for the user. During maintenance the user sometimes does not notice the double filter structure. Often, the user does not read the instructions in the maintenance manual, or does not understand that the filter assembly comprises a plurality of filters. Therefore, the user forgets to separate the inner filter from the outer filter, whereby the cleansing of the filter assembly is not properly conducted.

[0004] EP 1 523 916 discloses a hand-held vacuum cleaner with a bag-less dust cup comprising dirt chamber and a filter assembly with an outer and inner filter. The dust cap further has an air inlet in the front part leading to an outlet in the front part of the dirt chamber, between the inlet and the filter assembly.

Summary

[0005] In view of the above, it would be desirable to achieve a dust cup which at least alleviates the downsides mentioned with prior art.

[0006] According to a first aspect of the present invention there has been provided a dust cup comprising a dust cup housing which encompasses a dust cup cham-

ber. The dust cup housing further comprises an air inlet and an air outlet, which air inlet and air outlet define a path for a dust laden air-stream to flow through the dust cup chamber. Further, the air outlet is arranged to be connectable to an air suction element, to which the path is in fluid communication. The dust cup further comprises a filter assembly having a first end, which is removably arranged at the air outlet for filtering the dust-laden air-stream. The filter assembly comprises an outer filter and an inner filter. The outer filter and the inner filter are formed as receptacles which are concentrically and unidirectionally arranged with a respective receptacle opening directed towards the first end of the filter assembly. The inner filter is slidably insertable into the outer filter, and in a mounted position the inner filter is arranged to be substantially fully inserted into the outer filter. The filter assembly further comprises a fixing member which is arranged to retain the inner filter in a predetermined displacement position relative to the mounted position, in response to the inner filter being subjected to an extraction force for detaching the filter assembly from the dust cup housing.

[0007] Thus, there is provided a dustcup which has a fixing member that will enable a displacement between the inner filter and the outer filter upon demounting of the filter assembly from the dustcup. When a user of for instance a vacuum cleaner provided with a dustcup according to the present invention detaches the filter assembly to cleanse it, the inner filter will automatically become visible for the user, as the fixing member retains the inner filter in a position which is displaced from the mounted position, in which the inner filter is substantially fully inserted in the outer filter. This will assist the user in remembering to cleanse the inner filter as well as the outer filter.

[0008] In accordance with an embodiment of the dust-cup, wherein said fixing member is arranged, such that said inner filter, upon being subjected to an extraction force larger than a predetermined threshold force, is detachable from said outer filter. Thus, the inner filter may be fully detached from the outer filter when the user applies a large enough extraction force.

[0009] In accordance with an embodiment of the dust cup, the filter assembly is detachable from the housing, upon being subjected to an extracting force being smaller than the predetermined threshold force. This is advantageous, since it is convenient to allow the filter assembly to be detached from the dust cup housing before detaching the inner filter.

[0010] In accordance with an embodiment of the dust cup, the fixing member comprises a protruding portion arranged on an outer surface of the receptacle of said inner filter, which protruding portion is further arranged to slide in a receiving portion arranged on an inner surface of the receptacle of said outer filter, which provides a mechanically uncomplicated solution which is easy to integrate in the filter assembly and has a low additional manufacturing cost.

[0011] In accordance with an embodiment of the dust cup, the fixing member comprises a protruding portion arranged on an inner surface of the receptacle of said outer filter, which protruding portion is further arranged to slide in a receiving portion arranged on an outer surface of the receptacle of said inner filter, which provides a mechanically uncomplicated solution which is easy to integrate in the filter assembly and has a low additional manufacturing cost.

[0012] In accordance with an embodiment of the dust cup, the fixing member comprises friction surfaces arranged on said inner surface of said outer filter and said outer surface of said inner filter, which provides a mechanically uncomplicated solution which is easy to integrate in the filter assembly and has a low additional manufacturing cost.

[0013] In accordance with an embodiment of the dust cup, the receiving portion has a length corresponding to said predetermined displacement, which provides a mechanically uncomplicated solution.

[0014] In accordance with an embodiment of the dust cup, the inner filter comprises a first grip element. This facilitates the extraction of the filter assembly from the dust cup housing for instance when the user wants to cleanse the filter assembly. Furthermore, by placing the first grip element on the inner filter, the functionality of the present inventive concept is reinforced, since the grip element may focus the user to extract the inner filter first, which will cause the filter assembly to be detached from the dust cup housing, and simultaneously displace of the inner filter into the retained position such that it becomes visible for the user that there are both an inner and an outer filter.

[0015] In accordance with an embodiment of the dust cup, the outer filter comprises a second grip element. This further facilitates the demounting of the filter assembly. The user is allowed to grab the first and second grip element and pull the filters apart in a convenient and user friendly way. Further, by providing grip elements the user is more likely to intuitively perform the expected steps of dismounting the filter assembly.

[0016] In accordance with an embodiment of the dust cup, the receptacles have one of a cup shape, conical, and a frusto-conical shape, which is advantageous for increasing the filtering surface.

[0017] The dust cup can be used in any type of dust separating apparatus, but one preferred kind of apparatus is a vacuum cleaner apparatus.

[0018] The different features of the above-mentioned aspects of the invention can be combined in any combination.

[0019] The embodiments of the present invention provide for a novel and alternative way of drawing attention to the presence of inner filters in a filter assembly such that the user remembers to cleanse all filters of the dust cup. Furthermore, the present inventive concept solves the problem in a user-friendly and intuitive way. Moreover, it is an advantage with some embodiments of the

invention that they allow for facilitated handling of the filter assembly during mounting and dismounting of the inner and outer filters.

[0020] Other objectives, features and advantages of the present invention will appear from the following detailed disclosure, from the attached dependent claims as well as from the drawings.

[0021] Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein. All references to "a/an/the [element, device, component, means, step, etc]" are to be interpreted openly as referring to at least one instance of the element, device, component, means, step, etc., unless explicitly stated otherwise.

[0022] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which embodiments of the present invention belong. It will be further understood that terms used herein should be interpreted as having a meaning that is consistent with their meaning in the context of this specification and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

Brief Description of the Drawings

[0023] Embodiments of the present invention will now be described in more detail, reference being made to the enclosed drawings, in which:

Fig. 1a) to c) are schematic perspective views illustrating a dust cup according to an embodiment of the present invention in a) a mounted, and b) and c) a dismounted position, respectively.

Fig. 2 a) to c) are close-up cross-sectional views illustrating alternative embodiments of the present invention.

Fig. 3 is a front perspective view of a vacuum cleaner apparatus comprising an embodiment of a dust cup according to the present invention.

Detailed Description of Embodiments

[0024] Embodiments of the present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided by way of example so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0025] Fig. 1a) illustrates an exemplifying embodiment of a dust cup 10 according to the present invention. The

dust cup 10 comprises a dust cup housing 11, which encompasses a dust cup chamber 12. The dust cup housing 11 is here basically cylindrical, however different designs and shapes of the dust cup housing 11 are possible. An air outlet 14 is formed by an aperture in the dust cup housing 11, which aperture is arranged in a first end of the dust cup housing 11. Further, an aperture arranged at the opposite end of the dust cup housing 11 forms an air inlet 13. When, the dust cup 10 is utilized in for instance a vacuum cleaner, which is illustrated in Fig. 3, or some other type of device for separating dust and dirt from a dust-laden air-stream, the air outlet 14 is further (directly or indirectly) connected to, and thereby brought to be in fluid communication with, an air suction element (not shown), e.g. the suction motor in the vacuum cleaner. During operation of the vacuum cleaner, the air inlet 13 and the air outlet 14 then forms a path for a dust laden air-stream through the dust cup chamber 12.

[0026] Furthermore, a filter assembly 20 is arranged in the path for the dust laden air-stream to filter the dust laden air-stream. A first end 22 of the filter assembly 20 is arranged at the aperture forming the air outlet 14 of the dust cup housing 11, and the body 23 of the filter assembly is arranged to extend inside the dust cup chamber 12. A filter assembly opening 21 is arranged at the first end 22 of the filter assembly 20.

[0027] When the vacuum cleaner is in operation, dirt particles that are separated from the dust laden air-stream are partly deposited in the filter assembly 20, and partly collected and retained in the dust cup chamber 12. The dust cup housing 11 is typically a molded plastic part. The plastic material may be transparent, translucent or opaque, or be composed of different subparts of different materials.

[0028] Fig. 1 b) illustrates a perspective view of the filter assembly 20 as it is dismounted from the dust cup housing 11. The filter assembly 20 comprises an inner filter 24 and an outer filter 25. The outer filter 25 is formed as a receptacle with a receptacle body 26 and an outer filter opening 27. Here, the receptacle body 26 is substantially cup shaped. In alternative embodiments the receptacle body 26 may be formed in a conical shape, or a frusto-conical shape. As is understood by a man skilled in the art, other shapes of the receptacle body 26 are possible and are considered to fall within the scope of the invention.

[0029] The inner filter 24 is formed as a receptacle with a receptacle body 28 and an inner filter opening 29. Typically, the inner filter 24 is arranged to have substantially the same shape as the outer filter 25. However, the dimension of the inner filter 24 is slightly smaller than the outer filter 25. In the mounted position, as is illustrated in Fig. 1a), the inner filter 24 is substantially fully inserted into the outer filter 25. Thus, the filter assembly 20 and the outer filter 25 are concentrically and unidirectionally arranged. The edges 50, 51 of inner filter opening 29 and the outer filter opening 27 bear against each other and the inner filter opening 29 basically forms the opening 21

of the filter assembly 20. The edges 50, 51 of the inner filter opening 29 and the outer filter opening 27 are here arranged as a respective protruding disc like portion with the openings in the centre, herein after for simplicity referred to as a disc, which extends circumferentially from the outer surface of the receptacle and about the respective filter opening. The outer rim of the discs, i.e. the edges 50, 51, are further shaped to fit into the dust cup housing air outlet 14 and to be removably attached to the dust cup housing air out let 14. A tight fit between the discs and the air outlet 14 forces the air-stream to pass through the filter assembly 20 during operation of the vacuum cleaner.

[0030] Referring now to Fig. 1 c) the exemplifying embodiment of the dust cup 10 according to the present invention is further provided with a first grip 42 and a second grip 43 to facilitate the dismounting of the filter assembly 20. The first grip 42 is here a protruding element arranged on the inner surface of the receptacle 28 of the inner filter 24 and at the opening 29 of the inner filter receptacle 28. The first grip 42 may alternatively be provided with suitable gripping surfaces. The gripping surfaces (not shown), may be a second material applied upon the surface of the first grip 42 or be provided by a pattern on the surface of the first grip 42. The gripping surfaces will also help the user to identify the first grip. When the user intends to detach the filter assembly 20 from the dust cup housing 11, the user grabs the first grip 42 and applies an extraction force to extract the filter assembly 20 via the air outlet 14. The inner filter 24 is slidably arranged in the outer filter 25. Furthermore, the filter assembly 20 may be fully detached from the dust cup housing 12, as is explained below.

[0031] In an embodiment of the dust cup a second grip 43 is arranged on the outer surface of the outer filter receptacle 26. The second grip 43 is arranged as protruding portion which may alternatively be provided with suitable gripping surfaces. Preferably, the second grip 43 is arranged at a second end 44 of the outer filter 25. Dismounting of the inner filter 24 from the outer filter 25 is facilitated for the user, as the first grip 42 and the second grip 43 may now be grabbed with a respective hand and the inner and outer filters 24, 25 may be detached by pulling the respective filters in opposite directions and thereby applying an extraction force.

[0032] Fig. 2a) to c) illustrate close-up cross-sectional views of alternative embodiments of a fixing member according to the present invention. In the present invention, the filter assembly 20 comprises a fixing member which is arranged to retain the inner filter 24 in a predetermined displacement position relative to the mounted position, in response to the inner filter 24 being subjected to an extraction force for detaching the filter assembly 20 from the dust cup housing 12. The above mentioned extraction force for detaching the filter assembly from the dust cup housing is less than a predetermined threshold force which acts on the inner and outer filter as the fixing member is activated.

[0033] The fixing member illustrated in Fig. 2 a) comprises a protruding portion 40 which is arranged on the outer filter and which slides in a receiving portion 41 arranged in said inner filter. In this non-limiting embodiment the filters are formed as molded plastic receptacles. The receiving portion 41 is arranged as a through going slot which is formed in association with the molded first grip 42 to achieve a mechanically stable solution. Further, the portion forming the first grip 42 is protruding inwards from the inner surface of the inner filter receptacle, and here in addition protrudes outwards from the outer surface of the inner filter receptacle which outwardly protruding portion is arranged to slide in a through going slot arranged in the disc forming the edge 50 of the outer filter opening 27. This provides extra stability to the inserting and extracting movement of the inner filter 24, and guides the user to orient the inner filter 24 correctly, with respect to the fixing element, when inserting the inner filter 24 into the outer filter 26. Furthermore, the protruding portion 40 is arranged to retain the inner filter 24 in a displaced position as the inner filter 24 is extracted from the outer filter 25. The protruding portion 40 retains the inner filter when an end of the through going slot 41 bears against the protruding portion 40. As long as the extraction force is less than the threshold force retaining the inner filter 24 in the predetermined position, the inner filter is retained at a position at a predetermined distance d from its mounted position and is thereby visible for a user, while still being in grip with the outer filter 25. The protruding portion 40 is arranged such that it may be released. The protruding portion and/or the slot may be at least partly resilient or shaped in a way that by applying an extraction force larger than the threshold force, the user may detach the inner filter 24. Thereby individual cleansing of the respective filters is possible.

[0034] The fixing member illustrated in Fig. 2 b) comprises a protrusion 40 which is arranged at the inner filter 24 and which slides in a receiving portion 41 arranged in said outer filter 25. The length of the receiving member 41 is corresponding to the displacement d of the inner filter 24.

[0035] A fixing member in an embodiment of the present invention, as depicted in Fig. 2 c), is arranged by friction surfaces 50, 51. The friction surfaces may be for instance a second material applied on the filters. The main idea is to provide the inner surface of the outer filter 26 with a subsurface 50 which when it comes in contact with a subsurface 51 arranged on the outer surface of the inner filter 24 causes a substantial increase in surface friction between the inner filter 24 and the outer filter 26, which retains the inner filter 24 in the current position as long as the extraction force does not exceed a threshold value corresponding to the obtained surface friction. In one embodiment the friction surface 60 is arranged at a distance x from the outer filter opening, and the friction surface 61 is arranged at a distance $x + d$ from the inner filter opening. Then the displacement between the inner filter opening and the outer filter opening when the inner

filter is retained is d (not taking the thicknesses of the discs 50 and 51 into account).

[0036] It should be noticed that the above described solutions for the fixing member, i.e. having a protrusion and a receiving portion arranged on the inner filter and the outer filter, or having friction surfaces arranged on the inner and outer filter, are intended to be non-limiting examples. As is appreciated by a person skilled in the art a variety of designs are applicable for these inventive solutions and should be regarded as being part of the scope of protection.

[0037] The types of filters used in the exemplifying embodiments are merely given as an example. Any suitable type of filter is applicable for the present inventive concept. The filters may for instance have filter elements made of woven material, porous materials etc.

[0038] Fig. 3 illustrates a vacuum cleaner apparatus according to an embodiment of the present invention. The vacuum cleaner 30 is an upright vacuum cleaner apparatus. The vacuum cleaner 30 comprises a main body 31 which is longitudinally extended. A suction motor (not shown) is mounted in a motor compartment 34, which is comprised within the main body 31. When operative, the suction motor generates a suction force to draw in a dust laden air-stream via an air inlet which is formed on a bottom end of the main body, and which air inlet is connected to a suction nozzle 33 via a suitable translational air channel (not shown). The suction nozzle 33 has a suction nozzle air inlet formed on a bottom surface (not shown) which is used to suck in a dust laden air-stream when vacuuming a surface. The main body 31 integrally provides and defines a cavity 32 in which the dust cup 10 is arranged. The dust cup air inlet 13 and the suction nozzle air inlet are in fluid communication, such that the dust laden air-stream reaches the dust cup 10, and the dust is separated or filtrated from the air-stream by means of the filter assembly 20. The air-stream continues out via the outlet 14 to the motor compartment before being discharged from the main body via an exhaust aperture.

[0039] Even if only the specific type of vacuum cleaner as described above is exemplified herein, it should be noted that the present inventive concept is applicable to other types of vacuum cleaners, e.g. hand held vacuum cleaners, canister type vacuum cleaners, which utilize a filter assembly with an outer filter arranged with an insertable inner filter. Furthermore, the present inventive concept is applicable for other types of devices for separating dust and dirt from a dust-laden air-stream as well. However, for simplicity only vacuum cleaners have been described.

[0040] The invention has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the invention, as defined by the appended patent claims.

Claims

1. A dust cup (10) comprising:

a dust cup housing (11) encompassing a dust cup chamber (12), said dust cup housing further comprising an air inlet (13) and an air outlet (14) defining a path for a dust laden air-stream to flow through said dust cup chamber, and which air outlet is arranged to be connectable to an air suction element, to which said path is in fluid communication;

a filter assembly (20) having a first end (22) which is removably arranged at said air outlet for filtering said dust-laden air-stream; said filter assembly comprising an outer filter (25) and an inner filter (24), wherein said outer filter and said inner filter are formed as receptacles which are concentrically and unidirectionally arranged with a respective receptacle opening directed towards said first end of the filter assembly, and wherein said inner filter is slidably insertable into said outer filter, and wherein in a mounted position said inner filter is arranged to be substantially fully inserted into said outer filter;

characterized in that said filter assembly further comprising a fixing member (40, 41; 50, 51; 60, 61) which is arranged to retain the inner filter in a predetermined displacement (d) position relative to said mounted position, in response to said inner filter being subjected to an extraction force for detaching said filter assembly from said dust cup housing.

2. A dust cup according to claim 1, wherein said fixing member is arranged, such that said inner filter, upon being subjected to an extraction force larger than a predetermined threshold force, is detachable from said outer filter.

3. A dust cup according to claim 2, wherein said filter assembly is detachable from said housing, upon being subjected to an extracting force being smaller than said predetermined threshold force.

4. A dust cup according to any one of claims 1 to 3, wherein said fixing member comprises a protruding portion (40) arranged on an outer surface of the receptacle of said inner filter, which protruding portion is further arranged to slide in a receiving portion (41) arranged on an inner surface of the receptacle of said outer filter.

5. A dust cup according to any one of claims 1 to 3, wherein said fixing member comprises a protruding portion arranged on an inner surface of the receptacle of said outer filter, which protruding portion is

further arranged to slide in a receiving portion arranged on an outer surface of the receptacle of said inner filter.

6. A dust cup according to any one of claims 1 to 3, wherein said fixing member comprises friction surfaces (50, 51; 60, 61) arranged on said inner surface of said outer filter and said outer surface of said inner filter.

7. A dust cup according to claim 4 or 5, wherein said receiving portion has a length corresponding to said predetermined displacement.

8. A dust cup according to any one of the preceding claims, wherein said inner filter comprises a first grip element (42).

9. A dust cup according to any one of the preceding claims, wherein said outer filter comprises a second grip element (43).

10. A dust cup according to any one of the preceding claims, wherein said receptacles have one of a cup shape, conical, and a frusto-conical shape.

11. A vacuum cleaner apparatus comprising a dust cup according to any one of the preceding claims.

Patentansprüche

1. Staubbehälter (10), umfassend:

ein Staubbehältergehäuse (11), das eine Staubbehälterkammer (12) umfasst, wobei das Staubbehältergehäuse ferner einen Lufteinlass (13) und einen Luftauslass (14) umfasst, die einen Weg für einen staubbeladenen Luftstrom zum Durchströmen der Staubbehälterkammer definieren, wobei der Luftauslass angeordnet ist, um mit einem Luftansaugelement verbunden werden zu können, mit dem der Weg in Fluidverbindung steht;

eine Filteranordnung (20), die ein erstes Ende (22), das entferntbar an dem Luftauslass zum Filtern des staubbeladenen Luftstroms angeordnet ist, aufweist;

wobei die Filteranordnung einen äußeren Filter (25) und einen inneren Filter (24) umfasst, wobei der äußere Filter und der innere Filter als Buchsen ausgebildet sind, die konzentrisch und unidirektional mit einer zugehörigen Buchsenöffnung in Richtung des ersten Endes der Filteranordnung angeordnet sind, und wobei der innere Filter verschiebbar in den äußeren Filter einführbar ist und wobei in einer montierten Position der Filter angeordnet ist, um im Wesentlichen

vollständig in den äußeren Filter eingeführt zu werden;

dadurch gekennzeichnet, dass die Filteranordnung ferner ein Befestigungselement (40, 41; 50, 51; 60, 61) umfasst, dass zum Halten des inneren Filters in einer vorbestimmten Verschiebeposition (d) in Bezug auf die montierte Position angeordnet ist, als Reaktion darauf, dass der innere Filter einer Extraktionskraft zum Lösen der Filteranordnung aus dem Staubbehältergehäuse ausgesetzt ist.

2. Staubbehälter nach Anspruch 1, wobei das Befestigungselement angeordnet ist, damit der innere Filter nach dem Aussetzen mit einer Extraktionskraft, die größer als ein vorbestimmter Schwellenwert ist, von dem äußeren Filter abgenommen werden kann.
3. Staubbehälter nach Anspruch 2, wobei die Filteranordnung vom Gehäuse abgenommen werden kann, nachdem sie einer Extraktionskraft ausgesetzt wird, die kleiner als der vorbestimmte Schwellenwert ist.
4. Staubbehälter nach einem der Ansprüche 1 bis 3, wobei das Befestigungselement einen vorstehenden Abschnitt (40) aufweist, der auf einer äußeren Oberfläche der Buchse des inneren Filters angeordnet ist, wobei der vorstehende Abschnitt ferner zum Verschieben in einem Aufnahmeabschnitt (41) angeordnet ist, der auf einer inneren Oberfläche der Buchse des äußeren Filters angeordnet ist.
5. Staubbehälter nach einem der Ansprüche 1 bis 3, wobei das Befestigungselement einen vorstehenden Abschnitt aufweist, der auf einer inneren Oberfläche der Buchse des äußeren Filters angeordnet ist, wobei der vorstehende Abschnitt ferner zum Gleiten in einen Aufnahmeabschnitt angeordnet ist, der auf einer äußeren Oberfläche der Buchse des inneren Filters angeordnet ist.
6. Staubbehälter nach einem der Ansprüche 1 bis 3, wobei das Befestigungselement Reibungsflächen (50, 51; 60, 61) umfasst, die auf der inneren Oberfläche des äußeren Filters und der äußeren Oberfläche des inneren Filters angeordnet sind.
7. Staubbehälter nach Anspruch 4 oder 5, wobei der Aufnahmeabschnitt eine Länge aufweist, die der vorbestimmten Verschiebung entspricht.
8. Staubbehälter nach einem der vorhergehenden Ansprüche, wobei der innere Filter ein erstes Griffelement (42) umfasst.
9. Staubbehälter nach einem der vorhergehenden Ansprüche, wobei der äußere Filter ein zweites Griffelement (43) umfasst.

10. Staubbehälter nach einem der vorhergehenden Ansprüche, wobei die Buchsen eine Becher-, Kegel- oder Kegelstumpfform aufweisen.

- 5 11. Staubsaugervorrichtung, umfassend einen Staubbehälter nach einem der vorhergehenden Ansprüche.

10 Revendications

1. Coupelle à poussière (10) comprenant :

un boîtier (11) de coupelle à poussière entourant une chambre (12) de coupelle à poussière, ledit boîtier de coupelle à poussière comprenant en outre une entrée d'air (13) et une sortie d'air (14) définissant un trajet pour qu'un courant d'air chargé de poussière circule à travers ladite chambre de coupelle à poussière, et ladite sortie d'air étant agencée pour pouvoir être raccordée à un élément d'aspiration d'air avec lequel ledit trajet est en communication fluïdique ;
un ensemble filtre (20) comportant une première extrémité (22) qui est disposée amovible à ladite sortie d'air pour filtrer ledit courant d'air chargé de poussière ;
ledit ensemble filtre comprenant un filtre extérieur (25) et un filtre intérieur (24),
dans laquelle ledit filtre extérieur et ledit filtre intérieur sont constitués comme des récipients qui sont disposés de façon concentrique et unidirectionnelle, avec une ouverture respective de récipient dirigée vers ladite première extrémité de l'ensemble filtre ;
dans laquelle ledit filtre intérieur peut être introduit par coulissement dans ledit filtre extérieur ;
et

dans laquelle, quand il est en position monté, ledit filtre intérieur est sensiblement introduit complètement dans ledit filtre extérieur,

caractérisée en ce que ledit ensemble filtre comprend en outre un élément de fixation (40, 41 ; 50, 51 ; 60, 61) qui est agencé pour retenir le filtre intérieur dans une position prédéterminée de déplacement (d) par rapport à ladite position monté, en réaction à une force d'extraction appliquée audit filtre intérieur pour séparer ledit ensemble filtre dudit boîtier de coupelle à poussière.

2. Coupelle à poussière selon la revendication 1, dans laquelle ledit élément de fixation est agencé de telle sorte que ledit filtre intérieur, lorsqu'il est soumis à une force d'extraction supérieure à une force seuil prédéterminée, peut être séparé dudit filtre extérieur.
3. Coupelle à poussière selon la revendication 2, dans

laquelle ledit ensemble filtre peut être séparé dudit boîtier lorsqu'il est soumis à une force d'extraction qui est inférieure à ladite force seuil prédéterminée.

4. Coupelle à poussière selon l'une quelconque des revendications 1 à 3, dans laquelle ledit élément de fixation comprend une partie en saillie (40) disposée sur la surface extérieure du récipient dudit filtre intérieur, laquelle partie en saillie est en outre agencée pour coulisser dans une partie réceptrice (41) disposée sur la surface intérieure du récipient dudit filtre extérieur. 5
10
5. Coupelle à poussière selon l'une quelconque des revendications 1 à 3, dans laquelle ledit élément de fixation comprend une partie en saillie disposée sur la surface intérieure du récipient dudit filtre extérieur, laquelle partie en saillie est en outre agencée pour coulisser dans une partie réceptrice disposée sur la surface extérieure du récipient dudit filtre intérieur. 15
20
6. Coupelle à poussière selon l'une quelconque des revendications 1 à 3, dans laquelle ledit élément de fixation comprend des surfaces de frottement (50, 51 ; 60, 61) disposées sur ladite surface intérieure dudit filtre extérieur et sur ladite surface extérieure dudit filtre intérieur. 25
7. Coupelle à poussière selon la revendication 4 ou 5, dans laquelle ladite partie réceptrice a une longueur qui correspond audit déplacement prédéterminé. 30
8. Coupelle à poussière selon l'une quelconque des revendications précédentes, dans laquelle ledit filtre intérieur comprend un premier élément de prise (42). 35
9. Coupelle à poussière selon l'une quelconque des revendications précédentes, dans laquelle ledit filtre intérieur comprend un second élément de prise (43). 40
10. Coupelle à poussière selon l'une quelconque des revendications précédentes, dans laquelle lesdits récipients ont une forme de tasse soit conique soit tronconique. 45
11. Appareil aspirateur comprenant une coupelle à poussière selon l'une quelconque des revendications précédentes. 50
55

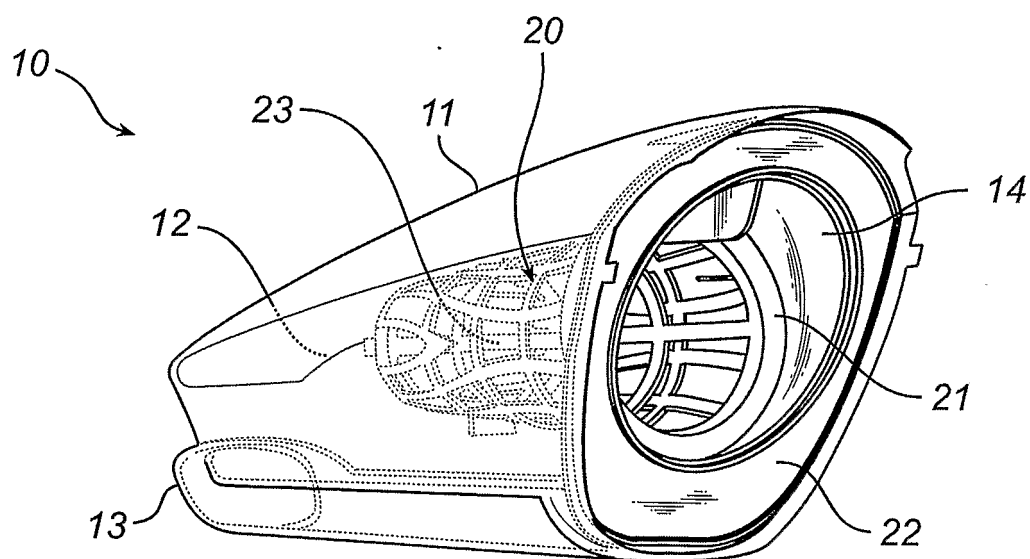


Fig. 1a

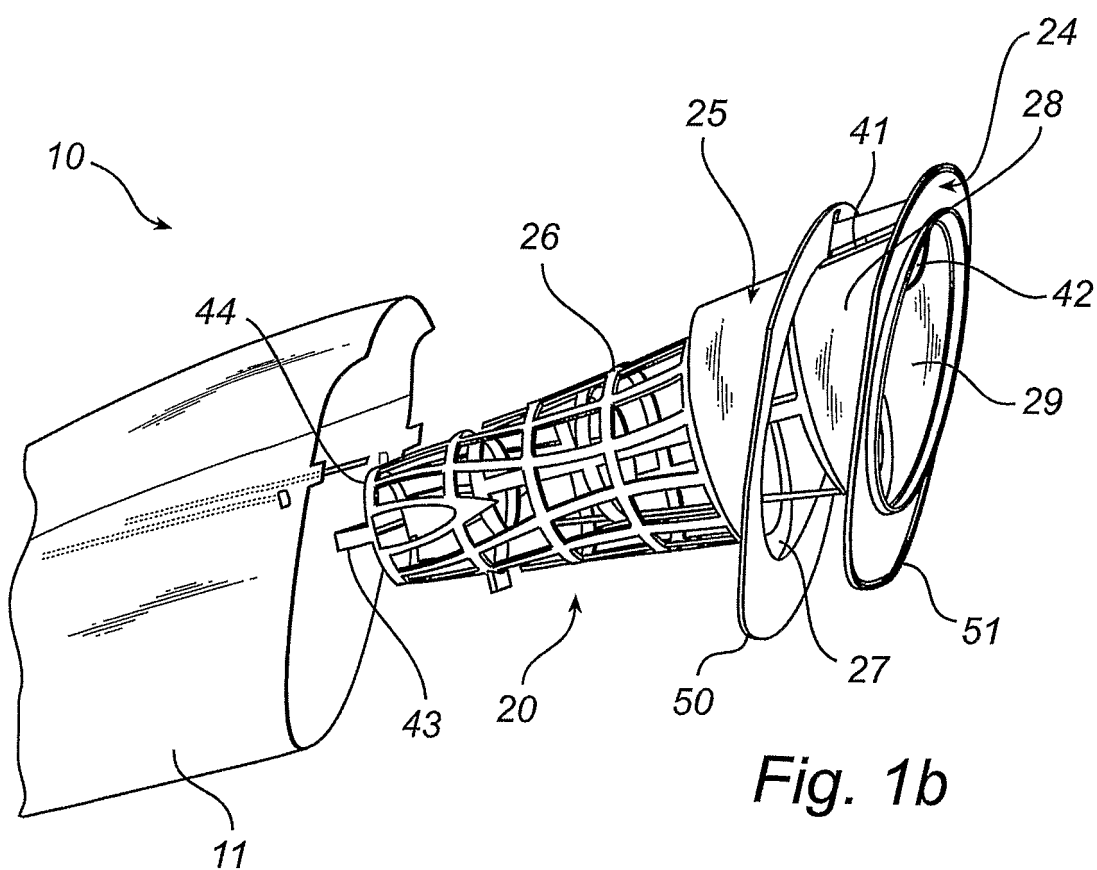


Fig. 1b

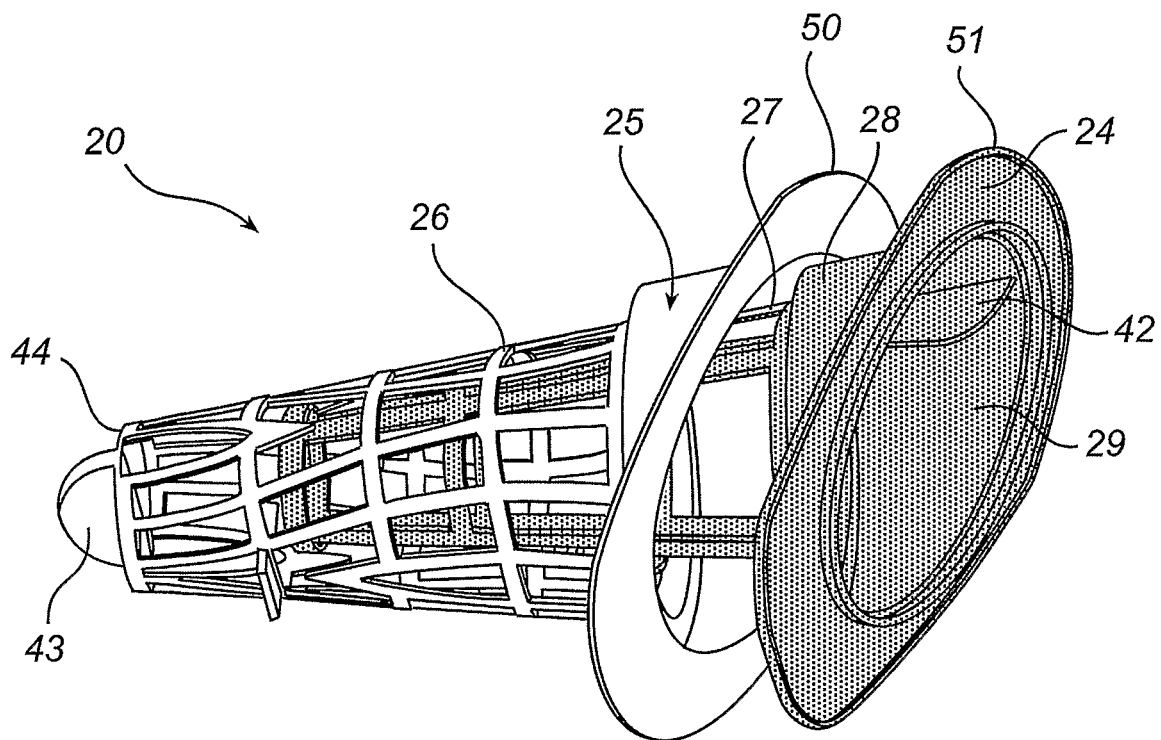


Fig. 1c

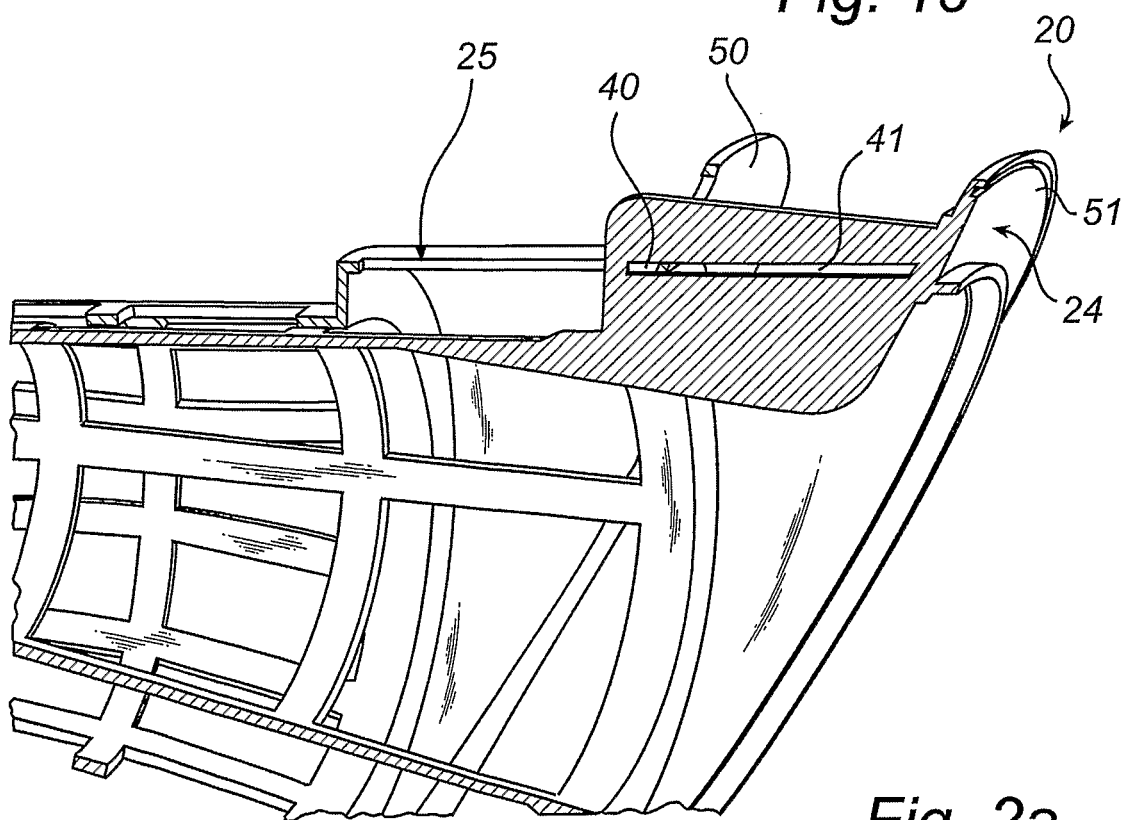


Fig. 2a

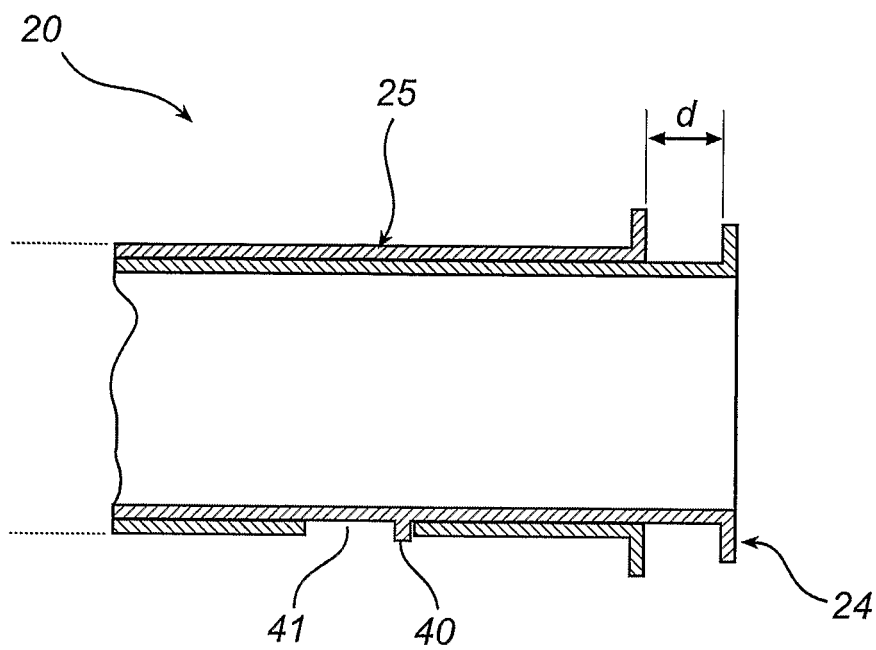


Fig. 2b

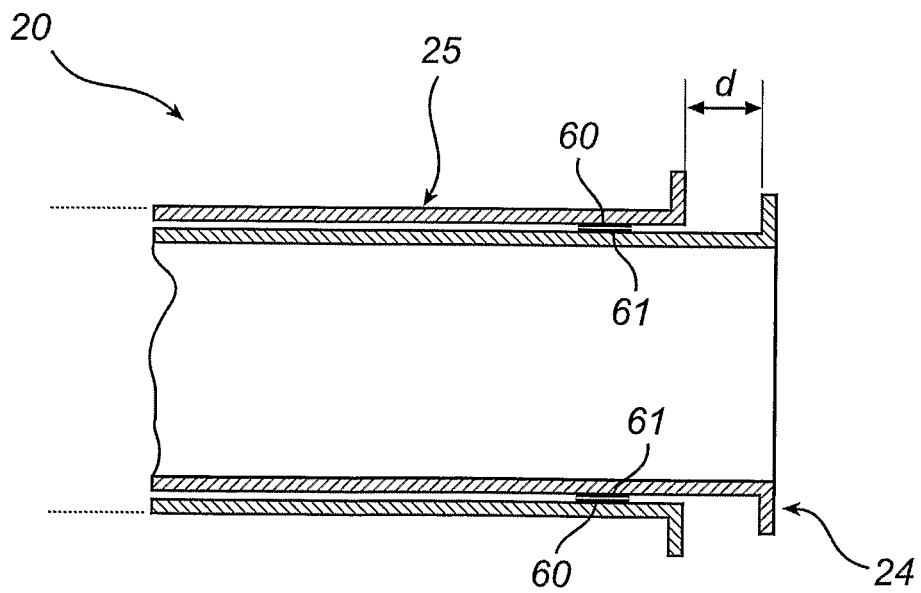


Fig. 2c

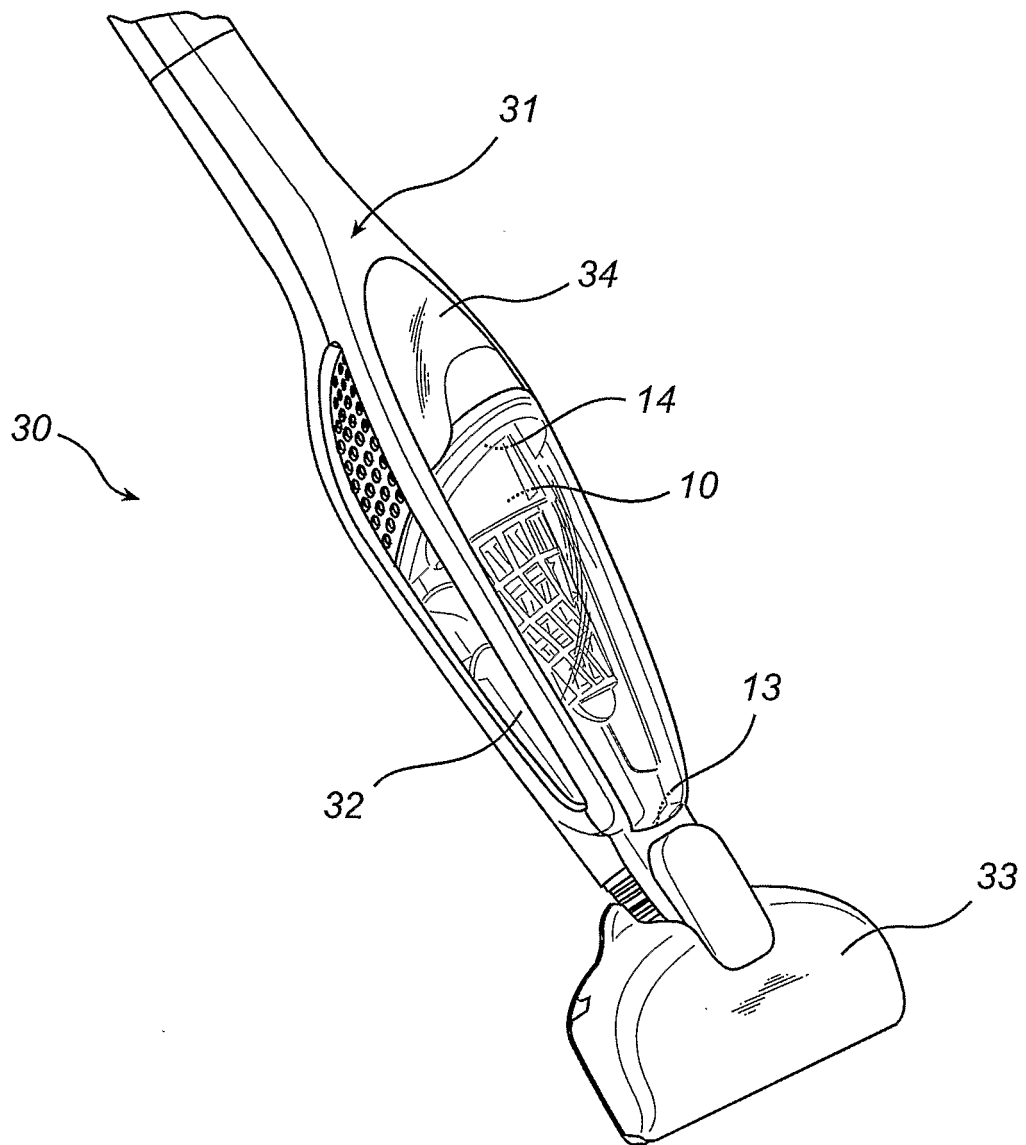


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1523916 A [0004]