



(51) International Patent Classification:

H01L 21/02 (2006.01) C23C 16/455 (2006.01)

H01L 21/67 (2006.01) H01J 37/32 (2006.01)

(21) International Application Number:

PCT/US2019/046867

(22) International Filing Date:

16 August 2019 (16.08.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/108,592 22 August 2018 (22.08.2018) US

(71) Applicant: LAM RESEARCH CORPORATION
[US/US]; 4650 Cushing Parkway, M/S CA-1, Fremont, California 94538 (US).

(72) Inventors: AGARWAL, Pulkit; 9890 SW Teplura Terrace, Beaverton, Oregon 97007 (US). LAVOIE, Adrienne; 12705 NE Coyote Loop, Newberg, Oregon 97132 (US). KUMAR, Purushottam; 6616 NE Karlson Court, Hillsboro, Oregon 97124 (US).

(74) Agent: LEE, Michael; BEYER LAW GROUP LLP, P.O. Box 51887, Palo Alto, California 94303-1887 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR MODULATING FILM UNIFORMITY

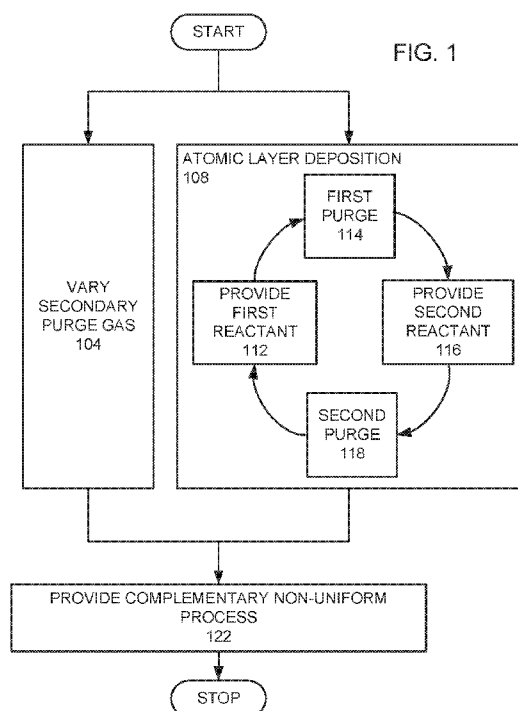

(57) Abstract: A method for processing a substrate is provided, wherein the substrate is located below a showerhead in a processing chamber. A deposition layer is deposited on the substrate, wherein at least one deposition gas is provided through the showerhead. A secondary purge gas is flowed during the depositing the deposition layer from a location outside of the showerhead in the processing chamber forming a flow curtain around an outer edge of the showerhead, wherein the secondary purge gas comprises at least one component gas. A partial pressure of the at least one component gas is changed over time during the depositing the deposition layer, wherein the changing the partial pressure changes the non-uniformity over time during the depositing the deposition layer.

METHOD AND APPARATUS FOR MODULATING FILM UNIFORMITY**CROSS REFERENCE TO RELATED APPLICATION**

[0001] This application claims the benefit of priority of U.S. Application No. 16/108,592 dated August 22, 2018, which is incorporated herein by references for all purposes.

BACKGROUND

[0002] The present disclosure relates to the formation of semiconductor devices. More specifically, the disclosure relates to the formation of semiconductor devices in a system where a multiple stations are within a processing chamber.

SUMMARY

[0003] To achieve the foregoing and in accordance with the purpose of the present disclosure, a method for processing a substrate is provided, wherein the substrate is located below a showerhead in a processing chamber. A deposition layer is deposited on the substrate, wherein at least one deposition gas is provided through the showerhead. A secondary purge gas is flowed during the depositing the deposition layer from a location outside of the showerhead in the processing chamber forming a flow curtain around an outer edge of the showerhead, wherein the secondary purge gas comprises at least one component gas. A partial pressure of the at least one component gas is changed over time during the depositing the deposition layer, wherein the depositing the deposition layer has a non-uniformity, wherein the changing the partial pressure changes the non-uniformity over time during the depositing the deposition layer.

[0004] In another manifestation, a method for processing a substrate, wherein the substrate is located below a showerhead in a processing chamber is provided. A deposition layer is deposited on the substrate, using a deposition process, wherein the deposition process flows at least one deposition gas through the showerhead. A secondary purge gas is flowed during the deposition process from a location outside of the showerhead in the processing chamber forming a flow curtain around an outer edge of the showerhead, wherein the secondary purge gas is tuned to cause the deposition process to either have a dome shape or bowl shape non-uniformity.

[0005] In another manifestation, an apparatus for depositing a layer on a substrate is provided. A process chamber is provided. At least two substrate supports are within the process chamber. At least two showerheads are positioned in the process chamber, wherein each showerhead of the at least two showerhead is disposed above a substrate support of the at least two substrate supports. At least two purge gas outlets are provided, wherein each purge gas outlet of the at least two purge gas outlets is above a showerhead of the at least two showerheads and adapted to flow a secondary purge gas, so that each of the at least two showerheads has a curtain of the secondary purge gas around an outer edge of each of the at least two showerheads. At least two actuators are provided, wherein each actuator of the at least two actuators is adapted to tilt a showerhead of the at least two showerheads. A controller is controllably connected to the at least two actuators.

[0006] These and other features of the present disclosure will be described in more detail below in the detailed description of the disclosure and in conjunction with the following figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The present disclosure is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

20 [0008] FIG. 1 is a flow chart of an embodiment.

[0009] FIG. 2A is a schematic top cut away view of a process chamber that may be used in an embodiment.

[0010] FIG. 2B is a cut away side view of the embodiment shown in FIG. 2A

25 [0011] FIG. 3 is a schematic view of a computer system that may be used in practicing an embodiment.

[0012] FIG. 4 is a flow chart of another embodiment.

[0013] FIG. 5 is a cut away schematic view of another embodiment.

DETAILED DESCRIPTION

[0014] The present disclosure will now be described in detail with reference to a few preferred embodiments thereof as illustrated in the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present disclosure. It will be apparent, however, to one skilled in the art, that the present disclosure may be practiced without some or all of these specific details. In other instances, well known process steps and/or structures have not been described in detail in order to not unnecessarily obscure the present disclosure.

10 [0015] FIG. 1 is a flow chart of an embodiment. A secondary purge gas is varied (step 104). The secondary purge gas comprises at least one component gas. The varying of the secondary purge gas changes the partial pressure of the at least one component gas over time. Simultaneously, an atomic layer deposition (ALD) process is provided (step 108). The atomic layer deposition process (step 108) comprises a
15 plurality of cycles, where each cycle comprises providing a first reactant (step 112), purging the first reactant (step 114), providing a second reactant (step 116), and purging the second reactant (step 118).

[0016] FIG. 2A is a cut away top schematic view of a processing chamber 200 with four processing stations that is used in an embodiment. FIG. 2B is a cut away
20 side view of the processing chamber 200, shown in FIG. 2A. The processing chamber 200 has a chamber wall 204. Within the chamber wall 204 are located four processing stations. Each processing station comprises a pedestal 212 for supporting a substrate 208, a showerhead 216 for providing gas to the substrate 208 below the showerhead 216, and a manifold 220 connecting the showerhead 216 to a gas source 222. In this
25 embodiment, the gas source 222 comprises a first reactant source 228, a second reactant source 232, and a primary purge gas source 236. A secondary purge gas outlet 224 is in fluid connection with a secondary purge gas source 226. In this embodiment, the secondary purge gas outlet 224 is in the shape of a cylindrical collar surrounding the manifold 220. The cylindrical collar has apertures to allow the secondary purge
30 gas to flow outwardly in a radial direction over the top of the showerhead 216. A controller 235 is controllably connected to the gas source 222, the secondary purge gas

source 226, a radio frequency (RF) power system 240, and a vacuum system 244. An example of such a chamber is the Striker™ Oxide system manufactured by Lam Research Corporation of Fremont, CA.

[0017] FIG. 3 is a high level block diagram showing a computer system 300, which is suitable for implementing a controller 235 used in embodiments. The computer system may have many physical forms ranging from an integrated circuit, a printed circuit board, and a small handheld device up to a huge super computer. The computer system 300 includes one or more processors 302, and further can include an electronic display device 304 (for displaying graphics, text, and other data), a main memory 306 (e.g., random access memory (RAM)), storage device 308 (e.g., hard disk drive), removable storage device 310 (e.g., optical disk drive), user interface devices 312 (e.g., keyboards, touch screens, keypads, mice or other pointing devices, etc.), and a communications interface 314 (e.g., wireless network interface). The communications interface 314 allows software and data to be transferred between the computer system 300 and external devices via a link. The system may also include a communications infrastructure 316 (e.g., a communications bus, cross-over bar, or network) to which the aforementioned devices/modules are connected.

[0018] Information transferred via communications interface 314 may be in the form of signals such as electronic, electromagnetic, optical, or other signals capable of being received by communications interface 314, via a communication link that carries signals and may be implemented using wire or cable, fiber optics, a phone line, a cellular phone link, a radio frequency link, and/or other communication channels. With such a communications interface, it is contemplated that the one or more processors 302 might receive information from a network, or might output information to the network in the course of performing the above-described method steps. Furthermore, method embodiments may execute solely upon the processors or may execute over a network such as the Internet, in conjunction with remote processors that share a portion of the processing.

[0019] The term “non-transient computer readable medium” is used generally to refer to media such as main memory, secondary memory, removable storage, and storage devices, such as hard disks, flash memory, disk drive memory, CD-ROM, and

other forms of persistent memory and shall not be construed to cover transitory subject matter, such as carrier waves or signals. Examples of computer code include machine code, such as produced by a compiler, and files containing higher level code that are executed by a computer using an interpreter. Computer readable media may also be computer code transmitted by a computer data signal embodied in a carrier wave and representing a sequence of instructions that are executable by a processor.

[0020] In an example of an embodiment, substrates 208 are placed on the pedestals 212. A varying flow of a secondary purge gas is provided (step 104). In this example, the secondary purge gas is oxygen (O_2). Oxygen is the at least one component gas of the secondary purge gas. In this example, the flow rate of the secondary purge gas is varied (step 104) by increasing the flow rate of O_2 . As a result the partial pressure of O_2 is increased over time.

[0021] Simultaneously with varying the flow of the secondary purge gas (step 104), an atomic layer deposition process (step 108) is provided, which deposits an ALD layer. The atomic layer deposition process (step 108) comprises a plurality of cycles, where each cycle comprises providing a first reactant (step 112), purging the first reactant (step 114), providing a second reactant (step 116), and purging the second reactant (step 118). An example of a recipe for the atomic layer deposition process (step 108) provides a first reactant, which is 400 sccm aminosilane (step 112).

A silicon containing precursor layer is deposited. After 0.4 second, the flow of the first reactant through the showerheads 216 is stopped. A first purge gas is flowed to the stations through the showerheads 216 (step 114). In this example, the first purge gas is argon and oxygen (O_2). The flow of the first purge gas is stopped. A second reactant is flowed into the process chamber through the showerheads 216 (step 116).

In this example, an oxidation gas of 13,000 sccm Ar and 1500 sccm O_2 is flowed as the second reactant. The oxidation gas is transformed into a plasma. In this example, 100 to 500 watts of RF are provided at a frequency of 13.56 (megahertz) MHz. The plasma from the oxidation gas transforms the deposited silicon containing precursor layer into silicon oxide, which is part of the ALD layer. After 0.25 seconds, the flow of the second reactant into the process chamber is stopped. A purge gas is flowed into the process chamber to purge the second reactant gas (step 118). The flow of the

second purge gas is stopped. The cycle then repeats from the step of flowing the precursor gas into the process chamber.

5 **[0022]** The secondary purge gas 248 flows from the secondary purge gas outlets 224 over the top of the showerheads 216 to form a secondary purge gas curtain 252 around the outer edges of the showerheads 216.

10 **[0023]** Without being bound by theory, it is believed that the time variance of the second purge gas affects the deposition at the outer edge of the substrates 208, to provide a tuned radial non-uniformity. Radial non-uniformities cause either an increase or decrease in deposition along a radial distance from a center. In an example, the thickness of deposition increases along a radial distance, without decreasing. In another example, the thickness of the deposition decrease along a radial distance without increasing. Such radial non-uniformities result in bowl shape or dome shape profiles. In this example, the time variance of the second purge gas creates a tuned variance with a bowl shape profile. In addition, the time variation improves pattern loading. When the secondary purge gas is oxygen, the oxygen is difficult to ignite. Increasing the flow of the secondary purge gas over time, makes the outer process regions more difficult to ignite over time. In addition, increasing the flow of the secondary purge gas over time increases the influence of the purge gas on the outer regions of the wafer over time.

20 **[0024]** A complementary non-uniform process is provided (step 122). The ALD process (step 108) and the complementary non-uniform process (step 122) are considered complementary if the resulting product is more radially uniform than a product that is formed by the complementary non-uniform process (step 122) alone and a product formed by the ALD process (step 108) alone. Examples of the complementary non-uniform process (step 122) may be an etch back process, a double patterning process, or a gap, trench, hole, or slot fill process for applications such as shallow trench isolation (STI) or for the manufacturing of memory devices such as dynamic random access memory (DRAM), a “not and” (NAND) gate, static random access memory (SRAM), and phase change random access memory (PCRAM).

30 **[0025]** In other embodiments, the partial pressure of the at least one component gas may be changed by keeping the flow rate of the secondary purge gas constant and

varying a ratio of the at least one component gas and another gas in the secondary purge gas. In various embodiments, the at least one component gas is one of argon (Ar), helium (He), nitrogen (N₂), and O₂. In exemplary embodiments, the secondary purge gas may be pure O₂, N₂, Ar, carbon monoxide (CO), carbon dioxide (CO₂),
5 ozone (O₃), or He. In other exemplary embodiments, the secondary purge gas may be a mixture of O₂ and N₂ with a flow ratio by number of molecules in a range from 3:1 to 1:3. In other exemplary embodiments, the secondary purge gas may be a mixture of O₂ and Ar or He with a flow ratio by number of molecules in a range from 3:1 to 1:3. Other gases that are inert to the ALD process and not ignited by the plasma during the
10 ALD process may be used in other embodiments. Since the secondary purge gas is not ignited by the ALD process and is inert, the secondary purge gas provides isolation between adjacent stations to prevent cross talk.

[0026] In other embodiments, instead of providing a complementary non-uniform process (step 122) after the ALD process (step 108) and varying the secondary purge
15 gas (step 104), the complementary non-uniform process (step 122) may be before the ALD process (step 108) and varying the secondary purge gas (step 104). In such an embodiment, the complementary non-uniform process (step 122) would form a stack that has a radial non-uniformity that is complementary to the radial non-uniformity of the ALD process (step 108) performed simultaneously with the varying the secondary
20 purge gas (step 104).

[0027] In some embodiments, the varying the secondary purge gas (step 104) varies the secondary purge gas during the entire time of providing the ALD process (step 108). In some embodiments, the varying the secondary purge gas (step 104) does not vary the secondary purge gas during the entire time of providing the ALD process
25 (step 108), but at least part of the duration of the providing the ALD process (step 108). In an exemplary embodiment, the varying the secondary purge gas (step 104) is changing the secondary purge gas over at least half the duration of the providing the ALD process (step 108).

[0028] FIG. 4 is a high level flow chart of a method used in another embodiment.
30 A substrate 208 is processed by performing an ALD process using a secondary purge gas (step 404). The flow rate and components of the secondary purge gas tune a radial

non-uniformity. An additional process is performed on the substrate 208 (step 408), where the additional process (step 408) causes a radial non-uniformity. The radial non-uniformity of the resulting product on the substrate is measured (step 412). The measured radial non-uniformity is the sum of the radial non-uniformity of the ALD process (step 404) and the radial non-uniformity of the additional process (step 408). If the measured radial non-uniformity is not satisfactory, the secondary purge gas recipe is adjusted (step 420). This would entail adjusting the flow rate of the secondary purge gas and/or the components of the secondary purge gas. Steps 404 to 420 are repeated until the measured radial non-uniformity is satisfactory (step 416). A satisfactory recipe for the secondary purge gas has been identified. Subsequent substrates are processed using the identified satisfactory recipe for the secondary purge gas (step 424). The additional process is performed on each substrate (step 428).

[0029] The atomic layer deposition process (steps 404 and 424) may use the same atomic layer deposition process described in the previous embodiment (step 108). The recipe for the secondary purge gas causes the atomic layer deposition process (steps 404 and 424) to have a radial non-uniformity that is complementary to the radial non-uniformity of the additional process (step 408, 428).

[0030] In some embodiments, the additional process (step 428) may be performed before the ALD with the secondary purge gas (step 424). The secondary purge gases used in the described above may be used in various embodiments. An example of an additional process may be a carbon trim process. Other examples of additional processes may be other processes used during double or multiple patterning. During double or multiple patterning, feature size is reduced by factors of the power of 2. The number of defects caused by non-uniformity increases as feature size is reduced. Providing methods of increasing uniformity during double or multiple patterning processes reduces defects. Various embodiments use the secondary purge gas as an additional parameter to provide a tuned non-uniformity, which is complementary to other processes used for double or multiple patterning.

[0031] In other embodiments, the secondary purge gas may be used with a chemical vapor deposition (CVD) process or plasma-enhanced chemical vapor

deposition (PECVD) process. In such embodiments, the flow of the secondary purge gas may be varied while performing a CVD or PECVD process. In other embodiments, the flow of the secondary purge gas is tuned to cause the CVD or PECVD process to either have a dome shape or bowl shape non-uniformity.

- 5 **[0032]** FIG. 5 is a cut away side view of a processing chamber 200, used in another embodiment. The processing chamber 200 has a chamber wall 204. Within the chamber wall 204 are located four processing stations. Each processing station comprises a pedestal 212 for supporting a substrate 208, a showerhead 216 for providing gas to the substrate 208 below the showerhead 216, and a manifold 220
10 connecting the showerhead 216 to a gas source. A secondary purge gas outlet 224 is in fluid connection with a secondary purge gas source. In this embodiment, the secondary purge gas outlet 224 is in the shape of a cylindrical collar surrounding the manifold 220. The cylindrical collar 224 has apertures 502 to allow the secondary purge gas to flow outwardly in a radial direction over the top of the showerhead 216.
15 Showerhead actuators 504 are mechanically connected to the showerhead 216. A controller 235 is controllably connected to the showerhead actuators 504.

[0033] The showerhead actuators 504 are able to adjust the tilt of the showerheads 216. The controller 235 allows for adjustment of the showerheads 216 during or between processing. Tilting the showerheads 216 may be used to create azimuthal
20 non-uniformity in the flow of the secondary purge gas. The tilting of the showerheads 216 also changes the gap spacing between the showerheads 216 and the pedestals 212, which changes the power delivery between the showerheads 216 and the pedestals 212. Such a change in spacing is azimuthally non-uniform.

[0034] Subsequent processes may be azimuthally non-uniform. The tilting of the
25 showerheads 216 during a deposition process is designed to create an azimuthal non-uniformity that is complementary to an azimuthal non-uniformity caused by subsequent processes. The azimuthal non-uniformities are considered complementary, if the resulting product after both processes are performed is more azimuthally uniform than a product that is formed by the complementary non-uniform process
30 alone.

[0035] While this disclosure has been described in terms of several preferred embodiments, there are alterations, modifications, permutations, and various substitute equivalents, which fall within the scope of this disclosure. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present disclosure. It is therefore intended that the following appended claims be interpreted as including all such alterations, modifications, permutations, and various substitute equivalents as fall within the true spirit and scope of the present disclosure.

5

CLAIMS

What is claimed is:

1. A method for processing a substrate, wherein the substrate is located below a showerhead in a processing chamber, comprising:
 - 5 depositing a deposition layer on the substrate, wherein at least one deposition gas is provided through the showerhead;
flowing a secondary purge gas during the depositing the deposition layer from a location outside of the showerhead in the processing chamber forming a flow curtain around an outer edge of the showerhead, wherein the secondary purge gas comprises
10 at least one component gas; and
changing a partial pressure of the at least one component gas over time during the depositing the deposition layer, wherein the depositing the deposition layer has a non-uniformity, wherein the changing the partial pressure changes the non-uniformity over time during the depositing the deposition layer.
- 15 2. The method, as recited in claim 1, wherein the changing the partial pressure of the at least one component gas comprises changing a flow rate of the at least one component gas.
3. The method, as recited in claim 1, wherein the at least one component gas comprises at least one of Ar, He, O₂, CO, CO₂, O₃, or N₂.
- 20 4. The method, as recited in claim 1, wherein the non-uniformity comprises a radial non-uniformity.
5. The method, as recited in claim 4, wherein the deposition layer increases along a radial distance from a center.
6. The method, as recited in claim 4, wherein the deposition layer decreases
25 along a radial distance from a center.
7. The method, as recited in claim 1, wherein the depositing the deposition layer comprises providing an atomic layer deposition process.
8. The method, as recited in claim 7, wherein the atomic layer deposition process, comprises:
30 flowing a precursor gas;
flowing an oxidation gas; and

providing a RF power to transform the oxidation gas into a plasma.

9. The method, as recited in claim 1, further comprising processing the substrate with an additional process, wherein the processing the substrate with the additional process has a non-uniformity, wherein the non-uniformity of the processing the substrate with the additional process is complementary to the non-uniformity of the depositing the deposition layer.

10. The method, as recited in claim 1, wherein the processing chamber comprises at least two showerheads for simultaneously processing at least two substrates, wherein the flowing the secondary purge gas flows a secondary purge gas for each of the at least two showerheads, so that each of the at least two showerheads has a curtain of the secondary purge gas around an outer edge of each of the at least two showerheads.

11. A method for processing a substrate, wherein the substrate is located below a showerhead in a processing chamber, comprising:

15 depositing a deposition layer on the substrate, using a deposition process, wherein the deposition process flows at least one deposition gas through the showerhead; and

flowing a secondary purge gas during the deposition process from a location outside of the showerhead in the processing chamber forming a flow curtain around an outer edge of the showerhead, wherein the secondary purge gas is tuned to cause the deposition process to either have a dome shape or bowl shape non-uniformity.

12. The method, as recited in claim 11, wherein the secondary purge gas comprises at least one of Ar, He, O₂, CO, CO₂, O₃, or N₂.

13. The method, as recited in claim 11, wherein the non-uniformity is a radial non-uniformity.

14. The method, as recited in claim 13, wherein the deposition layer increases along a radial distance from a center.

15. The method, as recited in claim 13, wherein the deposition layer decreases along a radial distance from a center.

16. The method, as recited in claim 11, wherein the deposition layer process is an atomic layer deposition process.

17. The method, as recited in claim 16, wherein the atomic layer deposition process, comprises:
- flowing a precursor gas;
 - flowing an oxidation gas; and
 - 5 providing a RF power to transform the oxidation gas into a plasma.
18. An apparatus for depositing a layer on a substrate, comprising:
- a process chamber;
 - at least two substrate supports within the process chamber;
 - at least two showerheads, wherein each showerhead of the at least two
 - 10 showerheads is disposed above a substrate support of the at least two substrate supports;
 - at least two purge gas outlets, wherein each purge gas outlet of the at least two purge gas outlets is above a showerhead of the at least two showerheads adapted to flow a secondary purge gas, so that each of the at least two showerheads has a curtain
 - 15 of the secondary purge gas around an outer edge of each of the at least two showerheads;
 - at least two actuators, wherein each actuator of the at least two actuators is adapted to tilt a showerhead of the at least two showerheads; and
 - a controller controllably connected to the at least two actuators.
- 20 19. The apparatus, as recited in claim 18, further comprising an RF power system adapted to provide RF power to the process chamber, wherein the controller is controllably connected to the RF power system.
20. The apparatus, as recited in claim 18, further comprising a vacuum system adapted to provide a vacuum to the plasma processing chamber, wherein the controller
- 25 is controllably connected to the vacuum system.

1/5

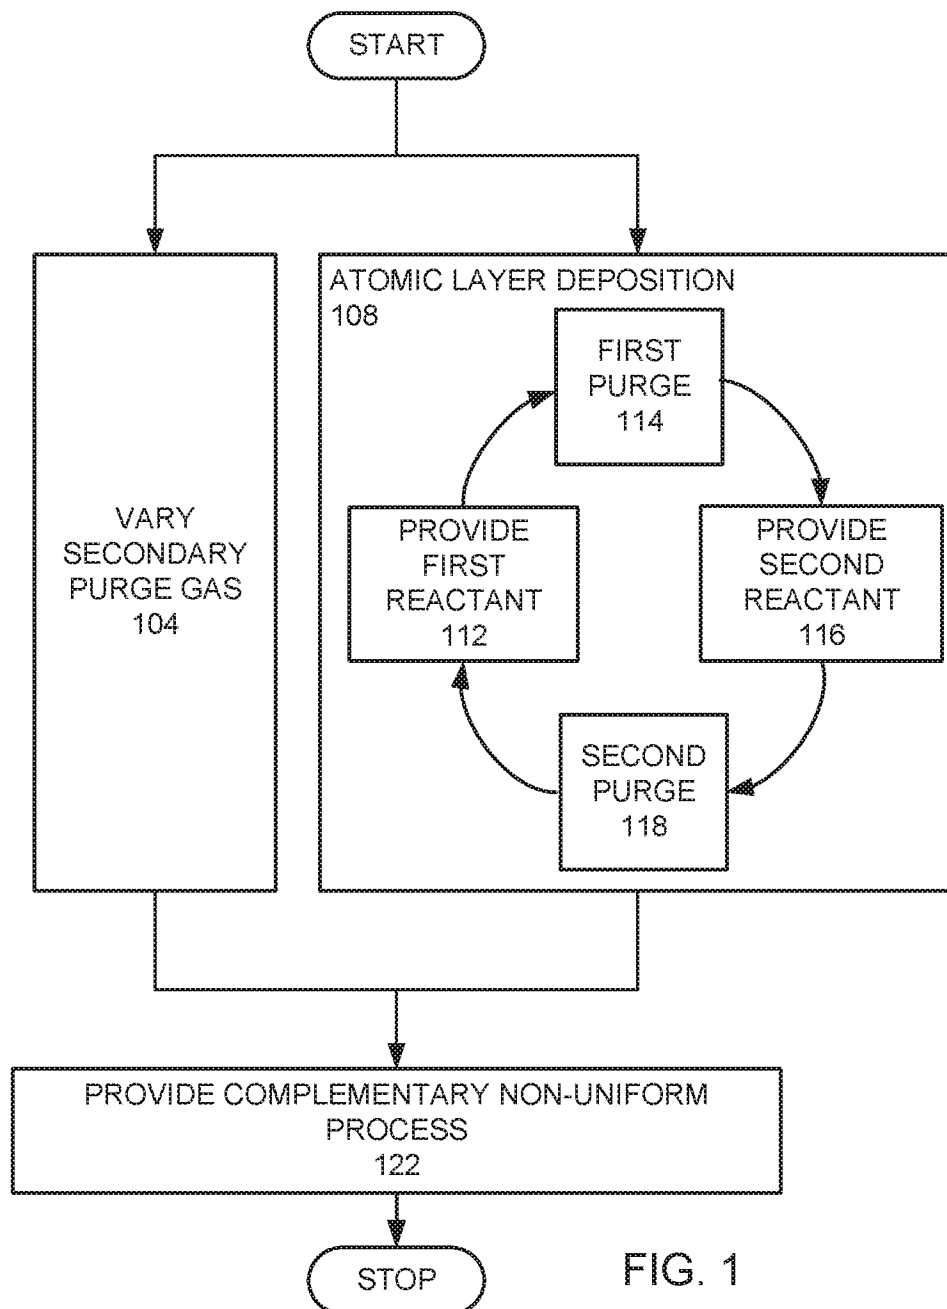


FIG. 1

2/5

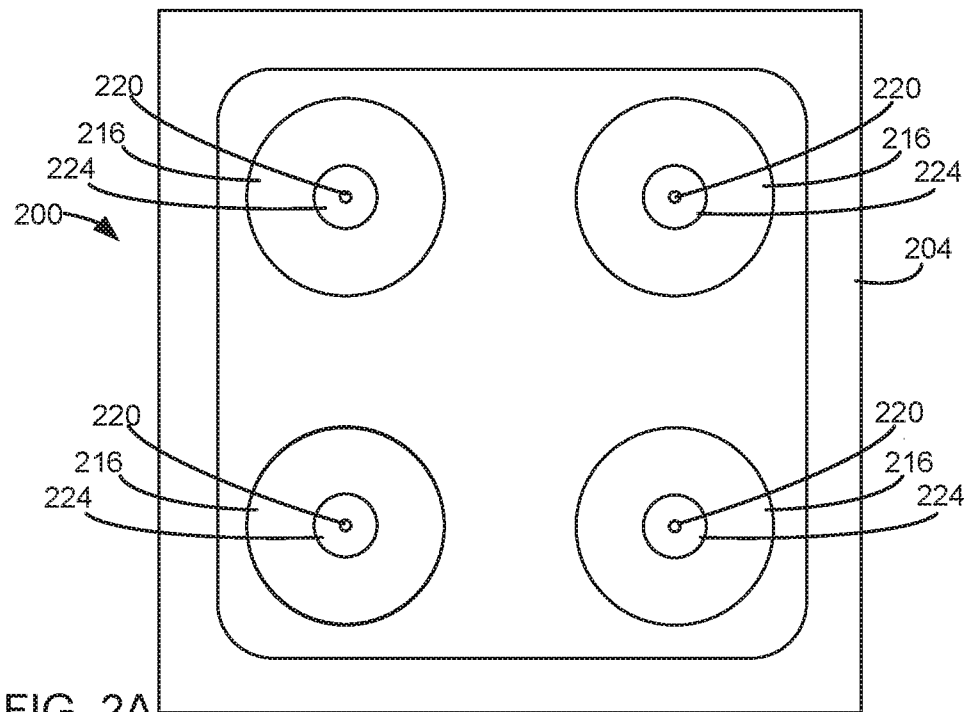


FIG. 2A

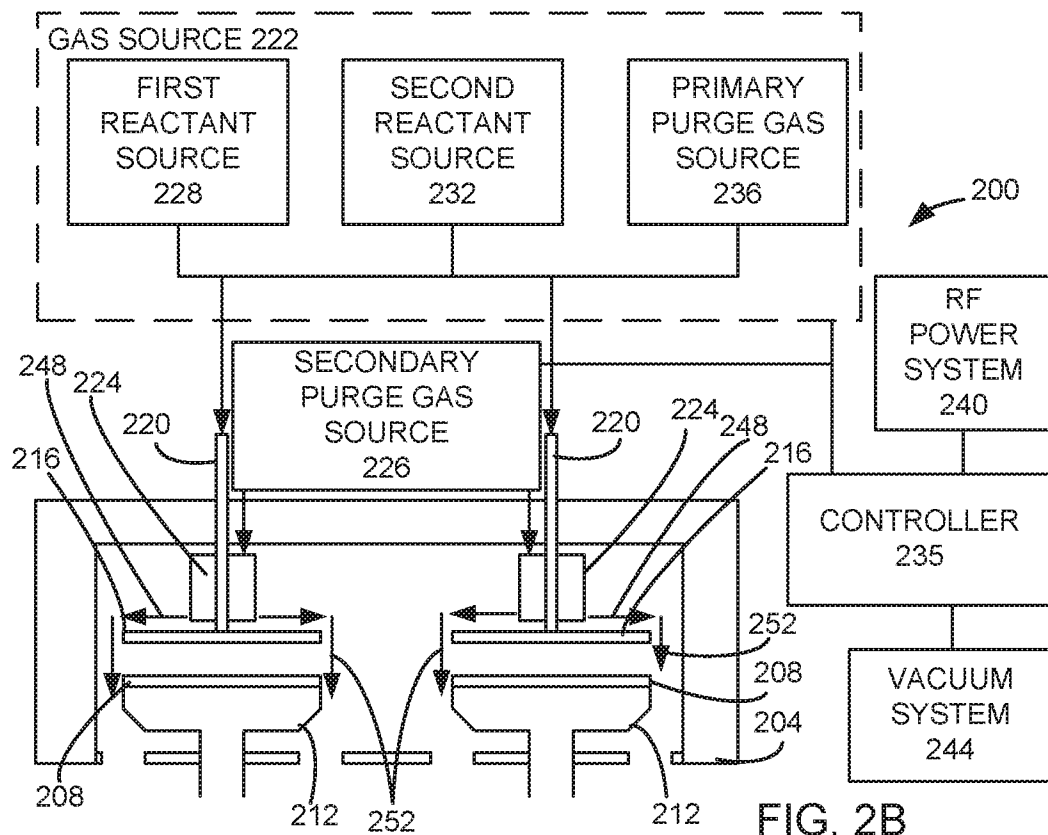


FIG. 2B

3/5

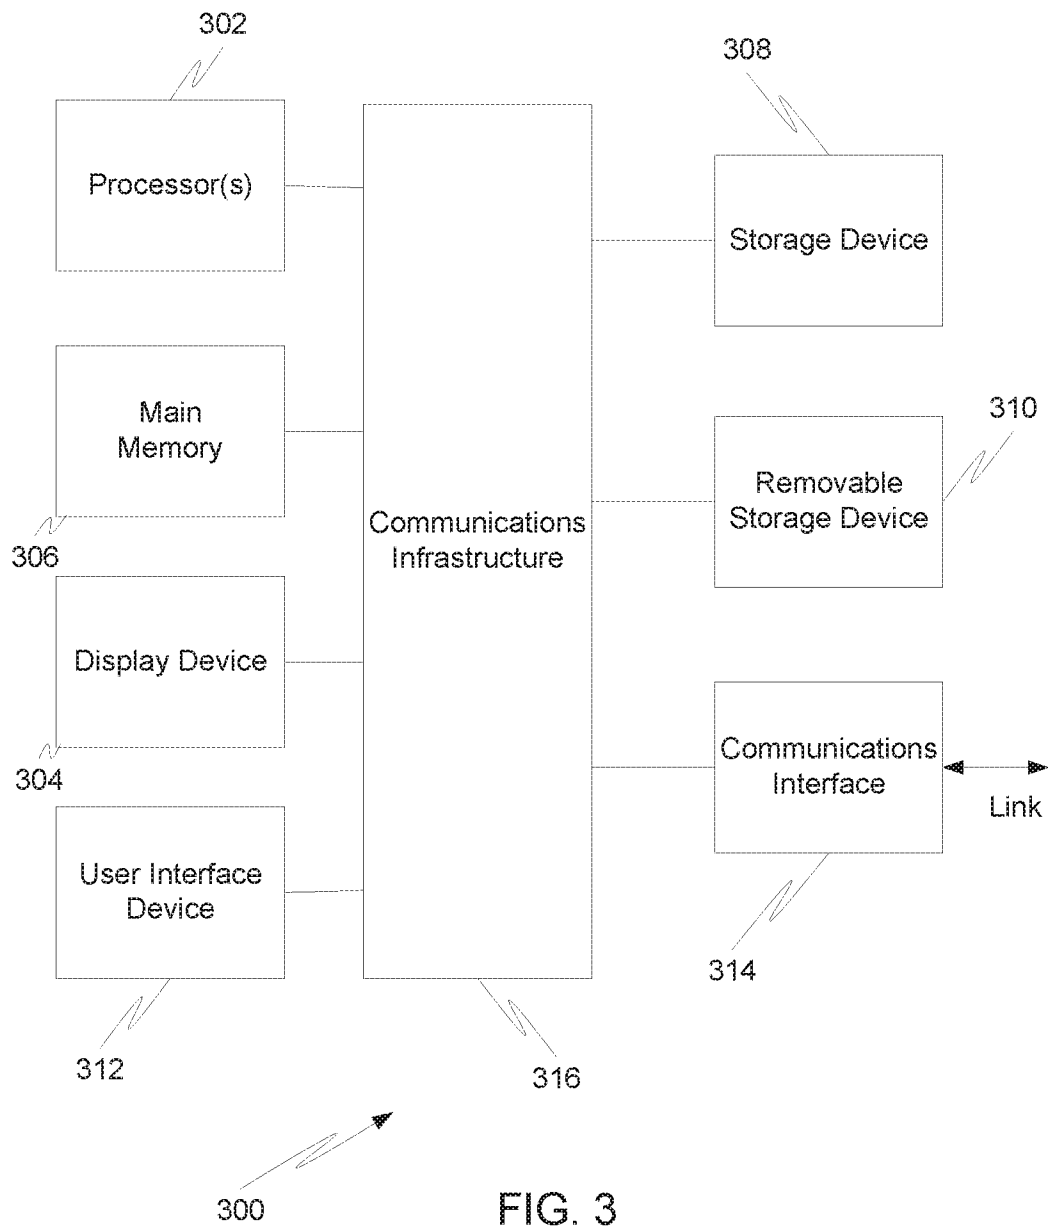
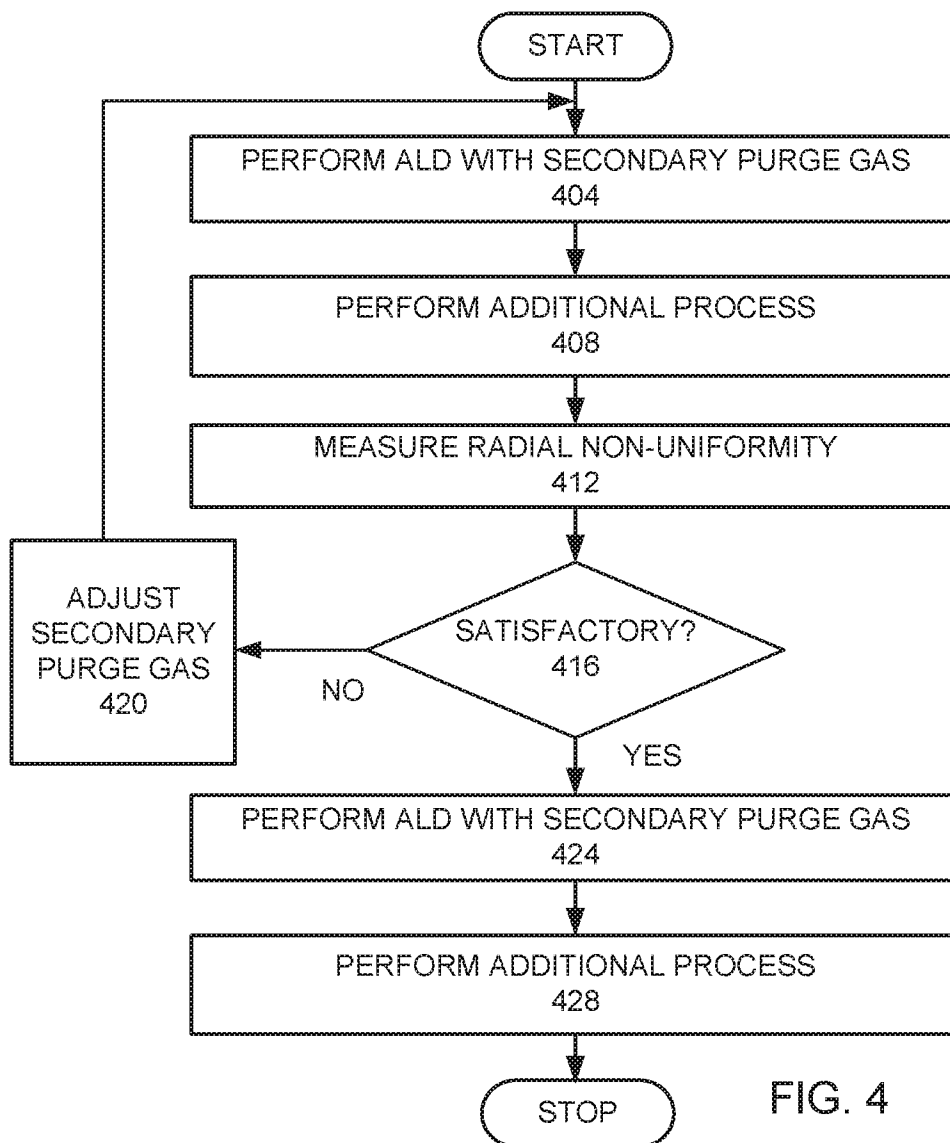


FIG. 3

4/5



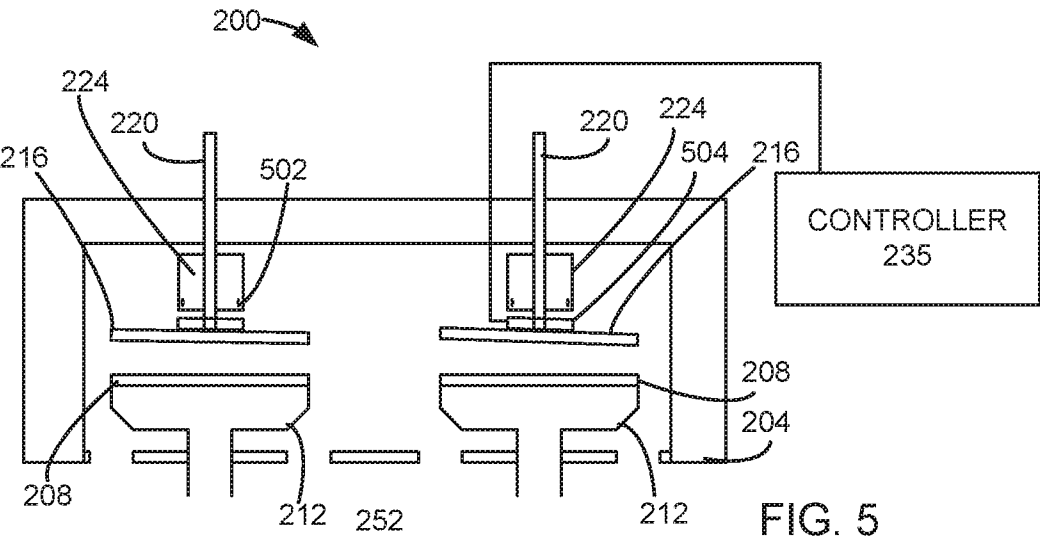


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/046867**A. CLASSIFICATION OF SUBJECT MATTER****H01L 21/02(2006.01)i, H01L 21/67(2006.01)i, C23C 16/455(2006.01)i, H01J 37/32(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/02; C23C 16/34; C23C 16/44; C23C 16/455; C23C 16/458; C23C 16/52; H01L 21/205; H01L 21/311; H01L 21/67; H01J 37/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: showerhead, deposition, flow rate, partial pressure, component gas, non-uniformity, actuator, tilt

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2017-0362713 A1 (LAM RESEARCH CORPORATION) 21 December 2017 See paragraphs [0045]–[0136] and figure 4.	1–17
Y		18–20
Y	US 2017-0191160 A1 (LAM RESEARCH CORPORATION) 06 July 2017 See paragraphs [0031]–[0033], claims 1, 2 and figures 3A, 3B.	18–20
A	US 2015-0170931 A1 (TOKYO ELECTRON LIMITED) 18 June 2015 See paragraphs [0028]–[0052] and figure 3.	1–20
A	JP 2013-070016 A (SHARP CORP.) 18 April 2013 See paragraphs [0104]–[0115] and figure 4.	1–20
A	US 2017-0101711 A1 (UNIVERSAL DISPLAY CORPORATION) 13 April 2017 See paragraphs [0067], [0068] and figure 5.	1–20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 December 2019 (02.12.2019)

Date of mailing of the international search report

03 December 2019 (03.12.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/046867

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017-0362713 A1	21/12/2017	CN 107523804 A JP 2017-224816 A KR 10-2017-0142891 A SG 10201704782 A TW 201809342 A US 10202691 B2 US 9738977 B1	29/12/2017 21/12/2017 28/12/2017 30/01/2018 16/03/2018 12/02/2019 22/08/2017
US 2017-0191160 A1	06/07/2017	CN 107034445 A JP 2017-143248 A KR 10-2017-0080501 A	11/08/2017 17/08/2017 10/07/2017
US 2015-0170931 A1	18/06/2015	KR 10-1715460 B1 KR 10-2015-0029626 A TW 201413810 A TW I578393 B US 9418866 B2 WO 2013-183437 A1	10/03/2017 18/03/2015 01/04/2014 11/04/2017 16/08/2016 12/12/2013
JP 2013-070016 A	18/04/2013	None	
US 2017-0101711 A1	13/04/2017	EP 3157071 A1 JP 2017-103213 A KR 10-2017-0043097 A	19/04/2017 08/06/2017 20/04/2017