




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 13/15	A1	(11) International Publication Number: WO 99/01099 (43) International Publication Date: 14 January 1999 (14.01.99)
(21) International Application Number: PCT/SE98/01238 (22) International Filing Date: 25 June 1998 (25.06.98) (30) Priority Data: 9702572-0 3 July 1997 (03.07.97) SE (71) Applicant (for all designated States except US): SCA MÖLNLYCKE AB [SE/SE]; S-405 03 Göteborg (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): OLOFSSON, Ulla [SE/SE]; Myrvägen 22, S-430 94 Bohus-Björkö (SE). CHRISTIANSEN, Karin [SE/SE]; Assedalsgatan 4, S-511 63 Skene (SE). CHIHANI, Thami [SE/SE]; Råda Portar 7, S-435 32 Mölnlycke (SE). (74) Agents: GRAUDUMS, Valdis et al.; Albihs Patentbyrå Göteborg AB, P.O. Box 142, S-401 22 Göteborg (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. In English translation (filed in Swedish).

(54) Title: LIQUID-PERMEABLE COVER SHEET FOR ABSORBENT ARTICLE

(57) Abstract

A liquid-permeable cover sheet (1, 201, 301) for an absorbent article such as a diaper (300), an incontinence protector, a sanitary towel or the like, which cover sheet comprises at least a first material layer (2, 202, 302) with a surface which essentially consists of polyethylene which has been treated with plasma or corona in order to obtain liquid permeability. The invention moreover concerns an absorbent article with a liquid-permeable cover sheet (1, 201, 301) according to the invention.

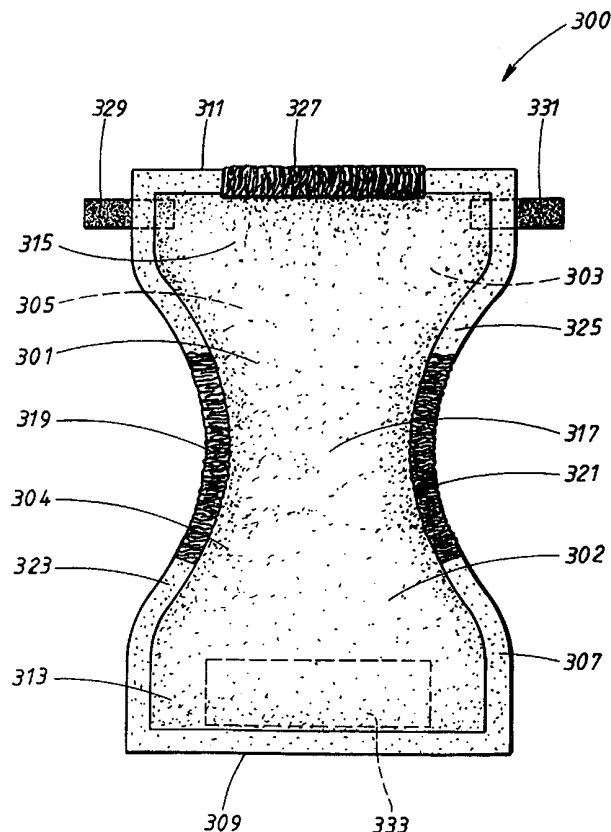

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5

TITLE:

LIQUID-PERMEABLE COVER SHEET FOR ABSORBENT ARTICLE

10

TECHNICAL FIELD:

15

The invention relates to a liquid-permeable cover sheet for an absorbent article such as a diaper, an incontinence protector, a sanitary towel or the like, which cover sheet comprises at least a first material layer.

BACKGROUND:

20

25

The liquid-permeable cover sheet is intended to bear against the user's body during use of the absorbent article, which means that this sheet first receives the excreted body fluid. To avoid leakage of the liquid, it is important that the liquid-permeable cover sheet can receive a large amount of liquid during a short period of time. It is also important that the cover sheet withstands repeated wetting, i.e. can retain its liquid permeability when the article has been subjected to a number of wettings.

30

35

40

As liquid-permeable cover sheets, it is customary to use nonwovens and film materials. Such cover sheets are generally made of synthetic materials which are inherently hydrophobic. In order to obtain liquid permeability, it is customary to treat these materials with wetting agents. Plastic films used as liquid-permeable cover sheets must in addition be perforated to become liquid-permeable. However, it is also common for nonwoven materials to be perforated in order to increase the liquid permeability. It is difficult, however, to produce a perforated hydrophobic material in which the risk of leakage is completely eliminated.

Treatment with wetting agents is generally carried out by coating the hydrophobic material with a surface-active substance, such as, for example, a surfactant. In this way, a hydrophilic cover sheet is produced. For a material to be considered liquid-permeable, it is necessary for the surface energy of the liquid in question to be lower than the critical surface energy of the material. This is obtained by the surface-active compounds dissolving in the liquid and reducing the surface energy of the liquid and/or by the surface-active compounds binding to the surface of the material, which results in an increased critical surface energy on the material.

A problem with using cover sheets coated with a surface-active substance is that these cover sheets have a liquid permeability which deteriorates upon repeated wetting. This is due to the fact that the surface-active compounds, which are not anchored to the surface of the cover sheet, dissolve in the body fluid upon the first wetting. On subsequent wetting, the amount of surfactant on the surface of the cover sheet has therefore been substantially reduced, which results in reduced liquid permeability. Another problem when using articles with surfactant-coated cover sheets is that the surface-active compounds can cause skin irritations on account of the fact that they migrate from the cover sheet to the user's skin. A further problem with such cover sheets is that the surface-active compounds also migrate from the cover sheet to the inner absorbent structure during the storage time, the result of which is that the cover sheet has inadequate liquid permeability even upon the first wetting.

European Patent 0,483,859 describes a liquid-permeable cover sheet which has been corona-treated in order to withstand repeated wetting. In the corona treatment, the cover sheet is treated with a plasma, which is a gas that has been given so much energy that it has been completely or partially ionized. The contact of the

material surface with the high-energy gas results in radicals being formed on the material surface. Different types of functional groups are then introduced to the material surface, such as, for example, oxygen-containing functional groups. Such treatment therefore creates a more stable hydrophilic structure than when the surface is only coated with a surface-active compound, without the compound being chemically bonded to the surface. The material which has been corona-treated is a nonwoven material which consists of polypropylene fibres. However, in the case of this known cover sheet, there is still the problem of the liquid permeability substantially decreasing after a first wetting. A further problem with such cover sheets is that it has been found that the modification is not durable, but weakens on storage.

A similar method for producing a material which has been chemically modified on the surface is by means of plasma treatment. US 4,743,494 and WO 94/28568 describe plasma-treated materials which are suitable for use as, for example, liquid-permeable cover sheets. Plasma treatment gives a more homogeneous mixture than the corona treatment. Otherwise, corona and plasma treatments are more or less of equal value. Plasma treatment thus produces, as in corona treatment, a chemically surface-modified material. However, even in the case of liquid-permeable cover sheets treated in this way, there is still the problem of obtaining a stable hydrophilic surface, i.e. a surface which remains hydrophilic even after repeated wetting.

DESCRIPTION OF THE INVENTION:

The present invention has nonetheless made available a liquid-permeable cover sheet of the type discussed in the introduction, having good liquid permeability even after repeated wetting of the article.

A liquid-permeable cover sheet according to the invention comprises at least a first material layer which is characterized in that the surface of the material layer essentially consists of polyethylene which has been treated with plasma or corona in order to obtain lasting hydrophilicity.

As regards corona-treated and plasma-treated materials, it has been found that different materials show significant differences in the acquired ability to retain the liquid permeability upon repeated wetting. When using corona-treated or plasma-treated materials as liquid-permeable cover sheets for absorbent articles, it has been found that the liquid permeability upon repeated wetting is substantially better for materials with a surface of polyethylene than for materials with a surface of polypropylene. It has also been found that treated polyethylene material has an essentially unaltered liquid permeability after the article has been in storage for some length of time.

According to one advantageous embodiment, the first material layer consists of a nonwoven material. The nonwoven material comprises fibres with a surface of polyethylene. For example, the fibres are two-component fibres consisting of a core of polypropylene or polyester and a surrounding covering of polyethylene.

According to another embodiment, the first material layer is a perforated plastic film which is corona-treated or plasma-treated. Since the treated surface essentially consists of polyethylene, the film has hydrophilic groups which are firmly anchored to the plastic surface. The hydrophilic groups on the film surface facilitate the movement of liquid through the perforations.

A further embodiment has a liquid-permeable cover sheet which consists of a plurality of material layers. The cover sheet preferably consists of two layers. The first material layer is made up in accordance

with one of the abovementioned embodiments. The second material layer has a surface made essentially of polypropylene. The second material layer is preferably a nonwoven which is not plasma-treated or corona-treated. The second material layer is expediently situated farthest away from the absorbent body, i.e. nearest the user. Since the second material layer has a thin structure with a grammage of between 6-20 g/m², the fibre structure presents perforations through which the liquid can pass in order to reach the inner, hydrophilic first material layer. Thus, a hydrophobic and dry surface is obtained nearest the user. Of course, it is also possible for the second material layer to be corona-treated or plasma-treated. When the sheet is used as a liquid-permeable cover for an absorbent article, it is also possible to place the second material layer nearest the absorbent structure. These variants are described in more detail in subsequent illustrative embodiments and examples.

The present invention furthermore concerns an absorbent article such as a diaper, an incontinence protector, a sanitary towel or the like, comprising an absorbent body enclosed between a liquid-impermeable cover sheet and a liquid-permeable cover sheet, which liquid-permeable cover sheet comprises at least a first material layer having a material surface which essentially consists of polyethylene. The material layer has been plasma-treated or corona-treated in order to obtain liquid permeability.

One embodiment concerns an absorbent article which is characterized in that the liquid-permeable cover sheet also comprises a second material layer. According to such an embodiment, the first material layer is situated nearest the absorbent body and the second material layer is situated farthest away from the absorbent body. The second material layer preferably consists of a thin nonwoven of polypropylene which is not corona-treated

or plasma-treated. Untreated nonwovens of polypropylene are inherently hydrophobic, which means that the surface nearest the user remains dry even after wetting. Moreover, the second material layer has a thin structure, with a grammage of between 6-20 g/m², the result of which is that the fibre structure has perforations through which liquid can pass in order to reach the inner, first material layer. It is also possible to perforate the second material layer in order to obtain the desired liquid permeability. In this embodiment, the first material layer, i.e. the inner fibre structure, functions as a drainage material, which has the ability to drain liquid from the upper material layer nearest the user. The first material layer preferably consists of a nonwoven. To obtain a first material layer which rapidly takes up liquid from the material layer situated nearest to the user, the nonwoven material consists, for example, of a bulky, cottonwool-like structure, a perforated plastic film, or the like.

It is also possible for the second material layer to be corona-treated or plasma-treated. Since the material essentially consists of polypropylene fibres, the hydrophilic compounds on the polypropylene fibre surface do not remain so firmly anchored to the surface as the hydrophilic compounds which are created when the treatment is carried out on a surface of polyethylene. This means that, upon wetting, hydrophilic groups dissolve in the body fluid and reduce the surface tension of the liquid, the result of which is that the liquid is more easily absorbed by the inner absorbent structure. Another advantage of this embodiment is that the plasma or corona treatment can be carried out after the first material layer and the second material layer have been laminated together. For liquid to pass through the second material layer, situated nearest to the user, upon subsequent wettings, the second material layer preferably consists of a thin or

perforated nonwoven. The second material layer can also consist of a perforated film, a net material, or the like.

According to yet another embodiment, the absorbent article is designed in such a way that the second material layer is situated nearest to the absorbent body and the first material layer is situated farthest away from the absorbent body. Both material layers are preferably corona-treated or plasma-treated in order to increase the liquid permeability. The second material layer, as has already been described, consists of a surface essentially of polypropylene. An advantage of this embodiment is that, when the article is being used, the second material layer does not come into direct contact with the user, which reduces the risk of the hydrophilic groups irritating the user's skin after a first wetting.

BRIEF DESCRIPTION OF THE FIGURES:

The invention will be described in greater detail below with reference to the illustrative embodiments which are shown on the attached drawings.

Fig. 1 shows a liquid-permeable cover sheet according to the invention,

Fig. 2 shows another liquid-permeable cover sheet according to the invention, and

Fig. 3 shows a diaper seen from the side which, during use, is intended to be directed towards the user.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS:

The liquid-permeable cover sheet 1 shown in Figure 1 comprises a material layer 2 which consists of a nonwoven material with fibres having a fibre surface essentially of polyethylene. In order to obtain lasting hydrophilicity, the material layer 2 has been corona-treated or plasma-treated. In the corona or plasma treatment, the material is surface-modified so that

hydrophilic groups are chemically bonded to the surface of the material layer 2.

5 The material 2 is preferably corona-treated or plasma-treated after the fibres have been formed into a nonwoven structure. The treatment is carried out either from only one of the sides of the material layer 2, or from both sides of the material layer 2. It is also possible, however, for the fibres in the material layer 2 to be plasma-treated before the actual formation of the
10 fibres to a nonwoven material.

Examples of different types of polyethylene are LDPE (low-density polyethylene), HDPE (high-density polyethylene) and LLDPE (low linear density poly-ethylene). Examples of fibres that can be used are
15 two-component fibres with a core of polypropylene or polyester and a covering of polyethylene. Of course, the fibres can alternatively consist only of polyethylene, of different types or of the same type. In order to obtain the desired fibre properties, it is also possible to use
20 polyethylene-containing copolymers, for example polyethylene containing a small amount of acrylate, or acetate. The acrylate or acetate component results in the material being more elastic. Moreover, for plasma and corona treatment, it has been found that metallocene-catalyzed
25 polyethylenes are well suited for the purpose.

For a nonwoven spunbonded material to have a high evenness and thus also a high tensile strength, such materials are made up of two different sheets. In order to produce a spunbonded material consisting of two
30 sheet-like structures, material is supplied from two consecutive extruders in the process. Such a method of manufacture makes it possible to produce a spunbonded material consisting of a sheet of polypropylene and a sheet of polyethylene.

35 Naturally, the material layer 2 is not limited to spunbonded material, but can of course also be

of other nonwoven materials such as carded material, or material manufactured in another way. It is also possible for the material layer 2 to consist of a perforated film of polyethylene.

5 The liquid-permeable cover sheet 201 shown in Figure 2 consists of two material layers. The first material layer 202 is like the material layer 2 described in Figure 1 and thus consists of a corona-treated or plasma-treated nonwoven with fibres having a surface of
10 polyethylene. The second material layer 204 consists of a nonwoven material essentially made up of polypropylene fibres. The second material layer 204 is a thin nonwoven with a grammage of between 6 - 20 g/m². Of course, the second material layer 204 can also comprise other
15 hydrophobic fibres, or fibre mixtures of two or more different fibre types, such as, for example, different types of polyesters, or nylon. It is also possible for the second material layer 204 to consist of a perforated film of polypropylene.

20 The diaper 300 shown in Figure 3 comprises a liquid-permeable cover sheet 301 in accordance with the invention, a liquid-impermeable cover sheet 303, and an absorbent body 305 enclosed between these. The liquid-impermeable cover sheet 303 can consist of a liquid-
25 impermeable plastic film, a nonwoven sheet which has been coated with a material obstructing liquid, or some other easily pliable material sheet which resists penetration of liquid. It is generally advantageous if the liquid-impermeable cover sheet 303 has a certain breathability,
30 i.e. allows the passage of water vapour. The two cover sheets 301, 303 have a somewhat greater extent in their plane than does the absorbent body 305 and they extend a short distance beyond the edges of the absorbent body 305, all around its periphery. The cover sheets 301, 303 are
35 connected to each other within the protruding areas 307,

for example with adhesive or by welding with heat or ultrasound.

The absorbent body 305 is generally made up of one or more sheets of cellulose fibres, for example cellulose fluff pulp. In addition to cellulose fibres, the absorbent body 305 can also contain superabsorbent material, i.e. material in the form of fibres, particles, granules, film or the like, which has the ability to absorb liquid corresponding to several times the actual weight of the superabsorbent material. Superabsorbent material binds the absorbing liquid and thus forms a liquid gel. Moreover, the absorbent body 305 can contain binding agents, shape-stabilizing components, or the like. Further absorbent sheets which improve the absorption properties can also be used, such as different types of liquid-diffusing inlays, or material sheets. The absorbent body 305 can be treated chemically or physically in order to change the absorption properties. It is common, for example, to provide an absorption sheet with compressions in order to control the flow of liquid in the absorbent body 305. Other types of absorption materials can also be used, alone or in combination with cellulose fibres and superabsorbent material. Examples of absorbent materials which can be used are absorbent nonwoven material, foam or the like.

The diaper 301 additionally has two longitudinal side edges 323, 325, a front end edge 309 and a back end edge 311, and it has a front portion 313, a back portion 315 and a narrower crotch portion 317 situated between the front portion 313 and the back portion 315.

Elastic members 319, 321 are also arranged along the side edges 323, 325, at the crotch portion 317 of the diaper. When the diaper is being used, these elastic members 319, 321 serve to keep the diaper sealed tightly around the user's legs. A further elastic member 327 is arranged along the back end edge 311 and is

intended to give the diaper 300 a certain stretchability and to serve as a sealing member for the diaper around the user's waist.

5 A tape flap 329, 331 is arranged on each side edge 323, 325 near the back end edge 311. The tape flaps 329, 331 constitute securing members for the diaper 300 and allow this to be closed together so that it encloses the lower part of a user's trunk like a pair of trousers. The tape flaps 329, 331 cooperate with a
10 receiving area 333 on the liquid-impermeable cover sheet 303 of the diaper 300, at the front portion 313. The receiving area 333 can consist, for example, of a reinforcing material which has been laminated to the liquid-impermeable cover sheet 303. By means of the
15 reinforcement, the diaper 300 can be closed and opened again without the adhesive properties of the tape flaps 329, 331 being impaired, or without the liquid-impermeable cover sheet 303 being torn.

Of course, a number of other types of
20 securing members can be used instead of the described tape flaps 329, 331. Examples of alternative securing members are velcro surfaces, snap-fasten buttons, tie cords, or the like.

The liquid-permeable cover sheet 301 of
25 the diaper is made up of a first material layer 302 and of a second material layer 304. The first material layer 302 is arranged nearest to the absorbent body 305 and the second material layer 304 is arranged nearest to the user when the article is being used. The first material layer
30 302 is made up in the same way as the material layer 2 according to Figure 1 and thus consists of a nonwoven which is essentially made up of fibres having a surface of polyethylene, or a perforated plastic film with a surface of polyethylene which, in order to obtain lasting liquid
35 permeability, is corona-treated or plasma-treated. The first material layer 302 can also comprise a cotton wool

structure essentially consisting of fibres with a surface of polyethylene, which, in order to obtain lasting hydrophilicity, has been corona-treated or plasma-treated. The second material layer 304 is made up in the same way as the material layer 204 shown in Figure 2. The second material layer 304 is thus a nonwoven material essentially made up of polypropylene fibres. The second material layer 304 is preferably not corona-treated or plasma-treated since it lies nearest to the user, but of course it is also possible to treat it with corona or plasma. In order to obtain liquid permeability, it consists of a thin or perforated nonwoven. It is also possible for the second material layer 304 to be made up of a perforated plastic film.

It is also possible for the second material layer 304 to be situated nearest to the absorbent body 305 and for the first material layer 302 to be situated farthest away from the absorbent body 305.

Example 1 - ESCA

In order to examine the chemical composition of the material surface, electron spectroscopic chemical analysis (ESCA) was performed on the following materials:

1. Plasma-treated nonwoven of polypropylene fibres

- a. Before washing
- b. After washing

2. Plasma-treated nonwoven of two-component fibres, the fibre cores of polypropylene and the fibre covering of polyethylene

- a. Before washing
- b. After washing

3. Plasma-treated nonwoven of two-component fibres, the fibre cores of polyester and the fibre covering of polyethylene

- a. Before washing
b. After washing

4. Untreated nonwoven of:

- a. polypropylene fibres
- b. two component fibres, the fibre core

of

polypropylene and the fibre covering
of polyethylene

of

polyester and the fibre covering of polyethylene.

The material is washed by being placed in a container with distilled water. The distilled water is at a temperature of 37°C. The material is left to lie in the water for 15 seconds and is then removed and dried flat.

The material surface is X-rayed on ESCA. The high-energy X-radiation results in electrons being emitted from components of the material surface. The binding energy of the electron is obtained using the following formula:

$$E_b = h\nu - E_k$$

E_b = binding energy of the electron

E_k = kinetic energy of the electron

$$h\nu = \text{radiation energy}$$

The intensity of the X-radiation is known during the measurement, and the kinetic energy of the electron is obtained by measuring the speed of the electron. Thus, a measurement of the emitted electron's

binding energy is obtained, which means that the chemical composition of the surface can be identified.

The following oxygen/carbon ratios (O/C) were found:

5

<u>Sample</u>	<u>O/C</u>
1a	0.19
1b	0.08
2a	0.26
10 2b	0.23
3a	0.29
3b	0.24
4a	0.007
4b	0.02
15 4c	0.007

20

25

The results show that the proportion of oxygen-containing compounds on the material surface is highest for materials 2 and 3, i.e. materials with a fibre covering of polyethylene. This means that the plasma-treated polyethylene surfaces have higher hydrophilicity or wettability than corresponding plasma-treated polypropylene surfaces. In addition, materials 2 and 3 retain a high O/C ratio even after the structure has been washed, which means that polyethylene is superior to polypropylene in terms of retaining wettability after wetting.

30

The invention must not be seen as being limited to the embodiments described here, and instead a number of other variants and modifications are possible within the scope of the appended patent claims. In addition, all conceivable combinations of the described embodiments are intended to be covered by the invention.

PATENT CLAIMS

5

1. A liquid-permeable cover sheet (1, 201, 301) for an absorbent article such as a diaper (300), an incontinence protector, a sanitary towel or the like, which cover sheet comprises at least a first material layer, characterized in that the surface of the first material layer (2) essentially consists of polyethylene which has been treated with plasma or corona and in this way has a hydrophilic surface.

15

2. A liquid-permeable cover sheet according to Claim 1, characterized in that the first material layer (2) consists of a nonwoven material, in which at least the surface of the fibres essentially consists of polyethylene.

20

3. A liquid-permeable cover sheet according to the preceding claim, characterized in that the fibres are two-component fibres consisting of a core of polypropylene and a surrounding covering of polyethylene.

25

4. A liquid-permeable cover sheet according to Claim 2, characterized in that the fibres are two-component fibres consisting of a core of polyester and a surrounding covering of polyethylene.

30

5. A liquid-permeable cover sheet according to Claim 1, characterized in that the first material layer (2) consists of a perforated plastic film.

35

6. A liquid-permeable cover sheet according to any of the preceding claims and further having a second material layer (204), characterized in that the surface of the second material layer (204) essentially consists of polypropylene.

40

7. A liquid-permeable cover sheet according to Claim 6, characterized in that the second material layer (204) is a nonwoven material which essentially is made up of polypropylene fibres.

5 8. Absorbent article such as a diaper (300), an incontinence protector, a sanitary towel or the like, comprising an absorbent body (305) enclosed between a liquid-impermeable cover sheet (303) and a liquid-permeable cover sheet (301), which liquid-permeable cover sheet (301) comprises at least a first material layer (302), characterized in that the surface of the first material layer (302) essentially consists of polyethylene which has been treated with plasma or corona in order to
10 obtain liquid permeability.
15

9. Absorbent article according to the preceding claim, characterized in that the liquid-permeable cover sheet comprises a second material layer (304) which
20 has a material surface which essentially consists of polypropylene.

10. Absorbent article according to the preceding claim, characterized in that the first material layer (302) is situated nearest the absorbent body (305) and in that the second material layer (304) is situated
25 farthest from the absorbent body (305).

11. Absorbent article according to Claim 9, characterized in that the second material layer (304) is situated nearest the absorbent body (305) and in that the first material layer (302) is situated farthest from the absorbent body (305).
30

1/2

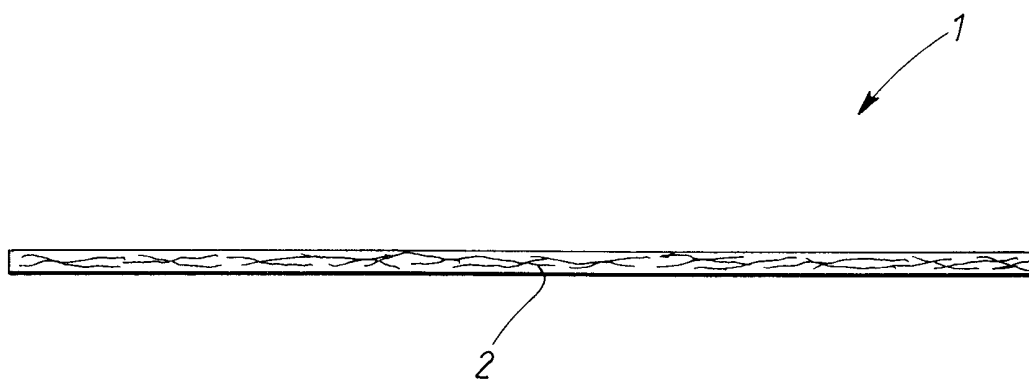


FIG. 1

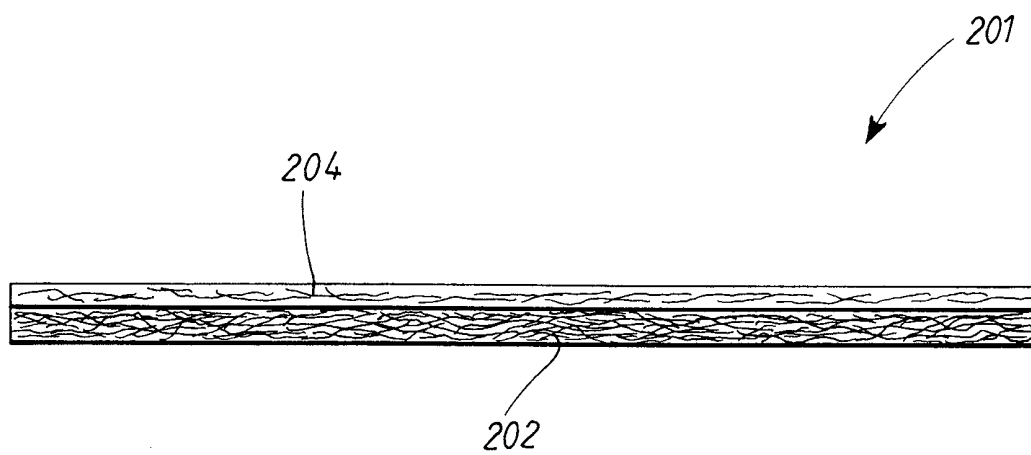
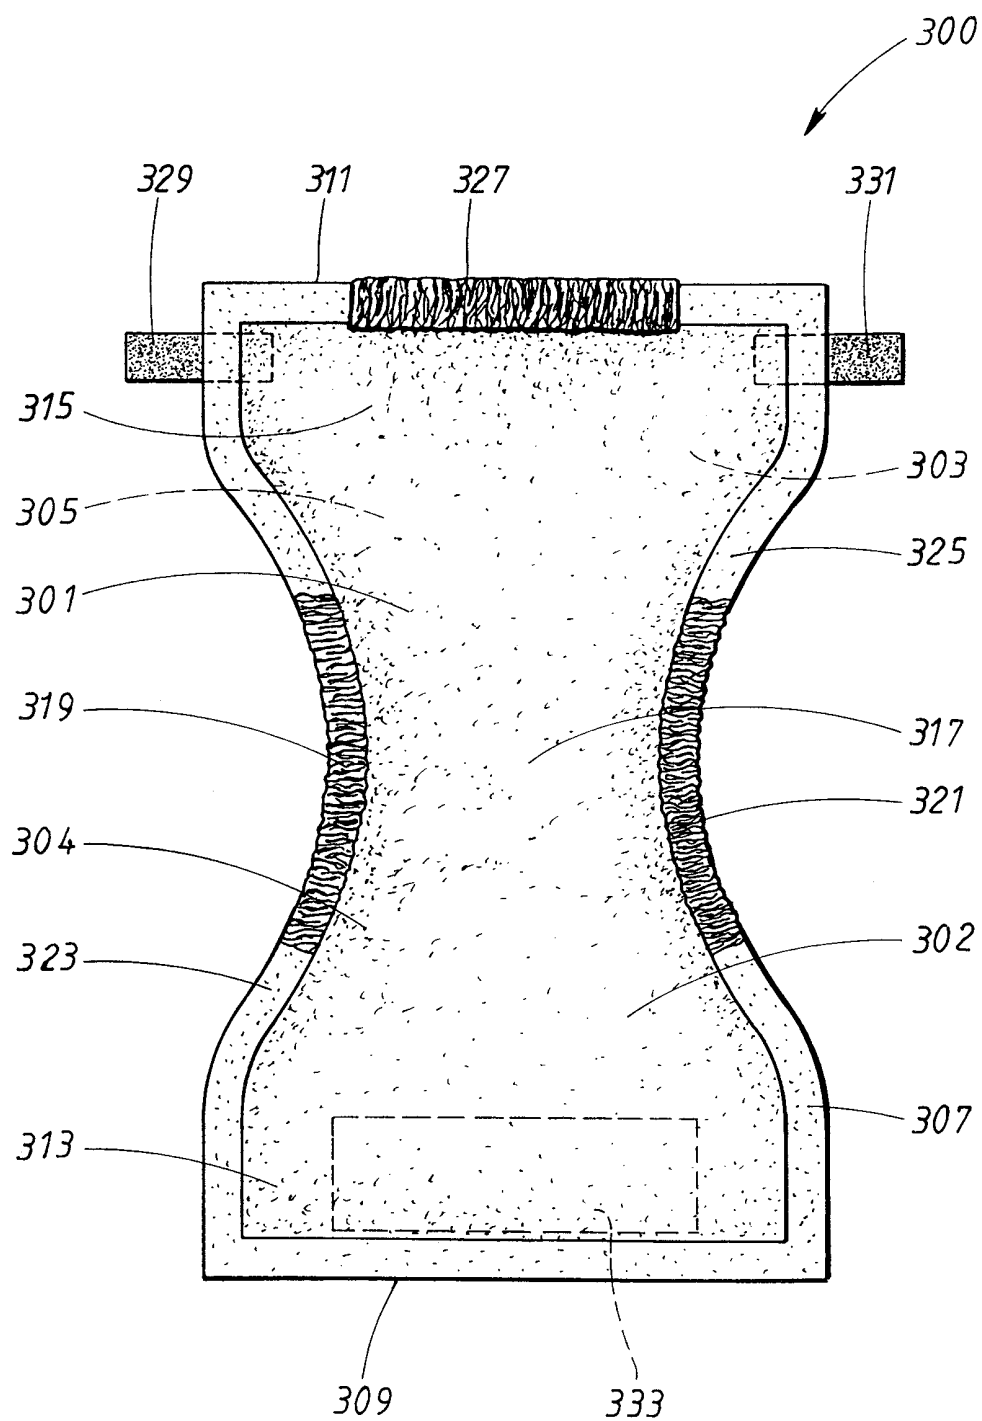


FIG. 2

2/2

FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01238

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: A61F 13/15 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: A61F, B29C, H05H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPIL, EDOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4351784 A (THOMAS ET AL), 28 Sept 1982 (28.09.82)	1,5,8
Y	--	2-4,6-7,9-11
Y	Patent Abstract of Japan, abstract of JP 1-192871 A (KURARAY CO LTD), 2 August 1989 (02.08.89)	2-4,6-7,9-11
A	--	1,5,8
A	US 4743494 A (KOMATSU ET AL), 10 May 1988 (10.05.88)	1-11
	--	
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
30 Sept 1998		25 -10- 1998
Name and mailing address of the ISA Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Björn Salén Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01238

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 483859 A1 (KIMBERLY-CLARK CORPORATION), 6 May 1992 (06.05.92) --	1-11
X	FELLERS, Christer, Norman, Bo. Pappersteknik. Stockholm: KTH, February 1996, third ed. page 119 line 14-18 -- -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/07/98

International application No.

PCT/SE 98/01238

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4351784 A	28/09/82	NONE	
US 4743494 A	10/05/88	JP 61124675 A	12/06/86
EP 483859 A1	06/05/92	NONE	