



- (51) **International Patent Classification:**
H01L 31/04 (2014.01)
- (21) **International Application Number:**
PCT/US2013/072104
- (22) **International Filing Date:**
26 November 2013 (26.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/720,417 19 December 2012 (19.12.2012) US
- (71) **Applicant:** SUNPOWER CORPORATION [US/US]; 77
Rio Robles, San Jose, California 95134 (US).
- (72) **Inventors; and**
- (71) **Applicants :** SHEPHERD, Michael [US/US]; 3149 Fawn
Drive, San Jose, California 95124 (US). SMITH, David D.
[US/US]; 426 N. Milton Avenue, Campbell, California
95008 (US).
- (74) **Agents:** VINCENT, Lester J. et al.; Blakely Sokoloff
Taylor & Zafman LLP, 1279 Oakmead Parkway,
Sunnyvale, California 94085 (US).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** SOLAR CELL WITH SILICON OXYNITRIDE DIELECTRIC LAYER

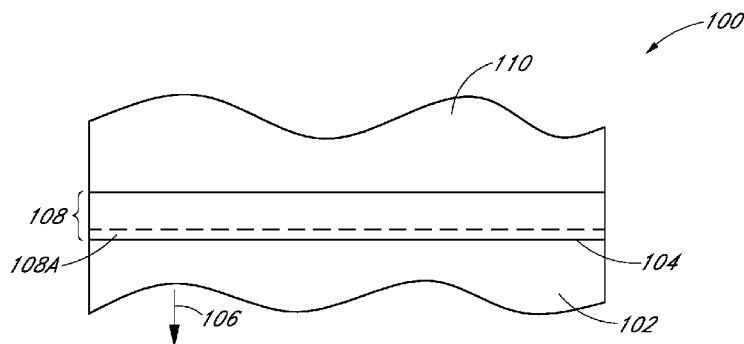

(57) **Abstract:** Solar cells with silicon oxynitride dielectric layers and methods of forming silicon oxynitride dielectric layers for solar cell fabrication are described. For example, an emitter region of a solar cell includes a portion of a substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xNy , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the substrate. A semiconductor layer is disposed on the silicon oxynitride dielectric layer.

Solar Cell with Silicon Oxynitride Dielectric Layer

The invention described herein was made with Governmental support under contract number DE-FC36-07GO17043 awarded by the United States Department of Energy. The

Government may have certain rights in the invention.

TECHNICAL FIELD

Embodiments of the present invention are in the field of renewable energy and, in particular, solar cells with silicon oxynitride dielectric layers.

BACKGROUND

Photovoltaic cells, commonly known as solar cells, are well known devices for direct conversion of solar radiation into electrical energy. Generally, solar cells are fabricated on a semiconductor wafer or substrate using semiconductor processing techniques to form a p-n junction near a surface of the substrate. Solar radiation impinging on the surface of, and entering into, the substrate creates electron and hole pairs in the bulk of the substrate. The electron and hole pairs migrate to p-doped and n-doped regions in the substrate, thereby generating a voltage differential between the doped regions. The doped regions are connected to conductive regions on the solar cell to direct an electrical current from the cell to an external circuit coupled thereto.

Efficiency is an important characteristic of a solar cell as it is directly related to the capability of the solar cell to generate power. Likewise, efficiency in producing solar cells is directly related to the cost effectiveness of such solar cells. Accordingly, techniques for increasing the efficiency of solar cells, or techniques for increasing the efficiency in the manufacture of solar cells, are generally desirable. Some embodiments of the present invention allow for increased solar cell manufacture efficiency by providing novel processes for fabricating solar cell structures. Some embodiments of the present invention allow for increased solar cell efficiency by providing novel solar cell structures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross-sectional view illustrating an emitter region of a solar cell, in accordance with an embodiment of the present invention.

Figure 2 is a cross-sectional view illustrating another emitter region of a solar cell, in accordance with another embodiment of the present invention.

Figure 3 is a cross-sectional view illustrating another emitter region of a solar cell, in accordance with yet another embodiment of the present invention.

Figures 4A-4C illustrate cross-sectional views of various processing operations in a method of fabricating a solar cell, in accordance with an embodiment of the present invention.

Figure 5 is a plot of boron (B) concentration (atoms/cm³) as a function of depth (microns) for an emitter region having a silicon oxynitride tunnel dielectric layer versus an emitter region having a silicon oxide tunnel dielectric layer, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

Solar cells with silicon oxynitride dielectric layers and methods of forming silicon oxynitride dielectric layers for solar cell fabrication are described herein. In the following description, numerous specific details are set forth, such as specific process flow operations, in order to provide a thorough understanding of embodiments of the present invention. It will be apparent to one skilled in the art that embodiments of the present invention may be practiced without these specific details. In other instances, well-known fabrication techniques, such as lithography and patterning techniques, are not described in detail in order to not unnecessarily obscure embodiments of the present invention. Furthermore, it is to be understood that the various embodiments shown in the figures are illustrative representations and are not necessarily drawn to scale.

Disclosed herein are solar cells and, in particular, emitter regions for solar cells. In an embodiment, an emitter region of a solar cell includes a portion of a substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the substrate. A semiconductor layer is disposed on the silicon oxynitride dielectric layer. In another embodiment, a solar cell includes a first emitter region. The first emitter region includes a first portion of a substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the first portion of the substrate. A P-type semiconductor layer is disposed on the silicon oxynitride dielectric layer. The solar cell also includes a second emitter region. The second emitter region includes a second portion of the substrate. The silicon oxynitride dielectric layer is disposed on the back surface of the second portion of the substrate. An N-type semiconductor layer is disposed on the silicon oxynitride dielectric layer. In another embodiment, an emitter region of a solar cell includes a portion of an N-type bulk silicon substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the N-type bulk silicon substrate. The silicon oxynitride dielectric layer has a non-homogeneous distribution of nitrogen. A boron-doped polycrystalline silicon layer is disposed on the silicon oxynitride dielectric layer.

A metal contact is disposed on the P-type polycrystalline silicon layer.

Also disclosed herein are methods of fabricating solar cells and, in particular, methods of forming emitter regions for solar cells. In an embodiment, a method of fabricating an emitter region of a solar cell includes forming a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer on a surface of a bulk N-type silicon substrate of the solar cell by consuming a portion of the N-type silicon substrate. The method also includes forming a semiconductor layer on the silicon oxynitride dielectric layer.

One or more embodiments described herein are directed to processes for fabricating tunnel dielectric with silicon oxynitride materials. In one such embodiment, a silicon oxynitride tunnel dielectric is used between a silicon substrate and a polysilicon emitter layer. Such an oxynitride tunnel layer may be used in place of a more conventional thermal silicon dioxide layer tunnel dielectric. In an embodiment, use of the oxynitride dielectric layers described herein may be used to prevent boron penetration through the tunnel dielectric (e.g., during high temperature processing) which otherwise may degrade surface passivation of a P-type polysilicon based emitter in cells having conventional (non-nitrided) tunnel dielectric layers. In one such embodiment, use of an oxynitride presents an improved barrier to boron diffusion versus a nitrogen-free oxide material layer.

In an embodiment, a silicon oxynitride layer is grown in a fashion similar to thermal oxidation, but using gases that allow nitrogen incorporation into the resulting layer. Nitrogen concentration, growth rate, layer thickness and uniformity can be varied using gas composition, temperature, and pressure. In an embodiment, a silicon oxynitride layer is formed on a silicon substrate in a low pressure chemical vapor deposition (LPCVD) furnace, but can instead be formed in a plasma enhanced chemical vapor deposition (PECVD) chamber. As described in greater detail below, one or more embodiments involves forming a tunnel dielectric for a poly emitter solar cell by using a thermal process based on one or more of nitric oxide (NO), nitrous oxide (N_2O), ammonia (NH_3) and/or oxygen (O_2), or other gases or combinations of gases containing oxygen and/or nitrogen. Specific embodiments include forming an oxynitride film that has a nitrogen concentration that varies with depth, e.g., an oxide layer that has nitrogen incorporated near a surface or interface, or graded throughout the layer.

As examples of emitter regions having silicon oxynitride tunnel dielectric layers, Figures 1-3 illustrate cross-sectional views of emitter regions for inclusion in a solar cell, in accordance with three different embodiments of the present invention. Referring to Figures 1-3, an emitter region 100, 200 or 300 of a solar cell includes a portion of a substrate 102 (e.g., an N-type bulk crystalline silicon substrate) having a back surface 104 opposite a light receiving surface (not shown, but direction provided by arrow 106). A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric

layer 108, 208 or 308, respectively, is disposed on the back surface 106 of the portion of the substrate 102. A semiconductor layer 110 is disposed on the silicon oxynitride dielectric layer 108, 208 or 308, only a portion of which is depicted in Figures 1-3.

Referring again to Figures 1-3, in an embodiment, the silicon oxynitride dielectric layers 108, 208 and 308 have a non-homogeneous distribution of nitrogen throughout. For example, a silicon oxynitride dielectric layer may have one region or maxima of nitrogen concentration. In a first specific embodiment, referring to Figure 1, the silicon oxynitride dielectric layer 108 has only one nitrogen concentration maxima (shown as region 108A). The maxima 108A is at a surface of the silicon oxynitride dielectric layer 108 proximate to the back surface 106 of the portion of the substrate 102. In a second specific example, referring to Figure 2, the silicon oxynitride dielectric layer 208 also has only one nitrogen concentration maxima (shown as region 208A). However, the maxima 208A is at a surface of the silicon oxynitride dielectric layer 208 distal from the back surface 106 of the portion of the substrate 102, i.e., proximate to layer 110.

In another example, a silicon oxynitride dielectric layer may have more than one region or maxima of nitrogen concentration. In a specific embodiment, referring to Figure 3, the silicon oxynitride dielectric layer 308 has two nitrogen concentration maxima (shown as regions 308A and 308B), one maxima 308A at a surface of the silicon oxynitride dielectric layer 308 distal from the back surface 106 of the portion of the substrate 102, and one maxima 308B at a surface of the silicon oxynitride dielectric layer 308 proximate to the back surface 106 of the portion of the substrate 102. In a particular such embodiment, the distance between the maxima 308A and 308B is approximately in the range of 5 – 6 Angstroms.

Whether only nitrogen maxima region or more than one maxima region, it is to be understood that the remainder of the oxynitride film need not be nitrogen-free. In an exemplar embodiment, regions of high nitrogen concentration (such as maxima 108A, 208A, 308A and 308B) have a nitrogen concentration accounting for approximately 2-5% of the total atomic concentration with the film in that region (the other components including silicon and oxygen). Meanwhile, the regions of the films outside of the maxima are regions of relatively low nitrogen concentration accounting for approximately 0-1% of the total atomic concentration with the film in that region (the other components also including silicon and oxygen).

Referring again to Figures 1-3, in an embodiment, the silicon oxynitride dielectric layers 108, 208 or 308 have a total thickness approximately in the range of 10 – 20 Angstroms. In one such embodiment, referring specifically to Figure 3, the silicon oxynitride dielectric layer 308 has a first nitrogen-rich region (308B) having a thickness approximately in the range of 4 – 5 Angstroms, a nitrogen-poor region 308C disposed above the first nitrogen-rich region 308B and having a thickness approximately in the range of 5 – 6 Angstroms, and a second nitrogen-rich

region 308A disposed above the nitrogen-poor region 308C and having a thickness approximately in the range of 4 – 5 Angstroms. In an embodiment, considering total film atomic concentration, the silicon oxynitride dielectric layers 108, 208 and 308 are composed of a greater amount of oxygen than nitrogen, i.e., for SiO_xN_y , $x > y$.

5 As mentioned above, the role of nitrogen in a tunnel dielectric layer of an emitter region of a solar cell may be to prevent or at least inhibit dopant penetration through the tunnel dielectric layer and into an underlying substrate. For example, in an embodiment, referring again to Figures 1-3, the semiconductor layer 110 disposed on the silicon oxynitride dielectric layers 108, 208 or 308 is a boron-doped silicon layer, e.g., a P-type layer. In one such embodiment, as a
10 result of doping into or diffusing from the boron-doped silicon layer, the silicon oxynitride dielectric layer 108, 208 or 308 includes at least some boron atoms. However, in a specific such embodiment, although the layer 108, 208 or 308 may ultimately include some P-type (or other) dopants, the silicon oxynitride dielectric layer 108, 208 or 308 inhibits dopant penetration from the semiconductor layer 110 to the portion of the substrate 102.

15 Although only emitter regions are depicted in Figures 1-3, it is to be understood that the structures 100, 200 or 300 can further include a metal contact disposed on the semiconductor layer 100, as described below in association with Figure 4C. In one such embodiment, the emitter regions 100, 200 or 300 are for inclusion in a back contact solar cell with emitter layer (e.g., semiconductor layer 110) formed outside of substrate 102.

20 In another aspect, a method of fabricating a solar cell may include forming a silicon oxynitride dielectric layer on a substrate surface prior to forming an overlying semiconductor layer. The substrate, dielectric layer and overlying semiconductor layer can ultimately be used as an emitter region of the solar cell. In an example, Figures 4A-4C illustrate cross-sectional views of various processing operations in a method of fabricating a solar cell 450, in accordance with
25 an embodiment of the present invention.

Referring to Figure 4A, a method of fabricating an emitter region of a solar cell includes forming a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer 402 on a surface of a substrate 402, e.g., on a surface of a bulk N-type silicon substrate of the solar cell. In some embodiments, the silicon substrate 400 is cleaned, polished, planarized, and/or thinned or otherwise processed
30 prior to the formation of the silicon oxynitride dielectric layer 402. In an embodiment, the silicon oxynitride dielectric layer 402 is formed in a low pressure chemical vapor deposition (LPCVD) chamber. In an embodiment, the silicon oxynitride dielectric layer 402 is formed by consuming a portion of an N-type silicon substrate. For example, in one such embodiment, the silicon oxynitride dielectric layer 402 is formed by oxidizing and nitridizing a portion of an N-
35 type silicon substrate. In a specific such embodiment, the oxidizing and nitridizing forms a non-

homogeneous distribution of nitrogen in the silicon oxynitride dielectric layer 402, as described in association with layers 108, 208 and 308 of Figures 1-3, respectively.

In a particular exemplary embodiment, the oxidizing and nitridizing includes heating, in the presence of oxygen (O₂) and nitric oxide (NO), an N-type silicon substrate 400 to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer 402 having only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer 402 proximate to the N-type silicon substrate 400. This may be performed by first flowing predominantly the oxygen source and later flowing nitric oxide which nitridizes at the bottom of the resulting film. As an example, the silicon oxynitride layer in this embodiment may be as described in association with silicon oxynitride layer 108 of Figure 1.

In another particular exemplary embodiment, the oxidizing and nitridizing includes heating, in the presence of oxygen (O₂) and nitric oxide (NO), an N-type silicon substrate to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer 402 having only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer 402 distal from the N-type silicon substrate 400. This may be performed by first flowing predominantly the oxygen source in combination with nitric oxide, and later flowing predominantly the oxygen source only. As an example, the silicon oxynitride layer in this embodiment may be as described in association with silicon oxynitride layer 208 of Figure 2.

In yet another particular exemplary embodiment, the oxidizing and nitridizing includes heating, in the presence of oxygen (O₂) and nitric oxide (NO), an N-type silicon substrate to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer 402 having two nitrogen concentration maxima, one maxima at a surface of the silicon oxynitride dielectric layer 402 distal from the N-type silicon substrate 400, and one maxima at a surface of the silicon oxynitride dielectric layer 402 proximate to the N-type silicon substrate 400. In one such embodiment, the nitridizing and oxidizing includes first flowing nitric oxide (NO) and oxygen (O₂), next flowing only oxygen (O₂), and finally flowing nitric oxide (NO) and oxygen (O₂) to form the silicon oxynitride dielectric layer 402. As an example, the silicon oxynitride layer in this embodiment may be as described in association with silicon oxynitride layer 308 of Figure 3.

Referring again to Figure 4A, the method of fabricating the emitter region of a solar cell

further includes forming a semiconductor layer 404 on the silicon oxynitride dielectric layer 402. In an embodiment, the semiconductor layer is a polysilicon layer and, subsequent to (or during) formation is used to form a plurality of N-type doped polysilicon regions 420 and a plurality of P-type doped polysilicon regions 422, as depicted in Figure 4A. Additionally, trenches 416 can be formed between regions 420 and 422. A texturized surface 418 can be formed at the bottom of each of the trenches 416. Both the trenches 416 and texturized surfaces 418 are depicted in Figure 4A.

Thus, in an embodiment, a solar cell is fabricated to include first emitter regions and second emitter regions, e.g., based on the plurality of N-type doped polysilicon regions 420 and a plurality of P-type doped polysilicon regions 422, respectively. The emitter regions based on P-type doped polysilicon regions 422, in one embodiment, include boron dopant impurity atoms that are included either in situ or subsequent to formation of the semiconductor layer 404. In one such embodiment, the nitrogen included in the silicon oxynitride dielectric layer 402 is provided for inhibiting dopant penetration from the P-type semiconductor layers 422 to the substrate 400. Furthermore, in an embodiment, the silicon oxynitride dielectric layer 402 is a silicon oxynitride tunnel dielectric layer for the first and second emitter regions.

Referring again to Figure 4A, a dielectric layer 424 is formed above the plurality of N-type doped polysilicon regions 420, the plurality of P-type doped polysilicon regions 422, and the portions of substrate 400 exposed by trenches 416. In one embodiment, a lower surface of the dielectric layer 424 is formed conformal with the plurality of N-type doped polysilicon regions 420, the plurality of P-type doped polysilicon regions 422, and the exposed portions of substrate 400, while an upper surface of dielectric layer 424 is substantially flat, as depicted in Figure 4A. In a specific embodiment, the dielectric layer 424 is an anti-reflective coating (ARC) layer.

Referring to Figure 4B, a plurality of contact openings 426 are formed in the dielectric layer 424. The plurality of contact openings 426 provide exposure to the plurality of N-type doped polysilicon regions 420 and to the plurality of P-type doped polysilicon regions 422. In one embodiment, the plurality of contact openings 426 is formed by laser ablation. In one embodiment, the contact openings 426 to the N-type doped polysilicon regions 420 have substantially the same height as the contact openings to the P-type doped polysilicon regions 422, as depicted in Figure 4B.

Referring to Figure 4C, conductive contacts 428 are formed in the plurality of contact openings 426 and coupled to the plurality of N-type doped polysilicon regions 420 and to the plurality of P-type doped polysilicon regions 422. In an embodiment, the conductive contacts 428 are composed of metal and are formed by a deposition, lithographic, and etch approach.

Thus, in an embodiment, conductive contacts 428 are formed on or above a surface of a bulk N-

type silicon substrate 400 opposing a light receiving surface 401 of the bulk N-type silicon substrate 400. A back contact solar cell 450 is thus fabricated.

As an example of the boron-inhibiting behavior of a silicon oxynitride tunnel dielectric layer in a solar cell, Figure 5 is a plot 500 of boron (B) concentration (atoms/cm³) as a function of depth (microns) for an emitter region having a silicon oxynitride tunnel dielectric layer (curve 502) versus an emitter region having a silicon oxide tunnel dielectric layer (curve 504), in accordance with an embodiment of the present invention. Referring to plot 500, for both curves 504 and 502, based on 4.5% boron doping, a boron pile-up occurs in the first portion of the emitter region, up to and including the respective tunnel dielectric layer (at spikes 504A and 502A, respectively). However, in the case of a silicon oxynitride tunnel dielectric layer (curve 502), there is a sharp/steep decline to an approximately 5×10^{16} at/cm³ range (where measurement capability is lost), indicating little to no boron penetration. By contrast, in the case of curve 504, there is no apparent drop off, indicating substantial boron penetration.

More generally, in an embodiment, a silicon oxynitride tunnel dielectric layer is included in a solar cell to block minority carriers. In one embodiment, the thickness of the silicon oxynitride tunnel dielectric layer is approximately in the range of 10-20 Angstroms, and specifically about 15 Angstroms. However, the thermal budget conventionally required to form a tunnel dielectric layer may accelerate the formation of defects in other portions of the solar cell, for example in the substrate of a bulk substrate, back-contact solar cell. Therefore, when applying conventional approaches, there may be a trade-off for the benefits provided by including a tunnel dielectric layer with the damaging effects of the increased thermal budget typically needed to fabricate such a layer. Thus, in accordance with an embodiment of the present invention, approaches provided herein allow for fabrication of a silicon oxynitride tunnel dielectric layer for use in high efficiency solar cell designs, but with a reduced thermal budget. In one embodiment, by reducing the thermal budget, defects otherwise exacerbated with increased thermal exposure are reduced or mitigated.

In an embodiment, then, growth of thin silicon oxynitride for fabricating tunnel dielectric layers in structures with polysilicon contacts is improved in the fabrication of solar cells. For example, improvements may include one or more of the following film attributes: a high performance yet thin silicon oxynitride tunnel dielectric film, controlled thickness, controlled quality, reduced process cycle time, and reduced process thermal budget. In an embodiment, by applying one or more of the approaches described herein, a very thin silicon oxynitride tunnel oxide with good thickness control across a broad substrate is achieved at a relatively low temperature (e.g., reduced thermal budget) and with a relatively short cycle time.

Although certain materials are described specifically above, some materials may be readily

substituted with others with other such embodiments remaining within the spirit and scope of embodiments of the present invention. For example, in an embodiment, a different material substrate, such as a group III-V material substrate or a thin film substrate such as one formed from a polycrystalline silicon layer disposed on a global solar cell substrate, can be used instead of a bulk crystalline silicon substrate. In another embodiment, high band gap materials may be used in place of polysilicon to form emitter regions above the solar cell. Furthermore, although described in association with back-contact solar cells, other contact arrangements, such as front-contact solar cells, are considered within the spirit and scope of embodiments of the present invention.

Furthermore, although low-pressure chemical vapor deposition (LPCVD) is provided as a specific example for fabricating a silicon oxynitride tunnel dielectric layer, it is to be understood that other chemical vapor deposition (CVD) process may be used. For example, atmospheric pressure CVD (APCVD), plasma-enhanced CVD (PECVD), thermal growth, or sputtering processes may be used to form such a tunnel dielectric layer.

Thus, solar cells with silicon oxynitride dielectric layers and methods of forming silicon oxynitride dielectric layers for solar cell fabrication have been disclosed. In accordance with an embodiment of the present invention, an emitter region of a solar cell includes a portion of a substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the substrate. A semiconductor layer is disposed on the silicon oxynitride dielectric layer. In one embodiment, the silicon oxynitride dielectric layer has only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer proximate to the back surface of the portion of the substrate. In one embodiment, the silicon oxynitride dielectric layer has only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer distal from the back surface of the portion of the substrate. In one embodiment, the silicon oxynitride dielectric layer has two nitrogen concentration maxima, one maxima at a surface of the silicon oxynitride dielectric layer distal from the back surface of the portion of the substrate, and one maxima at a surface of the silicon oxynitride dielectric layer proximate to the back surface of the portion of the substrate.

In an embodiment, an emitter region of a solar cell includes a portion of a substrate having a back surface opposite a front surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the substrate. A semiconductor layer is disposed on the silicon oxynitride dielectric layer.

In one embodiment, the front surface is a light receiving surface of the solar cell.

In one embodiment, the silicon oxynitride dielectric layer has a non-homogeneous

distribution of nitrogen.

In one embodiment, the silicon oxynitride dielectric layer has only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer proximate to the back surface of the portion of the substrate.

5 In one embodiment, the silicon oxynitride dielectric layer has only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer distal from the back surface of the portion of the substrate.

10 In one embodiment, the silicon oxynitride dielectric layer has two nitrogen concentration maxima, one maxima at a surface of the silicon oxynitride dielectric layer distal from the back surface of the portion of the substrate, and one maxima at a surface of the silicon oxynitride dielectric layer proximate to the back surface of the portion of the substrate.

In one embodiment, the distance between the maxima is approximately in the range of 5 – 6 Angstroms.

15 In one embodiment, the silicon oxynitride dielectric layer has a thickness approximately in the range of 10 – 20 Angstroms.

20 In one embodiment, the silicon oxynitride dielectric layer has a first nitrogen-rich region having a thickness approximately in the range of 4 – 5 Angstroms, a nitrogen-poor region disposed above the first nitrogen-rich region and having a thickness approximately in the range of 5 – 6 Angstroms, and a second nitrogen-rich region disposed above the nitrogen-poor region and having a thickness approximately in the range of 4 – 5 Angstroms.

In one embodiment, the silicon oxynitride dielectric layer has a composition wherein $x > y$.

In one embodiment, the semiconductor layer disposed on the silicon oxynitride dielectric layer is a boron-doped silicon layer.

In one embodiment, the silicon oxynitride dielectric layer includes boron atoms.

25 In one embodiment, the silicon oxynitride dielectric layer is for inhibiting dopant penetration from the semiconductor layer to the portion of the substrate.

In one embodiment, the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the emitter region.

30 In one embodiment, the emitter region further includes a metal contact disposed on the semiconductor layer.

35 In an embodiment, a solar cell including a first emitter region includes a first portion of a substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the first portion of the substrate. A P-type semiconductor layer is disposed on the silicon oxynitride dielectric layer. The solar cell also includes solar cell a second emitter region including second portion of the substrate. The silicon

oxynitride dielectric layer is disposed on the back surface of the second portion of the substrate. An N-type semiconductor layer is disposed on the silicon oxynitride dielectric layer.

In one embodiment, the silicon oxynitride dielectric layer has a non-homogeneous distribution of nitrogen.

5 In one embodiment, the silicon oxynitride dielectric layer is for inhibiting dopant penetration from the P-type semiconductor layer to the first portion of the substrate, and the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the first and second emitter regions.

10 In one embodiment, the first and second emitter regions are separated by a trench formed in the substrate, between the first and second portions of the substrate.

In one embodiment, an emitter region of a solar cell includes a portion of an N-type bulk silicon substrate having a back surface opposite a light receiving surface. A silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer is disposed on the back surface of the portion of the N-type bulk silicon substrate. The silicon oxynitride dielectric layer has a non-homogeneous
15 distribution of nitrogen. A boron-doped polycrystalline silicon layer is disposed on the silicon oxynitride dielectric layer. A metal contact is disposed on the P-type polycrystalline silicon layer.

In one embodiment, the silicon oxynitride dielectric layer is for inhibiting dopant penetration from the boron-doped polycrystalline silicon layer to the portion of the N-type bulk
20 silicon substrate, and the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the emitter region.

In an embodiment, a method of fabricating an emitter region of a solar cell involves forming a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer on a surface of a bulk N-type silicon substrate of the solar cell by consuming a portion of the N-type silicon substrate. The
25 method also involves forming a semiconductor layer on the silicon oxynitride dielectric layer.

In one embodiment, forming the silicon oxynitride dielectric layer involves oxidizing and nitridizing the portion of the N-type silicon substrate.

In one embodiment, the oxidizing and nitridizing forms a non-homogeneous distribution of nitrogen in the silicon oxynitride dielectric layer.

30 In one embodiment, the oxidizing and nitridizing involves heating, in the presence of oxygen (O_2) and nitric oxide (NO), the N-type silicon substrate to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer having only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride
35 dielectric layer proximate to the N-type silicon substrate.

In one embodiment, the oxidizing and nitridizing involves heating, in the presence of oxygen (O_2) and nitric oxide (NO), the N-type silicon substrate to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer
5 having only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer distal from the N-type silicon substrate.

In one embodiment, the oxidizing and nitridizing involves heating, in the presence of oxygen (O_2) and nitric oxide (NO), the N-type silicon substrate to a temperature approximately in the range of 650 – 900 degrees Celsius without a plasma or to a temperature approximately in the
10 range of 200 – 350 degrees Celsius with a plasma to form the silicon oxynitride dielectric layer having two nitrogen concentration maxima, one maxima at a surface of the silicon oxynitride dielectric layer distal from the N-type silicon substrate, and one maxima at a surface of the silicon oxynitride dielectric layer proximate to the N-type silicon substrate.

In one embodiment, the nitridizing and oxidizing involves first flowing nitric oxide (NO)
15 and oxygen (O_2), next flowing only oxygen (O_2), and finally flowing nitric oxide (NO) and oxygen (O_2).

In one embodiment, the silicon oxynitride dielectric layer is formed in a low pressure chemical vapor deposition (LPCVD) chamber.

20

CLAIMS

What is claimed is:

1. An emitter region of a solar cell, the emitter region comprising:
5 a portion of a substrate having a back surface opposite a front surface;
a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer disposed on the back surface of the
portion of the substrate, wherein the silicon oxynitride dielectric layer has a non-
homogeneous distribution of nitrogen; and
a semiconductor layer disposed on the silicon oxynitride dielectric layer.
10
2. The emitter region of claim 1, wherein the front surface is a light receiving surface of the solar cell.
3. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer has only one
15 nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer proximate to the back surface of the portion of the substrate.
4. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer has only one
nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer
20 distal from the back surface of the portion of the substrate.
5. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer has two nitrogen
concentration maxima, one maxima at a surface of the silicon oxynitride dielectric layer distal
from the back surface of the portion of the substrate, and one maxima at a surface of the silicon
25 oxynitride dielectric layer proximate to the back surface of the portion of the substrate.
6. The emitter region of claim 5, wherein the distance between the maxima is approximately in
the range of 5 – 6 Angstroms.
- 30 7. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer has a thickness approximately in the range of 10 – 20 Angstroms.
8. The emitter region of claim 7, wherein the silicon oxynitride dielectric layer has a first
nitrogen-rich region having a thickness approximately in the range of 4 – 5 Angstroms, a
35 nitrogen-poor region disposed above the first nitrogen-rich region and having a thickness

approximately in the range of 5 – 6 Angstroms, and a second nitrogen-rich region disposed above the nitrogen-poor region and having a thickness approximately in the range of 4 – 5 Angstroms.

9. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer has a composition wherein $x > y$.

10. The emitter region of claim 1, wherein the semiconductor layer disposed on the silicon oxynitride dielectric layer is a boron-doped silicon layer.

11. The emitter region of claim 10, wherein the silicon oxynitride dielectric layer comprises boron atoms.

12. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer is for inhibiting dopant penetration from the semiconductor layer to the portion of the substrate.

13. The emitter region of claim 1, wherein the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the emitter region.

14. The emitter region of claim 1, further comprising:
a metal contact disposed on the semiconductor layer.

15. A solar cell, comprising:

a first emitter region, comprising:

a first portion of a substrate having a back surface opposite a light receiving surface;

a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer disposed on the back surface of the first portion of the substrate, wherein the silicon oxynitride dielectric layer has a non-homogeneous distribution of nitrogen; and

a P-type semiconductor layer disposed on the silicon oxynitride dielectric layer; and

a second emitter region, comprising:

a second portion of the substrate;

the silicon oxynitride dielectric layer disposed on the back surface of the second portion of the substrate; and

an N-type semiconductor layer disposed on the silicon oxynitride dielectric layer.

16. The solar cell of claim 15, wherein the silicon oxynitride dielectric layer is for inhibiting

dopant penetration from the P-type semiconductor layer to the first portion of the substrate, and wherein the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the first and second emitter regions.

5 17. The solar cell of claim 15, wherein the first and second emitter regions are separated by a trench formed in the substrate, between the first and second portions of the substrate.

18. An emitter region of a solar cell, the emitter region comprising:

10 a portion of an N-type bulk silicon substrate having a back surface opposite a light receiving surface;

a silicon oxynitride (SiO_xN_y , $0 < x, y$) dielectric layer disposed on the back surface of the portion of the N-type bulk silicon substrate, wherein the silicon oxynitride dielectric layer has a non-homogeneous distribution of nitrogen;

15 a boron-doped polycrystalline silicon layer disposed on the silicon oxynitride dielectric layer; and

a metal contact disposed on the boron-doped polycrystalline silicon layer.

19. The emitter region of claim 18, wherein the silicon oxynitride dielectric layer is for inhibiting dopant penetration from the boron-doped polycrystalline silicon layer to the portion of
20 the N-type bulk silicon substrate, and wherein the silicon oxynitride dielectric layer is a silicon oxynitride tunnel dielectric layer for the emitter region.

20. The emitter region of claim 18, wherein the silicon oxynitride dielectric layer has only one nitrogen concentration maxima, the maxima at a surface of the silicon oxynitride dielectric layer
25 proximate to the back surface of the portion of the N-type bulk silicon substrate.

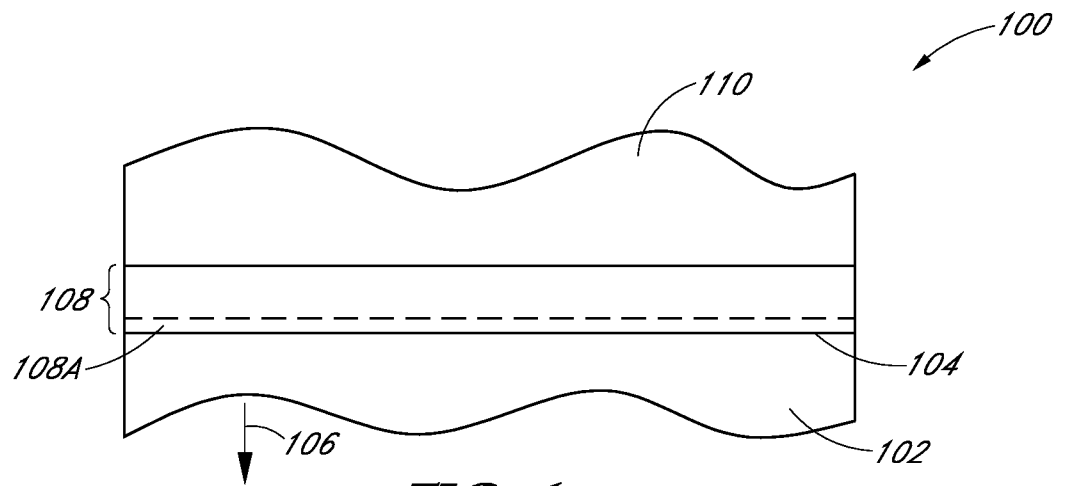


FIG. 1

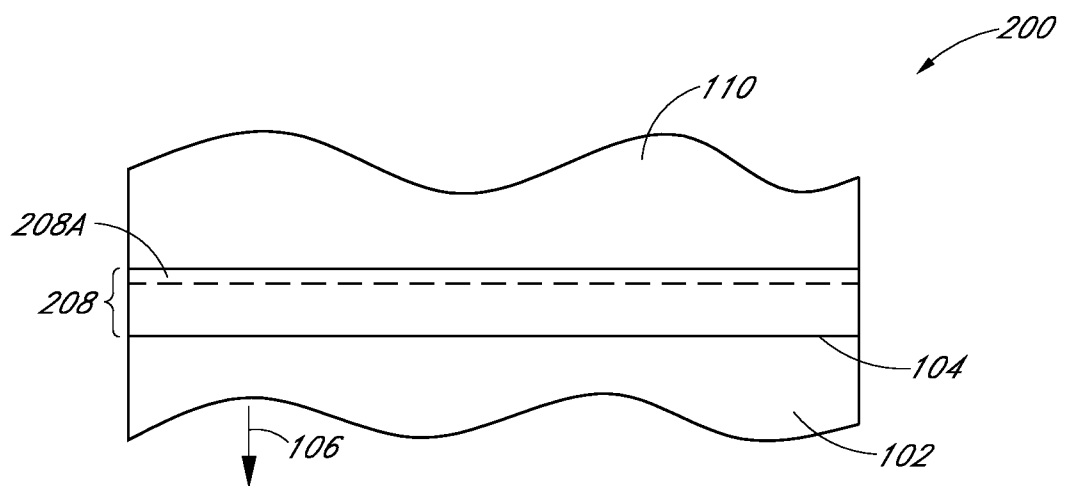


FIG. 2

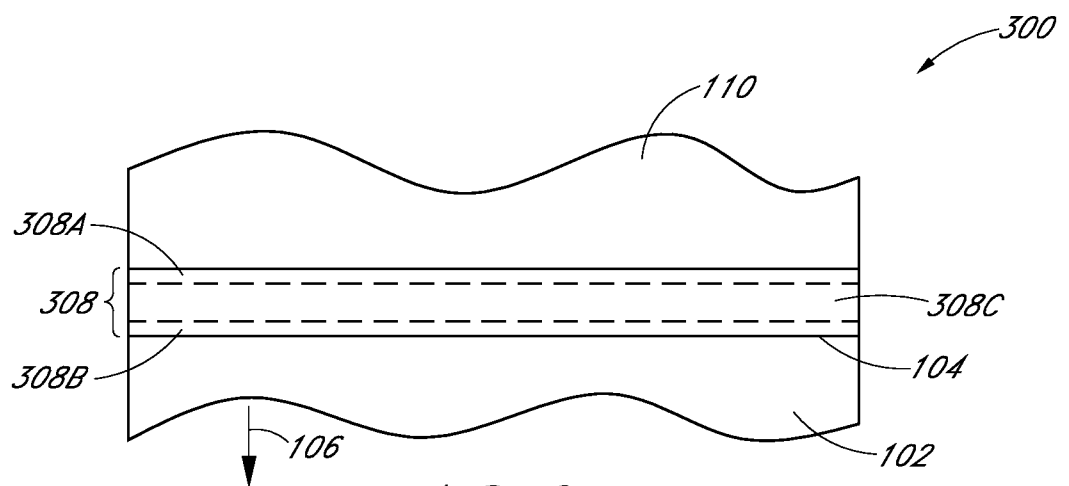


FIG. 3

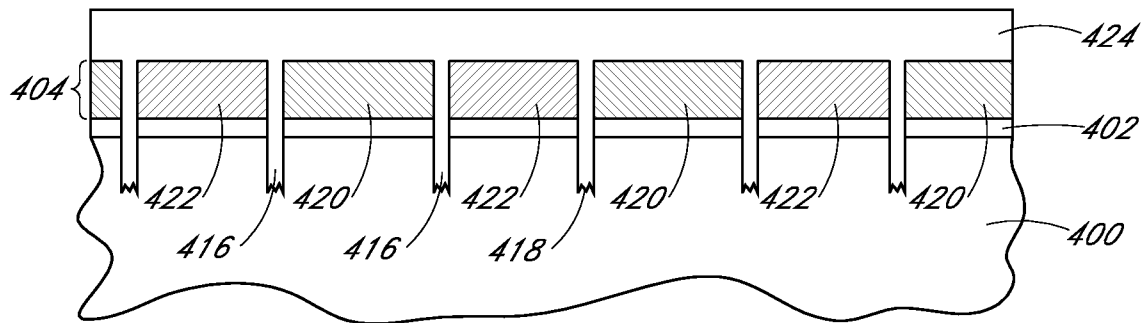


FIG. 4A

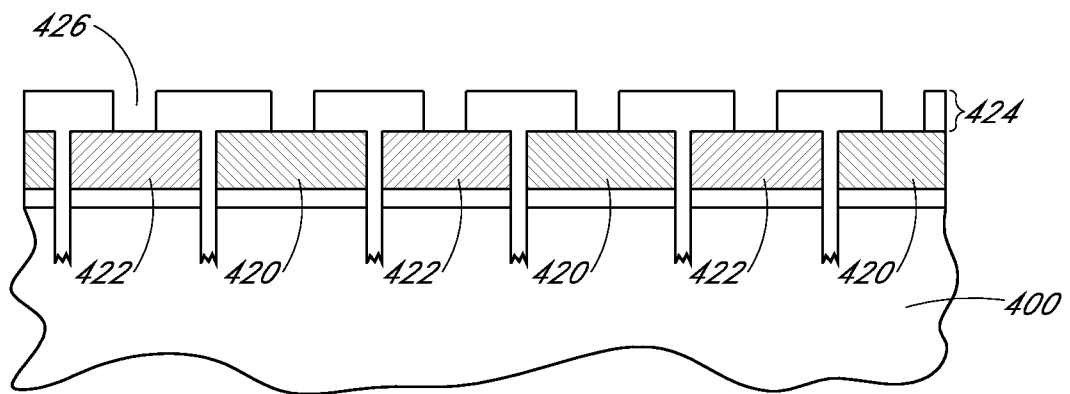


FIG. 4B

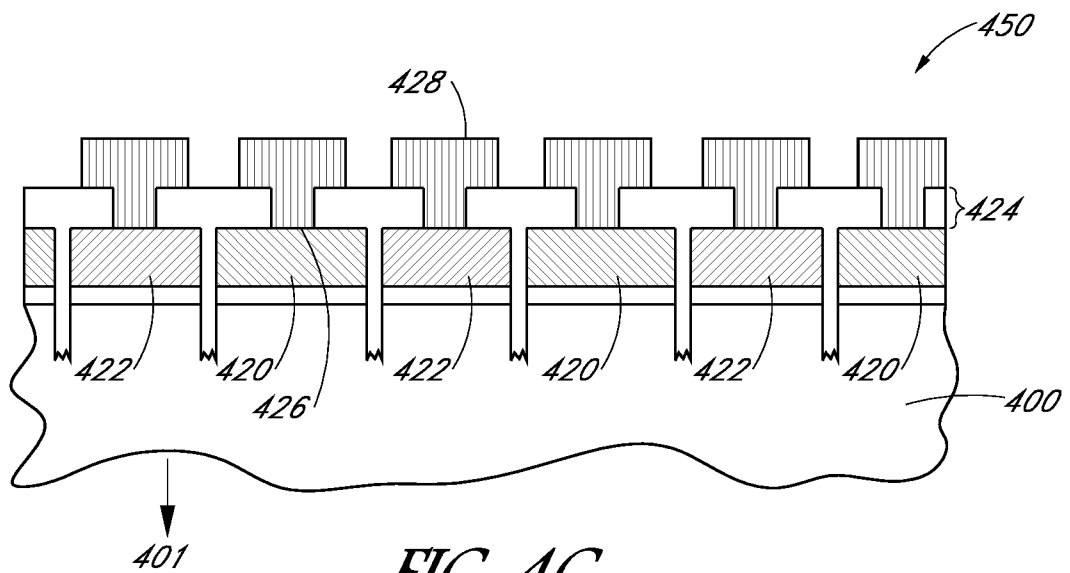


FIG. 4C

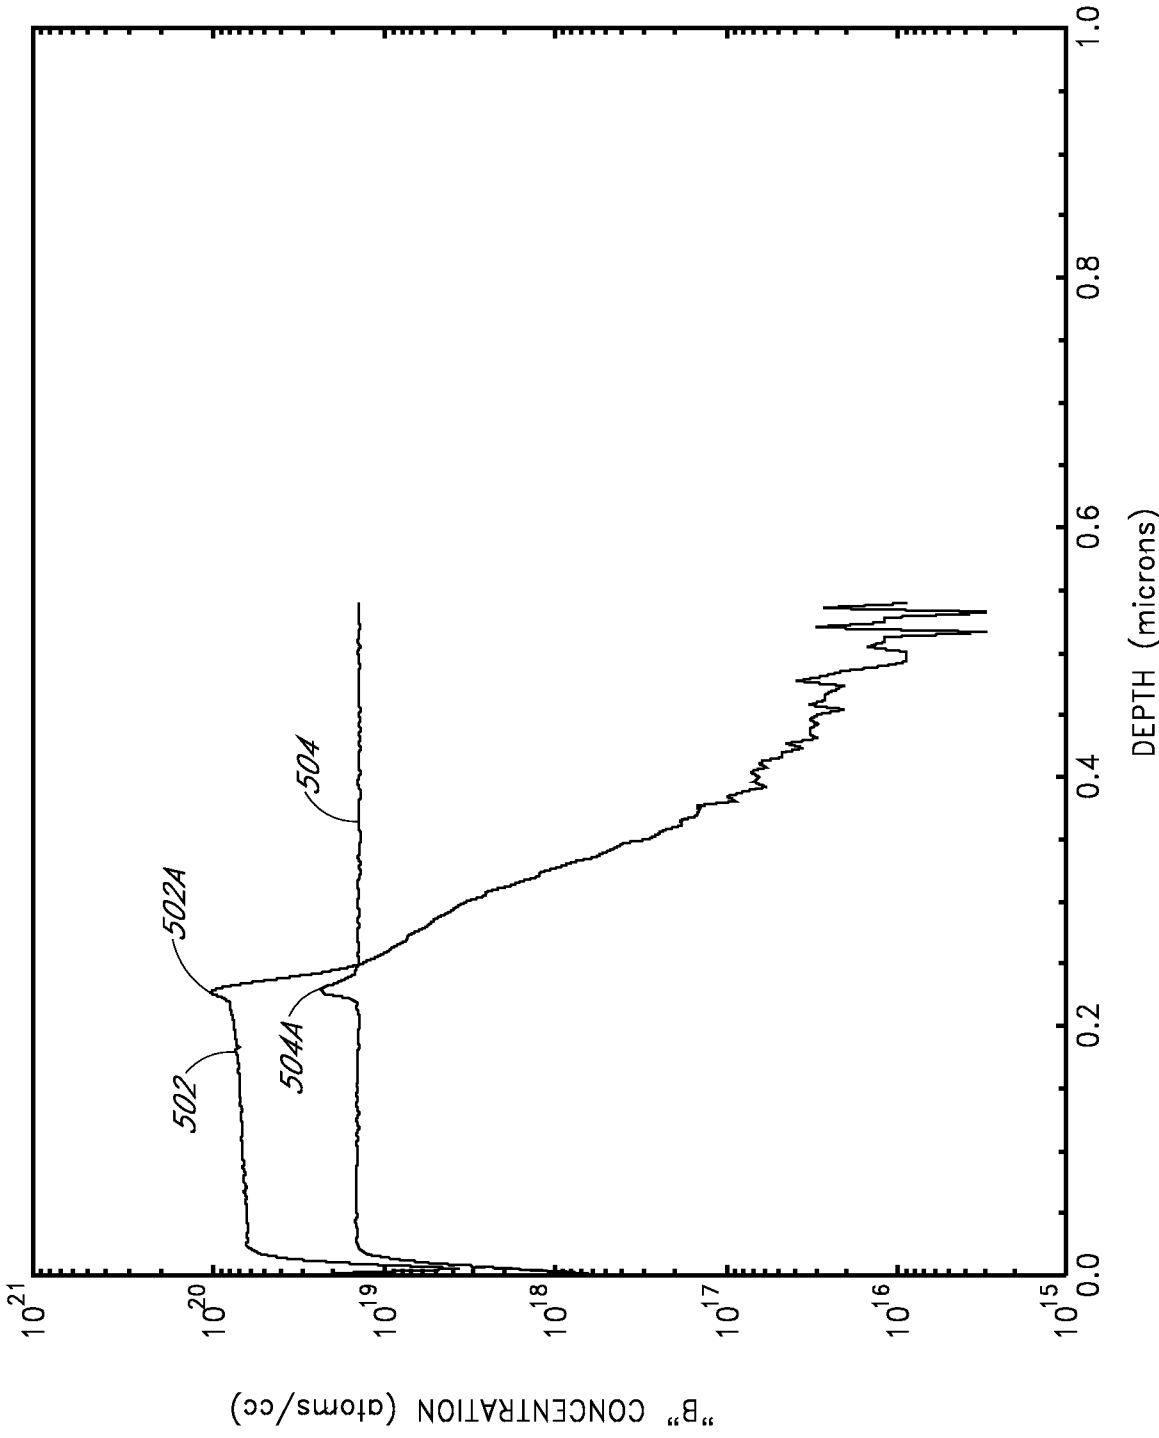


FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER**H01L 31/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 31/04; H01L 31/0216; C23C 14/34; H01L 31/00; H01L 31/042; H01L 21/76

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: solar cell, silicon oxinitride, dielectric layer, emitter region, non-homogeneous distribution**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007-0175508 A1 (HYUN JUNG PARK) 02 August 2007 See paragraphs [0015]-[0041]; and figure 1.	1-20
A	KR 10-2010-0019522 A (SUNPOWER CORPORATION) 18 February 2010 See paragraphs [0016]-[0032]; and figures 1-2G.	1-20
A	KR 10-2009-0129507 A (SUNPOWER CORPORATION) 16 December 2009 See paragraphs [0004]-[0040]; and figures 1-8B.	1-20
A	WO 2006-124131 A2 (INTERMOLECULAR, INC.) 23 November 2006 See pages 11-46; and figures 1A-15E.	1-20
A	US 2009-0277782 A1 (NIMEL THEODORE et al.) 12 November 2009 See paragraphs [0032]-[0066]; and figures 1-13.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 March 2014 (07.03.2014)

Date of mailing of the international search report

10 March 2014 (10.03.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Do Weon

Telephone No. +82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/072104

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0175508 A1	02/08/2007	CN 101305472 A	12/11/2008
		CN 101305472 B	13/07/2011
		CN 101840962 A	22/09/2010
		EP 1949450 A1	30/07/2008
		EP 1949450 A4	01/08/2012
		JP 2009-515336 A	09/04/2009
		KR 10-0877817 B1	12/01/2009
		KR 10-2007-0049555 A	11/05/2007
		WO 2007-055484 A1	18/05/2007
KR 10-2010-0019522 A	18/02/2010	AU 2008-254968 A1	27/11/2008
		CN 101681944 A	24/03/2010
		EP 2158613 A2	03/03/2010
		JP 2010-527514 A	12/08/2010
		US 2008-0283490 A1	20/11/2008
		US 2010-0129955 A1	27/05/2010
		US 7670638 B2	02/03/2010
		WO 2008-143885 A2	27/11/2008
		WO 2008-143885 A3	05/02/2009
KR 10-2009-0129507 A	16/12/2009	CN 101652865 A	17/02/2010
		EP 2137766 A1	30/12/2009
		JP 2010-524254 A	15/07/2010
		US 2008-0251121 A1	16/10/2008
		WO 2008-127576 A1	23/10/2008
WO 2006-124131 A2	23/11/2006	CN 101421433 A	29/04/2009
		CN 101421433 B	06/11/2013
		CN 101512720 A	19/08/2009
		CN 101558482 A	14/10/2009
		CN 101558482 B	04/04/2012
		EP 1905072 A2	02/04/2008
		EP 1905072 A4	03/11/2010
		EP 1935003 A2	25/06/2008
		EP 1994550 A2	26/11/2008
		JP 05284098 B2	11/09/2013
		JP 05284108 B2	11/09/2013
		JP 05284297 B2	11/09/2013
		JP 2009-515322 A	09/04/2009
		JP 2009-526408 A	16/07/2009
		JP 2010-123996 A	03/06/2010
		KR 10-1281231 B1	02/07/2013
		KR 10-2009-0014139 A	06/02/2009
		TW I326106 A	11/06/2010
		TW I329349 A	21/08/2010
		US 2006-0060301 A1	23/03/2006
		US 2006-0261434 A1	23/11/2006
		US 2006-0264020 A1	23/11/2006
		US 2006-0292845 A1	28/12/2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/072104

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2006-0292846 A1	28/12/2006
		US 2007-0082485 A1	12/04/2007
		US 2007-0082487 A1	12/04/2007
		US 2007-0082508 A1	12/04/2007
		US 2007-0089857 A1	26/04/2007
		US 2007-0166989 A1	19/07/2007
		US 2007-0202610 A1	30/08/2007
		US 2007-0202614 A1	30/08/2007
		US 2007-0267631 A1	22/11/2007
		US 2008-0128696 A1	05/06/2008
		US 2008-0132089 A1	05/06/2008
		US 2008-0133161 A1	05/06/2008
		US 2008-0246150 A1	09/10/2008
		US 2009-0227049 A1	10/09/2009
		US 2011-0021015 A1	27/01/2011
		US 2011-0101536 A1	05/05/2011
		US 7390739 B2	24/06/2008
		US 7544574 B2	09/06/2009
		US 7749881 B2	06/07/2010
		US 7871928 B2	18/01/2011
		US 7879710 B2	01/02/2011
		US 7902063 B2	08/03/2011
		US 8030772 B2	04/10/2011
		US 8039383 B2	18/10/2011
		US 8058154 B2	15/11/2011
		US 8067340 B2	29/11/2011
		US 8084400 B2	27/12/2011
		WO 2006-124131 A3	16/04/2009
		WO 2007-011380 A2	25/01/2007
		WO 2007-011380 A3	09/04/2009
		WO 2007-046852 A2	26/04/2007
		WO 2007-046852 A3	16/04/2009
		WO 2007-046853 A2	26/04/2007
		WO 2007-046853 A3	25/09/2008
		WO 2007-095194 A2	23/08/2007
		WO 2007-095194 A3	20/11/2008
US 2009-0277782 A1	12/11/2009	US 2009-0071371 A1	19/03/2009