US 20130192251A1

(19) **United States**

(12) **Patent Application Publication**

**Munsell et al.**

(10) **Pub. No.: US 2013/0192251 A1**

(43) **Pub. Date: Aug. 1, 2013**

(54) **BUFFER SYSTEM THAT COMMUNICATES BUFFER SUPPLY AIR TO ONE OR MORE PORTIONS OF A GAS TURBINE ENGINE**

(76) Inventors: **Peter M. Munsell**, Grandy, CT (US); **Philip S. Stripinis**, Rocky Hill, CT (US)

(21) Appl. No.: **13/362,307**

(22) Filed: **Jan. 31, 2012**

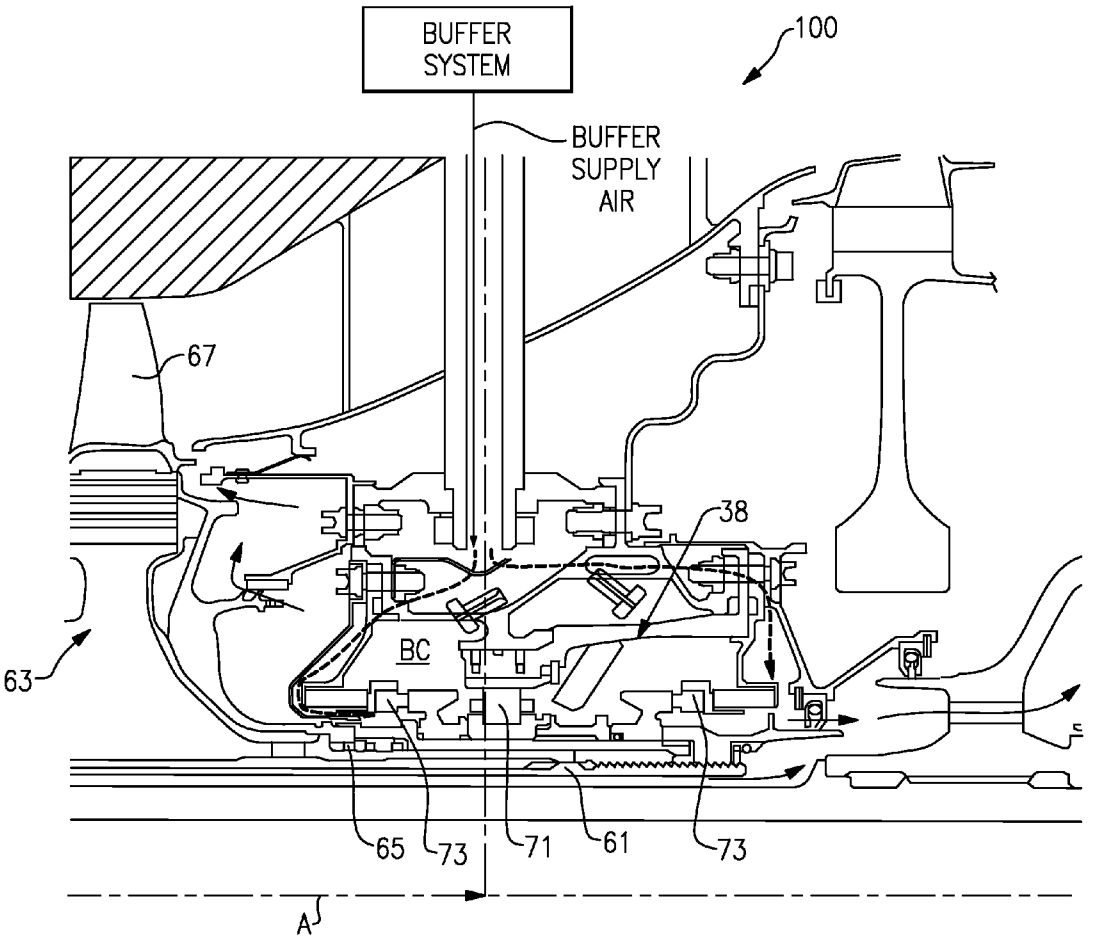
**Publication Classification**

(51) **Int. Cl.**
***F02C 6/08*** (2006.01)

(52) **U.S. Cl.**
USPC ..... **60/782**; 60/785

(57) **ABSTRACT**

A gas turbine engine includes a buffer system that can communicate a buffer supply air to a portion of the gas turbine engine. The buffer system includes a first bleed air supply having a first pressure, a second bleed air supply having a second pressure that is greater than the first pressure, and an ejector that selectively augments the first bleed air supply to prepare the buffer supply air for communication to the portion of the gas turbine engine.



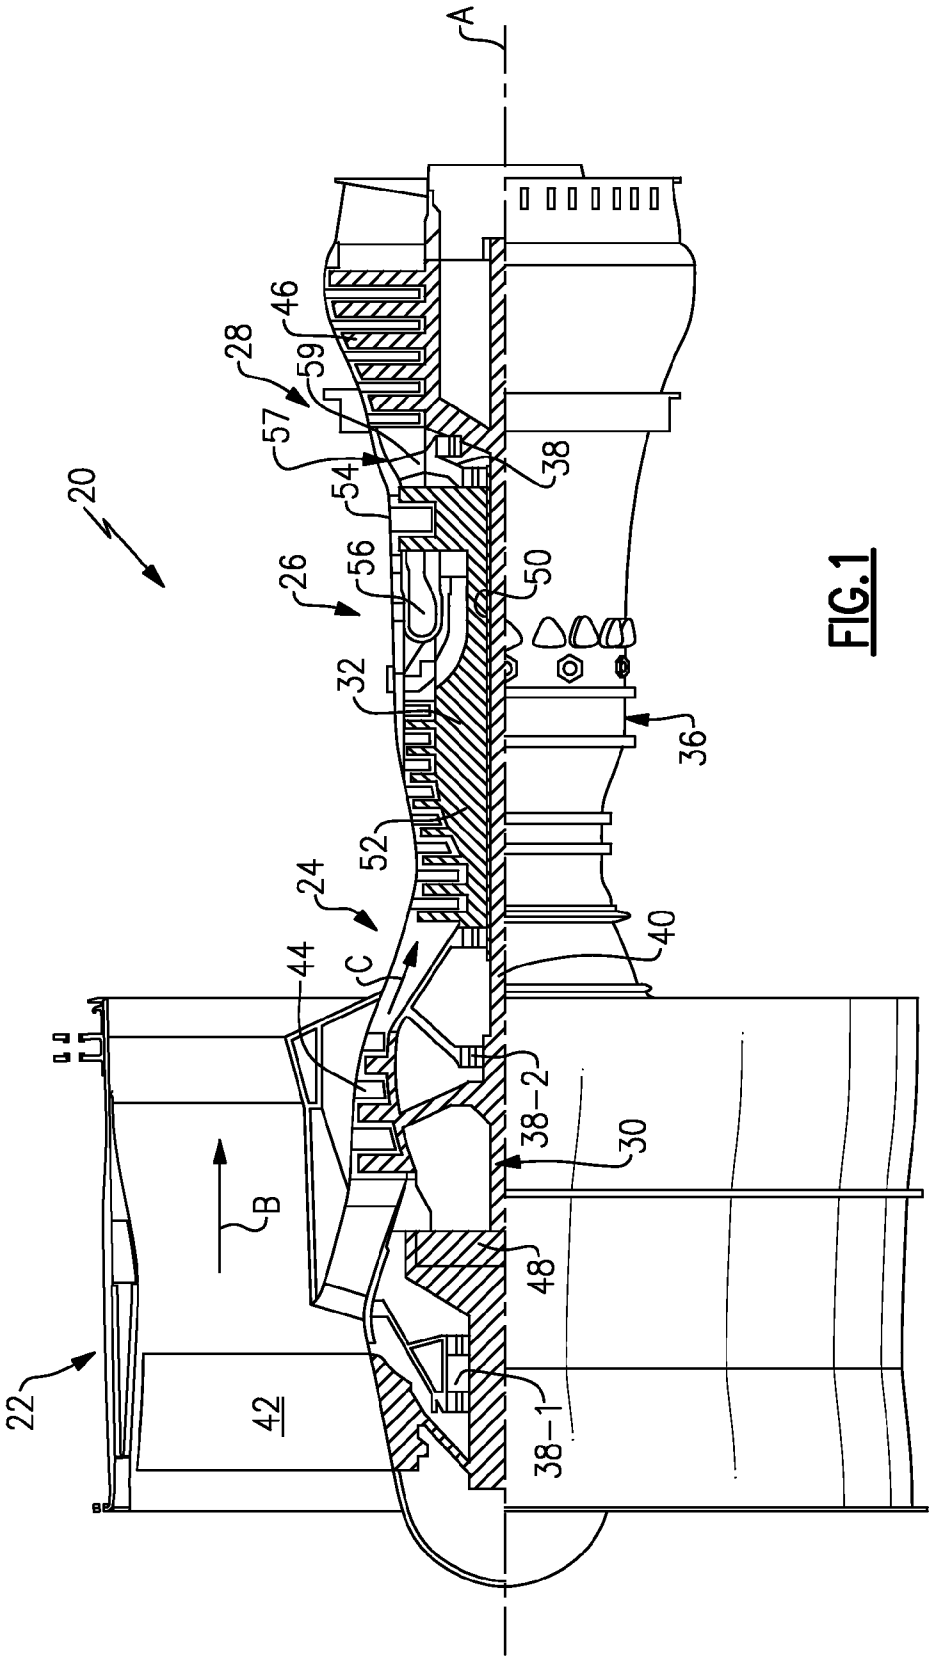
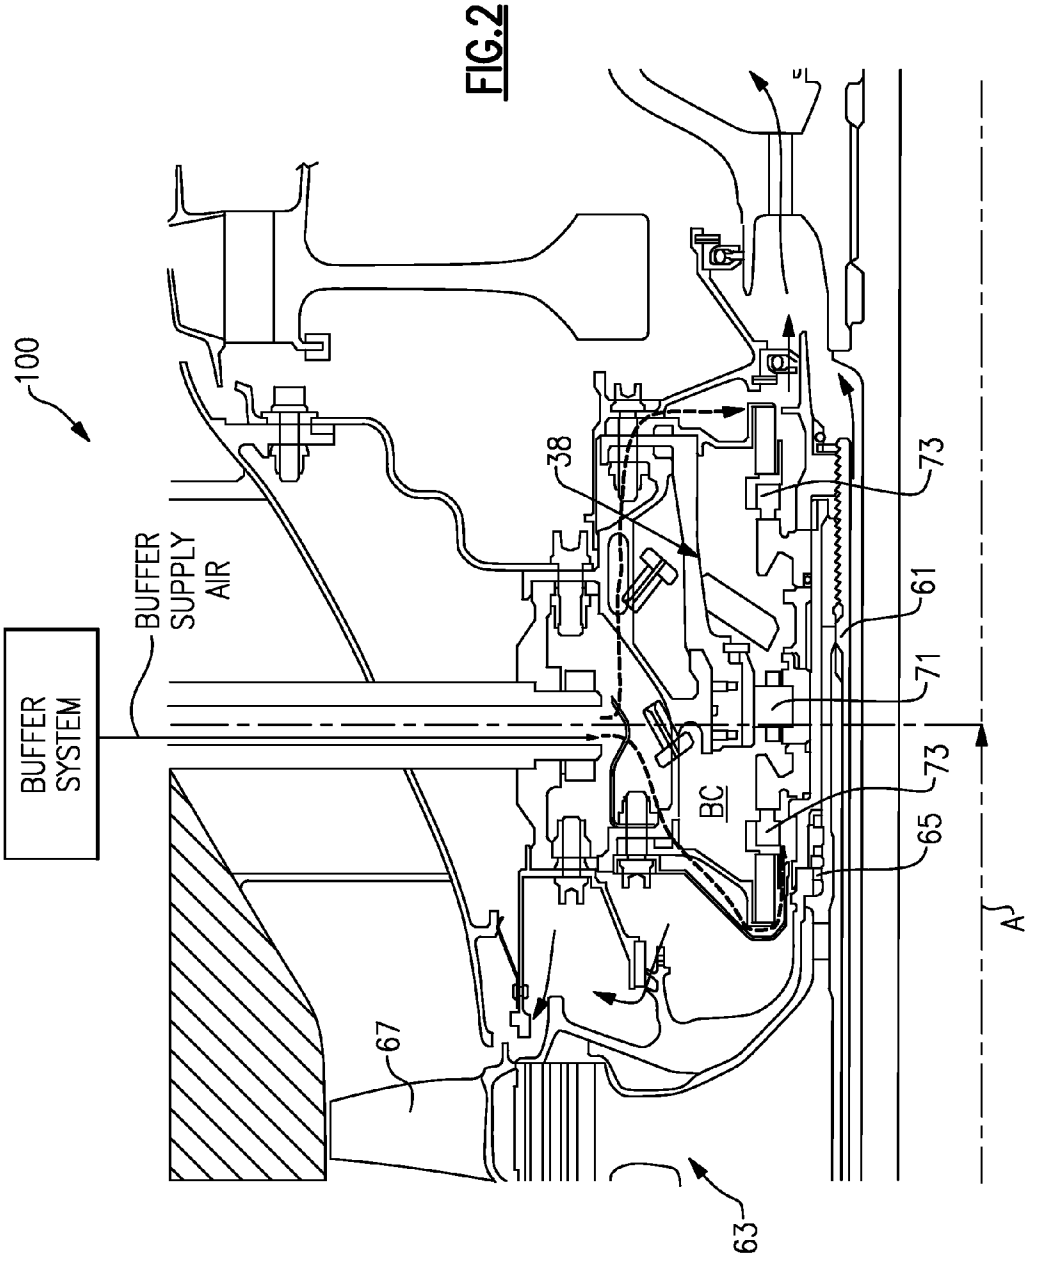



FIG.1

FIG.2



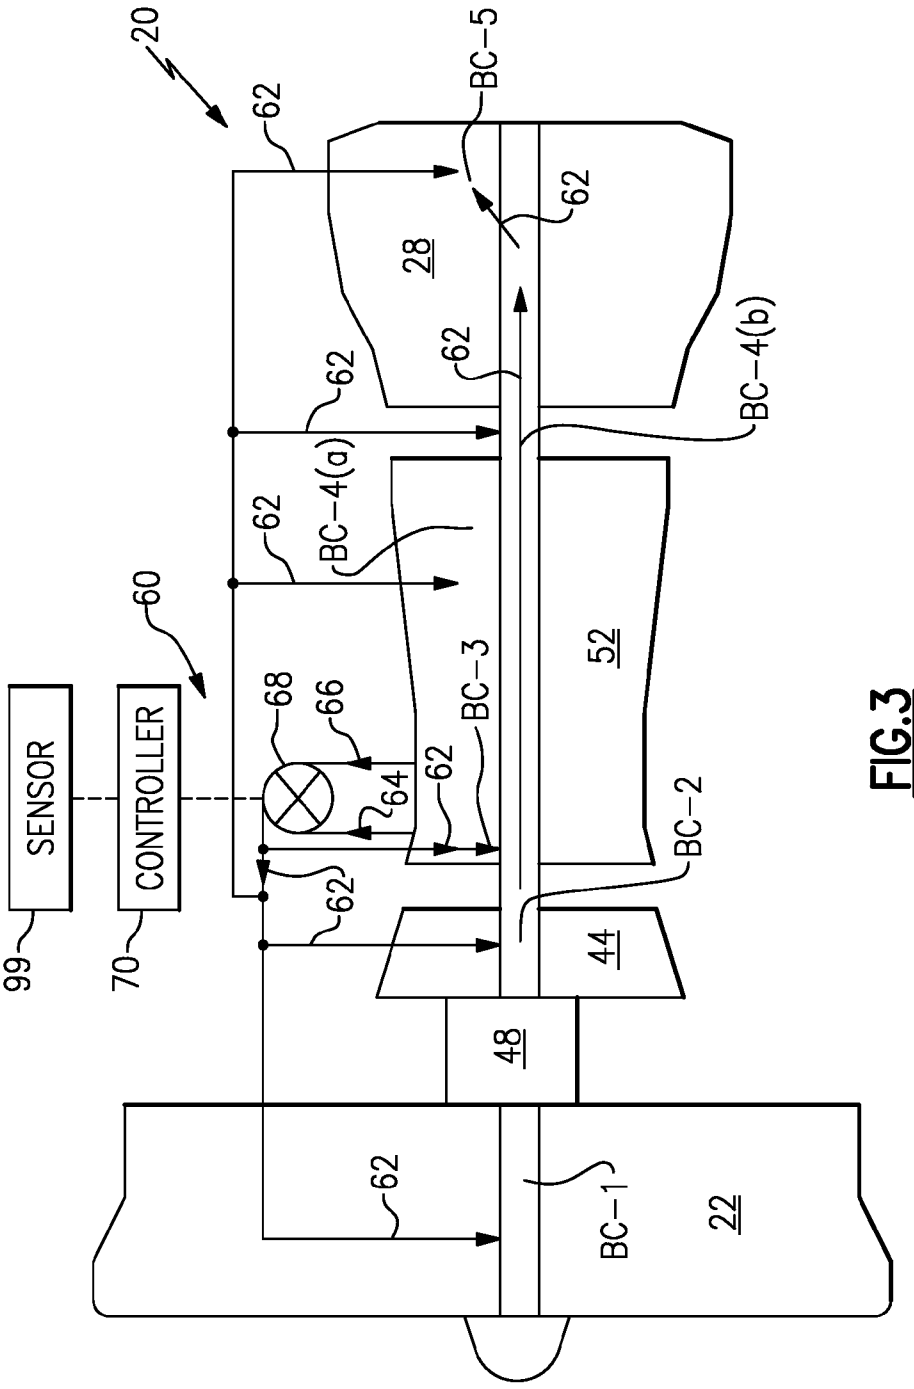

20
62
BC-5
62
28
62
62
BC-4(b)
62
BC-4(a)
62
60
52
68
66
BC-3
64
62
BC-2
62
SENSOR
CONTROLLER
99
70
44
48
62
BC-1
22

FIG.3

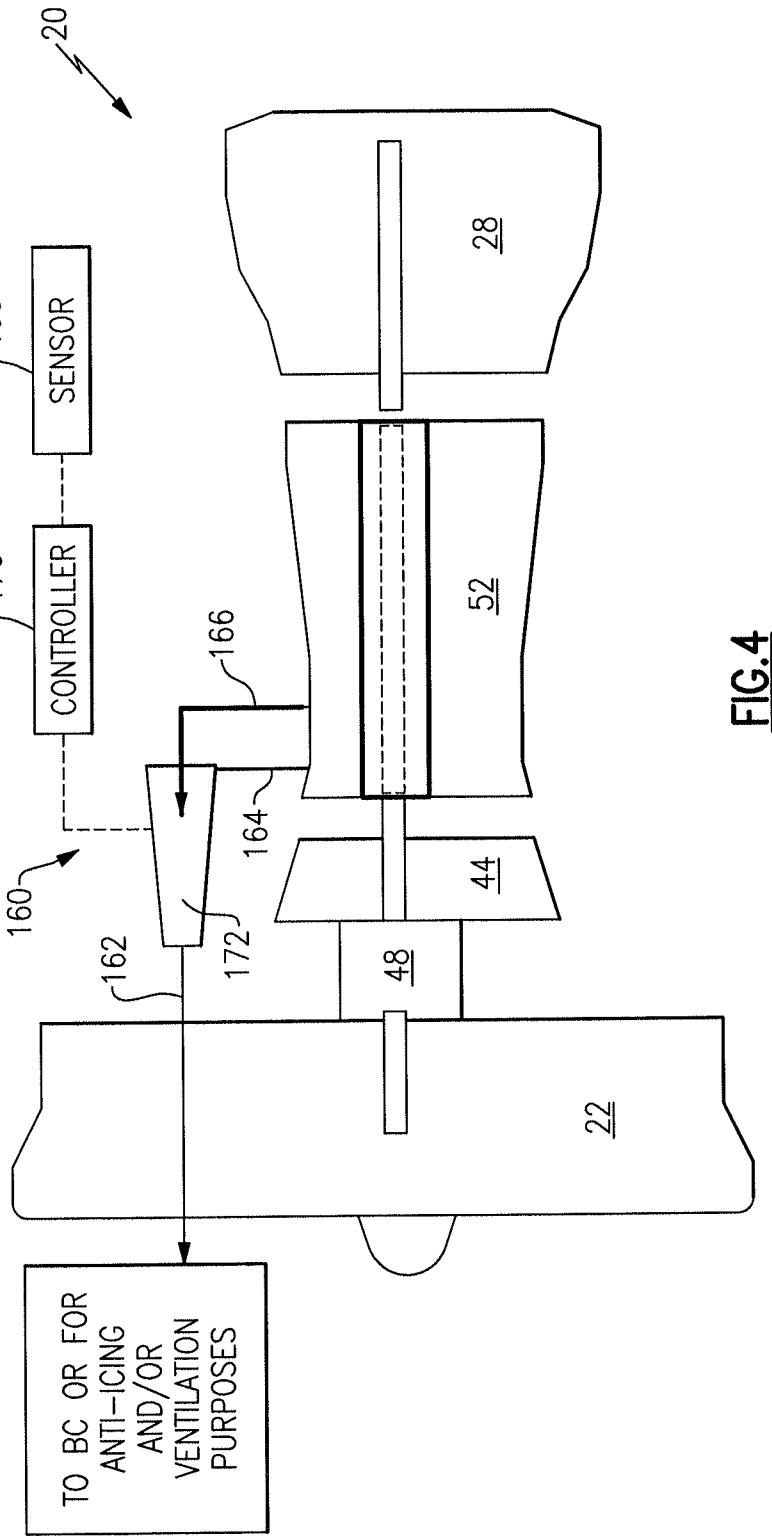

20
199
SENSOR
170
CONTROLLER
166
160
164
162
172
28
52
44
48
22
TO BC OR FOR ANTI-ICING AND/OR VENTILATION PURPOSES

FIG.4

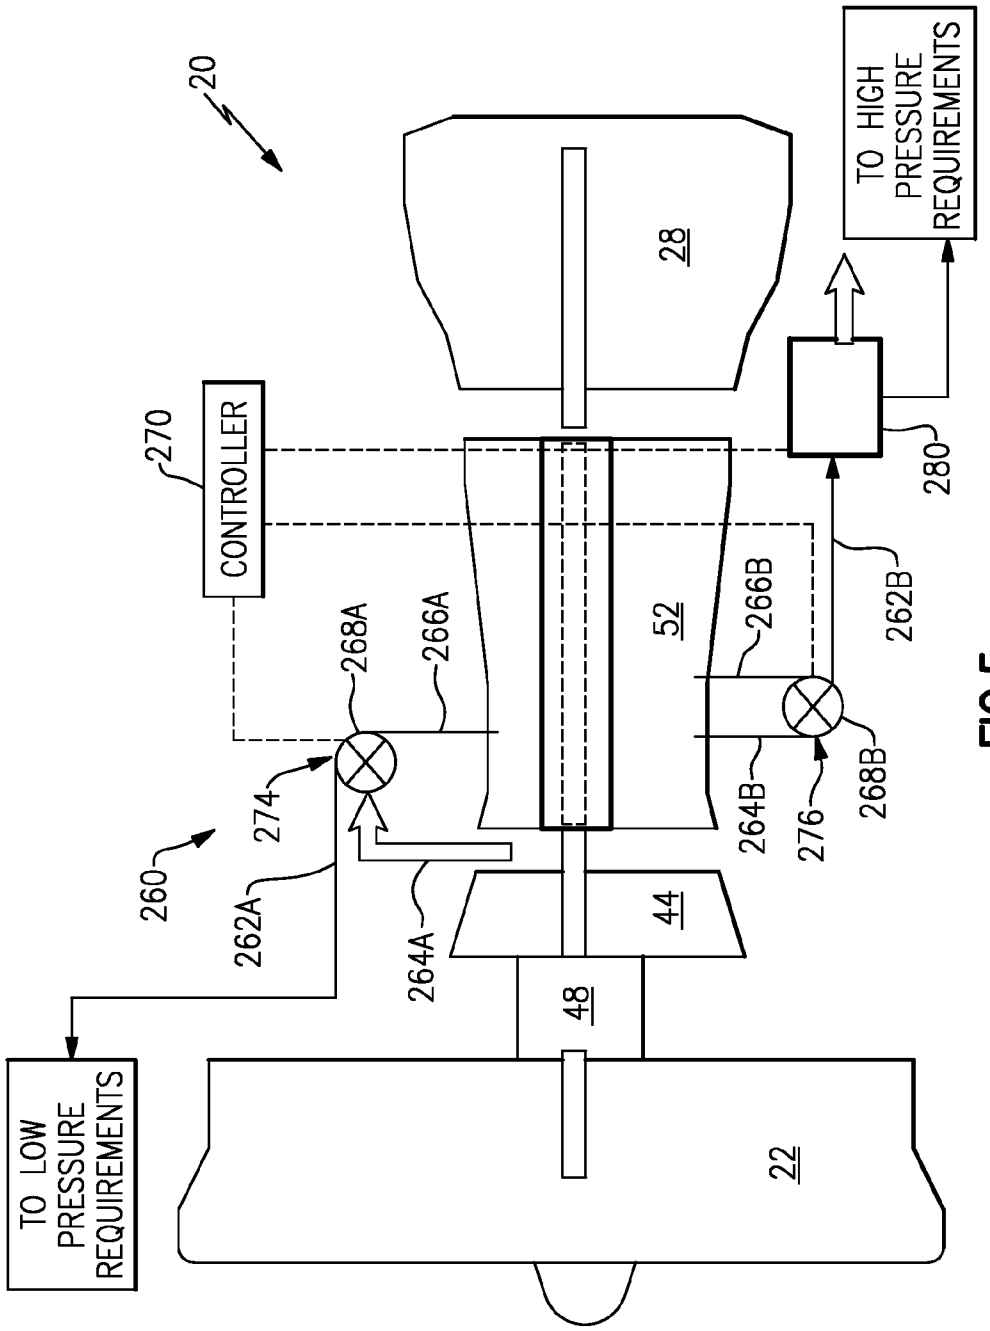

20
28
TO HIGH PRESSURE REQUIREMENTS
270
CONTROLLER
280
262B
52
266B
268A
266A
274
260
262A
264A
44
264B
276
268B
48
22
TO LOW PRESSURE REQUIREMENTS

FIG.5

# BUFFER SYSTEM THAT COMMUNICATES BUFFER SUPPLY AIR TO ONE OR MORE PORTIONS OF A GAS TURBINE ENGINE

## BACKGROUND

**[0001]** This disclosure relates to a gas turbine engine, and more particularly to a buffer system that can communicate a buffer supply air to one or more portions of the gas turbine engine.

**[0002]** Gas turbine engines typically include at least a compressor section, a combustor section and a turbine section. During operation, air is pressurized in the compressor section and is mixed with fuel and burned in the combustor section to generate hot combustion gases. The hot combustion gases are communicated through the turbine section which extracts energy from the hot combustion gases to power the compressor section and other gas turbine engine modes.

**[0003]** Gas turbine engines typically include shafts that support a plurality of airfoil supporting rotors of the compressor section and the turbine section. Generally, these shafts are supported by bearing structures that define bearing compartments. The bearing compartments house one or more bearings and contain lubricant that is used to lubricate the bearings. The lubricant is contained within the bearing compartment by one or more seals. A predetermined differential pressure must be maintained across the seals so the lubricant cannot leak past the seals.

## SUMMARY

**[0004]** A gas turbine engine includes a buffer system that can communicate a buffer supply air to a portion of the gas turbine engine. The buffer system includes a first bleed air supply having a first pressure, a second bleed air supply having a second pressure that is greater than the first pressure, and an ejector that selectively augments the first bleed air supply to prepare the buffer supply air for communication to the portion of the gas turbine engine.

**[0005]** In a further embodiment of the foregoing gas turbine engine embodiment, the ejector can be powered by the second bleed air supply.

**[0006]** In a further embodiment of either of the foregoing gas turbine engine embodiments, the portion can include at least one bearing compartment of the gas turbine engine.

**[0007]** In a further embodiment of any of the foregoing gas turbine engine embodiments, a controller can selectively command the ejector to augment the first bleed supply air in response to detecting a power condition of the gas turbine engine.

**[0008]** In a further embodiment of any of the foregoing gas turbine engine embodiments, a sensor can detect the power condition.

**[0009]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the first bleed air supply can be sourced from a location of the gas turbine engine that is upstream from a source of the second bleed air supply.

**[0010]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the first bleed air supply can be augmented to a higher pressure by the ejector in response to a low power condition of the gas turbine engine and the first bleed air supply is not augmented by the ejector in response to a high power condition of the gas turbine engine.

**[0011]** In another exemplary embodiment, a gas turbine engine includes a compressor section, a combustor in fluid communication with the compressor section, a turbine section in fluid communication with the combustor, at least one shaft that interconnects at least a portion of the compressor section and the turbine section, and bearing structure that supports the at least one shaft and includes a bearing compartment. A bearing system can selectively communicate a buffer supply air to pressurize the bearing compartment. The buffer system can include a first bleed air supply and an ejector that is selectively powered by a second bleed air supply of a greater pressure than the first bleed air supply.

**[0012]** In a further embodiment of the foregoing gas turbine engine embodiment, the ejector can augment the first bleed air supply to a higher pressure to prepare the buffer supply air in response to detecting a power condition of the gas turbine engine.

**[0013]** In a further embodiment of either of the foregoing gas turbine engine embodiments, the ejector can augment the first bleed air supply in response to detecting a low power condition of the gas turbine engine.

**[0014]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the gas turbine engine can include a high bypass geared aircraft engine having a bypass ratio of greater than about six (6).

**[0015]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the gas turbine engine includes a low fan pressure ratio of less than about 1.45.

**[0016]** In a further embodiment of any of the foregoing gas turbine engine embodiments, a controller selectively commands said ejector to augment said first bleed supply air in response to detecting a power condition of the gas turbine engine.

**[0017]** In a further embodiment of any of the foregoing gas turbine engine embodiments, including a sensor that detects the power condition.

**[0018]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the first bleed air supply is sourced from a location of the gas turbine engine that is upstream from a source of said second bleed air supply.

**[0019]** In a further embodiment of any of the foregoing gas turbine engine embodiments, the first bleed air supply is augmented to a higher pressure by the ejector in response to a low power condition of the gas turbine engine and the first bleed air supply is not augmented by the ejector in response to a high power condition of the gas turbine engine.

**[0020]** In yet another exemplary embodiment, a method of cooling a portion of a gas turbine engine includes augmenting a first bleed air supply to prepare a buffer supply air for communication to the portion in response to identifying a low power condition of a gas turbine engine.

**[0021]** In a further embodiment of the foregoing method embodiment, the first bleed air supply can be communicated without augmentation in response to identifying a high power condition of the gas turbine engine.

**[0022]** In a further embodiment of either of the foregoing method embodiments, a power condition can be identified prior to the step of augmenting.

**[0023]** In a further embodiment of any of the foregoing method embodiments, the low power condition can include one of a ground condition, an idle condition and a descent idle condition.

**[0024]** The various features and advantages of this disclosure will become apparent to those skilled in the art from the following detailed description. The drawings that accompany the detailed description can be briefly described as follows.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0025]** FIG. **1** schematically illustrates a cross-sectional view of a gas turbine engine.

**[0026]** FIG. **2** illustrates a schematic cross-section of a portion of the gas turbine engine.

**[0027]** FIG. **3** illustrates an example buffer system that can be incorporated into a gas turbine engine.

**[0028]** FIG. **4** illustrates another example buffer system that can be incorporated into a gas turbine engine.

**[0029]** FIG. **5** illustrates yet another example buffer system that can be incorporated into a gas turbine engine.

## DETAILED DESCRIPTION

**[0030]** FIG. **1** schematically illustrates a gas turbine engine **20**. The gas turbine engine **20** disclosed herein is a two spool turbofan engine that generally incorporates a fan section **22**, a compressor section **24**, a combustor section **26** and a turbine section **28**. Alternative engines might include an augmenter section (not shown) among other systems or features. The fan section **22** drives air along a bypass flow path B while the compressor section **24** drives air along a core flow path C for compression and communication into the combustor section **26**. The hot combustion gases generated in the combustor section **26** are expanded through the turbine section **28**. Although depicted as a turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to turbofan engines and these teachings could extend to other types of turbine engines, including but not limited to three spool engine architectures.

**[0031]** The gas turbine engine **20** generally includes a low speed spool **30** and a high speed spool **32** mounted for rotation about an engine centerline longitudinal axis A relative to an engine static structure **36** via several bearing structures **38**. It should be understood that various bearing structures **38** at various locations may alternatively or additionally be provided.

**[0032]** The low speed spool **30** generally includes an inner shaft **40** that interconnects a fan **42**, a low pressure compressor **44** and a low pressure turbine **46**. The inner shaft **40** can be connected to the fan **42** through a geared architecture **48** to drive the fan **42** at a lower speed than the low speed spool **30**. The high speed spool **32** includes an outer shaft **50** that interconnects a high pressure compressor **52** and a high pressure turbine **54**. In this example, the inner shaft **40** and the outer shaft **50** are supported at a plurality of points by bearing structures **38** positioned within the engine static structure **36**. In one non-limiting embodiment, bearing structures **38** include at least a #1 bearing structure **38-1** forward of the geared architecture **48** and a #2 bearing structure **38-2** located aft of the geared architecture **48**.

**[0033]** A combustor **56** is arranged between the high pressure compressor **52** and the high pressure turbine **54**. A mid-turbine frame **57** of the engine static structure **36** is arranged generally between the high pressure turbine **54** and the low pressure turbine **46**. The mid-turbine frame **57** can support one or more bearing structures **38** in the turbine section **28**. The inner shaft **40** and the outer shaft **50** are concentric and rotate via the bearing structures **38** about the engine centerline longitudinal axis A which is collinear with their longitudinal axes. The inner shaft **40** and the outer shaft **50** can be either co-rotating or counter-rotating with respect to one another.

**[0034]** The core airflow C is compressed by the low pressure compressor **44** and the high pressure compressor **52**, is mixed with fuel and burned in the combustor **56**, and is then expanded over the high pressure turbine **54** and the low pressure turbine **46**. The mid-turbine frame **57** includes airfoils **59** which are in the core airflow path. The high pressure turbine **54** and the low pressure turbine **46** rotationally drive the respective high speed spool **32** and the low speed spool **30** in response to the expansion.

**[0035]** In some non-limiting examples, the gas turbine engine **20** is a high-bypass geared aircraft engine. In a further example, the gas turbine engine **20** bypass ratio is greater than about six (6:1). The geared architecture **48** of the example gas turbine engine **20** includes an epicyclic gear train, such as a planetary gear system or other gear system. The example epicyclic gear train has a gear reduction ratio of greater than about 2.3. The geared architecture **48** enables operation of the low speed spool **30** at higher speeds which can increase the operational efficiency of the low pressure compressor **44** and low pressure turbine **46** and render increased pressure in a fewer number of stages.

**[0036]** The low pressure turbine **46** pressure ratio is pressure measured prior to inlet of low pressure turbine **46** as related to the pressure at the outlet of the low pressure turbine **46** prior to an exhaust nozzle of the gas turbine engine **20**. In one non-limiting embodiment, the bypass ratio of the gas turbine engine **20** is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor **44**, and the low pressure turbine **46** has a pressure ratio that is greater than about 5 (5:1). The geared architecture **48** of this embodiment is an epicyclic gear train with a gear reduction ratio of greater than about 2.5:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present disclosure is applicable to other gas turbine engines including direct drive turbofans.

**[0037]** In this embodiment of the example gas turbine engine **20**, a significant amount of thrust is provided by a bypass flow B due to the high bypass ratio. The fan section **22** of the gas turbine engine **20** is designed for a particular flight condition-typically cruise at about 0.8 Mach and about 35,000 feet. This flight condition, with the gas turbine engine **20** at its best fuel consumption, is also known as bucket cruise Thrust Specific Fuel Consumption (TSFC). TSFC is an industry standard parameter of fuel consumption per unit of thrust.

**[0038]** Fan Pressure Ratio is the pressure ratio across a blade of the fan section **22** without the use of a Fan Exit Guide Vane system. The low Fan Pressure Ratio according to one non-limiting embodiment of the example gas turbine engine **20** is less than 1.45.

**[0039]** Low Corrected Fan Tip Speed is the actual fan tip speed divided by an industry standard temperature correction of "T"/518.$7^{0.5}$. T represents the ambient temperature in degrees Rankine. The Low Corrected Fan Tip Speed according to one non-limiting embodiment of the example gas turbine engine **20** is less than about 1150 fps (351 m/s).

**[0040]** FIG. **2** illustrates a portion **100** of a gas turbine engine, such as the gas turbine engine **20**. The portion **100** can include one or more bearing structures **38**. Only one bearing structure **38** is depicted in FIG. **2** to schematically illustrate its features, but this is in no way intended to limit this disclosure.

**[0041]** The bearing structure **38** supports a shaft **61**, such as the inner shaft **40** or the outer shaft **50**, which supports a rotor assembly **63**, such as a rotor assembly of the compressor

section **24** or the turbine section **28**, through a hub **65**. The rotor assembly **63** carries at least one airfoil **67** for adding or extracting energy from the core airflow.

**[0042]** The bearing structure **38** defines a bearing compartment BC that houses one or more bearings **71**. The bearing compartment BC contains a lubricant for lubricating (and acting as a cooling medium to) the bearings **71**. One or more seals **73** (two shown) contain the lubricant within the bearing compartment BC. The seals **73** of the bearing compartment BC must be pressurized to prevent the lubricant from leaking out during certain ground and flight conditions (both steady state and transient). A buffer system can be used to communicate buffer supply air to the bearing compartment BC in order to provide adequate pressurization of the seals **73** without exceeding material and/or lubricant temperature limitations. Example buffer systems that can be used for this and other purposes are detailed below.

**[0043]** FIG. **3** illustrates an example buffer system **60** that can communicate buffer supply air **62** to a portion of the gas turbine engine **20**, such as to one or more bearing compartments BC. In this example, bearing compartments BC-**1**, BC-**2**, BC-**3**, BC-**4**(*a*), BC-**4**(*b*) and BC-**5** can be fed with buffer supply air **62**. The buffer supply air **62** pressurizes the bearing compartments BC and can maintain the bearing compartments BC at an acceptable temperature. Although the example embodiment illustrates communication of the buffer supply air **62** to multiple bearing compartments BC-**1** through BC-**5** to provide adequate bearing compartment seal pressurization to prevent lubricant leakage, buffer supply air **62** could be communicated to only a single bearing compartment or could be communicated for anti-icing, ventilation, cooling and other purposes.

**[0044]** The buffer system **60** includes a first bleed air supply **64** and a second bleed air supply **66**. In other words, the buffer system **60** is a dual supply system. In the exemplary embodiment, the first bleed air supply **64** is a low pressure bleed air supply and the second bleed air supply **66** is a high pressure bleed air supply that includes a pressure that is greater than the pressure of the first bleed air supply **64**.

**[0045]** The first bleed air supply **64** can be sourced from the fan section **22**, the low pressure compressor **44** or the high pressure compressor **52**. In the illustrated non-limiting example, the first bleed air supply **64** is sourced from an upstream stage of the high pressure compressor **52**. However, the first bleed air supply **64** could be sourced from any location that is upstream from the second bleed air supply **66**. The second bleed air supply **66** can be sourced from the high pressure compressor **52**, such as from a middle or downstream stage of the high pressure compressor **52**. The second bleed air supply **66** could also be sourced from the low pressure compressor **44** or the fan section **22** depending on from where the first bleed air supply **64** is sourced.

**[0046]** The buffer system **60** can also include a valve **68** that is in communication with both the first bleed air supply **64** and the second bleed air supply **66**. Although shown schematically, the first bleed air supply **64** and the second bleed air supply **66** can be in fluid communication with the valve **68** via buffer tubing, conduits, or other passageways. Check valves may also be used to prevent the second bleed air supply **66** from backflowing into the first bleed air supply **64**.

**[0047]** The valve **68** can select between the first bleed air supply **64** and the second bleed air supply **66** to communicate the buffer supply air **62** to a desired portion(s) of the gas turbine engine **20**. In other words, the buffer supply air **62** that is communicated is either the first bleed air supply **64** or the second bleed air supply **66** depending on which air supply is ultimately selected by the valve **68**, as is further discussed below.

**[0048]** The determination of whether to communicate the first bleed air supply **64** or the second bleed air supply **66** as the buffer supply air **62** is based on a power condition of the gas turbine engine **20**. The term "power condition" as used in this disclosure generally refers to an operability condition of the gas turbine engine **20**. Gas turbine engine power conditions can include low power conditions and high power conditions. Example low power conditions include, but are not limited to, ground operation, ground idle, and descent idle. Example high power conditions include, but are not limited to, takeoff, climb, and cruise conditions. It should be understood that other power conditions are also contemplated as within the scope of this disclosure.

**[0049]** In one exemplary embodiment, the valve **68** communicates the first bleed air supply **64** (which is a relatively lower pressure bleed air supply) as the buffer supply air **62** in response to identifying a high power condition of a gas turbine engine **20**. The second bleed air supply **66** (which is a relatively higher pressure bleed air supply) is selected by the valve **68** and communicated as the buffer supply air **62** in response to detecting a low power condition of the gas turbine engine **20**. Both the first bleed air supply **64** and the second bleed air supply **66** are intended to maintain the same minimum pressure delta across the bearing compartment seals. Low power conditions require a higher stage pressure source to contain the lubricant within the bearing compartment, while high power conditions require a lower stage pressure source. The buffer system **60** can use the lowest possible compressor stage to meet pressure requirements in order to minimize supply temperature and any performance impact to the gas turbine engine **20**.

**[0050]** The valve **68** can be a passive valve. A passive valve operates like a pressure regulator that can switch between two or more sources without being commanded to do so by a controller, such as an engine control (EEC). The valve **68** of this example uses only a single input which is directly measured to switch between the first bleed air supply **64** and the second bleed air supply **66**.

**[0051]** The valve **68** could also be a controller based valve. For example, the buffer system **60** can include a controller **70** in communication with the valve **68** for selecting between the first bleed air supply **64** and the second bleed air supply **66**. The controller **70** is programmed with the necessary logic for selecting between the first bleed air supply **64** and the second bleed air supply **66** in response to detecting a pre-defined power condition of the gas turbine engine **20**. The controller **70** could also be programmed with multiple inputs.

**[0052]** In one example, a sensor **99** detects a power condition of the gas turbine engine **20** and communicates a signal to the controller **70** to command modulation of the valve **68** between the first bleed air supply **64** and the second bleed air supply **66**. The valve **68** could also be modulated to an intermediate level to inter-mix the first bleed air supply **64** and the second bleed air supply **66**. Of course, this view is highly schematic. It should be understood that the sensor **99** and the controller **70** can be programmed to detect any power condition. Also, the sensor **99** can be replaced by any control associated with the gas turbine engine **20** or an associated aircraft. Also, although shown as a separate feature, the controller functionality could be incorporated into the valve **68**.

**[0053]** FIG. **4** illustrates another example buffer system **160** that can communicate buffer supply air **162** to provide adequate bearing compartment seal pressurization at an acceptable temperature. The buffer supply air **162** can also be used for additional purposes such as anti-icing and ventilation or for other cooling requirements of the gas turbine engine **20**.

**[0054]** The buffer system **160** includes a first bleed air supply **164**, a second bleed air supply **166** and an ejector **172**. If necessary, the first bleed air supply **164** can be augmented by the ejector **172** to prepare the buffer supply air **162** for communication to a portion of the gas turbine engine **20**, such as a bearing compartment BC (schematically shown by FIG. **4**). In other words, the ejector **172** can add pressure (using a relatively small amount of the second bleed air supply **166**) to the first bleed air supply **164** to prepare the buffer supply air **162** for communication to an appropriate location of a gas turbine engine **20**. In one exemplary embodiment, the ejector **172** can mix the first bleed air supply **164** of a first pressure with the second bleed air supply **166** of a second higher pressure to render the buffer supply air **162** of an intermediate pressure to the first bleed air supply **164** and the second bleed air supply **166**.

**[0055]** The second bleed air supply **166**, which is a higher pressure air than the first bleed air supply **164**, can be communicated to the ejector **172** to power the ejector **172**. The first bleed air supply **164** can be sourced from the fan section **22**, the low pressure compressor **44** or the high pressure compressor **52**. The second bleed air supply **166** can be sourced from a middle or downstream stage of the high pressure compressor **52**, or can include diffuser air. The second bleed air supply **166** could also be sourced from the low pressure compressor **44** or the fan section **22** depending on from where the first bleed air supply **164** is sourced.

**[0056]** Augmentation of the first bleed air supply **164** prepares the buffer supply air **162** at an adequate pressure and temperature to pressurize the bearing compartment(s) BC. The determination of whether or not to augment the first bleed air supply **164** with the ejector **172** is based on a power condition of the gas turbine engine **20**. Gas turbine engine power conditions can include low power conditions and high power conditions. Example low power conditions include, but are not limited to, ground operation, ground idle and descent idle. Example high power conditions include, but are not limited to, takeoff, climb, and cruise conditions. It should be understood that other power conditions are also contemplated as within the scope of this disclosure.

**[0057]** In one example, the first bleed air supply **164** is augmented by the ejector **172** in response to detecting a low power condition of the gas turbine engine **20** in order to communicate a buffer supply air **162** having adequate pressurization. The amount of augmentation performed on the first bleed air supply **164** can vary depending upon the type of power condition that is detected and the pressure requirements of the bearing compartment(s) BC. For example, in one embodiment, the first bleed air supply **164** is not augmented by the ejector **172** in response to detection of a high power condition of the gas turbine engine **20**. In other words, the first bleed air supply **164** can be communicated as the buffer supply air **162** without any augmentation in response to some power conditions.

**[0058]** The buffer system **160** can include a controller **170** in communication with the ejector **172** for determining whether or not to augment the first bleed air supply **164**. The controller **170** is programmed with the necessary logic for making this determination in response to detecting a predefined power condition of the gas turbine engine **20**. In one example, a sensor **199** detects a power condition of the gas turbine engine **20** and communicates a signal to the controller **170** to command the ejector **172** to augment the first bleed air supply **64**. Of course, this view is highly schematic. It should be understood that the sensor **199** and the controller **170** can be programmed to detect any power condition. Also, the sensor **199** can be replaced by any control associated with the gas turbine engine **20** or an associated aircraft. Also, although shown as a separate feature, the controller **170** functionality could be incorporated into the ejector **172**.

**[0059]** FIG. **5** illustrates yet another example buffer system **260**. In this example, the buffer system **260** is a two-circuit, multi-source buffer system that includes at least a first circuit **274** and a second circuit **276**. Additional circuits could also be incorporated. Low pressure requirements of the gas turbine engine **20** can be fed with a first buffer supply air **262**A from the first circuit **274**, while high pressure requirements of the gas turbine engine **20** can be buffered with a second buffer supply air **262**B from the second circuit **276**. In other words, the first circuit **274** can buffer a first portion(s) of the gas turbine engine **20**, while the second circuit **276** can buffer a second, different portion(s). Example components subject to low pressure requirements include bearing compartments in low pressure regions of the gas turbine engine **20**, such as front or rear bearing compartments. Example components subject to high pressure requirements include bearing compartments in high pressure regions of the gas turbine engine **20**, such as mid-engine bearing compartments.

**[0060]** In this example, the first circuit **274** is similar to the buffer system **60** of FIG. **3** and includes a first bleed air supply **264**A, a second bleed air supply **266**A and a valve **268**A. The second circuit **276** includes a first bleed air supply **264**B, a second bleed air supply **266**B, a valve **268**B and a conditioning device **280**. In this non-limiting example, the conditioning device **280** cools the second buffer supply air **262**B to an acceptable temperature for addressing higher pressure requirements. The conditioning device could include an air-to-air heat exchanger, a fuel-to-air heat exchanger, or any other suitable heater exchanger. The conditioning device **280** could also be a device other than a heat exchanger.

**[0061]** The second bleed air supply **266**A of the first circuit **274** can be common to the first bleed air supply **264**B of the second circuit **276**. These sources can also be completely separate. In each of the first circuit **274** and the second circuit **276**, the second bleed air supplies **266**A, **266**B are communicated as the buffer supply airs **262**A, **262**B for low power conditions of the gas turbine engine **20** and the first bleed air supplies **264**A, **264**B are communicated as the buffer supply airs **262**A, **262**B in response to high power conditions of the gas turbine engine **20**. Example low power conditions include, but are not limited to, ground operation, ground idle and flight idle conditions. Example high power conditions include, but are not limited to, takeoff, climb, and cruise conditions. It should be understood that other power conditions are also contemplated as within the scope of this disclosure.

**[0062]** In one exemplary embodiment, the valves **268**A, **268**B select and communicate the first bleed air supplies **264**A, **264**B (which are relatively lower pressure bleed air supplies) as the buffer supply airs **262**A, **262**B in response to identifying a high power condition of a gas turbine engine **20**. The second bleed air supplies **266**A, **266**B (which are rela-

tively higher pressure bleed air supplies) are selected by the valves **268**A, **268**B and communicated as the buffer supply airs **262**A, **262**B in response to detecting a low power condition of the gas turbine engine **20**. Both the lower bleed air supplies and the higher bleed air supplies are intended to maintain the same minimum pressure delta across the bearing compartment seals. Low power conditions require a higher stage pressurize source to contain the lubricant within the bearing compartment, while high power conditions require a lower pressure stage source. The buffer system **260** can use the lowest possible compressor stage to meet the pressure requirements in order to minimize supply temperature and any performance impact to the gas turbine engine **20**.

**[0063]** The buffer system **260** can also include a controller **270** in communication with the valves **268**A, **268**B for selectively switching between the first bleed air supplies **264**A, **264**B and the second bleed air supplies **266**A, **266**B. A single controller or multiple controllers could be utilized. The controller **270** can also command operation of the conditioning device **280** of the second circuit **276** for cooling the buffer supply air **262**B. Alternatively, separate controllers can be used to control each of the first circuit **274**, the second circuit **276** and the conditioning device **280**.

**[0064]** Although the different examples have a specific component shown in the illustrations, embodiments of this disclosure are not limited to those particular combinations. It is possible to use some of the components or features from one of the examples in combination with features or components from another one of the examples.

**[0065]** Furthermore, the foregoing description shall be interpreted as illustrative and not in any limiting sense. A worker of ordinary skill in the art would understand that certain modifications could come within the scope of this disclosure. For these reasons, the following claims should be studied to determine the true scope and content of this disclosure.

**1**. A gas turbine engine, comprising:
- a buffer system that communicates a buffer supply air to a portion of the gas turbine engine, wherein said buffer system includes:
  - a first bleed air supply having a first pressure;
  - a second bleed air supply having a second pressure that is greater than said first pressure; and
  - an ejector that selectively augments said first bleed air supply to prepare said buffer supply air for communication to said portion of the gas turbine engine.

**2**. The gas turbine engine as recited in claim **1**, wherein said ejector is powered by said second bleed air supply.

**3**. The gas turbine engine as recited in claim **1**, wherein said portion includes at least one bearing compartment of the gas turbine engine.

**4**. The gas turbine engine as recited in claim **1**, comprising a controller that selectively commands said ejector to augment said first bleed supply air in response to detecting a power condition of the gas turbine engine.

**5**. The gas turbine engine as recited in claim **4**, comprising a sensor that detects said power condition.

**6**. The gas turbine engine as recited in claim **1**, wherein said first bleed air supply is sourced from a location of the gas turbine engine that is upstream from a source of said second bleed air supply.

**7**. The gas turbine engine as recited in claim **1**, wherein said first bleed air supply is augmented to a higher pressure by said ejector in response to a low power condition of the gas turbine engine and said first bleed air supply is not augmented by said ejector in response to a high power condition of the gas turbine engine.

**8**. A gas turbine engine, comprising:
- a compressor section;
- a combustor in fluid communication with said compressor section;
- a turbine section in fluid communication with said combustor;
- at least one shaft that interconnects at least a portion of said compressor section and said turbine section;
- a bearing structure that supports said at least one shaft, wherein said bearing structure includes a bearing compartment; and
- a buffer system that selectively communicates a buffer supply air to pressurize said bearing compartment, wherein said buffer system includes a first bleed air supply and an ejector that is selectively powered by a second bleed air supply of a greater pressure than said first bleed air supply.

**9**. The gas turbine engine as recited in claim **8**, wherein said ejector augments said first bleed air supply to a higher pressure to prepare said buffer supply air in response to detecting a power condition of the gas turbine engine.

**10**. The gas turbine engine as recited in claim **8**, wherein said ejector augments said first bleed air supply in response to detecting a low power condition of the gas turbine engine.

**11**. The gas turbine engine as recited in claim **8**, wherein the gas turbine engine is a high bypass geared aircraft engine having a bypass ratio of greater than about six (6).

**12**. The gas turbine engine as recited in claim **8**, wherein the gas turbine engine includes a low Fan Pressure Ratio of less than about 1.45.

**13**. The gas turbine engine as recited in claim **8**, comprising a controller that selectively commands said ejector to augment said first bleed supply air in response to detecting a power condition of the gas turbine engine.

**14**. The gas turbine engine as recited in claim **13**, comprising a sensor that detects said power condition.

**15**. The gas turbine engine as recited in claim **8**, wherein said first bleed air supply is sourced from a location of the gas turbine engine that is upstream from a source of said second bleed air supply.

**16**. The gas turbine engine as recited in claim **15**, wherein said first bleed air supply is augmented to a higher pressure by said ejector in response to a low power condition of the gas turbine engine and said first bleed air supply is not augmented by said ejector in response to a high power condition of the gas turbine engine.

**17**. A method of cooling a portion of a gas turbine engine, comprising:
- communicating a first bleed air supply and a second bleed air supply to an ejector; and
- augmenting the first bleed supply air with the second bleed air supply within the ejector to prepare a buffer supply air for communication to the portion in response to identifying a low power condition of the gas turbine engine.

**18**. The method as recited in claim **17**, comprising the step of:
- communicating the first bleed supply air without augmentation in response to identifying a high power condition of the gas turbine engine.

**19**. The method as recited in claim **17**, comprising the step of:

identifying a power condition of the gas turbine engine prior to the step of augmenting.

**20**. The method as recited in claim **17**, wherein the low power condition includes one of a ground condition, a ground idle condition and a descent idle condition.

**21**. (canceled)

**22**. The gas turbine engine as recited in claim **1**, wherein said first bleed air supply and said second bleed air supply are each sourced from a high pressure compressor of the gas turbine engine.

**23**. The gas turbine engine as recited in claim **1**, wherein said buffer supply air is communicated from said ejector to at least one bearing compartment located upstream from a source of said first bleed air supply and said second bleed air supply.

**24**. The method as recited in claim **17**, comprising the step of:

communicating a portion of the buffer supply air to a second portion of the gas turbine engine to deice the second portion.

**25**. The method as recited in claim **17**, comprising the step of:

using a portion of the buffer supply air to ventilate the gas turbine engine.

**26**. The method as recited in claim **17**, comprising the steps of:

sensing one of the low power condition and a high power condition of the gas turbine engine;

communicating a signal representative of either the low power condition or the high power condition to a controller; and

commanding performance of the augmenting step in response to sensing the low power condition.

* * * * *