

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 October 2009 (08.10.2009)

(10) International Publication Number
WO 2009/123722 A1

(51) International Patent Classification:

G06F 3/12 (2006.01)

(21) International Application Number:

PCT/US2009/002033

(22) International Filing Date:

1 April 2009 (01.04.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/060,910 2 April 2008 (02.04.2008) US

(71) Applicant (for all designated States except US): EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, NY 14650 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KHAIN, Leonid [IL/IL]; 3 Hamada Street Herzliya, 46733 Herzliya (IL).

(74) Common Representative: EASTMAN KODAK COMPANY; 343 State Street, Rochester, NY 14650 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DISTRIBUTED PROCESSING OF PRINT JOBS

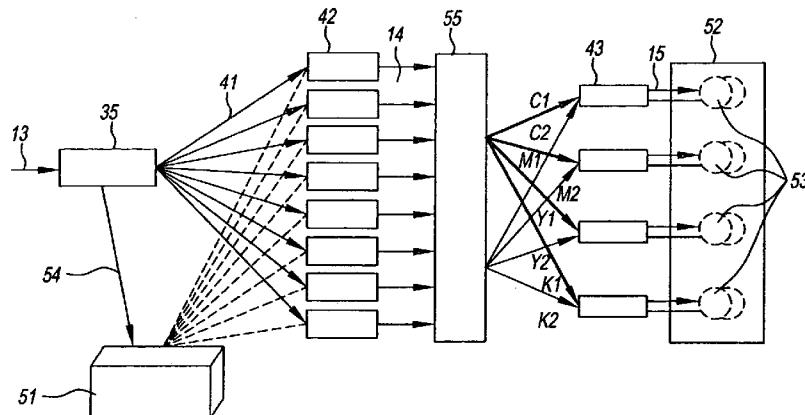


FIG. 5

(57) Abstract: A method and apparatus for distribution of a print job for digital printing by distributing elements of the print job between a plurality of processing means. The method and apparatus includes receiving a common job file (CJF) (41). Splitting the common job file into plurality of CJF chunks (74) wherein the number of the CJF chunks will be generated in accordance of availability of the processing means (42). Distributing the CJF chunks to the processing means for processing and generating a plurality of ready-to-print pages (RTP) (14) pages. Sending said generated plurality of RTP pages to a digital printer (52) by adhering to the page order of the print job.

WO 2009/123722 A1

DISTRIBUTED PROCESSING OF PRINT JOBS

FIELD OF THE INVENTION

The present invention relates to methods and apparatus for efficient distribution of page description language (PDL) objects among processors for a 5 digital front end system in order to provide digital data required for high speed digital printers conforming to printers speed needs.

BACKGROUND OF THE INVENTION

Digital frontends or color print servers geared to prepare data and drive digital printers can be described in general terms by two major parts as is 10 depicted in Figure 1:

1. A frontend element 11 processes digital files in a form of a page description language (PDL) 13, such as, for example, PostScript (PS). The frontend element 11 is equipped with PDL processing means, and the output of the processing means is data 14 in a ready-to-print (RTP) form.
- 15 2. A backend element 12 receives the RTP data and sends it to a digital printer for printing via a video interface 15 to the printer.

Most of color print servers produce the RTP data buffers in line 20 with the print engine, in other words, the data that is generated by the frontend 11 is immediately consumed by the backend 12, without a step of generating RTP objects and saving them on an intermediate storage for further printing. One line of commercial color print services uses the above method of intermediate RTP generation, and defines a special RTP format and a data flow based on the RTP 25 format. The RTP format consists of reusable as well as from non-reusable elements which are represented as separate RTP elements.

Frontend 11 receives incoming PDL jobs in, for example, a page definition file (PDF), PS or variable PostScript (VPS). Frontend 11 processes the jobs, and converts the PDL to RTP jobs. Backend 12 merges and assembles the 30 RTP elements into page-bitmaps and outputs the bitmaps to the printer using a video interface 15.

The use of intermediate saved RTP format is to better for meeting the digital printer's engine speed. For non-variable data printing (VDP) jobs, multiple copies are printed at the engine speed. This is achieved by preparing the RTP once and printing the RTP multiple times. In the case of typical VDP jobs,

5 the RTP is prepared at engine speed.

The strict division between the frontend and the backend elements when designing an interface to new printer is a very important. The frontend is a printer-independent part and typically requires limited customization, while the backend is a printer-dependent part and typically requires specific customization

10 to accommodate specific printer needs. Figure 2 is a top-level view of a typical commercial color print server illustrating the separation between the frontend 11 and the backend 12 as discussed above.

An important element in the printer color server architecture is the merger and printer interface boards 28. A merger-board merges and assembles

15 RTP elements in real-time at the engine speed. The rest of the system can be viewed as a production line and its main purpose is to produce a plurality of RTP object in order to feed the merger-boards. This view of the system is convenient, however, other alternative views are possible as well.

RTP format is a proprietary format of the Eastman Kodak

20 Company for ripped jobs. According to this format, a ripped job consists of RTP pages and each page refers to RTP elements. RTP is an element-based format and rendered reusable and non-reusable elements are represented as separate RTP elements. Each RTP element can be viewed as a compressed raster-element. RTP is prepared accordingly to accommodate the specifics of the fusion cards and

25 engine characteristics.

Processing frontend 11 consists of the following main components:

Job input 22, responsible for importing jobs to the system;

30 Raster image processor (RIP) 23;

Image processing components 24 for transformations of raster data produced by RIP 23;

RTP preparation module 25.

As described above, the frontend 11 receives incoming PDL jobs 13 and converts them to RTP format 14. PDL-to-RTP is a multi-step operation that consists of the following processing steps:

1. The job is received and imported to the system.
- 5 2. The job is scheduled for processing.
3. The pipelined job processing starts by RIP 23, image processing 24 such as trapping and anti-aliasing.
4. RTP preparation module 25 transforms the final raster-data to RTP format 14.
- 10 5. RTP format 14 is further stored to RTP storage 26.

All the above steps are performed in pipelined fashion. For example, trapping may start after a few raster scanlines are RIPed and RTP creation may start after a few raster scanlines on the page are prepared.

Printing backend 12 consists of the following components:

- 15 1. RTP storage 26 - an efficient raster-element storage that guarantees reading of raster-elements at print engine speed. RTP storage is typically implemented as a fast disk or a disk-array. This enables a large storage capacity at high-speeds as dictated by the engine speed.
- 20 2. Data feeder 27 – a component that schedules work for merger card/cards. It is responsible for loading RTP layout, initiating merge operations, and monitoring merge process.
3. Merger boards 28 - the components responsible for merging and assembling RTP elements into final page-bitmaps and sending said bitmaps to the print engine.

As described above the backend 12 is responsible for printing RTP data at the engine speed. This includes the following operations:

- 30 1. Reading RTP-data from RTP-storage.
2. Merging and assembling RTP-data into contone page-bitmaps.

3. Additional processing (screening, compression, and look-up table transformation (LUT)) might be applied to contone bitmaps according to engine specification.
4. Outputting bitmaps via the printer video interface 15 to the print engine.
5. Controlling the engine.

10 The main operations performed by the backend are the operations of merging and assembling of RTP data to the resulting bitmaps. Though the merging process can be implemented either in software or in hardware, typically the merger is implemented in hardware in order to meet printer engine speed.

15 According to the performance requirements, there could be a single merger board or multiple merger boards in the system. In a printer color server equipped with a single merger board 28, the board will handle all the process colors (e.g. Cyan (C), Magenta (M), Yellow (Y) and Black (K)). In a printer color server equipped with multiple merger boards each board can be responsible for one or more process colors. For example, in the case of two merger boards 28, one board will handle C and M color channels 53 whereas the other board will handle Y and K colors.

20 The requirements of color digital printers are getting more and more demanding. Printers capable of printing one hundred A4 color pages per minute (100ppm) are already available. Printers that will print more than 1000ppm will be introduced in the near future. The current architecture of color servers is not capable to drive the high speed printers at the required speed and there is a need to reengineer the process to meet the new requirements.

25 SUMMARY OF THE INVENTION

Briefly, according to one aspect of the present invention a method for distribution of a print job for digital printing is accomplished by distributing elements of the print job between a plurality of processors. According to the method a print job reference file and composition requirements are provided. The 30 print job reference file is processed according to the job composition requirements. The print job reference file is split into plurality of segments wherein the segments are generated in accordance with the availability of the

processing means. The segments are distributed to the processing means, which generates a plurality of ready to print elements. A ready-to-print (RTP) pages structure is generated according to the job composition requirements and the plurality of ready to print elements. Printer specific data is created according to 5 the generated ready-to-print (RTP) pages structure and sent to the digital printer.

These and other objects, features, and advantages of the present invention will become apparent to those skilled in the art upon a reading of the following detailed description when taken in conjunction with the drawings wherein there is shown and described an illustrative embodiment of the invention.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic illustrating a simplified commonly used print color servers architecture;

Figure 2 is a schematic illustrating a detailed print color servers architecture;

15 Figure 3 is a schematic illustrating evolution from current print color servers architecture to an architecture according to the present invention;

Figure 4 is a schematic illustrating a simplified print color servers architecture according to the present invention;

20 Figure 5 is a schematic illustrating data flow within the architecture according to the present invention;

Figure 6 is a schematic illustrating processing stages within the architecture according to the present invention; and

Figure 7 is a schematic illustrating data flow from input through process to print.

25 DETAILED DESCRIPTION OF THE INVENTION

Achieving high-speed personalized printing complying with printing speeds in the realm of 1,000 ppm requires substantially more processing power than is needed for a conventional system, which will typically consists of a single RIP-Node and a single merger-node. This required processing power calls 30 for much stronger frontend 11 and backend 12 than are available today.

Therefore, multiple RIP-Nodes and multiple RTP merger-nodes are needed to achieve the speed required for serving high-speed printers.

The print color server architecture available today needs to be boosted up in order to cope with the new requirements mentioned. Figure 3 describes a top-level view of current system architecture and system architecture according to the present invention, illustrating the main new components that are 5 used in order to achieve the new goal. The new distributed architecture print color server architecture includes new components as well as a plurality of backend 34 and frontend 32 components.

A job organizer 35 is capable of generating a print job reference file or a common job file (CJF) representation of the incoming PDL jobs 13. The 10 resulted CJF components are stored for intermediate storage in job storage 31. The CJF is a special format that references to an original job and allows page-parallelism. The CJF format is described in detail in the commonly-assigned copending U.S. Patent Application No. 11/858,477, filed September 20, 2007, and entitled PARALLEL PROCESSING OF PAGE DESCRIPTION LANGUAGE, 15 by Aronshtam et al.

In order to meet the desired print engine speed a multiple job organizer 35 is deployed. The multiplicity of each component is different and serves different purposes.

- a. Multiple job organizers 35 are used to create CJFs for 20 multiple jobs, thus reducing startup time for each job.
- b. Multiple frontend nodes 32 and more specifically the RIP-nodes are primarily used to prepare RTP, typically for all color separation channels, of a single job using page-parallelism. This speed up data preparation needed for 25 achieving the engine speed.
- c. Multiple backend nodes and more specifically merge-nodes are required to merge RTP and output the generated bitmap data via the printer video interface 15 at the engine speed.

As with the conventional architecture, there is a strict separation 30 between frontend 11 and backend 12. Multiple frontend nodes 32 prepares RTP and outputs it to the distributed RTP storages 33. Multiple backend nodes 34 feed data from RTP storages 33, merges the data, and outputs bitmaps to the printer.

Few diagrams in the following description explain the system and the data flow in the system. Figure 4 depicts a simplified diagram illustrating the main elements of the architecture for the present invention. The simplified diagram described in Figure 4 shows major system components: organizers, rips, and mergers. The diagram depicts for example a typical high-end system that contains two organizers, eight RIPs, and four mergers.

It is important to emphasize that the diagram shows a schematic layout of the system, however, implementation may vary in different embodiments. For example, each RIP node 42 may reside on a separate computer, or each computer may have two RIP-nodes. Additionally, each multiple merger 43 may reside on a separate computer, or each computer may host two mergers.

Figure 5 describes the flow of data within the system according to the present invention. Figure 6 depicts the stages of data processing in the system and Figure 7 describes the data flow from job input through process to print.

Referring to Figures 5-7 print jobs in a PDL form are spooled into spool disk 21 by submission of external clients 71. Input stage 22 prepares the job for further processing (ripping) and organizing it to CJF 41. This includes the following steps: job organizers 35 will read PDL job 13 from spool disk 21 and will parse PDL job 13 and will create a CJF 41 representation, in addition, filtering out of PDL elements 54 and storing them into PDL resource cache 51 will take place. The created CJF 41 will be stored on work disk 72.

An important part of PDL organizing or CJF creation is the production of a job-skeleton, a simple job structure that contains basic information about a job, including job information such as number of documents in a job, number of pages in each document, and page size of each page. The job-skeleton information is used, for making appropriate page imposition instructions created by composition engine 61, including rules information and imposition information, as well as proper page distribution to multiple RIP nodes 42.

The process step prepares the job for printing by converting it to RTP 14. This includes at least the activities described hereunder:

1. Process step reads CJF 41 which includes the job-skeleton from work disk 72.

2. CJF 41 is divided into segments or CJF chunks 74 and the CJF chunks 74 are divided to conform to the load balancing algorithm used in the system to best utilize the available processing means. A CJF chunk includes mostly reference file information such as job metadata and references to job data is light-weight in nature, and therefore is suitable to be effectively distributed among the processing means.
- 5 3. CJF chunks 74 are distributed to multiple RIP nodes 42 for processing.
- 10 4. Each RIP 23 is responsible for preparing raster data. This includes the following steps:
 - a. RIP 23 receives CJF chunk. RIP acquires job data and processes it element-by-element producing raster.
 - b. When a new reusable element is encountered that was not already rasterized, it will be rasterized and stored in the local PDL resource cache 51, thus assuring that each PDL element 54 is accessed remotely only once.
 - c. The final raster is submitted to RTP prepare 25 and the page layout is kept in the job layout database 73.
- 15 5. RTP prepare 25 converts raster to RTP 14.
6. RTP is distributed and stored to RTP storage 26. Each process/print-station keeps only some color separations, while others are distributed to RTP storage residing to other process/print stations.
- 20 25 In page level parallelism scenario (disclosed hereunder) CJF 41 created for a single job is split among multiple RIP nodes 42. In the case of job level parallelism (used today) multiple RIP nodes 42 are deployed as well, however, in this case each of the multiple RIP nodes processes a different job represented by a different PDL 13.
- 30 The rasterization process is based on CJF 41 and on rules information 78 that is received from composition engine 61 as well as on previously stored reusable PDL elements 54. The rules information 78 is a set of

parameters that affect job rasterization. Some rules affect the entire job, while some rules affect just individual pages. The example of rules include resolution, page orientation, page scaling, color. The rules information 78 together with the imposition information 79 provided by the imposition engine 61 comprises the job 5 composition requirement.

Each RIP 23 receives CJF 41, chunk-by-chunk, and each CJF chunk may include rules. RIP loads PDL data (according to CJF), interprets and rasterizes PDL data according to rules. When the RIP 23 encounters a reusable element placement, it performs the following steps:

- 10 1. RIP checks if the received PDL element 54 was previously rasterized by either of the RIPs. It includes checking of the raster-parameters such as color transformation matrix (CTM) or PDL element BoundingBox.
- 15 2. In the case that the element was previously rasterized on any of RIP nodes 42, the RIP skips rasterization.
3. If the element was not previously rasterized and none of the RIPs started it rasterization, the RIP rasterizes the element and passes the results to RTP prepare 25.
- 20 4. If the element was not previously rasterized, but another RIP started it rasterization, the RIP waits for the completion of the element rasterization by the other RIP. Optionally the RIP will not wait, but will raster the element without sharing it with other RIPs, this might be needed at time for optimization purposes.
- 25 5. The remaining PDL data is rasterized as a non-reusable element and raster is passed over to RTP prepare 25.

RTP prepare 25 converts raster to RTP. RTP is stored in the RTP storage 26.

As is described in Figure 7, the system comprises a plurality of 30 process/print controllers 75. Each process/print controller 75 comprises RIP 23, RTP prepare 25, and RTP storage 26. RTP 14 can be prepared by RTP prepare 25 of process/print controller 76 and sent to process/print controller 77 for printing.

Alternatively RTP 14 is generated by process/print controller 77 and will be used for printing by process/print controller 76. The data feeder and print manager 55 is responsible for merging RTP elements 14 into bitmaps and sending bitmaps via video interface 15 to digital printer 52.

PARTS LIST

- 11 frontend
- 12 backend
- 13 page description language (PDL) job
- 14 ready-to-print (RTP)
- 15 video interface
- 21 spool disk
- 22 input
- 23 raster image processing (RIP)
- 24 image processing components
- 25 RTP prepare
- 26 RTP storage
- 27 data feeder
- 28 merger and printer interface boards
- 31 job storage
- 32 multiple frontend nodes
- 33 RTP storages
- 34 multiple backend node
- 35 job organizers
- 41 common job file (CJF) format
- 42 multiple RIP nodes
- 43 multiple mergers
- 51 PDL resource cache
- 52 digital printer
- 53 color channels
- 54 PDL elements
- 55 data feeder and print manager
- 61 composition engine
- 71 spool submission by external clients
- 72 work disk
- 73 job layout service and database
- 74 CJF chunks

- 75 process/print controller
- 76 process/print controller #1
- 77 process/print controller #2
- 78 rules information
- 79 imposition information

CLAIMS:

1. A method for distribution of a print job for digital printing by distributing elements of said print job between a plurality of processing means comprising the steps of:
 - 5 a) providing a print job reference file;
 - b) providing job composition requirements;
 - c) preparing said print job reference file according to said job composition requirements for job splitting;
 - d) splitting said print job reference file into a plurality of segments wherein said segments are generated according to availability of said processing means;
 - 10 e) distributing said segments to said processing means;
 - f) processing and generating a plurality of ready to print elements;
 - 15 g) generating a ready-to-print (RTP) pages structure according to said job composition requirements and said plurality of ready to print elements; and
 - h) creating printer specific data according to said generated ready-to-print (RTP) pages structure.
- 20 2. The method of claim 1 comprising:
 - sending said printer specific data to at least one digital printer.
- 25 3. The method of claim 1 wherein said print job reference file comprises references to individual pages in the said print job.
- 30 4. The method of claim 1 wherein said print job reference file comprises references to shared resources to be processed in accordance with at least one of said individual pages.

5. The method of claim 4 wherein said shared resource is provided to a first processor for processing and wherein said shared resource were already processed by a second processor, then processing results of said shared resource is used by first processor without processing the said shared resource
5 again.

6. The method of claim 4 wherein said shared resource is provided to a first processor for processing and said shared resource is processed by a second processor, then the first processor waits for said second processor to
10 complete the processing of said shared resource.

7. The method of claim 1 wherein said print job reference file comprises job skeleton information.

15 8. The method of claim 7 wherein said job skeleton information comprises of at least one of the following parameters selected from a group comprising number of pages per booklet, number of pages per job, page size, page orientation, media type, or a combination thereof.

20 9. The method of claim 1 wherein said job composition requirements comprises of at least one of the following parameters: digital printer type, print paper size, media type, finisher options, imposition schemes, job to media best fit option; or a combination thereof.

25 10. The method of claim 9 wherein said digital printer type is roll fed.

11. The method of claim 9 wherein said digital printer type is sheet fed.

12. The method of claim 1 wherein said print job reference file segments represent pages to be executed by dedicated processing means and printed on the front side of the media.

5 13. The method of claim 1 wherein said print job reference file segments represent pages to be executed by dedicated processing means and printed on the back side of the media.

10 14. The method of claim 1 wherein said print job reference file is analyzed for processing complexity and the split into segments is performed in accordance with availability and performance of said processing means.

15. The method of claim 14 wherein the analysis for said processing complexity and the split into segments is performed at least once 15 during processing of said print job.

16. The method of claim 1 wherein said ready to print pages structure comprising at least from plurality of ready to print elements and page geometry information.

20 17. The method of claim 1 wherein said ready to print pages structure comprises page order information.

18. The method of claim 1 wherein said ready to print pages 25 structure comprises destination printer data format.

19. The method of claim 1 wherein said printer specific data is bitmap data.

1/5

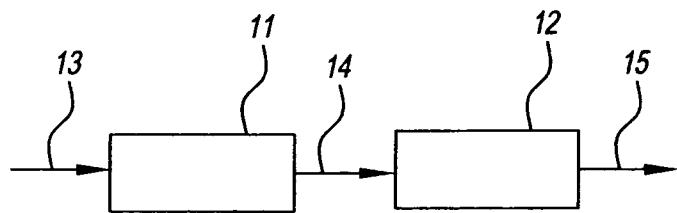


FIG. 1
(Prior Art)


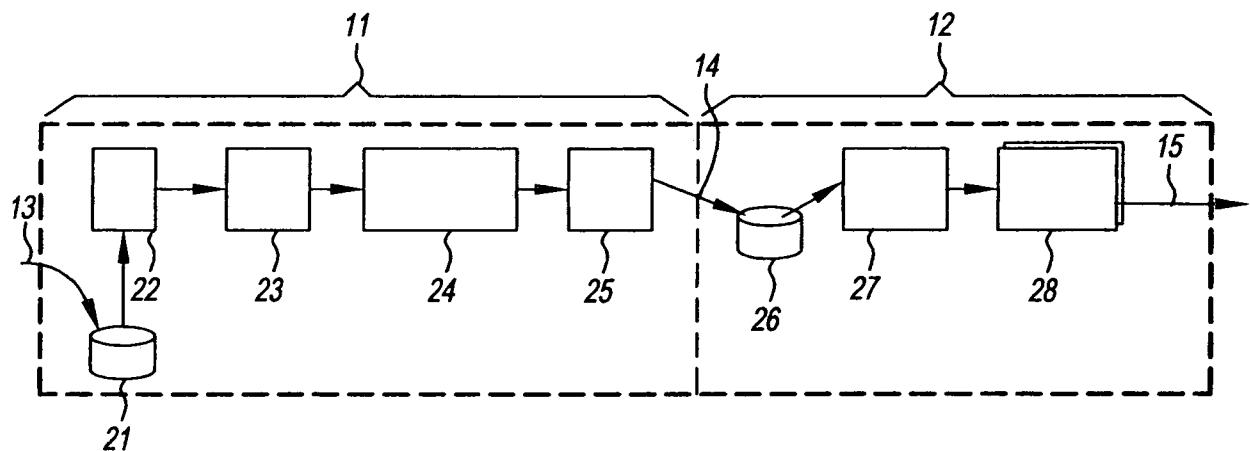


FIG. 2
(Prior Art)

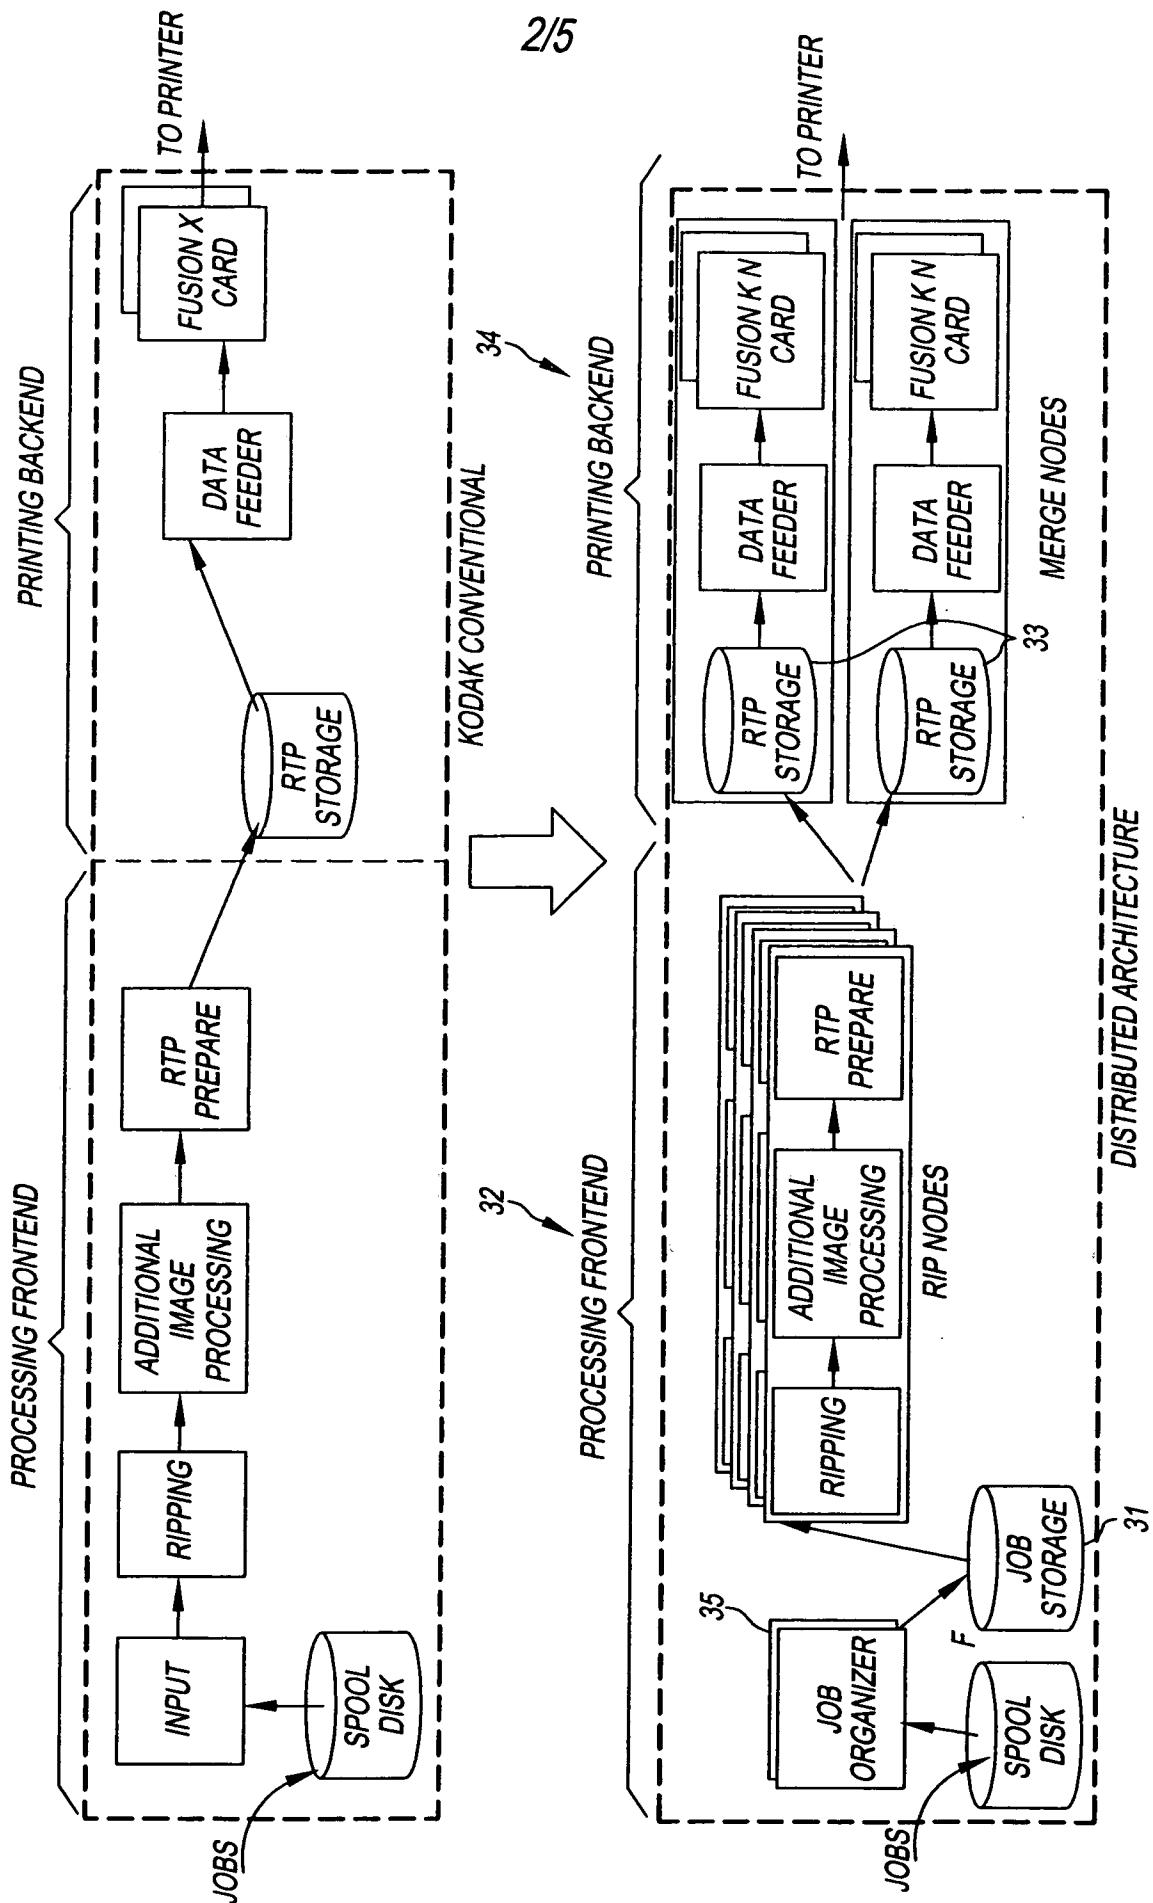

3
FIG.

3/5

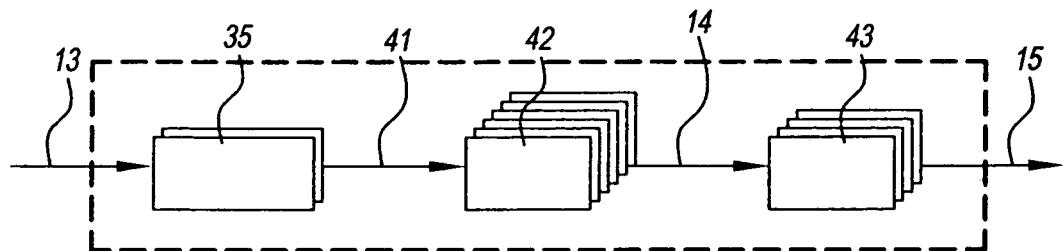


FIG. 4

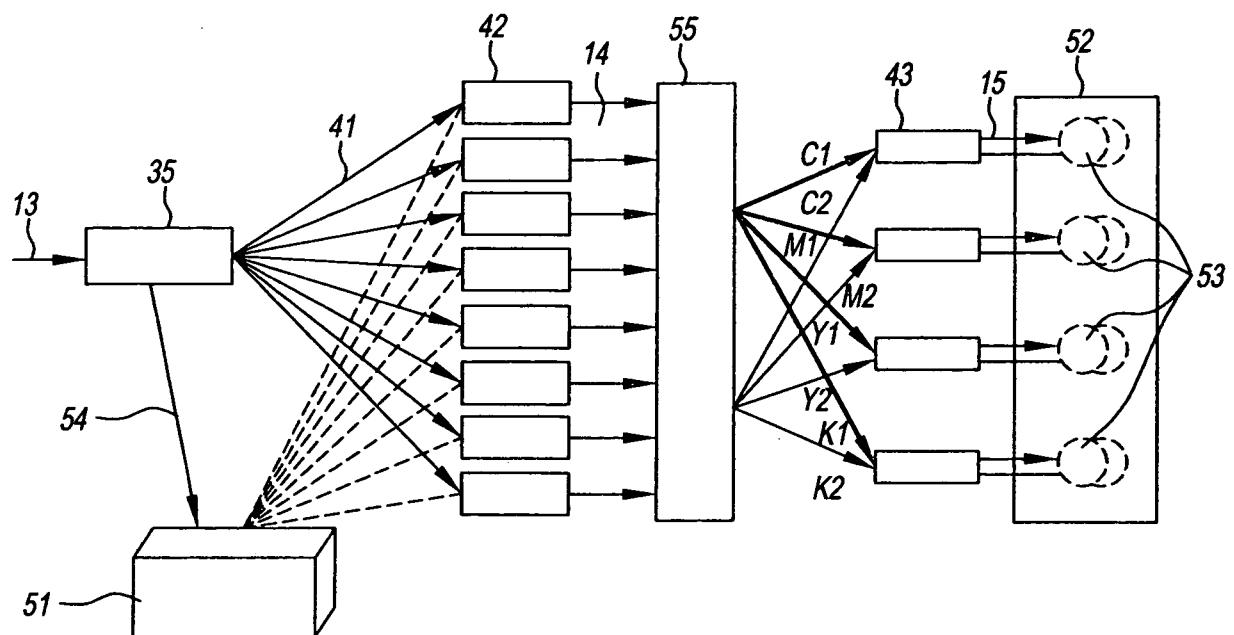
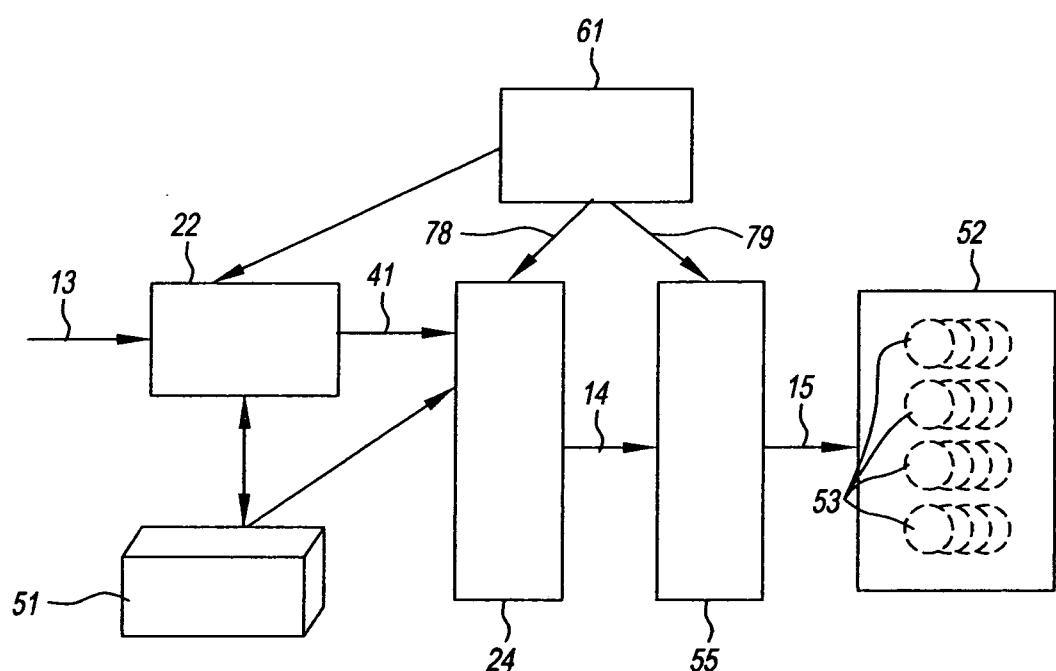


FIG. 5

4/5

**FIG. 6**

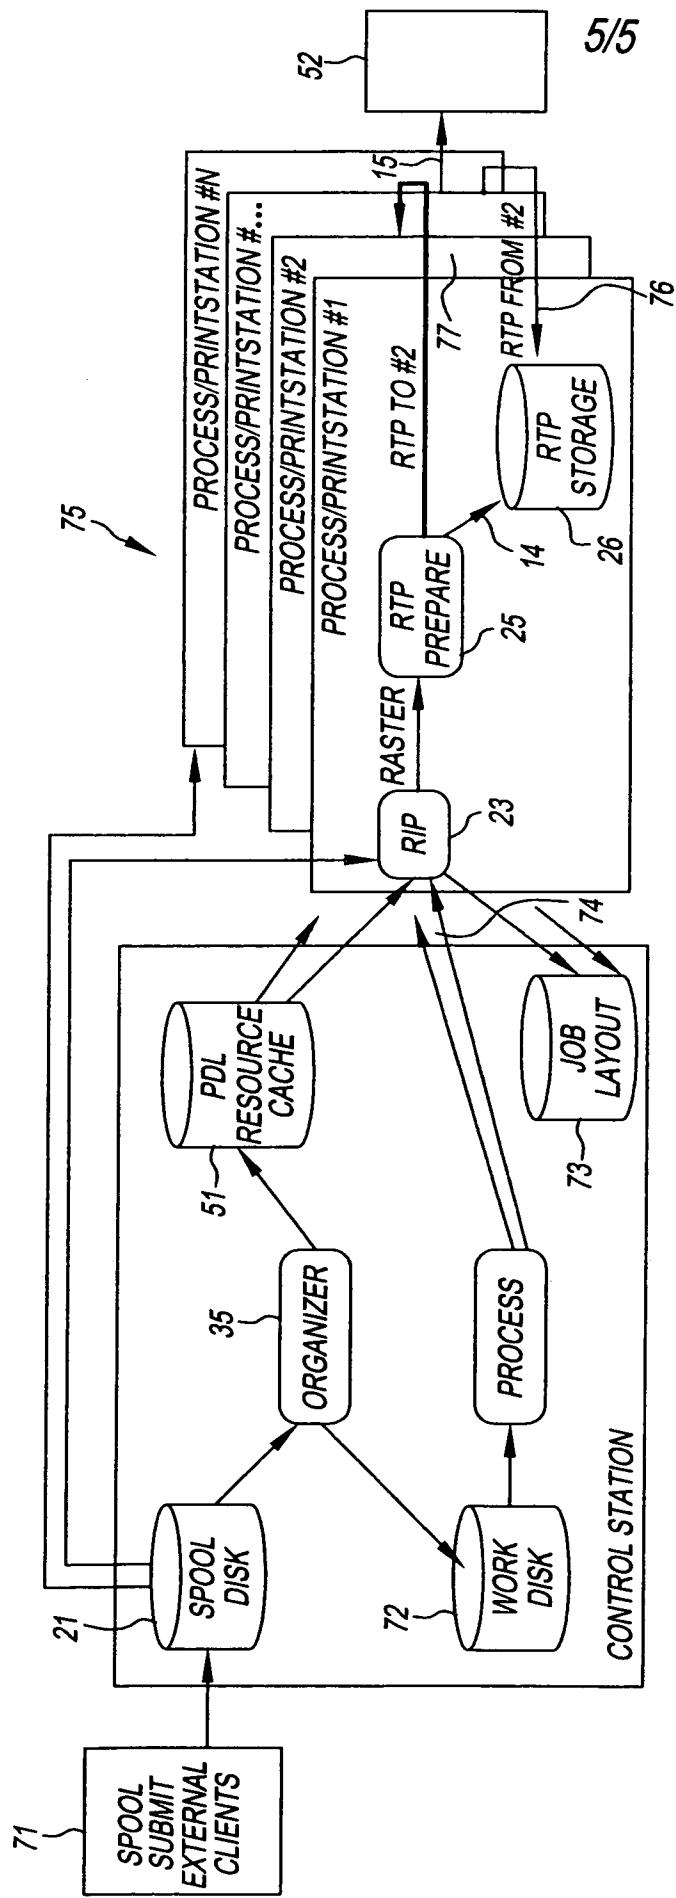


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/002033

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F3/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/193683 A1 (MOTAMED MARGARET [US] ET AL) 16 October 2003 (2003-10-16) paragraph [0002] paragraph [0008] paragraph [0033] figure 3 paragraph [0037] paragraph [0048] paragraph [0092]	1-19 -/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 June 2009	07/07/2009
Name and mailing address of the ISA/ European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Limacher, Rolf

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/002033

C(Continuation), DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 333 246 A (NAGASAKA FUMIO [JP]) 26 July 1994 (1994-07-26) column 2, line 1 - line 51 column 4, line 6 - line 27; figure 2 column 5, line 35 - line 39 column 6, line 33 - column 8, line 16 column 9, line 50 - line 55 column 11, line 65 - column 12, line 6 column 13, line 5 - line 39 column 24, line 52 - line 56 column 29, line 5 - line 24 column 29, line 36 - line 39 column 30, line 47 - line 51 column 32, line 37 - line 44	1-13,18, 19
A	US 2007/236741 A1 (TAI HWAI-TZUU [US] ET AL) 11 October 2007 (2007-10-11) paragraph [0006] paragraph [0010]	1-19
A	US 6 295 134 B1 (HUGHES MACDUFF R [US]) 25 September 2001 (2001-09-25) column 2, line 10 - line 26 column 3, line 9 - line 22	12,13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No	
PCT/US2009/002033	

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2003193683	A1 16-10-2003	NONE		
US 5333246	A 26-07-1994	WO JP	9115831 A1 3168580 B2	17-10-1991 21-05-2001
US 2007236741	A1 11-10-2007	CN EP KR WO	101416481 A 2002645 A1 20080106458 A 2007123617 A1	22-04-2009 17-12-2008 05-12-2008 01-11-2007
US 6295134	B1 25-09-2001	NONE		