

(19)



**Octrooi Centrum
Nederland**

(11)

2018956

(12) B1 OCTROOI

(21)

Aanvraagnummer: **2018956**

(51)

Int. Cl.:
B67D 1/04 (2017.01) B67D 1/08 (2017.01)

(22)

Aanvraag ingediend: **19 mei 2017**

(41)

Aanvraag ingeschreven:
28 november 2018

(73)

Octrooihouder(s):
Heineken Supply Chain B.V. te Amsterdam.

(43)

Aanvraag gepubliceerd:
-

(72)

Uitvinder(s):
**Arie Maarten Paauwe te Amsterdam.
Pieter Gerard Witte te Amsterdam.**

(47)

Octrooi verleend:
28 november 2018

(45)

Octrooischrift uitgegeven:
4 april 2019

(74)

Gemachtigde:
ir. C.M. Jansen c.s. te Den Haag.

(54)

Beverage dispensing assembly and beverage container

(57)

Beverage dispensing assembly, comprising a dispenser and a beverage container, wherein the beverage container has a neck portion and a shoulder portion adjacent the neck portion, wherein the neck portion is provided with at least an outflow opening and at least one gas inlet opening and wherein the dispenser comprises a housing, wherein the housing is provided with a receptacle for receiving at least part of the container, wherein the container is positioned in the dispenser with the neck and shoulder portion facing downward, such that the neck portion and at least part of the shoulder portion are received in the receptacle, wherein part of the shoulder portion extends close to and/or is in contact with a wall of the receptacle, wherein preferably a lid is provided over the container, enclosing a part of the container extending outside the receptacle.

P115054NL00

Title: Beverage dispensing assembly and beverage container

The invention relates to a beverage dispensing assembly. The
5 invention in particular relates to a beverage dispensing assembly for
dispensing a carbonated beverage from a plastic container. The invention
further relates to a container for use in a beverage dispensing assembly of
the invention.

EP1003686 discloses a beverage dispensing assembly, comprising a
10 dispenser and a beverage container having a neck portion and a shoulder
portion adjacent the neck portion, wherein the neck portion is provided with
an outflow opening for beverage. The container is a compressible container,
which is inserted into an inner space of the dispenser, closed by a lid portion
attached to the container. During use a pressure is built up inside said inner
15 space, compressing the container and thus pressurizing the beverage for
dispensing. EP2448858 discloses a similar dispensing assembly, having the
outflow opening facing upward, wherein a closure for the pressure space
connects sealingly to the neck portion of the container, at the same time
suspending the container within said space.

20 WO2004099060 discloses a beverage dispensing assembly, similar
to that of NL1006949, in which the container is inverted during use, an
outflow opening facing downward. Again the container is provided with a
closure ring cooperating with closure means of the dispenser for closing a
pressure space in which the container is compressed for pressurizing and
25 dispensing the beverage.

Such assemblies are complex in design and use, since it
necessitates a container and dispenser suitable for cooperation for closing
the pressure space.

EP2448734 discloses a BIC type container having a closure
30 provided with a beverage valve. A gas inlet opening is provided in the
closure for connecting a gas supply to the container, especially to a space

between an inner and outer container of the BIC type container. The container is positioned having an outflow opening with the closure facing upward.

It has further been known, as is for example known from
5 Heineken's BeerTender® and disclosed in WO00/03944, to dispense beverages from a bag-in-container type of container, in which a beverage is contained inside a flexible inner container, which is suspended in a more rigid outer container. In such system a pressurizing gas can be inserted into the container, between the inner and outer container, thereby compressing
10 the bag or inner container, squeezing out the beverage without the pressurizing gas coming into direct contact with the beverage.

In EP2148771 an integrally blow moulded bag-in-container is disclosed, for holding and dispensing beverages, wherein at least one vent is provided running parallel to an interface between inner and outer
15 containers, which vent opens to the atmosphere at a location adjacent to and orientated approximately coaxially with the bag-in-container's mouth. EP2148771 fails to disclose how this container is used in a dispensing assembly, especially how this is to be connected to a tapping line or tapping device.

20 WO2011/002294 discloses an integrally blow moulded bag-in-container type container, wherein at a neck region of the inner container an opening is provided, opening into a space between the inner and outer container. A closure can be provided, with a valve and a gas feed channel, connecting to said opening for feeding gas under pressure into said space.
25 The full gas pressure is therein exerted on the neck region of the outer container, in the neck region. In an alternative embodiment the opening could be in the neck of the outer preform or container.

WO2006/087148 discloses a dispensing system in which a container is placed on its bottom on a dispenser bottom part, where after a
30 lid is placed over said container, enclosing it in a cooling chamber formed by

said lid. The container is a single wall container known as a party keg or partyfass, and is provided with a tapping cock close to the bottom for gravity dispensing of beverage from the container. The lid is a thick walled, closed, isolating mantel which separates the container from the environment.

5 The present invention aims at providing a beverage dispensing assembly which is an alternative to the known assemblies. The present invention aims at providing a beverage dispensing assembly which is relatively easy in use. The present invention aims at providing a beverage dispensing assembly which is relatively easy to manufacture and maintain.

10 The invention aims at providing a container suitable for a dispensing assembly as claimed. The present invention especially aims at providing a dispensing assembly in which a container can be used, which assembly in use provides for an appearance pleasing to users, such as for example beverage purchasing public and personnel, is easy to use and/or energy

15 friendly, especially in cooling and dispensing.

 In an aspect a beverage dispensing assembly can be characterized by a dispenser and a beverage container. The beverage container has a neck portion and a shoulder portion adjacent the neck portion, wherein the container, preferably the neck portion, is provided with at least an outflow

20 opening and at least one gas inlet opening. The dispenser comprises a housing, wherein the housing is provided with a receptacle for receiving at least part of the container. The container is positioned in the dispenser, such that at least a portion of the container is received in the receptacle, which portion preferably has a part which extends close to and/or is in

25 contact with a wall of the receptacle. According to the invention during use a lid is provided over the container, enclosing a part of the container extending outside the receptacle, wherein the lid is transparent at least to such extend that at least a significant part of the container extending outside the receptacle is visible through said lid.

In embodiments the lid can be partly transparent, such that only a part of the container extending outside the receptacle can be seen through the lid. In embodiments the lid can be substantially entirely transparent, such that the entire container portion extending outside the receptacle can be seen through the lid. The lid can rest on the housing, sealing a space between the lid and an outer surface of the container, wherein the lid isolates the container from a surrounding space. The lid can be a double walled lid and the lid can be made of plastic and/or glass. In embodiments lighting can be provided for illuminating at least part of the lid, wherein the lighting is preferably provided in the housing, emitting light into the lid from a lower end thereof resting on said housing.

In embodiments the lid can be substantially dome shaped, having a hemi spherical and/or a circular or semi circular wall part, preferably extending over part of the container having a similar shape. The lid and container may be formed such that between an inner surface of the lid and an outer surface of the container portion extending outside the receptacle an air gap is provided which has a substantially even width over said inner and outer surface, measured as the shortest distance between said surfaces. In other words, such air gap may have substantially the same width over the entirety of said inner surface of the lid.

The container may be provided with a dispensing unit, including at least a dispensing line, and the housing may comprise a tap for connecting to and/or cooperating with the dispensing line. The dispensing line is preferably a disposable line. Disposable should be understood at least as meaning that it is designed for use with a limited number of containers to be emptied, especially only one. In embodiments the dispensing unit can be connected to the container and/or an adapter connected to the container, such that it cannot be removed from the container without damage to such extend that it cannot be reused with another container.

The housing can comprise a cooling device for cooling at least a part of the wall of the receptacle. Preferably the cooling device is for contact cooling of a part of at least the shoulder portion of the container. The receptacle can be substantially bowl shaped, preferably semi-spherical. In
5 embodiments the container can be supported by at least a part of the wall of the receptacle. In embodiments the receptacle can be provided with an indentation at a lower end thereof for receiving the neck portion of the container. If an adapter is provided at the container neck portion, the indentation may receive said adapter too.

10 The container can be provided with a closure ring closing off the outflow opening. A beverage valve can be provided in and/or on the closure ring. Preferably the closure ring and/or the neck portion of the container is or are provided with the at least one gas inlet opening, for introducing a fluidum, preferably gas, under pressure into the container, preferably
15 between an inner and an outer container of the container.

 In embodiments an adapter is provided at the neck portion of the container. The adapter can be an adapter fitting over at least part of the neck portion of the container, wherein the adapter comprises at least part of a dispensing unit. The dispensing unit can in embodiments include at least
20 a dispensing line, wherein the dispensing line at a first end is provided with a connector or dispense adapter for connecting to the outflow opening or a beverage dispensing valve provided in said outflow opening, and at an opposite end is provided with a beverage dispense opening. The beverage dispense opening is preferably provided by a dispense valve integral to or
25 connected to the dispense line, more preferably disposable with the dispense line. The adapter can be arranged for connecting a gas connector of the dispenser with the at least one gas inlet opening.

 In embodiments a beverage dispensing assembly can comprise a container which is a BIC type container, comprising an outer container and
30 an inner container. At least one gas inlet opening can be provided, for

example in the neck portion of the container, in a peripheral wall portion of container, preferably in a peripheral wall portion of the neck portion of the outer container. Alternatively such gas inlet opening can be provided in a different position, for example opposite a dispense opening of the container, for example opposite a neck portion of the container. The gas inlet opening can open into a space between the inner and outer container. An adapter can cover at least said at least one gas inlet opening, and is provided with at least one adapter opening extending radially outward, in fluid communication with the said at least one gas inlet opening, and in fluid connection with a gas connector of the dispenser. In such embodiments the dispenser can be provided with a supply for gas under pressure, especially a gas compressor, connected to the gas connector.

In embodiments the receptacle can be provided with an indentation at a lower end thereof for receiving the neck portion of the container with the adapter. The adapter and the indentation are preferably provided with orientation defining elements, such that the position of the adapter within said indentation is defined in a desired orientation relative to a gas connector of the dispenser. In embodiment the adapter can be provided for connecting a gas line to the container. In embodiments the adapter can be provided for connecting a beverage dispense line to the container. In embodiment the adapter can be provided for connecting a gas line and a beverage dispense line to the container.

In embodiments the dispenser can be designed for receiving a container in an upright position. In embodiments the dispenser can be designed for receiving a container in a lying position. In embodiments the dispenser can be designed for receiving a container in an inclined position. In embodiments the dispenser can be designed for receiving a container in an up side down position. The position of the container can be defined by the orientation of a longitudinal axis of the container, extending through at least one of a neck portion of the container, a beverage dispensing opening

and/or a gas inlet opening, wherein the upright position of a container is defined by the beverage dispensing opening being at an upper end of the container, an inverted position meaning that the dispensing opening faces substantially downward.

5 In embodiments the dispenser can be provided with at least one gas connector, movable relative to the container and/or the receptacle, preferably substantially radially relative to a longitudinal axis of the neck portion of the container. The gas connector is preferably movable mechanically, more preferably electro mechanically.

10 The dispenser can in embodiments be provided with at least one sensing element, movable relative to the container and/or receptacle, which sensing element engages the container and/or an adapter mounted on the neck portion of the container for sensing a correct position of the container and/or adapter in said receptacle. The sensing element can be part of or
15 form a locking element for locking the container inside the apparatus. The sensing element and the at least one gas connector can be coupled such that the gas connector can only be brought into an extended state if the sensing element detects a correct position of the container and/or an adapter thereof or the sensing element detects a correct position of the container or an
20 adapter thereof or senses no container or adapter thereof. Obviously other types and positions of sensing elements can be used for sensing the presence of and/or correct positioning of a container. Based on a signal from such sensing element an activation signal can be provided, for example for starting cooling, starting pressure fluid supply, starting illumination and
25 other functions.

 In embodiments the receptacle can be provided with a channel extending from an indentation near a lower end thereof upward in a wall portion of the receptacle, wherein a dispensing line extends inside said channel.

In embodiments the container is a plastic container, especially a BIC type container. The container can be a BIC type container, comprising an outer container and an inner container, wherein the inner container is substantially filled with a beverage and wherein the inner container at least
5 has a shoulder portion which is flexible, such that the beverage pushes the shoulder portion of the inner container against an inner surface of the outer container within the receptacle.

In embodiments a beverage container according to the disclosure can be a BIC type container, preferably integrally blow moulded from a
10 preform assembly made of plastic, more preferably made of a crystalline or semi-crystalline plastic such as PET and/or PEN and/or PEF. The container can be provided with an adapter at a neck portion of the container, wherein the adapter connects to a gas inlet opening of the container and is provided with at least one adapter opening extending radially outward, in fluid
15 communication with the said at least one gas inlet opening; and/or is provided with a dispensing unit including at least a dispensing line; and/or is provided with a non-circular outer portion for specific orientation of the adapter inside the housing. In embodiments the adapter is provided with an end surface with a slot or channel for receiving part of a or the dispensing
20 line, preferably such that the container can rest on the end surface without restricting flow of beverage through said dispense line.

In embodiments the invention is directed to a tapping assembly which is or can be positioned on a bar surface, wherein the container is visible from at least two opposite sides of the bar, at least for a part
25 extending above a housing of the assembly in which the container is partly inserted. The part extending above the housing can comprise branding.

In order to further elucidate the present invention, embodiments thereof shall be disclosed and discussed hereafter, with reference to the drawings. Therein shows:

Fig. 1 a beverage dispensing assembly in a rear view, that is from a side of operating the dispensing assembly, with a branded container visible through a lid;

Fig. 1A a representation of a side view of an assembly of fig. 1;

5 Fig. 2A and B perspective views of an assembly of fig. 1, in rear side view and front side view respectively;

Fig. 3A and B a dispensing assembly according to the disclosure, in rear view and in cross sectional side view;

10 Fig. 4 an exploded view of a dispensing unit of an assembly for dispensing beverage;

Fig. 5 in eight steps schematically the use of a dispensing assembly of the disclosure;

15 Fig. 6A – D a neck portion comprising part of a container with an adapter, showing part of a dispensing unit comprising a dispensing line, both in perspective view and in cross sectional view, in a first embodiment;

Fig. 6E – G a neck portion comprising part of a container with an adapter, showing part of a dispensing unit comprising a dispensing line, both in perspective view and in cross sectional view, in a second embodiment;

20 Fig. 6H in perspective view a neck portion of an embodiment of a container;

Fig. 7 schematically in cross section part of a container in a receptacle of a housing of a dispensing unit;

25 Fig. 8 schematically in cross section a neck portion of a container with an adjacent shoulder part, positioned in a housing, especially a receptacle;

Fig. 9 in end view schematically an adapter for fitting on a container;

Fig. 10 in perspective view part of an indentation at the lower end of the receptacle, showing gas connectors and part of an operating mechanism thereof;

Fig. 11 in cross section part of a container in said receptacle and
5 indentation, showing an air connector in an extended position;

Fig. 12 schematically part of a housing and lid, with a light source, e.g. a LED with a light guide;

Fig. 13 schematically a tap in cooperation with an inline valve of a dispensing unit;

10 Fig. 14 and 15 schematically in cross section part of a housing with a tap with dispensing unit, with the tap in closed and in open position respectively;

Fig. 16A – C in cross sectional side view a dispense adapter with part of a dispense line, in straight (fig. 16A) and in bent condition (Fig. 16B),
15 and a cover for placing over the adapter, as shown in fig. 16C;

Fig. 17 an inline valve mounted to a dispense line of a dispensing unit; and

Fig. 18 – 20 relevant parts of alternative embodiments of containers with adapters or closures for use in a system according to the
20 disclosure;

Fig. 21A and B schematically an alternative embodiment for a dispensing assembly, with a container having an outlet opening facing upward;

Fig. 22 schematically an alternative embodiment for a dispensing
25 assembly, with a container having an outlet opening facing sideways; and

Fig. 23A and B schematically an embodiment of an alternative preform assembly and container;

Fig. 24A and 24B an embodiment of a dispensing device with alternative lighting;

30 Fig. 25A and B a further alternative embodiment.

In this description embodiments are shown and disclosed of the invention, by way of example only. These should by no means be interpreted or understood as limiting the scope of the present invention in any way. In this description the same or similar elements are indicated by the same or similar reference signs. In this description embodiments of the present invention shall be discussed with reference to carbonated beverages, especially beer. However, other beverages could also be used in the present invention.

In this description references to above and below, top and bottom and the like shall be considered, unless specifically stipulated differently, to a normal orientation of a dispensing unit. The rear of the dispensing unit shall be referred to as the side at which a tap handle or the like is provided for operating the system, especially for operating for dispensing beverage contained in a container provided in and/or on the unit. The container can have a bottom part and a neck region comprising an orifice for filling and/or dispensing. The neck region can be an integral part of the container or can be assembled to the container. During use in embodiments the orifice within the assembly can be facing substantially downward, upward or sideways. A downward orientation is for example shown in the drawings, especially fig. 1, wherein top, bottom, up and down are indicated by arrows and appropriate wording, for indicative purposes only. This does not necessarily reflect the orientation in which a tapping device of the present disclosure or parts thereof have to be used. For example in fig. 21A and B and fig. 22 alternative orientations are shown. For the container a normal position may be with a bottom portion facing down, a neck portion facing up. In a tapping assembly of the disclosure the bottom of the container may be facing up, down and/or side ways.

In this disclosure with respect to the visibility of the container through the lid a significant part of the container should be understood as at least encompassing at least 30% of the outer surface area of the container,

preferably at least 40%, more preferably at least 50%. In embodiments this can be understood as at least 60% of the outer surface area. In this disclosure with respect to the visibility of the container through the lid a significant part of the container can alternatively or additionally be

5 understood as at least encompassing that in containers having a longitudinal axis extending from a neck region to an opposite end of the container, over at least 30% of a longitudinal length measured along such longitudinal axis the container is visible through the lid over at least more than 180 degrees measured in a plane perpendicular to said longitudinal

10 axis, preferably more than 220 degrees, more preferably more than 270 degrees and even more preferably over 360 degrees. As indicated such longitudinal axis can extend for example substantially horizontally, vertically or at an angle, such as but not limited to diagonally.

Transparency can for example but not exclusively be measured

15 according to ASTM-D1746-15 standard. The lid may for example have a transparency of, but not limited to, at least 30% measured according to said standard, preferably at least 50%, more preferably at least 60%. The transparency of the lid may be at least 75%. The container or at least an outer container of the container may be transparent having a transparency

20 of, but not limited to, at least 30% measured according to said standard, preferably at least 50%, more preferably at least 60%. The transparency of the container or at least an outer container of the container may be at least 75%. The lid may, as far as it is transparent or at least over part of a transparent portion of the lid, be substantially colorless, at least in a range

25 visual to the average human eye.

In this disclosure a lid should be understood as meaning a closure, which may be detachable from the further dispenser, for example lifted off and placed over the container, or may for example be hinged to the further dispenser. A lid may be a single entity or comprise two or more parts which

can for example be hinged or can be assembled for enclosing a portion of the container.

In this description a BIC type or bag-in-container type container has to be understood as meaning at least a container comprising an outer holder and an inner holder, wherein the inner holder is designed to hold a beverage and is more flexible or compressible than the outer holder. The outer holder can for example be a container, such as a bottle shaped container with a neck and a body, whereas the inner holder can be a flexible container, such as a bag. The inner and/or outer holder can be made of mono materials or blends, can be made entirely or partly by injection moulding and/or blow moulding, rotation moulding or the like. In embodiments the inner and outer container can be made of the same polymer or blend or at least be made such that the container can be recycled integrally. The same material should be understood at least as, but is not limited to, meaning that the materials of which the inner and outer container are made comprise at least 50%, more preferably at least 75% in volume the same polymer, which may for example be PET or PEN or PEF or another semi crystalline polymer, irrespective of the grade of the polymer. Preferably a bag-in-container according to the invention is made by integrally blow moulding. In embodiments the bag-in-container can be made by inserting at least one preform into another preform and then blow moulding them together into a bag-in-container type container. In embodiments the bag-in-container can be made by over-moulding at least one preform forming a multi layered preform and then blow moulding them together into a bag-in-container type container. In embodiments a bag can be suspended inside an outer container, after forming the outer container and the bag separately, at least in part.

In the present disclosure by way of example a bag in container (BIC) shall be described, integrally blow moulded from a preform set comprising two plastic preforms, super imposed, which should be

understood as meaning that one of the preforms is inserted into the other, after which they are together blow moulded in a known manner into a BIC. In embodiments prior to said blow moulding a closure ring is fitted over the preforms, connecting them together and closing off the space, which can also
5 be referred to as interface or inter space, between the preforms, such that at least after blow moulding said space is or can be in communication with the environment only through one or more openings provided in a neck region of the container, especially an outward opening, extending through a wall of the neck region of the outer preform and/or container. The said at least one
10 opening can be provided during manufacturing the preforms, especially during injection moulding thereof, but could also be provided later, for example by punching, drilling or otherwise machining into the container, during or after blow moulding.

In alternative embodiments the or each opening for introducing a
15 pressure fluid, such as air, into said space between inner and outer container or inner bag and outer container, can be provided between neck portions of the inner and outer container or inner bag and outer container, for example as shown schematically in fig. 18 – 20.

In an alternative embodiment a similar BIC can be provided, in
20 which however a dispensing opening for the beverage is provided at an end of the container opposite a gas inlet opening. Such container is for example shown in fig. 23. In a further alternative embodiment a container for use in the present dispensing assembly can be provided with an internal pressurizer, for example as known per se from Dutch Patent application
25 NL1008601, which pressurizer can for example be mounted in the beverage compartment of a container or in a space between an inner and outer container when using a BIC type container.

In this description a tapping assembly can comprise a housing holding a cooling device and a pressure device for supplying pressurized gas,
30 such as air, to a container. The container can be a plastic beverage

container, preferably a BIC type container. The system further comprises a lid, preferably an at least partly transparent lid, fitting over the container when properly placed in the housing. The lid provides visibility of the container within the dispensing device comprising the housing and the lid, such that for example the filling level can be ascertained and branding of the container is visible from the outside. Transparent should be understood in this context as being sufficiently clear to allow viewing and inspection of the container through the lid, preferably undisturbed by for example coloring or hazing. In embodiments the container can be visible through the lid over at least a substantial part of the lid, for example more than 50% of its surface area. In embodiments the container can be visible through the lid from at least two opposite sides. In embodiments the container can be visible through the lid over at least part of the lids' height or axial length over 360 degrees, i.e. from all sides. In embodiments the container can be visible through the lid over more than 50% of its axial length over an angle between 180 degrees and 360 degrees. Providing visibility of the container, especially at least branding thereof, can be beneficial for allowing different brands to be used in the same system without having to rebrand the dispensing unit. Providing visibility of the container, especially at least branding thereof, can be beneficial for outward appearances of the dispensing unit. Providing visibility of the container, especially at least branding thereof, can be beneficial for inspection of the container and/or its contents. Providing visibility of the container through the lid can be beneficial for assessment of the filling of the container, especially when using a partly transparent container or BIC with at least a partly transparent outer container. Providing visibility of the container through the lid can be beneficial for increasing the appeal of the system to customers.

By using a lid according to the disclosure a significant part of the container can be visible to a customer or consumer during use, whereas the

container can still be encased such as to isolate the container from the environment. This may be advantageous for example, but not limited to, for cooling and maintaining a desired temperature of the beverage, for preventing contamination, for preventing damage to the container or other
5 system components and/or for preventing contamination.

In this description a dispensing assembly can be placed on a top of a bar or table or the like, such that a part of the container visible through the lid, for example a part extending above the housing is at about eye level for an average adult person standing at the bar. The visible part preferably
10 is visible from at least two opposite sides, such as from in front of and behind such bar.

In this description a dispensing assembly, which can also be referred to as tapping assembly, can be designed such that a container can be placed in an “upside down” position on and/or into a housing of a
15 dispensing unit, such that at least part of the container, especially at least part of a shoulder part of the container is introduced in a receptacle on the housing, a neck portion comprising an outflow opening facing down. Preferably a part of the container extending into said receptacle, is close to or at least in part in contact with a wall of the receptacle, wherein the wall
20 of the receptacle is cooled, especially actively cooled. In said “upside down” position this may for example part of the shoulder portion of the container. In an “upright position” the shoulder portion may for example face upward, whereby a bottom portion can be received in the receptacle, especially for cooling. In a lying position or an inclined position a side portion of the
25 container may be received in the receptacle for cooling.

In this description relatively close regarding a distance between the wall of the receptacle and the relevant container part should be understood as a distance small enough to allow efficient cooling of the said part of the container and its content. Preferably beverage is dispensed from
30 an area of the container next to said portion of the wall cooled. Preferably a

portion of the wall in the receptacle for cooling is in these embodiments a lower part of the container. In such embodiments the advantage is obtained that the content of the container will at least be in the area which is cooled by the wall of the receptacle, even if the container is partly empty, which
5 cooled content is close to and especially directly adjacent the outflow opening or at least in a portion where the beverage is dispensed from. Thus control of the temperature of the beverage dispensed is very well possible, even if a part of the container extending outside the receptacle is not or less cooled.

10 In positioning the container in the receptacle preferably at least one line contact is obtained between the container and the wall of the receptacle, for contact cooling. Such line contact can for example be formed by a circle or elliptic line or any line, for example depending on the shape of the container and the receptacle and the orientation of the container.
15 Preferably over a relatively large part of the container, such as for example the shoulder portion, the bottom portion or wall portion of the container extending inside the receptacle contact is established or at least a close proximity of the wall of the container relative to the wall of the receptacle. A distance between the relevant part of the container and the receptacle is
20 preferably between 0 and 1 mm, measured as the smallest distance between adjacent surfaces, more preferably between 0 and 0.5 mm, even more preferably between 0 and 0.25 mm on average over at least part of a circumferential surface area of the receptacle having a height measure along a vertical axis of the receptacle which may for example be at least
25 about $1/4^{\text{th}}$ of the height or diameter of the part of the container extending in said receptacle. For example in an upside down orientation at least about a quarter of the axial height of a shoulder portion of a container may be extending into said receptacle, measured directly adjacent the neck portion. For example between a quarter of and the whole said height of the shoulder
30 portion.

Figures 1 and 1A show an exemplary embodiment of a beverage dispensing assembly 1 of the disclosure, comprising a dispenser 2 and a beverage container 3. The dispenser 2 can also be referred to as for example unit, dispensing unit, tapping device or similar wording. The dispenser 2 comprises a housing 4. The housing 4 is provided with a receptacle 5 for receiving at least part 6 of the container 3. The beverage container 3 has a neck portion 7 and a shoulder portion 8 adjacent the neck portion 7. The neck portion 7 is provided with at least an outflow opening 8A and at least one gas inlet opening 9 (see e.g. fig. 3, 6 and 10). In the embodiments disclosed the container can be a blow molded plastic container 3, preferably a Bag-in-Container (BIC) type container. The container 3 is positioned in the dispenser 2 with the neck portion 7 and shoulder portion 8 facing downward, such that the neck portion 7 and at least part of the shoulder portion 8 are received in the receptacle 5. This is referred to as an upside down orientation. A part 10 of the shoulder portion 8 extends close to and/or is in contact with a wall 11 of the receptacle 5 (e.g. fig. 8).

An orientation of the container in the dispensing device can be defined at least based on the orientation of a longitudinal axis X – X of the container, wherein in an upside down position and a straight up position said axis will extend substantially vertically, in a lying down position substantially horizontally and in an inclined position including an angle with both the horizontal and vertical direction. In a straight up position a bottom portion of the container may face downward, in an upside down position a bottom portion of the container may face upward, in a lying position it may face side ways.

The dispensing assembly 1 is by way of example placed on a top 75 of a bar 74, such that the part 13 of the container 3 extending above the housing 4 and, if present, a lid 12 are at about eye level for an average adult person, in fig. 1 indicated symbolically by eye 76. The top 75 of the bar can for example be, but is by no means limited to, at about 100 to 130 cm at a

front side available for customers. By placing the tapping assembly 1 on a bar 74, visible for at least customers standing or sitting at the bar and preferably customers standing or sitting at the bar and personnel, standing behind the bar, the visibility of the system and especially of the relevant part 13 of the container is increased. Especially when branding 22 has been provided on said part 13 of the container 3 this will increase the appeal of the system 1 and especially of the beverage enclosed within said container 3. It has been found that this appeal will increase sales of the beverage and moreover may increase the appeal of the bar. Preferably a lid is provided over the part 13 of the container, which is sufficiently transparent to provide a view of the container part 13 from at least the front and behind of the bar 74, i.e. for customers and bar personnel, and preferably provides for a view of the container part 13 over about 360 degrees. A top part of the lid 12 could be less transparent, for example opaque.

The container 3 is preferably substantially barrel or bottle shaped, having said neck portion 7 and shoulder portion 8 and further having a body portion 23 and a bottom portion 24. The bottom portion may have any suitable shape and in the embodiment shown is substantially spherical, more specifically substantially a hemisphere. Alternatively it can for example be shaped such that the container can stand on said bottom portion 24, for example petal shaped.

In embodiments as shown a lid 12 is provided over the container 3, enclosing a part 13 of the container 3 extending outside the receptacle 5. However, the assembly can in embodiments also be operated without the lid 12. The lid 12 can be substantially dome shaped, at least to such extend that it has an inner surface 14 extending along the outer surface of the part 13 of the container 3 extending outside the housing 4, preferably at a substantially regular, equal distance. This may provide for a space 15 between said inner surface 14 of the lid 12 and the outer surface portion of the container. In embodiments the lid can have a top 16 which is

substantially spherical and a body portion 17 which is preferably substantially cylindrical. The lid 12 may be made of plastic, preferably transparent plastic, such that the container 3 can be observed through at least part of the lid 12. In embodiments the lid 12 can be double walled, 5 having an inner and an outer wall 18A, B, and a space 19 enclosed there between, preferably isolated from the surroundings thereof, such as the area 20 in which the assembly is positioned and the space 15. In embodiments the space 19 can be at a pressure lower than the pressure inside the area 20 and/or space 15, and can for example be sucked vacuum, in order to lower 10 the heat transmissibility of the lid 12. In embodiments the lid 12 can rest on a seal 21 of the housing 4 and/or can be provided with a seal 21 for resting on the housing 4, such that the space 15 is isolated from the area 20 once the lid 12 has been properly placed on and/or in and/or over the housing. In embodiments this can provide for a substantially stagnant layer of air in 15 said space 15. In other embodiments a fan or similar means can be provided for providing an air flow of preferably cooled air through said space 15 for cooling the container and the beverage contained therein. The lid can also be made partly or entirely of glass.

In preferred embodiments the container 3 is provided with 20 branding 22, at least on the part 13 of the container 3 extending outside the housing 4. Said branding 22 is preferably provided such that at least part of it is provided in an upside down orientation when the container 3 is placed on its bottom 24. Thus when the container 3 is placed in an upside down position in the dispenser 2, the neck portion 7 facing down, the branding is 25 in the proper orientation for readability and visibility. Obviously when a container 3 is intended for use in a straight up orientation, i.e. an orientation with the bottom facing down in a dispensing device 1, the branding may be in a normal position for readability and visibility. Similarly such branding could be adjusted on a container for use in another 30 orientation, for example lying down.

In the embodiments shown in e.g. fig. 1 and 1A, 3 and 3A the housing 4 comprises a cooling device 26 for cooling at least a part 27 of the wall 11 of the receptacle 5. Similarly the other embodiments can be provided with the same or a similar cooling device. The receptacle 5 and cooling
5 device 26 are preferably designed for contact cooling of a part 6 of the container 3, for example at least the shoulder portion 8 of the container 3 in the upside down orientation, or a bottom portion, for example in a straight up orientation, as for example shown in fig. 21A and B, or at least part of a side of a body forming portion, for example in a lying position or an inclined
10 position, as for example shown in fig. 22. As is clear from the exemplary embodiments this will lead to cooling of at least the beverage in an area close to the receptacle, such as for example close to the neck portion 7, from which the beverage will be dispensed, this beverage thus being cooled at a desired temperature. Preferably this portion is at a lower end of the
15 container during use, such that the coolest beverage will naturally flow towards that area. The cooling of the receptacle can be provided for by any suitable means, such as a compressor based cooling device, a piezo based cooling device, ice cube cooling, liquid cooling or the like systems as known in the art. By way of example a compressor based cooling device 26 will be
20 described, as an advantageous embodiment.

The container 3 in the embodiments as shown is provided with a dispensing unit 34 including at least a dispensing line 35 for dispensing the beverage. The housing 4 comprises a tap 29 for connecting to and/or cooperating with the dispensing line 35, for opening and/or closing the
25 dispensing line 35. The dispensing line is preferably a disposable line, which should be understood as meaning that it is designed and intended for limited use, for example with only one container 3 or a limited number of containers. Preferably the dispensing unit 34 is designed such that the container 3 can be broached with it, after which the dispensing unit 34

and/or the dispensing line 35 cannot be removed again, without damage to the unit 34 and/or container 3.

In preferred embodiments the tap 29 comprises an operating mechanism 30 for opening and/or closing a valve 31 provided in the dispensing unit 2, especially a valve provided in or at an end of the dispensing line 35. Such is for example shown in more detail in figs. 13 - 17. The dispensing line 35 can be made of plastic and can be flexible, such that it can be bent as shown. The valve 31 is fixedly connected to the tapping line 35, such that it is placed and removed, i.e. exchanged together with the dispensing line 35. The valve 31 can have a spout 32 extending outside the housing 4, such that the spout 32 is the last point of contact for the beverage to be dispensed. By providing such valve 31 which is disposable contact between the beverage and the further dispensing assembly 1 can be prevented. Thus cleaning of the dispensing assembly has to be cleaned less frequently.

Alternatively other means for opening and/or closing the dispensing line 35 can be provided for, such as but not limited to means for squeezing the tapping line shut. A permanent valve can be used as part of the tapping device 2, to which the tapping line 35 can be connected when placing the container. Alternatively or additionally the tapping line can be permanent or semi permanent, wherein the container, especially an adapter 38 as discussed can be connected to said tapping line.

As can for example be seen from fig. 3A and B and fig. 8 and 11 the receptacle 5 can for example be substantially bowl shaped, for example semi spherical, such that the container 3 can be supported by the wall 11 of said receptacle 5 by at least part of the shoulder portion 8 in the upside down position, or a bottom portion, in a straight up position as for example shown in fig. 21A and B. Preferably in close contact for contact cooling. At a lower end of the receptacle 5 an indentation 36 can be provided for receiving the neck portion 7 of the container, with the dispensing unit 34 or at least part

thereof provided on the neck 7, when using a container in an upside down position, or for example such unit 34 connected or to be connected to a bottom portion 24, especially an inlet opening 9 of a container 3 in a straight up position, as shown in fig. 23A and B for connecting a gas line. In
 5 embodiments the indentation 36 can be such that the neck 7 and/or dispensing unit 34 do not rest on a bottom 37 of the indentation 36. In embodiments using a straight up position, for example a gas line connector can be position in such indentation.

As can be seen in for example fig. 6A – G the dispensing unit 34
 10 can comprise an adapter 38 which is or can be fixed onto the neck 7 of the container, for example form locked, press fit, screwed, fitted by cooperating bayonet fitting elements or the like, or welded or glued or made integral with the container 3. The adapter 38 can have an end face 39 and can have a non-circular, or more general preferably a non-rotational symmetric
 15 configuration when viewed in a direction along a longitudinal axis X – X of the container 3 or at least the neck 7 thereof. In the embodiment shown the adapter 38 has two wings 40, 41, extending from opposite sides, having different configurations. In the embodiments shown by way of example a first wing 40 has a smaller width W_{40} than the width W_{41} of the second wing
 20 41. The second wing 41 has a slit 42 extending there through, through which the dispense line 35 can extend. Fig. 9 shows a schematic view along the axis X – X of an adapter 38 within the indentation 36. As can be seen the indentation 36 is provided with a configuration compatible with the configuration of the unit 34, especially the wings 40, 41, such that the
 25 adapter 38 can be positioned inside the indentation only in one orientation, due to it being non-rotational symmetric. As can for example be seen in fig. 10 in perspective view to this end two curved wall elements or raised portions 43 are provided along opposite edges of the indentation 36 (one thereof being visible in fig. 10) between which the adapter body 38A can be
 30 fitted, the wings 40, 41 positioned between opposite ends 43A, B thereof.

Thus when positioning the container 3 in the receptacle will automatically be correct by proper positioning of the wings 40, 41. When not properly positioned the container 3 cannot be lowered far enough to properly be supported within the receptacle 5 and if a lid is provided this will not properly fit over the container 3. Moreover the dispensing line 35 will be out of position and the gas connections as will be discussed will not properly align. Similarly such adapter 38 can be used at a bottom end of a container 3 when to be used in a straight up position.

As can be seen schematically in fig. 6A – G, 7 – 9 and 11 a container 3 can be a BIC type container having an outer container 3A and an inner container or bag 3B, preferably more flexible than the outer container 3A. The inner and outer container 3A, 3B can be connected to each other by a closure ring 47 fitted to, preferably permanently fixed and more preferably welded to the containers 3A, 3B, such that a space 46 between the inner and outer container 3A, 3B is closed off by said closure ring. The closure ring 47 has a central opening 48 in which a valve 49 has been mounted. The general design and configuration of a container 3 as disclosed in and to be used with a system of this description can for example be as is described in EP2413762, EP2405517, EP2920080, EP2882679, EP2882680, EP2885241, EP2885242, enclosed herein by reference with respect to the configuration of the container, including but not limited to methods of manufacturing the same and materials used. In all of these embodiments of containers at least one opening 9 is provided in a neck region 7 of the container, extending through a peripheral wall portion 7A of the neck 7, especially a neck portion of the outer container 3A, and opening into or at least connected to the space 46, such that during use a gas under pressure can be introduced into the space 46 for compressing the inner container 3B for dispensing the beverage. Alternatively the container can be a BIC container of a different design, for example as shown schematically in fig. 23A and B, in which a dispense opening 210 and a gas inlet 9 are provided

at opposite sides. Such container is for example known from WO2014/081294. In embodiments the inner container 3B can be connected to the outer container 3A not only at or near the neck portion 7 but also or alternatively at or near the bottom 24, as for example shown in fig. 23,

5 forcing the inner container 3B to collapse substantially radially when compressed. This can for example be advantages when using the container 3 with the dispensing opening 210 in a position other than at a lower end 24, for example when lying on a side, a longitudinal axis X – X being orientated substantially horizontally, or in the straight up position.

10 Fig. 6H shows by way of example a neck portion 7 of a container 3 as disclosed in the prior art as mentioned here above. The closure ring 47 has been welded to the inner and outer container 3A, 3B, for example spin welded, but could be fitted in any suitable way, removable or, preferably, non removable, meaning that it cannot be removed without damage to the
15 ring 47 and/or inner and/or outer container 3A, 3B. In fig. 6H one opening 9 is visible. There can be two such openings 9, preferably diametrically opposite each other. On either side of the opening 9 a coupling element 50 can be provided for coupling with appropriate contra coupling provisions of the adapter 38. For example the contra coupling provisions could be formed
20 or could comprise a snap ring 51 which can snap over and/or behind the coupling elements 50, locking the adapter in position. Preferably the counter coupling provisions are designed for allowing the adapter 38 to be positioned onto the neck 7 in only one position, or in two positions, rotated relative to each other over 180 degrees around the axis X – X. In this embodiment the
25 opening or openings 9 extends substantially radially, through a wall of the neck 7 of the outer container 3A. A valve 49 is provided substantially central, which in this embodiment can be a clinched aerosol type valve.

Alternatively the container 3 could be made differently, for example but not limited to according to US2008/0257883. In fig. 18 – 20

alternative embodiments of containers 3 are shown, at least their neck portions 7, suitable for use in the present invention.

In figs. 18 – 20 a neck portion 7 of a BIC type container 3 is shown, having an outer container 3A and an inner container 3B. In each of these
5 embodiments at least one air inlet 46A is provided into the space 46 between the outer and inner containers 3A, 3B. The inlet 46A has a main direction of flow F substantially parallel to a longitudinal axis X – X of the container 3 or at least of the neck portion 7, i.e. extending substantially in an axial direction. The container can again be made by blow moulding, for
10 example integral stretch blow moulding from a multi layered preform or a preform assembly, for example made from PET, PEN or PEF or blends comprising one or more of such crystalline or semi crystalline plastic materials.

In fig. 18 a closure 47A is mounted to the neck 7 of a container, for
15 example similar to that as disclosed in EP2238041. The closure can for example be mounted in a manner similar to a ring 47 as discussed previously. In this embodiment the closure 47A is clicked onto the neck portion by a groove 94 in an outer portion 95 of the closure 47A gripping behind a retention ring or stubs or the like connecting elements 96, which
20 prevents the closure 47A from being removed, preferably such that the closure 47A cannot be removed without damage to the closure 47A and/or the neck portion 7. Alternative mounting provisions can be used, such as but not limited to screw threads, bayonet elements, welding, press fitting or any such suitable means as known in the art. The closure 47 has an inner
25 portion 97 fitting against an inner surface 98 of the neck of the inner container 3B, and is connected to or integral with the outer portion 95 by an end portion 99. In the embodiment shown a sealing layer 100 is provided, for example by 2K moulding, sealing against said surface 98. Said sealing layer 100 also seals against an inner surface 101 of the outer container 3A.

Central to the end portion 99 a beverage outflow opening 102 is provided, which in this embodiment is shown as an open outflow opening 102 with a sealing ring 100A. In embodiments a valve 49 can be mounted in or over the opening 102, for example as previously discussed, connected to or
5 in stead of the sealing ring 100A. In embodiments a pierceable closure can be provided in or over said opening 102, for example as disclosed in EP2238041. In embodiments a dispense line 35 with a valve 31 can be connected to said opening, directly or indirectly, for example by a dispense adapter 45, similar to that as previously discussed.

10 Spaced apart from the beverage opening 102 an inlet opening 103 is provided, for introducing a pressure fluid, especially a gas such as air or CO₂, into the inlet 46A to be introduced into the space 46, for compressing the inner container 3B. Said inlet opening 102 again has a main direction of flow F which is substantially parallel to the axis X – X and the main
15 direction of flow F of the inlet 46A.

 In fig. 19 the neck portion 7 of fig. 18 is shown, wherein an adapter 38 is mounted over the closure 47A. In the embodiment shown the adapter has an outer skirt or flange 104 which can hook behind a ring or flange 93 of the container 3. An end face 105 is provided with a central opening 105A
20 allowing access to the outflow opening 102. The outer skirt 104 is provided with at least one opening 52 which extends substantially radially through said skirt 102, into a channel 106 connecting said at least one opening 52 to the inlet opening 103. Appropriate seals 107 are provided for sealing the channel 106 such that a pressure fluid introduced through said opening 52
25 can be fed into the inlet opening 103 without leaking.

 In preferred embodiments the adapter 38 is configured on the outside substantially equal to the adapter 38 as discussed with reference to e.g. fig. 6A – G and 9, having the wings 40, 41 for fitting correctly and preferably in one orientation only inside the receptacle 5 and, especially, the
30 indentation or receptacle 36, fitting between the raised portions 43, of a

tapping device 1, such that a gas connector 53 of the tapping device 1 can connect to the said opening 52 in an appropriate way. Preferably also at least one blade 91 can properly engage the adapter 38 and/or ring 93 for positioning and/or locking the container and/or can be used for detecting the presence of a container 3.

In fig. 20 in stead of an adapter 38 the closure 47A of the container is provided directly with the channel 106 extending between an opening 52 in an outer face 107 of the closure extending outside the container neck portion 7 and the inlet opening 46A into the space 46 between outer and inner containers 3A, 3B. In this embodiment the closure 47A can be substantially the same as that shown in fig. 18 and 19, but in this embodiment the outer portion 95 can comprise at least part of the channel 106. In the embodiment shown, by way of example only, the outer skirt 95 has an annular chamber 108 which extends over an upper edge 109 of the outer container 3A, wherein a seal 100B is provided sealing against an outer surface 110 of the outer container 3A adjacent said edge 109. The channel 106 extends at least partly through said chamber 108, again such that a gas connector 53 of the tapping device 1 can connect to the said opening 52 in an appropriate way.

In preferred embodiments the closure 47A is configured on the outside substantially equal to the adapter 38 as discussed with reference to e.g. fig. 6A – G and 9 or fig. 19, having the wings 40, 41 for fitting correctly and preferably in one orientation only inside the receptacle 5 and, especially, the indentation or receptacle 36, fitting between the raised portions 43, of a tapping device 1, for defining the proper positioning for engagement with the at least one connector 53. Preferably also at least one blade 91 can properly engage the adapter 38 and/or ring 93 for positioning and/or locking the container and/or can be used for detecting the presence of a container 3.

In these embodiments of fig. 18 – 20 again a dispense adapter 38 can be used as previously discussed, wherein the adapter 38 and/or the closure 47A can be provided with appropriate means for engagement with and retaining of the dispense adapter 45 in a position for opening a valve or
5 piercing a pierceable closure and allowing beverage to be dispensed. As discussed, in all embodiments disclosed a dispense line 35 could also be coupled directly to the container, especially to a closure ring, to the valve 49 and/or to the outlet 102, without an intermediate dispense adapter 45.

Fig. 21A and B schematically shows an embodiment of a dispensing
10 system 1 in which a container 3 is placed such that a bottom portion 24 of the container 3 is received in the receptacle 5 in the housing 4. In this embodiment a gas inlet 9 can be provided in the bottom portion of the container 3, for example as shown in a container of fig. 23, whereas the beverage outlet opening 210 can be provided as discussed before, in a neck
15 portion 7 of the container 3, facing upward. In this embodiment a lid 12 can again be provided, similar to that of the embodiments discussed here before, substantially transparent and enclosing the part of the container 3 extending outside the receptacle and/or housing.

In the embodiment shown in fig. 21A and B, a dispense line 35 can
20 be connected to the outlet opening 210 of the container 3, for example with an adapter similar to that as discussed before, but only with connecting means for the dispensing line 35, since the gas line 82A is connected to the opposite side 24 of the container 3, to gas inlet opening 9. In fig. 21A and B the dispense line is shown extending over an outer surface of the container
25 3, from the upper end or neck portion 7 to the mechanism 30 for opening and/or closing a valve 31, when properly placed, which can be similar to that as discussed here before.

In an alternative embodiment, not shown, a dispensing unit can be provided extending through the top end of the lid 12, such that a beverage
30 dispensing line 35 can dispense beverage outside the lid 12. In such an

embodiment the dispensing unit can be mounted onto the neck portion 7 of the container 3 after closure of the lid 12 over the container 3. To that end an opening can be provided in the top of the lid 12, which during use is closed of by the dispensing unit and/or by the container 3, for example by the neck portion 7 of the container 3. In embodiments the neck portion 7 can extend into and/or through the said opening in the lid 12. In such embodiments the dispensing unit can again comprise a dispensing line 35 which can be coupled to the mechanism 30 for opening and/or closing a valve 31, when properly placed, as discussed before, or it can be designed for dispensing beverage directly, for example through a substantially rigid tube connected to the dispensing opening 210, wherein the dispensing unit may operate a valve in the dispensing opening 210 or in the dispensing unit itself.

In embodiments in which the dispensing opening 210 is not at a lower end of the container 3 when dispensing, a dip tube 211 may be provided, connected to the dispensing opening 210 and extending into the inner volume of the container 3, especially into an area A close to a cooling surface of the dispensing device. In embodiments as shown in fig. 21A and B, in which the neck portion 7 is facing upward, the bottom portion of the container 3 can be inserted into the receptacle or bowl 5 being cooled by cooling means, as discussed before. This will lead to cooling especially of beverage in the area A close to the bottom 24 of the container.

Fig. 22 Schematically shows a further alternative embodiment of a dispensing system 1, in which the container 3 is in a substantially horizontal position. A longitudinal axis X – X of the container 3 extends substantially horizontally. The neck portion 7 is shown to the left, the bottom portion of the container 3 to the right of the drawing. The housing 4 can be substantially similar to that of the previous embodiments, comprising inter alia a mechanism 30 for opening and/or closing a valve 31, when properly placed, cooling means and means 23 for providing air under

pressure for introduction into the container 3, as discussed before. In this embodiment the housing 4 comprises an elongated receptacle 5 for receiving a relevant part 6 of the container, here including a side portion of the body portion 23 of the container 3. The receptacle 5 is substantially bowl shaped
5 with an upper side defined substantially by a substantially horizontal imaginary plane P extending preferably below the longitudinal axis, such that a large body portion 23 extends above said receptacle 5. For example over more than 50% of the axial length of the container 3 the container is visible over an angle of more than 180 degrees around the longitudinal axis
10 X – X.

As can be seen again cooling means 26, 95 are provided in the housing 4, for example but not limited to one or more channels conducting a cooling liquid, for cooling the part 6 of the container inside the receptacle 5, preferably substantially by contact cooling as described. In said part 6 an
15 area A will therefore be provided or formed thereby in which the beverage will initially be cooled. A riser pipe or dip tube 211 may be provided extending from the dispense opening 210 into said area A. A connecting unit 34 and/or adapter 38 can again be used for connecting the container 3 to a dispensing line 35 and to the pressurized gas supply such as a compressor or
20 pump 83 by gas line 82A.

In fig. 22 again a lid 12 is provided, supported by the housing 4 and enclosing the container 3 in the device 2, especially the part 28 extending outside the receptacle 5. The lid 12 in this embodiment has a partly tunnel shape with at one end a double curved closing end 12A. Again the lid may
25 substantially follow the shape of the outer surface of the relevant part 28 of the container 3, enclosing a relatively small space between the lid 12 and the container 12. The lid again preferably is transparent, as discussed with respect to the earlier embodiments, such that the container can be viewed through the lid 12.

Fig. 23A shows in side view and in cross sectional view schematically a preform assembly 212 for forming a container as shown in cross section in fig. 23B. The assembly 212 comprises an inner preform 213 and an outer preform 214, connected to each other at a bottom end 24 thereof and/or at the opposite side near the neck region 7. At the bottom end 24 an air inlet opening 9 is provided, opening into an interface 215 between inner and outer preforms 213, 214. In Fig. 23B a container 3 is shown, blow moulded from the preform assembly 212. In the neck portion 7 a valve assembly is provided closing off the dispense opening 210 of the container 3. In use gas such as compressed air can be inserted through the inlet opening 9, into the interface, compressing the inner container or bag 3B formed from the inner preform 213. If the bottom ends are connected, it will deform radially inward. Both preforms 213, 214 can be made of plastics, such as PET, as known in the art.

In embodiments a container 3 as shown in any or each of the figures can have an outer container 3A which can be substantially rigid, or at least more rigid than an inner container 3B. Each of the inner and outer containers 3A, 3B can comprise a single layer or multiple layers. The inner container 3B can also be referred to as a bag and is substantially flexible, to be collapsed when pressured from an outside, for example from an interface 215 between them, as discussed. In embodiments the outer container 3A can be substantially transparent, at least as far as the part 28 is concerned which will normally extend outside the receptacle 5. Transparent should in this context be understood as at least meaning that the or each inner container 3A enclosed therein is visible through the outer container 3A, especially any deformation of said inner container and/or light reflected by the inner container 3B shining through the outer container 3A. The lid portion preferably has a suitable transparency, as discussed before. The outer container 3A can for example be as transparent as the lid 12.

In this disclosure transparency should be understood as also including translucency, as long as the container is visible through the lid and/or the inner container 3B is visible through the outer container 3A and/or through the lid 12.

5 In embodiments disclosed the valve 49 mounted in the closure ring 47 can for example be according to EP2917148 or EP2914542. The valve 49 has a valve body 49A which can be pushed away from a valve seat 49B in an axial direction, i.e. along or parallel to the axis X – X, further into the container 3, for opening the valve 49, and is biased in a closed position.

10 As can be seen in for example fig. 6A – 6G the adapter 38 can have a central opening 44 in which a connector, also referred to as dispense adapter 45 is provided or can be introduced. The dispense adapter 45 is connected to or connectable to the dispense line 35. In fig. 6A the dispense adapter 45 is shown in a rest position, with the dispense line 35 wound
15 around the adapter 38 under the wings 40, 41, for storage. In this position the container 3 can be stored and be delivered to a user. The dispense adapter is positioned such that the valve 49 is closed, as can be seen in fig. 6B in cross section. A resilient finger or wall 55 clicks into the dispense adapter 45, for example below an edge 60, for aiding in retaining it in this
20 position. In fig. 6C and D the same container 3 is shown, with the dispense line unwound, extending through the cut through 42, whereas the dispense adapter 45 has been pushed further into the adapter 38, opening the valve 49, as can be seen in fig. 6D. The dispense adapter is preferably locked in this position, for example by the finger or wall 55 and/or by a part 56 of the
25 dispense adapter 45 locking behind a clinch plate 57 of the valve or any suitable means. Alternatively or additionally a bulge (not shown) at the bottom of the indentation 36 could force the dispense adapter 45 into the position of fig. 6C and D or fig. 6F and G and/or keep it in that position, such that during use it does not close again. Thus beverage can flow into the
30 dispense line, preferably no further than the valve 3 when closed. In this

position the container can be turned up side down and placed inside the receptacle 5 and indentation 36.

Fig. 6E – 6G show an alternative embodiment, in which in fig. 6E the adapter 38 is shown mounted onto a container but without the dispense adapter 45 with dispensing line 35. This can be separately provided to the user. Prior to use the user will push the dispense adapter 45 into the opening of the adapter 38, the dispensing line 35 passing through slit 42, and opening the valve 49 as described.

Fig. 16A – C and 17 disclose an example of a dispense adapter 45 with dispensing line 35, in partial cross section. In fig. 16A a housing part 58 of the dispense adapter 45 is shown, with a hollow central shaft 61 extending along an axis Y – Y which, during use, will coincide with or at least be substantially parallel to the axis X – X. A free end 62 of the shaft 61 may be provided with a seal 63, for example rubber or silicon or such soft, resilient material, for sealing cooperation with the valve 49 when pushed into the opening 64 of the valve 49. At the opposite end 65 an end 35A of the dispensing line 35 can be fitted into the hollow shaft 61. Said end 65 connects to a sloping or curved surface 66 over which the dispensing line 35 can be bent, as shown in fig. 16B, in order to include an angle, preferably of about 90 degrees in said end 35A of the dispensing line 35. Then a lid 67 can be fitted over the tapping line 35 and housing part 58, locking the dispensing line 35 in said angled position, as shown in fig. 16C. As can be seen in fig. 16 the lid 67 may comprise the edge 60. The lid 67 can be connected in any suitable way, for example by press fit, form lock, welding, gluing or any such means known to the skilled person.

Fig. 17 shows in cross section a valve, especially an in line valve 31 with a spout 32, covered by a cover 32A which can be removed prior to use, and will keep the spout 32 clean until such use. The valve 31 is connected to the dispense line 35 opposite the end 35A connected to the dispense adapter 45, and can have a construction and design as known from for example the

David system as marketed by Heineken®. The spout 32 can be movable relative to a body 68 in a substantially longitudinal direction, along an axis V – V of the spout, for opening and closing the valve 31.

As can be seen in e.g. fig. 10 the indentation 36 can be provided in
 5 a lower part 4A of the housing 4, above which the receptacle 5 or at least the further receptacle 5 can be provided, in a further housing part 4B. The indentation 36 has in a wall part 68 between two ends 43A of the raised portions 43 a channel 69 in which the dispense line 35 can be positioned when the container 3 is placed properly in the tapping device 1. In fig. 14
 10 and 15 it is shown how the dispense line 35 is led further up through an adjoining channel 69 extending in the wall 11 of the receptacle upward, such that it is kept out of interfering with the close proximity and preferably contacting of the said wall 11 and the shoulder portion 8 of the container 3. As indicated before the tapping assembly, especially the dispenser 2
 15 comprises an mechanism 30 for opening and/or closing a valve 31, when properly placed. To that end the operating mechanism has a holding element 70 for holding the body 68 of the valve 31 and a grabbing element 71 movable relative to the holding element 70, for grabbing and moving the spout 32 between the opening and closing position of the valve 31. A tapping
 20 handle 73 is directly or indirectly connecting to the grabbing element 71 for moving it between said positions.

Fig. 14 shows a position of the operating mechanism 30 in which the valve 31 can be positioned or removed. The tapping handle may have been removed and a lid 72 has been opened, allowing access to the grabbing
 25 and holding element for placing or removing the valve 31. This position is shown in fig. 13 in perspective view. Then the lid 72 can be closed again, over the valve 31 and dispensing line 35, as shown in fig. 15, and the handle 73 can be replaced, if necessary.

As can be seen in fig. 10 and 11 the housing comprises an operating
 30 mechanism 80 for operating the at least one gas connector 53 of the tapping

device 1. The operating mechanism 80 is especially designed for moving at least one gas connector 53 between a retracted position and an extending position, extending at least partly radially into the indentation 36, to connect to the gas inlet 52 provided in the adapter 38 connecting to the opening 9 of the container 3 or a vent thereof. In the embodiment shown two such gas connectors 53 are provided, at opposite sides of the indentation 36, i.e. radially opposite to each other. However one such connector could be sufficient. One of the connectors 53 can in embodiments be used for introduction of gas, especially air, under pressure into the container, especially into a space 46 thereof, through gas inlet 52 of the adapter and the opening 9 or vent. In embodiments one connector 53 could be provided for pressure release of the container 3, especially the space 46, if the pressure would rise above a predetermined level, for example by connecting said connector 53 to an over pressure valve. In embodiments one such connector 53 could be connected to a pressure sensor (not shown) for sensing presence of a proper container or at least proper connection thereof. In embodiments another type or position of a sensor for sensing presence of a container can be used, for example a pressure switch, a position switch, an optical sensor or any such sensors known in the art.

In the embodiment shown the or each connector 53 is carried by a slider 81 which is slidably supported in the housing 4, such that it can slide radially back and forth in the direction as indicated by the double headed arrow P (fig. 11). A gas inlet 82 is provided for connecting to a compressor or pump 83 or other source of compressed gas, especially air. A ring 84 is mounted in the housing 4, extending around the receptacle 36, which has at least one and in the embodiment shown two guide slits 85, in each of which a pin 86 of one of the sliders 81 extends. The slits 85 extend such that rotation of the ring 84 around a vertical axis parallel to or coinciding with the axis X - X will push the sliders 81 simultaneously into the extended position or away from said extended position into a retracted position. The

ring 84 could be made to be rotated by hand or by rotation of the container. In the embodiment shown the ring 84 is operated and rotated by a motor 89 through a pinion 87 engaging teethed a rack portion 88 of the ring 84.

Fig. 10 shows the retracted position of the slider or sliders 81. In this position a forward end 87 of each slider 81 is close to or substantially flush with a wall 36A of the indentation 36, such that the adapter 38 can easily enter into or be removed from the indentation 36 and thus from the tapping device 2. In an extended position the forward end 87 of the slider 81 will be forced against an outer wall part of the adapter 38 and/or into an inlet 52, for connecting the slider 81 and especially a nozzle 90 thereof extending from or provided by the forward end 87 into fluid communication with the said inlet 52 and/or opening 9. In this position gas, especially air, can be introduced into the container from the gas inlet 82 provided by said source such as a compressor or pump.

In embodiments shown to at least one slider 81 a blade 91 is connected which can move along with said slider 81. A forward end 92 of such blade 91 can be brought into an extended position, along with the slider 81, such that the forward end 92 is forced above a ring 93 provided on the neck of the container 3, i.e. at a side of said ring 93 opposite the side of the closure ring 47. This can aid in preventing that the container 3 can be removed while the slider(s) is/are in the extended position. Moreover, in embodiments the blade or blades and ring 93 can be designed to push the container further down into the receptacle 5, in order to improve proximity or contact between the shoulder portion 8 of the container and the wall 11 of the receptacle 5, thus improving cooling. In embodiments a sensor can be attached to the slider or blade, such that when the slider and blade are moved to the extended position but do not encounter an adapter, they will give a warning signal or shut down the dispense device at least partly, for example by closing off air supply. Alternatively or additionally the sensor

can switch on the device 2 or activate functions thereof when recognizing that a proper container is placed in a proper position.

As discussed a cooling system 26 is provided in the housing 4, here shown as a compressor and evaporator based cooling system, which has
5 cooling lines 95 or the like extending in close proximity to or inside the wall 11 of the receptacle 5 and possibly the indentation 36, for cooling the wall 11 or at least a relevant part thereof. The cooling device 26 is preferably designed to keep the wall 11 at a predefined temperature, or at least to cool the wall such that at least the beverage close to the outlet opening, i.e. in
10 the neck 7 and possibly the shoulder portion 8 at a desired temperature or as close as possible to it. Depending on the beverage and a users preference this temperature can preferably be set, for example but not limited to between about 4 and 9 degrees Celsius, for example around 6 degrees Celsius. Other temperatures or temperature ranges can be set.

15 As can be seen in e.g. fig. 3B, 7, 9, 11 and 13 – 15, the shoulder portion 8 of the container can fit to the wall 11 of the receptacle closely, whereas the inner container 3B in the shoulder portion can fit snugly along the inner surface of the outer container. Thus contact cooling between the wall 11 and the shoulder portion of the container 3 has surprisingly proven
20 to be highly effective.

In a common fashion the tapping device 2 comprises a leak tray 102, below the spout 32 when properly placed. Fig. 4 shows an exploded view of a device 2 of the present disclosure, in an advantageous embodiment. However, it should be noted that many different embodiments
25 are within the scope of the disclosure of the invention as disclosed and defined.

In embodiments shown the housing can comprise lighting elements such as LED's 77 in an edge portion of the housing 4, such that when a lid 12 is placed on the housing 4 light from the LED's 77 shines into the lid,
30 especially into one or both walls 18A, 18B and/or in between them, for

lighting the lid 12. Parts of or all of the lid may be transparent, such that the container is visible, especially branding provided thereon. The wall or walls 18 of the lid may be made to emit said light locally or over the full surface. Parts of the lid may be opaque or non transparent, for example to
5 block or blur the view of the container from defined positions or angles.

Fig. 24A and B show an embodiment of a dispensing assembly 1 according to the disclosure, which is here shown as an embodiment similar to that as shown in e.g. fig 1 – 3. Lighting 77 as disclosed herein could however similarly be applied be any embodiment disclosed. In fig. 24A and
10 B light sources are provided, such as LED's 77, for example similar to the light sources 77 discussed here before. In this embodiment at least some light sources 77 emit light towards the container 3. This provides for an alternative visual effect. This can be in stead of or additional to the lighting as discussed shining into the lid 12 itself.

15 As can be seen in fig. 24A when the container 3 is filled with beverage the light emitted towards the container 3 will be reflected substantially directly out of the lid 12, as indicated by light rays 77A. In embodiments the container 3 can be provided with a transparent outer container 3A, at least transparent for the light emitted by the lights 77, and
20 an inner container 3B. The inner container can be less transparent or preferably opaque or light reflecting, such as for example metal colored, for example silver or aluminum colored. The inner container 3B can reflect the light emitted. In such embodiment when the container is being emptied, the inner container 3B will collapse gradually, as is shown in fig 24B. This will
25 mean that the reflective pattern of the light 77A reflected by the inner container 3B will change over time, altering the overall appearance.

In embodiments in which the inner container 3B is also transparent to the light or where there is no such inner container 3B, beverage inside the container may at least in part reflect light or diffuse the

light emitted from the light sources 77, again changing the appearance of the assembly 1 during use.

In embodiments parts of the inner and/or outer container 3A, 3B may be more or less transparent than other parts of the same inner and/or
5 outer container 3A, 3B, and or more or less and/or differently reflecting, again changing the appearance of the system during use. To the same effect at least a part or parts of the container may be provided with elements interfering or interacting with light emitted, such as refractors, lenses such as Fresnel lenses, diffusers or the like.

10 In fig. 25A and B a system 1 is shown, having again a light source 77 shining into the volume enclosed by the lid 12, onto the container 3. In this embodiment the light source 77 is shown at a top end 24 of the lid 12, opposite the housing. As can be seen from a comparison of fig. 25A and 25B again the reflection and/or diffusion of the light 77A emitted by the light
15 source 77 will change during dispensing of beverage, for example due to collapsing of an inner container 3B and/or change of the filling rate of the container 3. Obviously a light source 77 can also be provided in different positions, for example in the receptacle 5 or in the indentation, shining light against and/or into the container 3 from the shoulder portion and/or neck
20 portion and/or bottom portion. Different light sources 77 can be provided in different positions as disclosed.

Fig. 5 shows schematically how a system 1 of the disclosure could be used, referring here to an embodiment of e.g. fig. 1 – 4. Alternative
embodiments disclosed can be used in an analogous manner. First
25 containers 3 can be precooled, for example in a refrigerator 74. The lid 12 of the device 2 is removed from the housing 4, as is the handle 73. The lid 72 of the operating mechanism 30 is opened, such that a container 3 can be inserted into the housing, especially into the receptacle 5, the tapping line 35 being positioned in the channels, such that the valve 31 can be properly
30 placed into the operating mechanism 30, in the holding element and

grabbing element. It should be noticed that in advantageous embodiments, such as disclosed here, the channels in which the dispense line 35 has to be placed is entirely open, such that the dispense line can be positioned very easily, without have to be fed through openings or the like. Then the lid 72
5 of the operating mechanism is closed again and the lid 12 is placed over the container 3 onto the housing. The tapping handle 73 is replaced.

After proper installation of the container 3 the device 2 can be switched on or at least activated such that the ring 84 is rotated, forcing the slider or sliders 81 into the extended position, engaging properly with the
10 inlets 52 and/or openings 9. Also the blade or blades 91 are forced against the adapter 38, under the ring 93, locking the container 3 further in position. The cooling, if not already operating, is activated for cooling the wall 11 to the proper temperature and the lighting, if provided, may be switched on.

15 During use gas under pressure will be supplied through the sliders 81 and the gas inlets 52, into the space 46, for pressurizing the inner container 3B. This pressurizes the beverage such that when opening the valve 31 beverage such as beer will flow out. A pressure sensor in for example the compressor, a gas line between compressor and slider or in a
20 slider will sense the pressure and activate the compressor when the pressure needs to be increased. During use this allows for the pressure to be maintained within suitable limits, for example at about an equilibrium pressure of the beverage when carbonated.

In fig. 7 an advantageous position of the bag 3B relative to the
25 shoulder portion 8 of the outer container 3A is shown, showing close proximity. The distance may for example be, measured perpendicular to a tangent of the outer wall 3A, between 0 and 1 mm, preferably between 0 and 0.5 mm and more preferably between 0 and 0.2 mm. Preferably the shape of the shoulder portion between the body portion and the neck 7 is
30 substantially spherical. It has been found that this provides for a proper fit,

even if the temperature and/or pressure change and when the container is emptied during use.

The invention is by no means limited to the embodiments specifically disclosed and discussed here above. Many variations thereof are possible, including but not limited to combinations of parts of embodiments shown and described. For example the at least one opening 9 can be provided in a different position, for example extending through the closure ring 47, preferably in substantially radial direction outward, for example through the inner surface or wall of the ring, into the space between the containers, wherein the adapter 38 can extend into the ring for communicating properly with said at least one opening 9. The container can be provided with only one opening in the neck or several such openings. In embodiments the container can be a single wall container, wherein the gas can be inserted directly into the beverage, for example CO₂ or nitrogen gas. In embodiments the container can be compressible by pressurizing the space within the lid. In embodiments the closure ring 47 and adapter 38 can be integrated. They can then be connected directly onto the container 3 as a closure and be suitable as the adapter. In embodiments the dispense adapter and the adapter can be integrated, with each other and/or with the closure ring. In stead of a valve in the container a different closure can be used, for example a pierceable closure, pierceable by the adapter and/or the dispense adapter, or a removable closure which can then be replaced with the adapter and/or dispense adapter for cooperation with the tapping device.

These and many other amendments are considered to have been disclosed herein also, including but not limited to all combinations of elements of the invention as disclosed, within the scope of the invention as presented.

Conclusies

1. Drankafgifte samenstel, omvattende een dispenser en een drankcontainer, waarbij de drankcontainer een halsgedeelte en een schoudergedeelte nabij het halsgedeelte heeft, waarbij de container, bij voorkeur het halsgedeelte, is voorzien van ten minste één uitstroomopening en ten minste
5 één gas-inlaatopening en waarbij de dispenser een behuizing omvat, waarbij de behuizing is voorzien van een houder voor het ontvangen van ten minste een deel van de container, waarbij de container in de dispenser wordt geplaatst, bij voorkeur zodanig dat ten minste een gedeelte van de container wordt ontvangen in de houder, welk gedeelte bij voorkeur een deel heeft dat zich uitstrekt nabij en/of in
10 contact is met een wand van de houder, waarbij bij voorkeur een deksel is voorzien over de container, dat een deel van de container dat zich uitstrekt buiten de houder omsluit, waarbij het deksel transparant is althans zodanig dat ten minste een significant deel van de container dat zich uitstrekt buiten de houder zichtbaar is door genoemd deksel,
15 waarbij ten minste één lichtbron is voorzien dat licht uitstraalt in en/of op de container.
2. Drankafgifte samenstel volgens conclusie 1, waarbij een container wordt gebruikt met ten minste een buitenwand dat ten minste gedeeltelijk transparant is voor ten minste een deel van het licht dat wordt uitgestraald van de ten minste ene
20 lichtbron.
3. Drankafgifte samenstel volgens conclusie 2, waarbij de container een binnencontainer heeft die reflecterend is voor ten minste een deel van het licht dat door de buitencontainer gaat.
4. Drankafgifte samenstel volgens conclusie 3, waarbij de binnencontainer
25 samendrukbaar is binnenin de buitencontainer.
5. Drankafgifte samenstel volgens één der conclusies 1-4, waarbij een of het deksel wordt gesteund door de behuizing, die de container omsluit of een relevant deel daarvan, waarbij de ten minste ene lichtbron verschaft is in de behuizing of verschaft is in het deksel.

6. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij het deksel ten minste gedeeltelijk transparant is, zodanig dat ten minste een deel van de container dat zich uitstrekt buiten de container zichtbaar is door het deksel, bij voorkeur vanuit ten minste twee tegenoverliggende zijden, meer bij voorkeur
5 over een hoek van ten minste ongeveer 270 graden, meer bij voorkeur over een hoek van ongeveer 360 graden rond een longitudinale as, waarbij het deksel bij voorkeur op de behuizing rust, waarbij een ruimte tussen het deksel en een buitenvlak van de container wordt afgedicht, waarbij het deksel de container van een omringende ruimte isoleert.
- 10 7. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij het deksel een dubbelwandig deksel is en/of uit kunststof en/of glas is vervaardigd.
8. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de container een plastic container is, in het bijzonder een BIC-type container.
9. Drankafgifte samenstel volgens conclusie 1, waarbij de container is
15 voorzien van een afgifte-eenheid, omvattende ten minste een afgifteleiding, en waarbij de behuizing een kraan omvat om aan te sluiten op en/of samen te werken met de afgifteleiding, waarbij de afgifteleiding bij voorkeur een wegwerpbare leiding is.
10. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij
20 de behuizing een koelinrichting omvat voor het koelen van ten minste een deel van de wand van de houder, bij voorkeur voor het contact-koelen van een deel van ten minste het schoudergedeelte van de container.
11. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de houder in hoofdzaak komvormig is, bij voorkeur semi-bolvormig, waarbij de
25 container wordt ondersteund door ten minste een deel van de wand van de houder, waarbij de houder bij voorkeur is voorzien van een inkeping aan een ondereinde daarvan voor het ontvangen van het halsgedeelte van de container.
12. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de container is voorzien van een sluitring welke de hals van de container sluit, en
30 waarbij bij voorkeur de sluitring en/of het halsgedeelte van de container is of zijn voorzien van de ten minste éne gas-inlaatopening voor het onder druk inbrengen

van een fluïdum, bij voorkeur gas, in de container, bij voorkeur tussen een binnen- en een buitencontainer van de container, waarbij bij voorkeur een drank klep is voorzien in en/of op de afgifteopening voorzien door de sluitring.

13. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij
5 een adapter is voorzien aan het halsgedeelte van de container, waarbij bij voorkeur de adapter een adapterfitting over ten minste een deel van het halsgedeelte van de container is, waarbij de adapter ten minste een deel van een afgifte-eenheid omvat, omvattende ten minste een afgifteleiding, waarbij de afgifteleiding aan een eerste
10 einde is voorzien van een aansluiting of afgifte-adapter om aan te sluiten met de uitstroomopening of een drankafgifte klep voorzien in de uitstroomopening, en aan een tegenoverliggende einde is voorzien van een drank afgifteopening, welke drank afgifteopening bij voorkeur wordt voorzien door een doseerklep integraal met of verbonden met de afgifteleiding, meer bij voorkeur wegwerpbaar met de
afgifteleiding.

15 14. Drankafgifte samenstel volgens conclusie 12 of 13, waarbij de adapter is ingericht om een gasaansluiting van de dispenser met de ten minste éne gas-inlaatopening aan te sluiten.

15. Drankafgifte samenstel volgens één der conclusies 12 - 14, waarbij de container een BIC-type container is, omvattende een buitencontainer en een
20 binnencontainer, waarbij ten minste één gas-inlaatopening is voorzien in het halsgedeelte van de container, in een perifeer wandgedeelte van de container, bij voorkeur in een perifeer wandgedeelte van het halsgedeelte van de buitencontainer, welke in een ruimte tussen de binnen- en buitencontainer opent, waarbij de adapter ten minste de ten minste éne gas-inlaatopening dekt, en is
25 voorzien van ten minste één adapteropening welke zich radiaal buitenwaarts uitstrekt, in fluïdumcommunicatie met de ten minste éne gas-inlaatopening, en in fluïdumverbinding met een gasaansluiting van de dispenser, waarbij de behuizing is voorzien van een toevoer voor gas onder druk, in het bijzonder een gascompressor, verbonden met de gasaansluiting.

30 16. Drankafgifte samenstel volgens één der conclusies 12-15, waarbij de houder is voorzien van een inkeping aan een einde daarvan voor het ontvangen van

het halsgedeelte van de container met de adapter, waarbij de adapter en de inkeping bij voorkeur zijn voorzien van oriëntatie bepalingselementen, zodanig dat de positie van de adapter binnen de inkeping wordt bepaald in een gewenste oriëntatie ten opzichte van een gasaansluiting van de dispenser.

- 5 17. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de dispenser is voorzien van ten minste één gasaansluiting, beweegbaar ten opzichte van de container en/of de houder, bij voorkeur in hoofdzaak radiaal ten opzichte van een longitudinale as van het halsgedeelte van de container.
18. Drankafgifte samenstel volgens conclusie 17, waarbij de gasaansluiting
- 10 mechanisch beweegbaar is, bij voorkeur elektromechanisch.
19. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de dispenser is voorzien van ten minste één waarneemelement, beweegbaar ten opzichte van de container en/of houder, waarbij het waarneemelement aangrijpt op de container en/of een adapter gemonteerd op de container voor het waarnemen
- 15 van een correcte positie van de container en/of adapter in de houder, waarbij het waarneemelement een deel kan zijn van een grendelement of een grendelement kan vormen voor het vergrendelen van de container in de dispenser.
20. Drankafgifte samenstel volgens conclusie 18 en 19, waarbij het waarneemelement en de ten minste één gasaansluiting zodanig zijn gekoppeld dat
- 20 de gasaansluiting slechts op een uitgestrekte toestand kan worden gebracht als:
 - het waarneemelement een correcte positie detecteert van de container en/of een adapter daarvan; of
 - het waarneemelement een correcte positie detecteert van de container of een adapter daarvan of geen container of adapter daarvan waarneemt.
- 25 21. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij de houder is voorzien van een kanaal dat zich uitstrekt van een inkeping nabij een onderinde daarvan opwaarts in een wandgedeelte van de houder, waarbij een afgifteleiding zich binnen het kanaal uitstrekt.
22. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij
- 30 de container een BIC-type container is, omvattende een buitencontainer en een binnencontainer, waarbij de binnencontainer in hoofdzaak is gevuld met een drank

en waarbij de binnencontainer ten minste een schoudergedeelte heeft welke flexibel is, zodanig dat de drank het schoudergedeelte van de binnencontainer tegen een binnenvlak van de buitencontainer binnen de houder duwt.

23. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij
5 verlichting is voorzien voor het verlichten van ten minste een deel van het deksel, waarbij de verlichting bij voorkeur is ingericht in de behuizing, waarbij licht wordt uitgezonden in het deksel van een ondereinde daarvan welke op de behuizing rust.

24. Drankafgifte samenstel volgens één der voorgaande conclusies, waarbij
10 de container in de dispenser geplaatst is met een halsgedeelte naar beneden gekeerd, zodanig dat ten minste een gedeelte van de container omvattende het halsgedeelte ontvangen wordt in de houder, welk gedeelte bij voorkeur een deel heeft dat zich uitstrekt nabij en/of in contact is met een wand van de houder, bij voorkeur ten minste een deel van een schoudergedeelte van de container.

25. Drankcontainer voor gebruik in een drankafgifte samenstel volgens één
15 der voorgaande conclusies.

26. Drankcontainer volgens conclusie 25, waarbij de container een BIC-type
container is, bij voorkeur integraal blaasgevormd uit een voorvorm samenstel gemaakt van kunststof, met meer voorkeur gemaakt van een kristallijn of semikristallijn kunststof zoals PET en/of PEN en/of PEF, waarbij de container is
20 voorzien van een adapter, bij voorkeur aan een halsgedeelte van de container, waarbij de adapter:


- aangesloten is met een gas-inlaatopening van de container en voorzien is van ten minste één adapteropening welke zich radiaal buitenwaarts uitstrekt, in
fluidumcommunicatie met de ten minste éne gas-inlaatopening; en/of
- 25 - voorzien is van een afgifte-eenheid omvattende ten minste één afgifteleiding; en/of
- voorzien is van een niet-cirkelvormige buitengedeelte voor specifieke oriëntatie van de adapter in de behuizing.

27. Container volgens conclusie 26, waarbij de adapter is voorzien van een
30 eindvlak met een sleuf of kanaal voor het ontvangen van een deel van een of de

afgifteleiding, bij voorkeur zodanig dat de container kan rusten op het eindvlak zonder beperking van de drankstroom door de afgifteleiding.

28. Samenstel van een drankafgifte samenstel volgens één der conclusies 1-24 en een toog, waarbij het afgifte samenstel is geplaatst op de toog, zodanig dat
5 ten minste het deel van de container welke zich boven de behuizing uitstrekt in hoofdzaak op ooghoogte van een persoon die bij de toog staat is geplaatst.

29. Drankdispenser voor het ontvangen van een drankcontainer, waarbij de dispenser een behuizing omvat dat voorzien is van een houder voor het ontvangen van ten minste een deel van de container, zodanig dat wanneer de container in de
10 dispenser is geplaatst ten minste een gedeelte van de container ontvangen is in de houder, waarbij een deksel is voorzien voor plaatsing over de container, dat een deel van de container dat zich uitstrekt buiten de houder omsluit, waarbij het deksel transparant is ten minste zodanig dat tijdens gebruik ten minste een significant deel van de container dat zich buiten de houder uitstrekt zichtbaar is
15 door genoemd deksel.

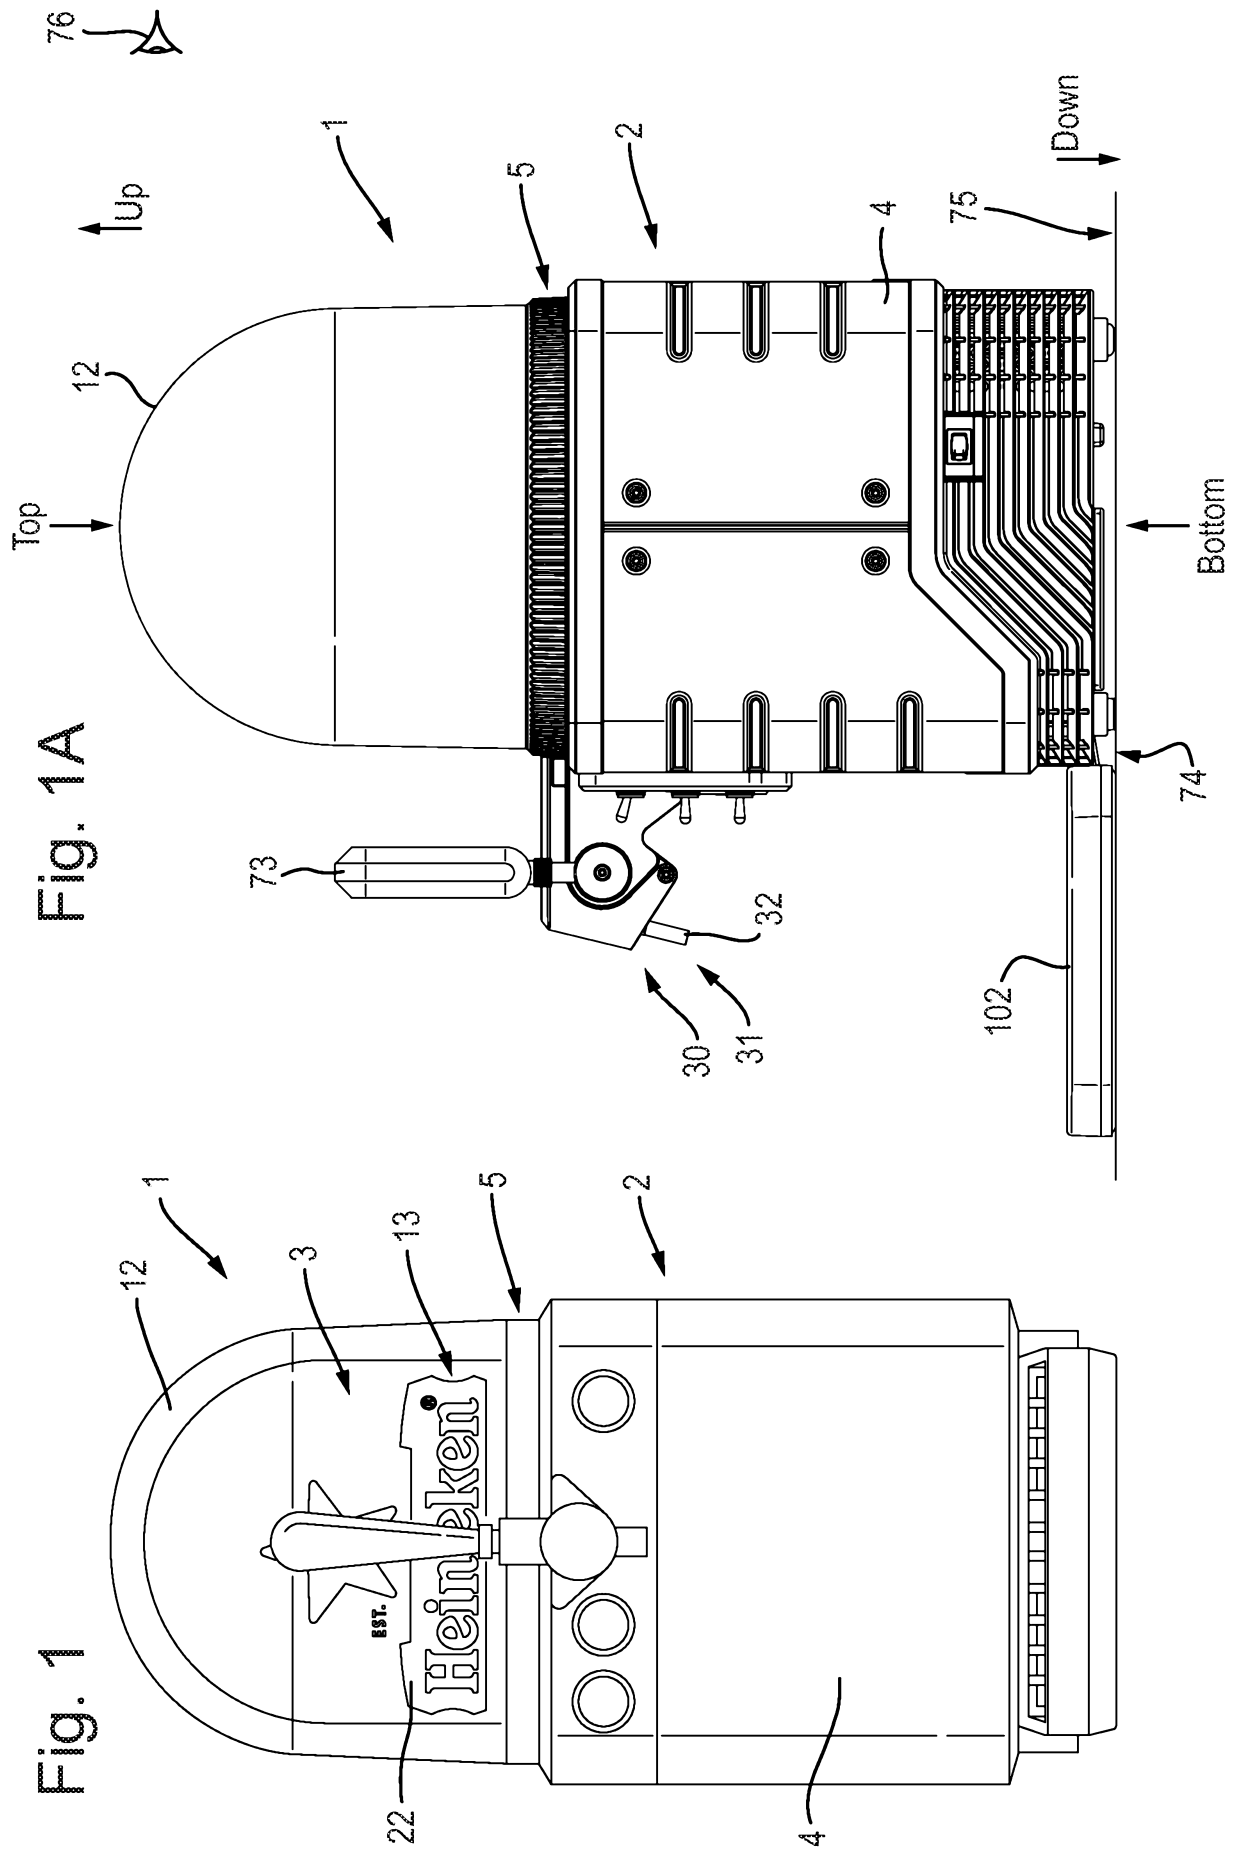

1A
9
E



Fig. 2A

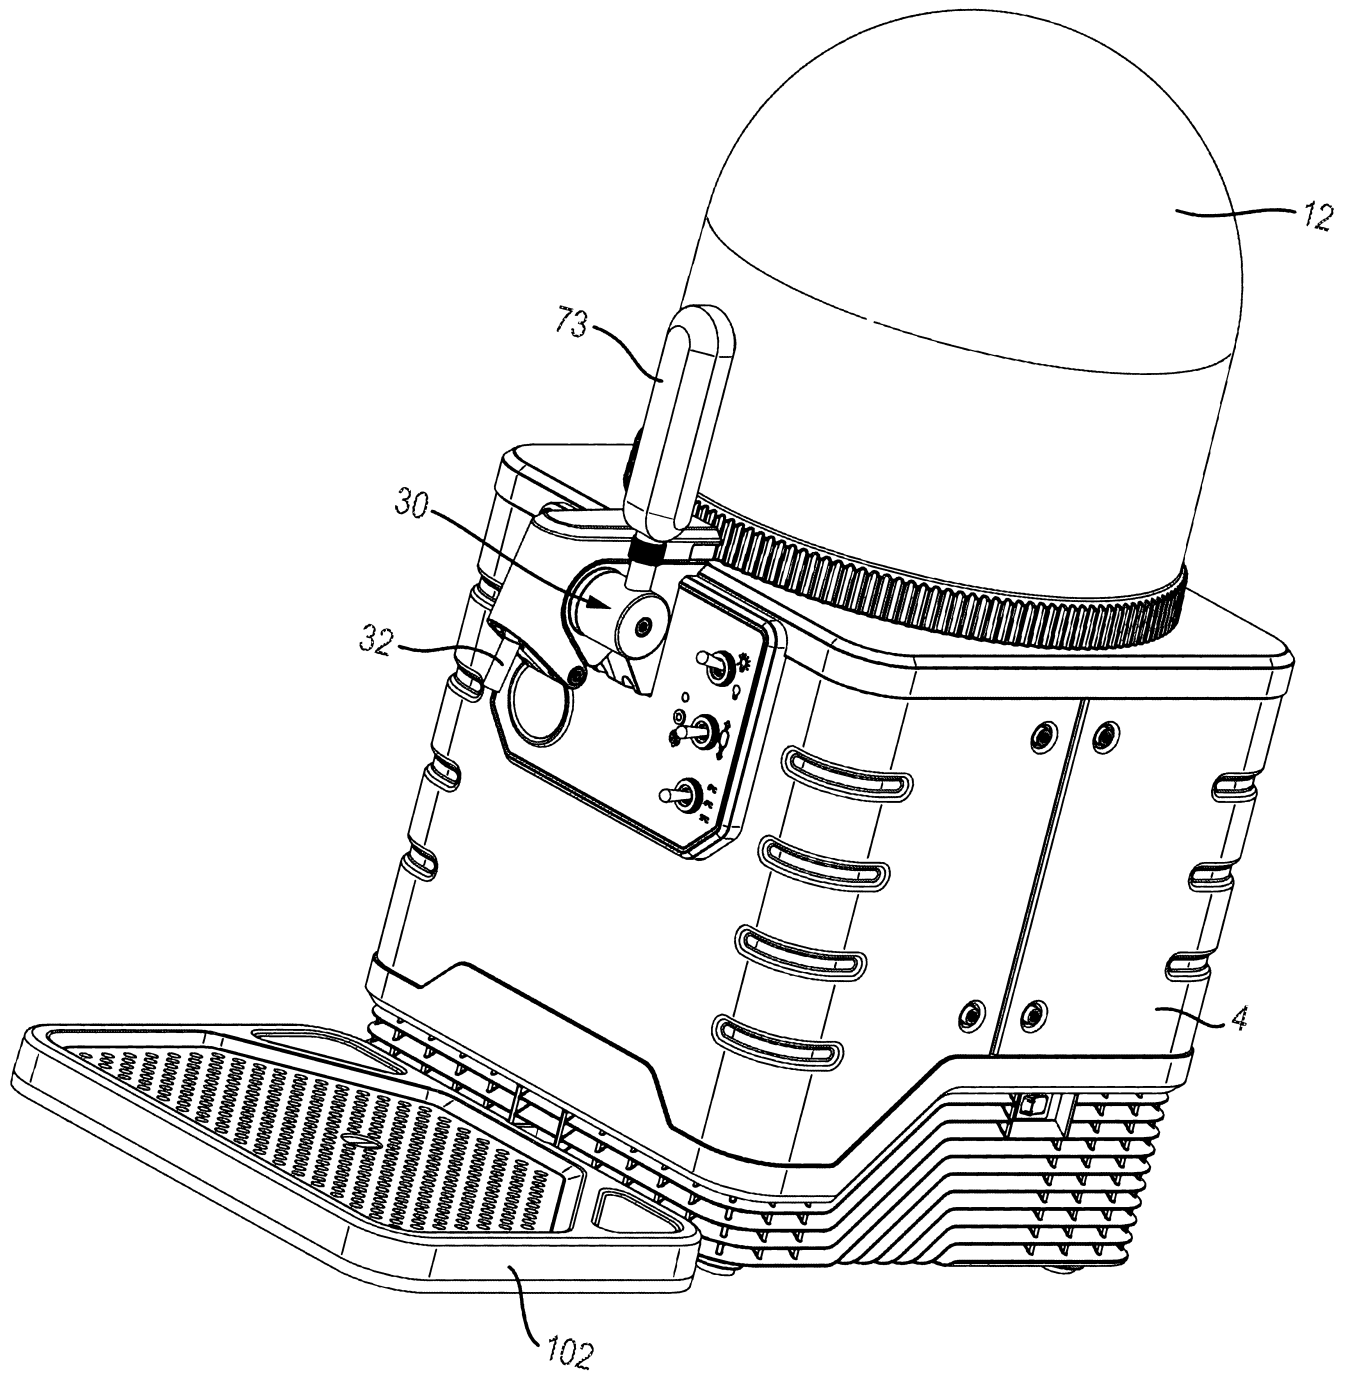


Fig. 2B

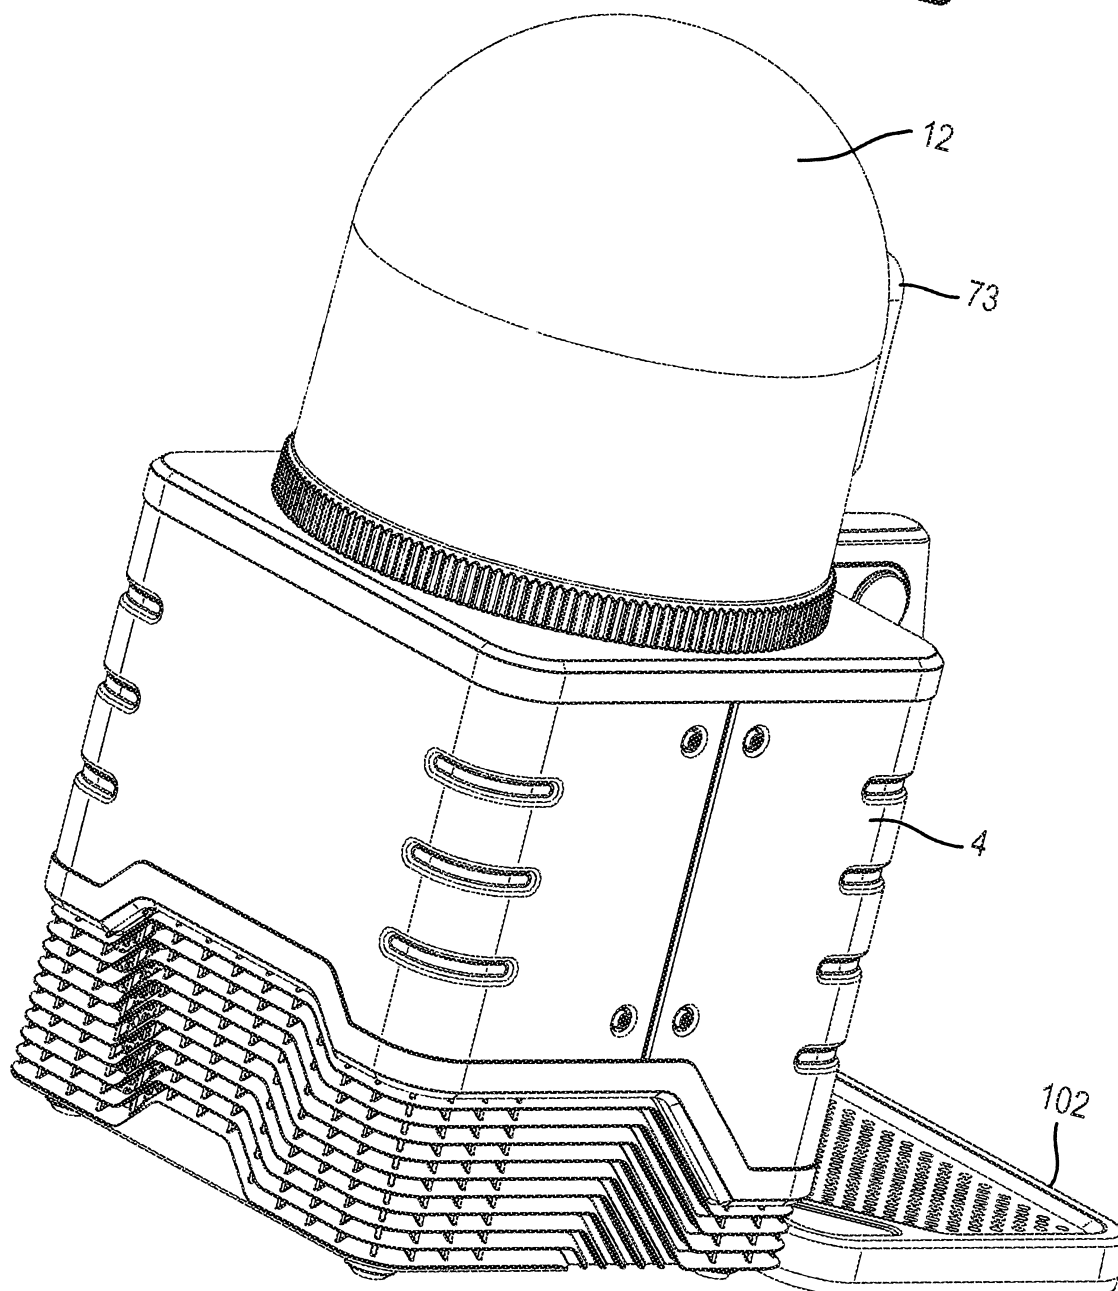


Fig. 3A

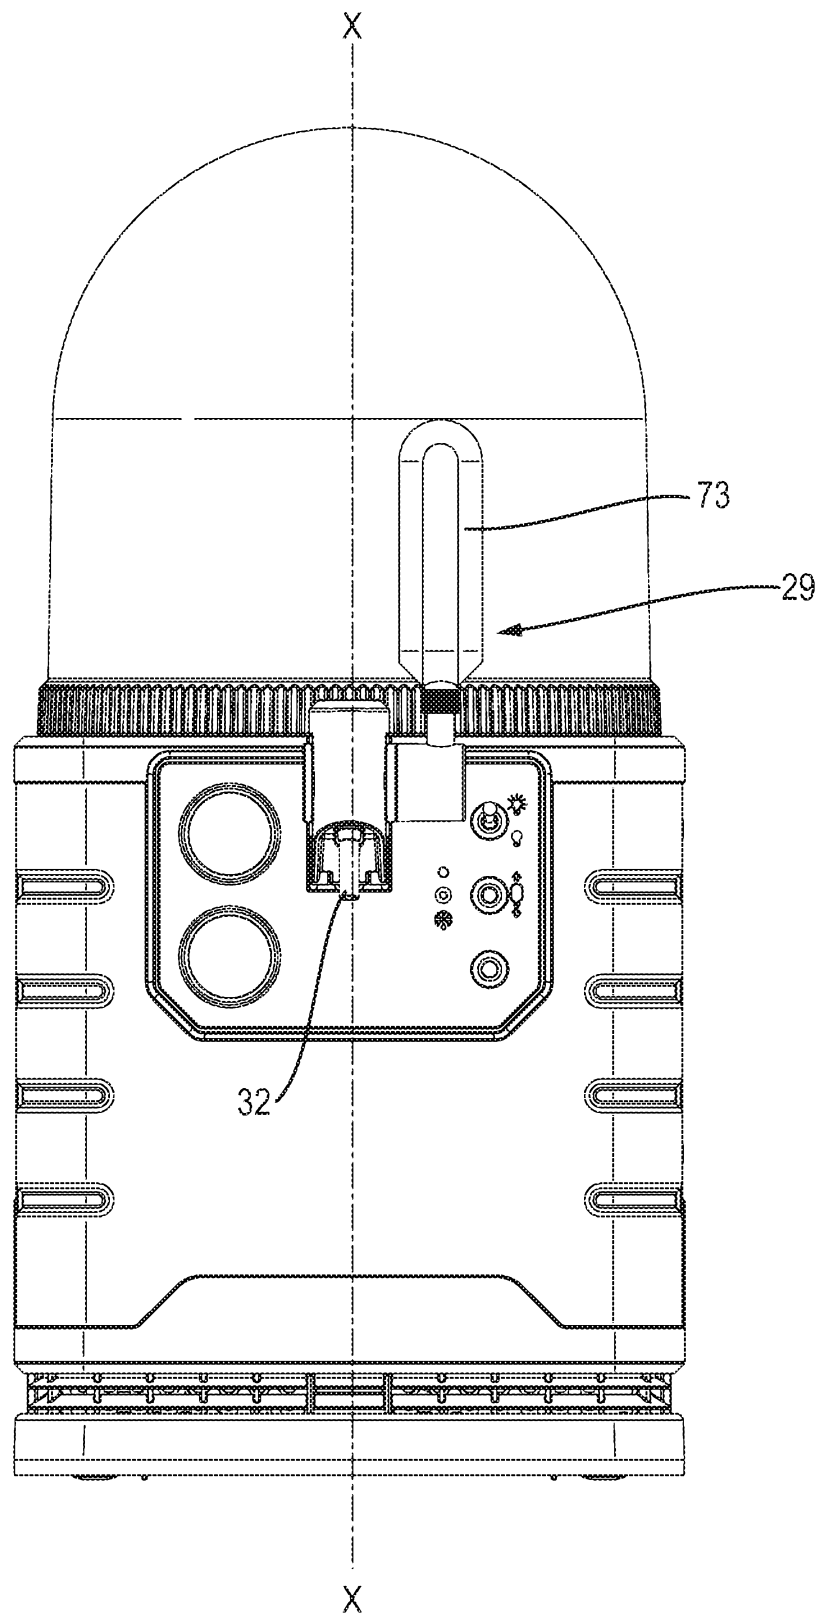


Fig. 3B

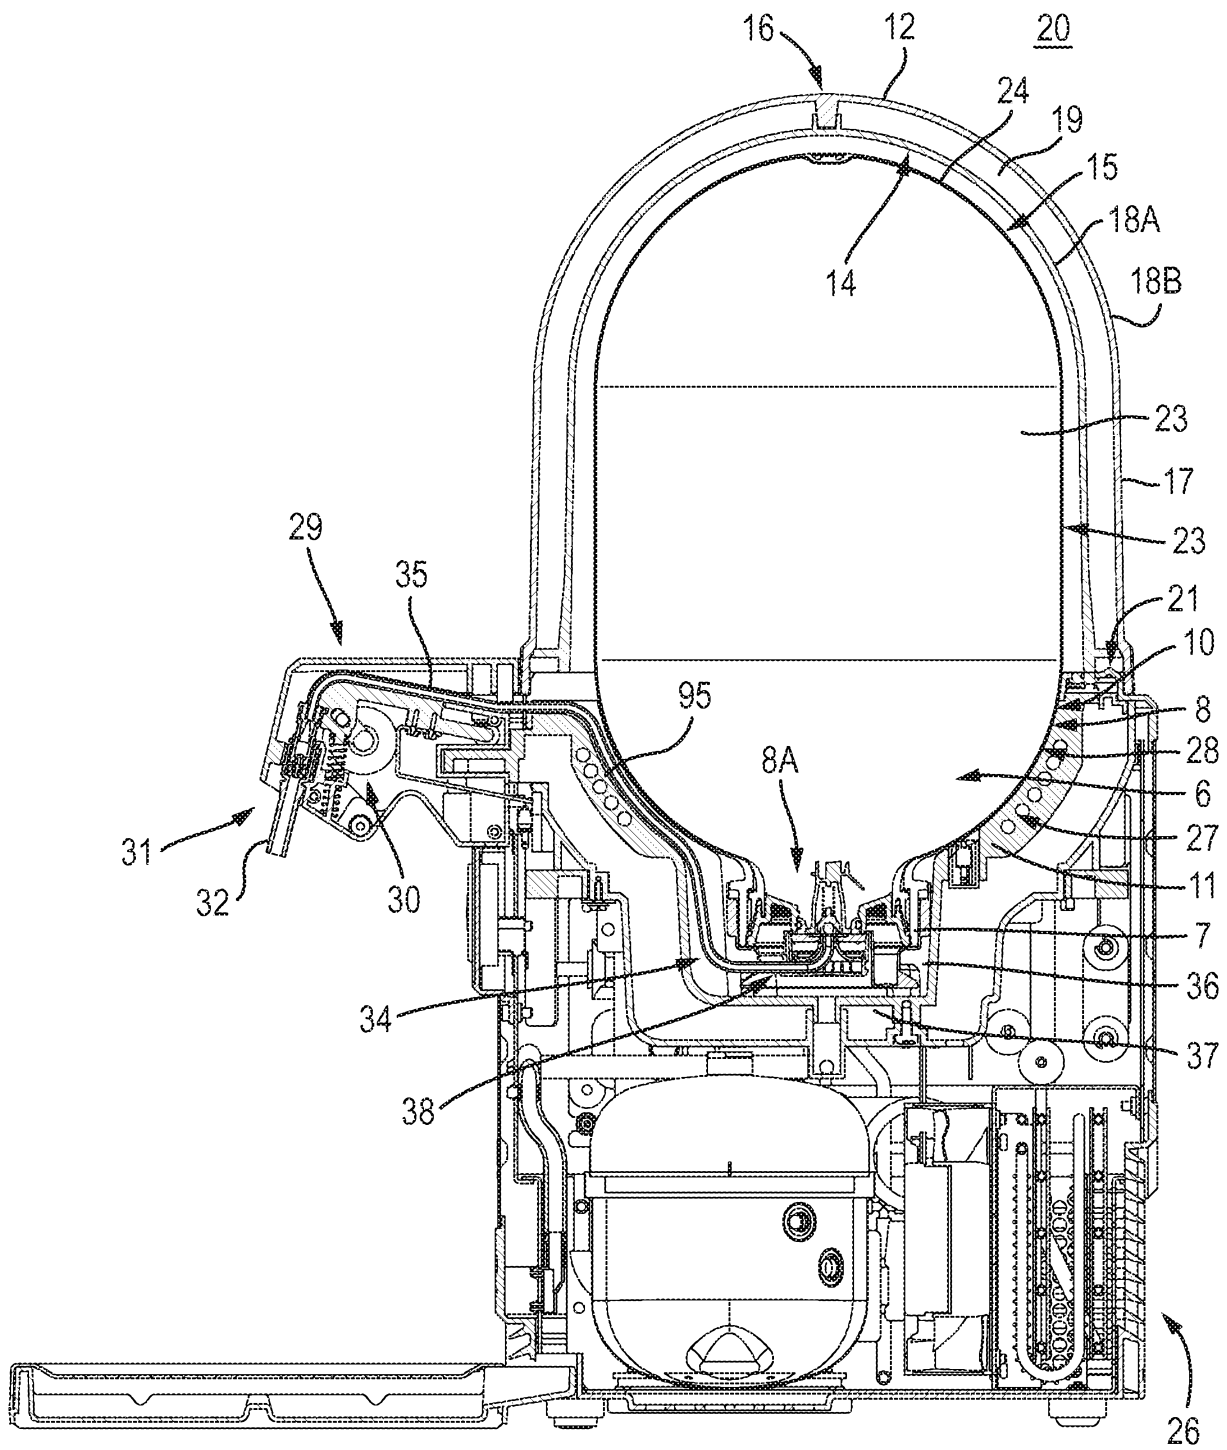


Fig. 4

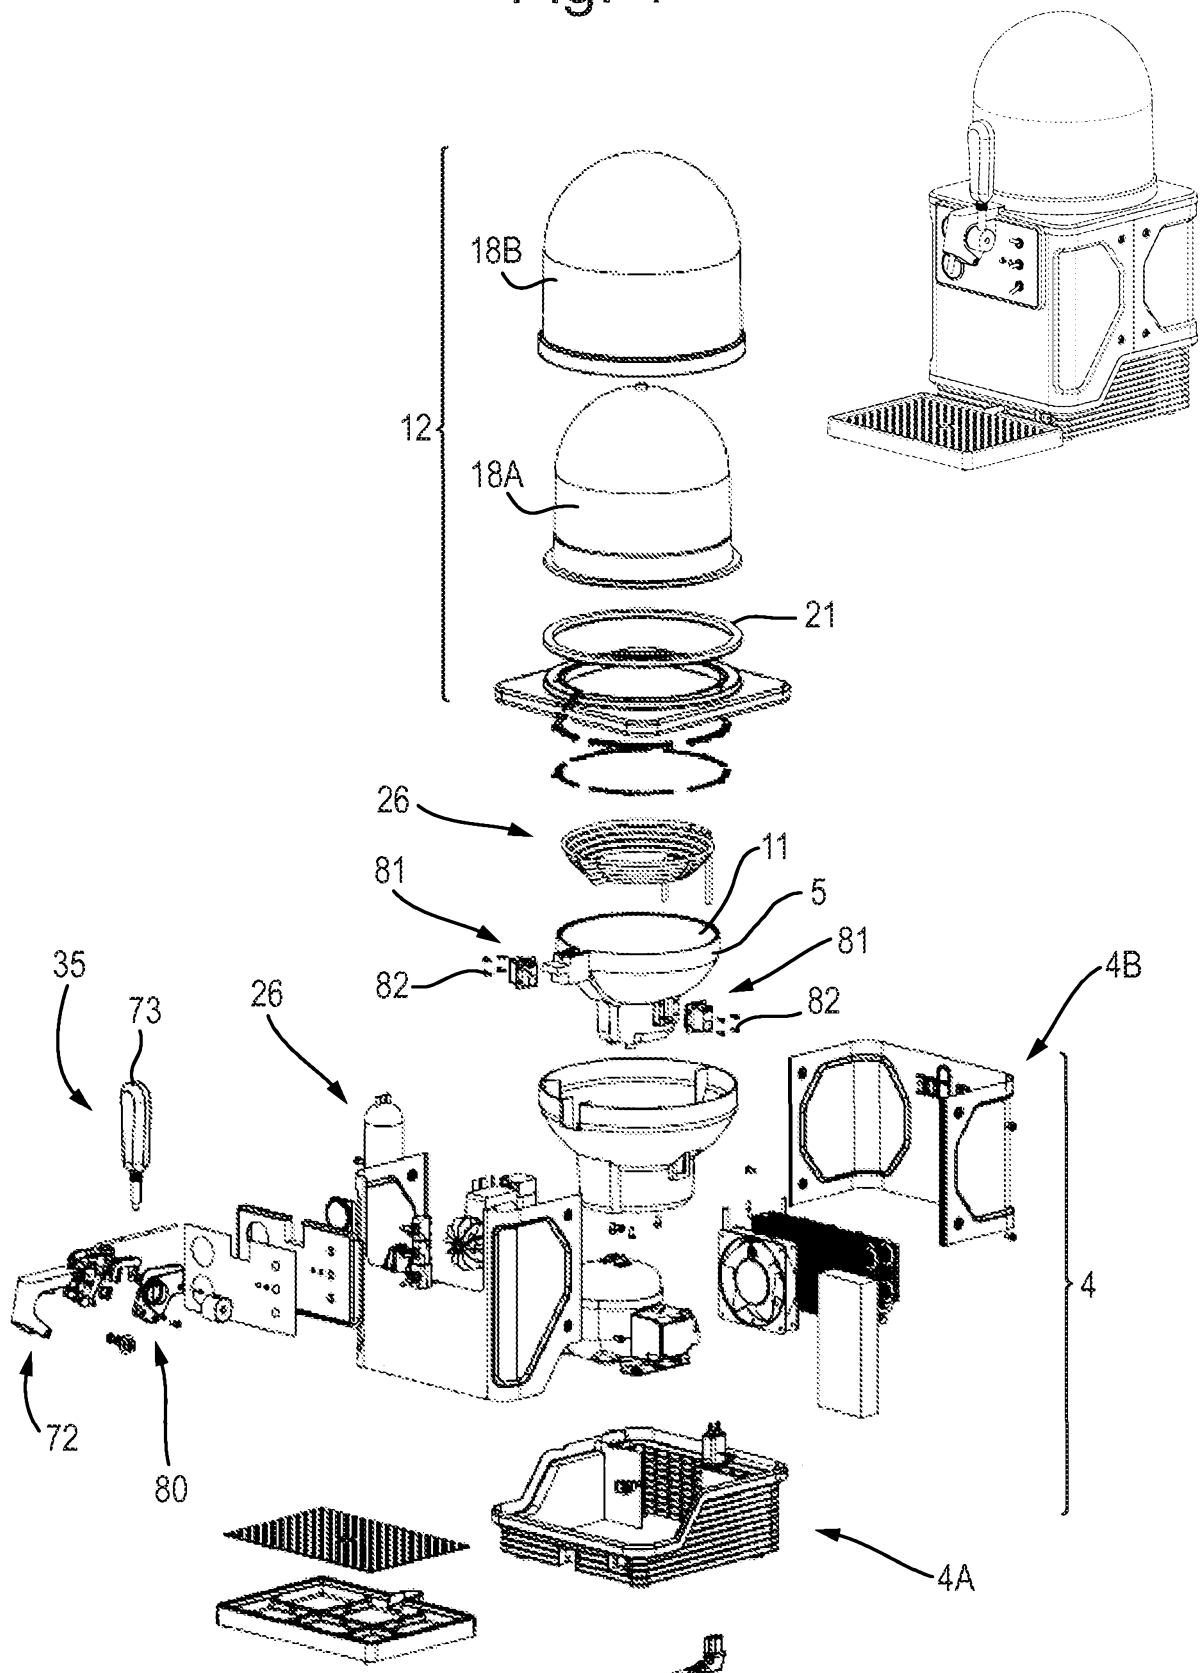


Fig. 5

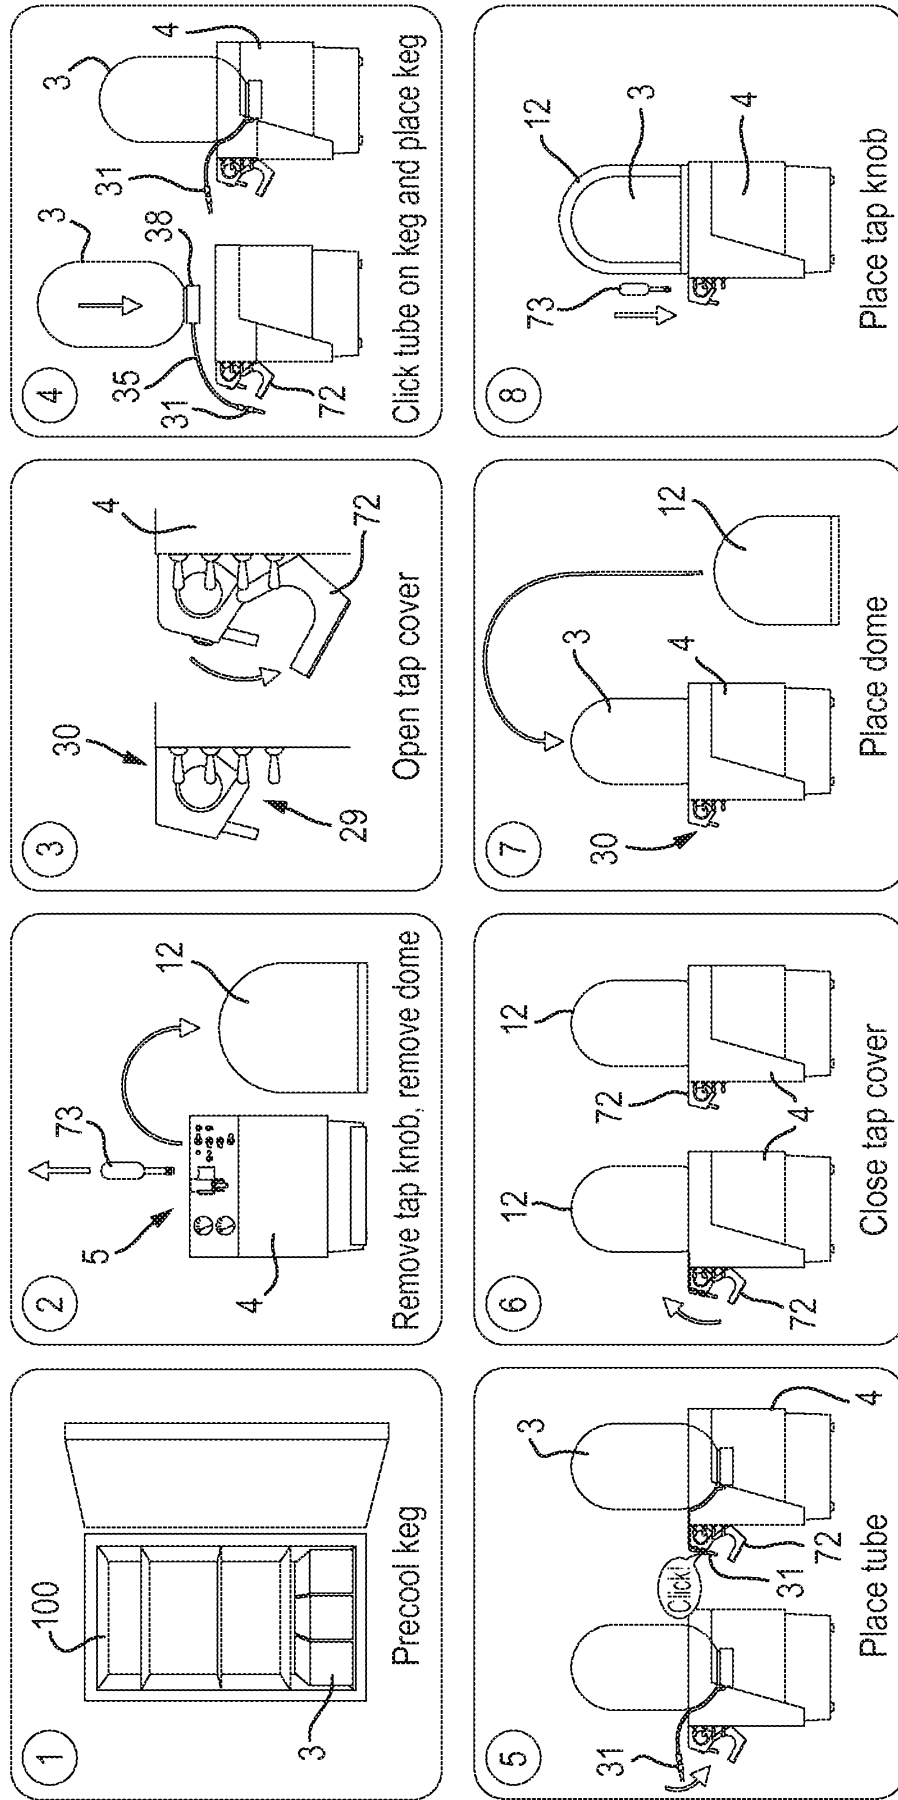


Fig. 6A

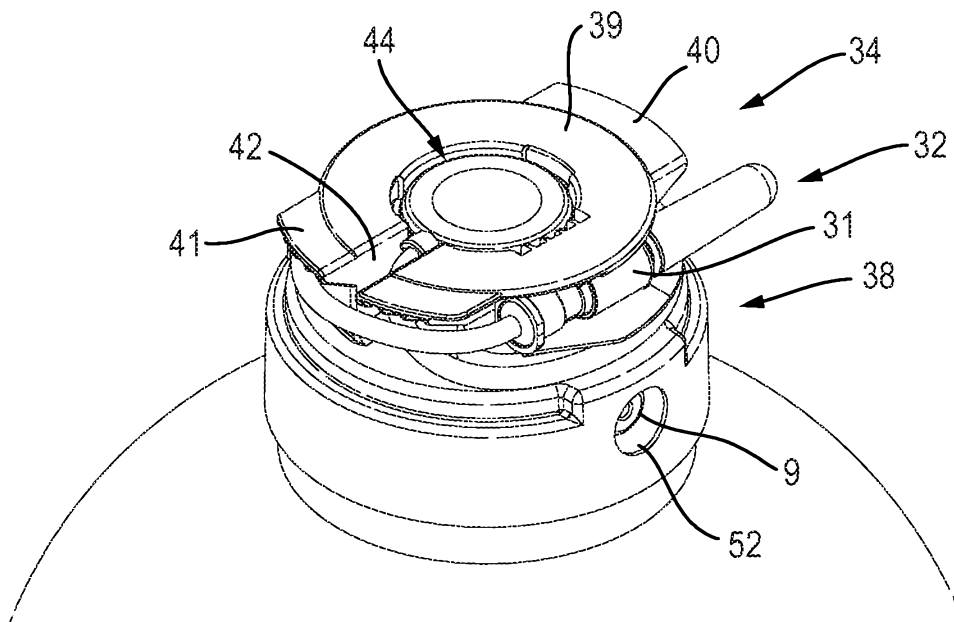


Fig. 6B


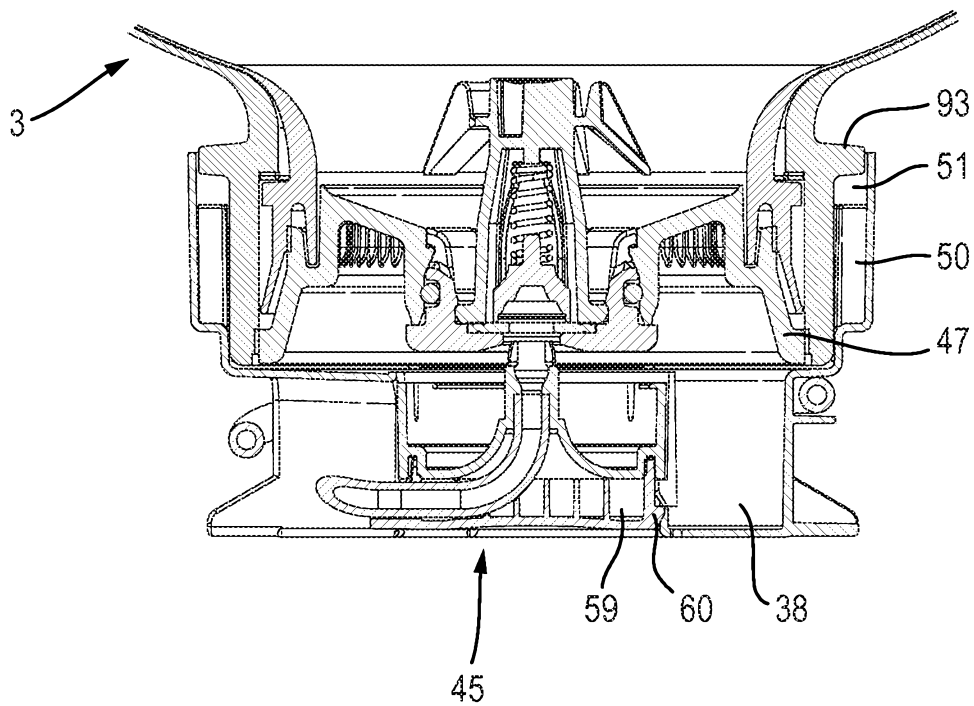


Fig. 6C

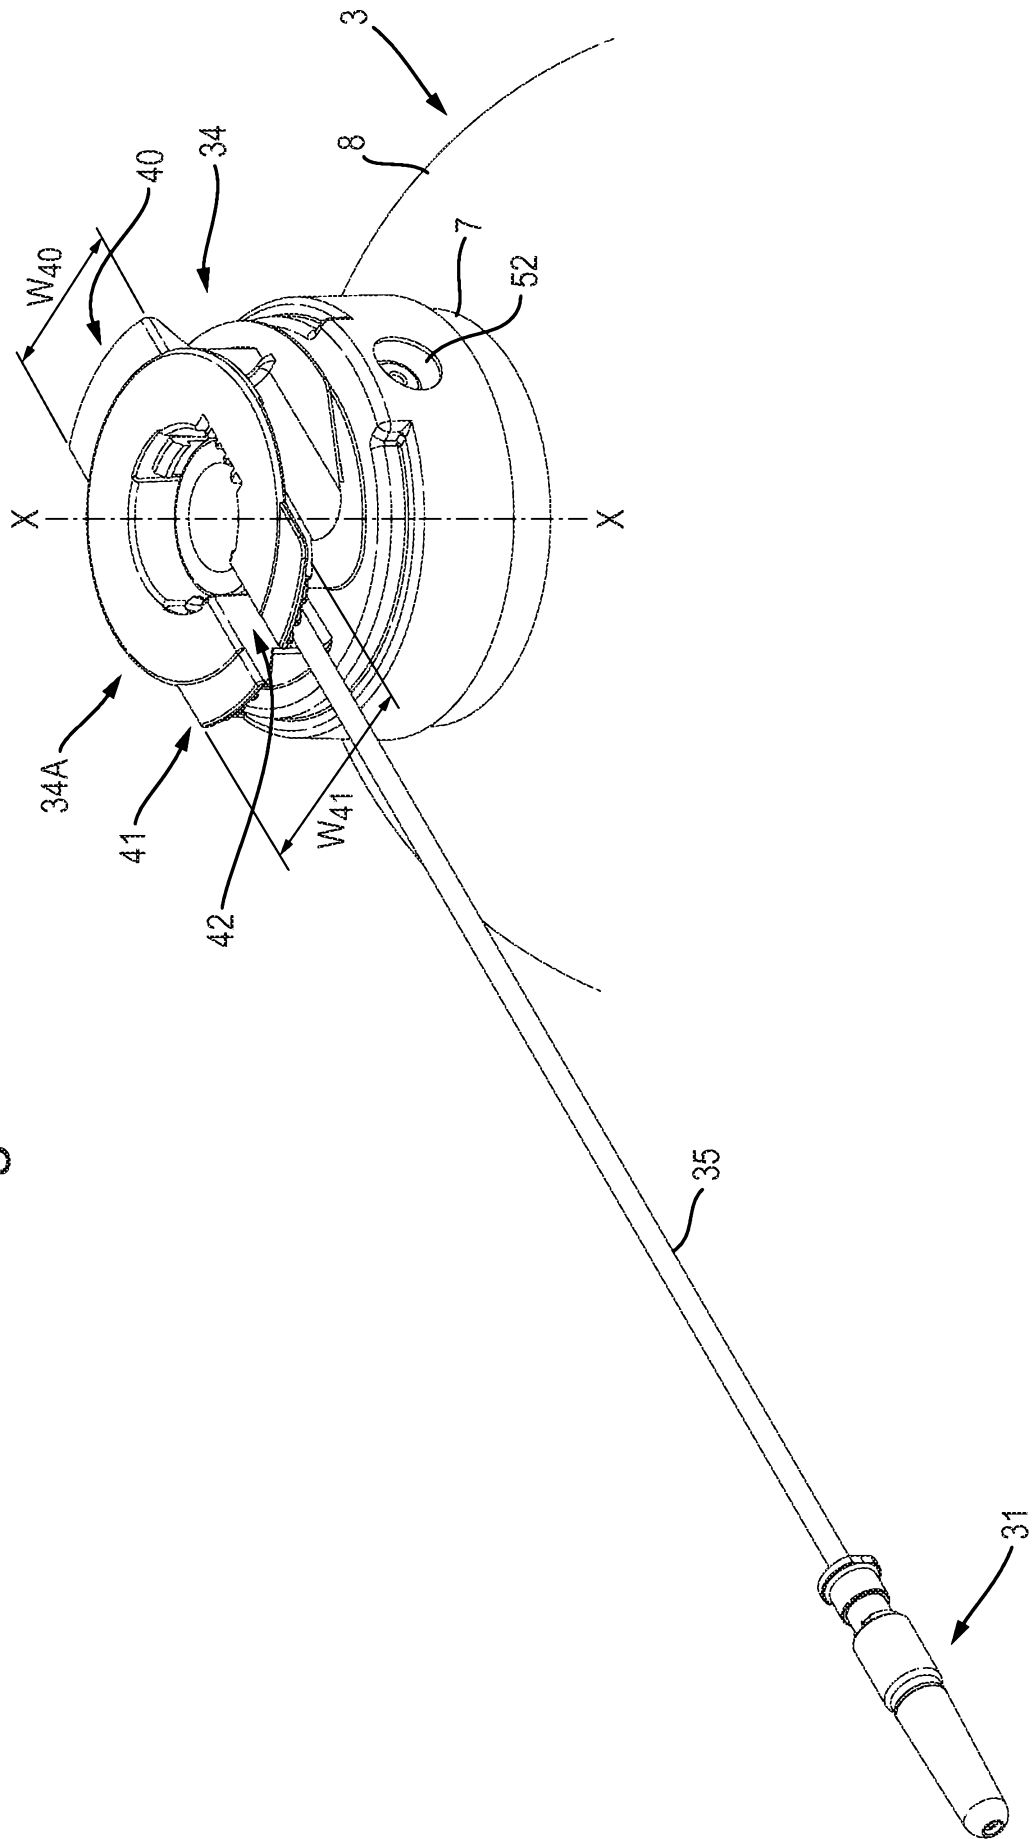

10/27

Fig. 6D

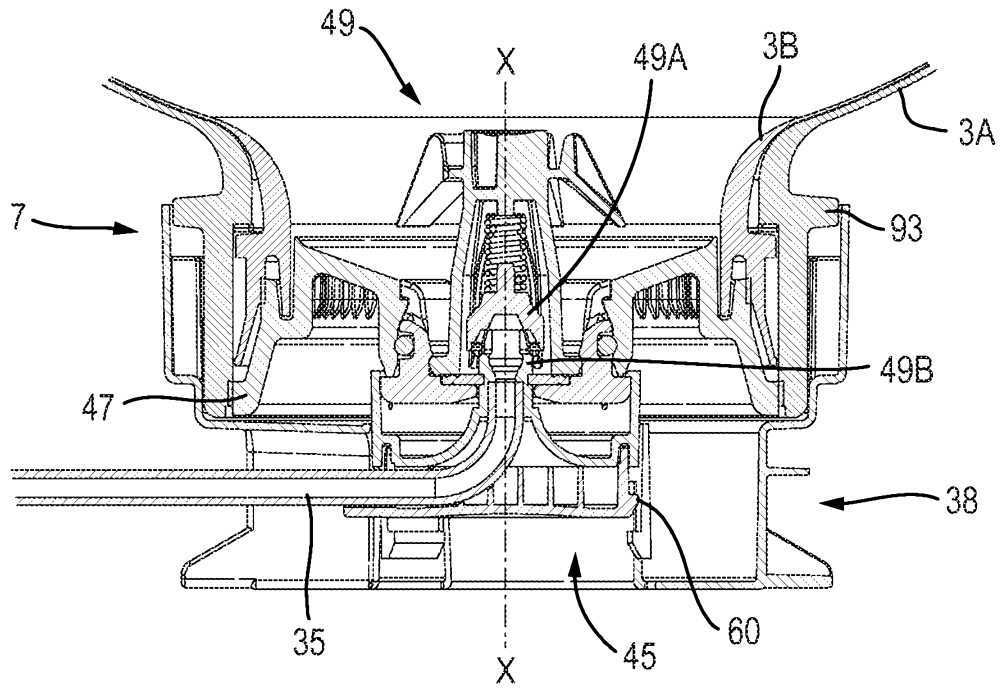
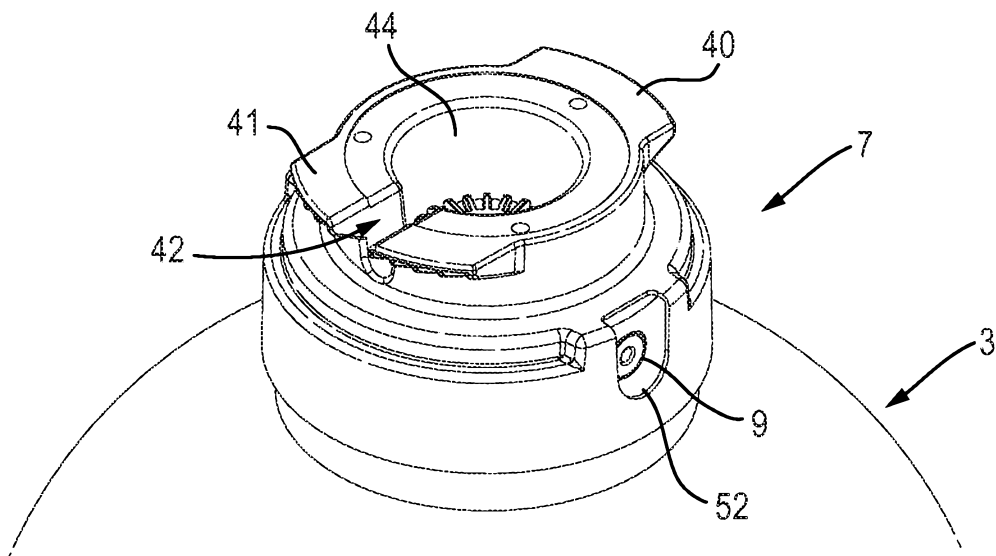


Fig. 6E



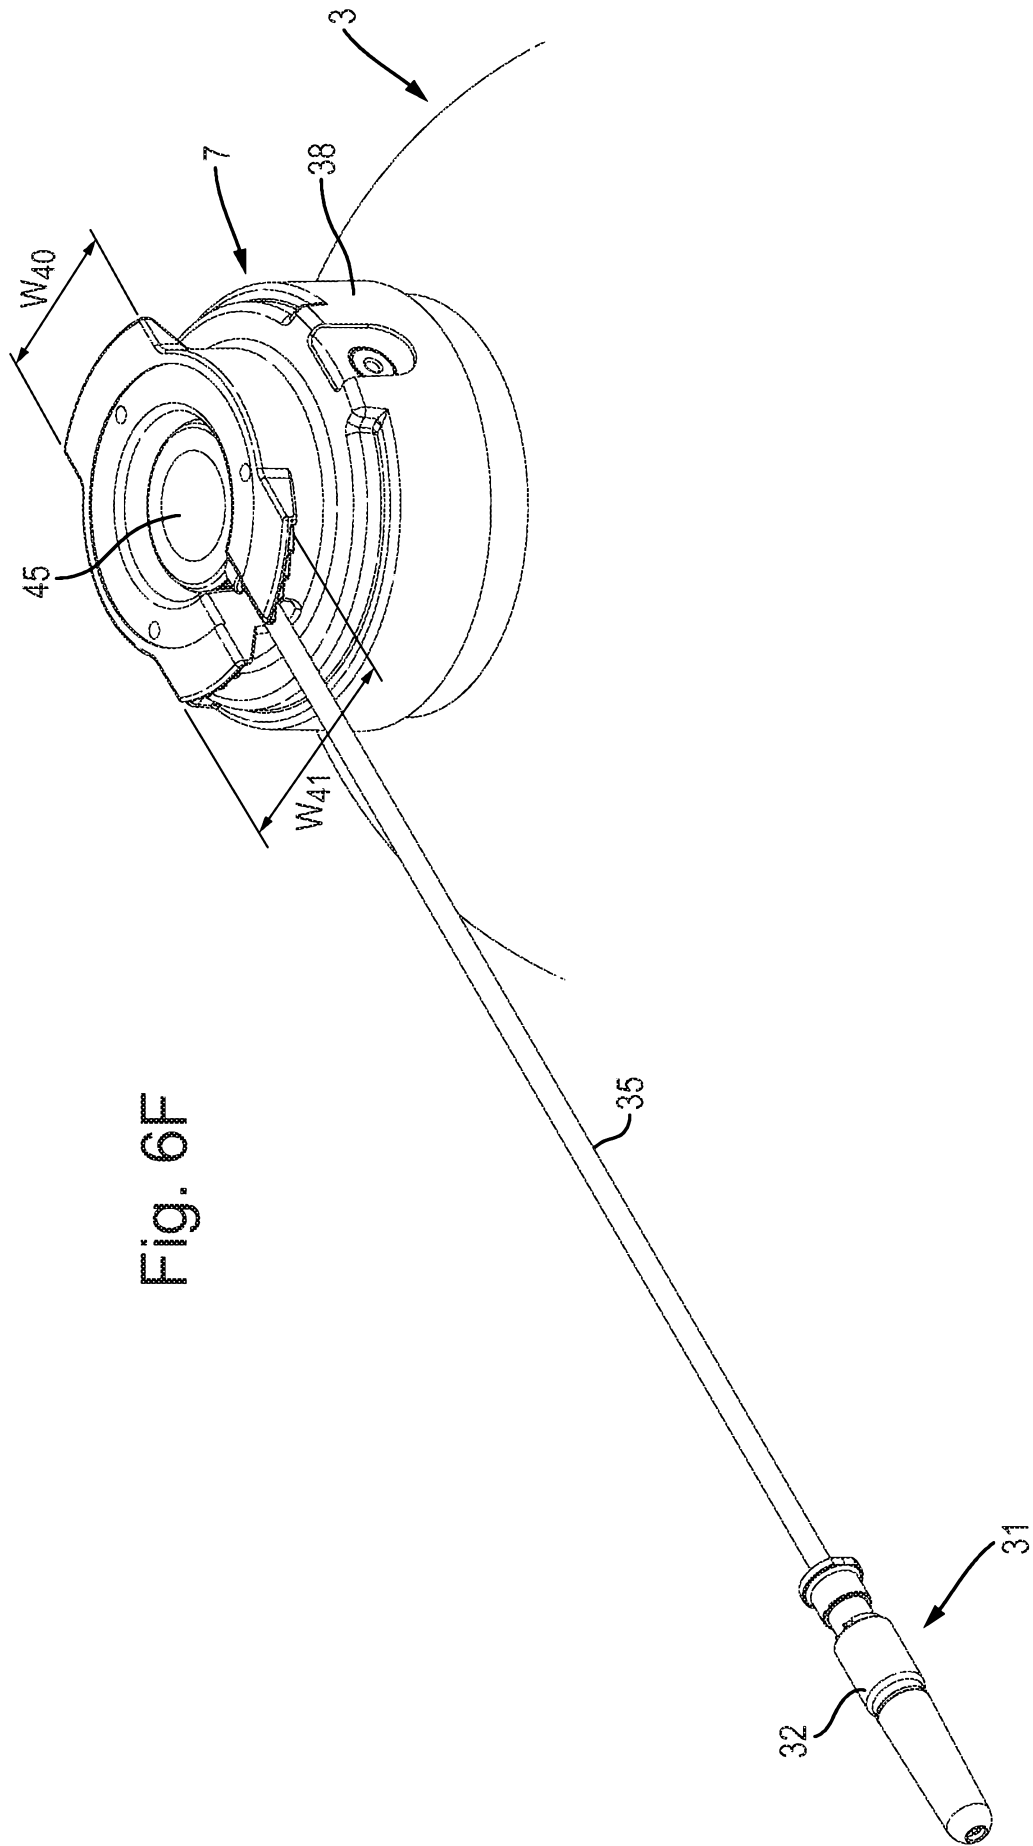


Fig. 6F

Fig. 6G

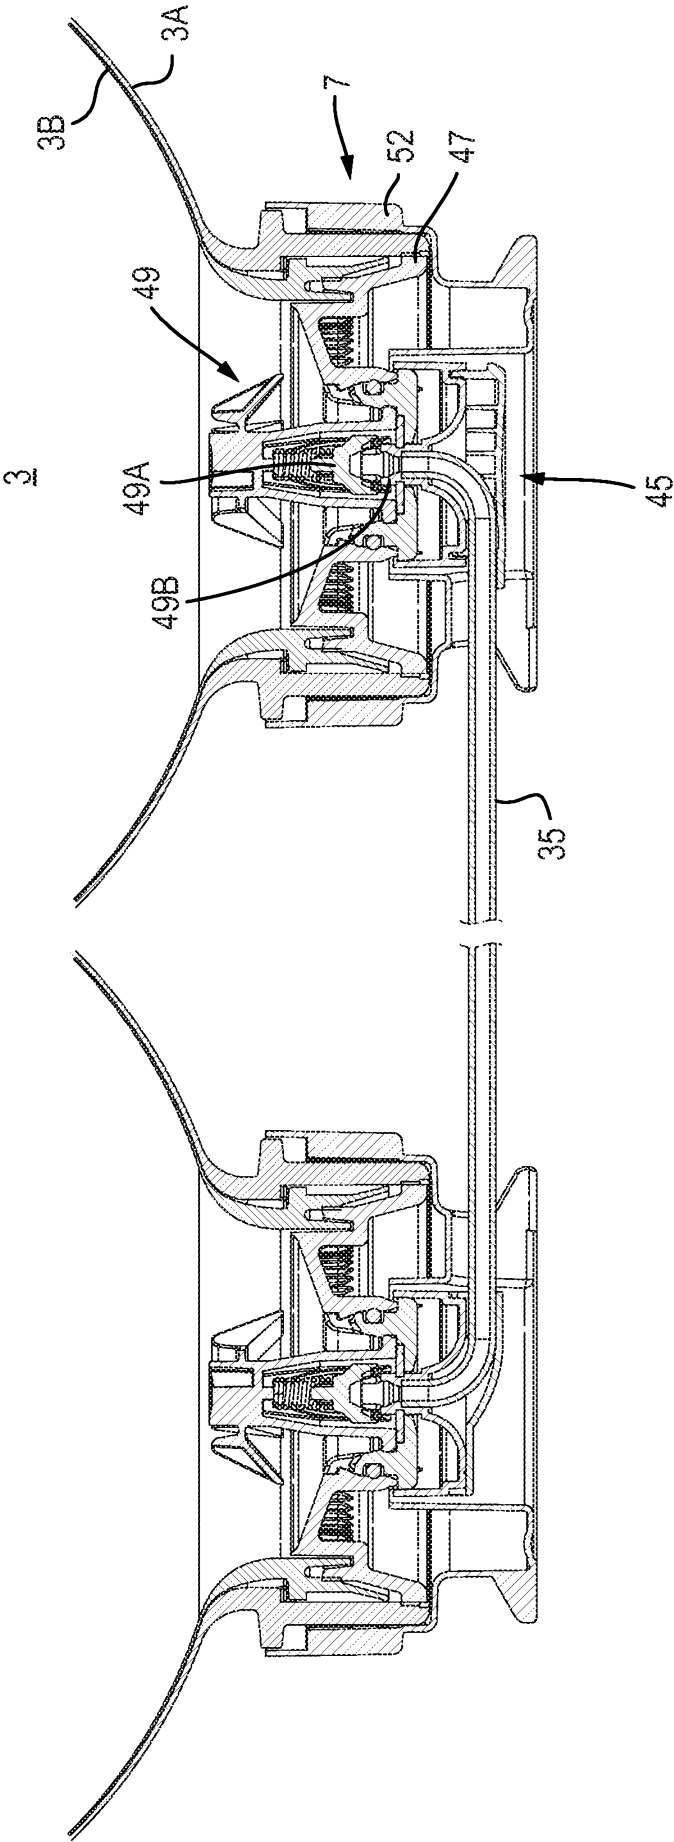


Fig. 6H

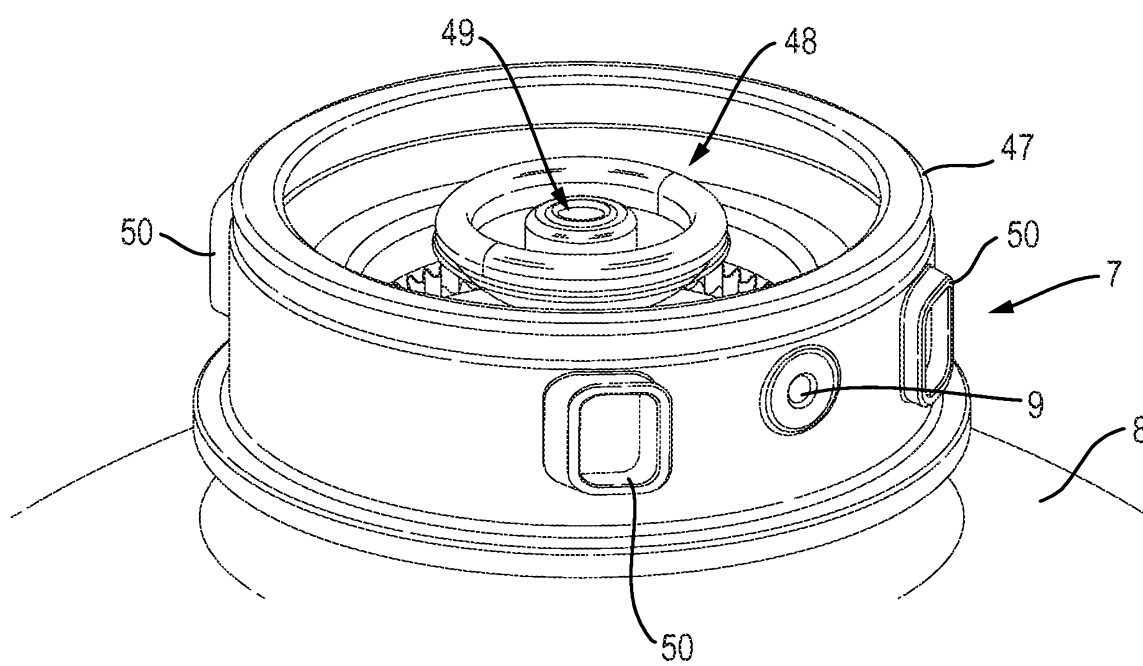


Fig. 7

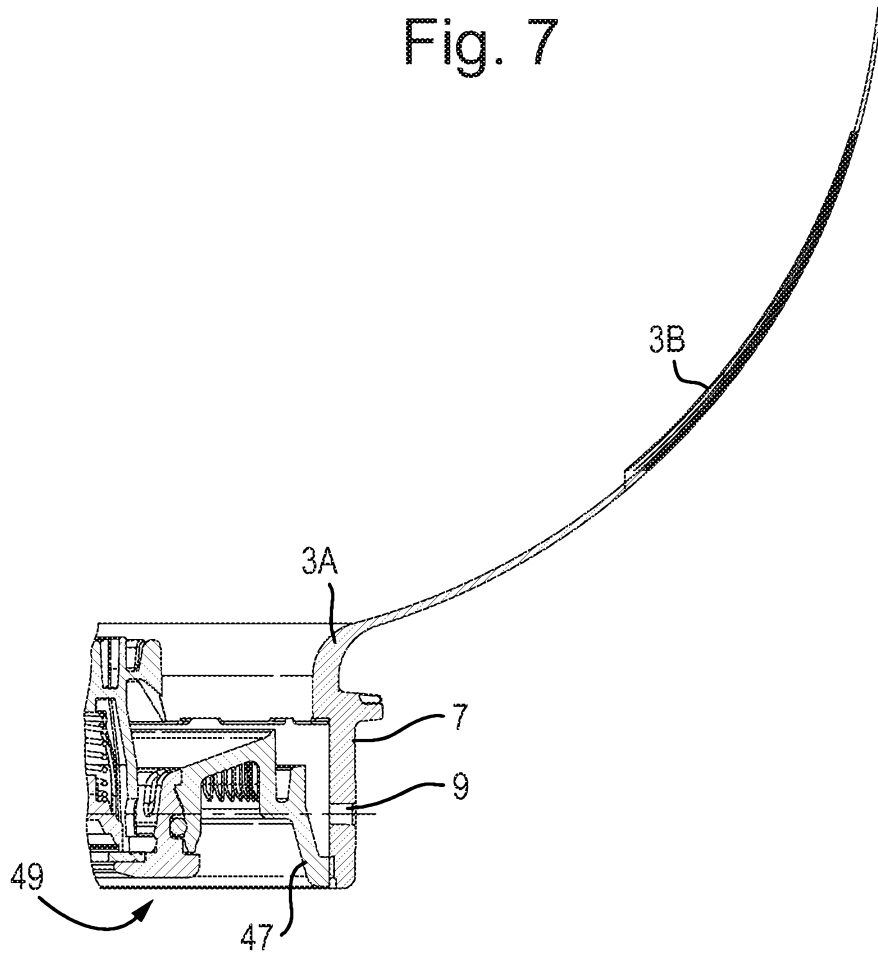


Fig. 8

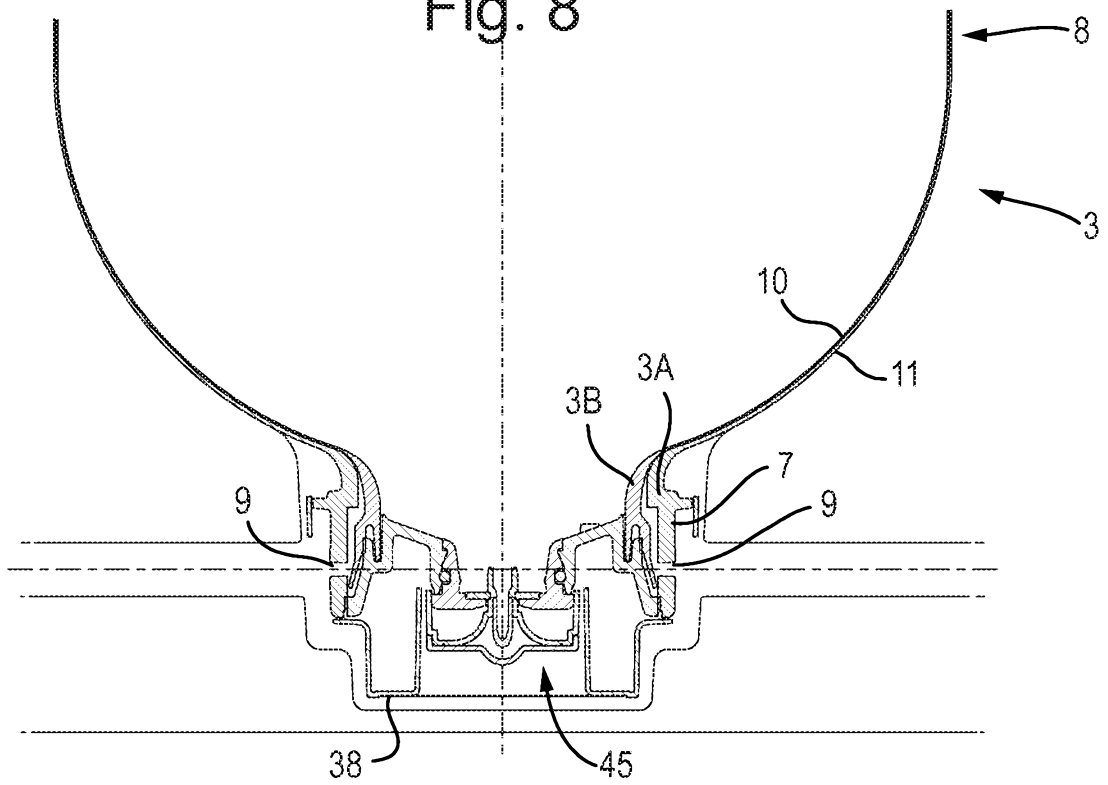


Fig. 9

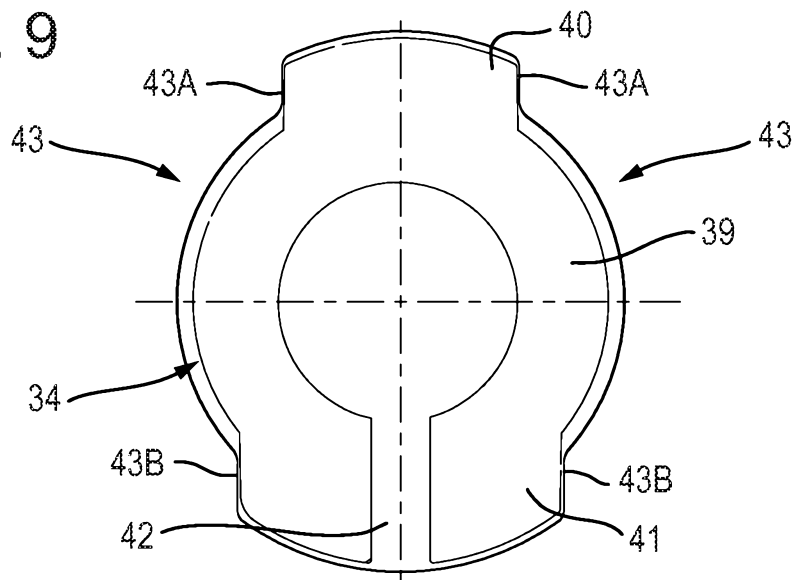


Fig. 10

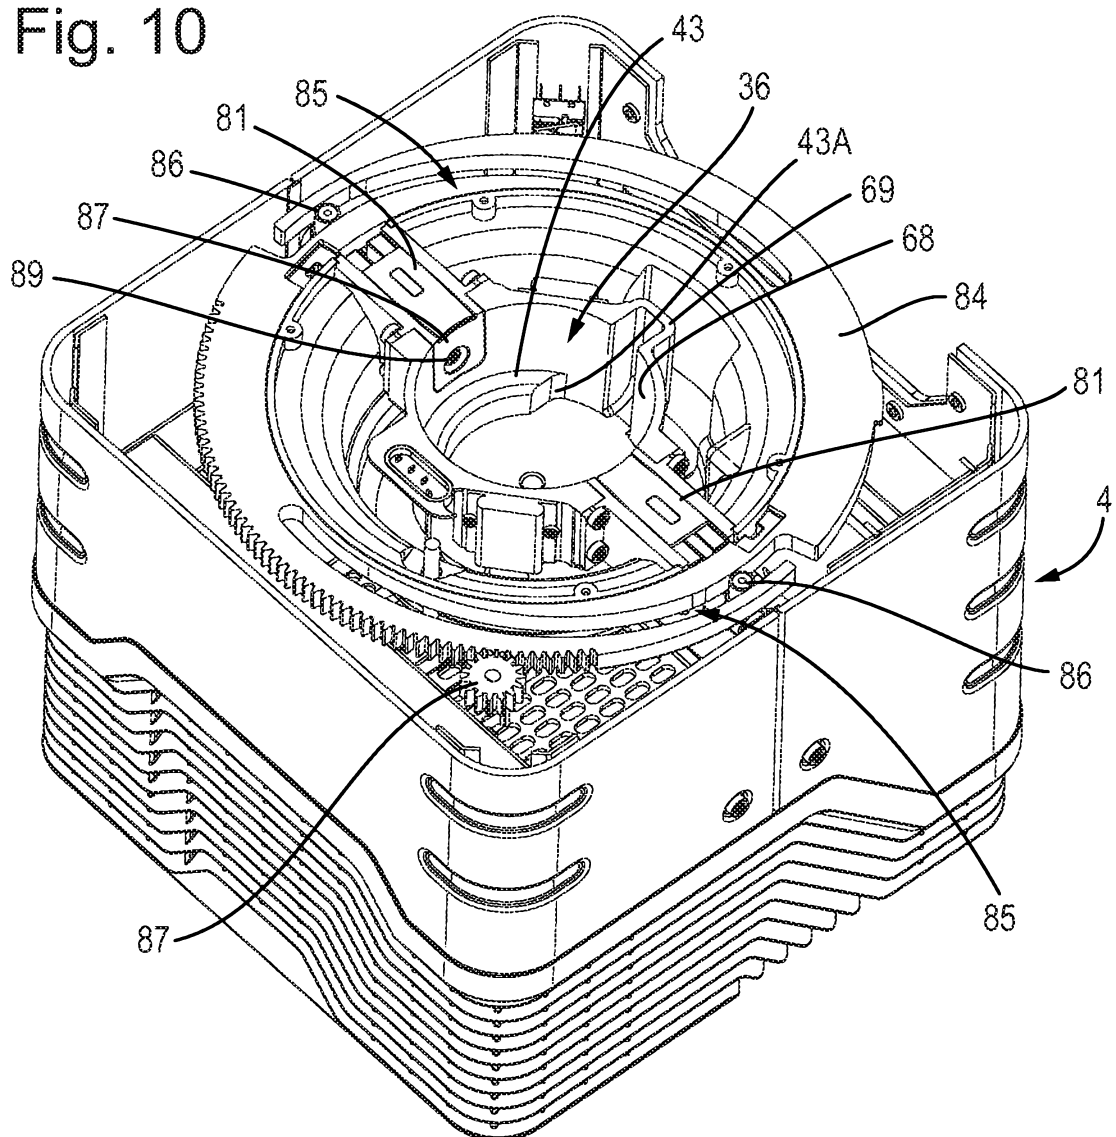


Fig. 11

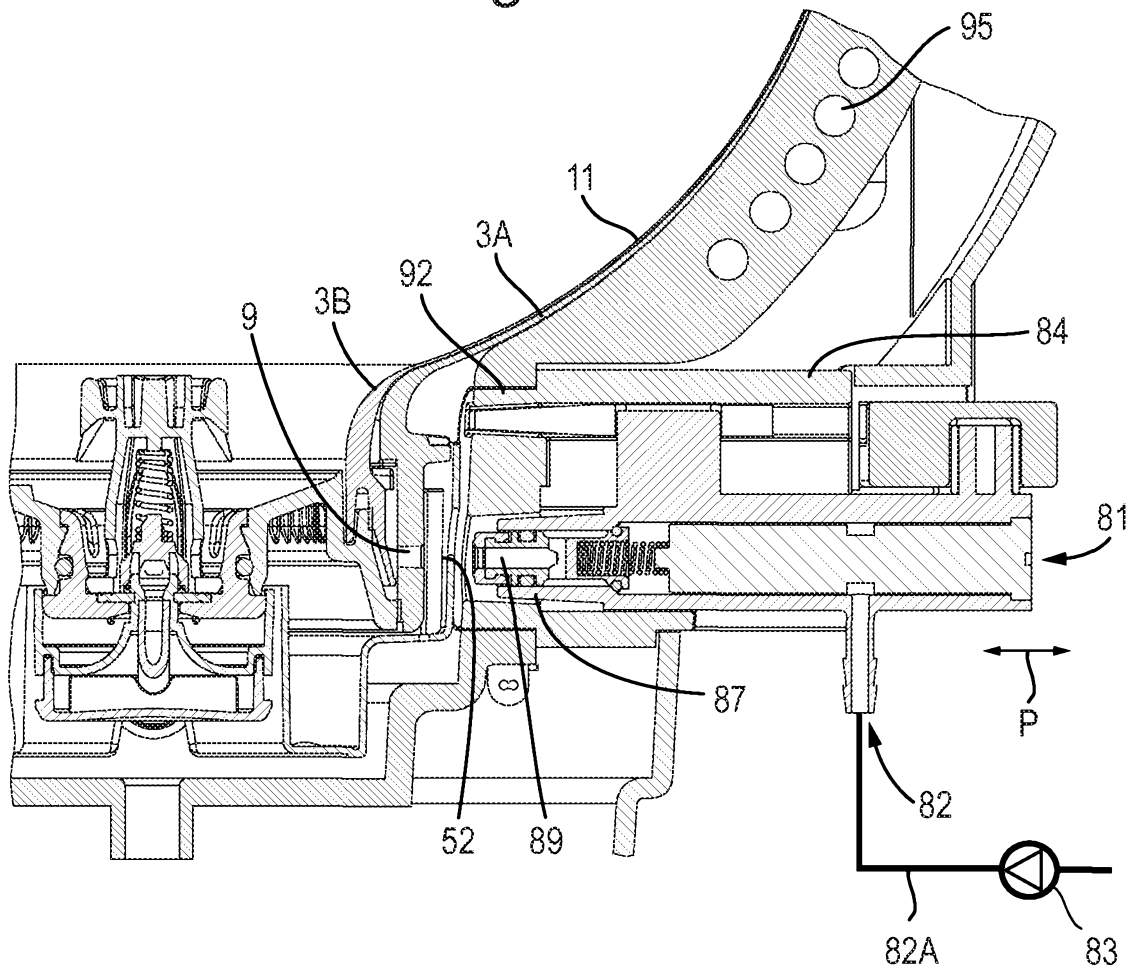


Fig. 12

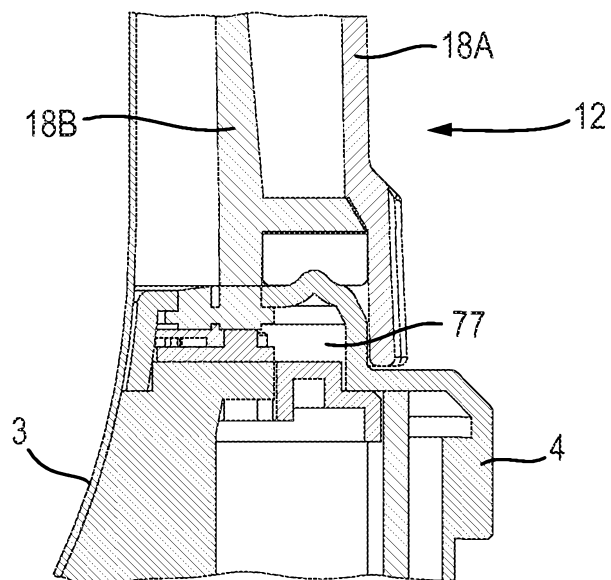


Fig. 13

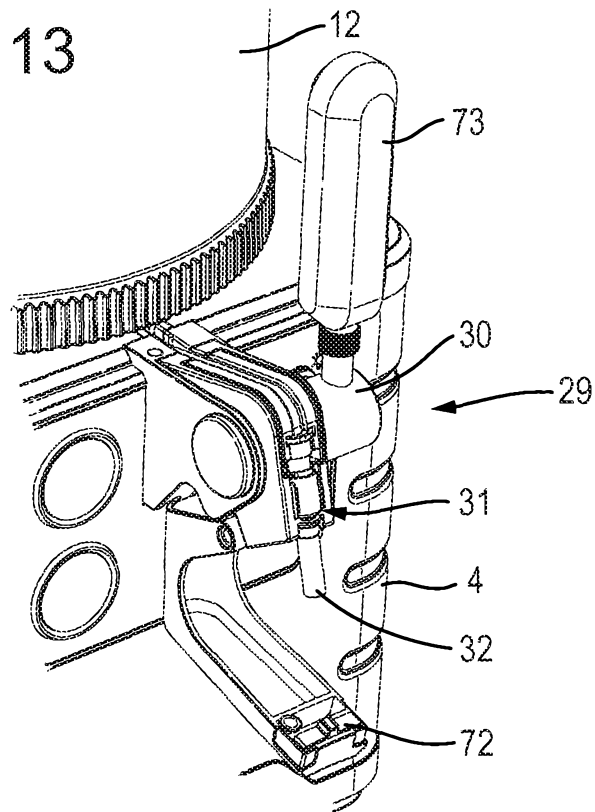


Fig. 14

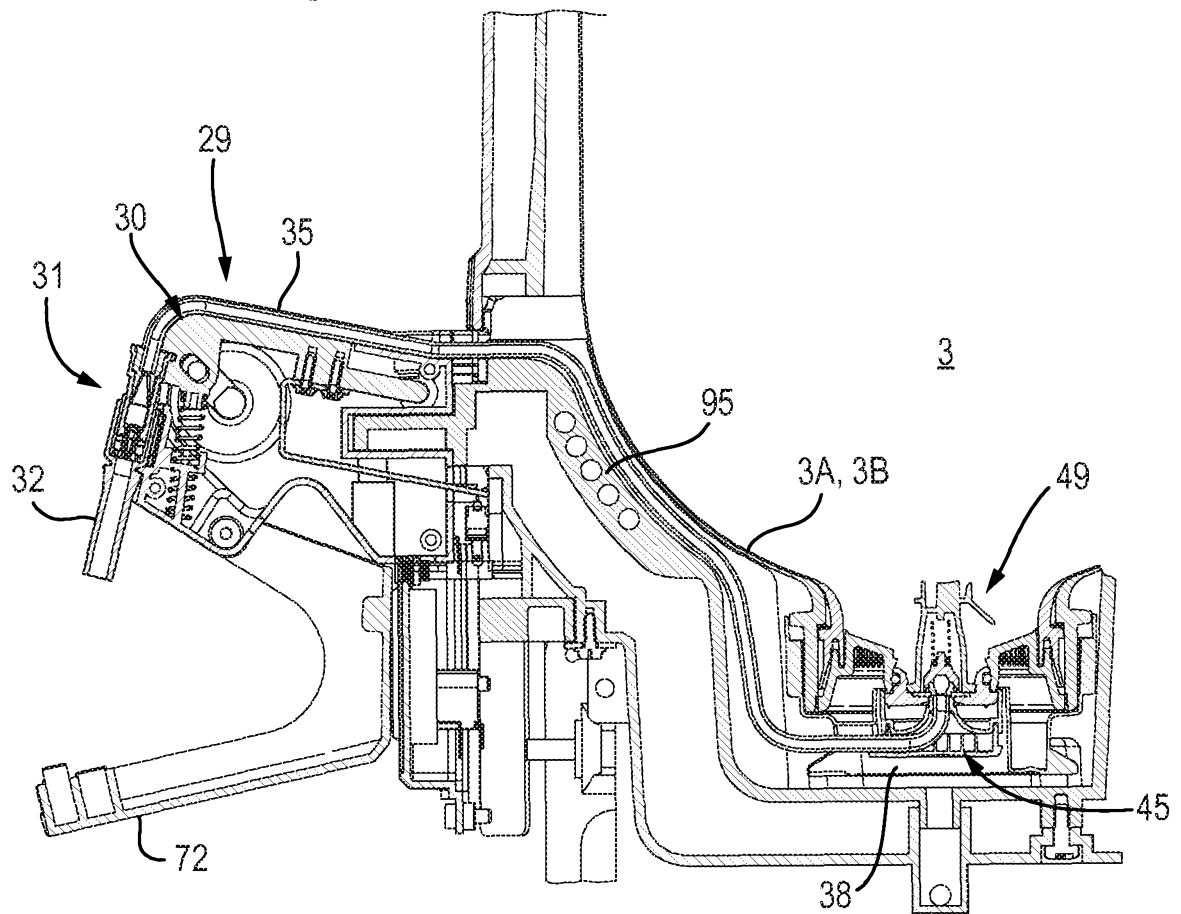


Fig. 15

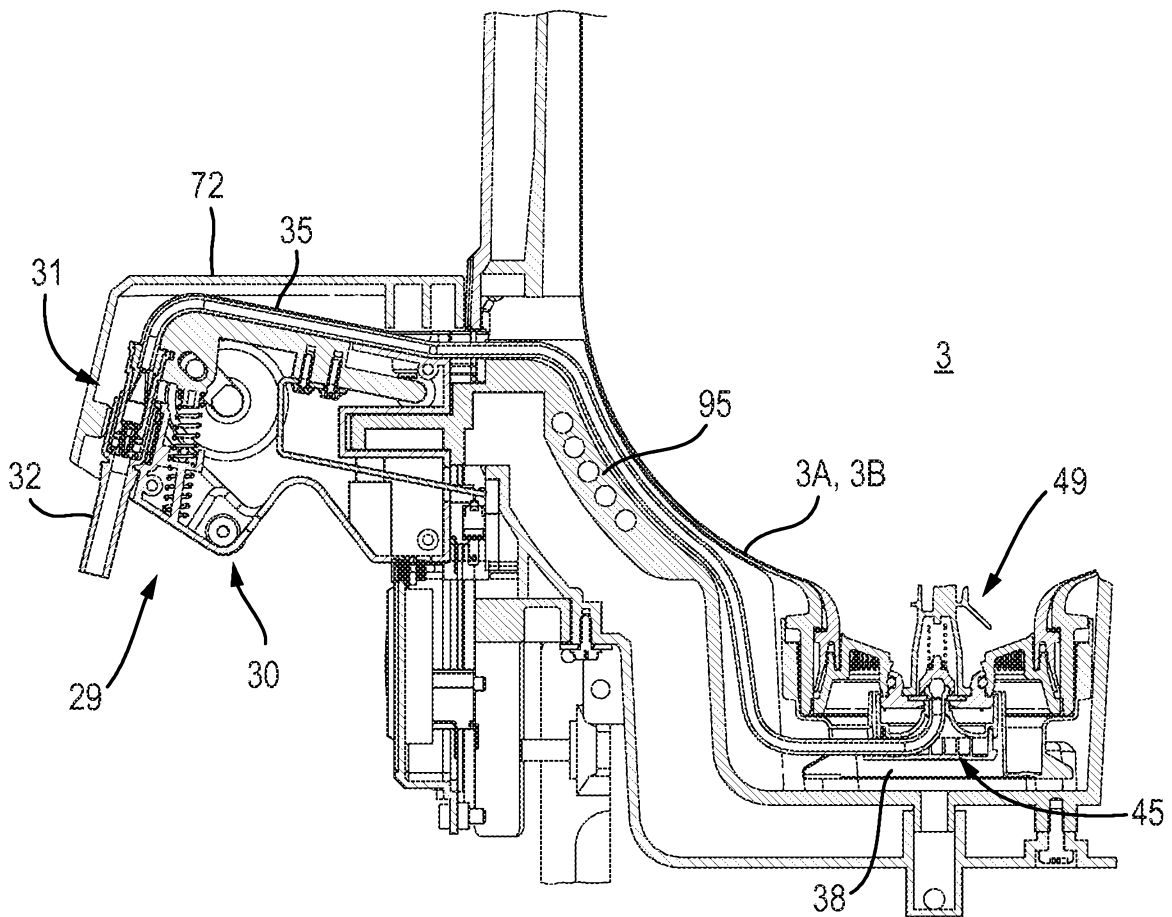


Fig. 17

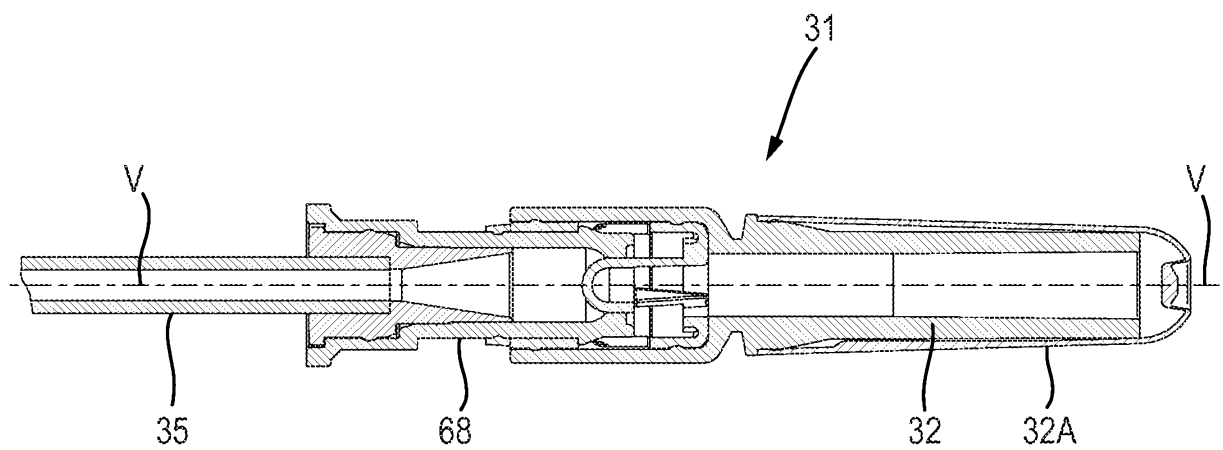


Fig. 16A

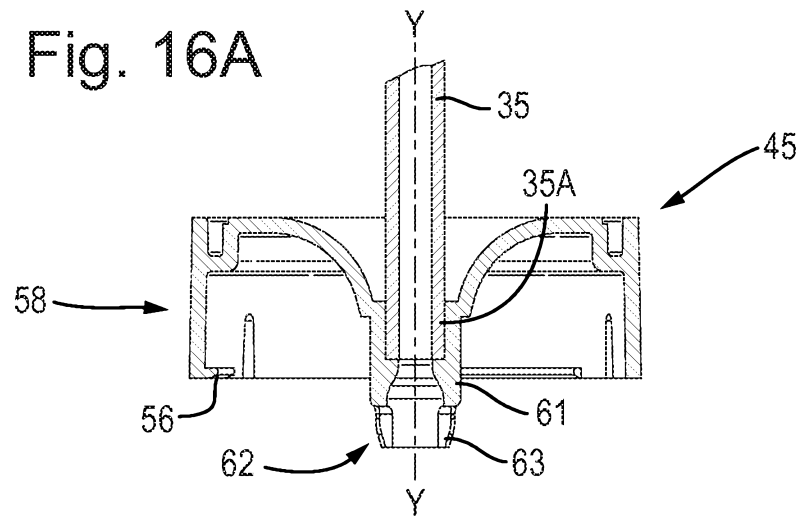


Fig. 16B

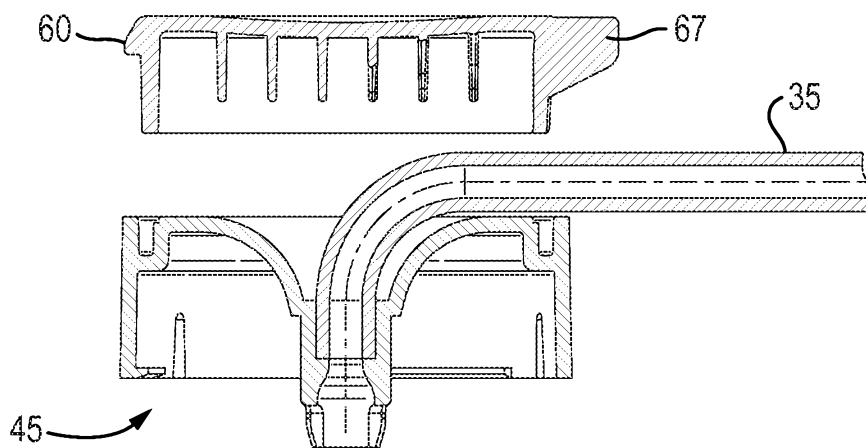


Fig. 16C

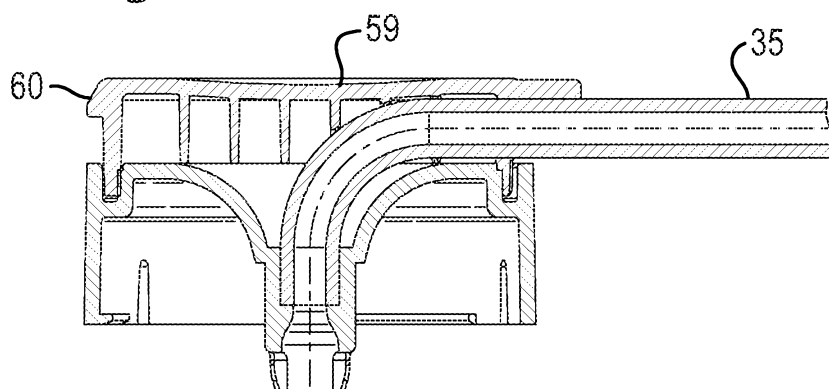


Fig. 18

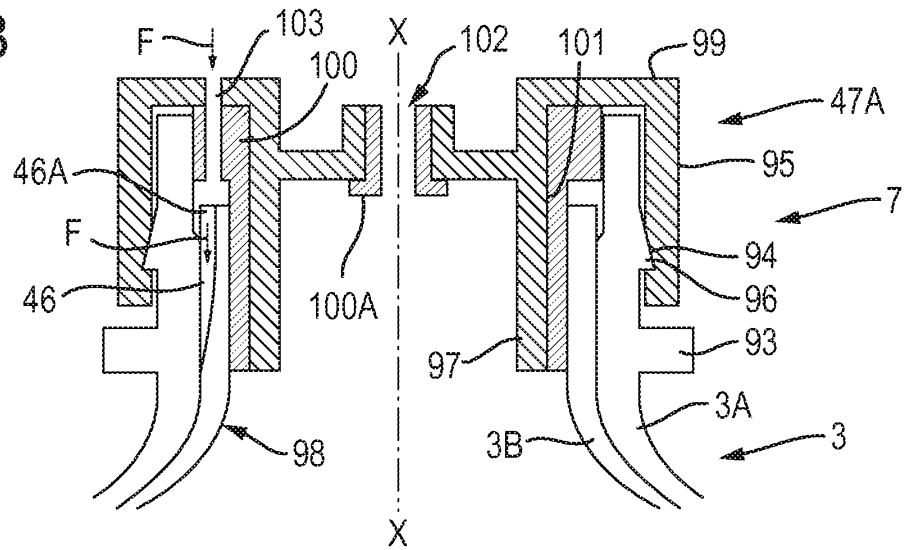


Fig. 19

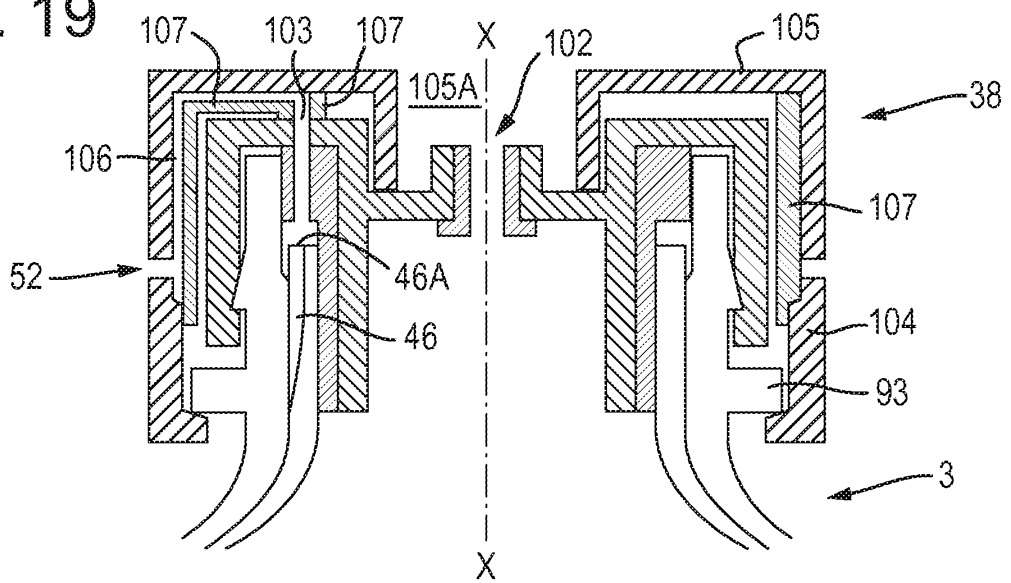


Fig. 20

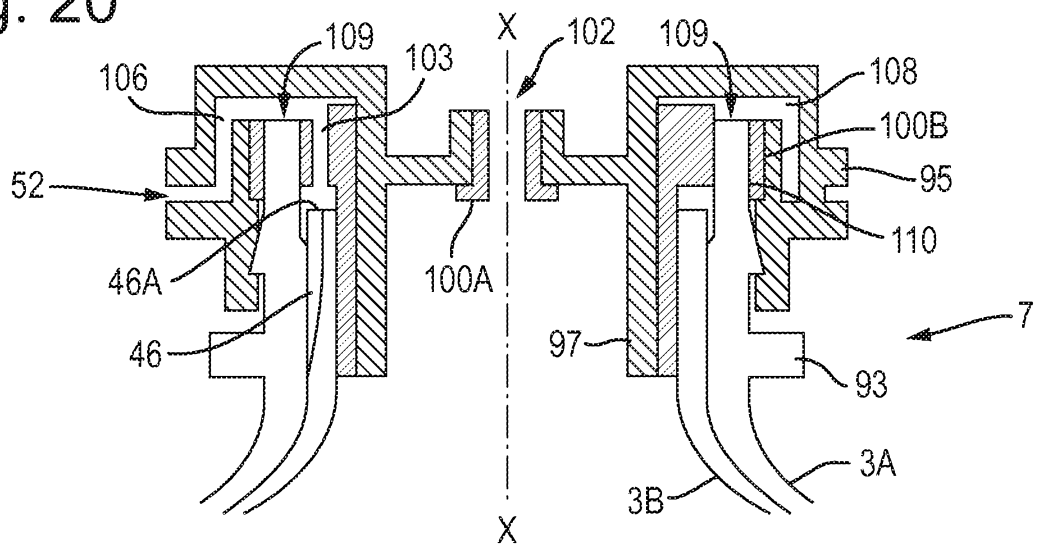


Fig. 23A

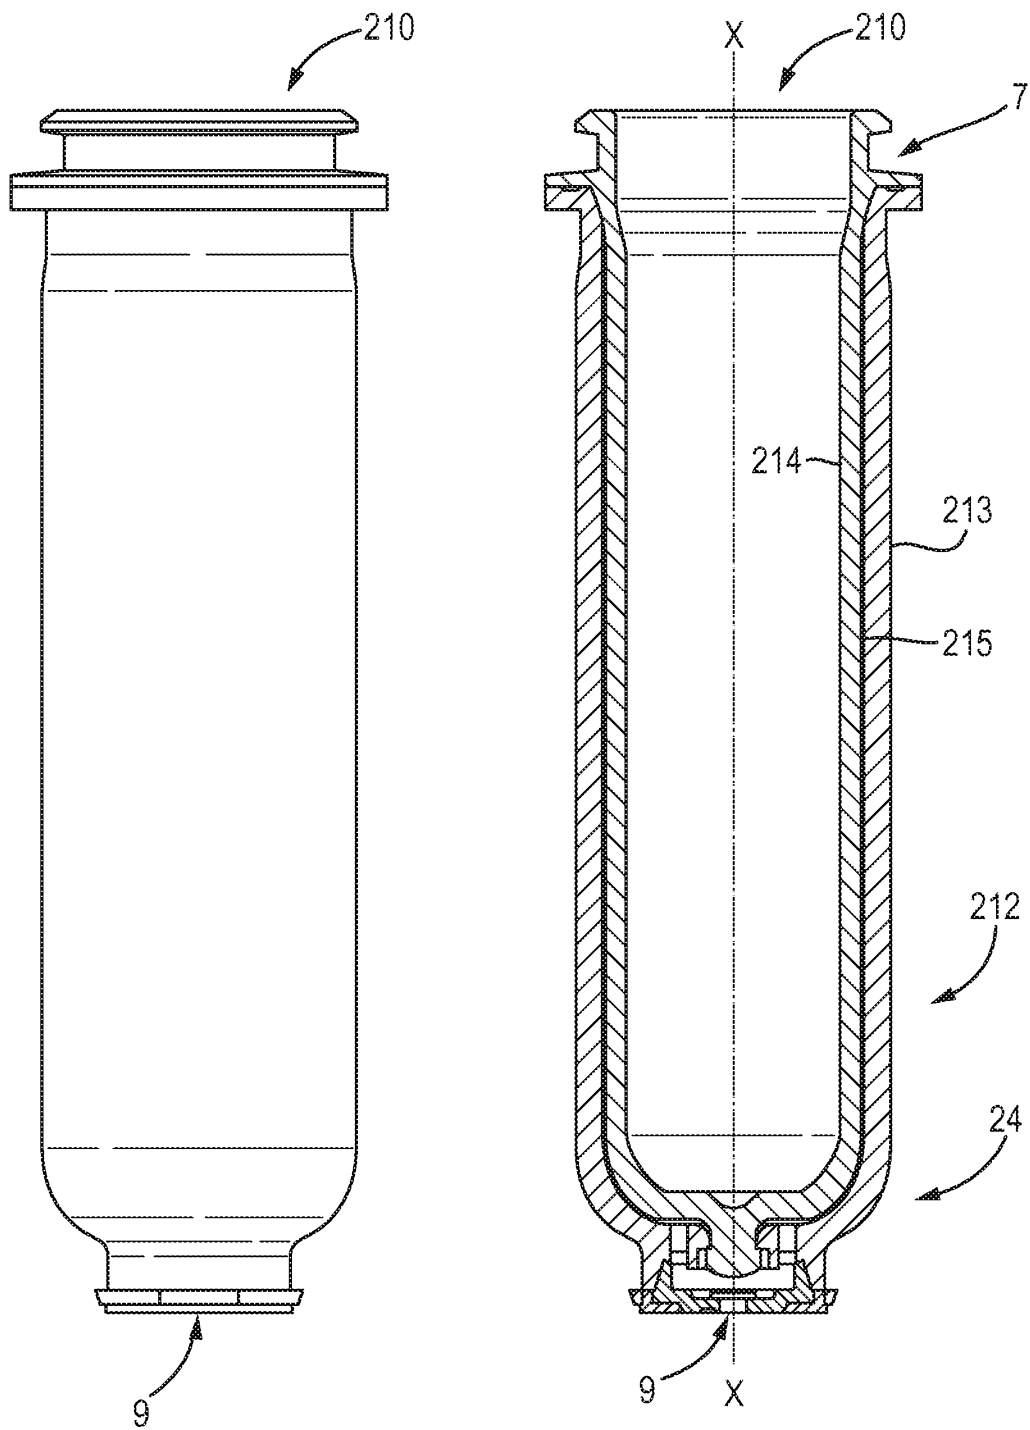


Fig. 23B

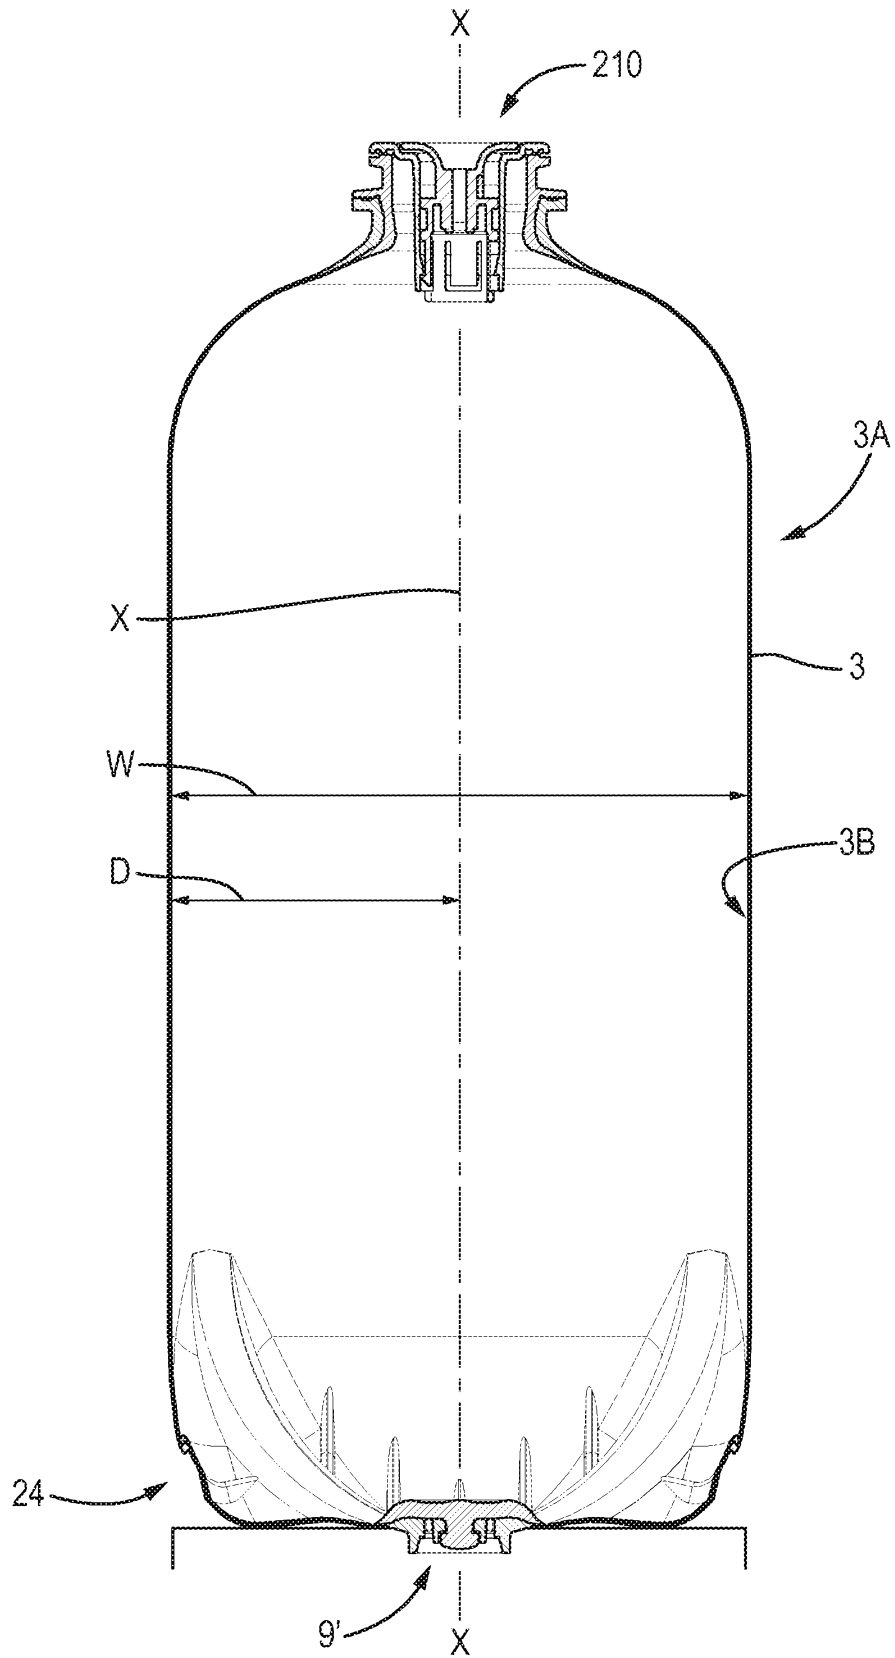


Fig. 24A




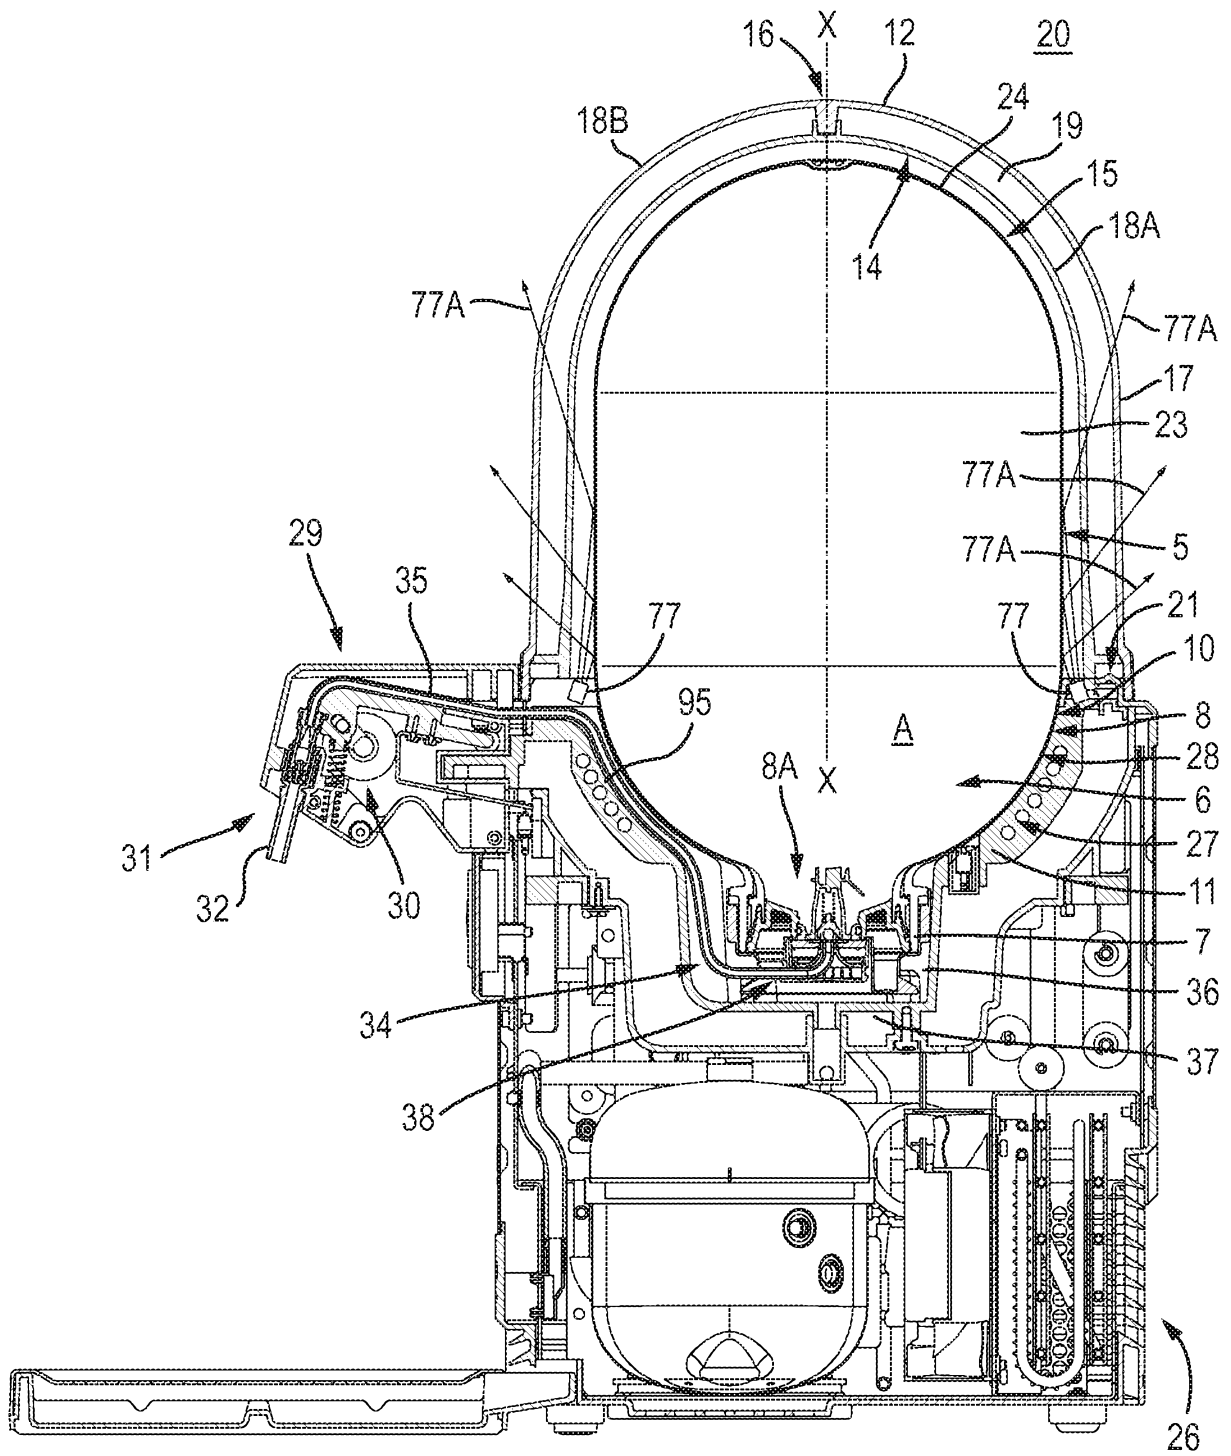


Fig. 24B

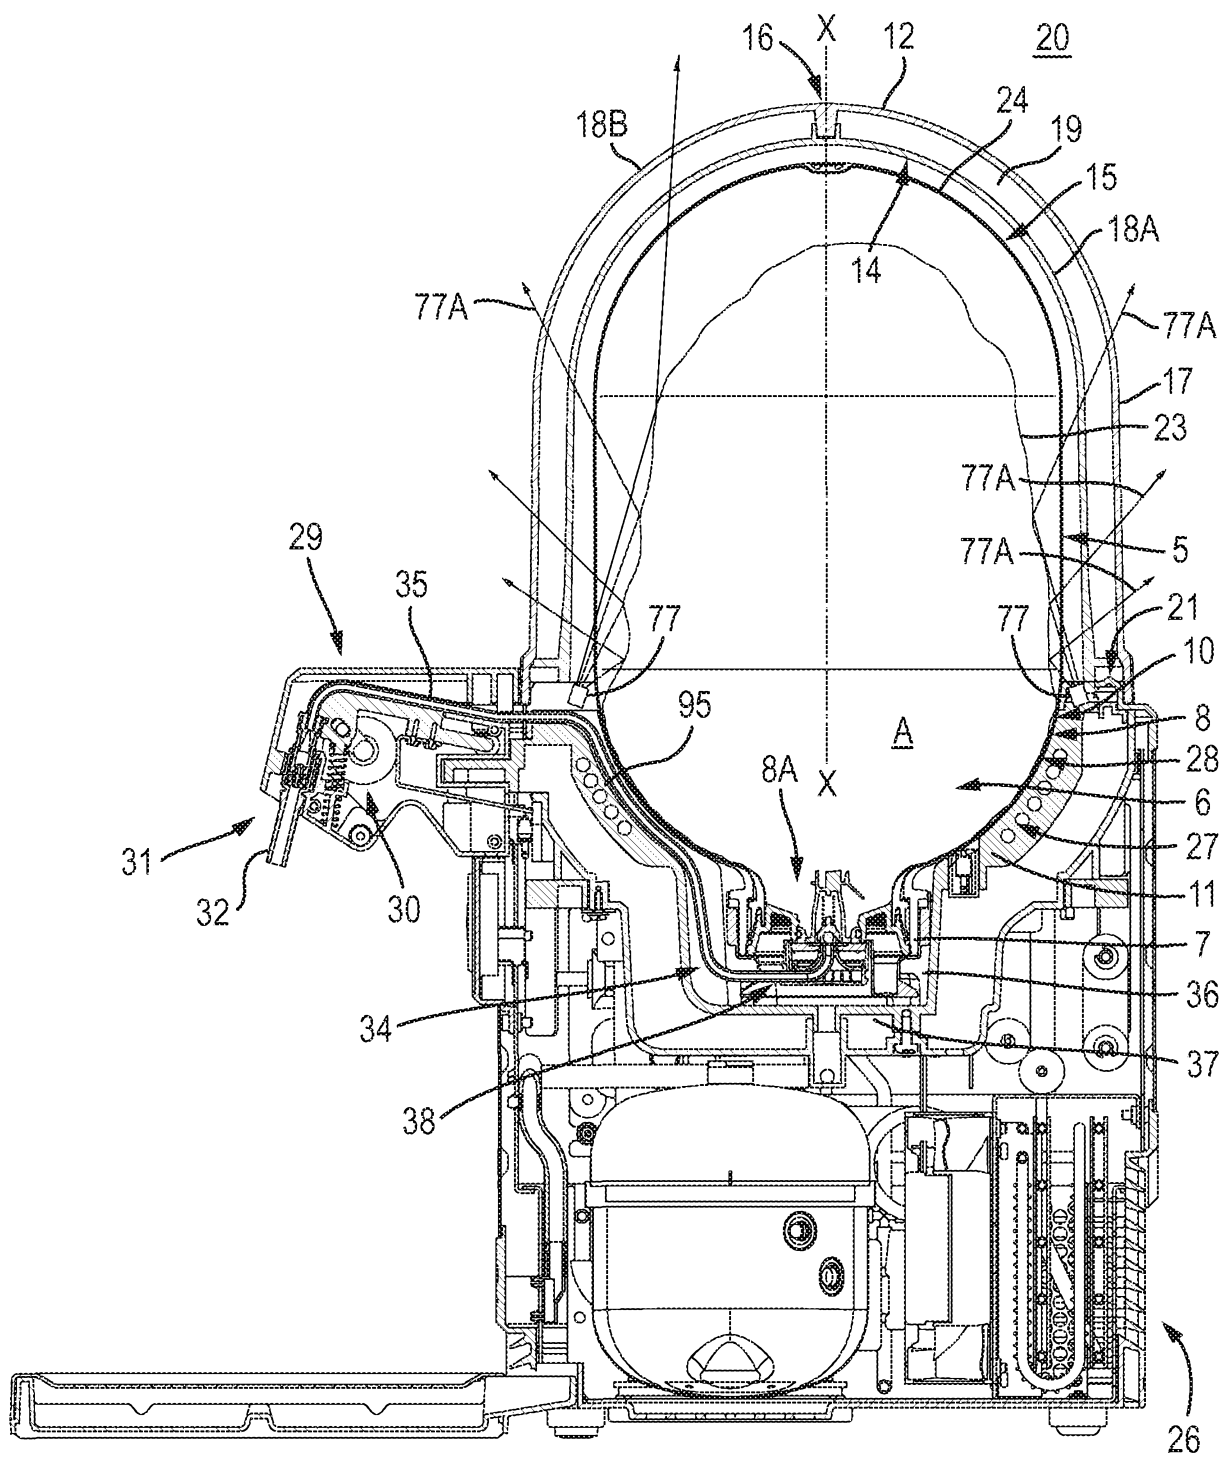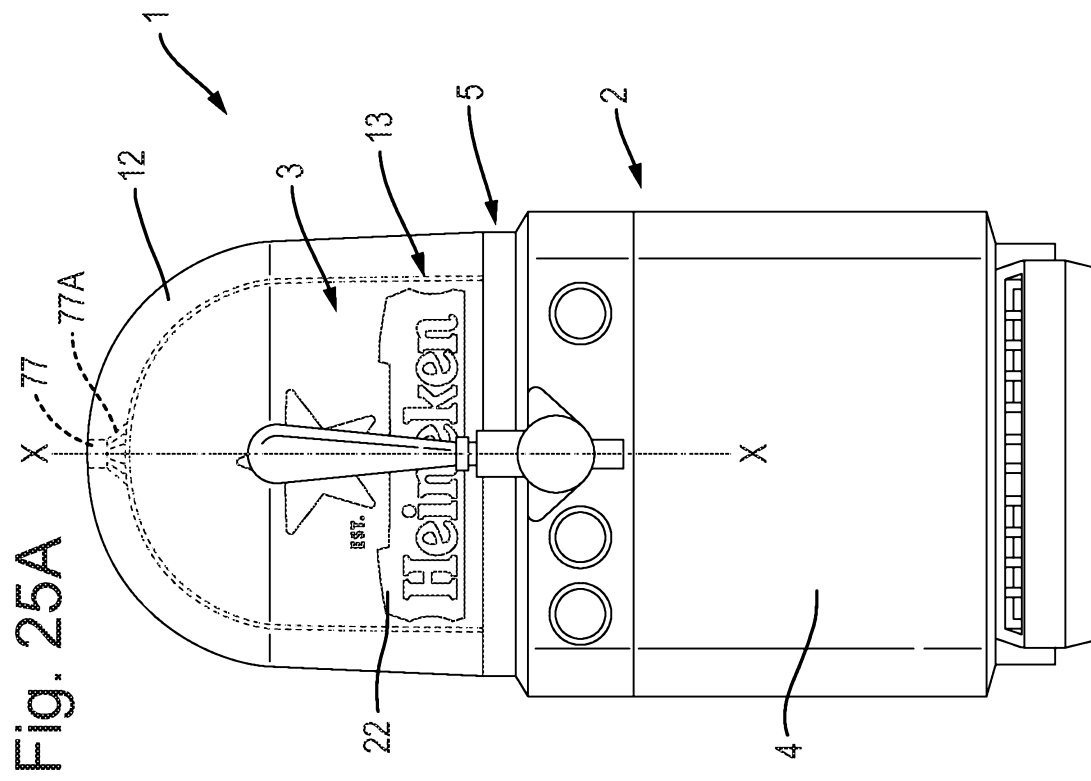

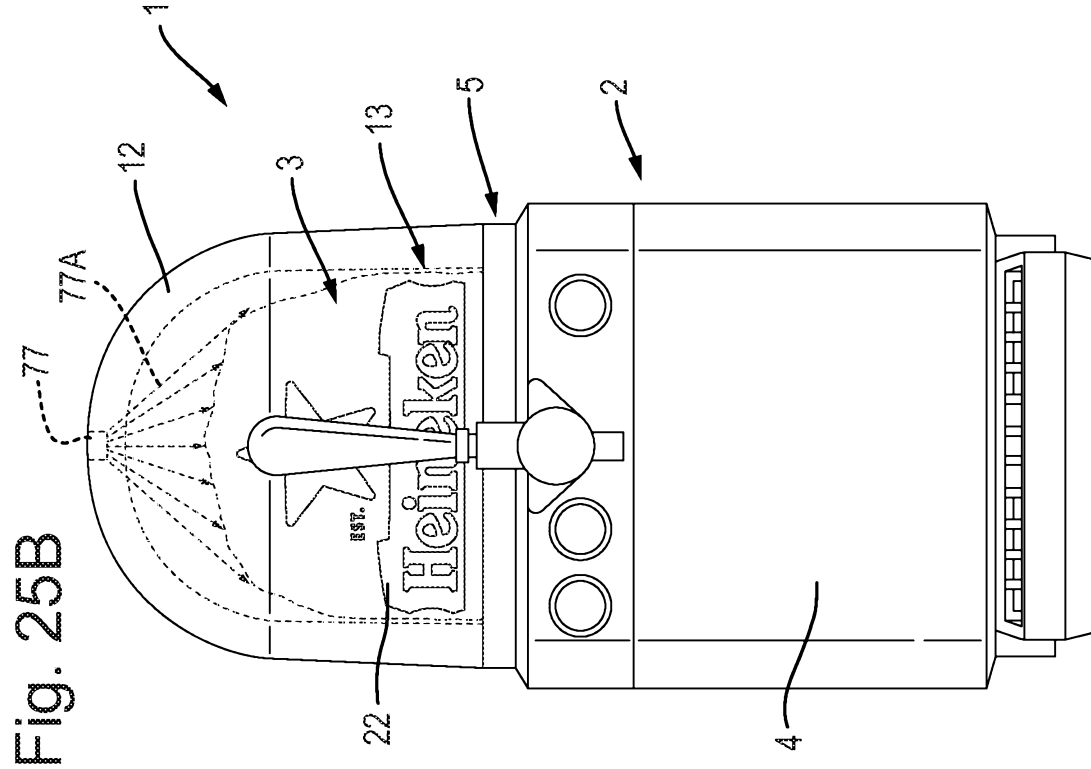

Title: Beverage dispensing assembly and beverage container

Abstract

Beverage dispensing assembly, comprising a dispenser and a beverage container, wherein the beverage container has a neck portion and a shoulder portion adjacent the neck portion, wherein the neck portion is provided with at least an outflow opening and at least one gas inlet opening and wherein the dispenser comprises a housing, wherein the housing is provided with a receptacle for receiving at least part of the container, wherein the container is positioned in the dispenser with the neck and shoulder portion facing downward, such that the neck portion and at least part of the shoulder portion are received in the receptacle, wherein part of the shoulder portion extends close to and/or is in contact with a wall of the receptacle, wherein preferably a lid is provided over the container, enclosing a part of the container extending outside the receptacle.

SAMENWERKINGSVERDRAG (PCT)

RAPPORT BETREFFENDE NIEUWHEIDSONDERZOEK VAN INTERNATIONAAL TYPE

IDENTIFICATIE VAN DE NATIONALE AANVRAGE Nederlands aanvraag nr. 2018956	KENMERK VAN DE AANVRAGER OF VAN DE GEMACHTIGDE P115054NL00								
Indieningsdatum 19-05-2017	Ingeroepen voorrangsdatum 								
Aanvrager (Naam) Heineken Supply Chain B.V.									
Datum van het verzoek voor een onderzoek van internationaal type 19-08-2017	Door de instantie voor Internationaal Onderzoek aan het verzoek voor een onderzoek van internationaal type toegekend nr. SN69519								
I. CLASSIFICATIE VAN HET ONDERWERP (bij toepassing van verschillende classificaties, alle classificatiesymbolen opgeven) Volgens de internationale classificatie (IPC) B67D1/04;B67D1/08									
II. ONDERZOCHE GEBIEDEN VAN DE TECHNIEK Onderzochte minimumdocumentatie <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Classificatiesysteem</td> <td>Classificatiesymbolen</td> </tr> <tr> <td style="text-align: center;">IPC</td> <td style="text-align: center;">B67D</td> </tr> </table>		Classificatiesysteem	Classificatiesymbolen	IPC	B67D				
Classificatiesysteem	Classificatiesymbolen								
IPC	B67D								
Onderzochte andere documentatie dan de minimum documentatie, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen 									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%; text-align: center;">III.</td> <td style="width: 5%; text-align: center;">☐</td> <td>GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES</td> <td style="text-align: right;">(opmerkingen op aanvullingsblad)</td> </tr> <tr> <td style="text-align: center;">IV.</td> <td style="text-align: center;">☐</td> <td>GEBREK AAN EENHEID VAN UITVINDING</td> <td style="text-align: right;">(opmerkingen op aanvullingsblad)</td> </tr> </table>		III.	☐	GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES	(opmerkingen op aanvullingsblad)	IV.	☐	GEBREK AAN EENHEID VAN UITVINDING	(opmerkingen op aanvullingsblad)
III.	☐	GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES	(opmerkingen op aanvullingsblad)						
IV.	☐	GEBREK AAN EENHEID VAN UITVINDING	(opmerkingen op aanvullingsblad)						

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar
de stand van de techniek

NL 2018956

A. CLASSIFICATIE VAN HET ONDERWERP
INV. B67D1/04 B67D1/08
ADD.

Volgens de internationale Classificatie van octrooien (IPC) of zowel volgens de nationale classificatie als volgens de IPC.

B. ONDERZOCHE GEBIEDEN VAN DE TECHNIEK

Onderzochte minimum documentatie (classificatie gevolgd door classificatiesymbolen)

B67D

Onderzochte andere documentatie dan de minimum documentatie, voor dergelijke documenten, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen

Tijdens het onderzoek geraadpleegde elektronische gegevensbestanden (naam van de gegevensbestanden en, waar uitvoerbaar, gebruikte trefwoorden)

EPO-Internal, WPI Data

C. VAN BELANG GEACHTE DOCUMENTEN

Categorie *	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
X	WO 01/92145 A1 (HEINEKEN TECH SERVICES [NL]; KLAUW GUIDO PETRUS JOHANNES V [NL]; BAX) 6 december 2001 (2001-12-06)	25
Y	* bladzijde 4, regel 15 - bladzijde 5, regel 24; figuur 1 *	1-11, 13-16, 19-24, 26-28
Y	----- DE 20 2015 001455 U1 (KING WILFRIED [DE]) 25 mei 2016 (2016-05-25)	1-11, 13-16, 19-24,28
	* alineas [0028], [0050] - [0069]; figuur 1 *	
Y	----- DE 20 2016 006138 U1 (MAYER EBERHARD [DE]) 9 november 2016 (2016-11-09)	1
	* alineas [0001] - [0003]; figuur 1 *	
	----- -/-	

☒ Verdere documenten worden vermeld in het vervolg van vak C.

☒ Leden van dezelfde octrooifamilie zijn vermeld in een bijlage

* Speciale categorieën van aangehaalde documenten

"A" niet tot de categorie X of Y behorende literatuur die de stand van de techniek beschrijft

"D" in de octrooiaanvraag vermeld

"E" eerdere octrooi(aanvraag), gepubliceerd op of na de indieningsdatum, waarin dezelfde uitvinding wordt beschreven

"L" om andere redenen vermelde literatuur

"O" niet-schriftelijke stand van de techniek

"P" tussen de voorrangsdatum en de indieningsdatum gepubliceerde literatuur

"T" na de indieningsdatum of de voorrangsdatum gepubliceerde literatuur die niet bezwarend is voor de octrooiaanvraag, maar wordt vermeld ter verheldering van de theorie of het principe dat ten grondslag ligt aan de uitvinding

"X" de conclusie wordt als niet nieuw of niet inventief beschouwd ten opzichte van deze literatuur

"Y" de conclusie wordt als niet inventief beschouwd ten opzichte van de combinatie van deze literatuur met andere geciteerde literatuur van dezelfde categorie, waarbij de combinatie voor de vakman voor de hand liggend wordt geacht

"&" lid van dezelfde octrooifamilie of overeenkomstige octrooipublicatie

Datum waarop het onderzoek naar de stand van de techniek van internationaal type werd voltooid

16 januari 2018

Verzenddatum van het rapport van het onderzoek naar de stand van de techniek van internationaal type

Naam en adres van de instantie

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040
Fax: (+31-70) 340-3016

De bevoegde ambtenaar

Schultz, Tom

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar
de stand van de techniek
NL 2018956

C.(Vervolg). VAN BELANG GEACHTE DOCUMENTEN

Categorie *	Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages	Van belang voor conclusie nr.
X	WO 2004/099060 A2 (CARLSBERG BREWERIES AS [DK]; RASMUSSEN JAN NOERAGER [DK]) 18 november 2004 (2004-11-18)	29
Y	* bladzijde 9, regel 7 - regel 20 * * bladzijde 13, regel 9 - bladzijde 14, regel 16 * * bladzijde 21, regel 1 - regel 2 * * figuren 1, 1a, 2a, 2b, 2c, 3 *	6,24
Y	WO 2014/077681 A2 (HEINEKEN SUPPLY CHAIN BV [NL]) 22 mei 2014 (2014-05-22) * bladzijde 45, regels 4-8 *	2,3
Y	WO 2014/081294 A2 (HEINEKEN SUPPLY CHAIN BV [NL]) 30 mei 2014 (2014-05-30) * bladzijde 10, regel 23 - regel 26; figuur 2 *	10
Y	WO 2009/074285 A2 (DISPENSING TECHNOLOGIES BV [NL]; MAAS WILHELMUS JOHANNES JOSEPH [NL];) 18 juni 2009 (2009-06-18) * bladzijde 10, regel 11 - regel 16; figuren 11-14 *	11
Y	US 2011/210148 A1 (NELSON GREGORY C [US] ET AL) 1 september 2011 (2011-09-01) * alinea [0034], [0036], [0043], [0048], [0049], [0050], [0051], [0056]; figuren 3, 4, 5, 7a, 7b, 9, 11a, 11b, 12 *	13-15, 26,27
Y	EP 2 447 207 A1 (INBEV NV AB [BE]) 2 mei 2012 (2012-05-02) * alinea [0035] - alinea [0038]; figuren 1-3 *	16
Y	WO 2011/051475 A1 (INBEV NV AB [BE]; ZAVARELLA MICHAEL [US]; PIERSON JEFFREY [US]) 5 mei 2011 (2011-05-05) * alinea [0011] - alinea [0014] * * alinea [0021]; figuren 1-5 *	19,20
Y	EP 2 923 997 A1 (ANHEUSER BUSCH INBEV SA [BE]) 30 september 2015 (2015-09-30) * alinea [0001]; figuren 1, 3, 4 *	28
A	WO 03/027582 A2 (OASIS CORP [US]) 3 april 2003 (2003-04-03) * bladzijde 12, alinea 2; figuur 12 *	1

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummers van het verzoek om een onderzoek naar
de stand van de techniek

NL 2018956

In het rapport genoemd octrooigescrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
WO 0192145	A1	06-12-2001	
	AR	028656 A1	21-05-2003
	AT	309959 T	15-12-2005
	AT	399143 T	15-07-2008
	AT	404492 T	15-08-2008
	AT	455075 T	15-01-2010
	AT	466817 T	15-05-2010
	AU	6440301 A	11-12-2001
	AU	6440401 A	11-12-2001
	AU	2001264403 B2	16-02-2006
	AU	2006201657 A1	11-05-2006
	BR	0111374 A	13-05-2003
	CA	2411026 A1	06-12-2001
	CN	1440366 A	03-09-2003
	CN	1440367 A	03-09-2003
	CN	1559881 A	05-01-2005
	CR	7669 A	18-07-2005
	CY	1110183 T1	14-01-2015
	CZ	20023941 A3	18-06-2003
	DE	60115023 D1	22-12-2005
	DE	60115023 T2	27-07-2006
	DK	1284918 T3	27-03-2006
	DK	1284920 T3	08-12-2008
	DK	1473271 T3	02-08-2010
	DK	1555240 T3	29-09-2008
	DK	1600421 T3	12-04-2010
	DZ	3372 A1	06-12-2001
	EA	200201302 A1	24-04-2003
	EC	SP024395 A	25-07-2003
	EE	200200661 A	15-06-2004
	EG	22484 A	26-02-2003
	EP	1284918 A1	26-02-2003
	EP	1284920 A1	26-02-2003
	EP	1473271 A2	03-11-2004
	EP	1555240 A2	20-07-2005
	EP	1600421 A1	30-11-2005
	ES	2253386 T3	01-06-2006
	ES	2309649 T3	16-12-2008
	ES	2311520 T3	16-02-2009
	ES	2339675 T3	24-05-2010
	ES	2345613 T3	28-09-2010
	GE	P20053493 B	25-04-2005
	GT	200100100 A	22-03-2002
	HK	1053821 A1	24-02-2006
	HK	1053822 A1	24-10-2008
	HK	1078558 A1	29-08-2008
	HK	1083825 A1	12-03-2010
	HR	P20020949 A2	28-02-2005
	HU	0302354 A2	28-10-2003
	IL	153161 A	03-12-2007
	IS	6641 A	29-11-2002
	JO	2368 B	12-12-2006
	JP	5179691 B2	10-04-2013
	JP	5362163 B2	11-12-2013
	JP	2003534997 A	25-11-2003
	JP	2003535000 A	25-11-2003
	KR	20030015261 A	20-02-2003
	KR	20030015262 A	20-02-2003
	MA	25752 A1	01-04-2003

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummer van het verzoek om een onderzoek naar
de stand van de techniek

NL 2018956

In het rapport genoemd octrooigecchrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
		MX PA02011847 A	14-05-2003
		MY 134777 A	31-12-2007
		NL 1015368 C2	12-12-2001
		NO 20025752 A	31-01-2003
		NZ 523136 A	24-09-2004
		OA 12280 A	11-05-2006
		PE 02022002 A1	03-04-2002
		PL 358921 A1	23-08-2004
		PT 1284920 E	20-11-2008
		PT 1473271 E	02-08-2010
		PT 1555240 E	13-11-2008
		PT 1600421 E	20-04-2010
		SI 1284918 T1	28-02-2006
		SI 1473271 T1	30-07-2010
		SI 1555240 T1	31-12-2008
		SI 1600421 T1	31-03-2010
		SK 16962002 A3	03-06-2003
		SV 2002000470 A	24-10-2002
		UA 73180 C2	17-02-2003
		US 2004011828 A1	22-01-2004
		US 2004069805 A1	15-04-2004
		US 2004226967 A1	18-11-2004
		UY 26737 A1	31-07-2001
		WO 0192142 A1	06-12-2001
		WO 0192145 A1	06-12-2001
		YU 90402 A	31-12-2003
		ZA 200209765 B	02-03-2004

DE 202015001455 U1	25-05-2016	DE 202015001455 U1	25-05-2016
		EP 3261978 A2	03-01-2018
		WO 2016134832 A2	01-09-2016

DE 202016006138 U1	09-11-2016	GEEN	

WO 2004099060 A2	18-11-2004	AT 356076 T	15-03-2007
		AT 506317 T	15-05-2011
		AT 517841 T	15-08-2011
		AT 522472 T	15-09-2011
		AU 2004235874 A1	18-11-2004
		BR PI0410014 A	25-04-2006
		CA 2524292 A1	18-11-2004
		CN 1784354 A	07-06-2006
		CN 101698466 A	28-04-2010
		CN 101734599 A	16-06-2010
		DE 602004005182 T2	08-11-2007
		DK 1626925 T3	09-07-2007
		DK 1798190 T3	08-08-2011
		DK 1798193 T3	19-12-2011
		DK 1798194 T3	31-10-2011
		EA 200501467 A1	28-04-2006
		EP 1626925 A2	22-02-2006
		EP 1798190 A2	20-06-2007
		EP 1798193 A2	20-06-2007
		EP 1798194 A2	20-06-2007
		ES 2284010 T3	01-11-2007
		HK 1090623 A1	20-05-2010
		HR P20070257 T3	31-08-2007
		JP 4741461 B2	03-08-2011

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummers van het verzoek om een onderzoek naar
de stand van de techniek

NL 2018956

In het rapport genoemd octrooigeschrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie	
		JP 2006525195 A	09-11-2006	
		KR 20060018835 A	02-03-2006	
		NO 331475 B1	09-01-2012	
		NZ 543280 A	27-10-2006	
		PT 1626925 E	12-06-2007	
		PT 1798190 E	17-06-2011	
		PT 1798194 E	29-09-2011	
		SI 1626925 T1	31-10-2007	
		UA 81478 C2	10-01-2008	
		US 2006283879 A1	21-12-2006	
		WO 2004099060 A2	18-11-2004	
		ZA 200508651 B	31-12-2008	
		ZA 200706071 B	30-04-2008	
		ZA 200706072 B	30-04-2008	
		ZA 200706073 B	25-06-2008	

WO 2014077681	A2	22-05-2014	AU 2013345537 A1	28-05-2015
			CA 2891302 A1	22-05-2014
			CN 104918860 A	16-09-2015
			DK 2920080 T3	11-09-2017
			EP 2920080 A2	23-09-2015
			ES 2640923 T3	07-11-2017
			JP 2016501143 A	18-01-2016
			KR 20150085039 A	22-07-2015
			NL 2009802 C	14-05-2014
			PL 2920080 T3	29-12-2017
			PT 2920080 T	22-09-2017
			RU 2015122735 A	10-01-2017
			SG 11201503768R A	29-06-2015
			US 2016236820 A1	18-08-2016
			US 2017283118 A1	05-10-2017
			WO 2014077681 A2	22-05-2014

WO 2014081294	A2	30-05-2014	CA 2891981 A1	30-05-2014
			CN 104903230 A	09-09-2015
			DK 2928814 T3	01-05-2017
			EP 2928814 A2	14-10-2015
			ES 2623001 T3	10-07-2017
			HK 1211913 A1	03-06-2016
			NL 2009864 C	27-05-2014
			NL 2012776 C	06-01-2015
			NZ 708339 A	22-12-2017
			PL 2928814 T3	29-09-2017
			PT 2928814 T	24-04-2017
			RU 2015124026 A	10-01-2017
			SG 11201504024P A	29-06-2015
			US 2015290598 A1	15-10-2015
			WO 2014081294 A2	30-05-2014

WO 2009074285	A2	18-06-2009	AR 069622 A1	03-02-2010
			BR PI0822055 A2	23-06-2015
			CA 2708423 A1	18-06-2009
			CN 101970334 A	09-02-2011
			EP 2234915 A2	06-10-2010
			JP 2011506209 A	03-03-2011
			PE 16022009 A1	10-11-2009
			TW 200934719 A	16-08-2009
			US 2011036451 A1	17-02-2011

**ONDERZOEKSRAPPORT BETREFFENDE HET
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummer van het verzoek om een onderzoek naar
de stand van de techniek

NL 2018956

In het rapport genoemd octrooi geschrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
		WO 2009074285 A2	18-06-2009
US 2011210148 A1	01-09-2011	GEEN	
EP 2447207 A1	02-05-2012	CN 103189303 A	03-07-2013
		DK 2632845 T3	22-05-2017
		EP 2447207 A1	02-05-2012
		EP 2632845 A1	04-09-2013
		ES 2625499 T3	19-07-2017
		MX 349218 B	19-07-2017
		RU 2013122760 A	10-12-2014
		UA 110950 C2	10-03-2016
		US 2013221029 A1	29-08-2013
		WO 2012056017 A1	03-05-2012
WO 2011051475 A1	05-05-2011	AR 078837 A1	07-12-2011
		AU 2010311401 A1	31-05-2012
		CA 2779360 A1	05-05-2011
		CN 102858679 A	02-01-2013
		DK 2493807 T3	16-06-2014
		EP 2493807 A1	05-09-2012
		ES 2469094 T3	17-06-2014
		RU 2012119781 A	10-12-2013
		US 2012312837 A1	13-12-2012
		WO 2011051475 A1	05-05-2011
EP 2923997 A1	30-09-2015	AR 099673 A1	10-08-2016
		AU 2015238459 A1	01-09-2016
		CA 2943482 A1	01-10-2015
		CN 106103334 A	09-11-2016
		EP 2923997 A1	30-09-2015
		EP 3122683 A1	01-02-2017
		JP 2017517445 A	29-06-2017
		KR 20160134691 A	23-11-2016
		US 2017107092 A1	20-04-2017
		WO 2015144685 A1	01-10-2015
WO 03027582 A2	03-04-2003	CA 2460532 A1	03-04-2003
		EP 1430257 A2	23-06-2004
		MX PA04002850 A	05-07-2004
		US 2003115902 A1	26-06-2003
		WO 03027582 A2	03-04-2003

WRITTEN OPINION

File No. SN69519	Filing date (day/month/year) 19.05.2017	Priority date (day/month/year)	Application No. NL2018956
International Patent Classification (IPC) INV. B67D1/04 B67D1/08			
Applicant Heineken Supply Chain B.V.			

This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☐ Box No. II Priority
- ☐ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☒ Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☐ Box No. VII Certain defects in the application
- ☒ Box No. VIII Certain observations on the application

	Examiner Schultz, Tom
--	--------------------------

WRITTEN OPINION

Application number

NL2018956

Box No. I Basis of this opinion

1. This opinion has been established on the basis of the latest set of claims filed before the start of the search.
2. With regard to any **nucleotide and/or amino acid sequence** disclosed in the application and necessary to the claimed invention, this opinion has been established on the basis of:
 - a. type of material:
 - ☐ a sequence listing
 - ☐ table(s) related to the sequence listing
 - b. format of material:
 - ☐ on paper
 - ☐ in electronic form
 - c. time of filing/furnishing:
 - ☐ contained in the application as filed.
 - ☐ filed together with the application in electronic form.
 - ☐ furnished subsequently for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty	Yes: Claims	1-24, 26-28
	No: Claims	25, 29
Inventive step	Yes: Claims	12, 17, 18
	No: Claims	1-11, 13-16, 19-29
Industrial applicability	Yes: Claims	1-29
	No: Claims	

2. Citations and explanations

see separate sheet

WRITTEN OPINION

Application number

NL2018956

Box No. VIII Certain observations on the application

see separate sheet

Re Item V

Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1 Reference is made to the following documents:

- D1 WO 01/92145 A1 (HEINEKEN TECH SERVICES [NL]; KLAUW GUIDO PETRUS JOHANNES V [NL]; BAX) 6 december 2001 (2001-12-06)
- D2 DE 20 2015 001455 U1 (KING WILFRIED [DE]) 25 mei 2016 (2016-05-25)
- D3 DE 20 2016 006138 U1 (MAYER EBERHARD [DE]) 9 november 2016 (2016-11-09)
- D4 WO 2004/099060 A2 (CARLSBERG BREWERIES AS [DK]; RASMUSSEN JAN NOERAGER [DK]) 18 november 2004 (2004-11-18)
- D5 WO 2014/077681 A2 (HEINEKEN SUPPLY CHAIN BV [NL]) 22 mei 2014 (2014-05-22)
- D6 WO 2014/081294 A2 (HEINEKEN SUPPLY CHAIN BV [NL]) 30 mei 2014 (2014-05-30)
- D7 WO 2009/074285 A2 (DISPENSING TECHNOLOGIES BV [NL]; MAAS WILHELMUS JOHANNES JOSEPH [NL];) 18 juni 2009 (2009-06-18)
- D8 US 2011/210148 A1 (NELSON GREGORY C [US] ET AL.) 1 september 2011 (2011-09-01)
- D9 EP 2 447 207 A1 (INBEV NV AB [BE]) 2 mei 2012 (2012-05-02)
- D10 WO 2011/051475 A1 (INBEV NV AB [BE]; ZAVARELLA MICHAEL [US]; PIERSON JEFFREY [US]) 5 mei 2011 (2011-05-05)
- D11 EP 2 923 997 A1 (ANHEUSER BUSCH INBEV SA [BE]) 30 september 2015 (2015-09-30)

- 2 Furthermore, the below-mentioned lack of clarity notwithstanding, the subject-matter of independent claim 25 is not new, and the criteria of patentability are therefore not met. (the applicant may note that expressions like "bij voorkeur" have no limiting effect on the scope of the claim; that is to say, the feature following any such expression is to be regarded as entirely optional).

D1 discloses (the references in parentheses applying to this document).

Drankcontainer (5) voor gebruik in een drankafgifte samenstel volgens één der voorgaande conclusies (Fig. 1).

"drankcontainer met een halsgedeelte (Fig. 1) en een schoudergedeelte (Fig. 1) nabij het halsgedeelte heeft, waarbij de container (5), bij voorkeur het halsgedeelte, is voorzien van ten minste één uitstroomopening en ten minste één gas-inlaatopening (Fig. 1; page 4, line 24 - page 5, line 6").

The subject-matter of independent claim 25 is thus not new.

- 3 The present application does not meet the criteria of patentability, because the subject-matter of claim 29 is not new.

D4 discloses (the references applying to this document):

Drank dispenser (Fig. 1) voor het ontvangen van een drankcontainer (2), waarbij de dispenser een behuizing (13) omvat die is voorzien van een houder (5, 21) voor het ontvangen van ten minste een deel (3) van de container (2), zodanig dat wanneer de container (2) in de dispenser is geplaatst ten minste een gedeelte (3) van de container (2) ontvangen is in de houder (5, 21), waarbij een deksel (6) is voorzien voor plaatsing over de container (Fig. 1), dat een deel van de container dat zich uitstrekt buiten de houder omsluit (Fig. 1), waarbij het deksel (6) transparant is (page 9, lines 12-14) ten minste zodanig dat tijdens gebruik ten minste een significant deel van de container dat zich buiten de houder uitstrekt zichtbaar is door genoemd deksel (Fig. 1).

The subject-matter of independent claim 29 is thus not new.

- 4 Furthermore, the below-mentioned lack of clarity notwithstanding, the subject-matter of independent claim 1 is not new, and the criteria of patentability are therefore not met.

- 4.1 D1 may be regarded as being the prior art closest to the subject-matter of independent claim 1 (the applicant may note that expressions like "bij voorkeur" have no limiting effect on the scope of the claim; that is to say, the feature following any such expression is to be regarded as entirely optional), and discloses (the references applying to this document):

Drankafgifte samenstel (Fig. 1), omvattende een dispenser (2) en een drankcontainer (5), waarbij de drankcontainer (5) een halsgedeelte en een schoudergedeelte nabij het halsgedeelte heeft (Fig. 1), waarbij de container (5), bij voorkeur het halsgedeelte, is voorzien van ten minste één uitstroomopening (Fig. 1; page 5, lines 4-14) en ten minste één gas-inlaatopening (11; Fig. 1; page 4, line 24 - page 5, line 2), en waarbij de dispenser een behuizing (2, 3, 5) omvat, waarbij de behuizing is voorzien van een houder (cooling chamber 3 comprises at the bottom (see Fig. 1) a ringshaped part for supporting the outer rigid container 7 of the package 5) voor het ontvangen van ten minste een deel van de container (Fig. 1), waarbij de container (5) in de dispenser wordt geplaatst (Fig. 1), bij voorkeur zodanig dat ten minste een gedeelte van de container wordt ontvangen in de houder (Fig. 1), welk gedeelte bij voorkeur een deel heeft dat zich uitstrekt nabij en/of in contact is met een wand van de houder (Fig. 5: package 5 is supported by ringshaped part at the bottom of the cooling chamber and also by the vertical walls of the cooling chamber 3), waarbij bij voorkeur een deksel (4) is voorzien over de container, dat een deel van de container dat zich uitstrekt buiten de houder omsluit, waarbij het deksel transparant is althans zodanig dat ten minste een significant deel van de container dat zich uitstrekt buiten de houder zichtbaar is door genoemd deksel,

- 4.2 The subject-matter of claim 1 therefore differs from this known Drankafgifte samenstel in that:
ten minste één lichtbron is voorzien dat licht uitstraalt in en/of op de container.
- 4.3 The problem to be solved by the present invention may therefore be regarded as identifying a container in the dispenser or monitoring the contents of the container also under bad ambient light conditions.
- 4.4 The solution proposed in claim 1 of the present application cannot be considered as involving an inventive step for the following reasons:

The first alternative: The features "ten minste één lichtbron is voorzien dat licht uitstraalt in en container" are suggested by D3 (see paragraphs [0001], [0002], [00003], Fig. 1). It would have been obvious for the skilled person to

apply these known features with corresponding effect in a drank afgifte samenstel according to D1, thereby arriving at a drankafgifte samenstel according to independent claim 1.

The second alternative: The features "ten minste één lichtbron is voorzien dat licht uitstraalt op de container" are suggested by D2 (see paragraphs [0028]; Fig. 1). It would have been obvious for the skilled person to apply these known features with corresponding effect in a drank afgifte samenstel according to D1, thereby arriving at a drankafgifte samenstel according to independent claim 1.

The subject-matter of independent claim 1 does therefore not involve an inventive step.

- 5 Dependent claims 2-11, 13-16, 19-24, 26-28 do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of inventive step.
- 5.1 Claims 2, 3: see D5: page 45, lines 4-8.
- 5.2 Claim 4: see D1: page 5, lines 4-17.
- 5.3 Claim 5: see D1: Fig. 1 "deksel supported by housing 3 of dispenser 2"; see D2: see paragraph [0028].
- 5.4 Claim 6: see D4: page 9, lines 12-14; Fig. 1.
- 5.5 Claim 7: The additional features of dependent claim 7 are merely one of several straightforward possibilities which the skilled person would select, depending on the circumstances, without exercising inventive skill.
- 5.6 Claim 8: see D1: page 4, lines 24-26; Fig. 1.
- 5.7 Claim 9: see D1: Fig. 1: afgifte eenheid 10, afgifte leiding 17, kran 18.
- 5.8 Claim 10: see D6: page 10, lines 23-26; Fig. 2.
- 5.9 Claim 11: see D7: page 10, lines 11-16; Fig. 11-14.
- 5.10 Claims 13-15: see D8: Fig. 4, 5, 7A, 7B, 9; Paragraphs [0034], [0043], [0050], [0051], [0056] "D3 discloses an adaptor opening 538 for gas arranged in axial direction of the adaptor. I would be an obvious choice for the skilled person to arrange the opening in radial direction of the adaptor".
- 5.11 Claim 16: see D9: page 15, line 17 - page 17, line 6; Fig. 1-3.
- 5.12 Claims 19, 20: see D10: [0021].

- 5.13 Claim 21: The additional features of dependent claim 21 are merely one of several straightforward possibilities which the skilled person would select, depending on the circumstances, without exercising inventive skill.
- 5.14 Claim 22: see D8: Fig. 12.
- 5.15 Claim 23: see D2 paragraph [0028].
- 5.16 Claim 24: see D4: Fig. 1.
- 5.17 Claim 26: see D8: Fig. 4, 5, 7A, 7B, 9; Paragraphs [0034], [0043], [0050], [0051], [0056] "D3 discloses an adaptor opening 538 for gas arranged in axial direction of the adaptor. I would be an obvious choice for the skilled person to arrange the opening in radial direction of the adaptor".
- 5.18 Claim 27: see D8: Fig. 5: "space between the ribs 526".
- 5.19 Claim 28: see D11: [0001]; Fig. 2, 3, 4.

Re Item VIII

Certain observations on the application

- 6 Independent claims 1 and 25 and dependent claims 5, 6, 28 are not clear.
- 6.1 Independent claim 1 defines a light source for shining on the container or in the container. These features seem to solve the problem of identifying a container in the dispenser or monitoring the contents of the container also under bad ambient light conditions. This solution to this problem seem to be solved not only by providing a light source as claimed in independent claim 1 but also by a transparent lid covering the container and allowing visibility of the container from the outside. In case the light source shines in the container furthermore the container must be transparent to allow visibility of its contents from the outside. Thus the subject-matter of independent claim 1 lacks essential features to solve the above mentioned problem. The applicant may note that expressions like "bij voorkeur" have no limiting effect on the scope of the claim; that is to say, the feature ("deksel transparant" following such expression is to be regarded as entirely optional.
- 6.2 Independent claim 25 defines the beverage container by its use with an apparatus according to independent claim 1 rather than clearly defining the beverage container in terms of its technical features, particularly structural features. The intended limitations are therefore not clear from this claim.

- 6.3 Dependent claims 5 and 6 refer to additional features of the "deksel" which are defined in independent claim 1 as optional features and not limiting the subject-matter of independent claim 1. The intended restrictions of the scope of the claim 1 by the additional features of dependent claims 5 and 6 are thus not clear.
- 6.4 Dependent claim 28 defines the height of beverage dispensing assembly on a bar counter with reference to an eye height of a person. As the eye height of the person is not clearly defined the height of the beverage dispensing assembly on the bar counter is also not clear.