



(51) International Patent Classification:

E21B 33/138 (2006.01) E21B 33/16 (2006.01)

(21) International Application Number:

PCT/US2018/043153

(22) International Filing Date:

20 July 2018 (20.07.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/657,986 24 July 2017 (24.07.2017) US

(71) Applicant: **BAKER HUGHES, A GE COMPANY, LLC**
[US/US]; 17021 Aldine Westfield, Houston, TX 77073
(US).

(72) Inventor: **ADAM, Mark, A.**; 1036 Al Gregg, Houston, TX
77009 (US).

(74) Agent: **DUPHORNE, Darin, H.**; Intellectual Property
Counsel, Baker Hughes, a GE Company, LLC, 17021 Al-
dine Westfield, Houston, TX 77073 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COMBINATION BOTTOM UP AND TOP DOWN CEMENTING WITH REDUCED TIME TO SET LINER HANG-
ER/PACKER AFTER TOP DOWN CEMENTING

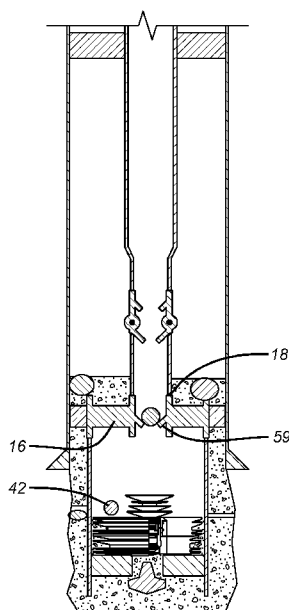


FIG. 10

(57) Abstract: A liner is cemented bottom up and then top down followed by setting the simul-
taneously set liner hanger/packer and releasing the running tool. In one embodiment the ported
sub for top down cementing has ports opened and then closed with multiple dropped or pumped
balls one of which lands in the running tool to set the hanger packer with pressure before run-
ning tool removal. A dart with a leading ball can follow the top down cement to close the ported
sub and thereafter land in the liner hanger/packer to set it with pressure. A dart can lead the top
down cement and open the ported sub followed by a second dart behind the top down cement to
close the ported sub and land in the liner hanger/packer to set it and to release the running tool.
The ported sub can be operated in other ways such as motors responsive to a remote signal.

**COMBINATION BOTTOM UP AND TOP DOWN CEMENTING WITH
REDUCED TIME TO SET LINER HANGER/PACKER AFTER TOP
DOWN CEMENTING**

FIELD OF THE INVENTION

[0001] The field of the invention is cementing a liner bottom up and then top down and reducing time between the conclusion of top down cementing and setting the liner hanger/packer and releasing a running tool.

BACKGROUND OF THE INVENTION

[0002] Traditional liner cementing involves delivery of cement through a liner that is hung off casing with the cement going through a cement shoe at the lower end of the liner and back around in the annular space around the suspended liner. Fluid is displaced by the advancing cement through the liner hanger. At the time of fluid displacement with cement, the seal on the liner hanger is not set and there are gaps between the anchor slips through which the displaced fluid moves. After the cement is delivered a trailing wiper plug is released to clear the liner of excess cement. The liner shoe has a check valve to prevent return of the cement. The seal on the liner top packer is then set and the liner running tool is pulled out of the hole. The shoe can be milled or drilled out and more hole can then be drilled and the process can be repeated.

[0003] In some situations there can be doubt that the cement is adequately distributed using this method and an alternative technique for cement placement is desired. This is particularly beneficial when a formation is particularly weak which can result in significant fluid losses due to low fracture gradients.

[0004] Cementing bottom up and then top down presents a challenge when the liner hanger/packer is designed such that the slips and packing element are set simultaneously. This simultaneously set hanger/packer cannot be set until the top down cementing is over. To accomplish the sequence of bottom up and then top down the ports for top down cementing have to be closed for initial displacement of the bottom up cement job, then opened for the top down cement job and finally reclosed so that pressure can be applied to set the liner hanger/packer. This operation can entail, in one instance, waiting for a ball to drop to a seat to close a cementing port and then further object displacement to

close off the running string at the liner hanger/packer so that pressure can be applied to set the liner hanger/packer. The running tool still needs to be released from the liner hanger packer after the set so time is of the essence to be sure the running tool can still be released after setting the liner hanger/packer with cement potentially surrounding the tools. The most significant and feared non-productive time event in running liners is generally considered to be cementing running tools in the hole. For that reason, techniques are presented that shorten the time from the conclusion of the top down cementing to the setting of the liner hanger/packer and release of the running tool from the set liner hanger/packer. Those skilled in the art will appreciate these and additional aspects of the present invention from a review of the description of the preferred embodiments and the associated drawings while recognizing that the full scope of the invention is to be found in the appended claims.

SUMMARY OF THE INVENTION

[0005] A liner is cemented bottom up and then top down followed by setting the simultaneously set liner hanger/packer and releasing the running tool. In one embodiment the ported sub for top down cementing has ports opened and then closed with multiple dropped or pumped balls one of which lands in the running tool to set the hanger packer with pressure before running tool removal. A dart with a leading ball can follow the top down cement to close the ported sub and thereafter land in the liner hanger/packer to set it with pressure. A dart can lead the top down cement and open the ported sub followed by a second dart behind the top down cement to close the ported sub and land in the liner hanger/packer to set it and to release the running tool. The ported sub can be operated in other ways such as motors responsive to a remote signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a schematic representation of a bottom up and then top down cementing operation followed by setting the liner hanger/packer with dropped balls showing the run in position;

[0007] FIG. 2 is the view of FIG. 1 showing the bottom up cement delivered;

- [0008] FIG. 3 is the view of FIG. 2 showing the plugs bumped and the bottom up cement in the annulus;
- [0009] FIG. 4 is the view of FIG. 3 with a first ball dropped to open a ported sub above the liner hanger/packer;
- [0010] FIG. 5 is the view of FIG. 4 with the first ball displaced to a lower seat and the side ports opened;
- [0011] FIG. 6 is the view of FIG. 5 with the top down cement delivered between foam balls;
- [0012] FIG. 7 is the view of FIG. 6 with the top down cement and the foam balls in the annulus;
- [0013] FIG. 8 is the view of FIG. 7 with a second ball dropped;
- [0014] FIG. 9 is the view of FIG. 8 with the second ball landed on a top seat in the ported sub;
- [0015] FIG. 10 is the view of FIG. 9 with the ported sub closed and the second ball displaced onto the liner hanger/packer and the liner hanger/packer set;
- [0016] FIG. 11 is the view of FIG. 10 with the running tool removed from the liner hanger/packer and cement reversed out;
- [0017] FIG. 12 is the view of FIG. 11 with the running tool coming out of the hole;
- [0018] FIG. 13 is a run in view of a system of bottom up and then top down cementing using a ball attached to a dart behind the top down cement;
- [0019] FIG. 14 is the view of FIG. 13 showing the bottom up cement delivered;
- [0020] FIG. 15 is the view of FIG. 14 with the bottom up cement displaced and the plugs bumped;
- [0021] FIG. 16 is the view of FIG. 15 with a first ball delivered to the ported sub seat;
- [0022] FIG. 17 is the view of FIG. 16 with a landed ball on the ported sub to open the lateral ports;
- [0023] FIG. 18 is the view of FIG. 17 with the top down cement being delivered;
- [0024] FIG. 19 is the view of FIG. 18 with the dart with a leading ball that came down with the top down cement landed in the ported sub;

[0025] FIG. 20 is the view of FIG. 19 with the ports in the ported sub closed by the dart and the first ball landed in the liner hanger/packer to pressure set it;

[0026] FIG. 21 is the view of FIG. 20 with the first ball blown through the ported sub and the wiper shifted into the liner hanger/packer for reversing out excess cement after the running tool releases the liner hanger/packer;

[0027] FIG. 22 is the view of FIG. 21 with the running tool pulling g out of the hole;

[0028] FIG. 23 is a run in position of a bottom up and then top down cementing assembly;

[0029] FIG. 24 is the view of FIG. 23 showing the bottom up cement delivered with a leading and trailing dart and a third dart delivered behind the cement;

[0030] FIG. 25 is the view of FIG. 24 showing a dart behind the top down cement as the cement is delivered;

[0031] FIG. 26 is the view of FIG. 25 with the ported sub shifted open and the top down cement in the surrounding annular space;

[0032] FIG. 27 is the view of FIG. 26 with the top down cement squeezed and the last dart landed in the ported sub with pressure applied above to close the ports of the ported sub;

[0033] FIG. 28 is the view of FIG. 27 showing the third dart passing through the tools and the final dart's leading ball landing in the running tools for pressure setting the liner hanger/packer;

[0034] FIG. 29 is the view of FIG. 28 showing a release from the liner hanger/packer and reversing out excess cement;

[0035] FIG. 30 is the view of FIG. 29 with the running tool being pulled out of the hole.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0036] Referring to FIG. 1, casing **10** is in borehole **12** and a running string **14** delivers a running tool **16** attached to a liner hanger/packer **18**. The sealing element and slips on the liner hanger/packer **18** are represented schematically as **20** and are shown in the unset position for running in. The running tool **16** supports a lower wiper plug **22** and an upper wiper plug **24** that are launched when darts **26** and **28** respectively land in them, as shown in

FIGS. 2 and 3. A measured quantity of cement or other sealant **30** is introduced into the running tool string **14** with a leading dart **26** and a trailing dart **28**. A float valve **32** is at the lower end of the liner **34** supported by the liner hanger/packer **18**. The running string **14** further comprises a ported sub assembly **36** that includes ports **38** shown closed in FIGS. 1-3. The leading dart **26** passes through the ported sub assembly **36** with the cement **30** behind it and the trailing dart **28** behind the cement **30**. The leading dart **26** lands in wiper plug **22** to release wiper **22** from the running tool **16** so that the wiper plug **22** moves until bumped near the float shoe **32** at which point a flow passage is opened through the dart **26** or plug **22** so that the cement **30** can pass through the float shoe **32** as the trailing dart **28** advances to the trailing wiper plug **24**. The dart **28** lands in the trailing wiper plug **24** to push all the cement **30** through the float shoe **32**. The trailing wiper plug **24** is then bumped near the float shoe **32** as the cement **30** passes through the float shoe **32** and into annulus **40**, as shown in FIG. 3. The bottom up cementing operation is concluded at this time. The upper plug **24** / dart **28** combination is not configured to bypass flow once bumped.

[0037] As shown in FIG. 4 a ball **42** is dropped to land in lower seat attached to an opening sleeve **44** of the ported sub **36** and pressure is applied against seated ball **42** to open the ports **38** as shown in FIG. 5. The ball **42** can stay on seat **44** with the ports **38** open and surface personnel can observe returns at the surface from open ports **38** to know that the top down cementing operation can begin. Alternatively, further pressure can be applied to displace ball **42** from ported sub **36** or to capture the ball **42** out of a main flowpath of ported sub **36** so that subsequent objects can pass as will be explained below.

[0038] FIG. 6 shows the top down cement **46** led by foam ball **48** and with foam balls **50** and **52** trailing behind. Different numbers of foam balls can be used or other devices to isolate the cement **46** from well fluids in the running string **14** within the spirit of the invention. The well's annular preventer **54** is closed to force the cement flow towards the weak formation. The liner hanger/packer's sealing element and slips **20** are still not set. The foam plugs **48**, **50** and **52** are optional and the cement **46** can be delivered for squeezing into annulus **40** without leading and trailing barriers.

[0039] FIG. 7 shows the cement 46 in the annulus 40 with the optional foam balls 48, 50 and 52. Here again the slips and sealing element 20 are not yet set and the cement 46 is injected into the annulus 40. This is a squeeze operation that will push any well fluid ahead of cement 46 into the formation along with possibly some of the cement 46. There are no returns to the surface during the squeeze operation.

[0040] In FIG. 8 a second ball 56 is dropped to land on closing seat attached to a closing sleeve 58. Ball 42 remains on seat 44. Ball 56 is larger than ball 42 and the cement 46 has preferably not set up when ball 56 is delivered to close the ports 38 as shown in FIG. 9. Both balls 42 and 56 get blown through seats 44 and 58 and ball 56 lands in seat 59 of the running tool 16 where pressure can then be built up to set the liner hanger/packer 18 shown in FIG. 10. Ports 38 get closed in FIG. 9 with pressure on seated ball 56 after which ball 56 is blown onto seat 59 for setting the liner hanger/packer 18. At this time either the slips of the liner hanger/packer 18 can be set or both the slips and sealing element 20 can be set together. The running tool 16 is pressure released from the liner hanger/packer 18 at this point as shown in FIG. 11. Excess cement 60 is reversed out and the running tool 16 is pulled out of the hole as shown in FIG. 12. The liner hanger/packer 18 remains and further completion operations or more drilling can then be pursued.

[0041] One concern in the method described above is that it could take a very long time to land ball 56 during which time the cement 46 could set up making it risky for the subsequent intended release of the running tool 16 from the liner hanger/packer 18. If the cement 46 sets up above the running tool 16 the running tool may stick forcing an abandonment of the completion and a need to drill a lateral after an expensive milling operation. What will next be explored are alternative ways to shorten this time between the completion of the squeeze cementing through the ported sub 36 and the time the liner hanger/packer 18 is set and the running tool 16 is automatically released from it.

[0042] FIGS. 13-17 are identical to FIGS. 1-5 and FIG. 18 differs from FIG. 6 in that a dart 70 with an attached leading ball 72 is located behind a fluid spacer 74 and behind the cement 46 this time flanked by foam balls 48 and 50 although as before differing amounts of foam balls or no foam balls are

another option. The leading ball **72** lands in seat **58** after cement **46** has passed into annular space **40**. This means that as soon as the cement **46** is squeezed into annulus **40** pressure can be boosted again to force ports **38** to close as dart **70** advances as shown in FIG. 20 pushing ball **42** off seat **44** to land on seat **59** of the running tool **16**. The liner hanger/packer **18** is now set as shown in FIG. 20 with the slips and seal **20** extended. As stated before the slips may be set first or both the slips and sealing element collectively represented as **20** can be set together. FIG. 21 shows ball **42** falling through seat **59** as the dart **70** advances further to the point where leading ball **72** lands on seat **59**. The setting of the liner hanger/packer **18** release of the running tool **16** and retrieval of the running tool **16** in FIG. 22 with dart **70** and leading ball **72**.

[0043] FIG. 23 is identical to FIG. 1. FIG. 24 differs from FIG. 2 in that a third dart **80** with a trailing ball **82** is delivered behind a spacer **84** along with bottom up cement **30** with its leading dart **26** and trailing dart **28**. One difference from FIG. 3 is that the trailing dart **28** with wiper plug **24** do not necessarily bump on wiper plug **22**. The dart **80** is stopped at seat **44** where applied pressure opens ports **38** to allow the top down cement **46** to enter annulus **40** as shown in FIG. 26. A fourth dart **90** has a leading ball **92** designed to land in seat **58** as shown in FIG. 27. The top down cement **46** can have a foam ball **50** behind it or several foam balls or none. A spacer can be located above the foam ball **50** or above the cement **46** itself and below leading ball **92**. As before, the top down cement is squeezed around the slips and sealing element **20** of the liner hanger/packer **18** that at this point are not yet set. This is shown in FIG. 26. The leading ball **92** then lands in seat **92** after the squeeze job is over to allow closure of ports **38** in the ported sub **36**. Further pressure is applied to move the fourth plug **90** with leading ball **92** seated on seat **58** so that ports **38** close followed by further movement of fourth dart **90** to land leading ball **92** on seat **59**. At this point shown in FIG. 28 further pressure will simply set the liner hanger/packer **18** and release the running tool **16** to allow excess cement **96** to be circulated out as in FIG. 21 as opposed to reversing out as in FIG. 11. Third dart **80** is pushed through the running tool **16** as shown in FIG. 28. Ball **92** lands in seat **59** to set the liner hanger/packer **18** by extending the slips and sealing element **20** together or

separately as discussed before, also as shown in FIG. 29. The tools are pulled from the hole in FIG. 30.

[0044] Those skilled in the art will appreciate that the time between the placing of the top down cement **46** and the setting of the liner hanger/packer **18** is cut down by at least several hours as the devices to close the ports **38** and set the liner hanger/packer **18** are delivered with the top down cement **46**. In FIGS. 1-12 there was a need to wait for ball **56** to land on seat **58** and that ball was not delivered until after the squeeze cementing of the top down cement **46** was concluded. This can create a potential issue if the cement **46** sets before the liner hanger/packer **18** is set and the running tool **16** becomes impossible to remove.

[0045] Other options exist for operating the ported sub **36**. It can be run in closed and triggered to open with a motor based on a signal delivered with the top down cement **46** such as with a sensed ingredient in the cement of a sonde that transmits a signal read by a sensor that controls the motor to open the ports **38**. A timer can then be used to trigger the ports **38** to close. Alternatively a signal with the trailing dart **70** or **90** can signal the motor to close ports **38** so that pressure can be used to set the liner hanger/packer **18** and automatically release the running tool **16**. Alternatively, a trailing foam ball such as **50** can contain a material to generate a signal to close ports **38** after a time long enough to squeeze all the cement **46**.

[0046] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below:

I claim:

1. A method of supporting and sealing a lower tubular string from an existing tubular string, comprising:

pumping a sealing material (30) bottom up out a lower end (32) of the lower tubular string (34) and into a surrounding annular space (40) after said lower tubular string is in an overlapping position with the existing tubular string (10) with an unset liner hanger/packer (20) in between; **characterized by**

pumping a sealing material (46) top down from above said unset liner hanger/packer into said surrounding annular space;

providing a ported sub (36) adjacent said liner hanger/packer through which said top down sealing material reaches said surrounding annular space through at least one port;

operating said at least one port (38) in said ported sub to allow said top down sealing material (46) to be squeezed through using at least one object (42,56).

setting said liner hanger/packer (20).

2. The method of claim 1, comprising:

providing a plurality of objects as said at least one object (42,56);
operating at least one port in said ported sub open and closed with delivered said objects through a running string (14) connected to said ported sub (36).

3. The method of claim 2, comprising:

making said objects spheres of different sizes sequentially landing on spaced seats (44,59) for opening and then closing said at least one port.

4. The method of claim 3, comprising:

delivering a larger of said spheres (56) after squeezing said top down sealing material into said surrounding annular space.

5. The method of claim 2, comprising:

delivering a first said object (42) ahead of said top down sealing material and a second said object (56) with and behind said top down sealing material.

6. The method of claim **5**, comprising:
displacing said first object (42) from said ported sub during movement of said second object (56) as said second object closes said at least one port (38).
7. The method of claim **6**, comprising:
landing said first object on a seat (59) of a setting tool (16) for said liner hanger packer (20) after said first object exits said ported sub.
8. The method of claim **5**, comprising:
providing as said second object a dart (70) with a leading ball (72);
landing said leading ball on a seat (58) for a closing sleeve (58) in said ported sub;
moving said closing sleeve with pressure to close said at least one port.
9. The method of claim **8**, comprising:
providing a sphere (42) as said first object;
displacing said sphere from a seat on an opening sleeve (44) for said at least one port when said dart (70) is passing through said seat (44) for a closing sleeve (58) in said ported sub.
10. The method of claim **9**, comprising:
landing said ball (72) on a seat (59) of a setting tool (16) for said liner hanger packer (20) after said ball (72) exits said ported sub.
11. The method of claim **10**, comprising:
stopping said dart (70) on said seat (59) on said setting tool (16);
releasing said setting tool from said liner hanger/packer after setting said liner hanger/packer with said ball (72) on said seat;
removing said setting tool (16) and said dart (70) together with a running string (14) connected thereto.
12. The method of claim **5**, comprising:
closing said at least one port (38) with said second object (56).
13. The method of claim **12**, comprising:
providing a dart (70) with a leading ball (72) as said second object;
sequentially landing said leading ball (72) on a closing sleeve seat (58) for said at least one port (38) to close said at least one port followed by landing said leading ball (72) on a setting seat (59) on a setting tool for pressure setting said liner hanger/packer.

14. The method of claim **13**, comprising:
 - providing a dart (80) with a trailing ball (82) as said first object;
 - landing said trailing ball (82) on an opening sleeve seat (44) for said at least one port (38) to open said at least one port.
15. The method of claim **14**, comprising:
 - pushing said dart (80) with a trailing ball (82) out through said ported sub (36) and then through said setting seat (59) on said setting tool (16) for said liner hanger/packer (20).
16. The method of claim **13**, comprising:
 - retaining said dart (70) with the leading ball (72) on said seat (59) on said setting tool (16) as said setting tool is released from a set said liner hanger/packer (20);
 - removing said setting tool (16) with said dart (80) with a trailing ball (82) together with a running string (14).
17. The method of claim **5**, comprising:
 - minimizing time between closing said at least one port and setting said liner hanger/packer by said delivering of said first (42) and said second (56) objects with said top down sealing material (46).
18. The method of claim **2**, comprising:
 - minimizing time between closing said at least one port and setting said liner hanger/packer by said delivering of said objects (42,56) with said top down sealing material (46).

+

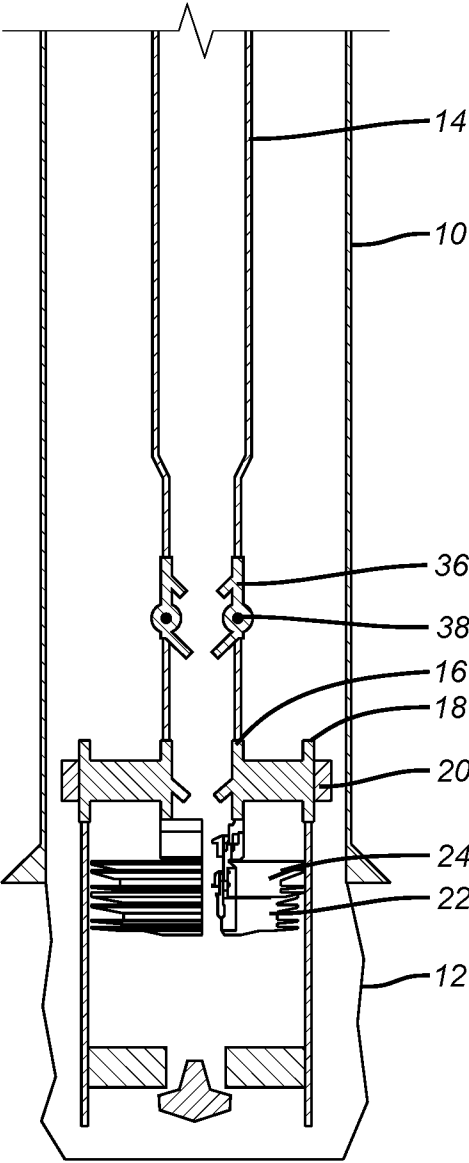


FIG. 1

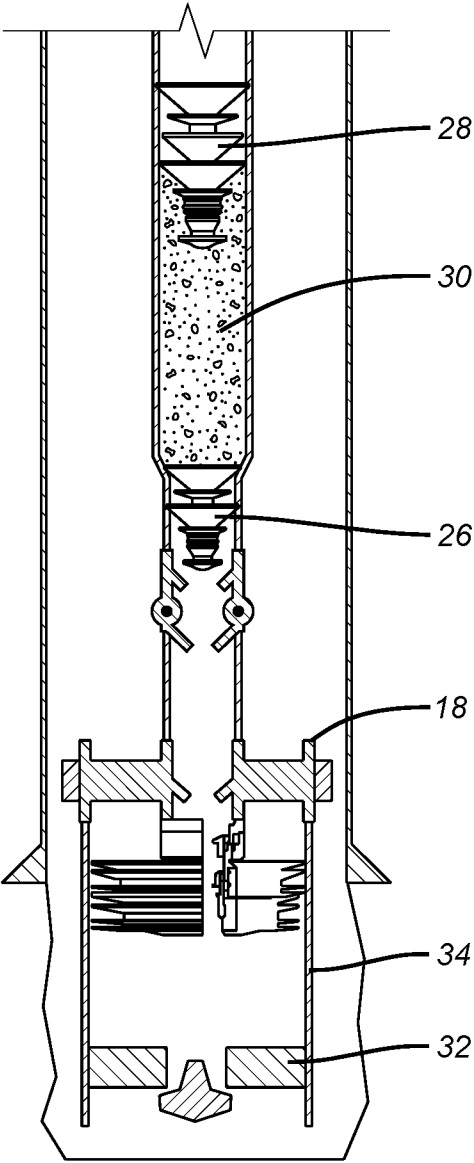


FIG. 2

+

+

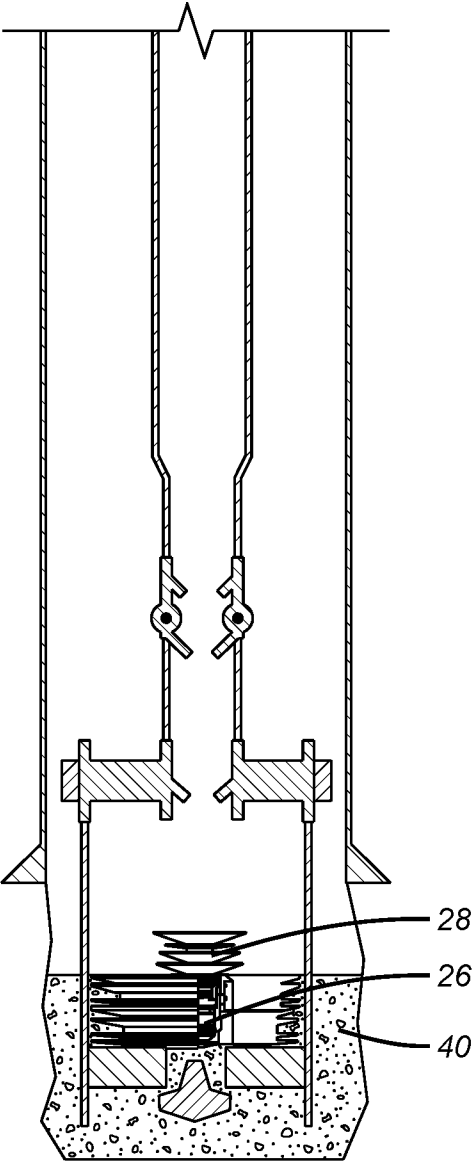


FIG. 3

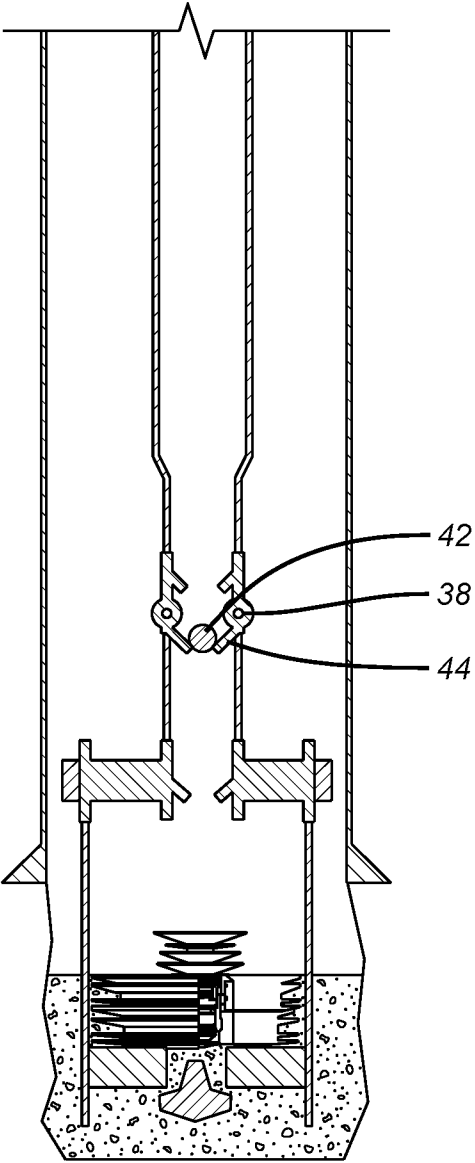


FIG. 4

+

+

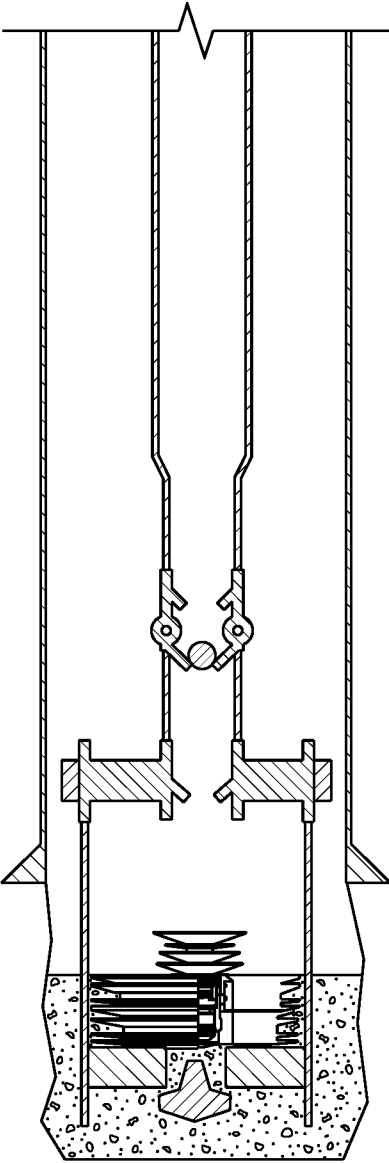


FIG. 5

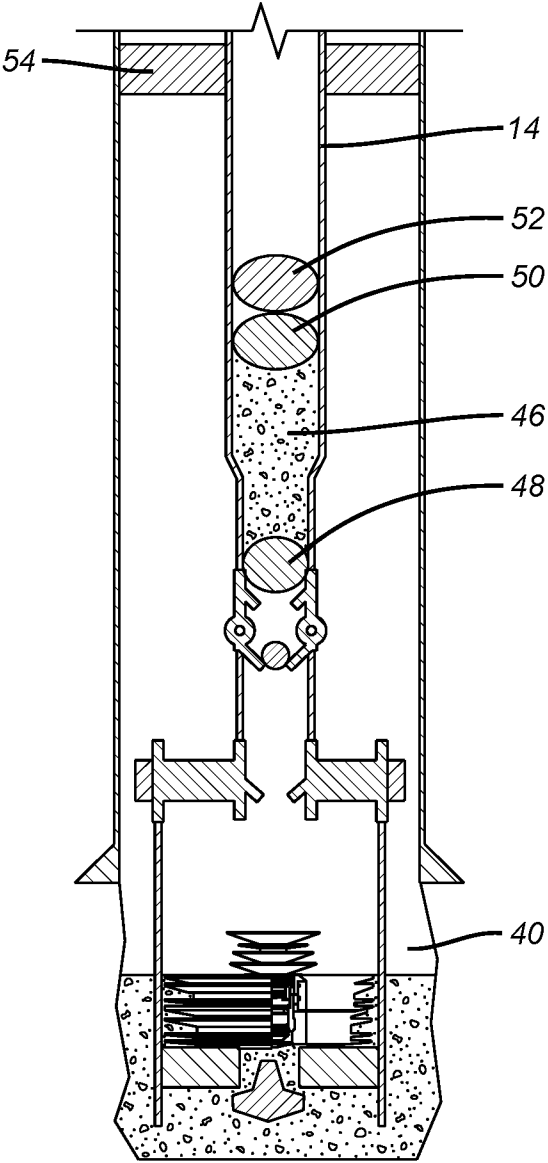


FIG. 6

+

+

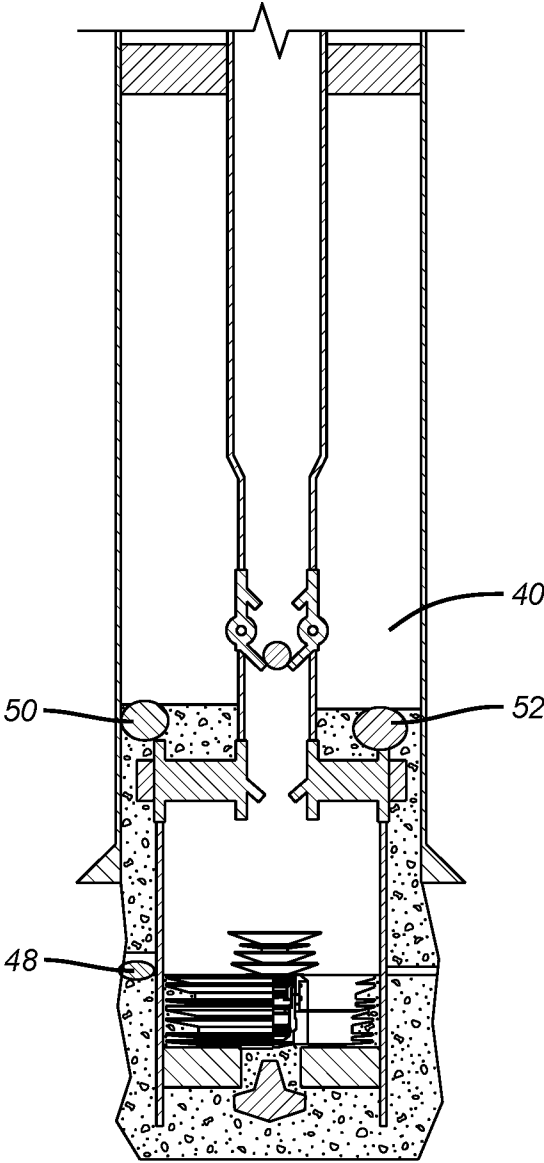


FIG. 7

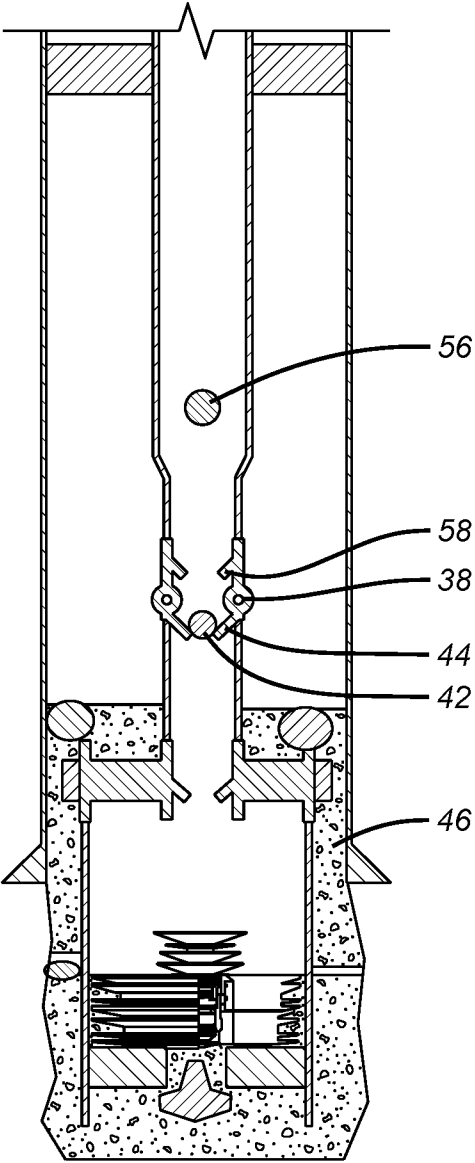


FIG. 8

+

+

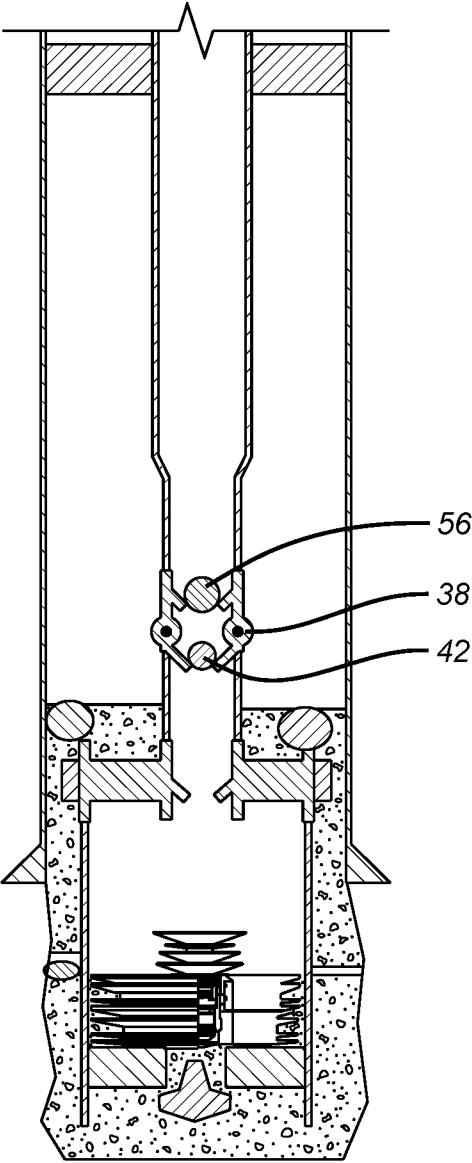


FIG. 9

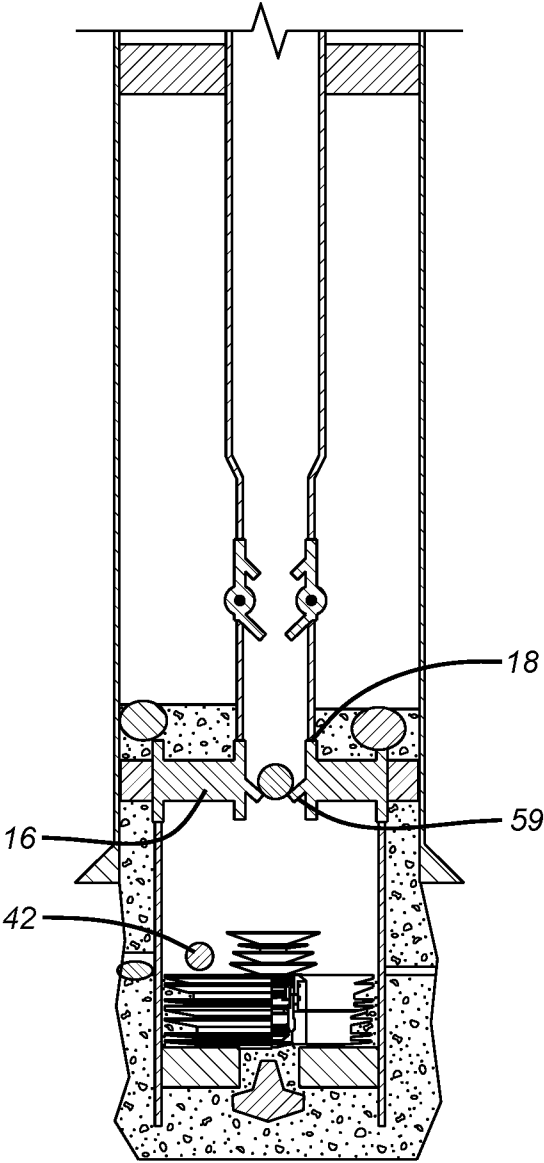


FIG. 10

+

+

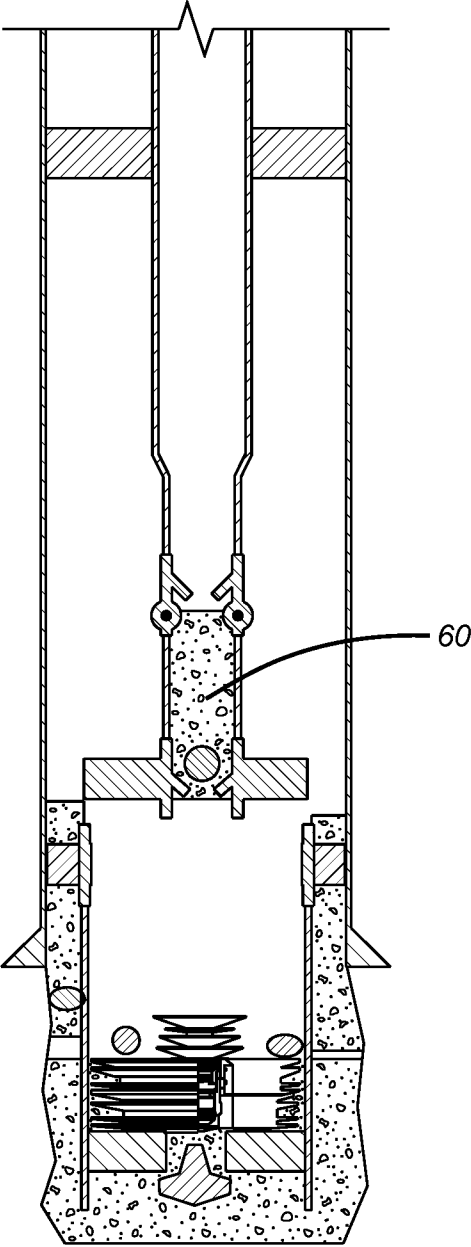


FIG. 11

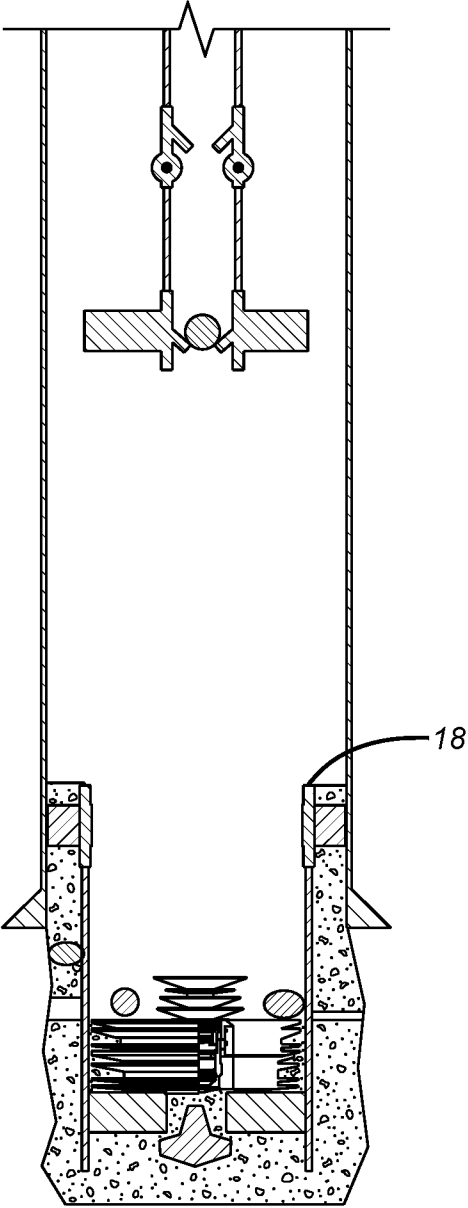


FIG. 12

+

+

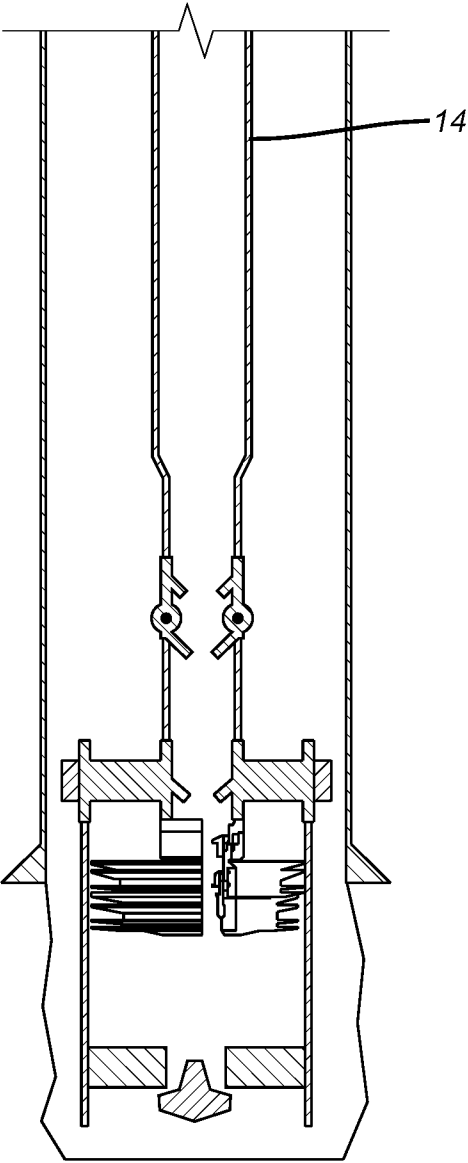


FIG. 13

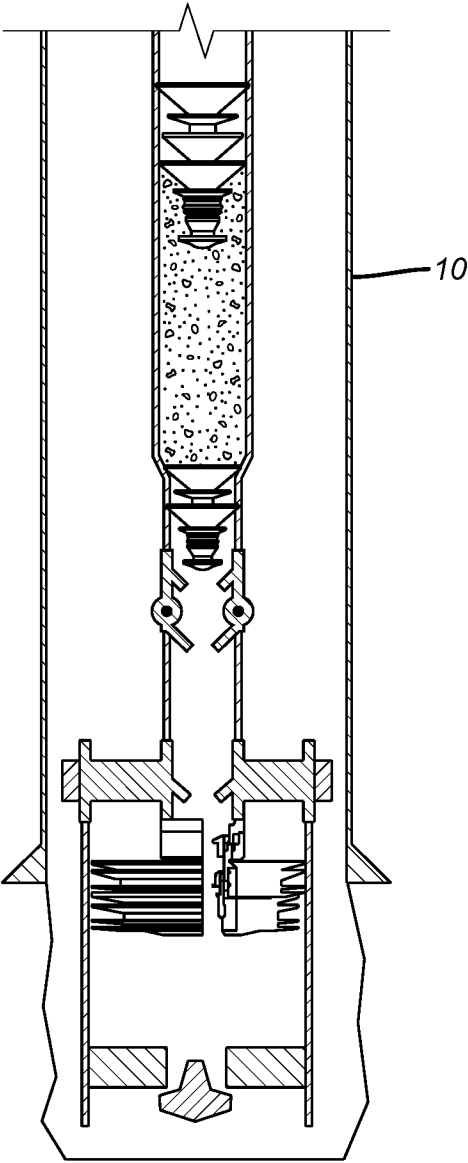


FIG. 14

+

+

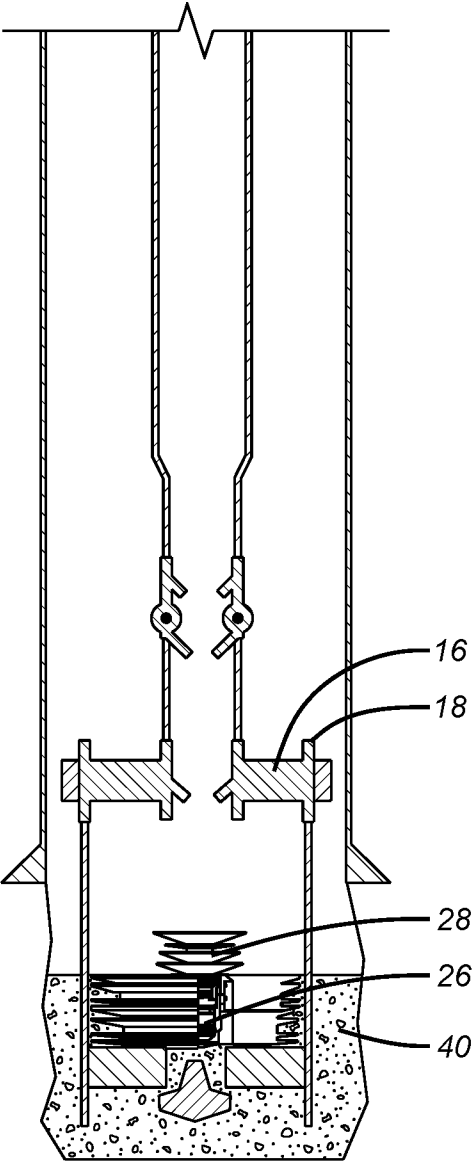


FIG. 15

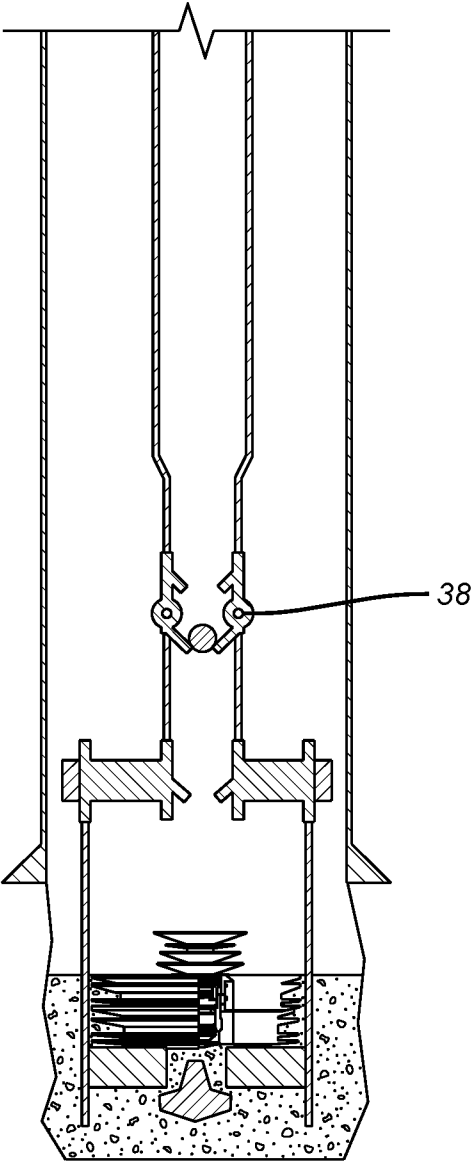


FIG. 16

+

+

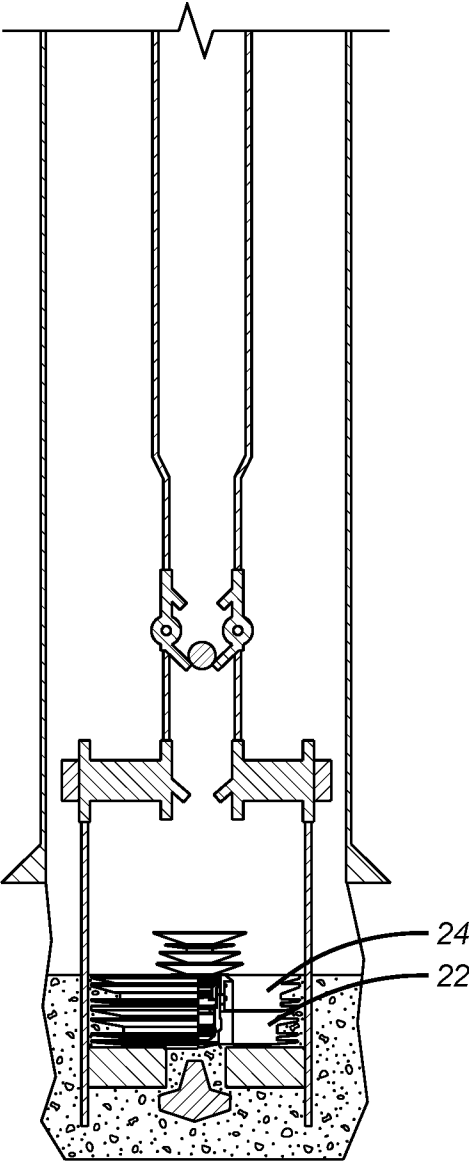


FIG. 17

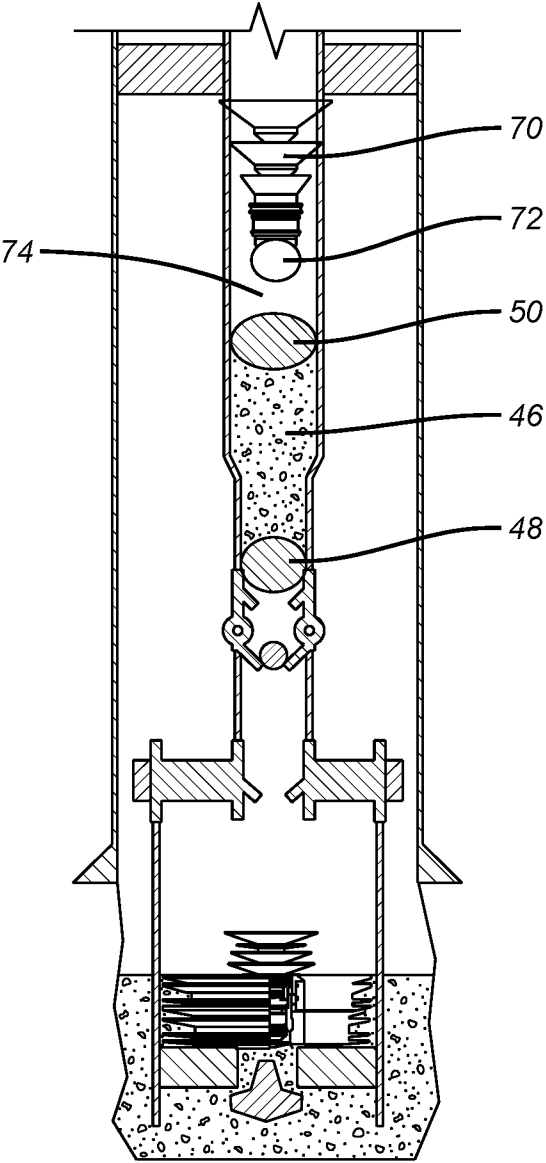


FIG. 18

+

+

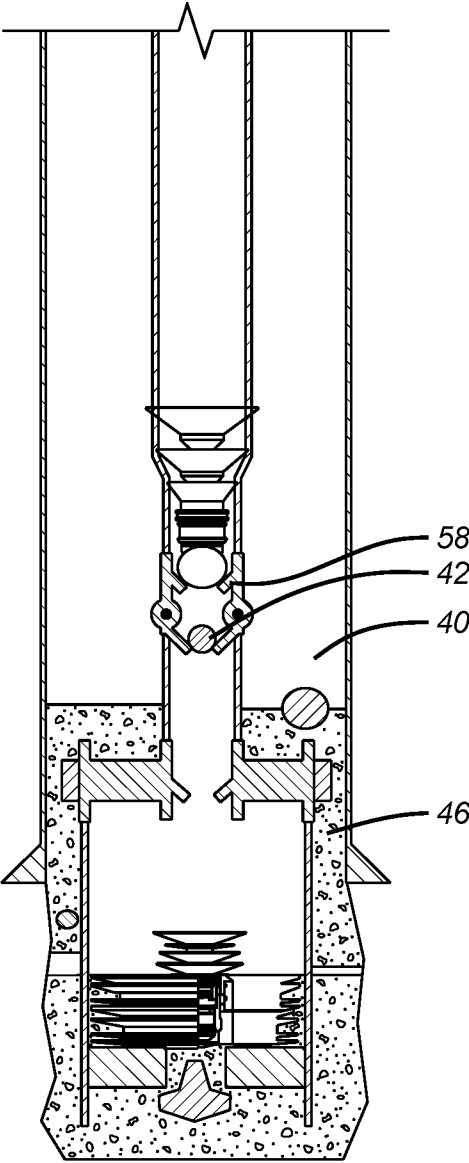


FIG. 19

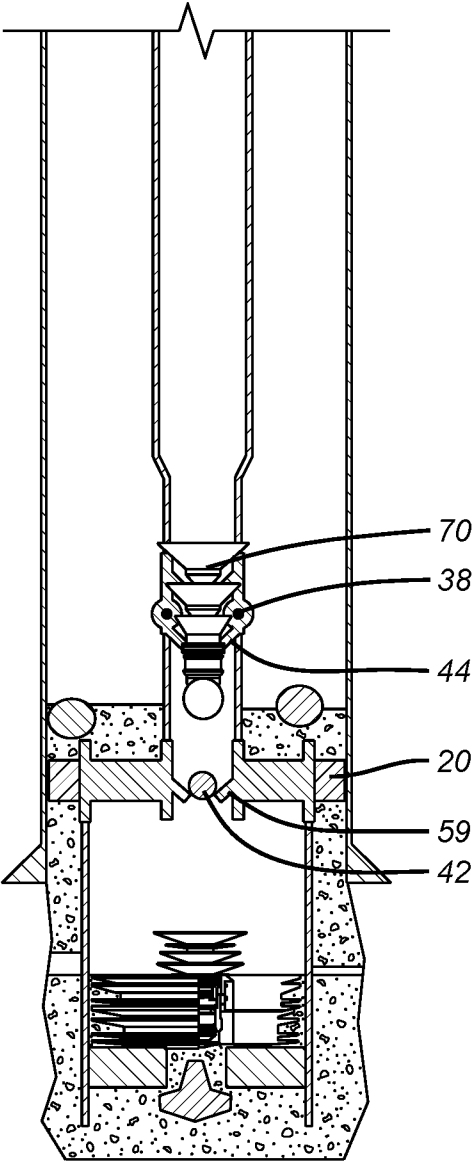


FIG. 20

+

+

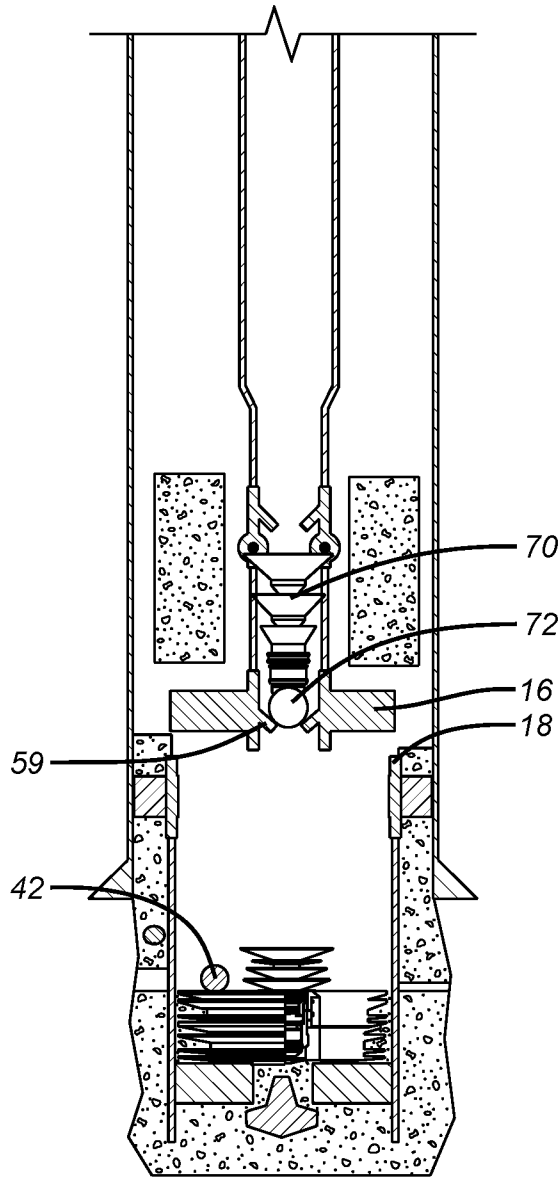


FIG. 21

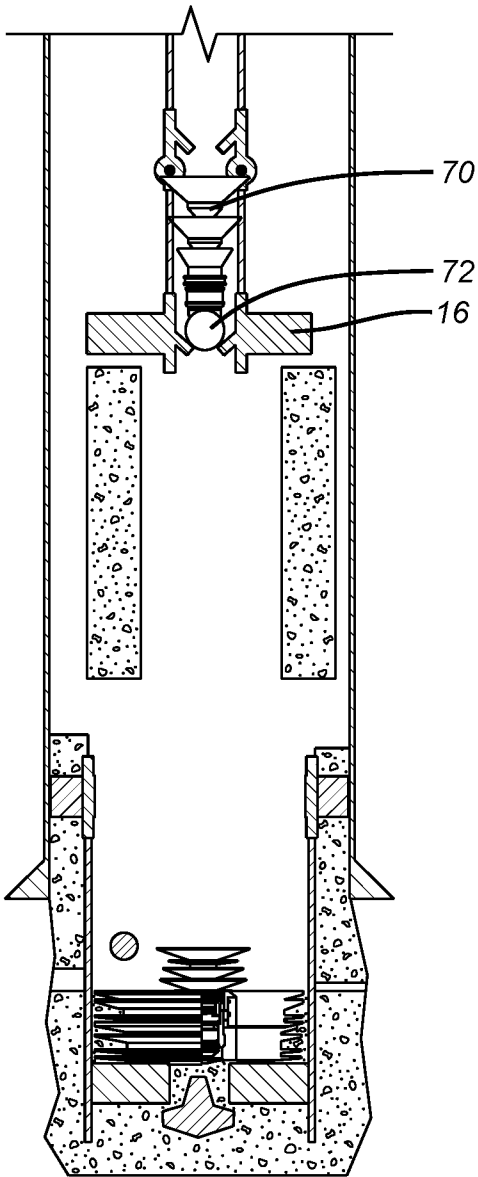


FIG. 22

+

+

12/15

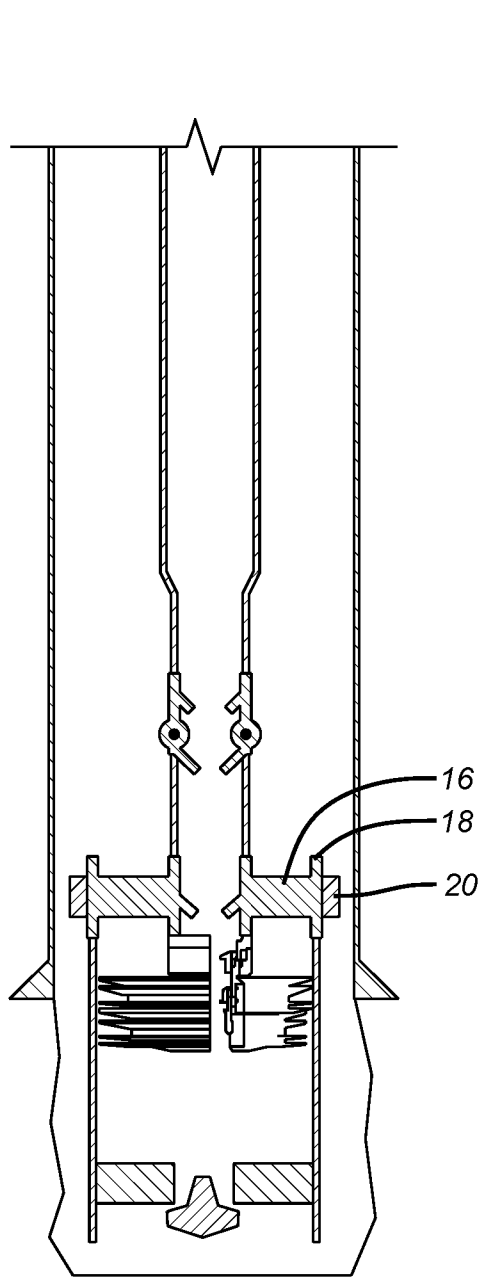


FIG. 23

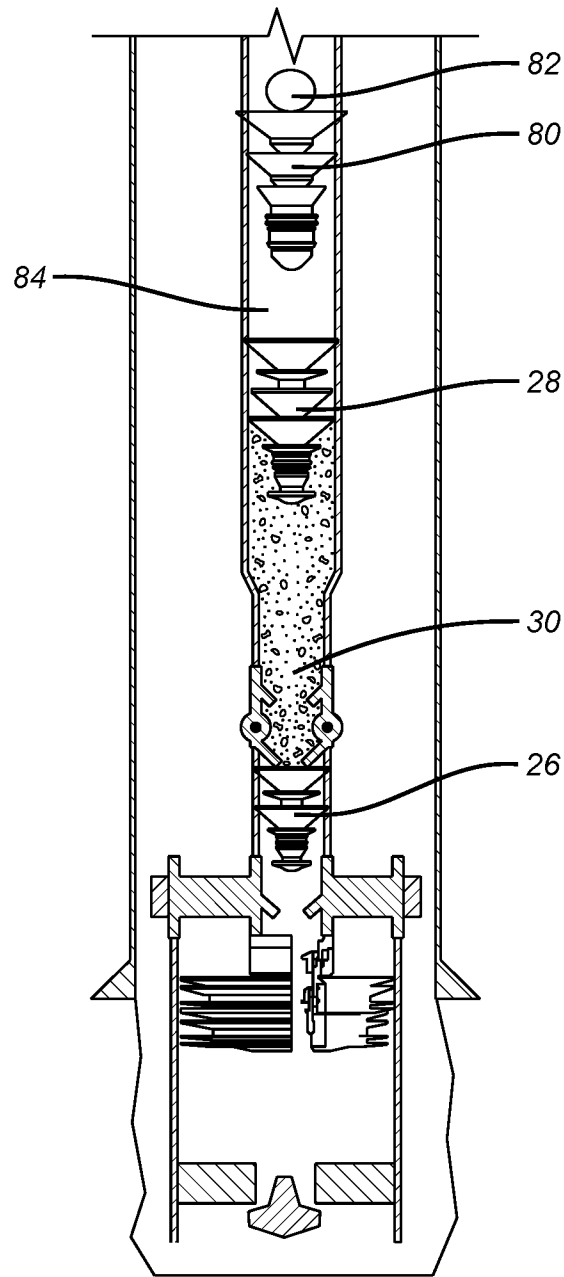


FIG. 24

+

+

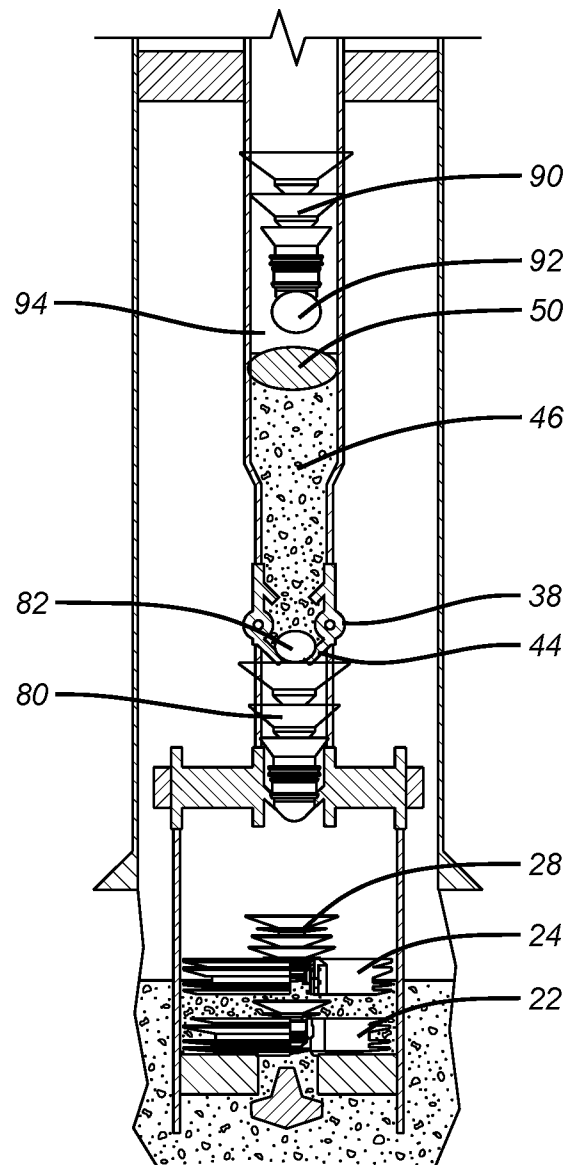


FIG. 25

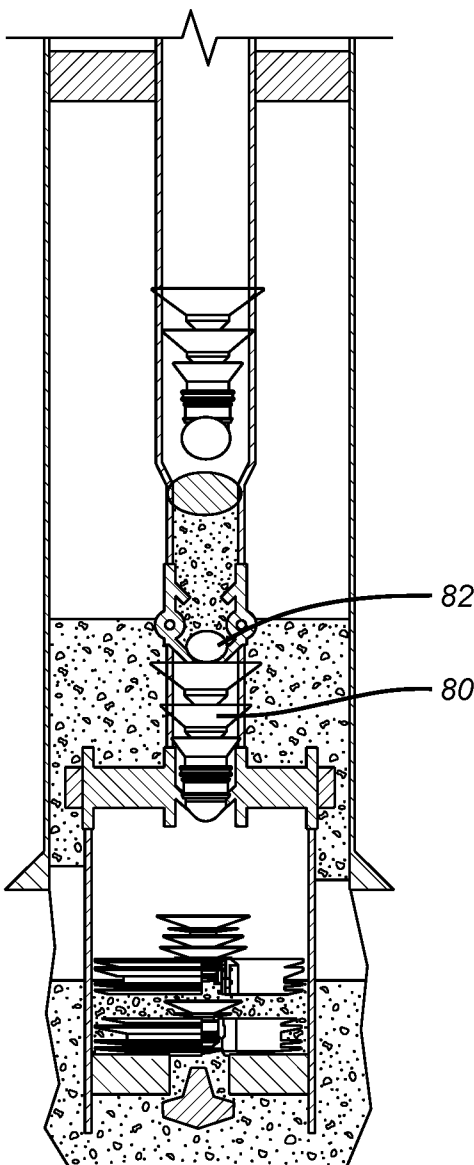


FIG. 26

+

+

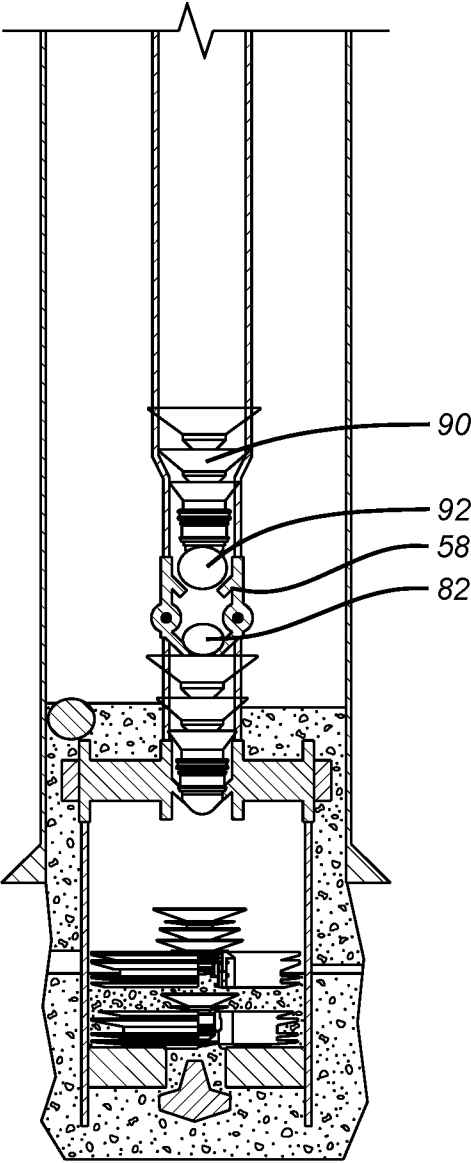


FIG. 27

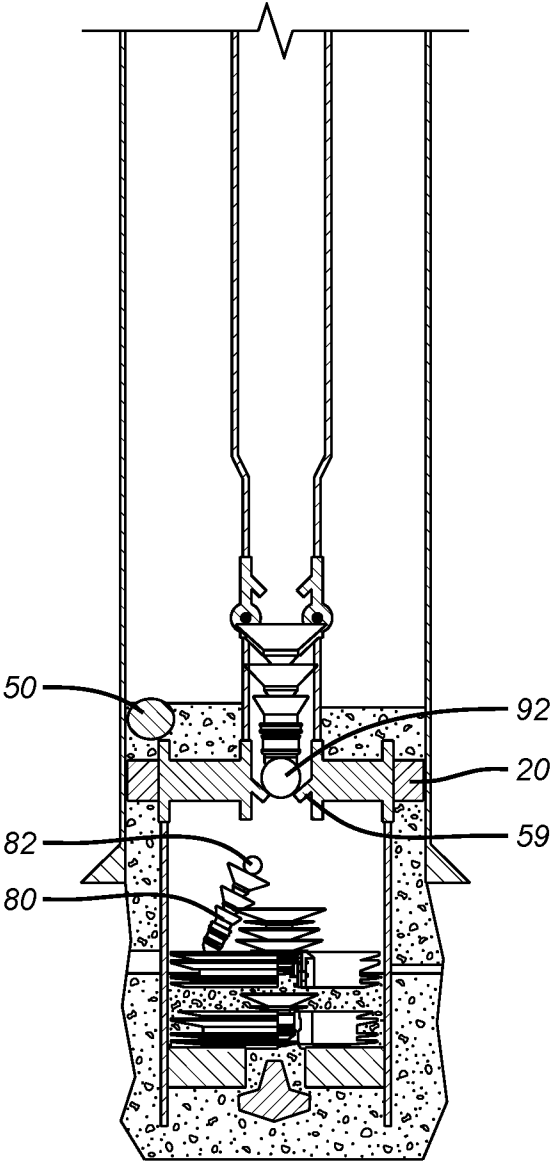


FIG. 28

+

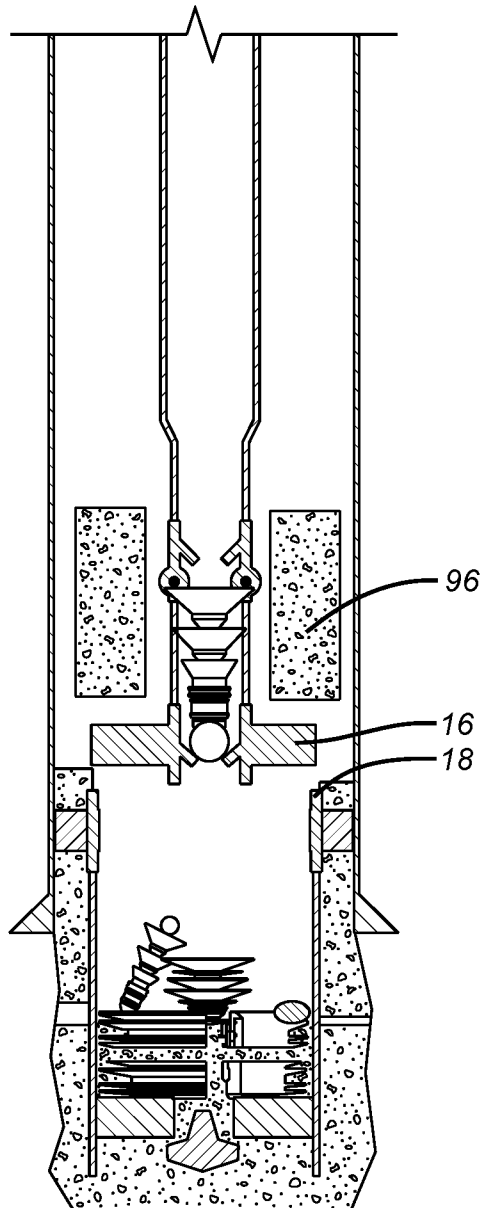


FIG. 29

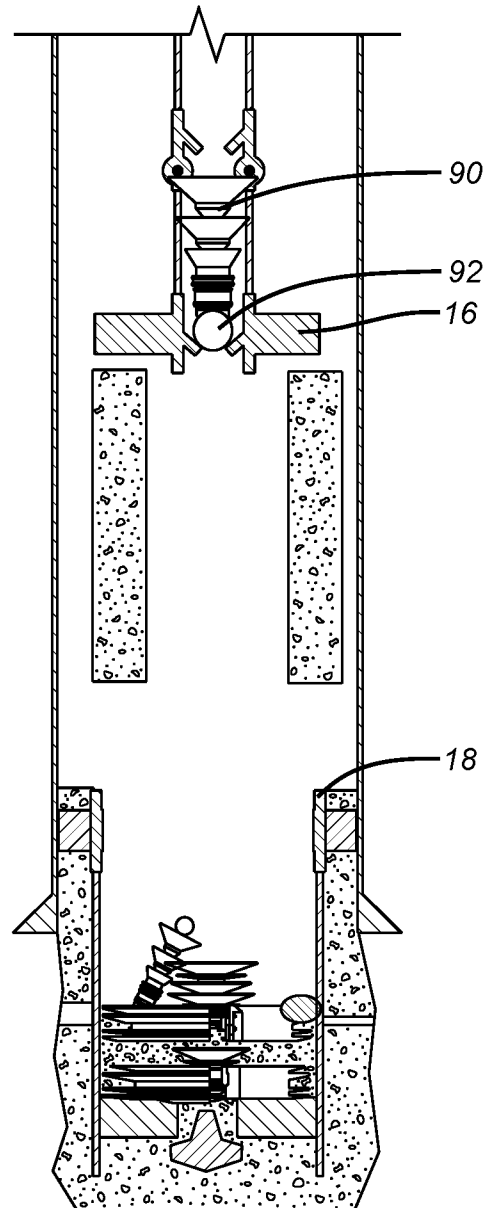


FIG. 30

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/043153**A. CLASSIFICATION OF SUBJECT MATTER****E21B 33/138(2006.01)i, E21B 33/16(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 33/138; E21B 23/04; E21B 33/13; E21B 33/14; E21B 34/10; E21B 43/10; E21B 7/00; E21B 33/16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: cementing, liner, hanger/packer, bottom up, top down, ported sub, object, sphere, dart, ball

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016-0281459 A1 (HALLIBURTON ENERGY SERVICES, INC.) 29 September 2016 See paragraphs [0025], [0038], [0044], [0045], [0048] and figures 2, 4, 5.	1-5, 12
A		6-11, 13-18
A	US 2004-0256157 A1 (TESSARI et al.) 23 December 2004 See paragraphs [0062]-[0064] and figures 11-13.	1-18
A	US 2010-0051277 A1 (CHASE et al.) 04 March 2010 See paragraphs [0025]-[0031] and figures 1-5.	1-18
A	WO 2016-191578 A1 (WEATHERFORD TECHNOLOGY HOLDINGS, LLC) 01 December 2016 See paragraphs [0019]-[0027] and figure 2.	1-18
A	US 2017-0096882 A1 (BAKER HUGHES INCORPORATED) 06 April 2017 See paragraph [0006] and claims 1, 2.	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2018 (23.10.2018)

Date of mailing of the international search report

23 October 2018 (23.10.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

PARK, Tae Wook

Telephone No. +82-42-481-3405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/043153

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016-0281459 A1	29/09/2016	EP 3044405 A2 EP 3044405 A4 US 10053954 B2 WO 2015-088524 A2 WO 2015-088524 A3	20/07/2016 26/04/2017 21/08/2018 18/06/2015 08/10/2015
US 2004-0256157 A1	23/12/2004	AT 442510 T CA 2422150 A1 CA 2424337 A1 CA 2429076 A1 CA 2519019 A1 CA 2519019 C EP 1604093 A2 EP 1604093 A4 EP 1604093 B1 NO 20054695 A NO 328039 B1 US 7108080 B2 WO 2004-083590 A2 WO 2004-083590 A3	15/09/2009 13/09/2004 30/09/2004 17/10/2004 30/09/2004 29/01/2013 14/12/2005 02/05/2007 09/09/2009 12/12/2005 16/11/2009 19/09/2006 30/09/2004 24/02/2005
US 2010-0051277 A1	04/03/2010	CA 2637082 A1 CA 2637082 C US 2009-0020285 A1 US 7654324 B2 US 8162047 B2	16/01/2009 25/01/2011 22/01/2009 02/02/2010 24/04/2012
WO 2016-191578 A1	01/12/2016	AU 2016-268394 A1 BR 112017024469 A2 CA 2985200 A1 EP 3303758 A1 US 2018-0135378 A1	07/12/2017 24/07/2018 01/12/2016 11/04/2018 17/05/2018
US 2017-0096882 A1	06/04/2017	None	