

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Binding band and binding band set

(51)⁶ International Patent Classification(s)
B65D 63/10 (2006.01) ^{2BMEP} **B65D**
B65D 63/18 (2006.01) ^{63/18}
B65D 63/10 20060101ALI2007022
20060101AFI2006072 ^{4BMEP}
PCT/JP2005/009379

(21) Application No: 2005247737

(22) Application Date: 2005 .05 .23

(87) WIPO No: W005/115867

(30) Priority Data

(31) Number	(32) Date	(33) Country
2005-130116	2005 .04 .27	JP
2004-154157	2004 .05 .25	JP

(43) Publication Date : 2005 .12 .08

(71) Applicant(s)
Nichido Kogyo Kabushiki Kaisha

(72) Inventor(s)
Okamoto, Isao

(74) Agent/Attorney
Davies Collison Cave, 1 Nicholson Street, Melbourne, VIC, 3000

(56) Related Art
JP 10-318439
Laid-Open Utility Model No. 50164/1985
JP 38-16457
US3672004

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2005年12月8日 (08.12.2005)

PCT


(10) 国際公開番号
WO 2005/115867 A1

- (51) 国際特許分類: B65D 63/18 (74) 代理人: 伊藤 英彦, 外(UTOH, Hidehiko et al.); 〒5420082 大阪府大阪市中央区島之内1丁目2番19号 協和島之内ビル アイミー国際特許事務所 Osaka (JP).
- (21) 国際出願番号: PCT/JP2005/009379
- (22) 国際出願日: 2005年5月23日 (23.05.2005)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願2004-154157 2004年5月25日 (25.05.2004) JP
特願2005-130116 2005年4月27日 (27.04.2005) JP
- (71) 出願人 (米国を除く全ての指定国について): 日動工業株式会社 (NICHIDO KOGYO KABUSHIKI KAISHA) [JP/JP]; 〒5700002 大阪府守口市佐太中町6丁目4番11号 Osaka (JP).
- (72) 発明者: および
- (75) 発明者/出願人 (米国についてのみ): 岡本 功 (OKAMOTO, Isao) [JP/JP]; 〒5700002 大阪府守口市佐太中町6丁目4番11号 日動工業株式会社内 Osaka (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ユーロッパ (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- 添付公開書類:
— 国際調査報告書

/ 続葉有 /

(54) Title: BINDING BAND AND BINDING BAND SET

(54) 発明の名称: 結束バンドおよび結束バンドセット

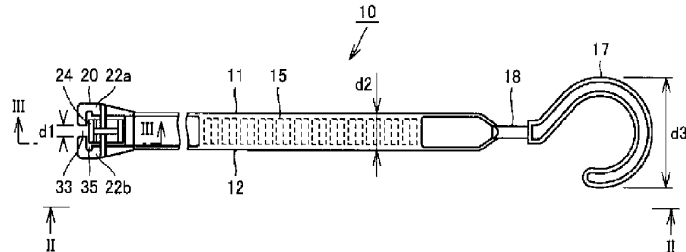

(57) Abstract: A binding band (10), comprising a band part (11), a hook part (17) for suspension at one end of the band part (11) and a surrounding wall part (20) at the other end of the band part (11) and having a passage (35) for vertically passing the band part (11) therein. The surrounding wall part (20) further comprises a slit (33) for inserting the band part (11) from the side into the passage (35).

(57) 要約: 結束バンド10は、帯部11と、帯部11の一端側に設けられた吊下げ用フック部17と、帯部11の他方端側に設けられ、帯部11を上下方向に通過させる通路35を有する囲い壁部20とを備え、囲い壁部20は、帯部11を側方から通路35内に挿入するためのスリット33を有する。

WO 2005/115867 A1



— 補正書・説明書

2文字コード及び他の略語については、定期発行される各PCTガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

27 Jan 2009

2005247737

BINDING BAND AND BINDING BAND SET

5 The present invention relates to a binding band and binding band set and more particularly, it relates to a binding band and binding band set which can be hooked on a wall or a column.

The conventional binding band is disclosed in Japanese Unexamined Patent Publication No. 2003-237823, for example.

10 The binding band comprises a band part having a plurality of long and thin teeth continuously provided in the longitudinal direction, and a framed buckle having a hole at one end of the band part, to which the band part is inserted and a locking tooth which engages with the tooth, at a part of the hole.

15 The above document (Japanese Unexamined Patent Publication No. 2003-237823) discloses a binding band in which a band part does not easily come off but can be pulled out by a simple operation.

The conventional binding band was constituted as described above. Although the band part of the binding band was devised in many ways, treatment after binding was not considered.

20 The present invention was made in view of the above problems and examples of the invention seek to provide a binding band and a binding band set in which a desired arrangement can be made after an object is bound by the binding band.

25 In accordance with one aspect of the present invention, there is provided a binding band comprising: a band part; a connecting part provided at one end of said band part; and an enclosed-wall part provided at the other end of said band part and having a passage through which said band part is passed in a direction perpendicular to a direction that the band part extends; wherein said enclosed-wall part has a slit through which said band part is inserted into said passage from the side; said slit has a first opening dimension; said band part comprises a first neck part having a second width dimension smaller than said first opening dimension and a band body having a third width dimension larger than the first opening dimension, said passage has a width dimension larger than said third width dimension; said connecting part is a pendant hook part; and said pendant hook part can
30
35 be rotated with respect to said band part.

In accordance with another aspect of the present invention, there is

provided a binding band comprising: a band part; a connecting part provided at one end of said band part; and an enclosed-wall part provided at the other end of said band part and having a passage through which said band part is passed in a direction perpendicular to a direction that the band part extends; wherein said enclosed-wall part has a slit through which said band part is inserted into said passage from the side; said slit has a first opening dimension; said band part comprises a first neck part having a second width dimension smaller than said first opening dimension and a band body having a third width dimension larger than the first opening dimension, said passage has a width dimension larger than said third width dimension; said connecting part is a pendant hook part; and said pendant hook part is detachable from said band part.

In accordance with another aspect of the present invention, there is provided a binding band comprising: a band part; a connecting part provided at one end of said band part; and an enclosed-wall part provided at the other end of said band part and having a passage through which said band part is passed in a direction perpendicular to a direction that the band part extends; wherein said enclosed-wall part has a slit through which said band part is inserted into said passage from the side; said slit has a first opening dimension; said band part comprises a first neck part having a second width dimension smaller than said first opening dimension and a band body having a third width dimension larger than the first opening dimension, said passage has a width dimension larger than said third width dimension; and said band body comprises a first band body provided on the side of said enclosed-wall part, and a second band body connected to said first band body.

An example binding band comprises a band part, a connecting part provided at one end of the band part, and an enclosed-wall part provided at the other end of the band part and having a passage through which the band part is vertically passed, in which the enclosed-wall part has a slit through which the band part is inserted into

the passage from the side.

Thus, the band part can be inserted into the enclosed-wall part through the slit and the binding band can be retained by a certain connecting apparatus provided separately through the connecting part provided on one end of the band part.

As a result, the binding band in which a desired arrangement can be made after an object is bound with the binding band.

Preferably, the slit has a first opening dimension, the band part comprises a neck part having a width dimension smaller than the first opening dimension and a band body having a third width dimension larger than the first opening dimension, and the passage has a width dimension larger than the third width dimension.

Further preferably, the connecting part has a fourth width dimension larger than the third width dimension.

The band body may be provided with a plurality of continuous teeth and the enclosed-wall part may be provided with a locking part to be engaged with the teeth.

It is preferable that the neck part is provided at one end of the band part and between the band body and the connecting part.

In addition, the connecting part may be a pendant hook part and the pendant hook part may be turned around the band part. In addition, the pendant hook part is preferably detachable from the band part.

Further preferably, the connecting part has a configuration that can be detachably connected to a predetermined connecting tool.

In an example, the band body comprises a first band body provided on the side of the enclosed-wall part, and a second band body connected to the first band body.

A second neck part having the same width dimension as that of the first neck part may be provided between the first band body and the second band body.

The second band body may be provided with a stopper member preventing the whole second band body from passing through the passage.

According to another aspect of the present invention, a binding band set comprises a first binding band and a second binding band and a binding band connecting tool for connecting the first and second binding bands

detachably. Each of the binding bands comprises a band part, a connecting part provided at one end of the band part and an enclosed-wall part provided at the other end of the band and having a passage through which the band is passed in the vertical direction, in which the enclosed-wall part has a slit through which the band part is inserted into the passage, and the binding band connecting tool connects the connecting part of the first binding band and the connecting part of the second binding band detachably.

Preferably, the binding band connecting tool comprises a first receiving opening detachably receiving the first binding band connecting part, and a second receiving opening detachably receiving the second binding band connecting part.

According to still another aspect of the present invention, a binding band comprises first and second neck parts having a first dimension, a first band body provided at a region sandwiched between the first and second neck parts and having a second width dimension larger than the first dimension, a second band body connected to the first band body through the second neck part and having a third width dimension smaller than the second width dimension, and an enclosed-wall part provided at the end of the second band body in the opposite direction to the first band body and provided with a passage having a dimension smaller than the second width dimension but larger than the third width dimension.

The invention is described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 is a plan view showing a binding band;

Fig. 2 is a side view showing the binding band;

Fig. 3 is a view showing a detail of an enclosed-wall part;

Fig. 4 is a view showing a state in which the binding band is used;

Fig. 5 is a view showing a procedure for passing a band part through the enclosed-wall part;

Fig. 6 is a view showing a procedure for passing the band part through the enclosed-wall part;

Fig. 7 is a view showing another example of a pendant hook part;

Fig. 8 is a view showing another example in which the pendant hook part engages with a neck part;

Fig. 9 is a view taken from a part shown by arrows IX-IX in Fig. 8;

Fig. 10 is a view showing a binding band set in which two binding bands each having connecting parts are connected with a connecting tool;

Fig. 11 is a view showing the connecting tool;

Fig. 12 is a view showing a method of connecting the connecting tool and the binding band;

Fig. 13 is a view showing a method of using the binding band set;

Fig. 14 is a view showing a method of using the binding band set;

Fig. 15 is a view showing a pendant hook part provided with an expansion preventing ring;

Fig. 16 is a plan view showing a binding band according to another example;

Fig. 17 is a side view showing the binding band according to another example;

Fig. 18A is a view showing a used state of the binding band according to another example; and

Fig. 18B is a view showing the used state of the binding band according to another example.

Hereinafter, an example is described with reference to the drawings.

Fig. 1 is a plan view showing a binding band, Fig. 2 is a sectional view taken from a part shown by arrows II-II in Fig. 1, Fig. 3 is a sectional view taken from a part shown by arrows III-III in Fig. 1. In addition, a part (shown by A) is enlarged so as to be easily understood in Fig. 2.

Referring to Figs. 1 to 3, a binding band 10 comprises a band part 11, a hook part 17 provided at one end of the band part 11 as an example of a connecting part, and an enclosed-wall part 20 provided at the other end of the band part 11 and having a passage through which the band part 11 is passed in the vertical direction.

The band part 11 comprises a band body 12 and a neck part 18 provided on the side of the hook part 17 of the band part 11. The neck part

18 has a cylindrical shape and the band part 11 has a flat shape.

5 The band part 11 has a predetermined width d2 and a plurality of teeth 15 continuously provided in the longitudinal direction in the flat band body 12 as shown in Fig. 1. Referring to the part shown by A in Fig. 2, the tooth 15 has a vertical surface 15a perpendicular to the surface of the band body 12 and a slanted surface 15b which is gradually decreased in thickness toward the neck part 18.

10 The enclosed-wall part 20 has a passage 35 inside, through which the band part 11 is passed. A thickness dimension of the passage 35 is almost the same as that of the band part 11 or slightly larger than that. A slit 33 having a width dimension d1 smaller than the width d2 of the band part 11 is formed at a tip end of the passage 35 in the enclosed-wall part 20. In order to form the passage 35 and the slit 33, the enclosed-wall part 20 comprises a pair of portal wall parts 22a and 22b which are oppositely provided at an interval. A space is provided between the pair of wall parts 22a and 22b and a locking part 24 is provided at the space.

15 The locking part 24 is elastically supported on the pair of wall parts 22a and 22b by a support part 31 in a state in which a space part is opened around. In addition, the locking part 24 is arranged so as to intersect with the passage 35.

20 Here, the width d1 of the slit 33 is larger than that of the neck part 18. Therefore, the neck part 18 and the subsequent band body 12 of the binding band 10 are passed through the passage 35 of the enclosed-wall part 20 as will be described below with reference to Figs. 4 to 6.

25 The locking part 24 has a locking tooth 26 which abuts on the vertical surface 15a of the tooth 15 provided in the band part 11. A rib 27 (refer to Fig. 3) is provided at the locking part 24 so as to retain the locking tooth 26 at a predetermined position with respect to the support part 31.

30 As described above, the tooth 15 provided in the band body 12 has the slanted surface 15b which is gradually increased in thickness from the neck part 18 and the vertical surface 15a succeeding to the slanted surface. When the band body 12 is passed through the passage 35, since it engages with the locking part 24 in the increasing order of thickness, an object can be easily bound by pulling the pendant hook 17 which was passed through the passage 35. In addition, once the object is bound and the tooth 15

engages with the locking tooth 26, it is difficult to release the engagement in the reverse direction.

Next, a description is made of how to use the binding band having the hook part 17 as one example of the connecting part. Fig. 4 is a view showing a state in which the binding band 10 binds the object and the locking tooth 26 of the locking part 24 engages with the tooth 15 of the band part 11. As shown by an arrow in Fig. 4, the hook part 17 and the neck part 18 are brought close to the enclosed-wall part 20, and the neck part 18 is passed through the slit 33 and then the band body 12 is passed through the passage 35.

A concrete inserting method is described with reference to Figs. 5 and 6. Fig. 5 is a view showing a state in which the neck part 18 of the binding band 10 is brought close to the slit 33 and Fig. 6 is a view showing a state in which the neck part 18 of the binding band 10 is passed through the slit 33.

Referring to Figs. 5 and 6, the neck part 18 of the binding band 10 is put in the slit 33 of the enclosed-wall part 20 and then the band part 11 is put through the passage 35. Then, the pendant hook 17 is pulled. As a result, as shown in Fig. 4, the band part 11 is integrated with the enclosed-wall part 20. The object bound by the band part 11 is not shown.

Referring to Fig. 4, since the binding band 10 has the pendant hook part 17, the pendant hook part 17 can be hooked on any projection after the object is bound.

Next, the pendant hook part 17 is described. As shown in Fig. 1, the pendant hook part 17 is in the shape of a hook. Since the hook part 17 of the binding band 10 is hook-shaped, the binding band 10 can be hooked on any external convex part.

In addition, instead of the hook-shaped pendant hook part 17, a ring-shaped pendant hook 51 may be used as shown in Fig. 7. In the case of the ring-shaped hook part 51, the binding band 10 can be easily hooked on a projected nail, bar and the like and it is not liable to get unhooked even when it is shaken in some degree.

Although the pendant hook part 17 is in the shape of a hook on a flat surface of the band part 11 in Fig. 1, the present invention is not limited to this and the hook of the pendant hook part 17 may be faced in any direction with respect to the flat surface of the band part 11.

Next, another example is described. Figs. 8 and 9 show views of another example. Fig. 8 is a sectional view showing a vicinity of a hook part 41 and a neck part 18 according to another example, and Fig. 9 is a view taken from a part shown by arrows IX-IX in Fig. 8.

Referring to Figs. 8 and 9, a neck supporting part 48 is provided as the connecting part and a pendant hook part 41 is provided using the neck supporting part 48. The pendant hook part 41 can be turned in any direction with respect to the neck part 18 and detached from the neck part 18.

Referring to Figs. 8 and 9, the neck part 18 has a cylindrical neck supporting part 48 whose diameter is larger than that of the neck part 18, at its tip end. Meanwhile, the pendant hook part 41 has a hook part fixing part 42 at a part in which the fixing part 42 engages with the neck part 18.

As shown in Fig. 9, the hook part fixing part 42 has a neck part supporting part 44 for rotatably retaining the cylindrical neck supporting part 48 at the end on the side of the neck part 18. The neck part supporting part 44 is U-shaped so that the neck part 18 can be dismounted from one direction in its circumferential direction. In addition, a stopper 45 is provided at the neck part supporting part 44 so that the neck part 18 may not get out.

Since the neck part 18 and the pendant hook part 17 have such configurations, the pendant hook part 17 can be faced in any direction with respect to the direction of the flat part of the band part 11. Furthermore, the pendant hook part 17 may be mounted on the neck part 18 after the object is bound with the binding band and the bound object may be retained at any position.

Although the description was made of the example in which the pendant hook part is in the shape of a hook or a ring in the above examples, any configuration may be employed provided that it can be retained at the outside.

Furthermore, the description was made of the case in which the neck part is cylindrical in the above, examples however, it will be understood that

in other examples it may be flat or have configuration changed from a flat shape to a cylindrical shape.

Still further, although the description was made of the case in which the locking tooth is locked after engagement with the tooth in the above examples, it will be understood that in other examples it may be constituted so as to be unlocked and released.

Yet another example will be described hereinafter. According to this example, a binding band set is provided by connecting two binding bands each having the neck supporting parts 48 as the connecting parts shown in Fig. 8 with a connecting tool. Fig. 10 shows the connected state. Referring to Fig. 10, two binding bands 40a and 40b are connected with a connecting tool 50. Fig. 11 shows the detail of the connecting tool 50. Fig. 11 is an enlarged view showing a part XI in Fig. 10. Referring to Fig. 11, the connecting tool 50 has a first receiving opening 51 detachably receiving a neck supporting part 48a of one binding band 40a, and a second receiving opening 52 detachably receiving a neck supporting part 48b of the other binding band 40b. The first receiving opening 51 and the second receiving opening 52 comprise neck supporting part receiving parts 51a and 52a receiving the neck supporting part 48 of the binding band 40, and neck part slits 51b and 52b receiving the neck part 18, respectively.

Fig. 12 is a view showing a state in which the two binding bands 40a and 40b are to be connected to the connecting tool 50. As shown by an arrow in Fig. 12, the neck supporting parts 48a and 48b of the binding bands 40a and 40b are inserted into the receiving openings 51 and 52 of the connecting tool 50 from the direction in which the receiving openings 51 and 52 of the connecting tool 50 are provided so as to be connected, respectively.

Next, a concrete method for using the binding band set shown in Fig. 10 will be described. Figs. 13 and 14 are views showing one example of the method of using the binding band set. As shown in Figs. 13 and 14, the one binding band 40b is mounted on a hanging rod 54 previously. Then, a rope 55 and the like to be hung is bound by the other binding band 40a. Then, the binding band 40a binding the rope 55 and the like and the binding band 40b mounted on the hanging rod 54 are connected with the connecting tool 55.

Fig. 14 shows a case where an electric wire 56 and the like are bound by the binding band set shown in Fig. 10.

In addition, it is not needless to say that the binding band set can be used in any usage other than the above.

Next, a method of preventing the pendant hook part 41 from expanding. According to the binding band 10 having the pendant hook part 41 shown in Figs. 1 or 8, the hook part 41 could expand because of lowering in strength of the pendant hook part 41 while it is hung and the hung object could fall. Fig. 15 is a view showing the pendant hook 41 provided with an expansion preventing ring 43 for preventing it. As shown in Fig. 15, a hole 41a is provided at the connecting part between the pendant hook part 41 and the hook part fixing part 42 and the ring 43 for preventing the expansion is provided such that it is passed through the hole 41a and can be turned around the hole 41a. The other end of the expansion preventing ring 42 is engaged with an engagement projection part 41 provided at the end of the pendant hook to prevent the hook part 41 from expanding when the hook part 41 is hung.

Next, another example will be described. Figs. 16 and 17 are a plan view and a side view showing a binding band, respectively. Referring to Figs. 16 and 17, a second neck part 62 and a second band body 61 are provided between the band body 12 and the neck part 18 of the binding band 40 shown in Fig. 10. Since the second band body 61 and the second neck part 62 are provided in this example, the band body 12 and the neck part 18 in the above example are referred to as the first band body and the first neck part, occasionally in the following example.

Here, the configurations and dimensions of the second band body 61 and the second neck part 62 are the same as those of the first band body 12 and the first neck part 18. Therefore, the second neck part 62 can be passed through the slit 33 of the enclosed-wall part 20.

The second band body 61 has a passage part 63 having the same width d2 as that of the first band body 12, and a stopper part 64 having a width so as not to pass the passage 35, and a step part 65 is provided between the passage part 63 and the stopper part 64. In addition, a recess 66 is

provided in the center of the second band body 61 to constitute a step part to be engaged with the locking part 24 (refer to a part surrounded by a circle pointed by an arrow in Fig. 17).

Next, a method of using this binding band 60 will be described. When the binding band 60 is inserted into the passage 35 of the enclosed-wall part 20 through the slit 33, the object bound by the binding band 60 can be squeezed and retained similar to that in the above example. Meanwhile, even when the first neck part 18 is inserted into the passage 35 of the enclosed-wall part 20 through the slit 33, since the stopper part 64 preceding the step part 65 cannot pass the passage 35, the bound object can be retained without being squeezed. This state is shown in Figs. 18A and 18B.

Fig. 18A shows the state of the object bound by the binding band 60 when the first neck part 18 is passed through the slit 33 of the enclosed-wall part 20, and Fig. 18B is a view taken from arrow B-B in Fig. 18A. As shown in Fig. 18A, according to this example, a member 68 bound by the binding band 60 is hung loosely without being squeezed. In addition, in Fig. 18A, the neck supporting part 48 is detachably retained by a pendant member 71 that is large in width and has a configuration close to an ellipse.

As described above, according to this example, since the two neck parts are provided in the binding band, the binding band can retain the bound member selectively whether the bound member is retained so as to be squeezed or retained without being squeezed by selecting either one of the two neck parts.

In addition, although the stopper part is provided such that the width of the second band body 61 is provided so as to be partially larger than that of the passage 35 in the above example, it will be understood that in other examples a stopper part may be provided such that the dimension of its thickness and the like is changed.

In addition, although the description has been made of the case where the length of the first band body is longer than that of the second band body in the above example, the length of the first band body and the length of the second band body may be set to any dimension.

Although the examples were made with reference to the drawings, the present invention may not be limited to the illustrated examples.

2005247737 27 Jan 2009

Various kinds of modifications or variations can be added to the above examples in the same scope or the equivalent scope of the present invention.

The present invention can be advantageously used as a binding band which can be hanged on a wall or a column.

5 The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of
10 endeavour to which this specification relates.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of
15 any other integer or step or group of integers or steps.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A binding band comprising:
 - a band part;
 - 5 a connecting part provided at one end of said band part; and
 - an enclosed-wall part provided at the other end of said band part and
 - having a passage through which said band part is passed in a direction
 - perpendicular to a direction that the band part extends;
 - wherein
 - 10 said enclosed-wall part has a slit through which said band part
 - is inserted into said passage from the side;
 - said slit has a first opening dimension;
 - said band part comprises a first neck part having a second
 - width dimension smaller than said first opening dimension and a band body
 - 15 having a third width dimension larger than the first opening dimension,
 - said passage has a width dimension larger than said third width
 - dimension;
 - said connecting part is a pendant hook part; and
 - said pendant hook part can be rotated with respect to said band part.
 - 20
2. A binding band comprising:
 - a band part;
 - a connecting part provided at one end of said band part; and
 - an enclosed-wall part provided at the other end of said band part and
 - 25 having a passage through which said band part is passed in a direction
 - perpendicular to a direction that the band part extends;
 - wherein
 - said enclosed-wall part has a slit through which said band part
 - is inserted into said passage from the side;
 - 30 said slit has a first opening dimension;
 - said band part comprises a first neck part having a second
 - width dimension smaller than said first opening dimension and a band body
 - having a third width dimension larger than the first opening dimension,
 - said passage has a width dimension larger than said third width
 - 35 dimension;
 - said connecting part is a pendant hook part; and

2005247737 27 Jan 2009

said pendant hook part is detachable from said band part.

3. A binding band comprising:
 - a band part;
 - 5 a connecting part provided at one end of said band part; and
 - an enclosed-wall part provided at the other end of said band part and having a passage through which said band part is passed in a direction perpendicular to a direction that the band part extends;
 - wherein
 - 10 said enclosed-wall part has a slit through which said band part is inserted into said passage from the side;
 - said slit has a first opening dimension;
 - said band part comprises a first neck part having a second width dimension smaller than said first opening dimension and a band body
 - 15 having a third width dimension larger than the first opening dimension,
 - said passage has a width dimension larger than said third width dimension; and
 - said band body comprises a first band body provided on the side of said enclosed-wall part, and a second band body connected to said first band
 - 20 body.
4. The binding band according to claim 3, wherein a second neck part having the same width dimensions as that of said first neck part is provided between said first band body and said second band body.
- 25 5. The binding band according to claim 3, wherein said second band body is provided with a stopper member preventing said whole second band body from passing through said passage.
- 30 6. A binding band set comprising a first binding band and a second binding band and a binding band connecting tool for connecting said first and second binding bands detachably, wherein
- each of said binding bands comprises:
 - a band part;
 - 35 a connecting part provided at one end of said band part; and
 - an enclosed-wall part provided at the other end of said band part, and

2005247737 27 Jan 2009

having a passage through which said band is passed in the vertical direction, wherein

said enclosed-wall part has a slit through which said band part is inserted into said passage; and

5 said binding band connecting tool connects the connecting part of said first binding band and the connecting part of said second binding band detachably.

7. The binding band set according to claim 6, wherein
10 said binding band connecting tool comprises a first receiving opening detachably receiving said first binding band connecting part, and a second receiving opening detachably receiving said second binding band connecting part.

15 8. A binding band comprising:
 first and second neck parts having a first dimension;
 a first band body provided at the region sandwiched between said first and second neck parts and having a second width dimension larger than said first dimension;
20 a second band body connected to said first band body through said second neck part and having a third width dimension smaller than said second width dimension, and
 an enclosed-wall part provided at the end of said second band body in the opposite direction to said first band body and provided with a passage
25 having a dimension smaller than said second width dimension but larger than said third width dimension.

9. A binding band substantially as hereinbefore described with reference to the drawings and/or Examples.

30 10. A binding band set substantially as hereinbefore described with reference to the drawings and/or Examples.

FIG. 1

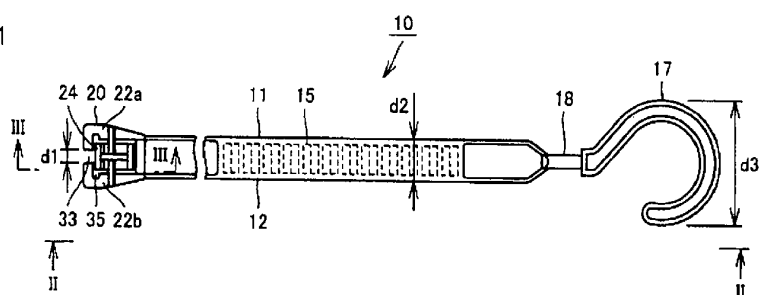


FIG. 2

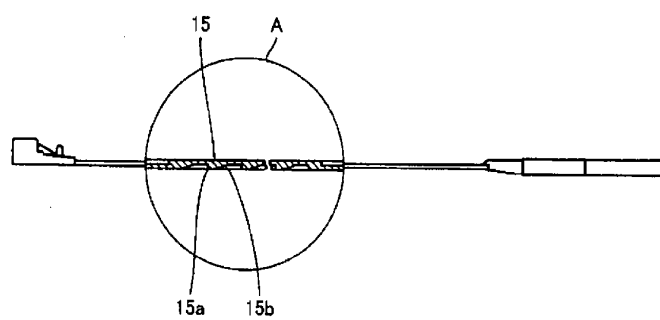


FIG. 3




FIG. 4

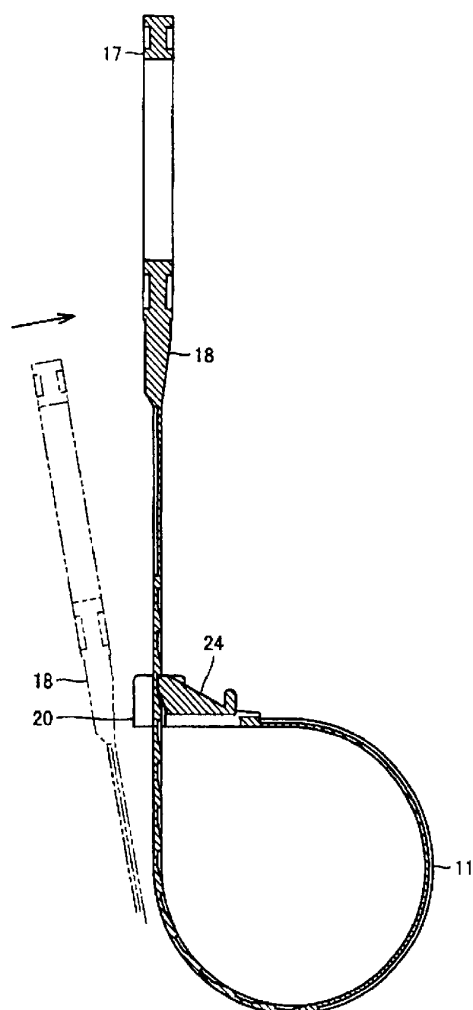


FIG. 5

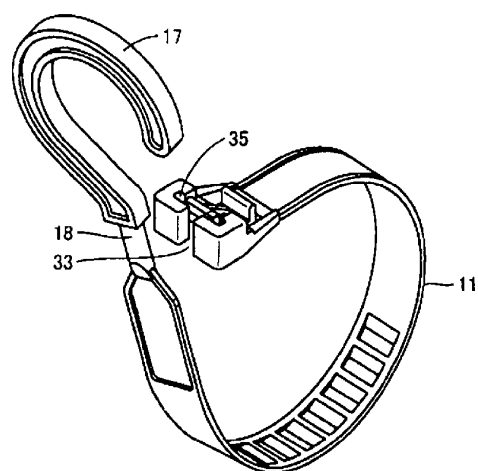


FIG. 6

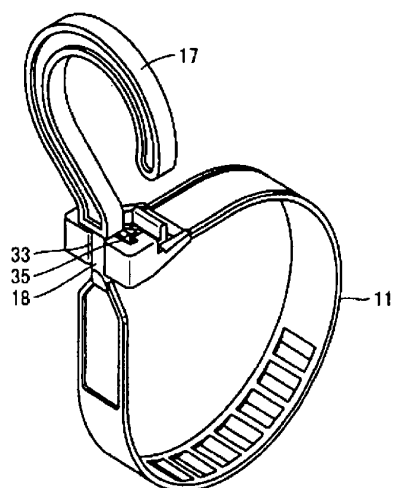


FIG. 7




FIG. 8

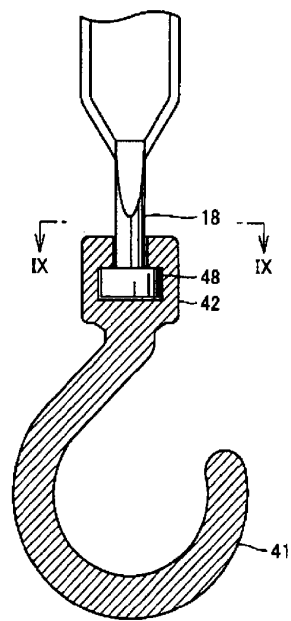


FIG. 9




FIG. 10

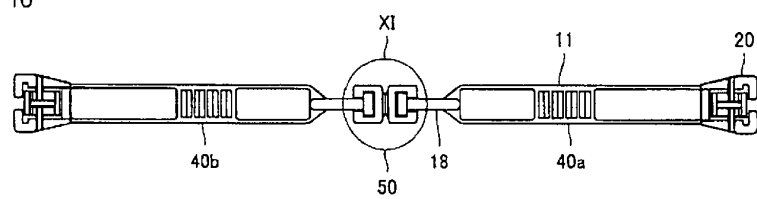


FIG. 11




FIG. 12

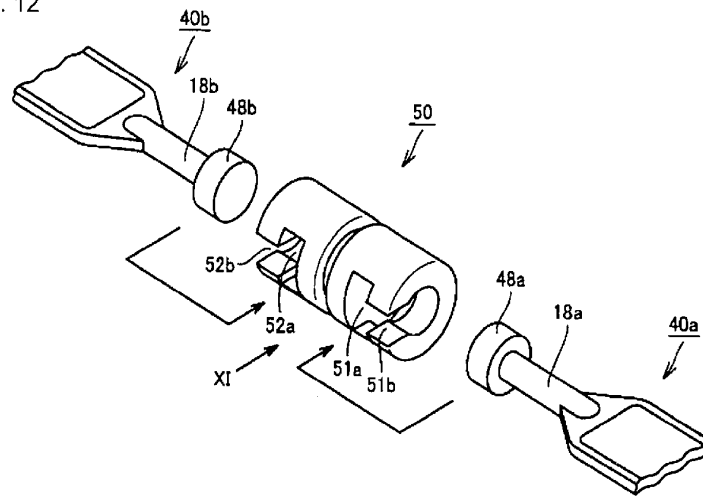


FIG. 13

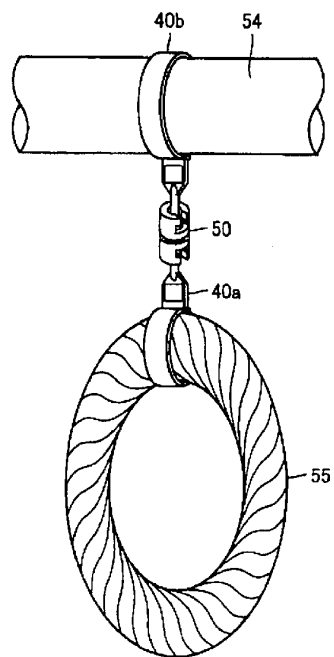


FIG. 14

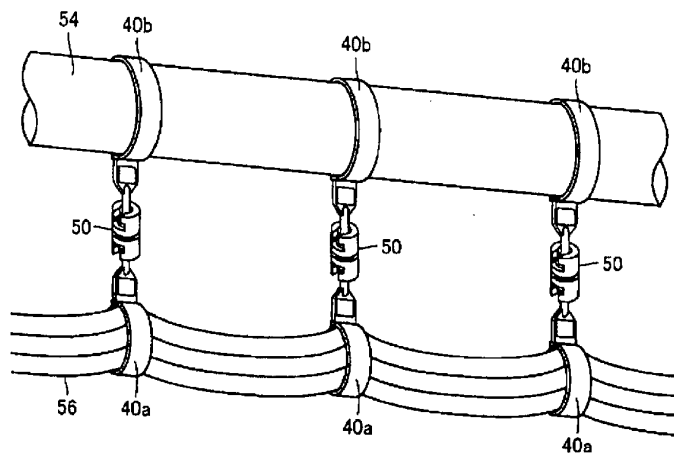


FIG. 15

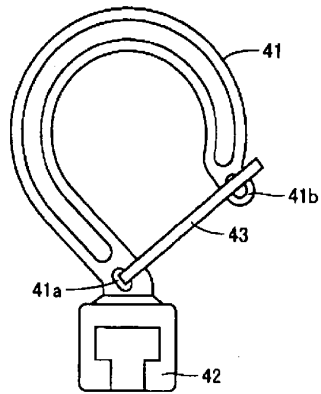


FIG. 16

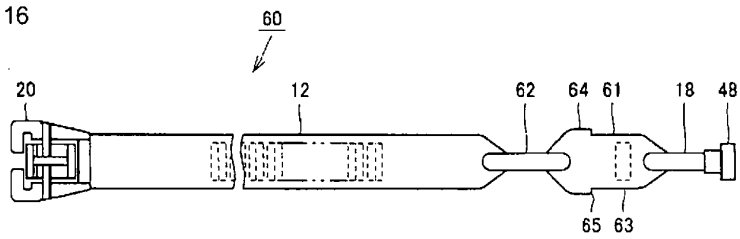


FIG. 17

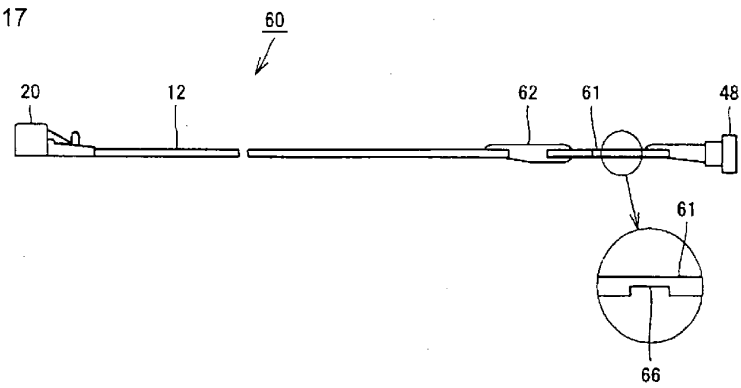


FIG. 18A

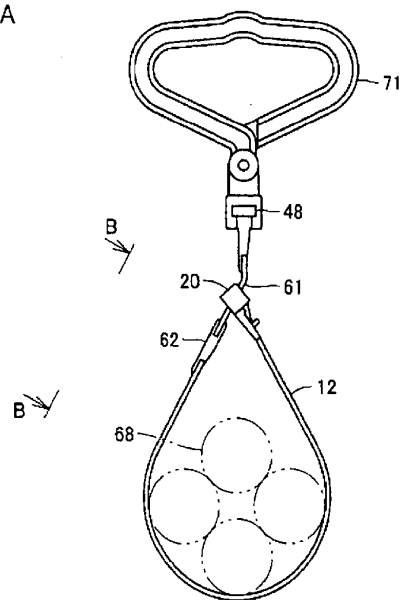


FIG. 18B

