



(22) Date de dépôt/Filing Date: 1993/07/14
(41) Mise à la disp. pub./Open to Public Insp.: 1994/03/22
(45) Date de délivrance/Issue Date: 2006/11/28
(62) Demande originale/Original Application: 2 100 532
(30) Priorité/Priority: 1992/09/21 (US07/947,753)

(51) Cl.Int./Int.Cl. *A61B 17/068* (2006.01),
A61B 17/04 (2006.01), *A61B 17/03* (2006.01)


(72) Inventeurs/Inventors:
GREEN, DAVID T., US;
GEISTE, ROBERT J., US;
PERSON, WAYNE C., US

(73) Propriétaire/Owner:
UNITED STATES SURGICAL CORPORATION, US

(74) Agent: MCFADDEN, FINCHAM

(54) Titre : DISPOSITIF D'APPLICATION D'UNE AGRAFE MENISCALE

(54) Title: DEVICE FOR APPLYING A MENISCAL STAPLE

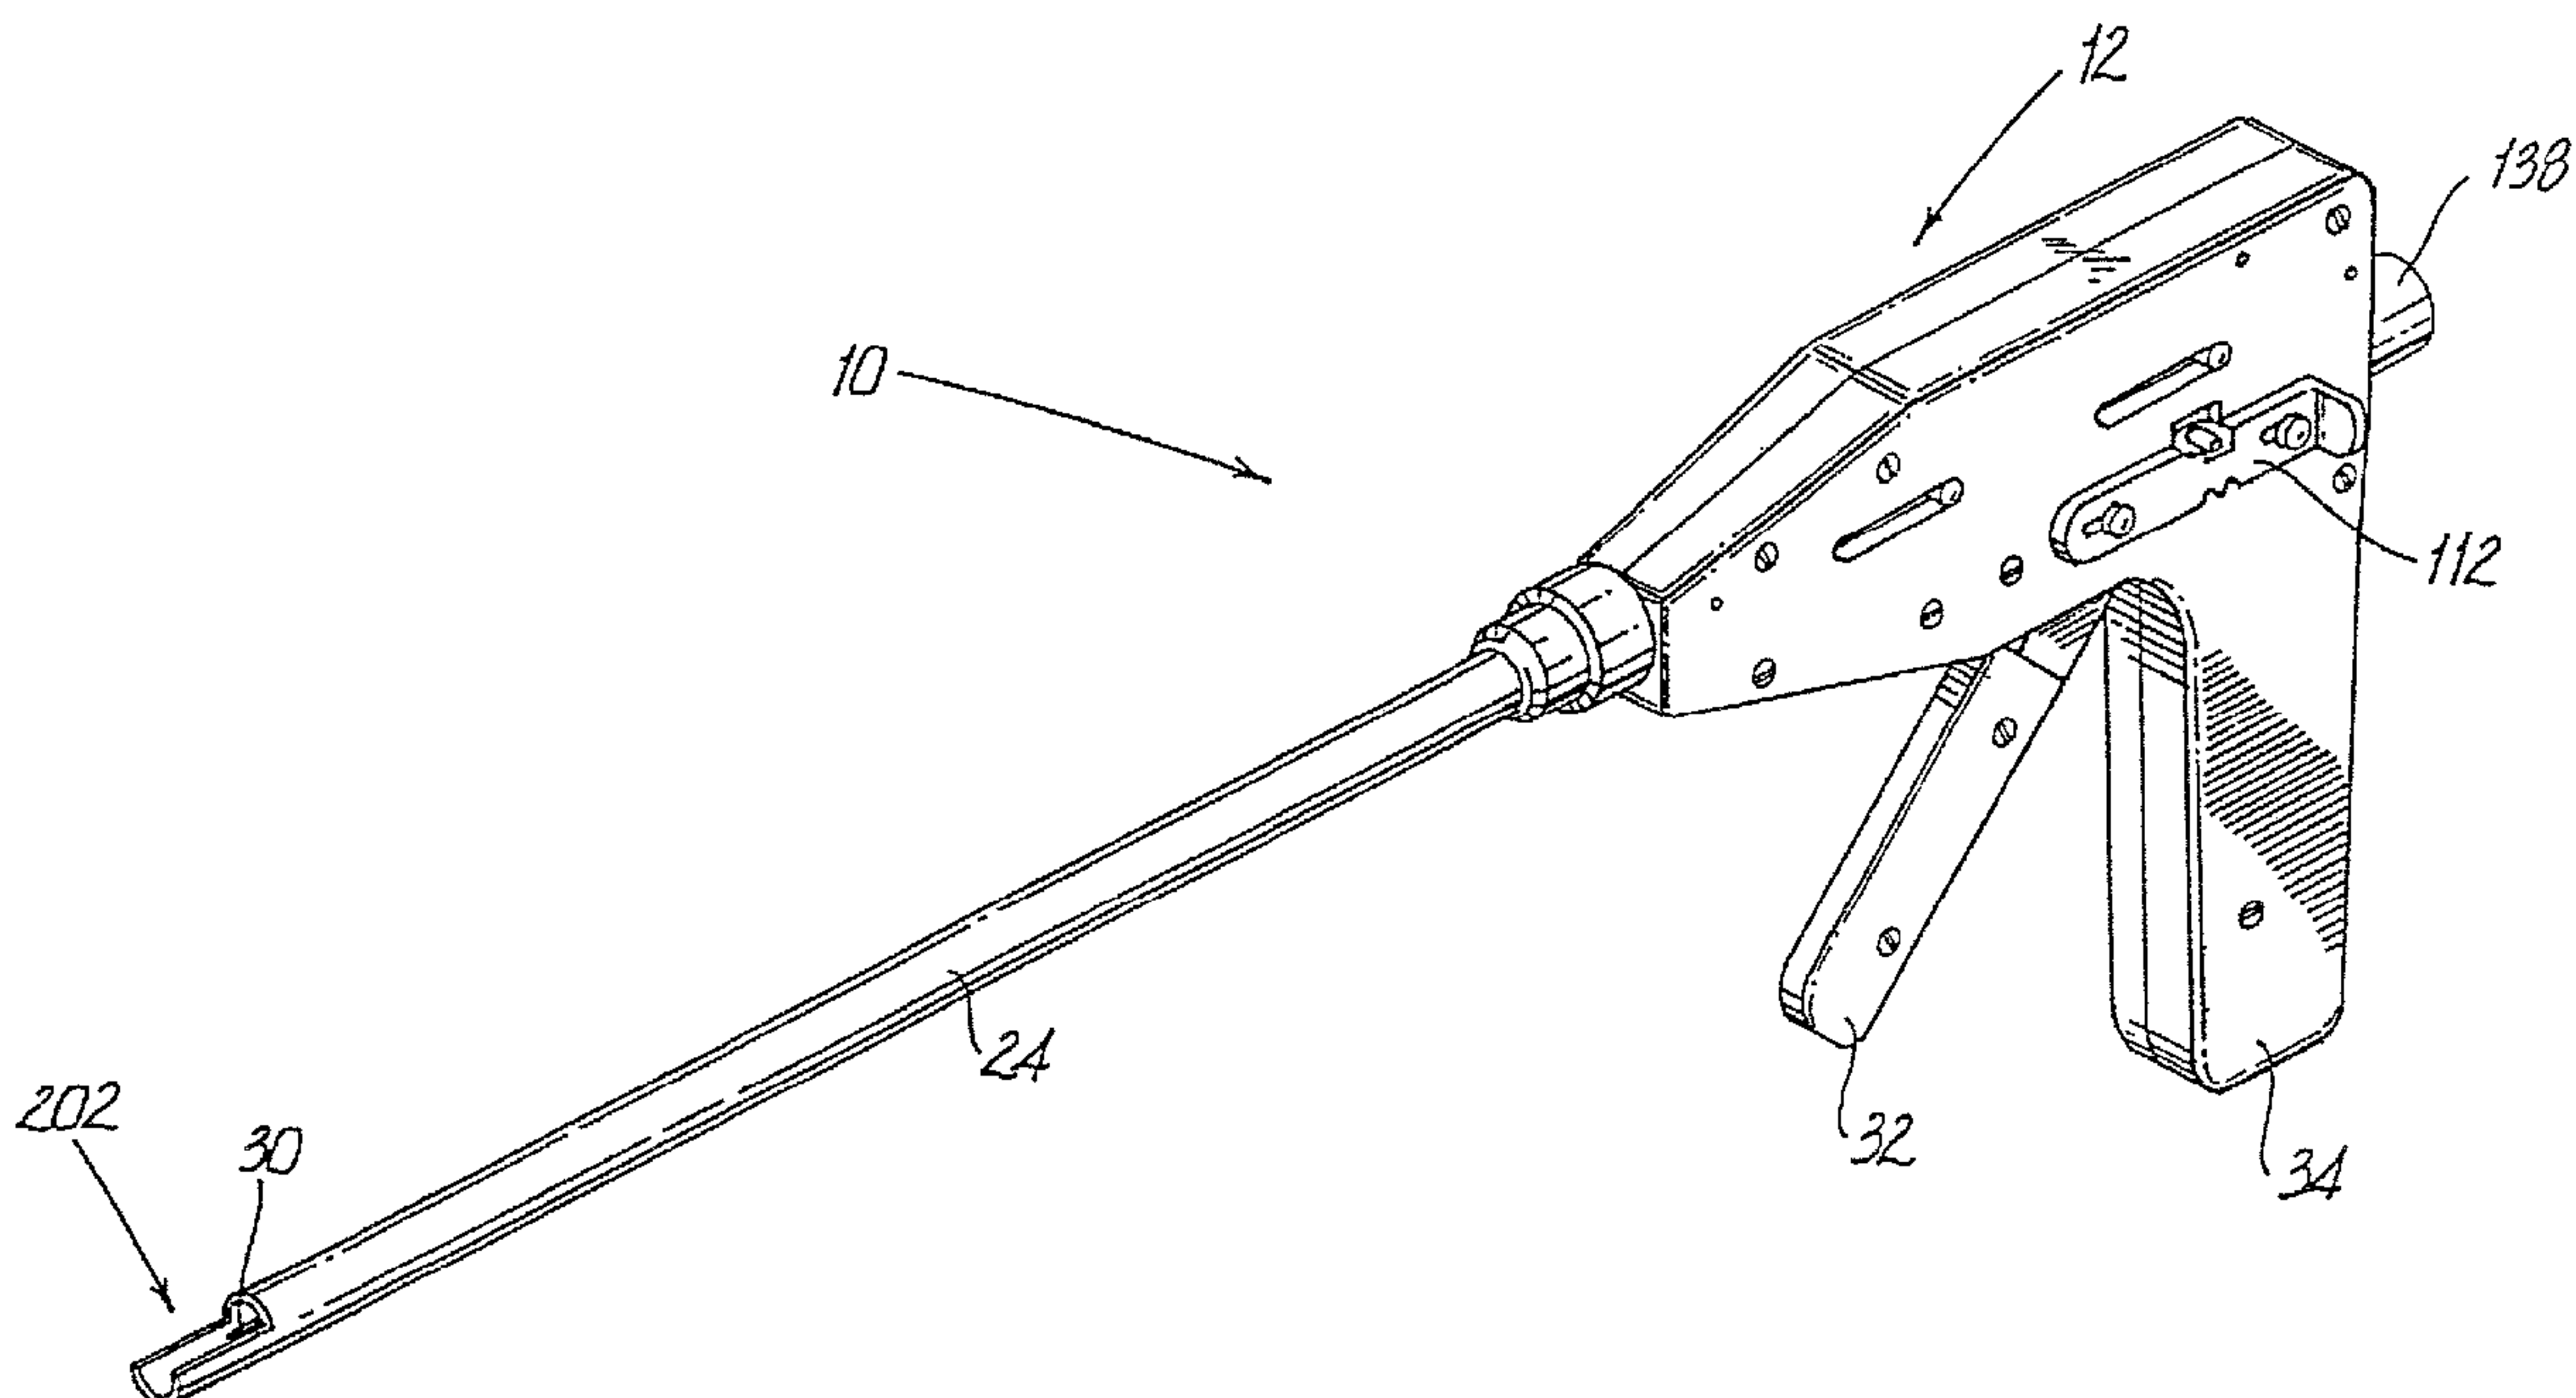

(57) Abrégé/Abstract:

A surgical instrument for applying surgical fasteners to torn tissue having a handle mechanism; and an elongated body portion extending from said handle mechanism, said body portion defining a longitudinal axis of said instrument. Means positioned adjacent a distal end of said body portion remote from said handle mechanism for releasably engaging a fastener. Advancing means includes at least one shaft member associated with the handle mechanism and extending longitudinally within the body portion for linearly advancing the engaging means along the longitudinal axis to drive the fastener into the torn tissue. A release member is associated with the advancing means, the release member being moveable into operative engagement with the advancing means to release the at least one shaft member to linearly retract the engaging means along the longitudinal axis to disengage the fastener from the engaging means, the fastener being positioned in the torn tissue.



ABSTRACT

A surgical instrument for applying surgical fasteners to torn tissue having a handle mechanism; and an elongated body portion extending from said handle mechanism, said body portion defining a longitudinal axis of said instrument. Means positioned adjacent a distal end of said body portion remote from said handle mechanism for releasably engaging a fastener. Advancing means includes at least one shaft member associated with the handle mechanism and extending longitudinally within the body portion for linearly advancing the engaging means along the longitudinal axis to drive the fastener into the torn tissue. A release member is associated with the advancing means, the release member being moveable into operative engagement with the advancing means to release the at least one shaft member to linearly retract the engaging means along the longitudinal axis to disengage the fastener from the engaging means, the fastener being positioned in the torn tissue.

-1-

DEVICE FOR APPLYING A MENISCAL STAPLE

10

BACKGROUND OF THE INVENTION

This is a division of copending Canadian Application Serial No. 2,100,532, filed July 14, 1993.

1. Field of the Invention

20

The present invention relates to the field of laparoscopic or endoscopic surgery, and more particularly to a device for advancing a surgical staple into torn tissue such as the meniscus of the knee for repairing the torn meniscus.

30

1 2. Discussion Of The Prior Art

 A technique has been developed using arthroscopic instruments which provides for meniscal repair through the use of a pair of surgical needles which are
5 inserted through cannuli into the knee on opposite sides of the tear in the meniscus to be repaired. The needles are linked by a single suture which is pushed down through the cannuli and across the tear. An incision is made in the skin at the point where the needles exit the knee joint so that the leading end of each needle may be grasped and
10 pulled through the joint. The ends of the sutures are then grasped after the needles are removed from the suture ends and the suture is then tied outside the skin so that a horizontal suture is created in the meniscus. This procedure is repeated for placement of as many sutures as necessary to repair the meniscus tear. This process is very time consuming, and the strength of the repair is dependent upon the tension created by the
15 knot tied in the suture.

 An additional procedure and instrument is known from U.S. Patent No. 5,002,562, in which a barbed clip and instrument for applying the clip for repairing peripheral meniscal tears is disclosed. The instrument has a pair of opposed arcuate
20 jaws which are shaped to hold a complementary-shaped curved surgical clip therebetween, such that the barbs of the clip are retained within notches in the jaws until the clip is inserted. The legs of the clip are typically joined by a flexible material, such as a suture. The jaws are biased in a normally open position, and as
25 the jaws are pushed into the tissue, the jaws are scissored or closed together until they preferably overlap to move the legs of the clip together until they cross. The jaws are then reopened and backed out of the tissue, with the barbs of the clip retaining the clip in position in the tissue.

30

35

- 3 -

However, a disadvantage of such a device lies in the fact that the scissoring or cutting action of the jaws necessary to move the legs of the clip together may further damage the surrounding meniscal tissue. Consequently, there remains a need for a tool for applying tacks or staples which avoids incidental damage to the tissue during insertion of the staple. The need exists for a device for repairing torn tissue, such as the meniscus of the knee, 10 which obviates the disadvantages encountered in the prior art and provides an efficient suture-type device which expedites the surgical procedure and reduces the amount of precision necessary on the part of the surgeon during the procedure.

SUMMARY OF THE INVENTION

In accordance with an embodiment of the present invention there is provided a surgical instrument for applying surgical fasteners to torn tissue, comprising: 20 a handle mechanism; an elongated body portion extending from the handle mechanism, the body portion defining a longitudinal axis of the instrument; means positioned adjacent a distal end of the body portion remote from the handle mechanism for releasably engaging a fastener; advancing means including at least one shaft member associated with the handle mechanism and extending longitudinally within the body portion for linearly advancing the engaging means along the longitudinal axis to drive the fastener into the torn tissue; and a release 30 member associated with the advancing means the release member being moveable into operative engagement with the advancing means to release the at least one shaft member to linearly retract the engaging means along the longitudinal axis to disengage the fastener from the engaging means, the

- 3a -

fastener being positioned in the torn tissue.

In accordance with another embodiment of the present invention there is provided a surgical instrument for applying a surgical fastener to torn tissue, the fastener including a first leg and a second leg joined by a flexible material; the instrument comprising: a handle; an elongated body portion having at least one inner rod within an outer tube and defining a longitudinal axis and extending at a proximal end from the handle, the fastener being
10 positioned at a distal end of the body portion; a needle mechanism at the distal end of the body portion for releasably engaging the fastener, the needle mechanism having a tip configured to penetrate tissue to facilitate insertion of the fastener into tissue; an advancing mechanism disposed in the handle including a ratchet mechanism to permit incremental linear advancement of the needle mechanism along the longitudinal axis upon movement of the handle, the inner rod of the body portion coupling
20 the advancing mechanism to the needle mechanism; and a release member for disengaging the ratchet mechanism to permit retraction of the inner rod and the needle mechanism after the fastener is positioned in tissue.

Yet another embodiment of the present invention provides a fastener applying device, comprising: a movable handle; an elongated member extending distally from the movable handle; at least one rack and pawl mechanism operably associated with the handle; and at least one shaft operably connected to a respective rack and pawl mechanism,
30 the at least one shaft extending within the elongated member and having a distal end configured to receive a fastener; wherein movement of the handle causes movement of the at least one shaft within the elongated member and wherein the

- 3b -

at least one rack and pawl mechanism includes first and second rack members and pawl members, and the at least one shaft includes first and second shafts.

A still further embodiment of the present invention provides a fastener applying device for applying a fastener to torn tissue, the fastener including a first leg and a second leg joined by a flexible material, the device comprising: a movable handle; a first shaft operably
10 connected to the movable handle and having a distal end configured to engage the first leg of the fastener; a second shaft operably connected to the movable handle and having a distal end configured to engage the second leg of the fastener; wherein the first shaft is movable independent of the second shaft to move the first leg of the fastener distally independent of the second leg of the fastener.

Also provided, in one embodiment, is a fastener applying device for applying surgical fasteners having a pair of tissue penetrating leg members joined to each other
20 by a flexible portion, the device comprising: a movable handle; an elongated member extending from the movable handle; first and second shaft members slidably disposed in the elongated member; an advancing mechanism disposed between and operably connected to the shaft members and the movable handle to permit selective advancement of either the first shaft member or both the first and second shaft members; wherein the shaft members terminate at a distal end of the elongated member remote from the movable handle in a fastener engaging surface, such that movement of the movable
30 handle causes the advancing mechanism to move the shaft member and the fastener engaging surface towards the distal end of the elongated member to drive a fastener into tissue.

The tool of the present invention provides, in a preferred embodiment, for sequential advancement of the

- 3c -

staple member in that the legs are advanced one at a time. A first leg is advanced into position in the tissue, followed by advancement of the second leg so that the flexible material is positioned across the tear in the meniscus. After the first leg is positioned in the tissue, the pawl member associated with the first shaft member is disengaged from its rack member to terminate further

10

20

30

-4-

advancement of the first leg. The second leg member is then advanced into the tissue so that the suture material is positioned across the tear. The tool further includes means for releasing the shaft members after insertion of the staple to return the shafts to their original position so that the tool may be withdrawn from the surgical site.

10 The device for repairing torn tissue and muscles may comprise a pair of surgical needles, each of which is engaged with one of a pair of anchoring leg members, which essentially comprise absorbable rods having outwardly projecting barbs. Each anchoring leg member is secured adjacent a second end opposite the penetration end to an absorbable flexible material such as a suture which extends between the two anchoring leg members. The means of engagement between the needles and anchoring leg members allows for a first pushing force applied axially to the needles in a first direction to be transmitted to the anchoring leg members to advance the anchoring members into
20 the torn tissue, while allowing for the release of the needles responsive to a second pulling movement applied in an opposite direction to the pushing force. The means of engagement between the needles and anchoring members may be provided by a frictional engagement between a channel in each of the anchoring members and the needles.

30 The tool of the present invention thus reduces the incidental trauma to tissue caused during the insertion of a staple by providing for linear insertion of the staple. The tool expedites the surgical process by providing for quick loading of the staple and insuring accurate placement of the tissue tear.

1 The staple member for use with the tool of the present invention
preferably includes a pair of anchoring leg members constructed with a plurality of
outwardly directed barb members along their length. The material of which the leg
5 members are formed is preferably a substantially rigid bioresorbable material which
allows for penetration of the legs into the meniscal tissue. The barb members permit
forward penetration but restrict or prevent reverse movement of the barbs, thereby
preventing the legs from backing out of the tissue after placement. Preferably, the leg
10 members are formed by injection molding techniques.

 The leg members include a longitudinal slot or channel which accepts a
needle member which is positioned at the distal end of each shaft member of the tool
of the present invention. The leg members are loaded onto the needles for placement
into the tissue, such that the needles penetrate the tissue so that the leg members may
15 be driven behind the needles into position. Preferably, the leg members are joined at
their rearward ends by a flexible material such as a suture. After the leg members are
secured in the tissue, the needles, and the tool, are withdrawn leaving the leg
members and suture anchored in the tissue.

20 The needles for use with the invention may have a uniform cross
section, with one of the needles being positioned in each channel. In order to provide
a suitable engagement therebetween, each channel may be provided with a narrower
uniform cross section suitable to provide a frictional engagement with the needle so
25 that a first pushing force applied axially to the needles is transmitted to the anchoring
members to advance the anchoring members into the torn tissue, while a second
pulling force applied in the opposite direction to the pushing force releases the needles
from their engagement with the anchoring members.

30 With other embodiments, the needles may similarly have a uniform
cross section, and each channel may taper or narrow to a suitable diameter less than

1 the diameter of the needles. The needles may instead be tapered in the direction of
their sharp, penetration tip, and each channel may have a uniform cross section.
Alternatively, each of the channels may taper or narrow in the direction of the
5 penetration end of the anchoring member, and each needle positioned therein may
have a corresponding taper in the direction of its sharp, penetration tip. In a further
alternative embodiment, each needle may be provided with a shoulder, and each
channel may be provided with a uniform cross section somewhat wider than the needle
10 positioned therein for longitudinal motion of the needle therein. In this embodiment,
each anchoring member provides an abutment portion around the distal end of the
channel against which the shoulder abuts to provide an abutting relationship to
transmit the pushing force to the anchoring members while allowing for easy
withdrawal of the needles from the anchoring members responsive to movement
15 rearwards in a direction opposite the pushing force.

With each of the preferred embodiments, the barbs of the anchoring
member have a tapered configuration towards the penetration end of the needles so
that as the needles are pushed through the tissue, the barbs easily pass through the
20 tissue with the needle. The configuration of the barbs is such that the anchoring
members pass easily through the tissue in the forward direction, but are prevented
from moving in the reverse direction. The barbs are provided to anchor the device in
the tissue.

25 The connection between the anchoring members and the suture may
include adhesives, swaging, crimping or the like. Preferably, both the suture and the
anchoring members are constructed of a bioresorbable material.

30

35

1 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing features of the present invention will become more readily apparent and may be understood by referring to the following detailed
5 description of an illustrative embodiment of device according to the present invention, taken in conjunction with the accompanying drawings, in which:

Fig. 1 illustrates a perspective view of a preferred embodiment of the device for applying surgical staples according to the present invention;

10 Fig. 2 illustrates a top cut-away view of the embodiment of Fig. 1;

Fig. 3 illustrates a side cut-away view showing the internal frame of the device of Fig. 1;

Fig. 4 illustrates a cut-away side view with the internal frame removed taken along lines 4-4 of Fig. 2;

15 Fig. 5 illustrates a side view of the opposite side of the device in relation to Figure 3 showing the internal frame of the device of Fig. 1;

Fig. 6 illustrates a bottom cut-away view taken along lines 6-6 of Fig. 3;

20 Fig. 7 illustrates a top detailed view of the distal end of the device of Fig. 1;

Fig. 8 illustrates a partially cut-away side view of the distal end of the device of Fig. 7;

25 Fig. 9 illustrates a cut-away top view of the distal end of the device of Fig. 7;

30

35

1 Fig. 10 illustrates a perspective view of an alternate embodiment of the device of the present invention;

5 Fig. 11 illustrates a side view of the connecting members of the embodiment of Fig. 10 along with their suture interconnection;

 Fig. 12 illustrates a perspective posterior view of the muscular structure of the knee;

10 Fig. 13 illustrates a cut-away perspective view of the knee of Fig. 12 along line 13-13 showing the device according to Fig. 10 in position during the meniscal repair procedure;

 Fig. 14 illustrates a perspective anterior view of the knee of Fig. 12 with the device according to Fig. 10 in position during the meniscal repair procedure;

15 Fig. 15 illustrates a side view of one of the connecting members of the embodiment of Fig. 10 showing the entry of the needle as it is being inserted into the channel of the connecting member;

 Fig. 16 illustrates a side view of the embodiment of Fig. 10;

20 Fig. 17 illustrates a side view of another embodiment of the device of Fig. 10;

 Fig. 18 illustrates a side view of a further embodiment of the device of Fig. 10;

25 Fig. 19 illustrates a side view of an additional embodiment of the device of Fig. 10;

 Fig. 20 illustrates a side view of another embodiment of the device of Fig. 10;

30 Fig. 21 illustrates a cross-sectional view of the embodiments of Figs. 10, and 16-19; and

1 Fig. 22 illustrates a cross-sectional view of an additional alternative embodiment.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

 Referring in detail to the drawings, in which like reference numerals identify similar or identical elements throughout the views, Fig. 1 illustrates a first embodiment of the staple applying device shown generally as 10. A housing 12 is provided and encloses an internal frame having left and right halves 14 and 16, which are separated by front and rear spacers 18 and 20 as best seen in Fig. 2. Extending outwardly from housing 12 is an elongated tubular member 24 which encloses a pair of spaced, elongated shafts 26 and 28, as best seen in Figs. 2, 8 and 9. Device 10 is suitable for inserting a resorbable meniscal staple 30, which is removably held at the distal ends of shafts 26, 28, linearly into torn tissue such as the meniscus. A handle member 32 is pivotally movable toward and away handle member 34 to move shafts 26, 28 longitudinally as described hereinafter to insert meniscal staple 30 linearly into the meniscus.

20 Tubular member 24 allows the distal meniscal staple 30 to be inserted through a small incision in the body for placement within the meniscus or other similar bodily tissue to be repaired, thus allowing surgical procedures to be performed thereon without the need of severe incisions in adjacent body tissues.

25 Referring now to Figs. 2 and 4, a pair of longitudinally movable elongated rack members 38 and 40 are positioned between frame halves 14 and 16. A pair of spaced pin members 44 project laterally from opposite sides of racks 38 and 40 through frame halves 14 and 16.

30 Each pin member 44 slidably extends into an elongated slot 48 in frame halves 14 and 16, as shown in Fig. 3. Rack 40 is longitudinally movable between an

-10-

1 initial rearward position, in which pin members 44 abut against the rearward shoulder
portions 52 of slots 48 as shown in Fig. 3 and 5, and a second forward position, in
which pin members 44 abut against the forward shoulder portions 56 of slots 48.

5 Rack 38 is provided with slots 49 similar to slots 48.

Shaft 28 extends longitudinally from the forward end of rack 40 so that
shaft 28 moves longitudinally with rack 40 between an initial rearward position and a
second forward position.— Shaft 28 is attached to rack 40 by suitable means 41 such as
10 pins, screws, rivets or the like which are retained within bores in the coupling portion
68 of rack 40. Similarly, shaft 26 extends longitudinally from the forward end of
rack 38, as at coupling portion 72, so that shaft 26 moves longitudinally with rack 38
between an initial rearward position and a second forward position.

Front spacer 18 is provided with a bore through which tubular member
15 24 and shafts 26 and 28 longitudinally extend. A nose piece 76 located at the front
end of spacer 18 surrounds tubular member 24, and provides additional support for
tubular member 24.

Handle 32 is pivotally attached between frame halves 14, 16 by a pivot
20 pin 78. A handle return spring 88 is connected between the end of a lateral extension
90 of handle 32 and an anchor pin 92 extending between frame halves 14, 16 of
handle 34. Spring 88 returns handle 32 from its second position to its first position.

A pair of spaced front pawls 94, 95 engage with racks 40, 38,
25 respectively, to prevent the rearward movement of racks 38, 40. Pawls 94, 95 are
pivotally mounted between frame halves 14, 16 on a front pawl pin 96, which further
maintains the spacing between pawls 94, 95. A spring member 98 biases the tongue
end of pawls 94, 95 upward so that pawls 94, 95 engage racks 38, 40.

A pair of spaced rear pawls 102, 103 individually engage with racks
30 40, 38, respectively to selectively cause incremental forward longitudinal movement of

35

-11-

1 racks 38, 40 in the direction of arrow A, as described hereinafter in relation to Fig. 4,
when handle 32 is moved toward handle 34. Pawls 102, 103 are pivotally mounted
between frame halves 14, 16 on a rear pawl pin 106, which is adapted to maintain the
5 spacing between pawls 102, 103. A spring member 108 biases the tongue end of each
pawl 102, 103 upward so that pawls 102, 103 individually engage its adjacent ratchet
rack 38, 40. Together, pawls 102, 103 and racks 38, 40 provide a translating means
for translating the pivotal motion of handle 32 toward handle 34 to incremental
10 longitudinal motion to selectively move shafts 26, 28 longitudinally.

Referring to Fig. 3, a longitudinally movable elongated disconnect lever
112 is shown slidably mounted along the outer surface of frame half 16. Disconnect
lever 112 is movable via finger pressure, which may be applied against a thumb piece
113, which may extend outside of housing 12 and extend laterally from disconnect
15 lever 112. Disconnect lever 112 is provided with a pair of spaced, longitudinally
aligned, elongated slots 114. A shoulder pin 116 extends laterally from frame half 16
through each slot 114. Together, shoulder pins 116 and slots 114 limit the
longitudinal movement of disconnect lever 112 between a forward position as shown
20 in Fig. 3, in which pins 116 abut against rear shoulder portions of slots 114, and a
rearward position, as indicated by phantom lines 118 in which pins 116 abut against
front shoulder portions of slots 114.

A spring detent 122 extends outwardly from the side of frame half 16.
25 Disconnect lever 112 is provided with a pair of spaced recesses 124 and 126 along its
lower surface. When disconnect lever 112 is moved to its first or initial forward
position, spring detent 122 engages with rear recess 124 to retain disconnect lever 112
in the position shown in Fig. 3. When disconnect lever 112 is moved rearwardly
from the forward position to the rearward position, detent 122 engages with front
30 recess 126 to retain disconnect lever 112 in the rearward position.

35

1 Disconnect lever 112 is movable between its initial position and its
second rear position. In the initial position as shown in Fig. 3, disconnect lever 112
allows both rear pawls 102, 103 to engage racks 40, 38, respectively to translate the
5 pivotal motion of handle 32 toward handle 34 to longitudinal motion to move both
racks 38, 40 and shafts 26, 28 longitudinally forward. Fig. 4 shows rear pawl 102
engaging rack 40. In its second rear position, disconnect lever 112 disengages right
rear pawl 102 from rack 40. Thus, the pivotal motion of handle 32 toward handle 34
10 is translated to only move rack 38 and shaft 26 longitudinally forward. To achieve
this disengagement of right rear pawl 102 from rack 40 a cam shoulder 130 formed on
lever 112 is provided which engages a disconnect pin 132, which extends laterally
from pawl 102, to move the rearward end of pawl 102 upward. The upward
movement of the rearward end of pawl 102 disengages the forward tongue end 134 of
15 pawl 102 from rack 38.

Referring to Fig. 5, a longitudinally movable elongated release lever
136 is slidably mounted on the outer surface of frame half 14. Release lever 136 is
movable via finger pressure applied against a release button 138 positioned adjacent
20 the rear of housing 12. Release lever 136 is movable longitudinally between an initial
rear position and a second forward position, as indicated by phantom lines 144, and is
provided with a pair of spaced, longitudinally aligned, elongated slots 146. A
shoulder pin 148 extends laterally from frame half 14 through each slot 146.
25 Together, shoulder pins 148 and slots 146 limit the longitudinal movement of release
lever 136 between a rear position, as shown in Fig. 5, in which pins 148 abut against
forward shoulder portions of slots 146, and a forward position, in which pins 148 abut
against rear shoulder portions of slots 146.

30 Release lever 136 is movable to its forward position via finger pressure
to disengage front and rear pawls 94, 95 and 102, 103 from racks 40, 38. This

1 allows racks 38, 40 to be returned rearwardly to their initial positions. In order that
release lever 136 may disengage pawls 94, 95 and 102, 103 from racks 40, 38,
release lever 136 is provided with a pair of spaced cam extensions 152, which extend
5 laterally from release lever 136. When release lever 136 is moved to its forward
position, cam extensions 152 engage against the bottom rearward end portions of
pawls 94, 95 and 102, 103 to move the rearward ends of pawls 94, 95 and 102, 103
upward. This pivots the pawls to disengage the forward tongue ends of pawls 94, 95
10 and 102, 103 from racks 40, 38 to release the racks 40, 38 for longitudinal rearward
movement.

Return springs 154 and 160, as seen in Fig. 2, are connected to racks
40 and 38, respectively, and pin 46. Return springs 154 and 160 return racks 38 and
40 rearwardly to an initial position when pawls 94, 95 and 102, 103 are disengaged.
15 The movement of racks 38, 40 rearwardly to their initial position returns shafts 26, 28
to their initial position. When release lever 136 is released, a biasing spring 166
returns lever 136 to its initial rear position.

Referring to Fig. 9, each shaft 26, 28 may be segmented to include
20 push pin segments 174 and push bar segments 182 which are ultimately connected to
elongated needle holders 178. Of course, shafts 26 and 28 may be single rod-like
members if desired. A clip member 186 may be provided to join push bars 182 to
needle holders 178 in a detachable manner as shown in Fig. 8, whereby clip 186
25 engages and retains a ball 188, which extends axially from the rearward end of the
needle holder 178.

At the distal end of each shaft 26, 28 is an elongated needle member
190 which extends longitudinally from an end portion of each needle holder 178. As
described in detail below, staple 30 includes a pair of resorbable anchor segments 194
30 joined at their rear portions by a resorbable flexible web 198, which may preferably

1 be in the form of a suture. Each anchor segment 194 may be provided with a
plurality of barb-like projections 206 for anchoring the staple 30 in the tissue to which
it is applied. Anchor segment 194 further includes an elongated channel or groove
5 along its length which receives the needle 190. Each channel and needle 190
cooperate so that longitudinal forward movement of shafts 26, 28 in the direction of
arrow B advances anchor segments 194 forwardly. Needles 190 are releasable from
the channels when shafts 26, 28 are withdrawn longitudinally rearward, thus allowing
10 needles 190 to be withdrawn rearwardly from anchor segments 194 while staple 30
remains in the tissue.

Referring to Fig. 7, the distal end of tubular member 24 is provided
with a notch 202, which allows for loading of staple 30 and further allows visual
15 observation of the anchor segments 194 of staple 30 by the surgeon during positioning
of staple 30 within the meniscus to be repaired. Notch 202 provides for rotatable
orientation of tubular member 24 to align staple 30 with the tear in the meniscal
tissue.

In use, tubular member 24 is inserted through an incision and, with the
20 aid of an endoscope or arthroscope, the surgeon positions the distal tip 204 of tubular
member 24 adjacent the meniscal tissue to be repaired.

When handles 32, 34 are squeezed together, both rear pawls 102, 103
are pivoted to move left and right ratchet racks 38, 40 longitudinally forward in the
25 direction of arrow A, as shown in Fig. 4. Springs 108 bias the forward ends of pawls
102, 103 upward, causing pawls 102, 103 to engage with ratchet racks 38, 40.
Consequently, the forward motion of rear pawls 102, 103 causes ratchet racks 38, 40
to move distally forward under the influence of the forward pivotal movements of
pawls 102, 103. As may be appreciated forward pawls 94, 95, which remain engaged
30 with racks 38, 40 during the return motion of handle 32, prevent rack return springs

1 154, 160 from prematurely moving racks 38, 40 rearwardly as handles 32, 34 are repeatedly squeezed and released to incrementally advance ratchet racks 38, 40 longitudinally forward.

5 In the initial position of shafts 26, 28, one needle 190 is positioned ahead of the other needle 190 so that movement of ratchet racks 38, 40 causes one anchor segment 194 of staple 30 to advance linearly ahead of the other anchor segment 194. After sufficient distal movement of the shafts 26, 28 to position the
10 first anchor segment 194 fully into the meniscal tissue, disconnect lever 112 may now be actuated rearwardly under the influence of finger pressure from its initial position to its second rearward position to disengage right rear pawl 102 from ratchet rack 40. As discussed in detail above, spring detent 122 retains disconnect lever 112 in its
15 initial position and its second position. Consequently, further squeezing of handle 32 toward handle 34 will only cause distal forward longitudinal movement of left ratchet rack 38 to linearly advance the trailing anchor segment 194 into the meniscus. The disengagement of right rear pawl 102 from ratchet rack 40 prevents further longitudinal movement of the first anchor segment 194 linearly into the meniscus.

20 After both anchor segments 194 are inserted and anchored in the desired position by the barb-like projections 206 with web 198 positioned accurately across the tear in the meniscus, release button 138 may be pressed inwardly to disengage front and rear pawls 94, 95, and 103 from ratchet racks 38, 40 and thereby
25 allow ratchet racks 38, 40 to move rearward to their original initial position under the influence of return springs 154, 160.

Pressing inward on release button 138 causes release lever 136 to move distally forward and causes lateral cam extensions 152 to engage against the rearward
30 portions of pawls 94, 95 and 103 and rotate pawls 94, 95 and 103 to disengage their

1 forward tongue ends from racks 38, 40, thus allowing return springs 154, 160 to
return racks 38, 40 and shafts 26, 28 longitudinally to their initial position.

Return of shafts 26, 28 to their initial position pulls the needles 190
5 rearwardly out of the channels of anchor segments 194 and withdraws needles 190
from the tissue. The barb-like projections 206 along anchor segments 194 retain
staple 30 in the meniscus, with web 198 held across the tear in the meniscus. Tubular
member 24 may then be withdrawn from the incision.

10 Turning now to Fig. 10, there is shown an alternate embodiment of the
repair device 300 of the present invention. Repair device 10 generally comprises a
pair of needles 302, preferably constructed of stainless steel or other surgical grade
metal alloy, having a sharp tip 303 at one end to facilitate penetration through tissue,
and a blunt end 305 at the other end. In this embodiment, along with the other
15 preferred embodiments described hereafter, the length of each needle is between 6
inches and 10 inches. However, this is not intended to be limiting, as clearly needles
of various lengths may be utilized.

Engaged with needles 302 are a pair of anchoring or connecting leg
20 members 304 which are similar to anchor segments 194 described above. Anchoring
members 304 are constructed of a bioresorbable material, such as homopolymers and
copolymers of lactide, glycolide, polydioxanone, trimethylene carbonate, polyethylene
oxide or other bioabsorbable materials or blends of these copolymers. Preferably, the
25 anchoring members 304 are injection molded and are formed of a copolymer of lactide
and glycolide. Anchor members 304 are linked by a flexible material 306 such as a
suture, also constructed of a bioresorbable material, such as a lactide/glycolide
copolymer. Flexible material 306 is similar to web 198 described above and allows
30 for movement of anchoring members 304 with respect to one another. Anchor
members 304 of this embodiment, along with the other preferred embodiments

1 described hereafter, preferably have a length of between about 0.25 inch and 2 inches.
However, this is not intended to be limiting as clearly anchor members of various
lengths may be utilized. Flexible material 306 of this embodiment, along with the
5 other preferred embodiments described hereafter, preferably has a length of between
about 0.25 inch and 2 inches. Likewise, this is not intended to be limiting as clearly
flexible material of various lengths may be utilized.

Needles 302 provide a piercing means that is engaged with anchor
10 members 304 as discussed in detail hereafter so that a pushing force applied axially to
needles 302 in a first direction is transmitted to anchor members 304 to advance
anchor members 304 into the torn tissue, while a second pulling force applied in the
opposite direction to the initial pushing force releases needles 302 from their
engagement with anchoring members 304. As best seen in Fig. 11, anchor members
15 304 are secured to suture 306 as at joint 307 by suitable means such as insert
molding.

Anchor members 304 are provided with an anchoring means in the
form of a plurality of barb-like projections 308 which serve to anchor device 300 in
20 the tissue to be repaired. Barbs 308 have a tapered shape to allow anchor members
304 to be pushed through tissue or muscle, such as the menisci of the knee, in a first
forward direction and to prevent anchor members 304 from traveling in a reverse or
opposite direction. As may be appreciated, barb-like projections 308 may taper
25 rearwardly toward the penetration end of anchoring members 304 to facilitate
movement of tissue anchoring members 304 forwardly through the tissue. Although
as shown in Fig. 10 six barbs 308 are provided, any number may be provided, so
long as the barbs penetrate the tissue to anchor the device 300. Similarly, with the
30 other embodiments hereafter described, the number of barbs is also six, although any

1 number of barbs may likewise be provided, so long as the barbs penetrate the tissue to anchor the device.

Referring to Fig. 11, each anchor member 304 is provided with a
5 channel 310 which may extend laterally into the body of each anchor member 304 along the length of anchor member 304. Preferably, each channel 310 has a cross section which may be circular. Further, as shown in detail in Fig. 21, it is preferred that each channel 310 intersect with one of the sides of anchor member 304 so that
10 each channel 310 may be exposed narrowly along its longitudinal length to reduce the thickness of each anchor member 304. As best shown in Fig. 10, one of the needles 302 is positioned longitudinally in each of the channels 310, and may be retained therein, exposed along the open length of channel 310. Alternatively, as shown in detail in Fig. 22, the channel may instead be a bore 313 that extends longitudinally
15 through the body 304' of each anchor member. Referring to Fig. 15, channel 310 allows for needles 302 to be inserted in anchor member 304 in the direction of arrow 311 so that the sharp penetration tip 303 of needle 302 protrudes outwardly from the body of anchor member 304 as shown in Fig. 10 to provide a penetration end for
20 anchor member 304.

As shown in Fig. 11, channel 310 extends longitudinally from the trailing or distal end 312 of each anchor member 304 opposite the penetration or proximate end of each anchor member 304. A means of engagement is provided
25 between needles 302 and anchoring members 304 so that anchoring members 304 may be carried forward by needles 302 as they are inserted forward into the tissues of the body. The means of engagement may be provided by a frictional engagement between channel 310 in anchoring members 304 and the needle 302 positioned longitudinally
30 therein. In this embodiment, each channel 310 may have a uniform cross section, and needles 302 may likewise have a uniform cross-section, with each channel 310 having a narrower uniform cross section to provide a frictional engagement with needle 302.

1 therein. Consequently, a first pushing force applied axially to the needles 302 is
transmitted to anchoring members 304 to advance anchoring members 304 into the
torn tissue, while a second pulling force applied in the opposite direction to the
5 pushing force releases the needles from their engagement with the anchoring
members. The pulling force applied rearwards to needles 302, overcomes the
frictional engagement between needles 302 and anchor members 304, thus releasing
needles 302 from the anchoring members 304.

10 Fig. 12 illustrates the muscular and ligament structure of the knee 320,
including the pertinent components of the knee to which the present invention is
directed. As is well known, the femur 322 is joined to tibia 324 and fibula 326 by
muscles, tendons and ligaments, and these bones are separated and cushioned by the
medial meniscus 328 and lateral meniscus 330. Condyles 332 of femur 322 rest on
15 the menisci, and the bones are joined and supported by anterior cruciate ligament 334,
ligament of Wrisberg 338, posterior cruciate ligament 336, and transverse ligament
338 (see Fig. 14). The joint capsule is formed by tibial collateral ligament 340 and
fibular collateral ligament 342.

20 Figs. 13 and 14 illustrate the device 300 of the present invention in use,
with Fig. 13 showing knee 320 along lines 13-13 of Fig. 12. During arthroscopic
surgery, a surgeon will make an incision in the skin and tissue in the area of the knee
to be repaired. The lateral meniscus 330 of a knee 320 having a tear 344 is repaired
25 with the present invention by inserting the device and pushing needles 302 through the
meniscus on one side of the tear, and through the torn region. The engagement
between needles 302 and anchor members 304 advances anchor members 304 and
their barb-like projections 308 into the tissue as needles 302 are pushed forward in a
first direction along the axis of the needles. Continued pushing on needles 302 will
30 advance anchor members 304 into the tissue and suture 306 across the tear.

1 When flexible member 306 becomes substantially flush with meniscus
330 and is pulled taut, pushing is discontinued. Barbs 308 of anchor members 304
anchor the device in the meniscus 330 and prevent the device from backing off, so
5 that tear 344 is maintained in an abutting relationship against itself to facilitate
healing.

 Needles 302 may then be removed from anchoring members 304 by a
second pulling motion applied to the needles in the opposite direction to the pushing
10 force, thus releasing needles 302 from the anchoring members 304 while allowing
anchor members 304 to remain in position in the tissue of the body with suture 306
substantially flush with meniscus 330. Consequently, tear 344 is maintained in its
abutting relationship against itself to facilitate healing. The material of which anchor
members 304 and suture 306 are constructed are preferably bio-resorbable materials
15 that are resorbed at a rate which is slow enough to facilitate healing of the tear in the
tissue. After removal of needles 302, the incision is stitched closed.

 Turning now to Fig. 17, another embodiment 350 of the invention is
shown. Device 350 includes a pair of elongated needles 302, a pair of elongated
20 anchor members 352 similar to anchor members 304 that are joined by a flexible
member or suture 306. Barb-like projections 308 protrude from anchor members 352.
Device 350 also includes an elongated channel 354 that extends laterally into each
anchor member 352 from the trailing or distal end 312 opposite the penetration or
25 proximate end 356 of each anchor member 352. One of the needles 302 is positioned
longitudinally in each of the channels 354. Needles 302 are provided with an
essentially constant diameter, while channel 354 tapers or narrows in the direction of
the penetration end 356 to a cross sectional area somewhat less than the diameter of
30 needles 302. Accordingly, anchor members 352 and needles 302 may be provided
with a suitable frictional engagement that is sufficient to allow anchor members 352
and their barb-like projections 308 to be advanced into the tissue as needles 302 are

1 pushed forward in a first direction. The frictional engagement between anchor
members 352 and needles 302 may be overcome by a second pulling force applied to
needles 302 in the opposite direction as the pushing force while allowing anchor
5 members 352 to remain in position in the tissue of the body with the suture 306
contacting the tissue adjacent the tear.

Referring to Fig. 18, there is shown a further embodiment 360 of the
device of the present invention. Device 360 includes a pair of elongated needles 302,
10 a pair of elongated anchor members 362 similar to elongated anchor members 304 that
are joined by a flexible member or suture 306 barb-like projections 308. As shown in
the figure, device 360 also includes an elongated channel 364. Channel 364 has an
essentially constant cross sectional area, and needles 302 taper or narrow in the
direction of their penetration ends 303.

15 Turning now to Fig. 19, an additional embodiment 370 of the present
invention is shown. Device 370 similarly includes a pair of elongated needles 302 a
pair of elongated anchor members 372 that are joined by a flexible member or suture
306 and a plurality of barb-like projections 308. As shown in the figure, device 370
20 also includes an elongated channel 374 that extends laterally into each anchor member
372. Each channel 374 may taper or narrow from the trailing or distal end in the
direction of the penetration end of the anchor member, and each needle 302 has a
corresponding taper in the direction of its sharp penetrating tip 303. When needle 302
25 is pushed in the axial direction, needle 302 and anchor member 372 have an abutting
relationship along the length of channel 374, which evenly transmits the pushing force
applied to needle 302 to anchor member 372.

Referring to Fig. 20, a further embodiment 380 of the present invention
30 is shown. Device 380 includes a pair of elongated needles 302, a pair of elongated
anchor members 382 similar to elongated anchor members 304 that are joined by a
flexible member or suture 306 and include a plurality of barb-like projections 308.

1 As shown in the figure, device 380 also includes an elongated channel 384 that
extends laterally into each anchor member 382 from the trailing or distal end 386.
Each channel 384 may have an essentially constant cross section, and each needle 302
5 may be provided with a shoulder 388 a suitable distance from its sharp penetration tip
303. Trailing end 386 provides an abutment surface against which shoulder 388 may
abut. When needles 302 are pushed in the axial direction, shoulders 388 abut against
trailing end 386, thus allowing the pushing force applied to needle 302 to be
10 transmitted to anchor members 382.

While the invention has been particularly shown and described with
reference to the preferred embodiments, it will be understood by those skilled in the
art that various modifications and changes in form and detail may be made therein
without departing from the scope and spirit of the invention. Accordingly,
15 modifications such as those suggested above, but not limited thereto, are to be
considered within the scope of the invention.

20

25

30

35

- 23 -

CLAIMS:

1. A surgical instrument for applying surgical fasteners to torn tissue, comprising:

a handle mechanism;

an elongated body portion extending from said handle mechanism, said body portion defining a longitudinal axis of said instrument;

means positioned adjacent a distal end of said body portion remote from said handle mechanism for releasably engaging a fastener;

advancing means including at least one shaft member associated with said handle mechanism and extending longitudinally within said body portion for linearly advancing said engaging means along said longitudinal axis to drive said fastener into said torn tissue; and

a release member associated with said advancing means said release member being moveable into operative engagement with said advancing means to release said at least one shaft member to linearly retract said engaging means along said longitudinal axis to disengage said fastener from said engaging means, said fastener being positioned in said torn tissue.

2. The surgical instrument according to claim 1, wherein said engaging means tapers at a distal end to a point for penetrating said tissue to position said fastener in said tissue.

3. The surgical instrument according to claim 1, wherein said engaging means is configured to engage a fastener having a distal end configured for penetrating said tissue to position the fastener in said tissue.

- 24 -

4. The surgical instrument according to claim 1, wherein said fastener engaging means is positionable in a channel in said fastener.

5. The surgical instrument according to claim 4, wherein said fastener engaging means tapers at a distal end to a sharpened point to facilitate penetration of said tissue.

6. The surgical instrument according to claim 1, wherein said at least one shaft member includes means for incrementally advancing said fastener into said tissue.

7. The surgical instrument according to claim 1, wherein said advancing means includes a pair of shaft members, such that a first one of said shaft members advances a first leg of said fastener into said tissue and a second one of said shaft members subsequently advances a second leg of said fastener into said tissue.

8. The surgical instrument according to claim 1, wherein said advancing means further includes a ratchet mechanism for incrementally advancing said at least one shaft member to drive said fastener into said tissue.

9. The surgical instrument according to claim 1, wherein said handle mechanism is releasably coupled to said advancing means to advance said at least one shaft member upon movement of said handle mechanism.

10. The surgical instrument according to claim 9, wherein said body portion includes said at least one shaft member slidably mounted in an outer tubular member, said at

- 25 -

least one shaft member coupling said fastener engaging means to said advancing means.

11. The surgical instrument according to claim 9, wherein said advancing means comprises a pair of shafts extending from said handle mechanism to said fastener engaging means, said shafts advancing said fastener engaging means upon movement of said handle mechanism.

12. The surgical instrument according to claim 11, further comprising a ratchet mechanism disposed within said handle mechanism, said ratchet mechanism engaging a portion of said shafts for incrementally advancing said fastener engaging means upon movement of said handle mechanism.

13. The surgical instrument according to claim 12, wherein said ratchet mechanism includes a rack member secured to said shafts and a pawl member attached to said handle mechanism.

14. The surgical instrument according to claim 12, wherein said ratchet mechanism includes a pair of rack members attached to each of said shafts and a pair of pawl members attached to said handle mechanism for engaging said rack members, said ratchet mechanism permitting incremental movement of said fastener engaging.

15. The surgical instrument according to claim 14, wherein said ratchet mechanism permits sequential advancement of said shafts and of said fastener engaging means, such that a first leg of a fastener releasably engaged with said fastener engaging means is advanced into said tissue prior to advancement of a second leg of a

- 26 -

fastener releasably engaged with said fastener engaging means.

16. The surgical instrument according to claim 8, wherein said release means disengages said ratchet mechanism.

17. The surgical instrument according to claim 1, wherein said release means includes a switch means movable from a first position in which said switch means is in continuous engagement with said at least one shaft member of said advancing means to a second position in which said switch means is disengaged from said at least one shaft member of said advancing means.

18. The surgical instrument according to claim 11, wherein said release means disengages said advancing means from said handle mechanism.

19. The surgical instrument according to claim 13, wherein said release means disengages said pawl member from said rack member, said release means including biasing means for retracting said advancing means.

20. The surgical instrument according to claim 14, wherein said release means disengages a first pawl member from a corresponding first rack member, and subsequently disengages a second pawl member from a corresponding second rack member, said release means including biasing means for retracting said advancing means.

21. A surgical instrument for applying a surgical fastener to torn tissue, said fastener including a first leg

- 27 -

and a second leg joined by a flexible material; said instrument comprising:

- a handle;

- an elongated body portion having at least one inner rod within an outer tube and defining a longitudinal axis and extending at a proximal end from said handle, said fastener being positioned at a distal end of said body portion;

- a needle mechanism at said distal end of said body portion for releasably engaging said fastener, said needle mechanism having a tip configured to penetrate tissue to facilitate insertion of said fastener into tissue;

- an advancing mechanism disposed in said handle including a ratchet mechanism to permit incremental linear advancement of said needle mechanism along said longitudinal axis upon movement of said handle, said inner rod of said body portion coupling said advancing mechanism to said needle mechanism; and

- a release member for disengaging said ratchet mechanism to permit retraction of said inner rod and said needle mechanism after said fastener is positioned in tissue.

22. A fastener applying device, comprising:

- a movable handle;

- an elongated member extending distally from the movable handle;

- at least one rack and pawl mechanism operably associated with the handle; and

- at least one shaft operably connected to a respective rack and pawl mechanism, the at least one shaft extending within the elongated member and having a distal end configured to receive a fastener;

- 28 -

wherein movement of the handle causes movement of the at least one shaft within the elongated member and wherein the at least one rack and pawl mechanism includes first and second rack members and pawl members, and the at least one shaft includes first and second shafts.

23. The fastener applying device according to claim 22, wherein the first pawl member is movable between a first position engaging the first rack member and a second position disengaged from the first rack member, and the first rack member being operably connected to the first shaft.

24. The fastener applying device according to claim 23, wherein, the second pawl member is movable between a first position engaging the second rack member and a second position disengaged from the second rack member, the second rack member being operably connected to the second shaft.

25. The fastener applying device according to claim 23 further comprising a disconnect lever operably associated with the first pawl member to move the first pawl member from the first position to the second position, wherein movement of the handle causes movement of only the second shaft.

26. A fastener applying device for applying a fastener to torn tissue, the fastener including a first leg and a second leg joined by a flexible material, the device comprising:

- a movable handle;

- a first shaft operably connected to the movable handle and having a distal end configured to engage the

- 29 -

first leg of the fastener;

a second shaft operably connected to the movable handle and having a distal end configured to engage the second leg of the fastener;

wherein the first shaft is movable independent of the second shaft to move the first leg of the fastener distally independent of the second leg of the fastener.

27. A fastener applying device for applying surgical fasteners having a pair of tissue penetrating leg members joined to each other by a flexible portion, said device comprising:

a movable handle;

an elongated member extending from the movable handle;

first and second shaft members slidably disposed in said elongated member;

an advancing mechanism disposed between and operably connected to said shaft members and said movable handle to permit selective advancement of either the first shaft member or both the first and second shaft members;

wherein the shaft members terminate at a distal end of said elongated member remote from the movable handle in a fastener engaging surface, such that movement of said movable handle causes said advancing mechanism to move said shaft member and the fastener engaging surface towards the distal end of the elongated member to drive a fastener into tissue.

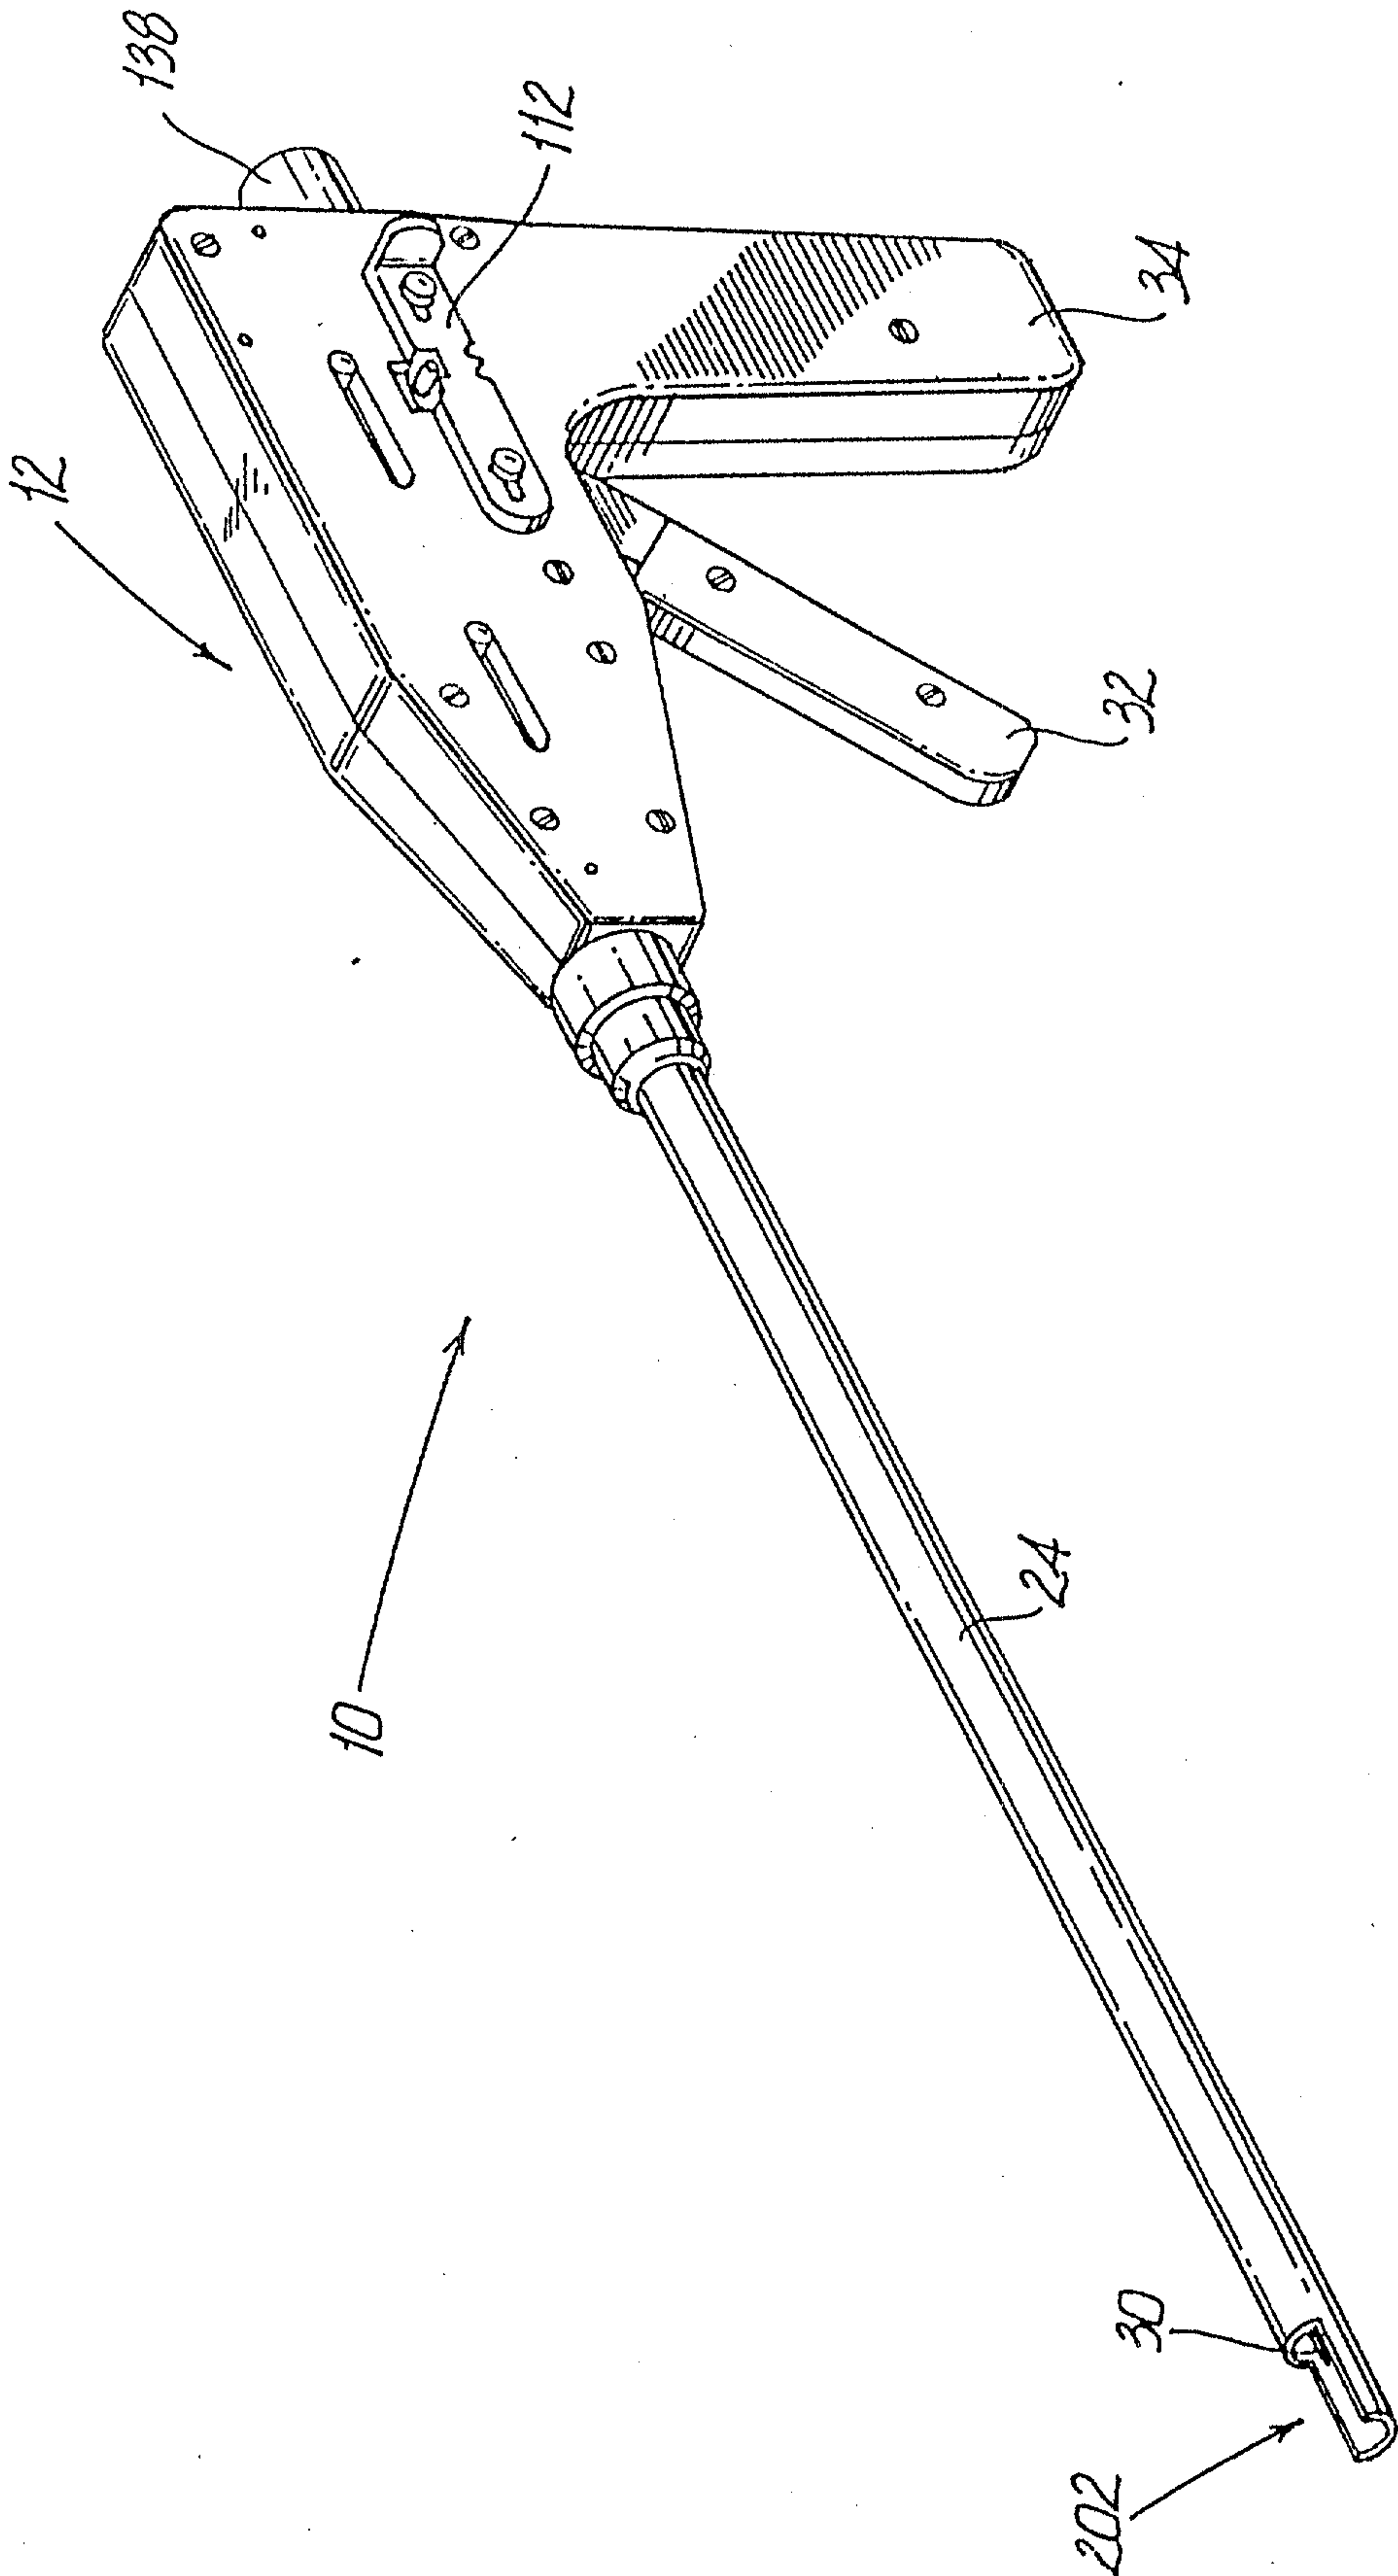


FIG. 1

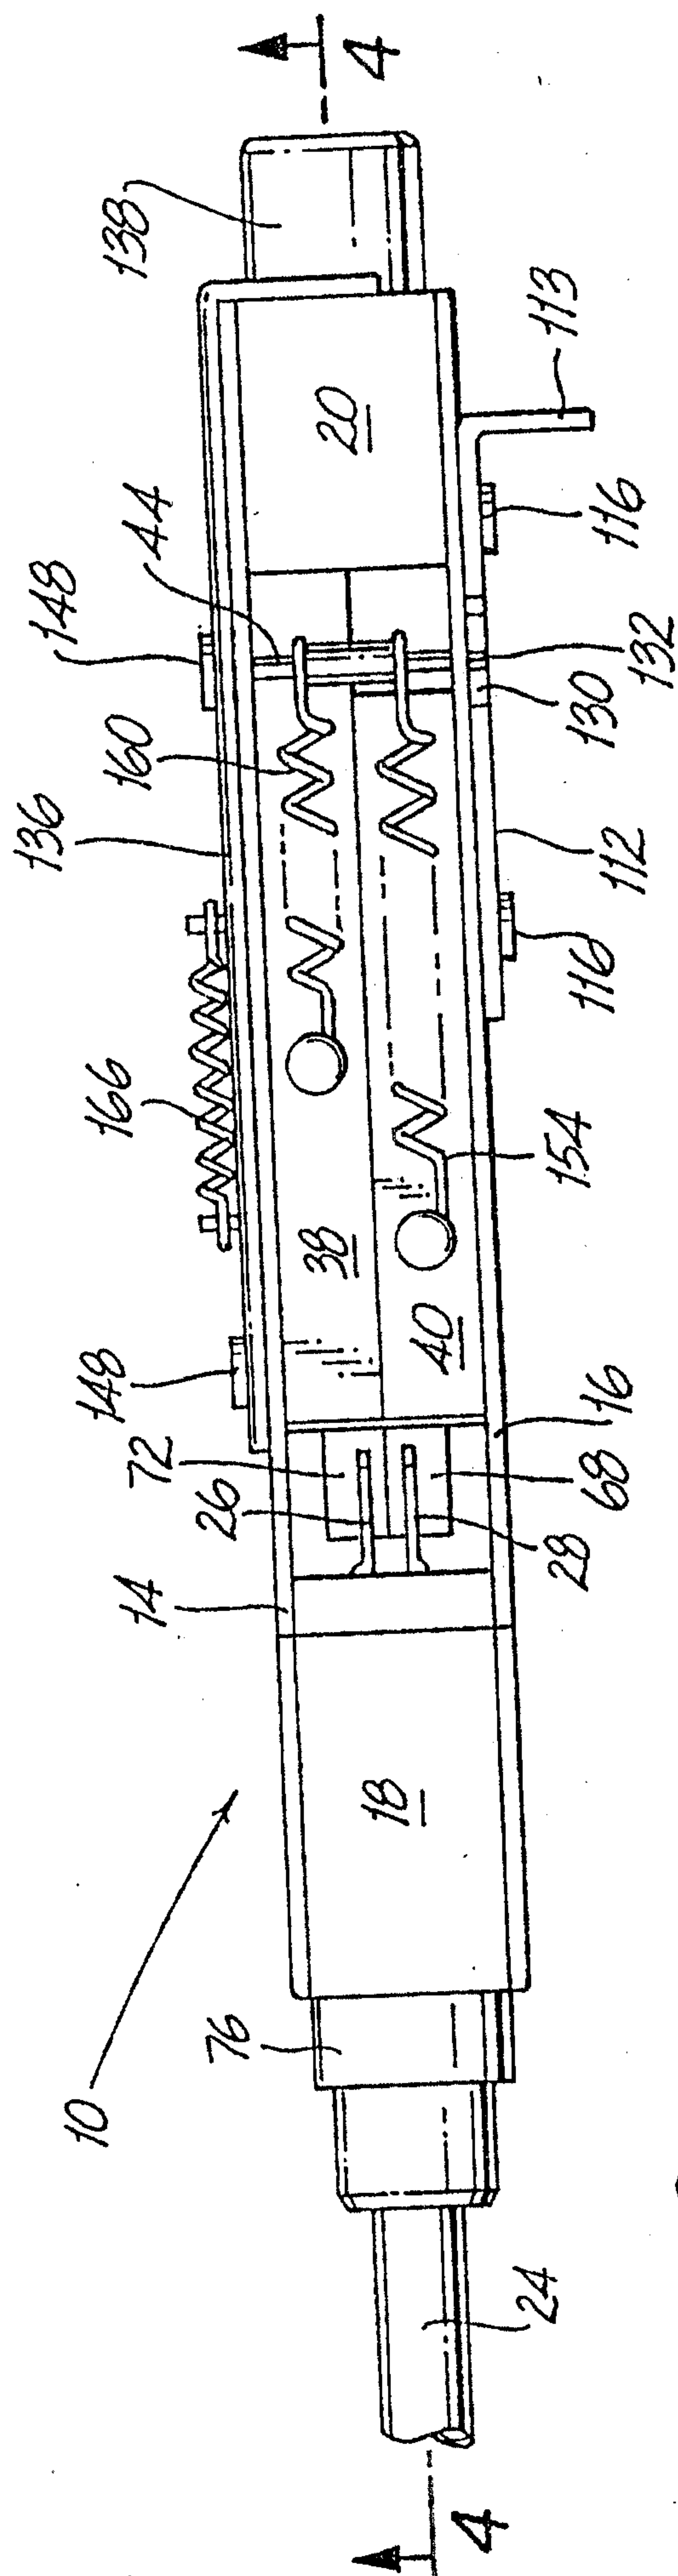


FIG. 2

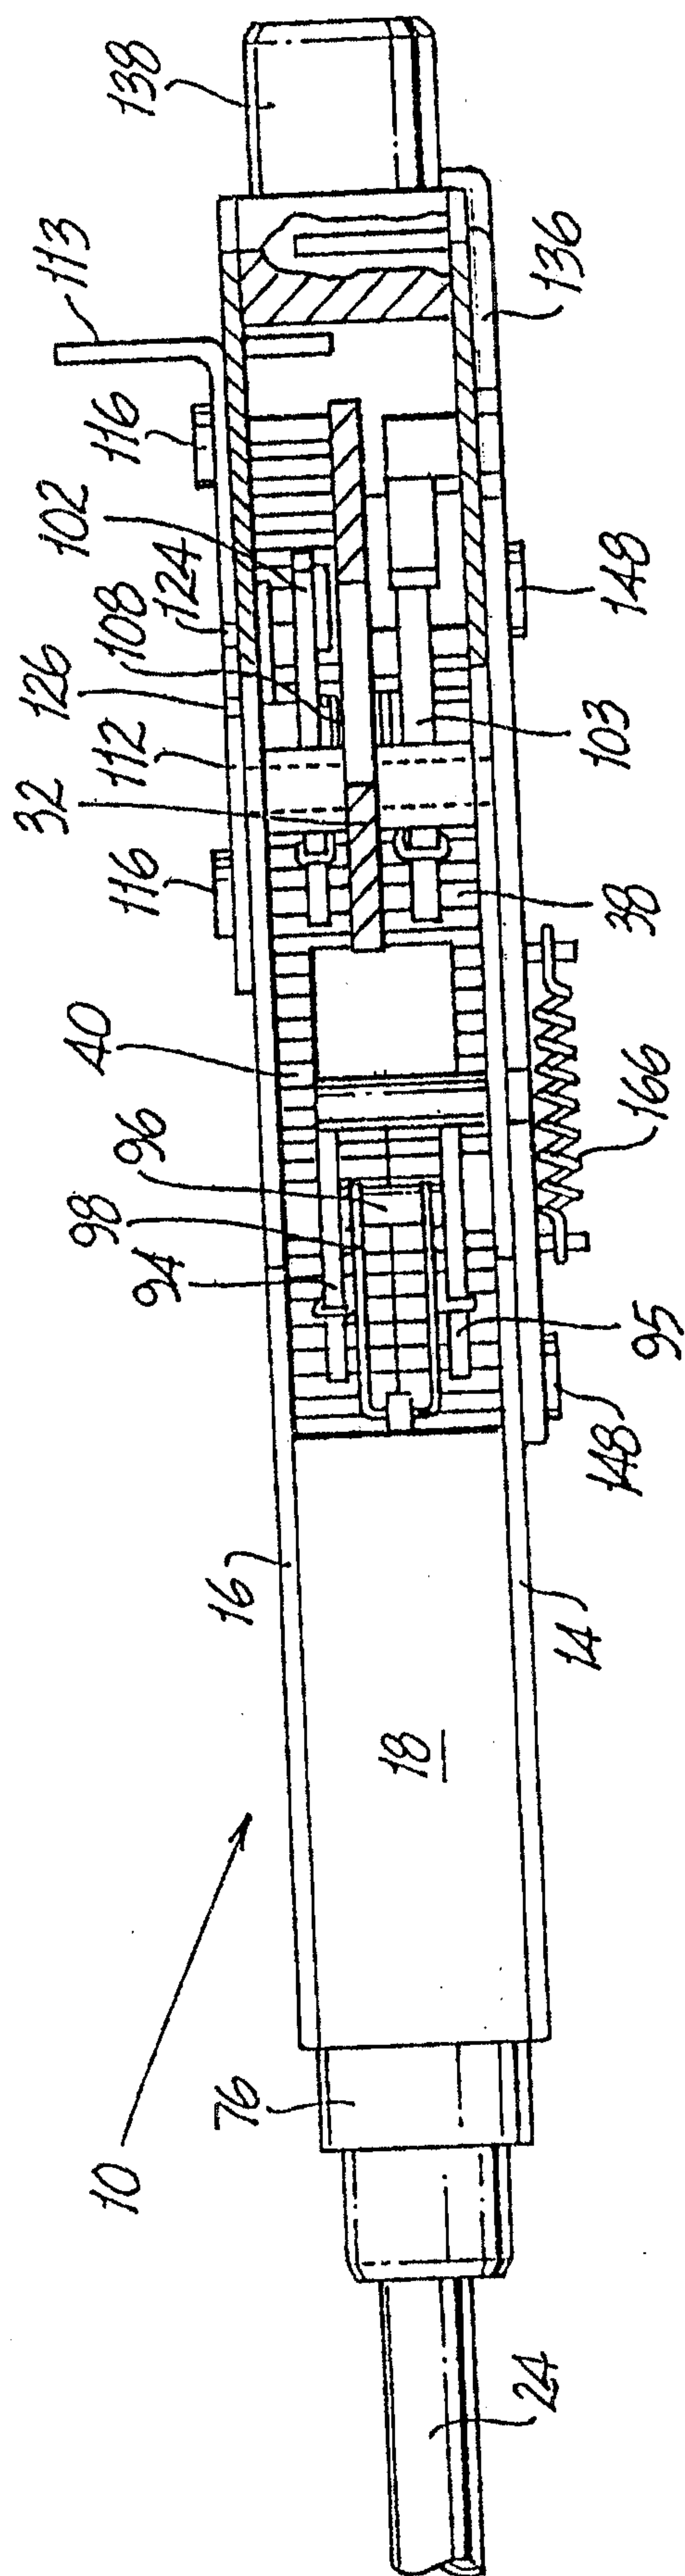


FIG. 6

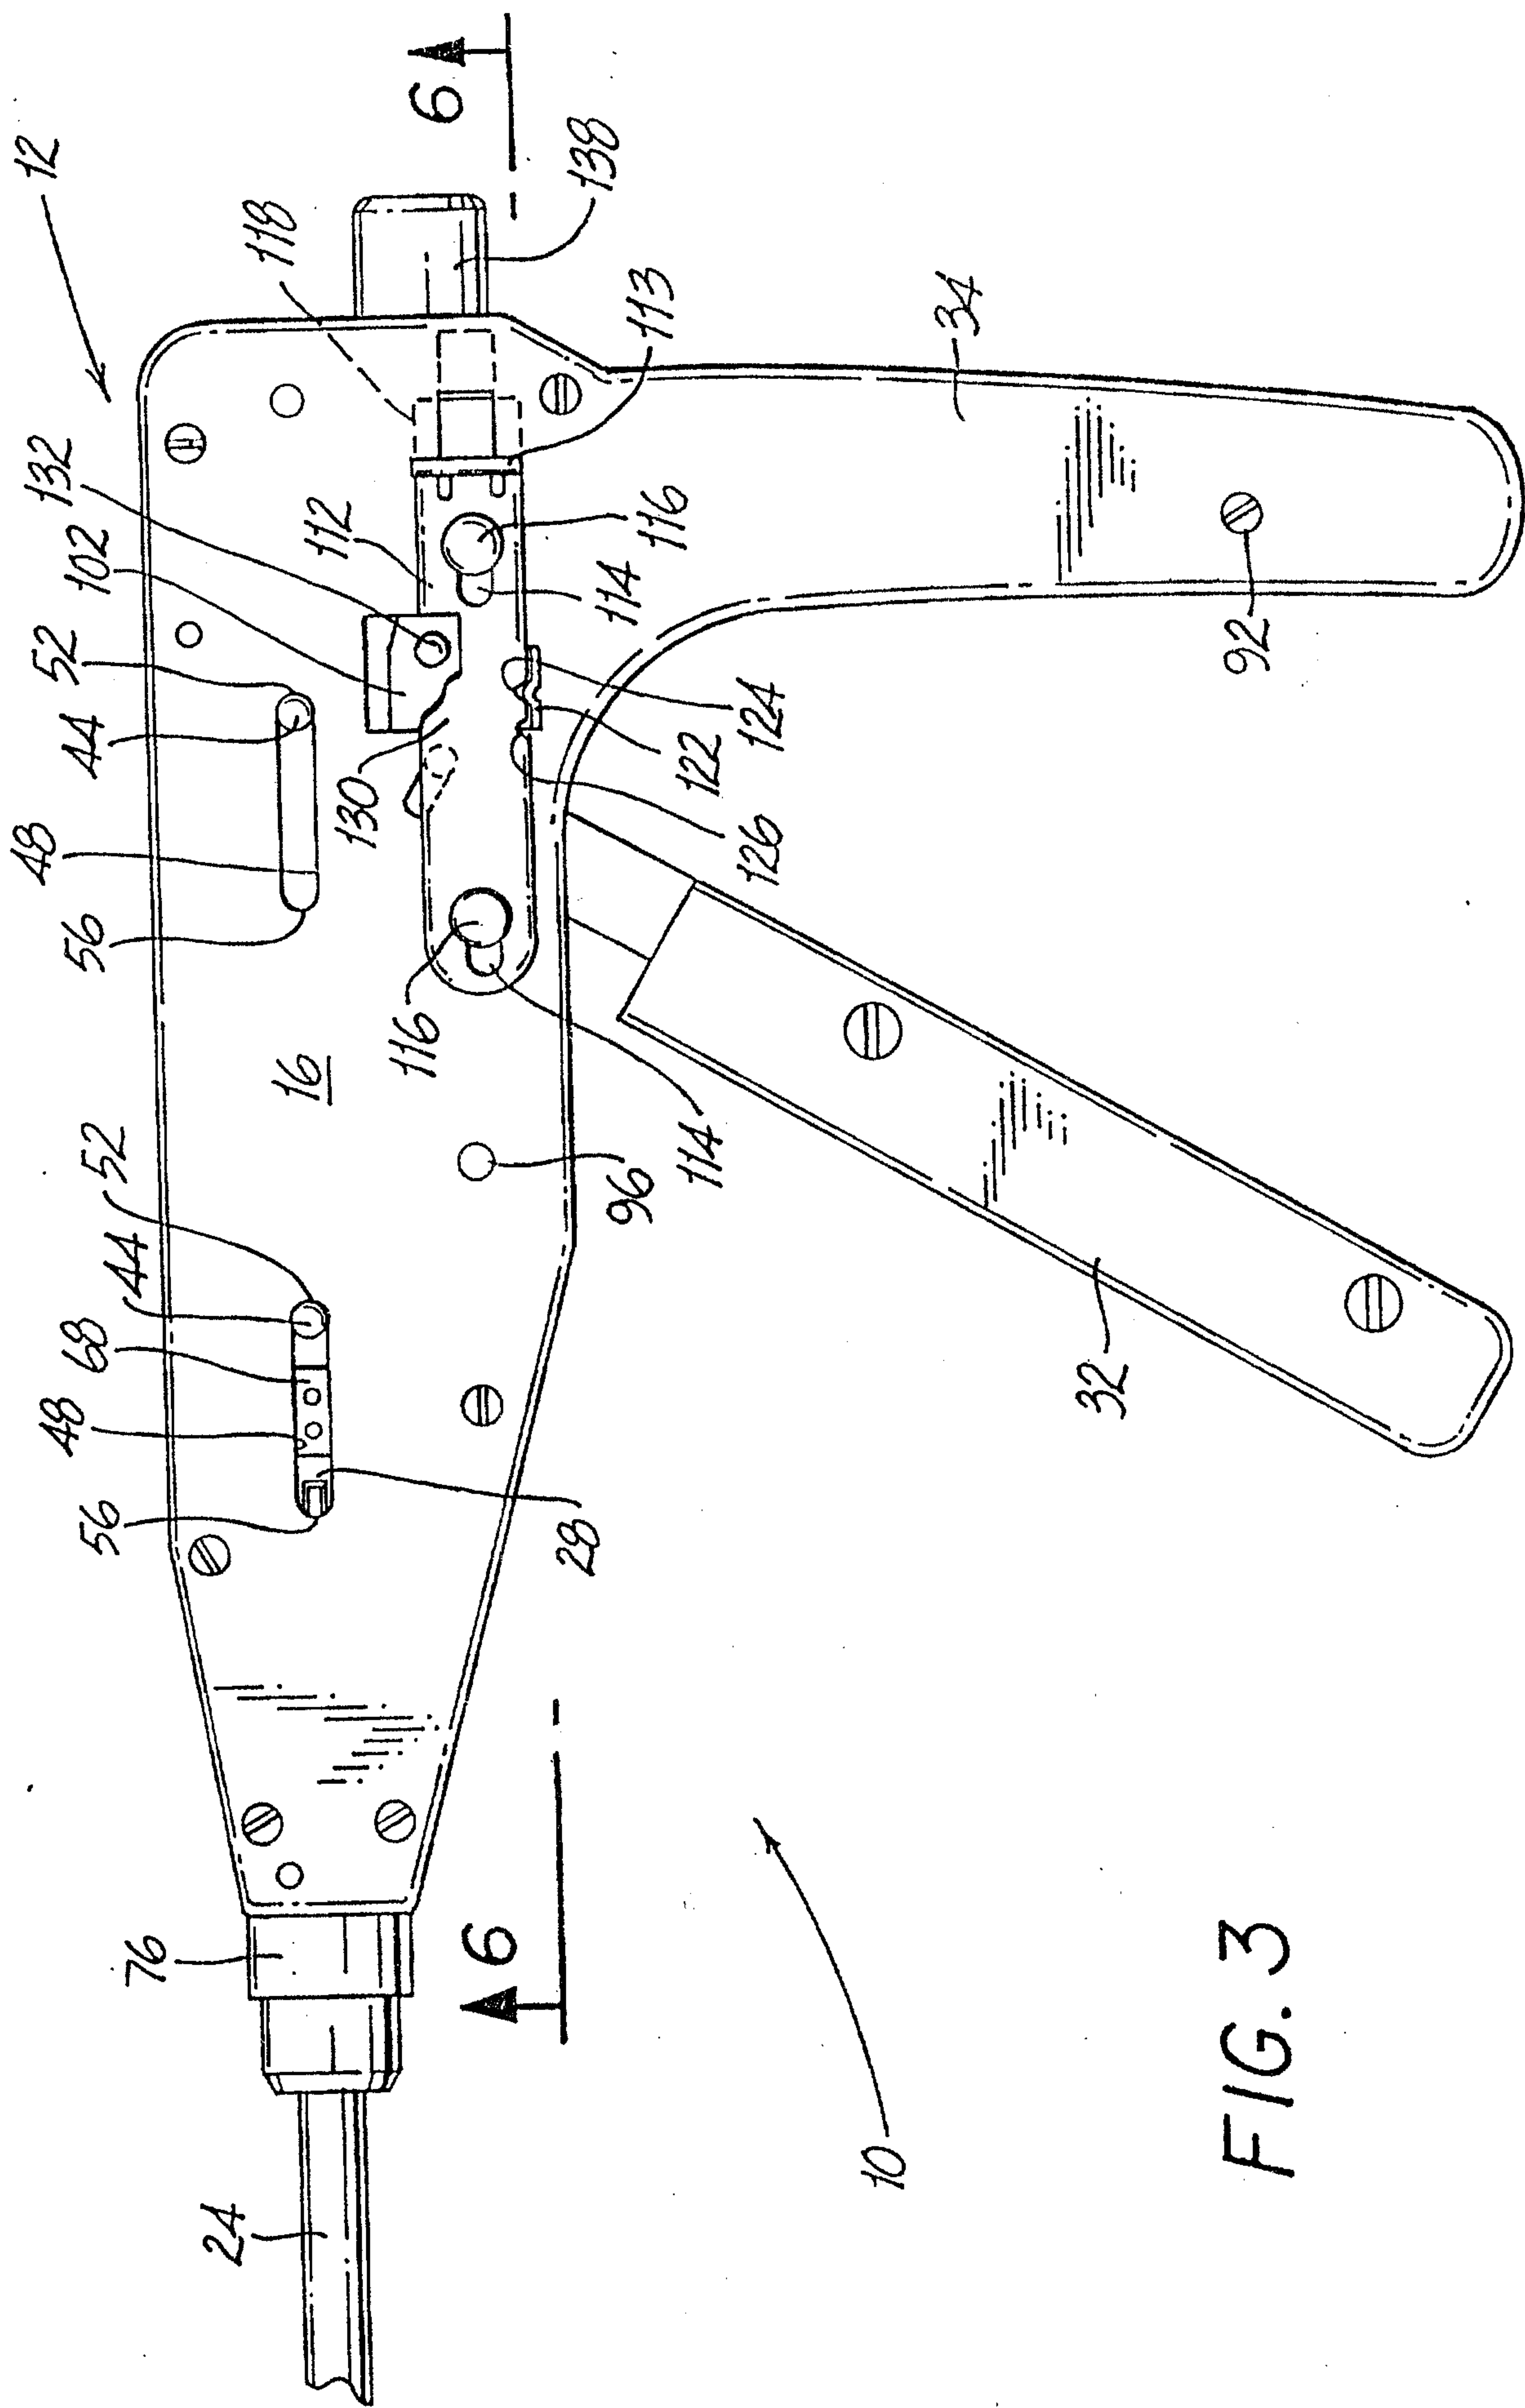


FIG. 3

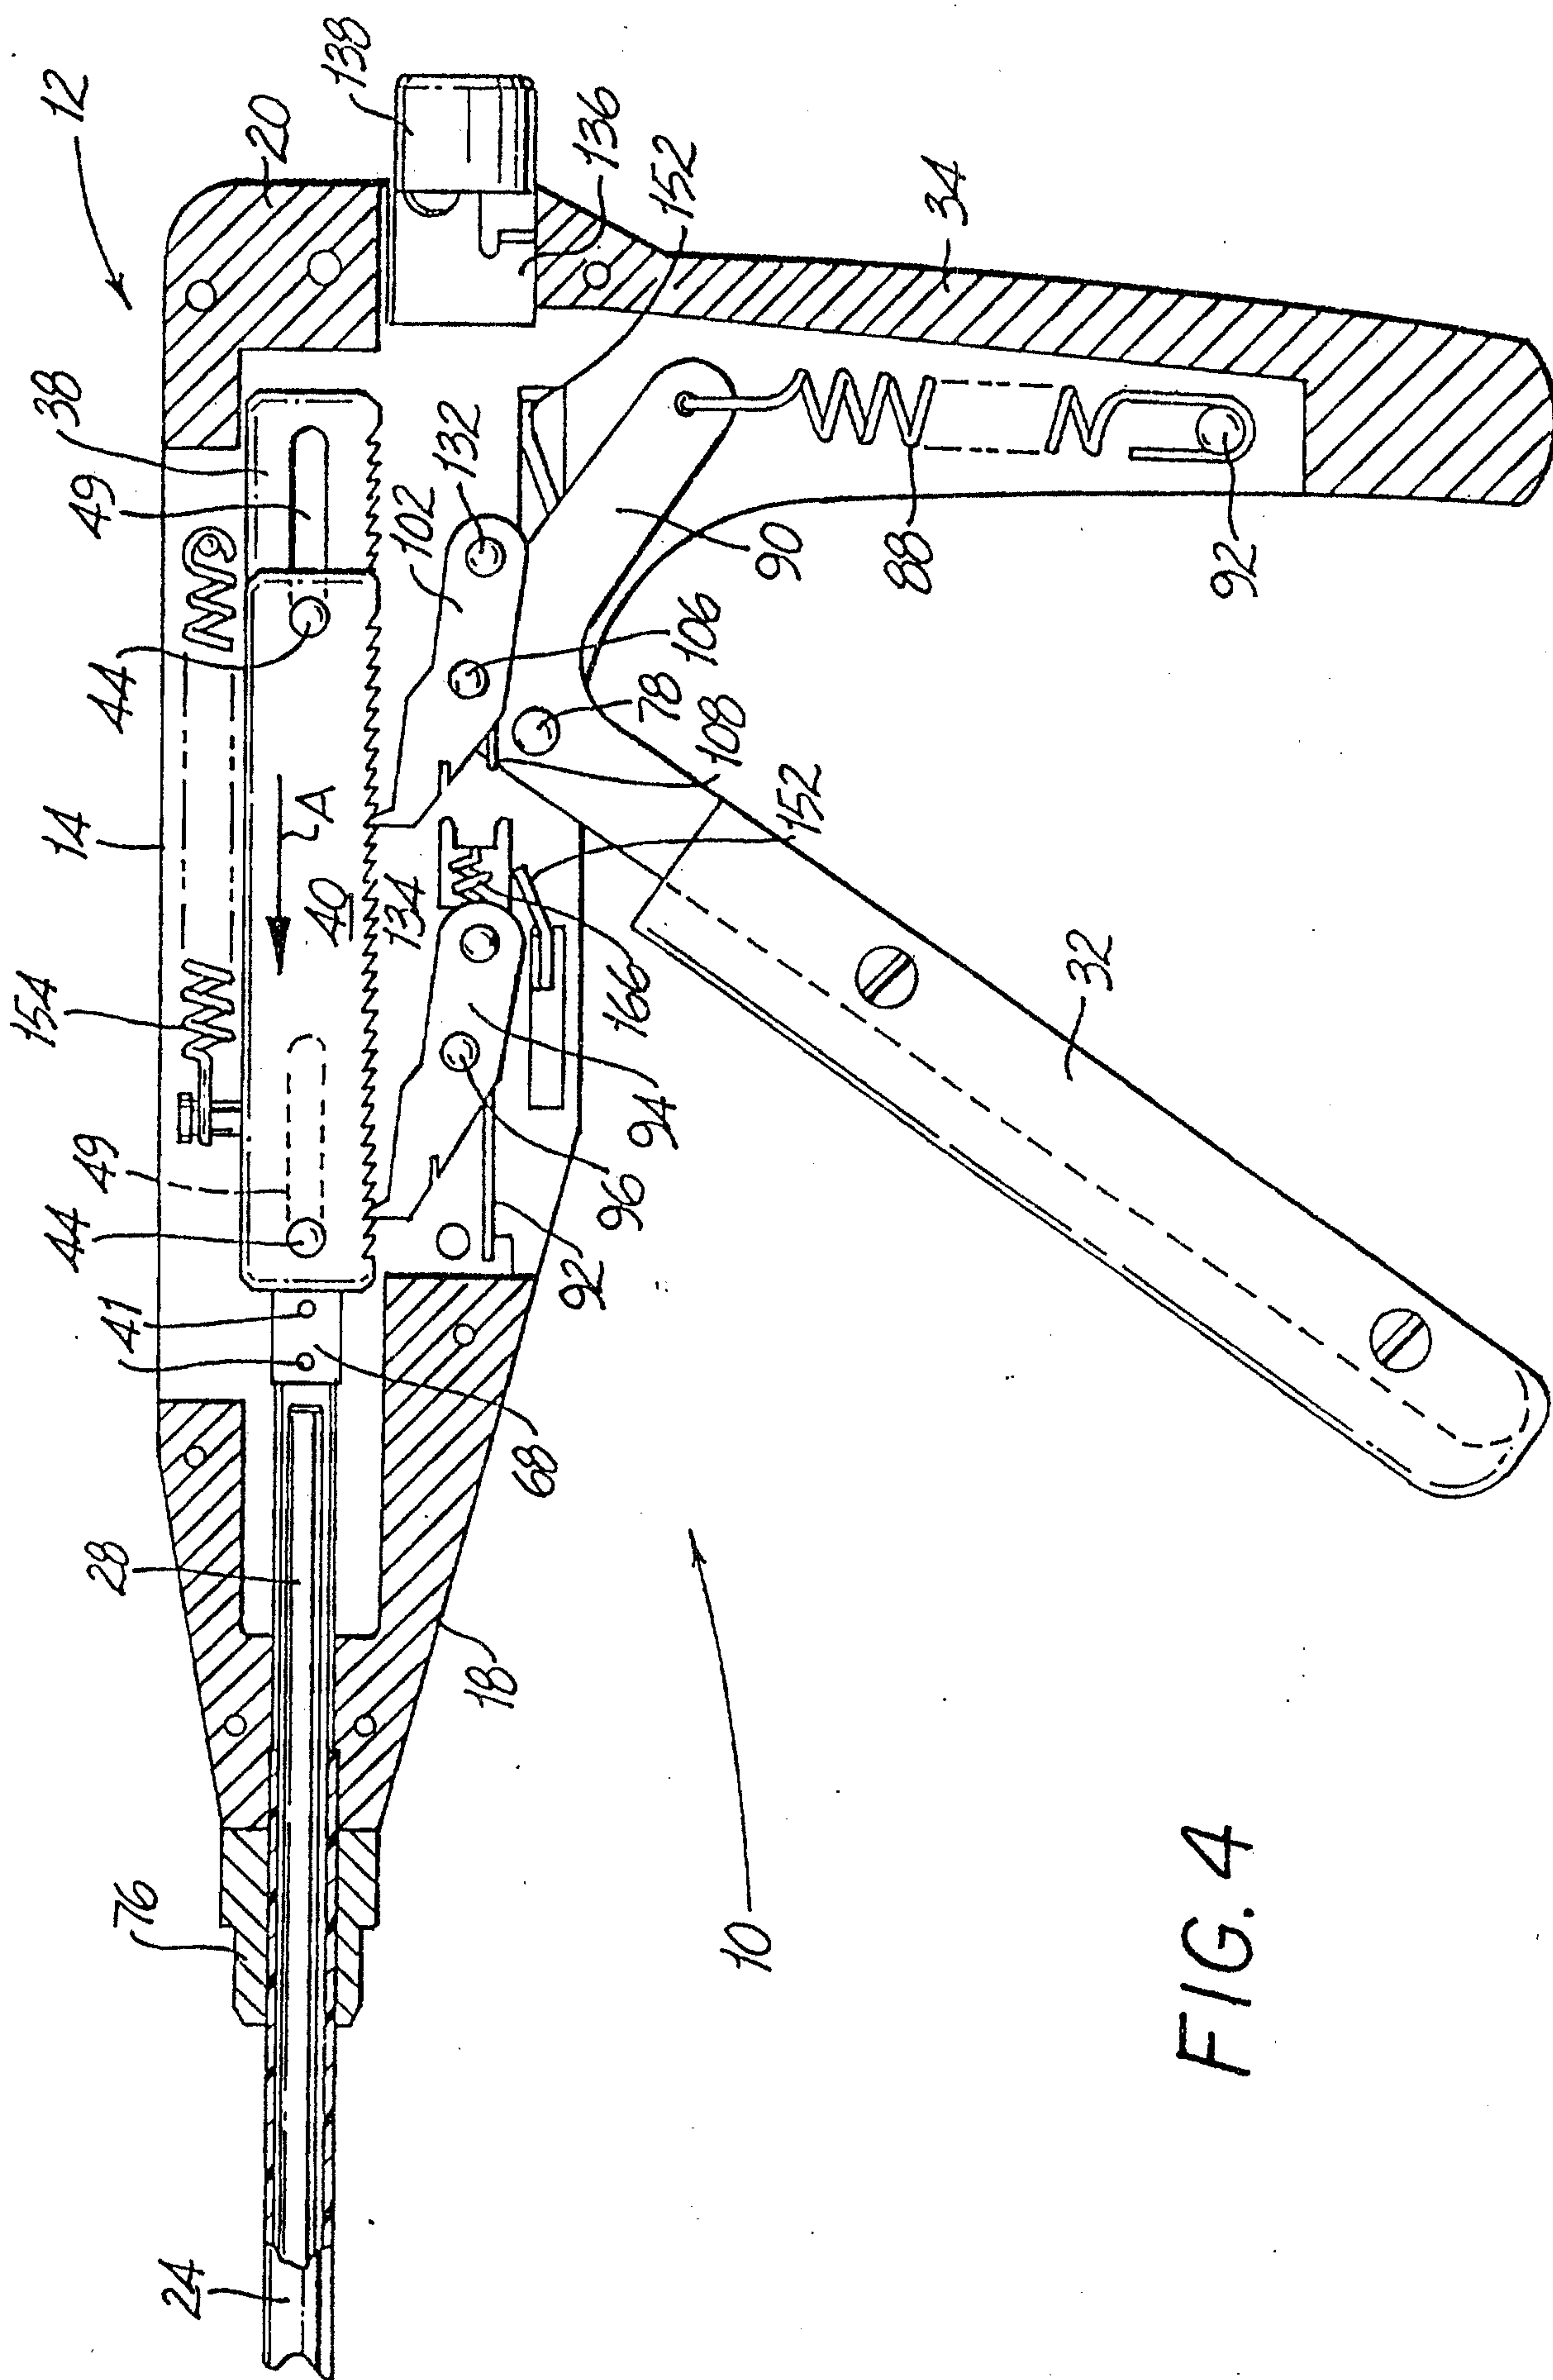


FIG. 4

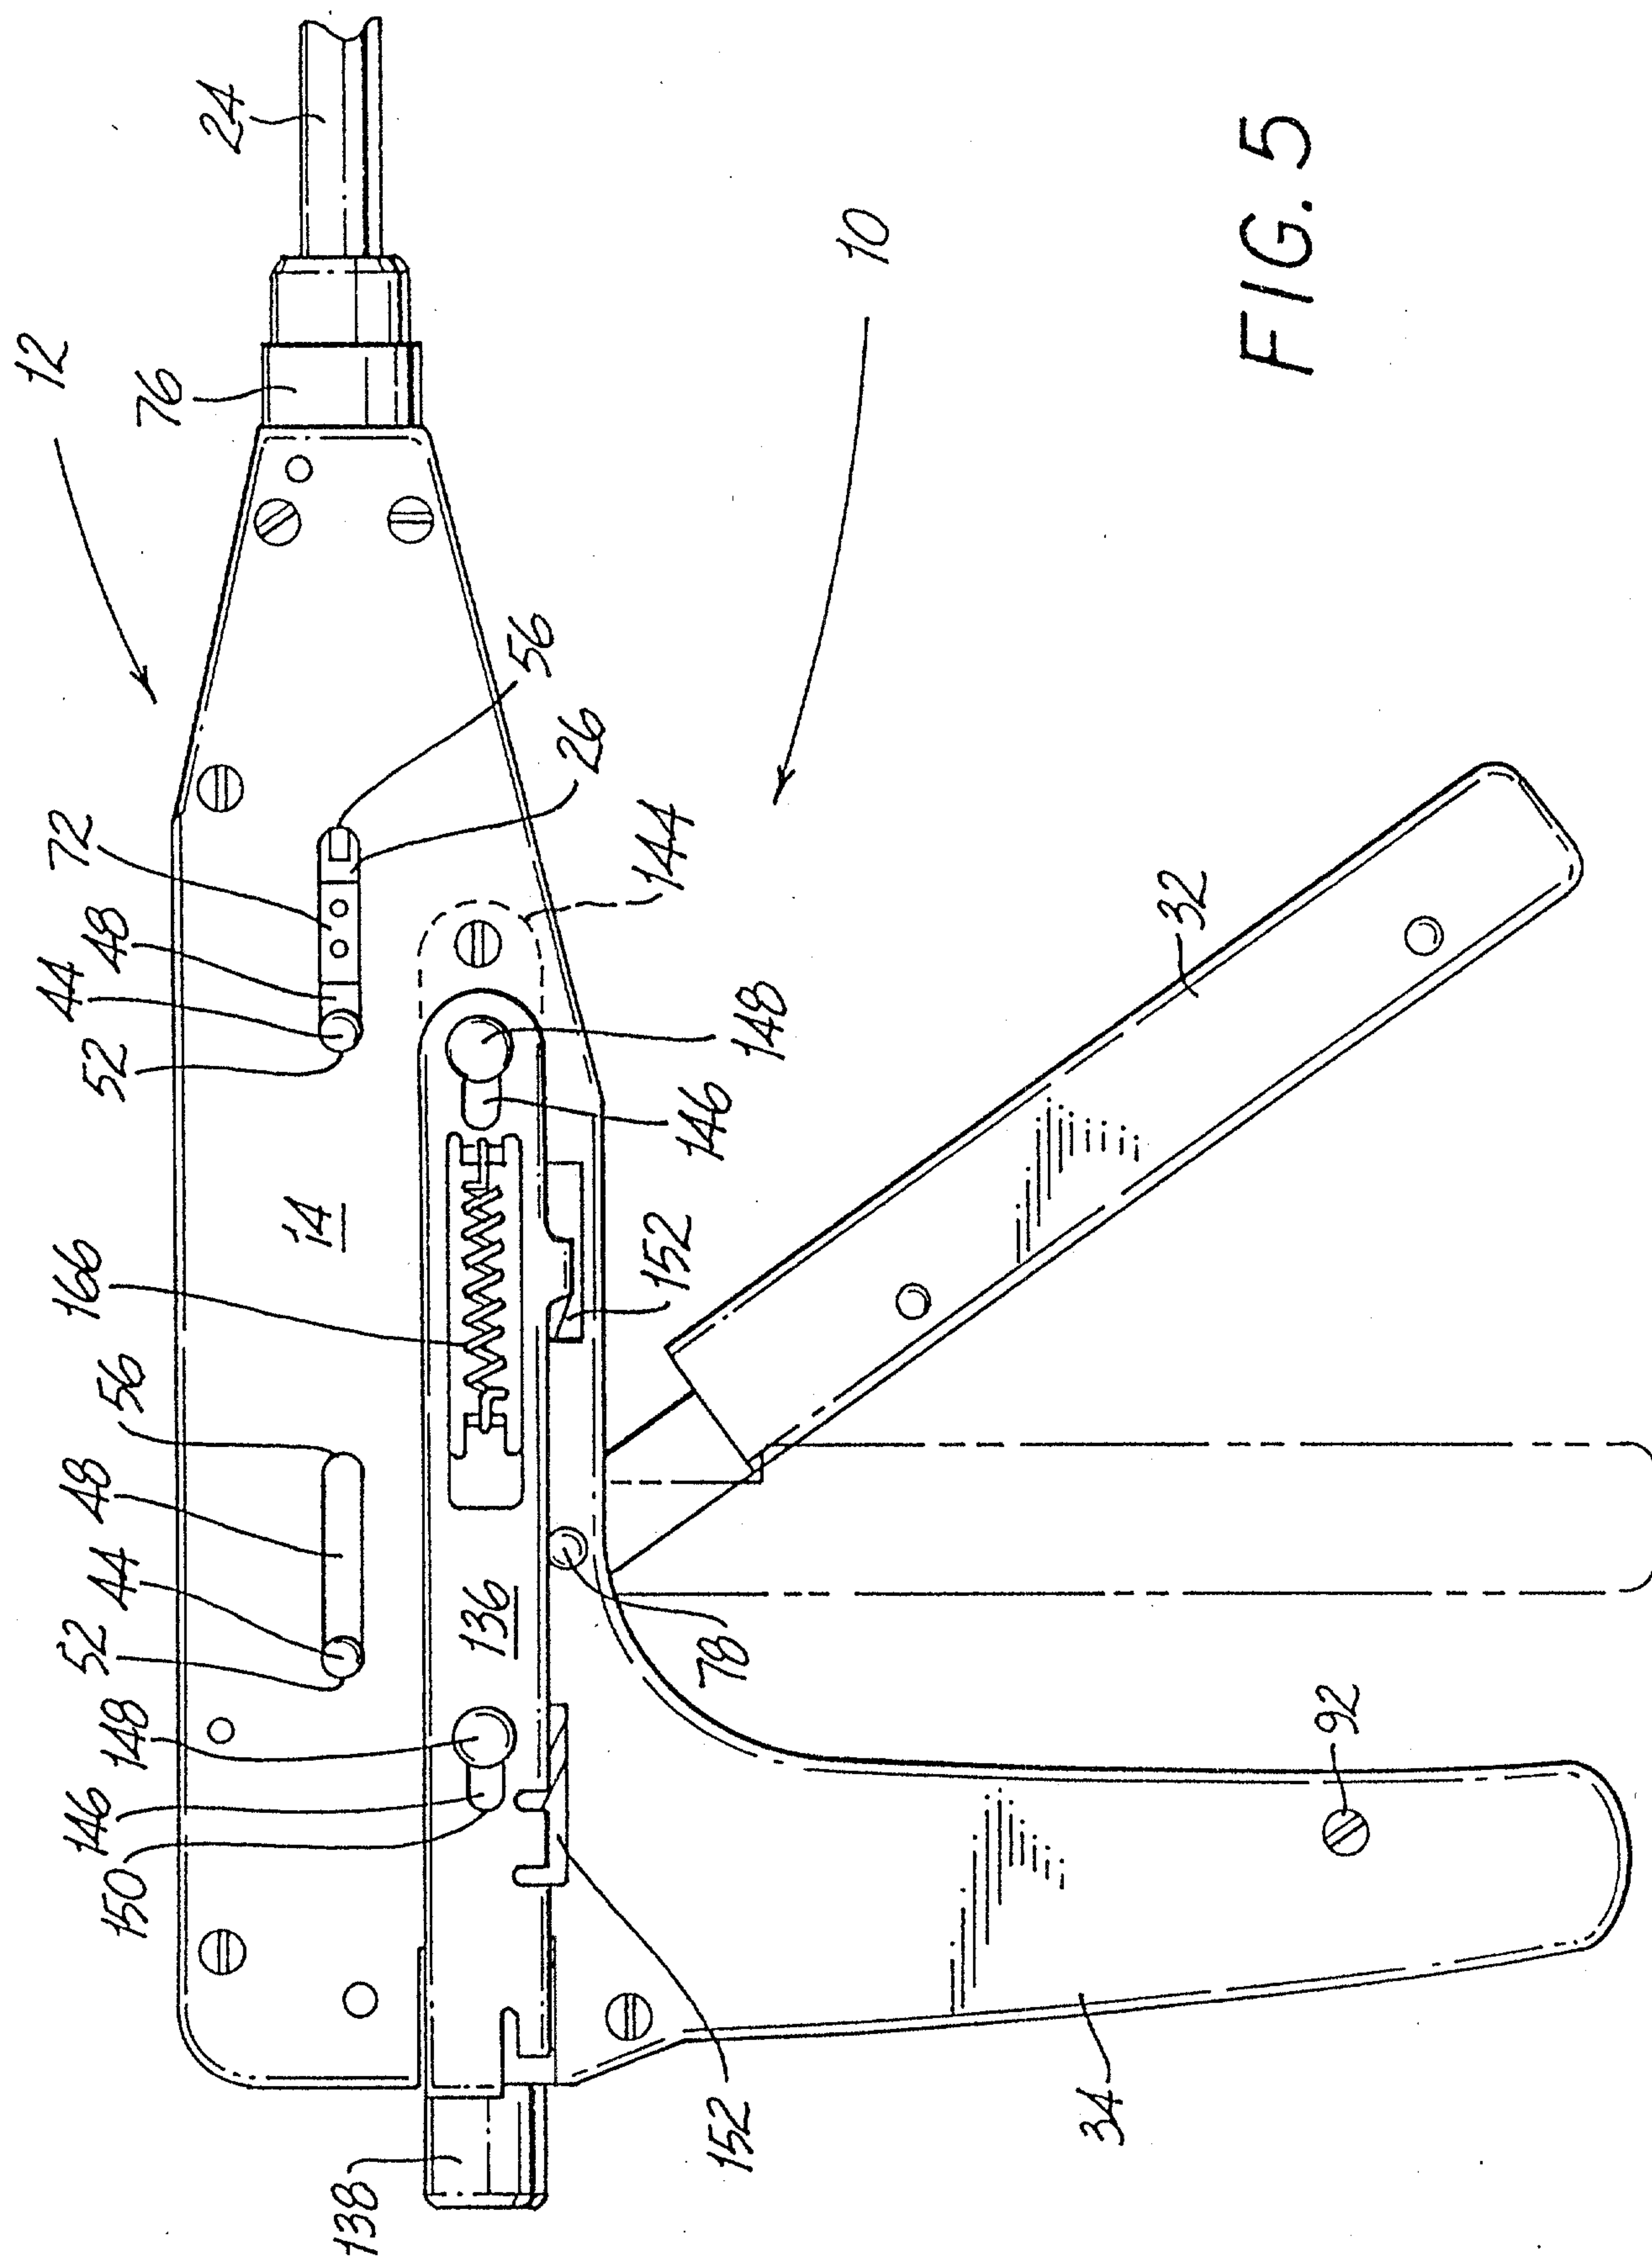


FIG. 5

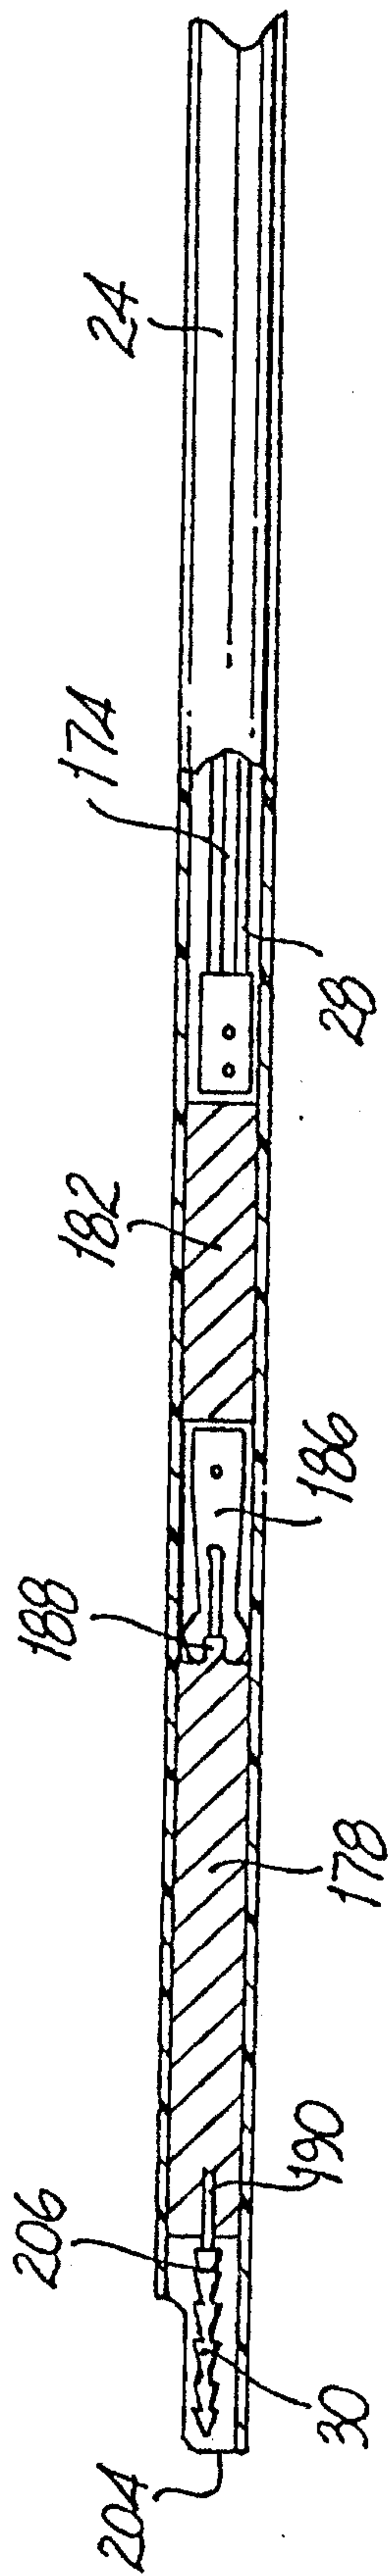


FIG. 8

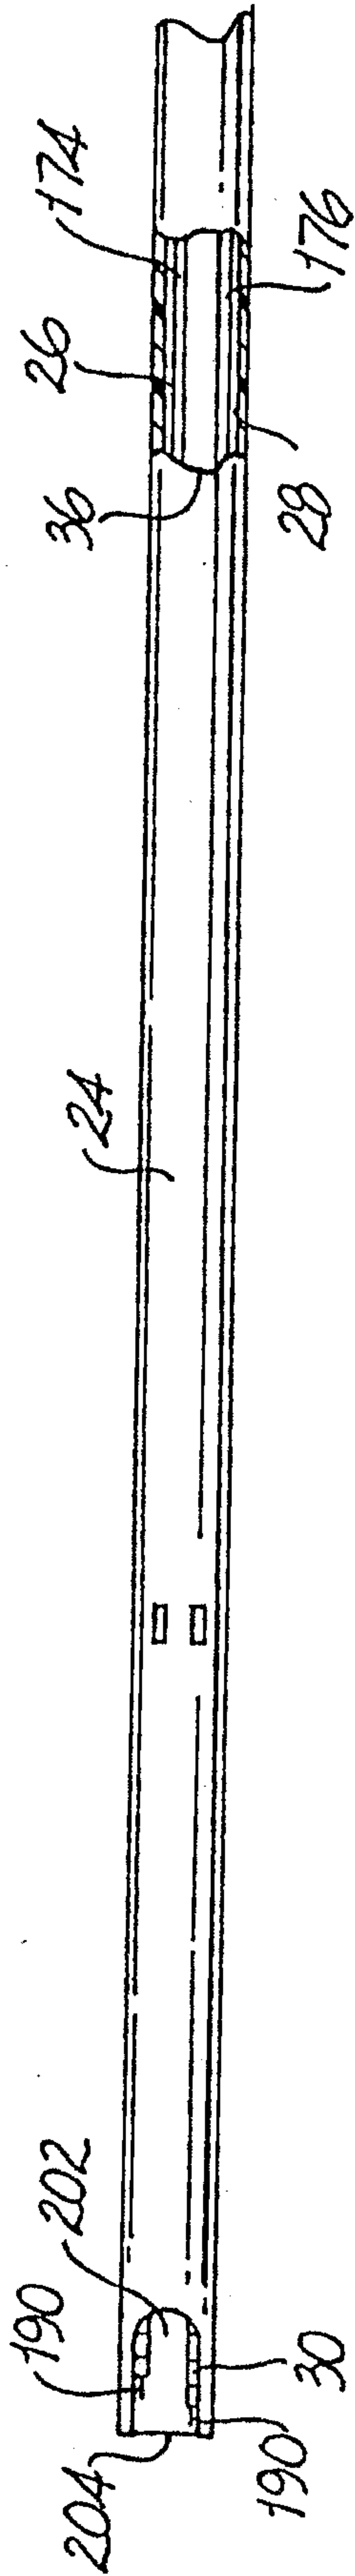


FIG. 7

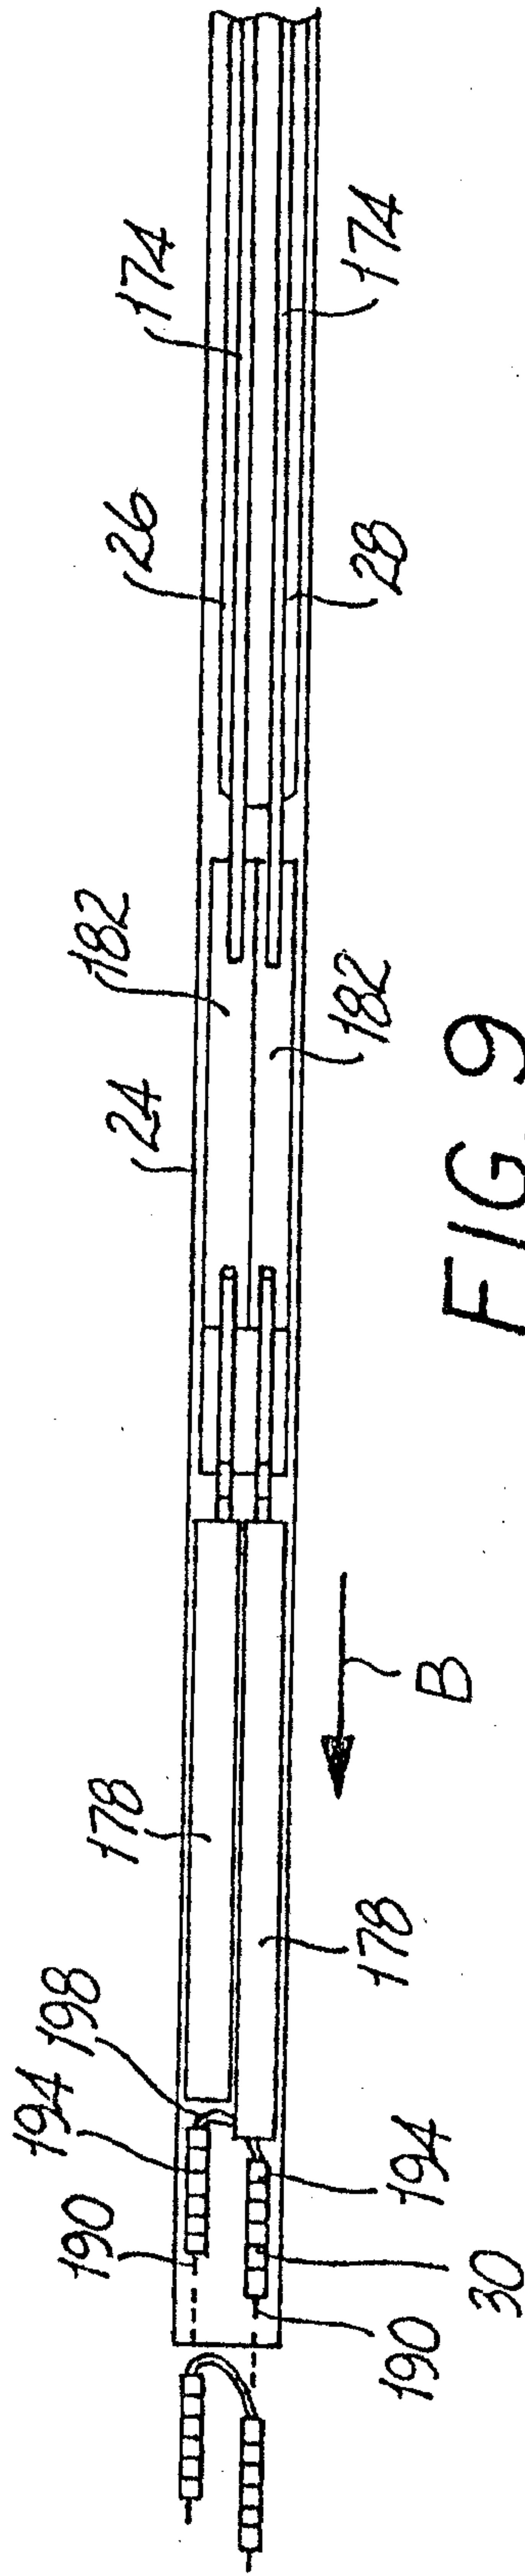
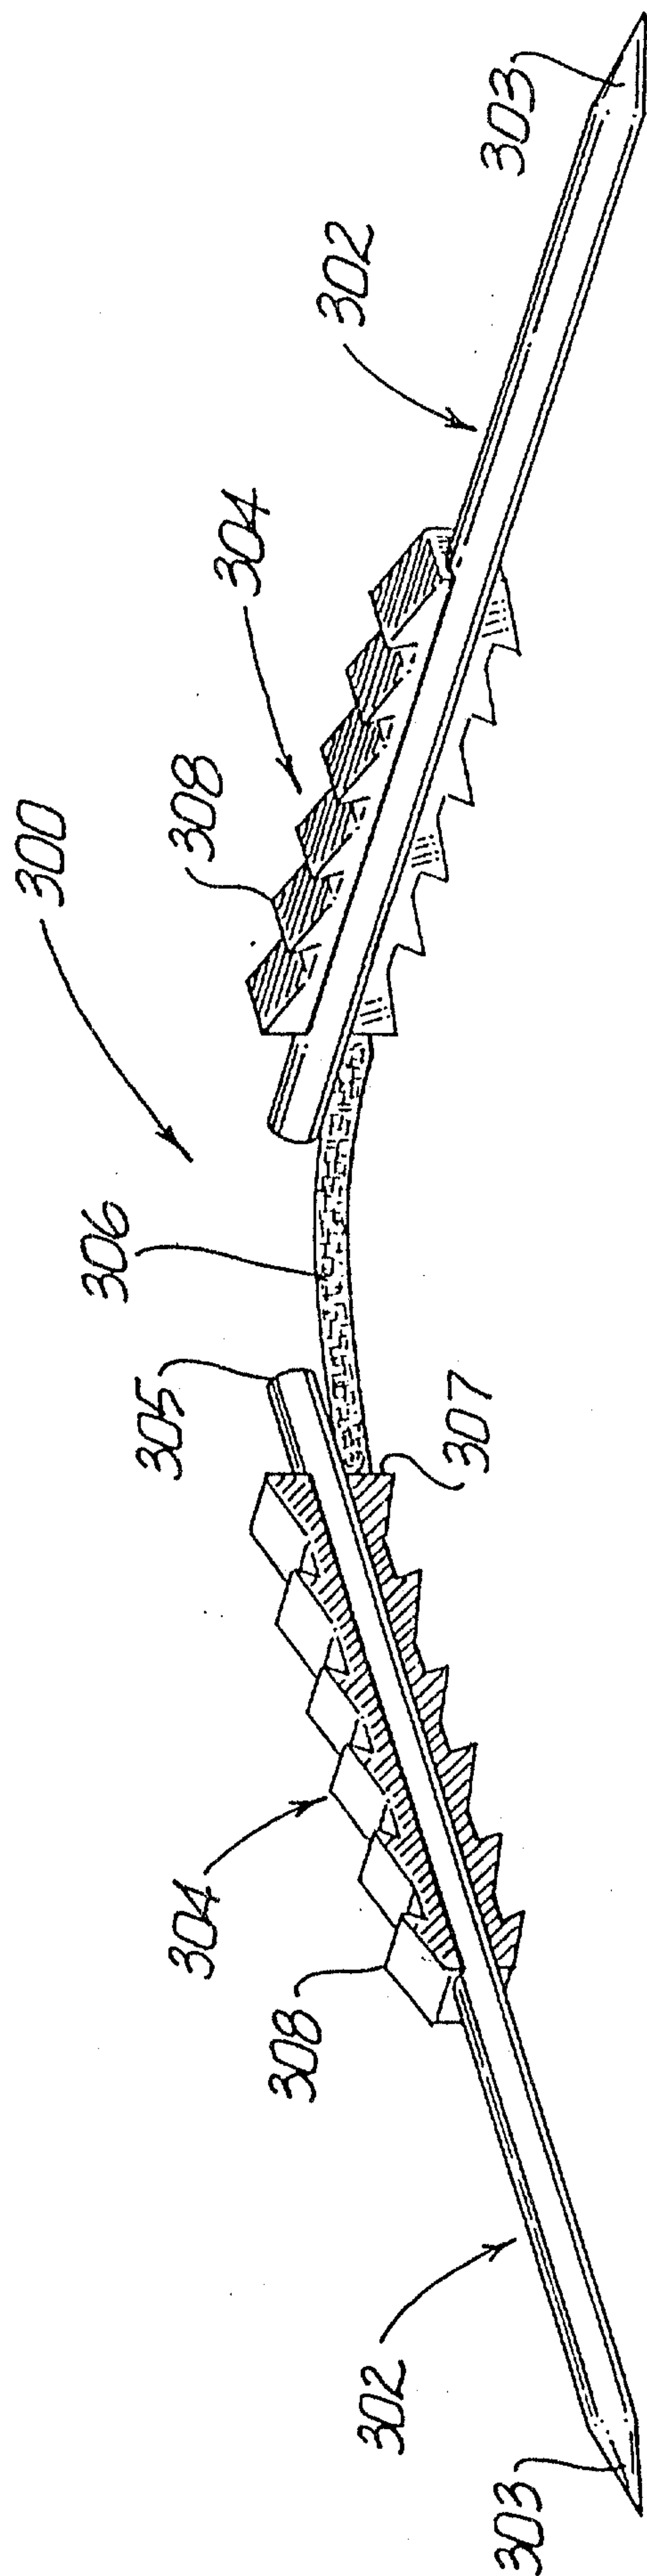
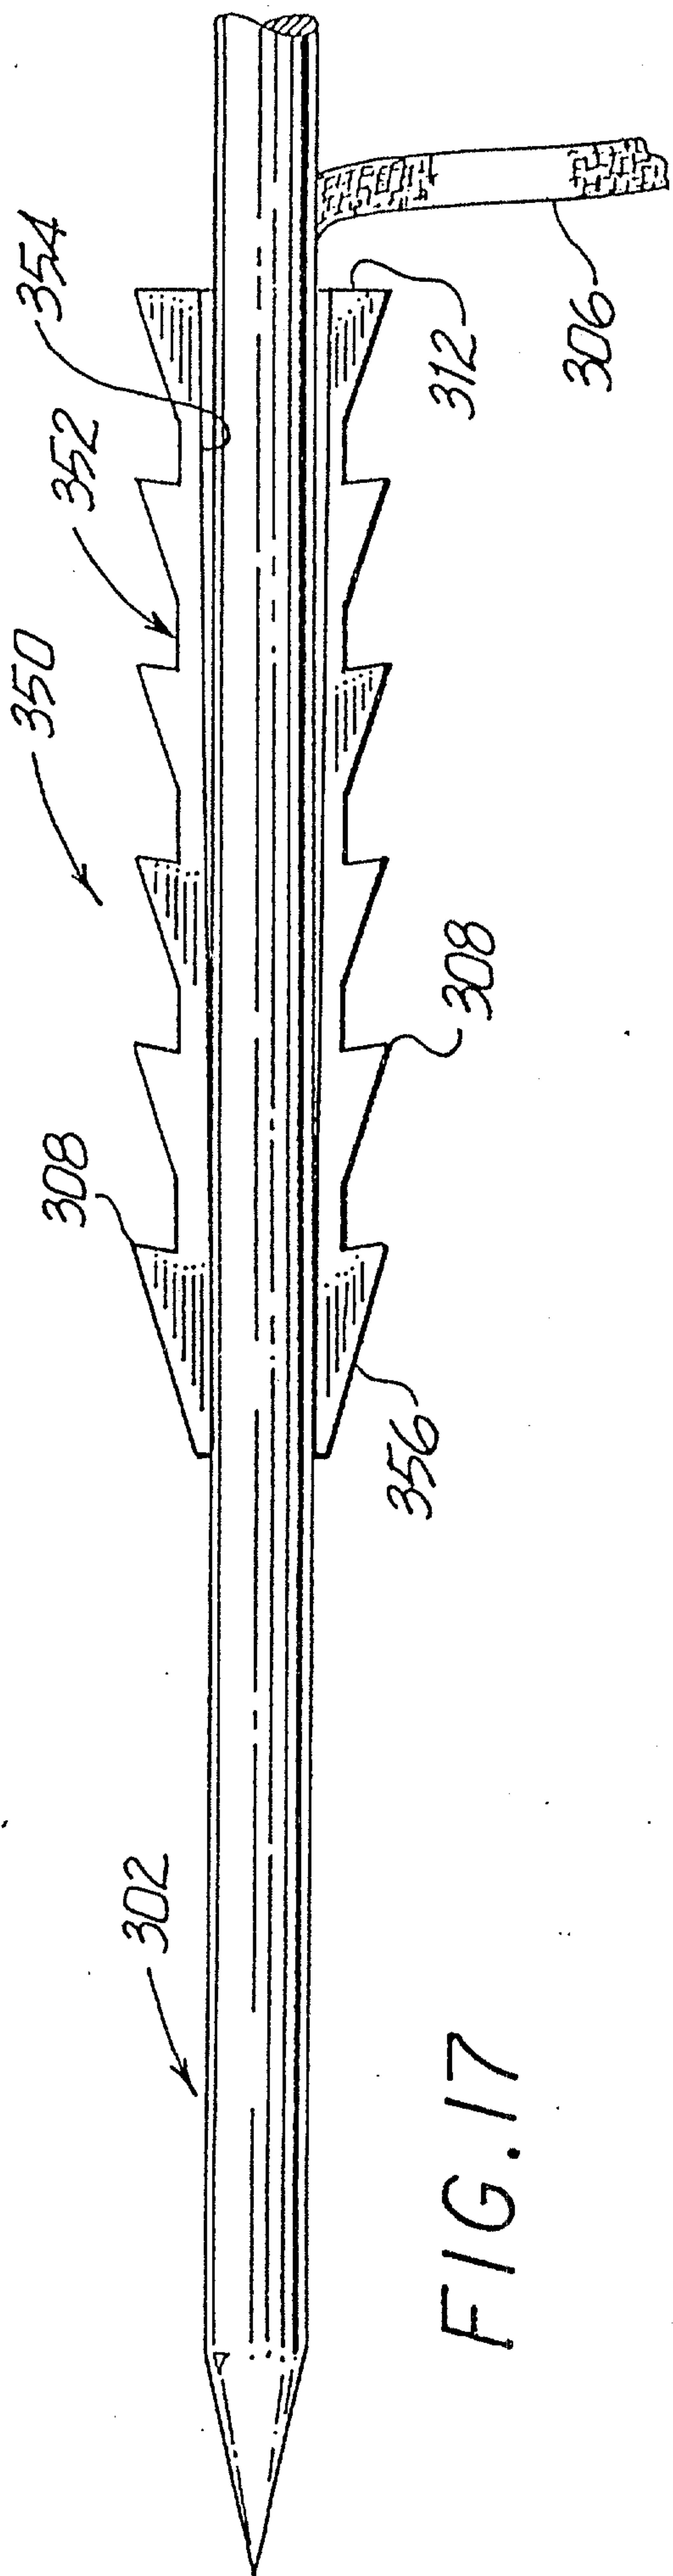


FIG. 9



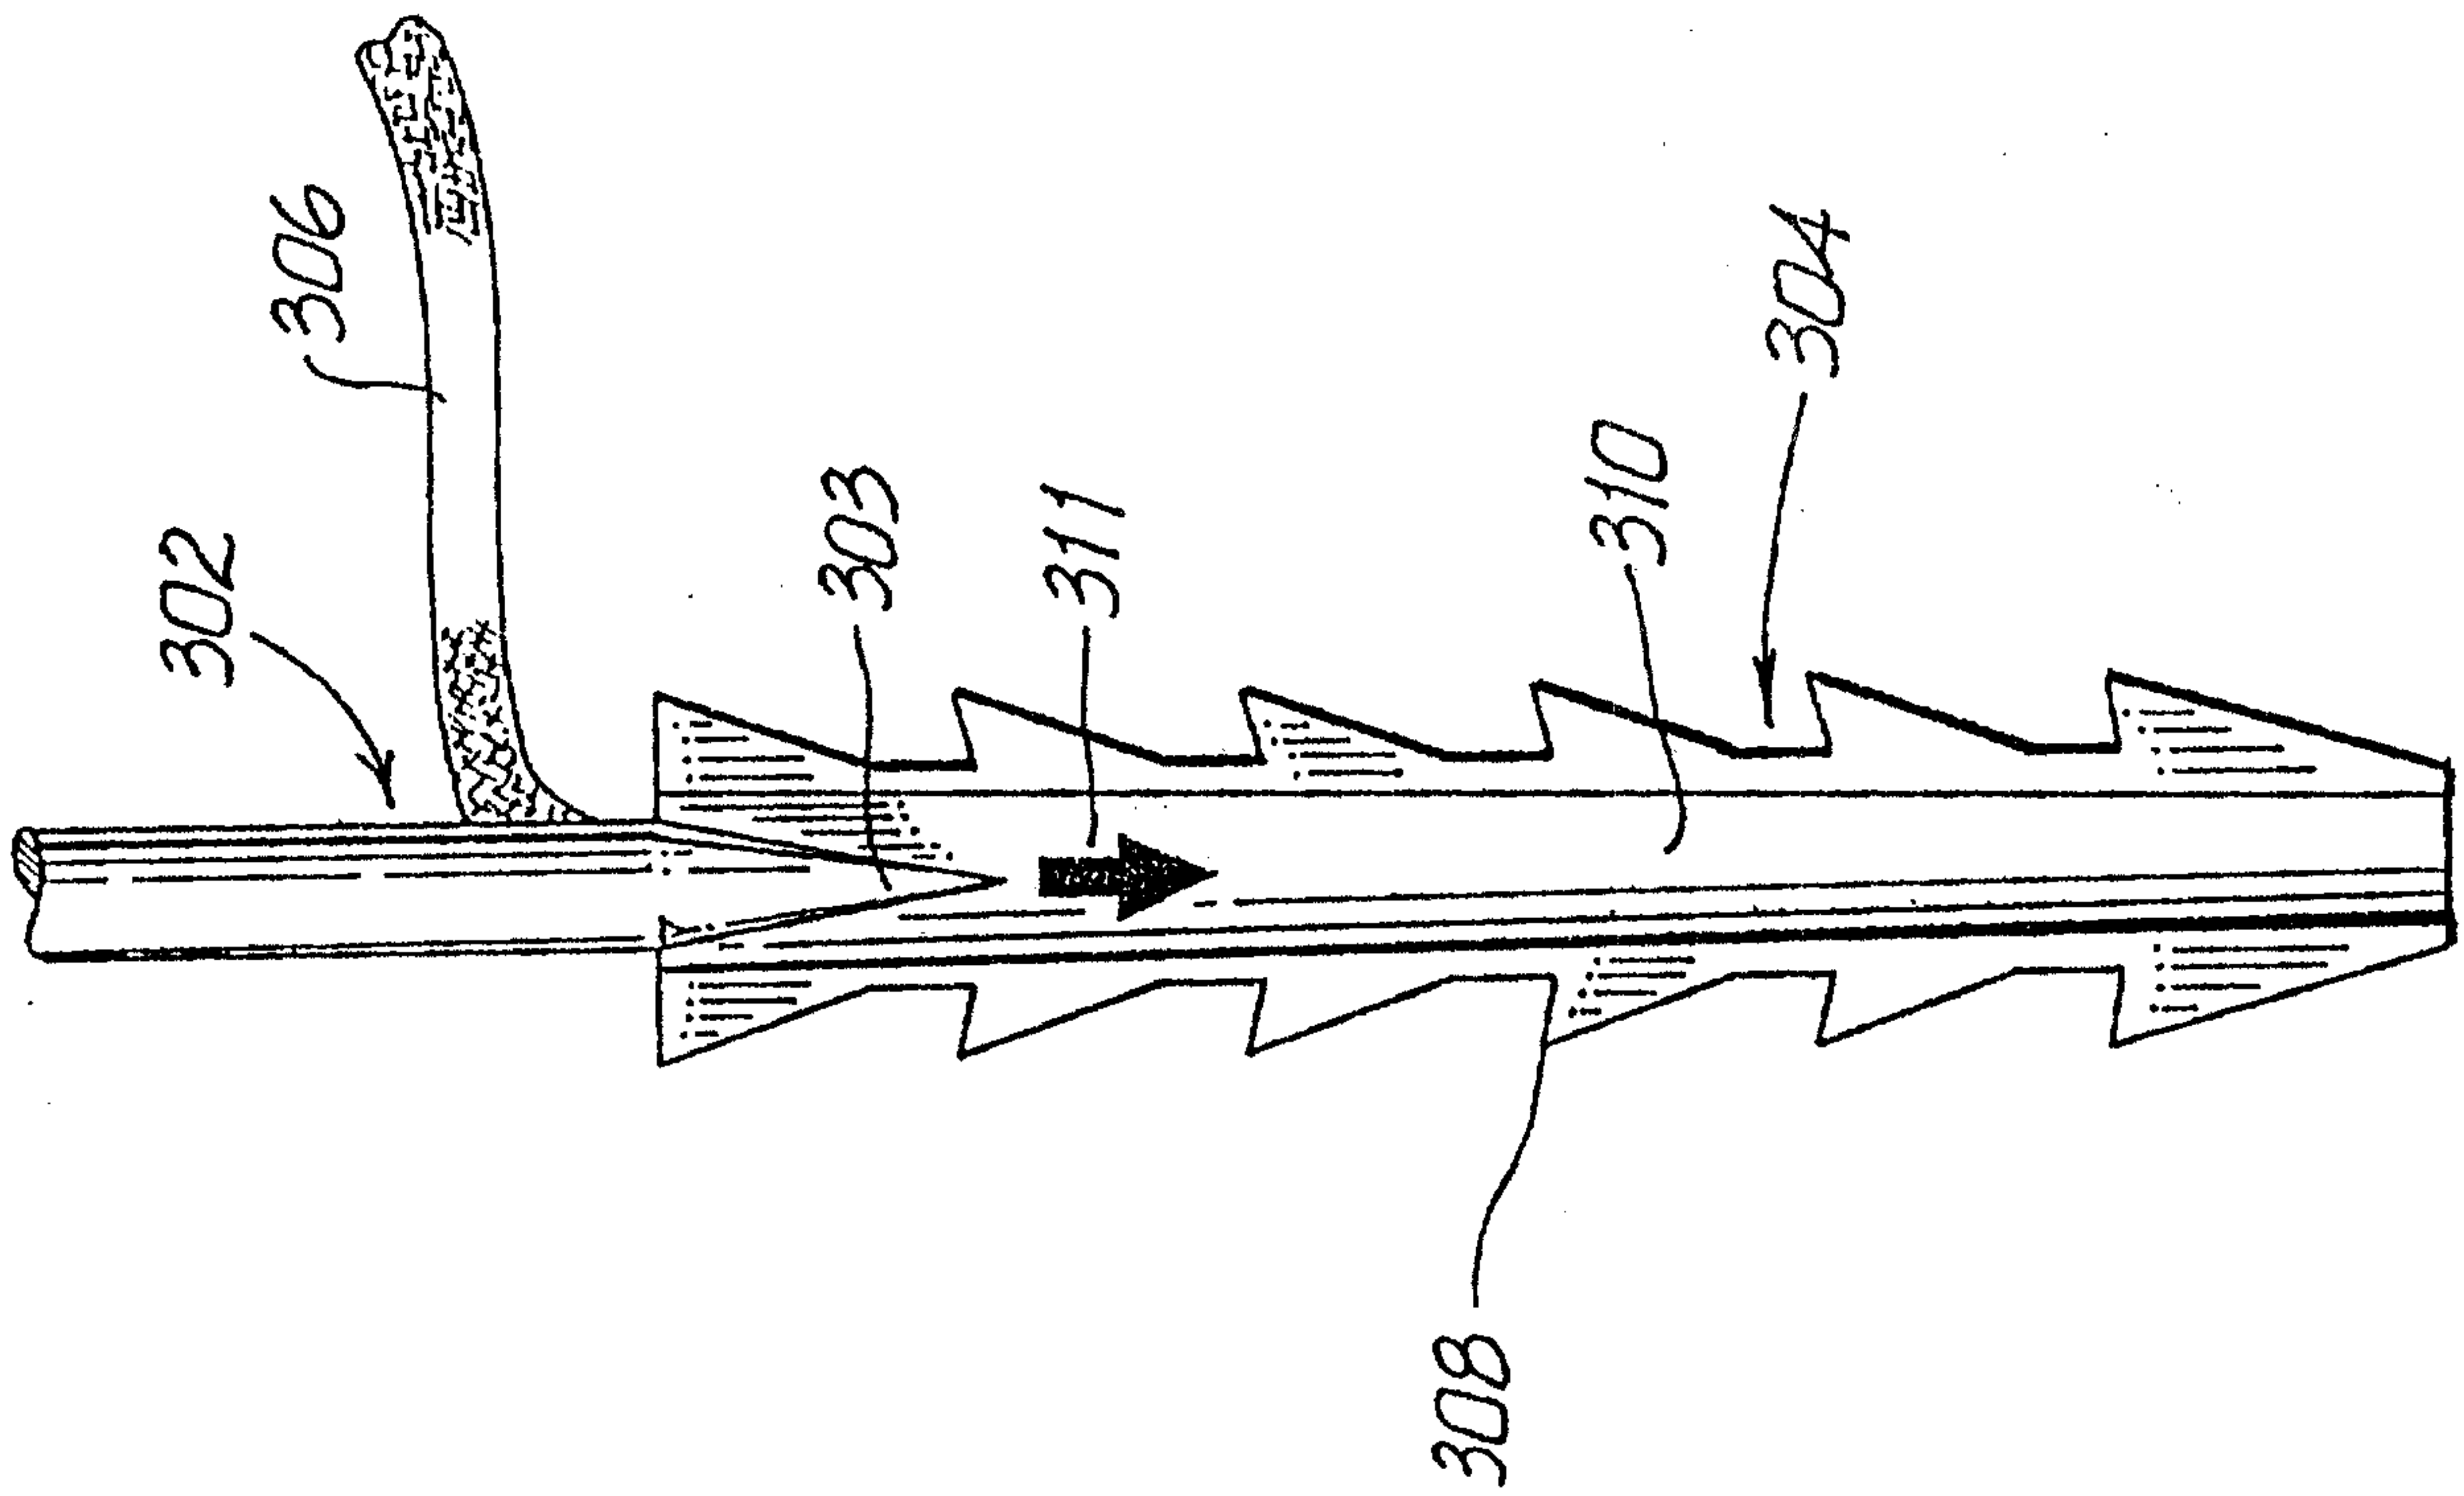


FIG. 15

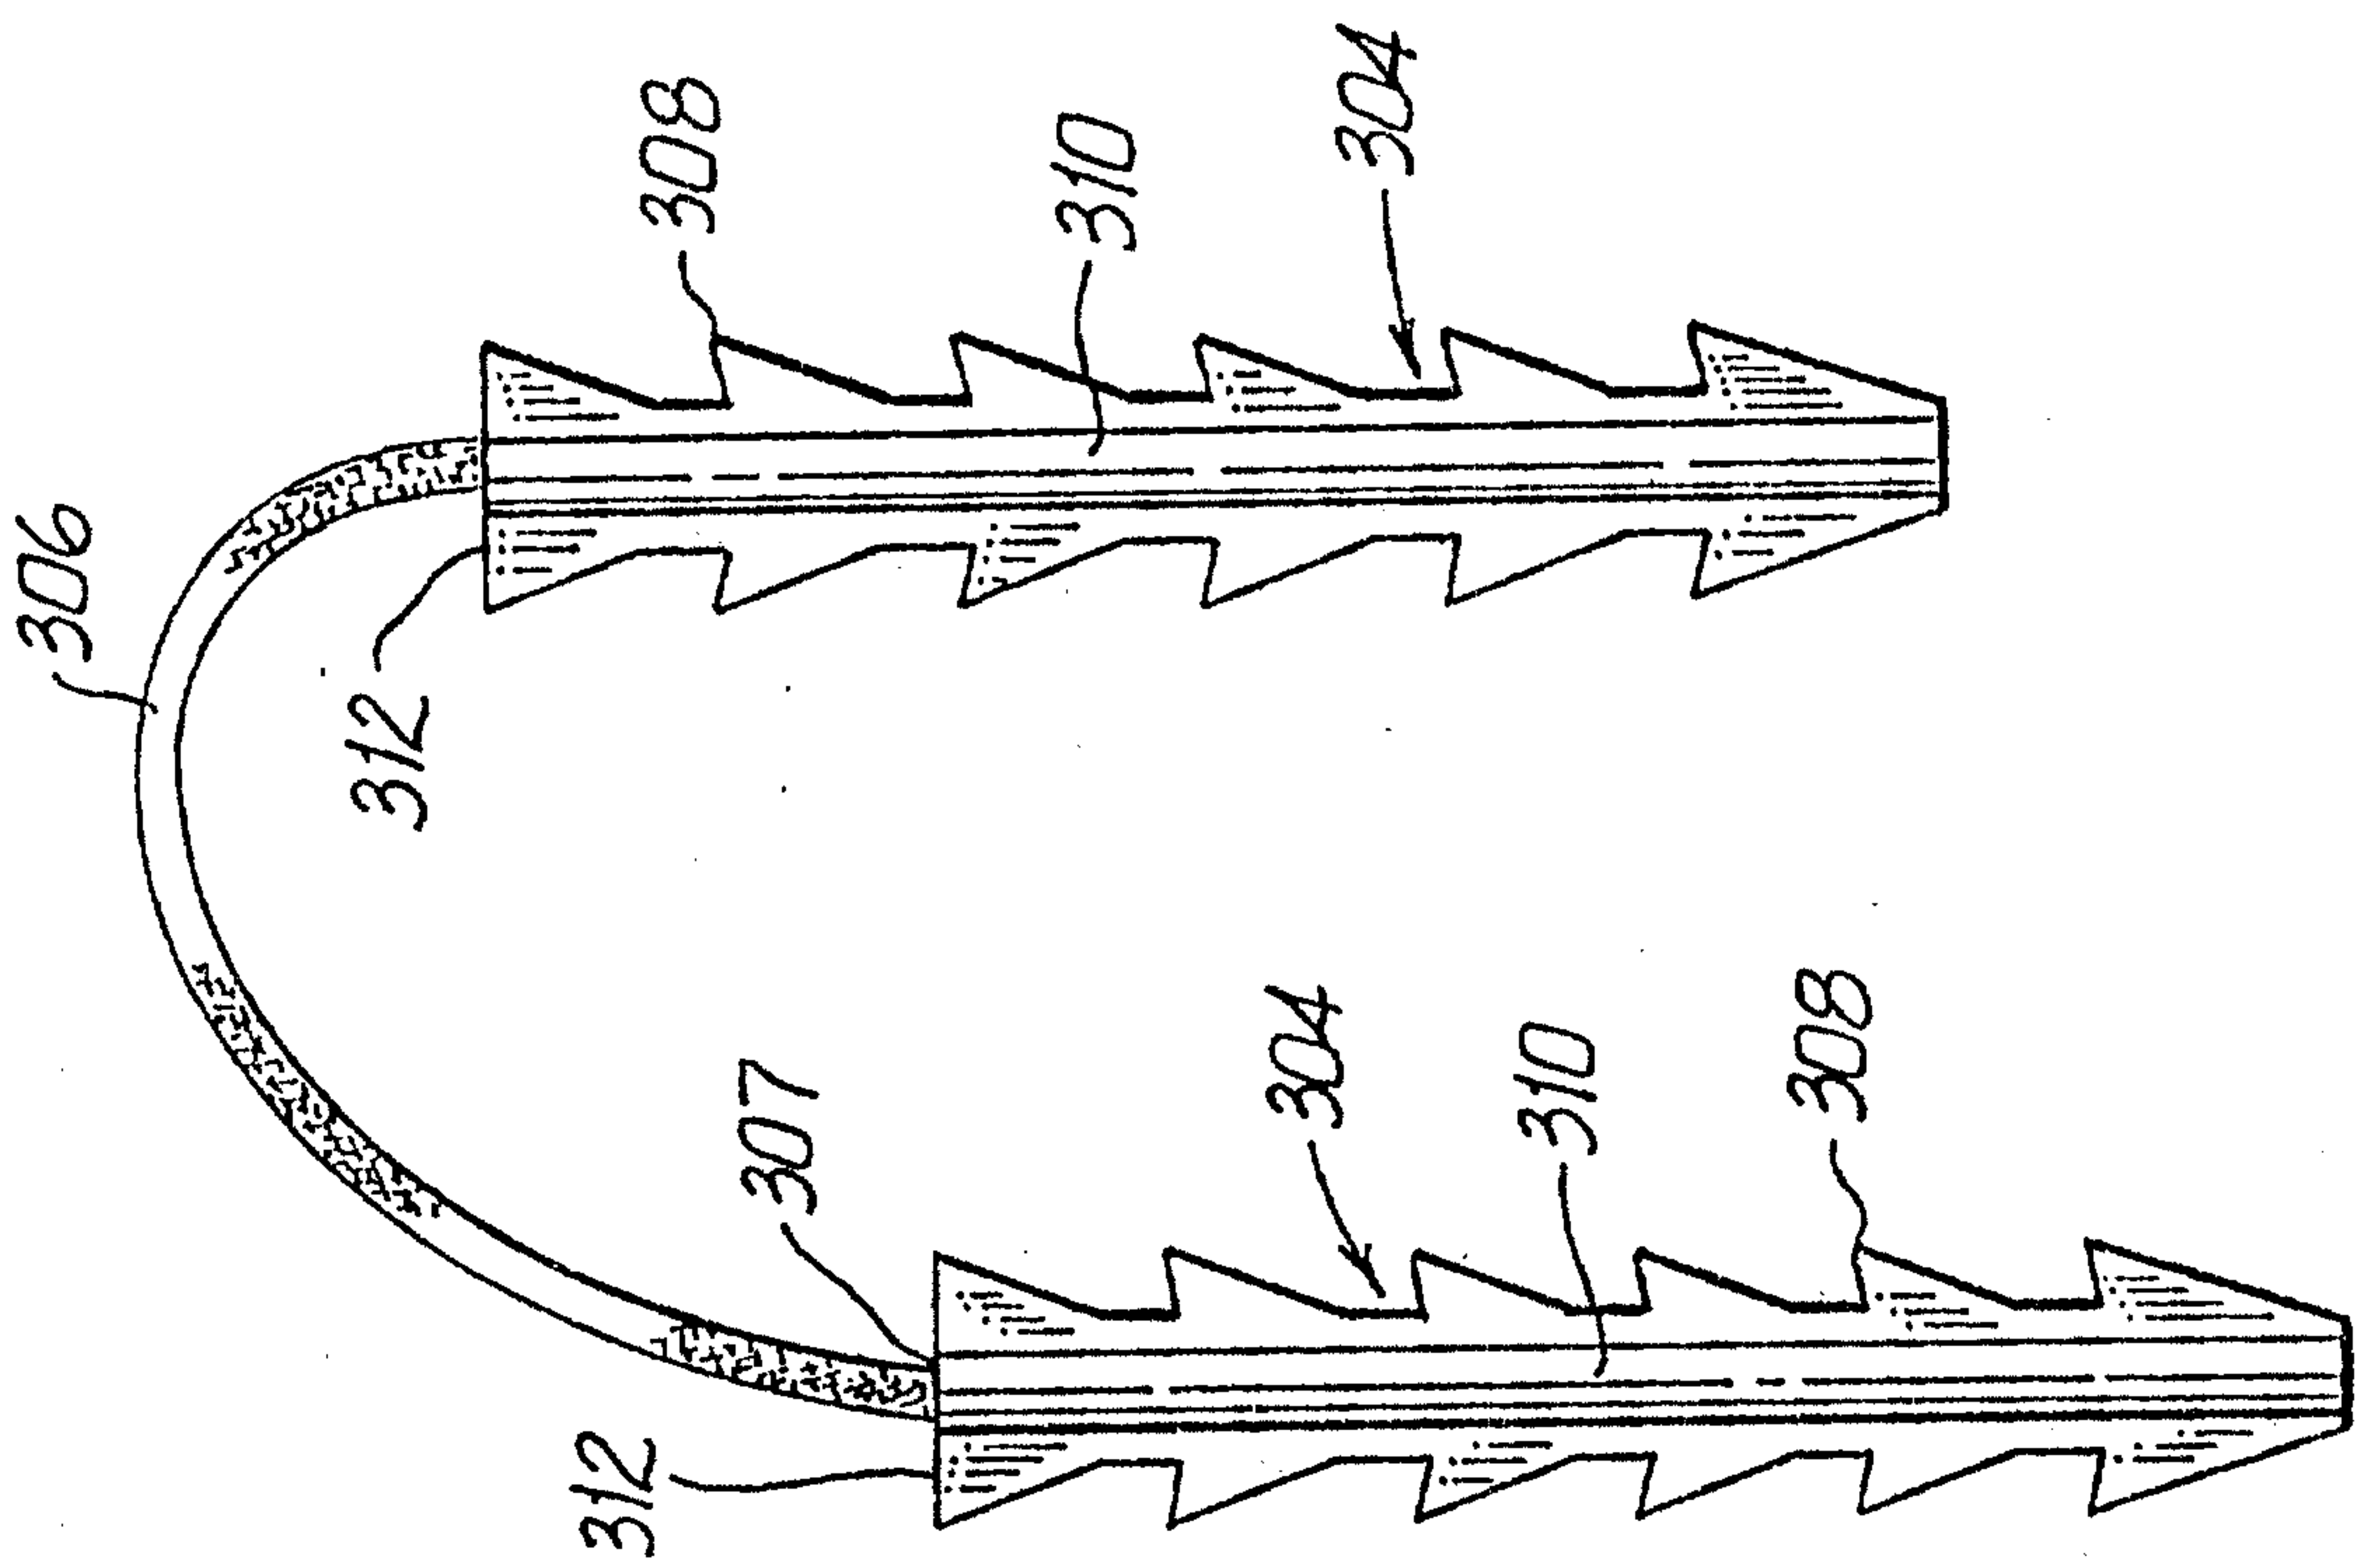


FIG. 11

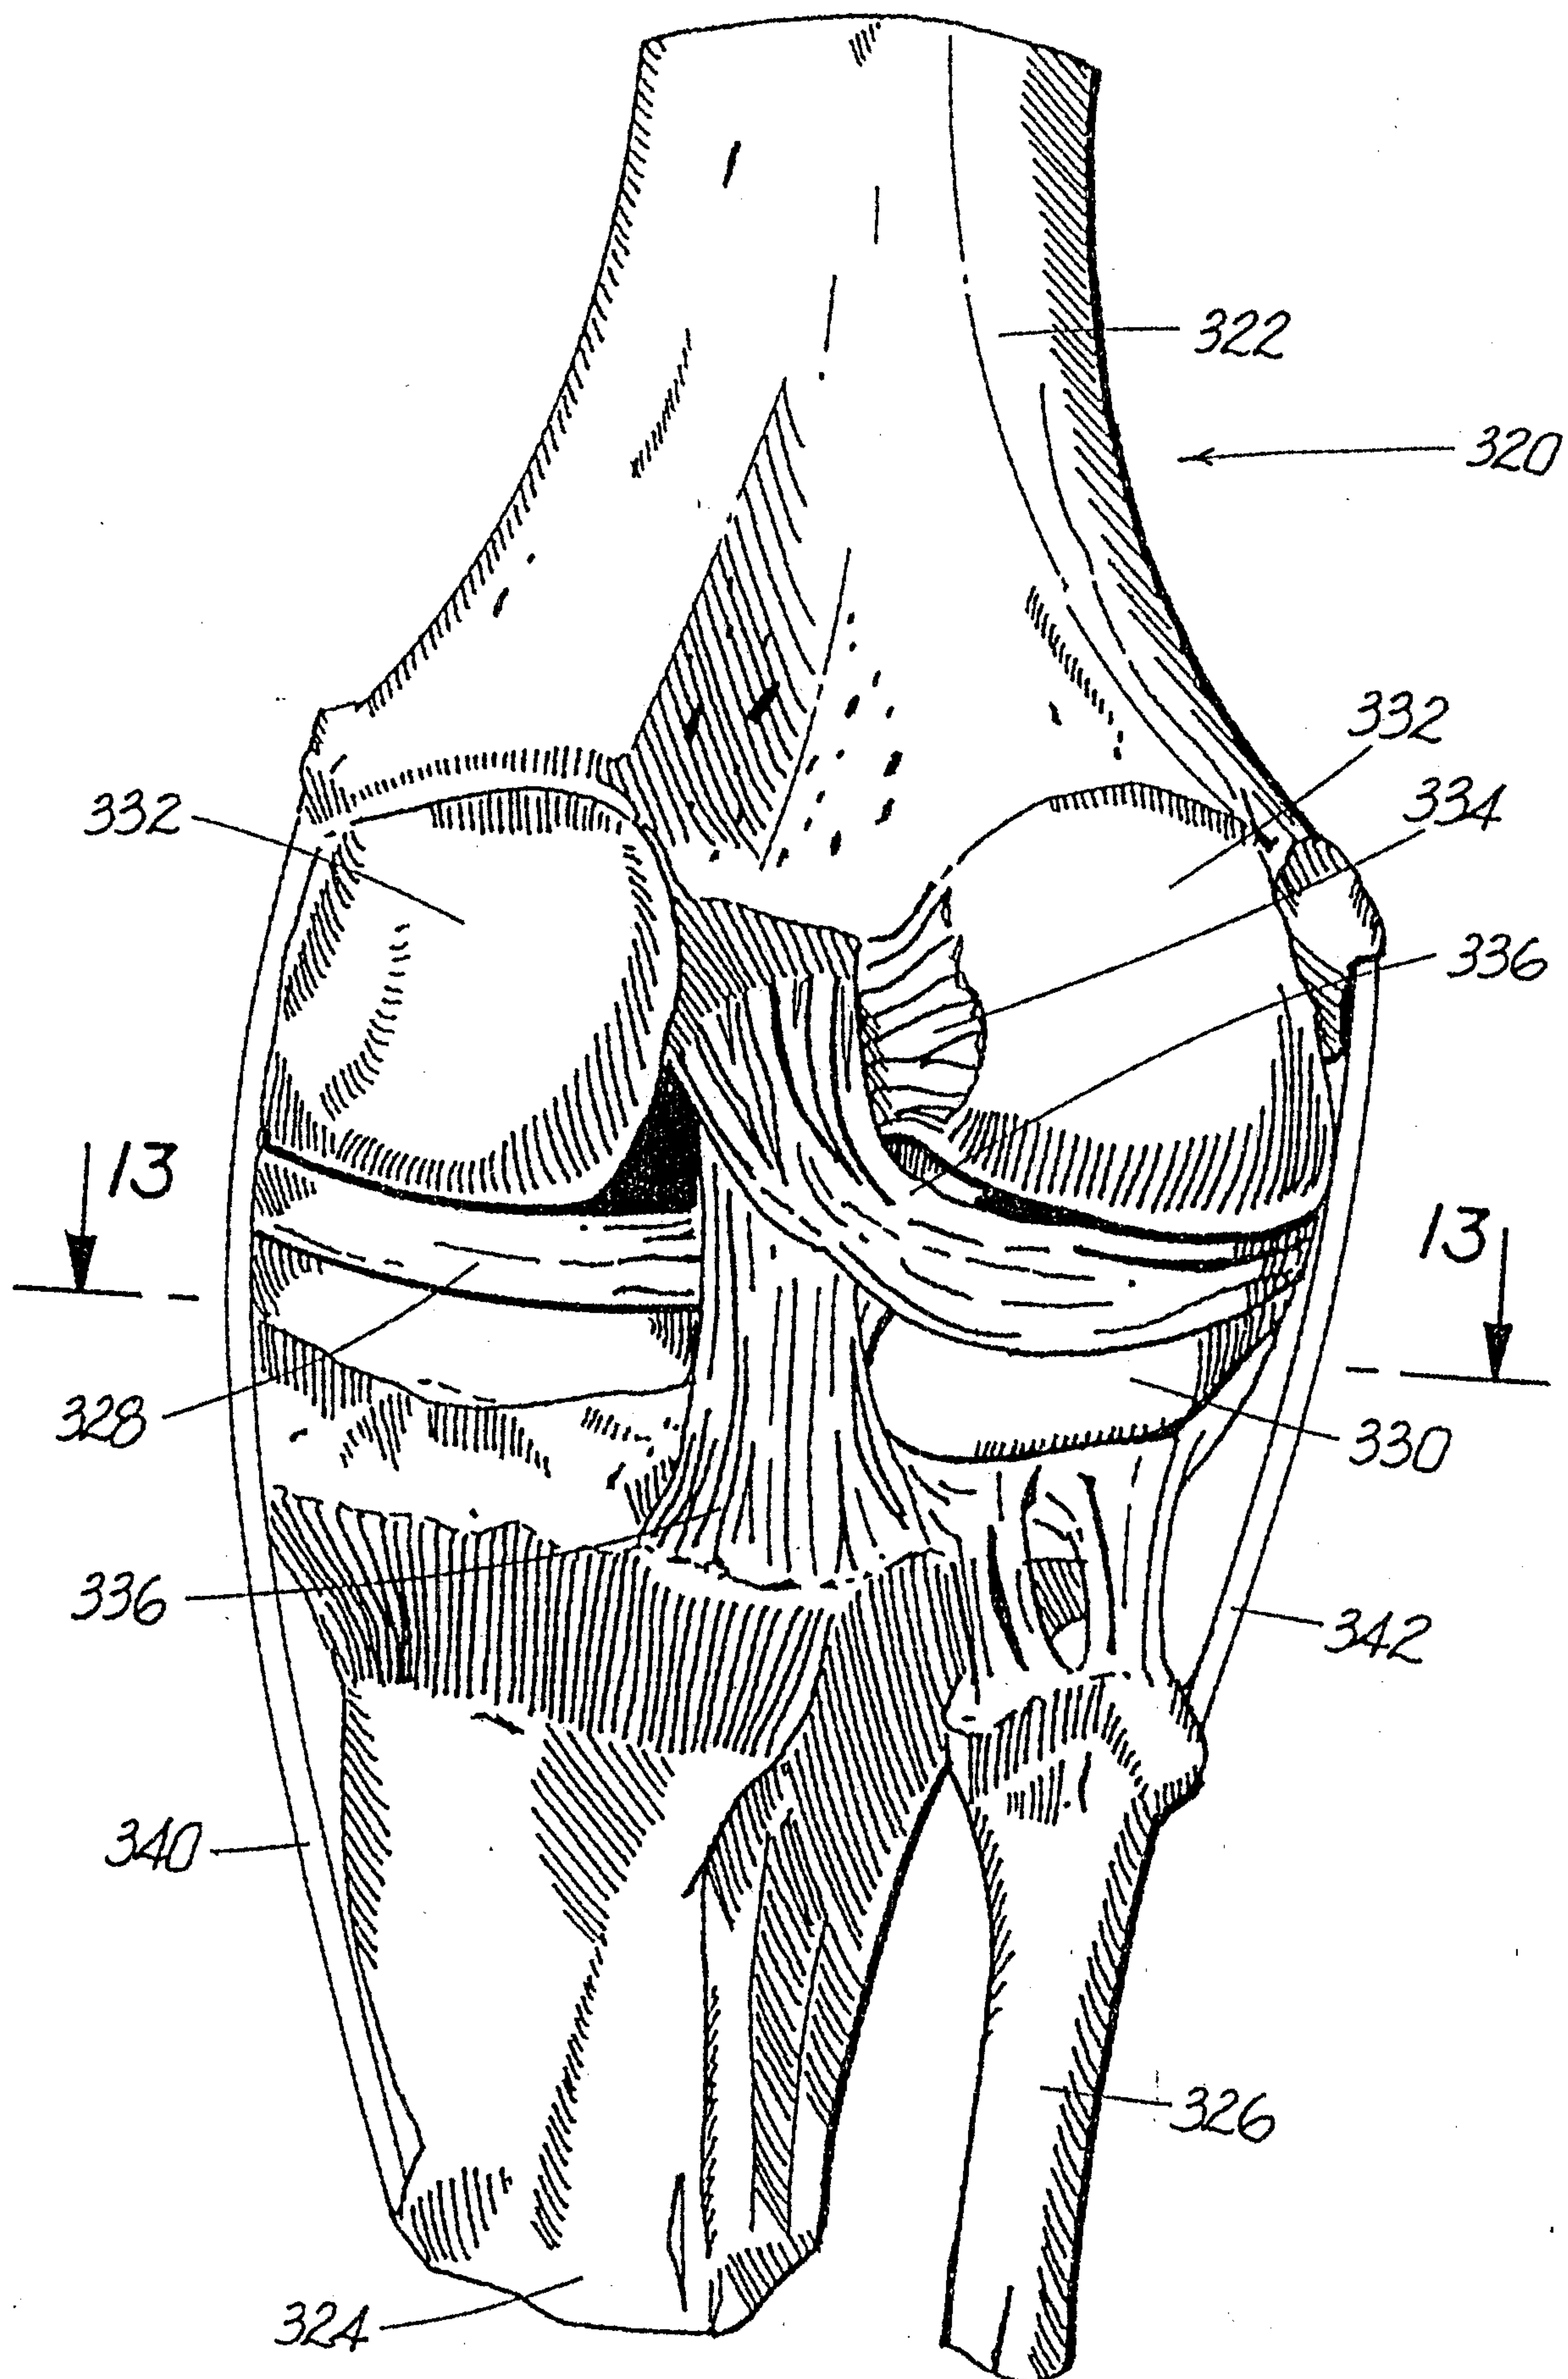


FIG. 12

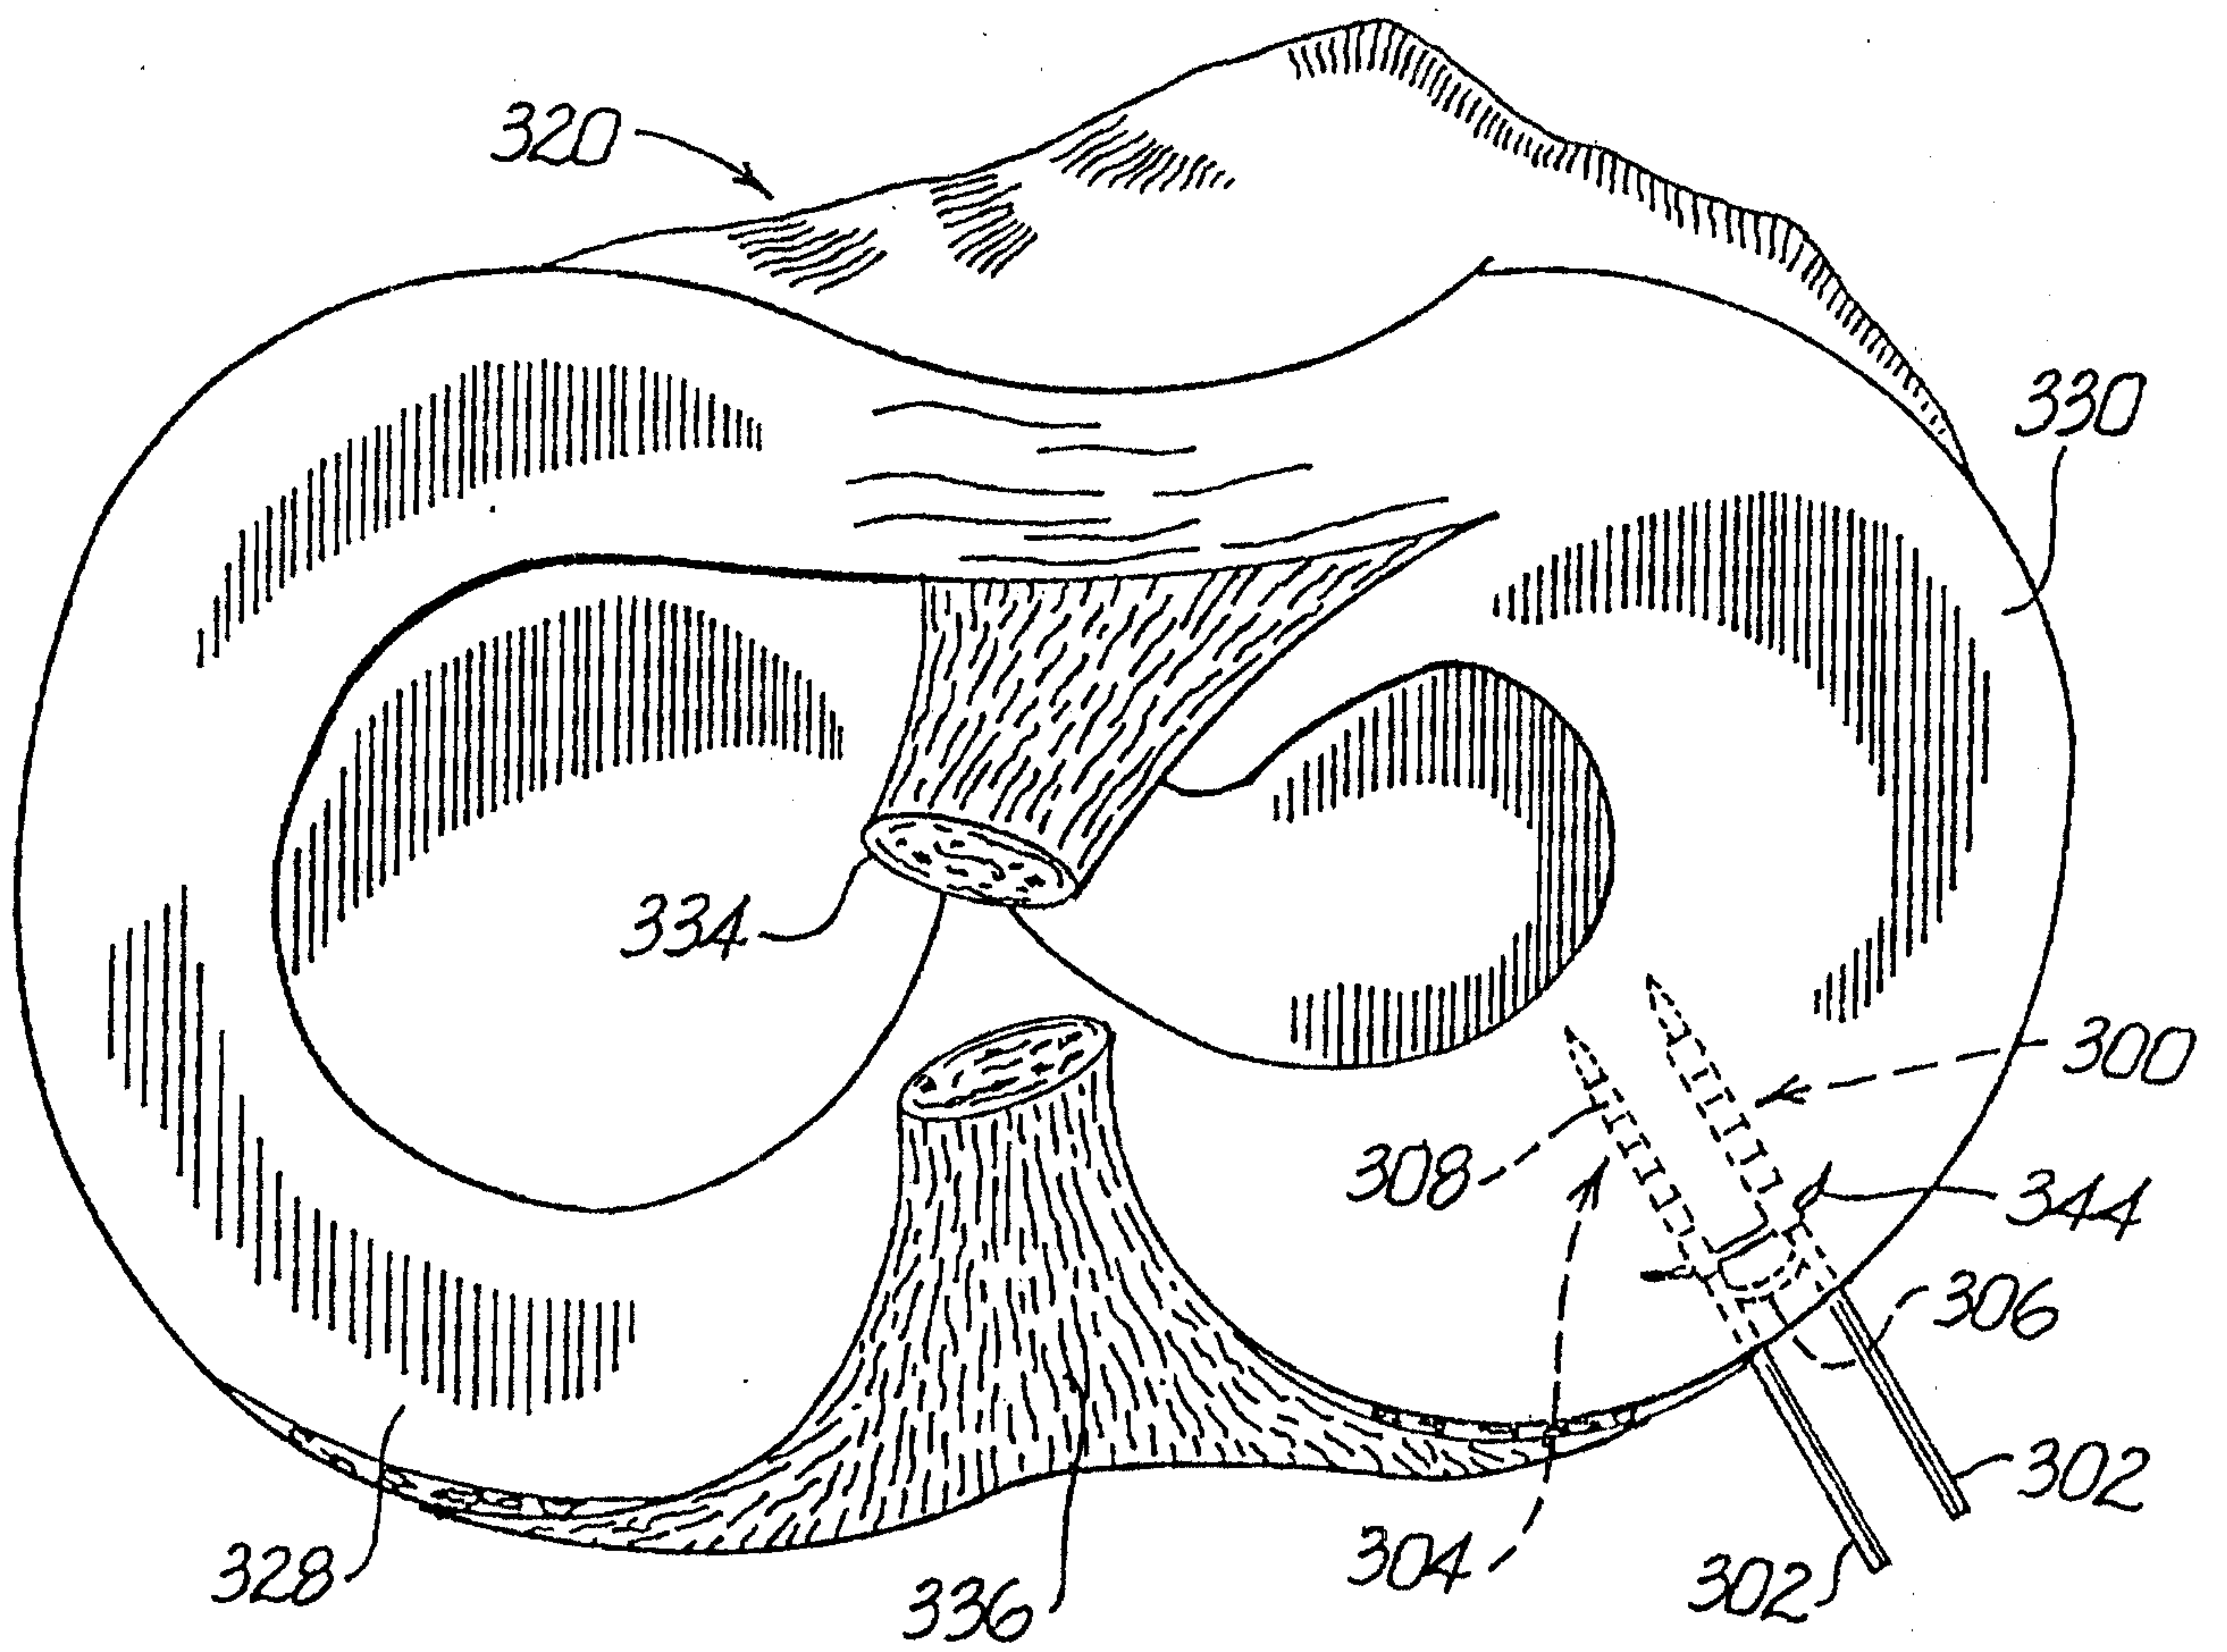


FIG. 13

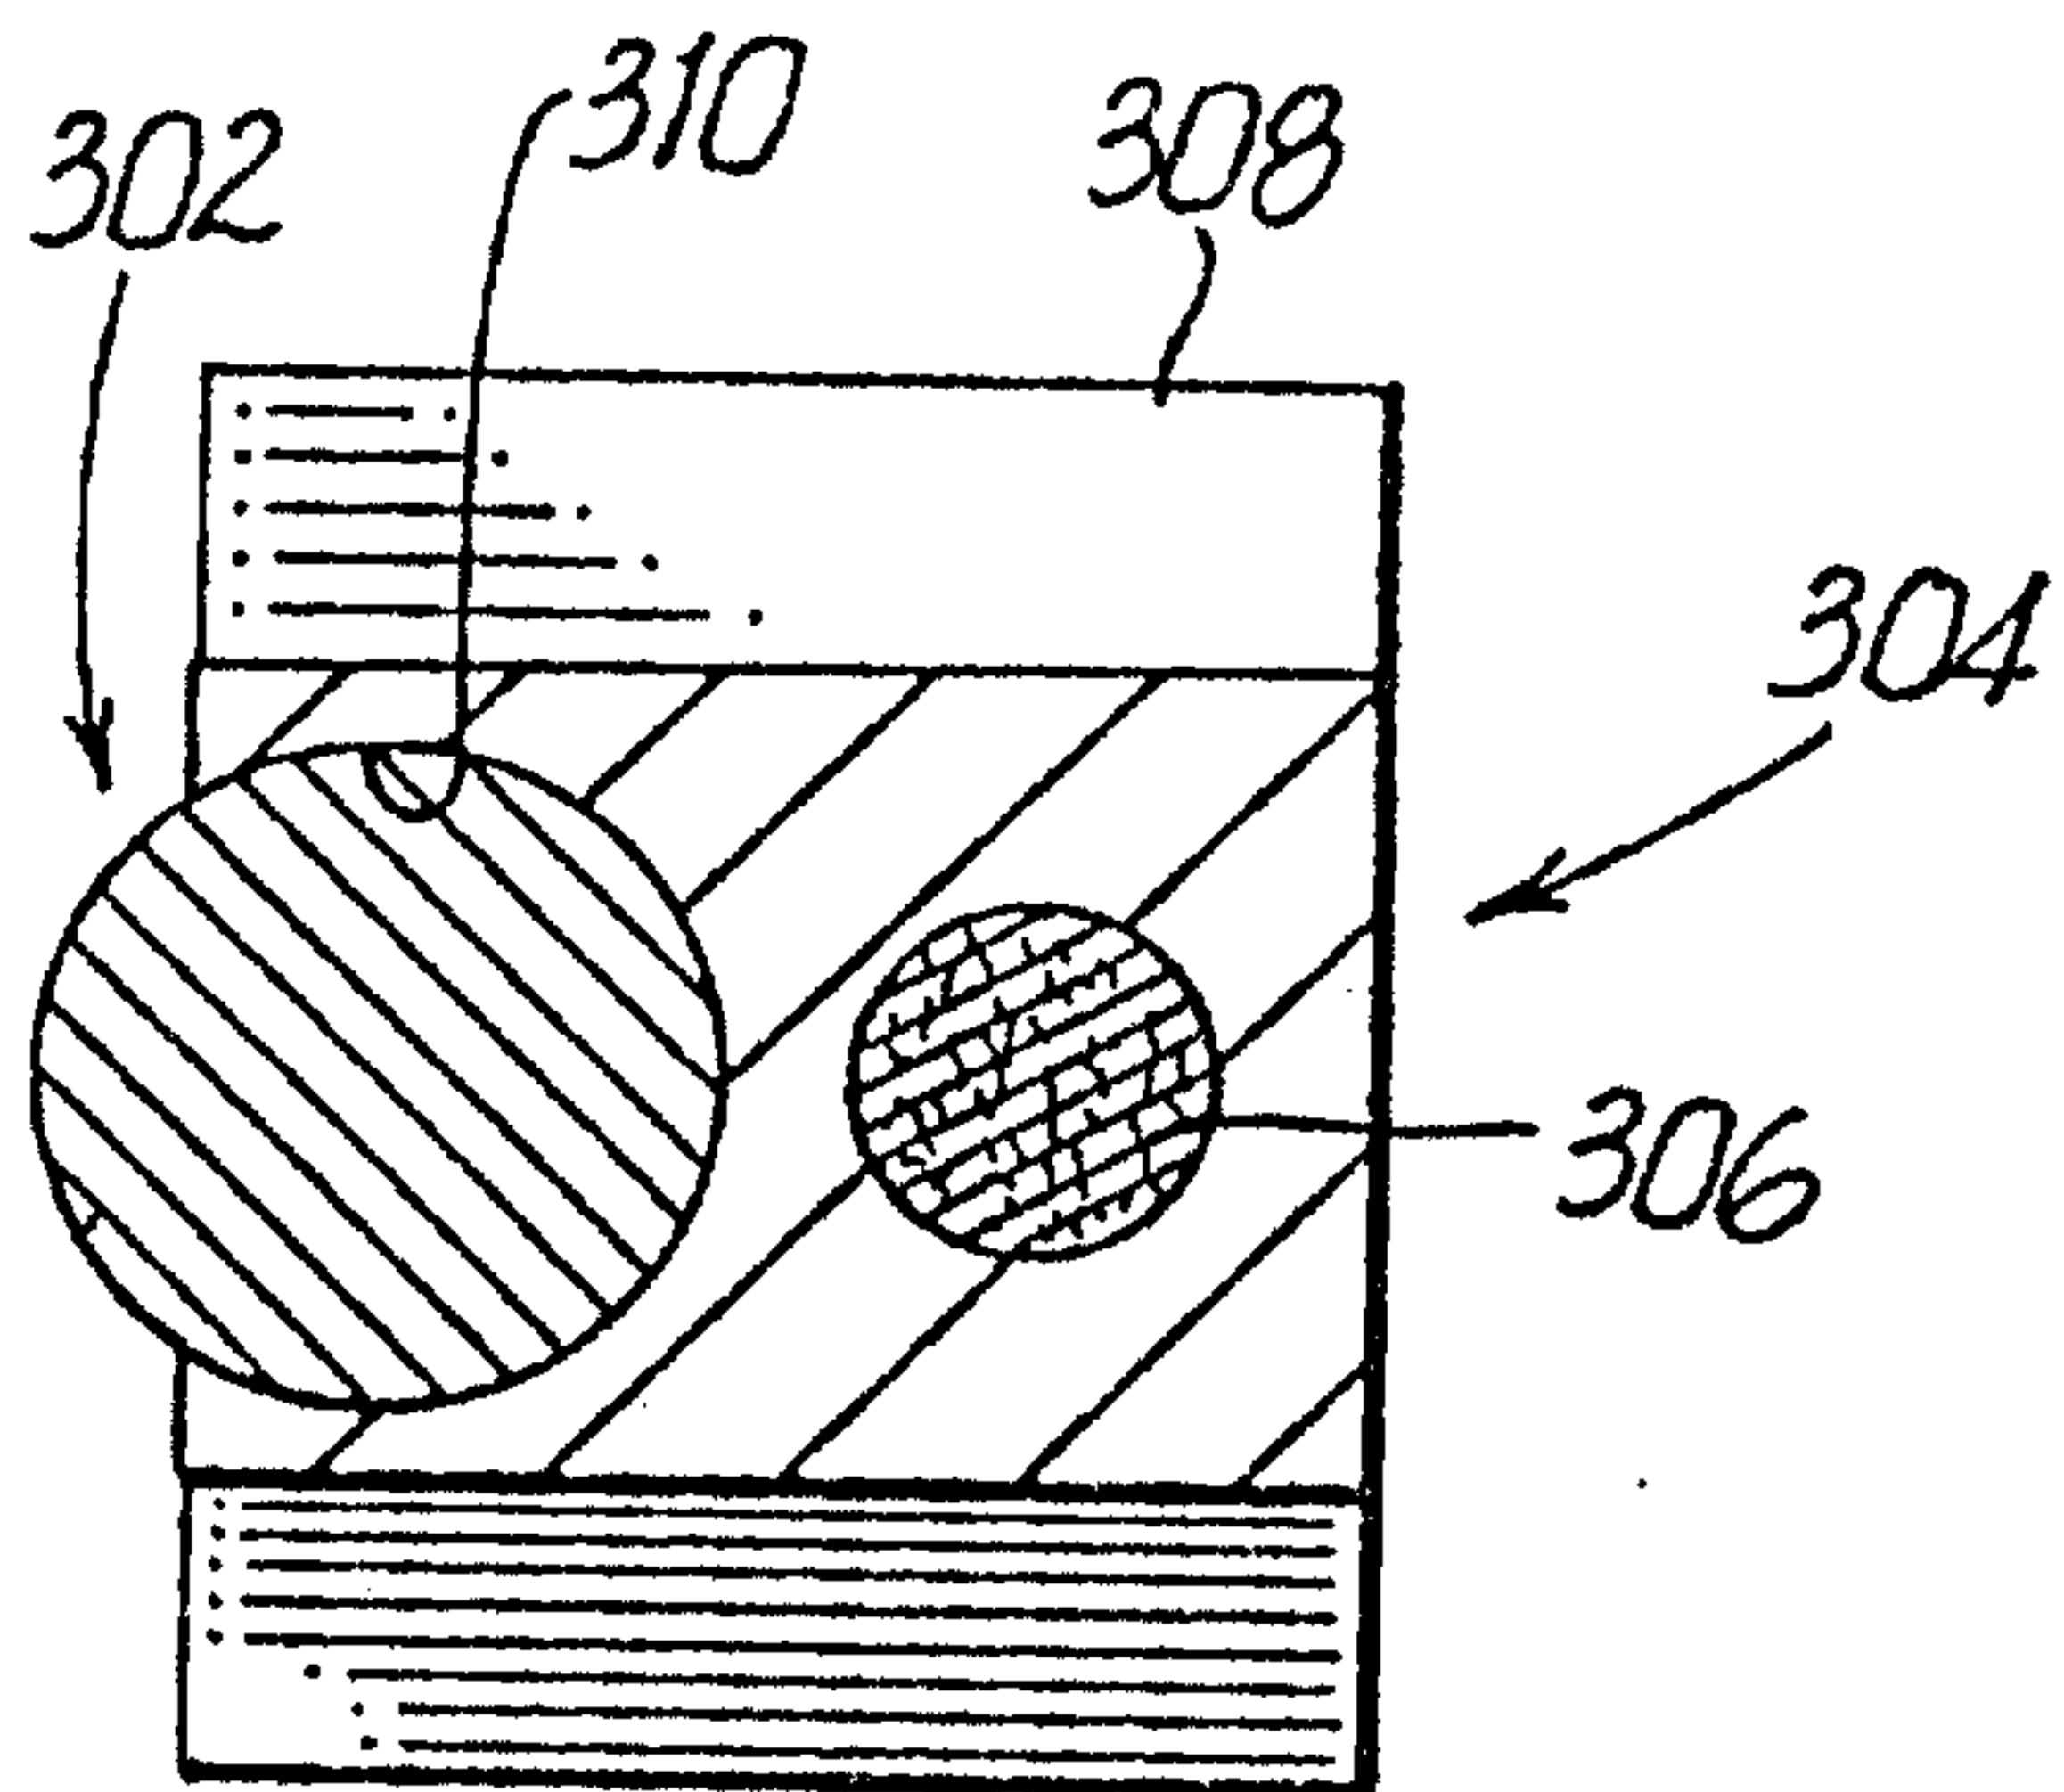


FIG. 21

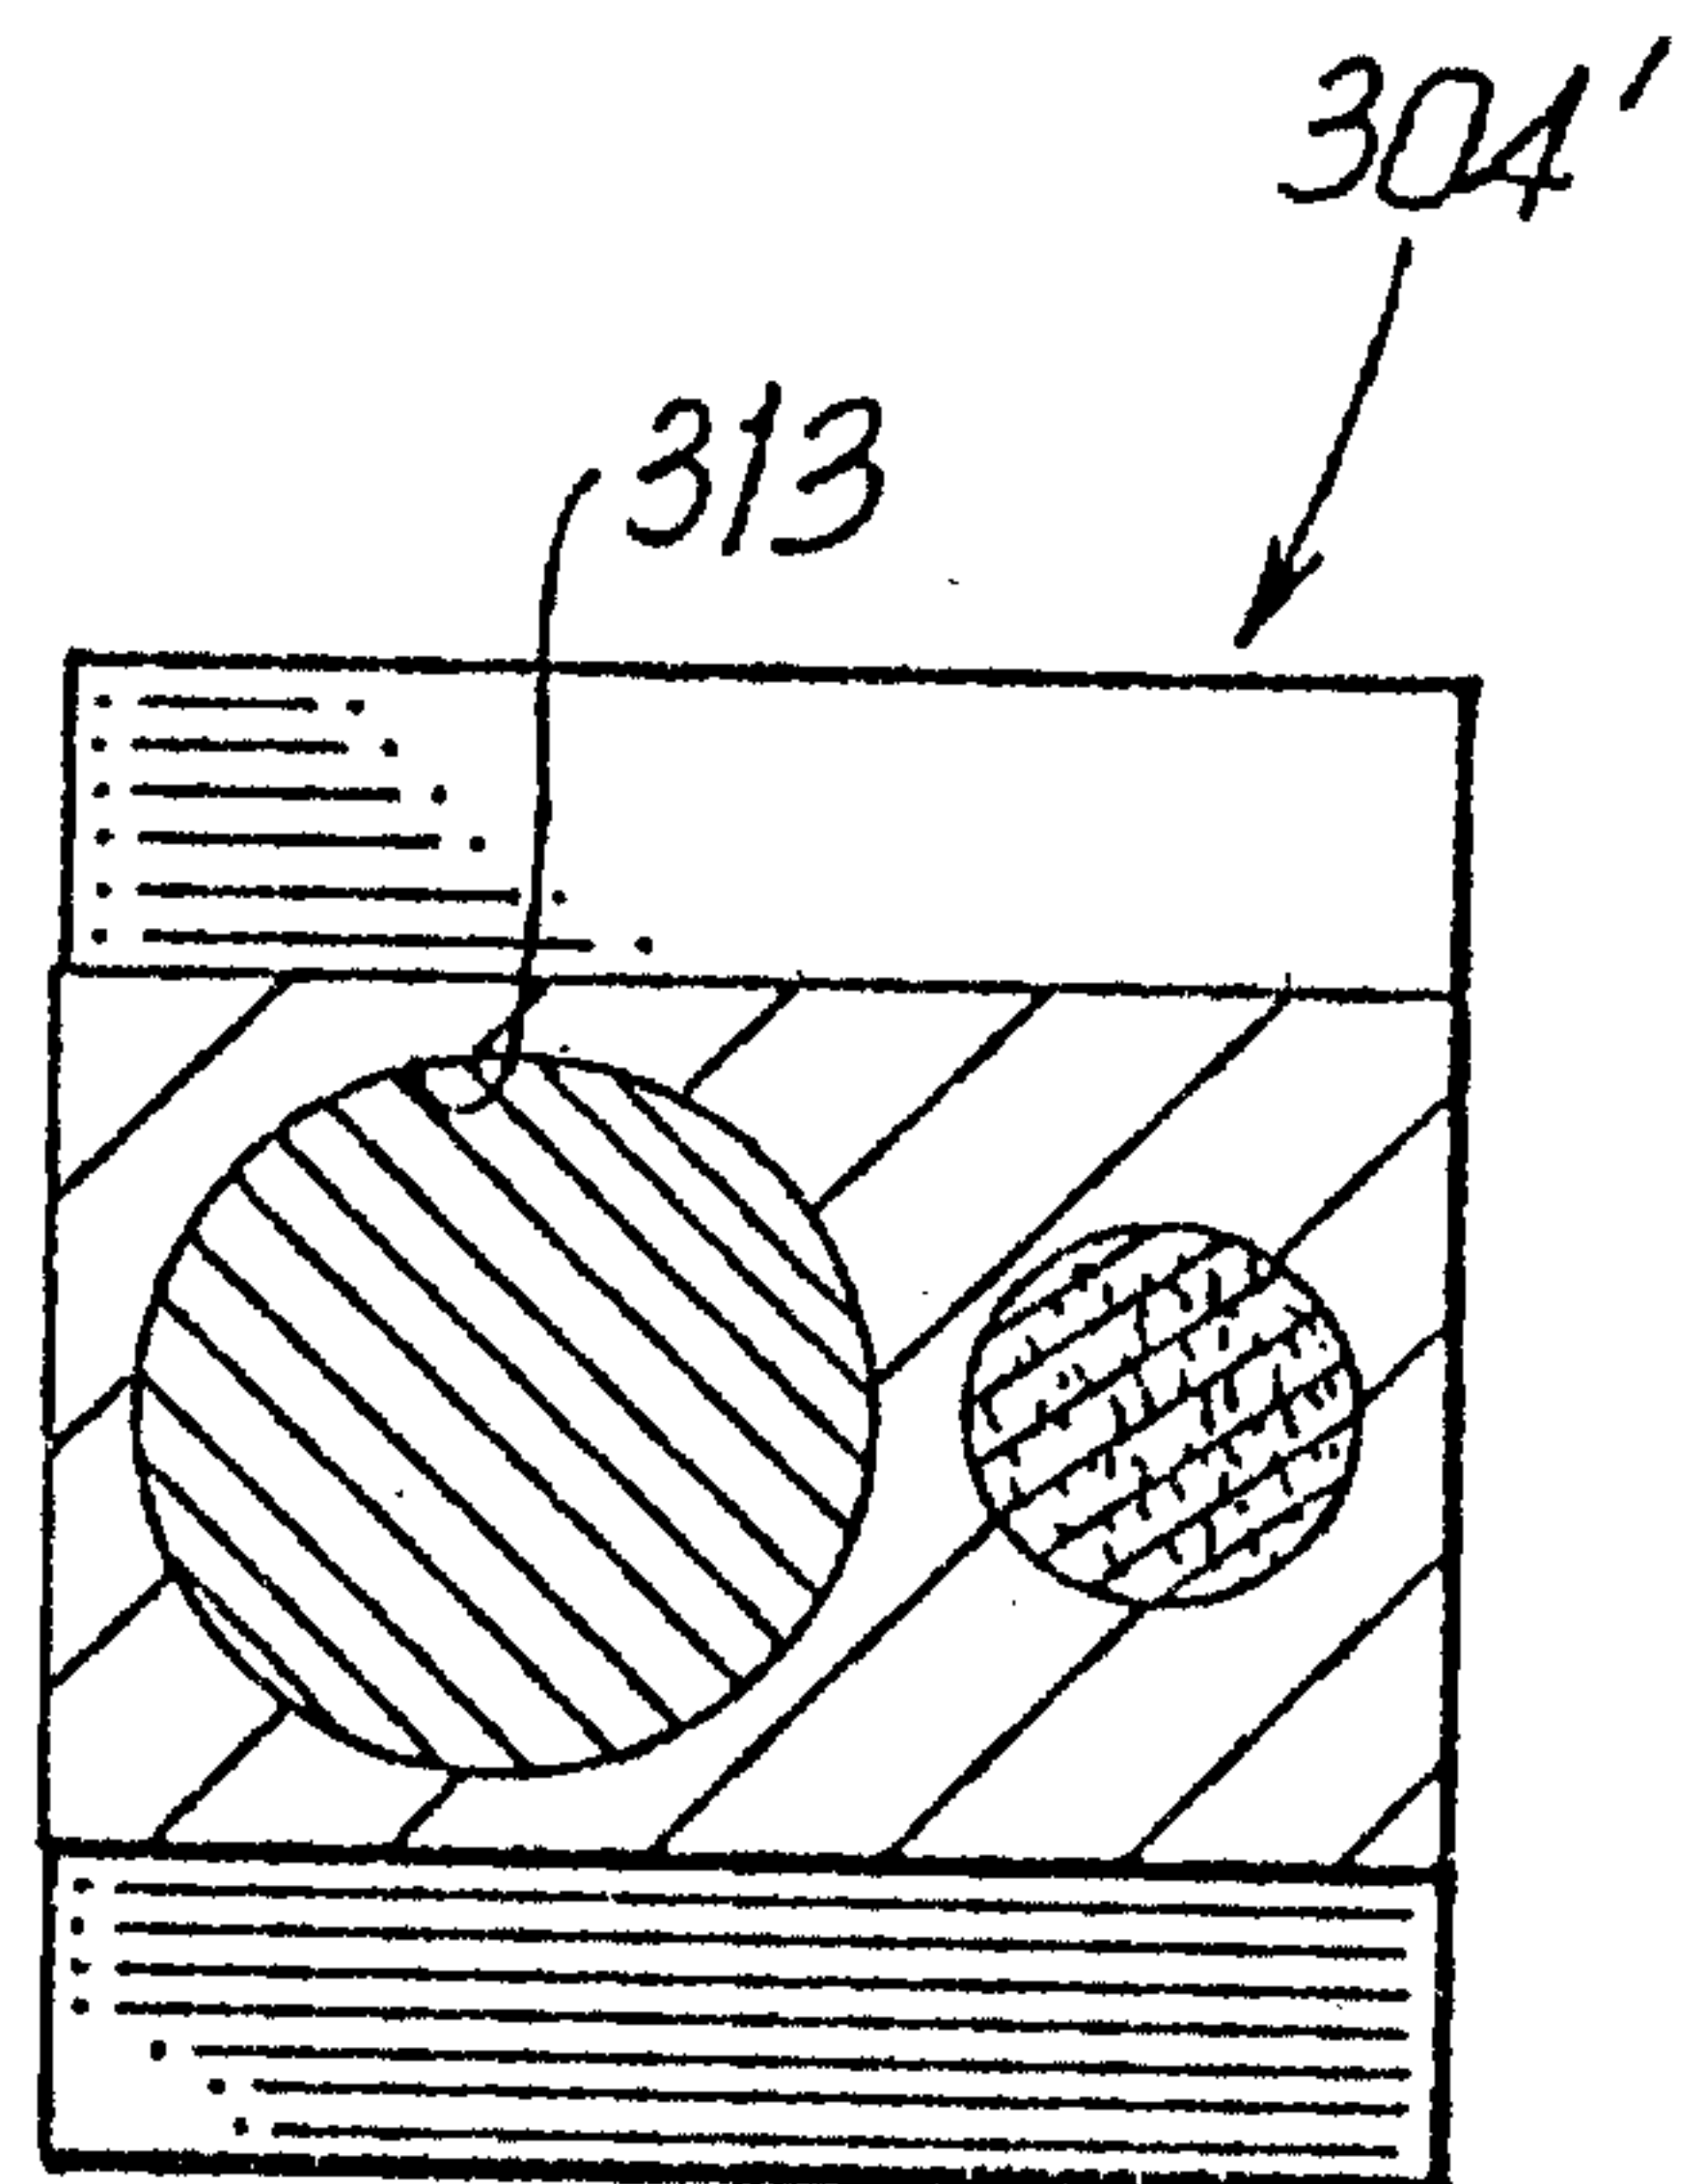


FIG. 22

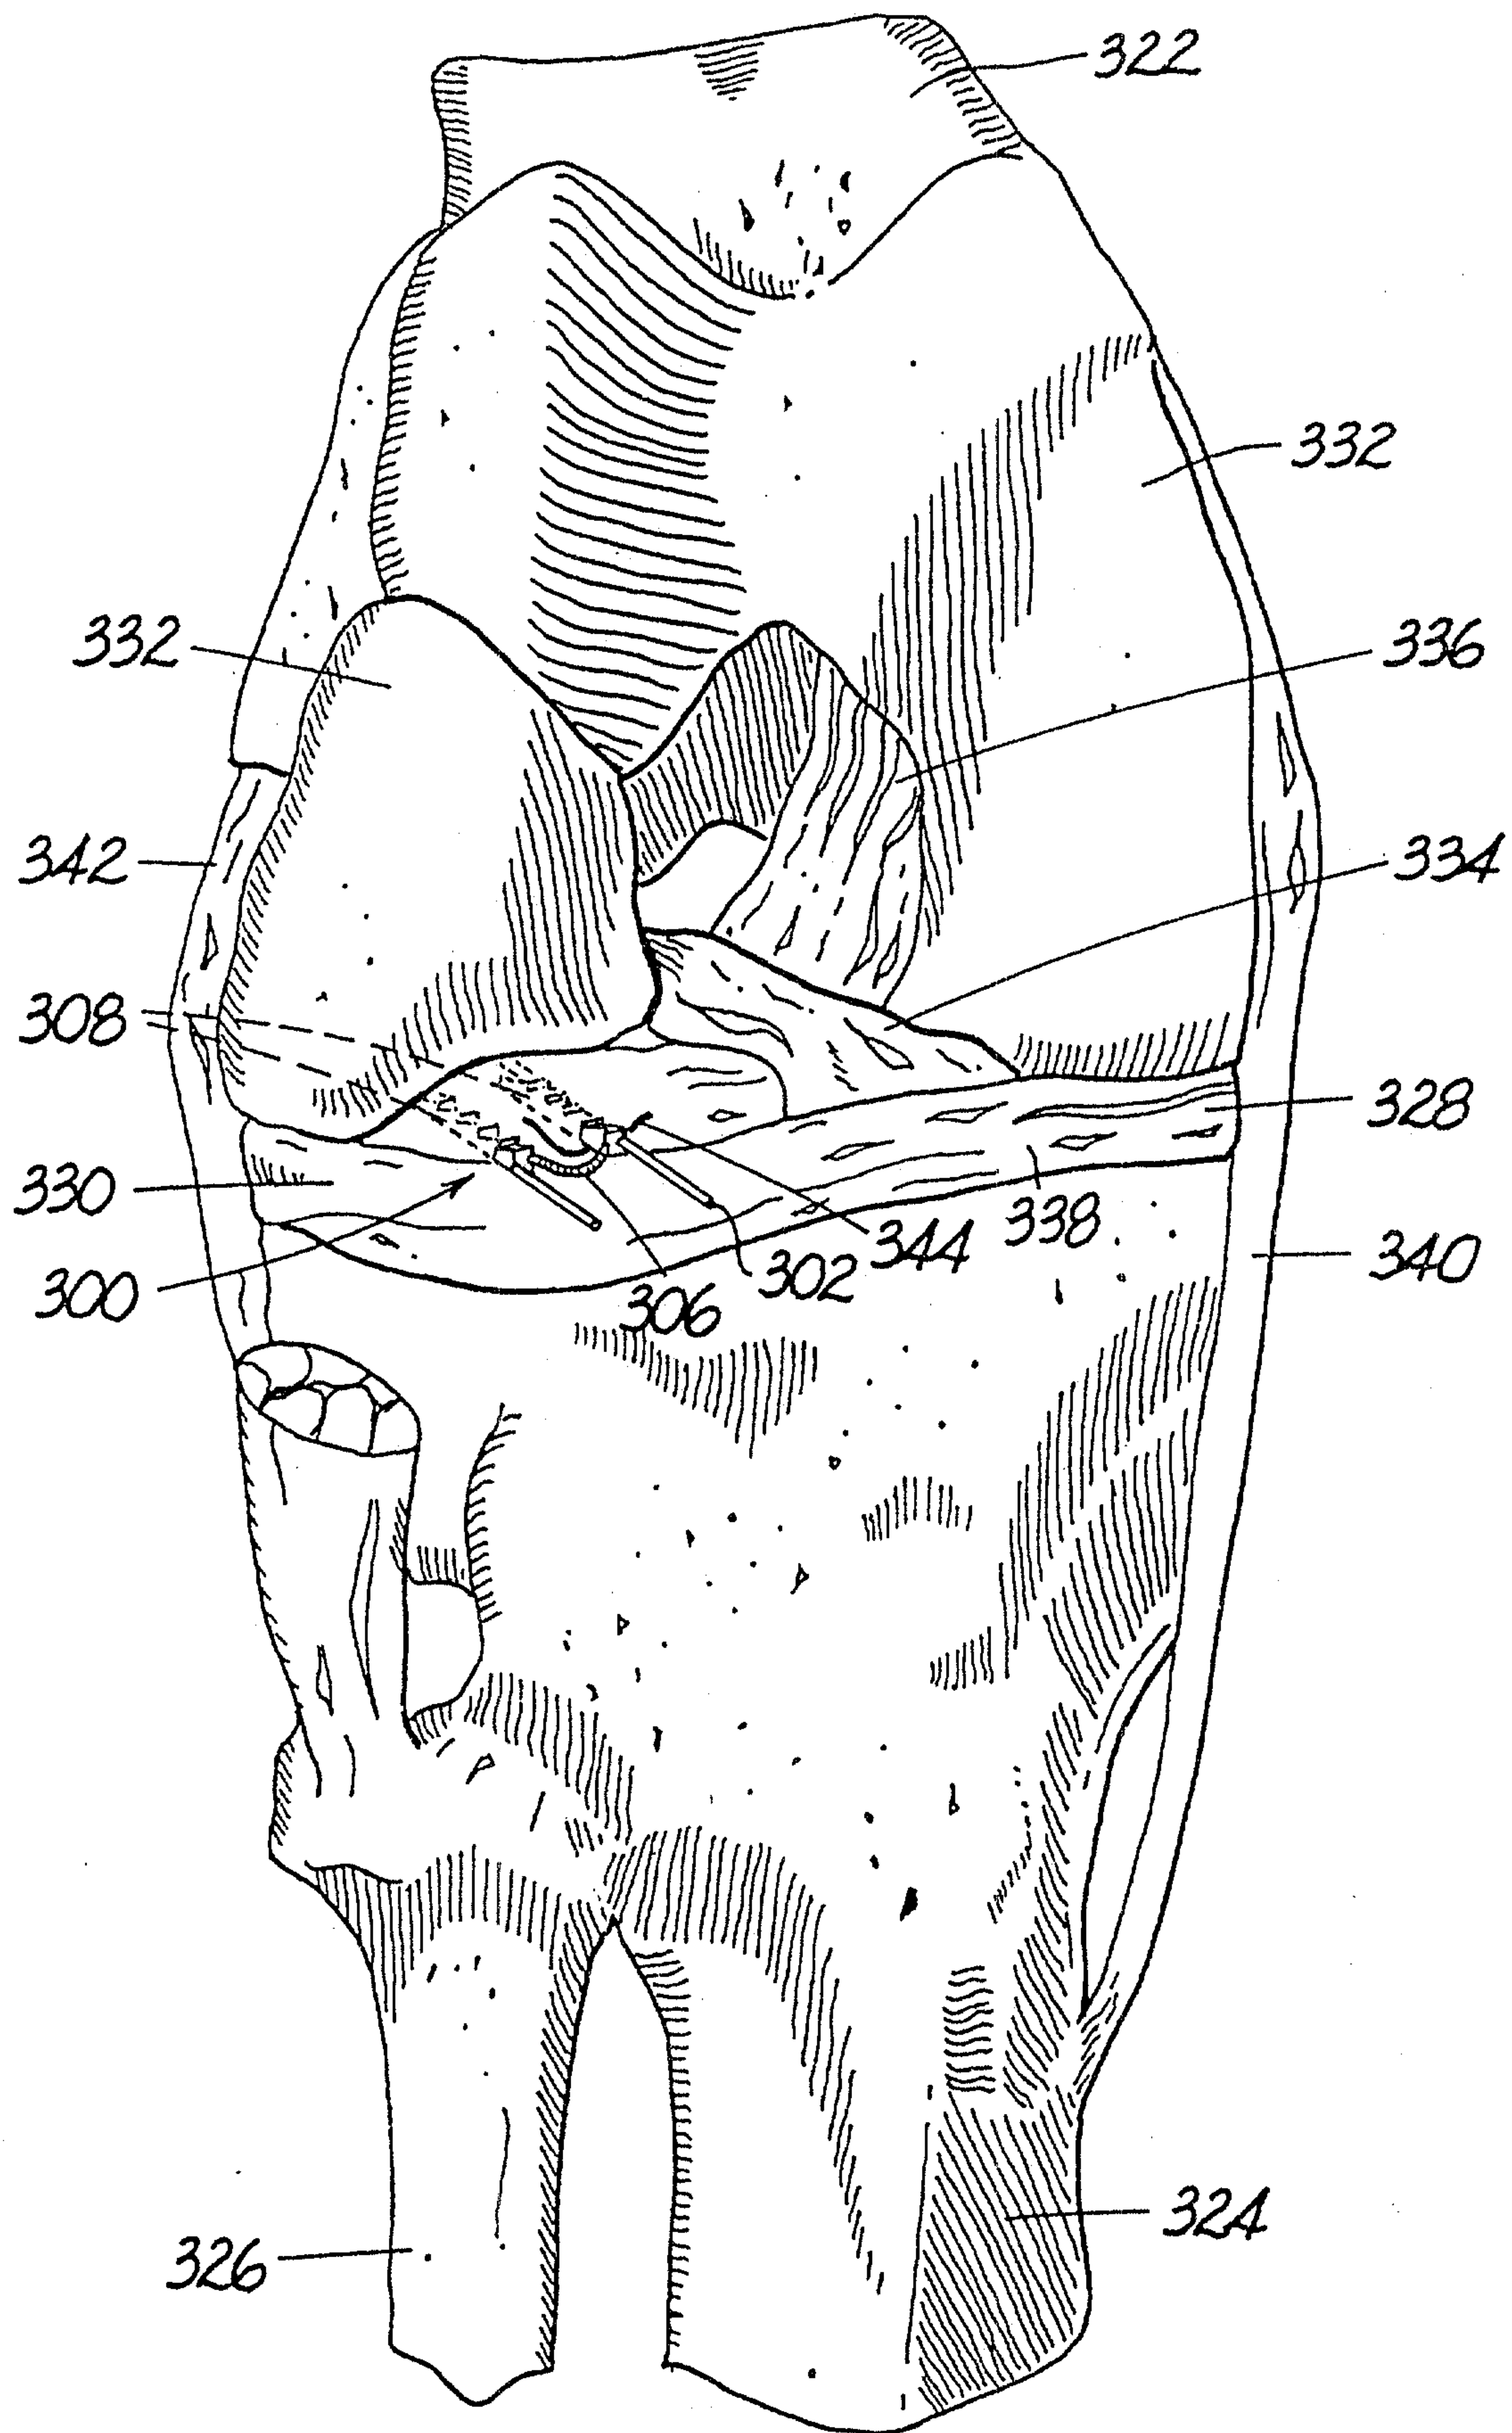
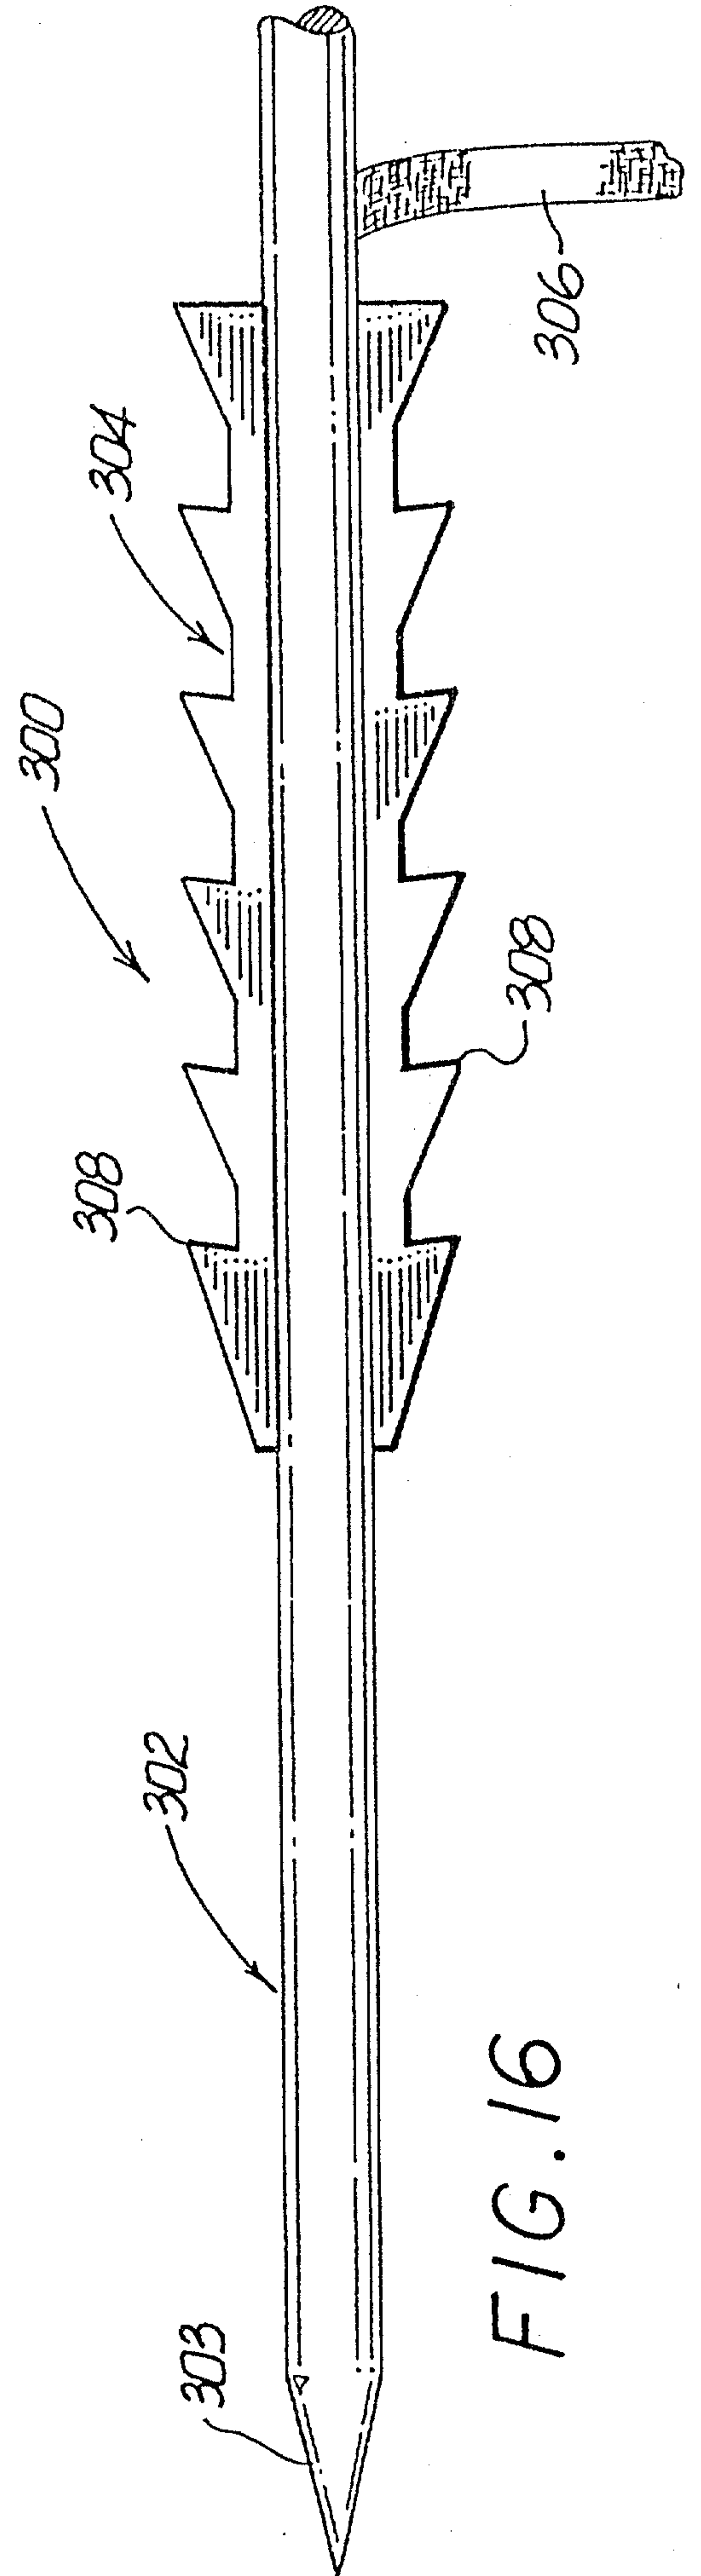
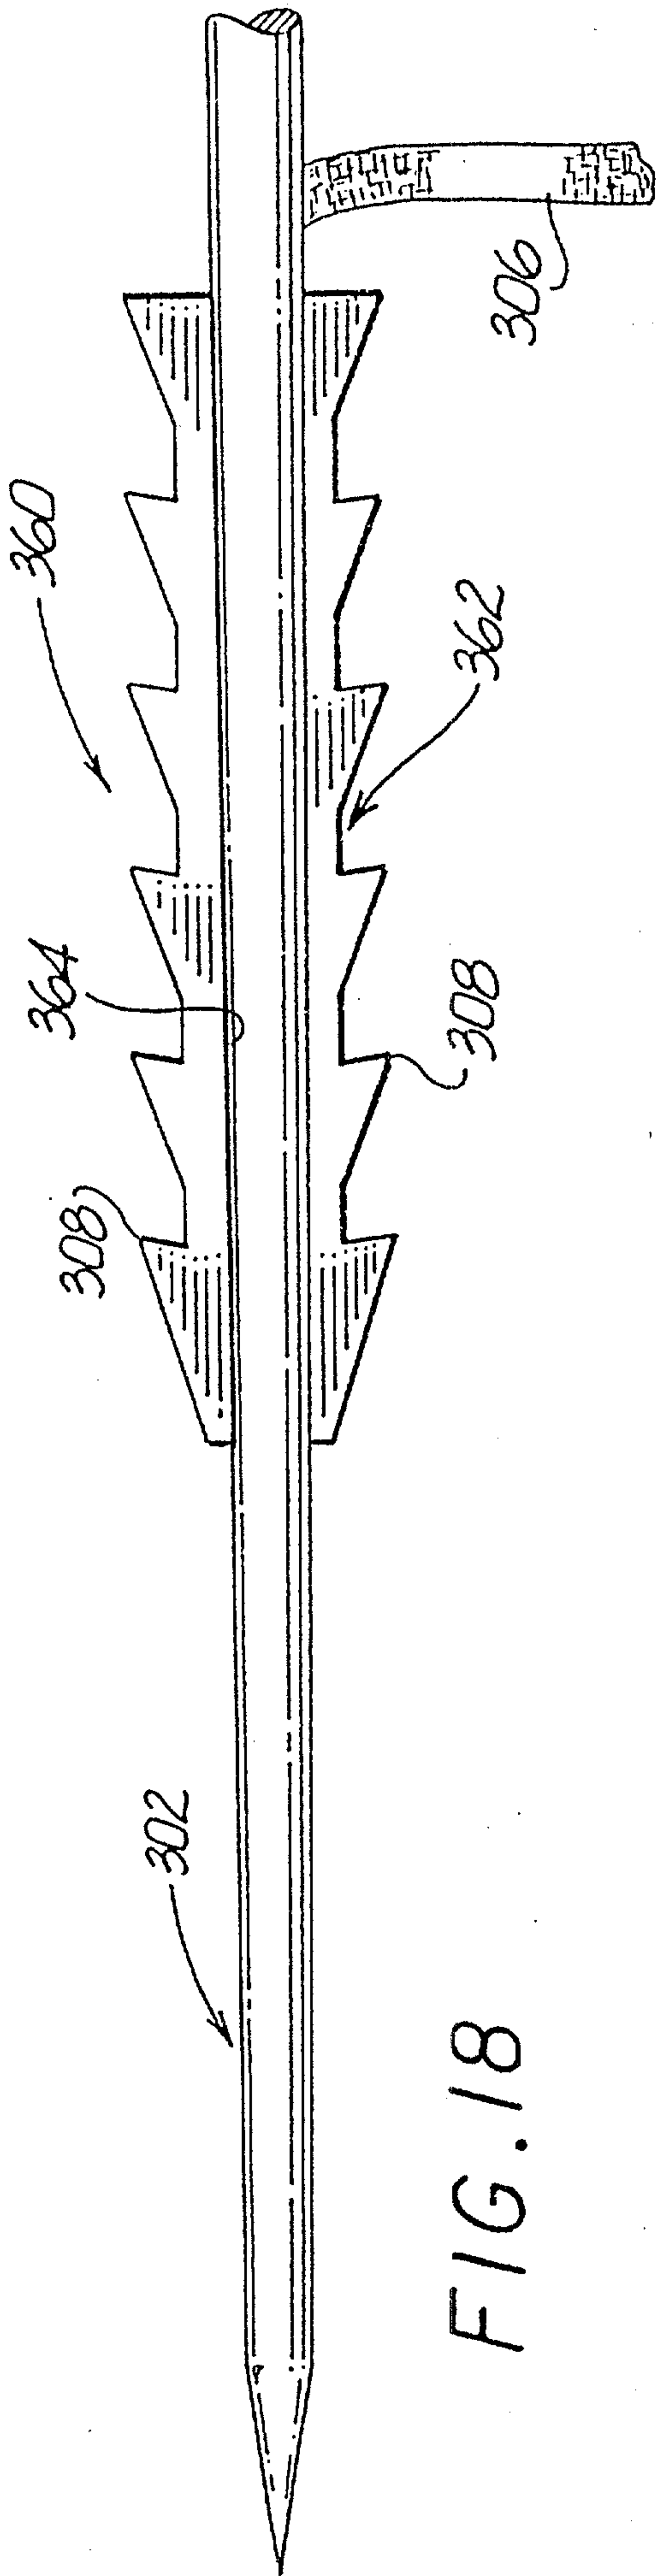


FIG. 14



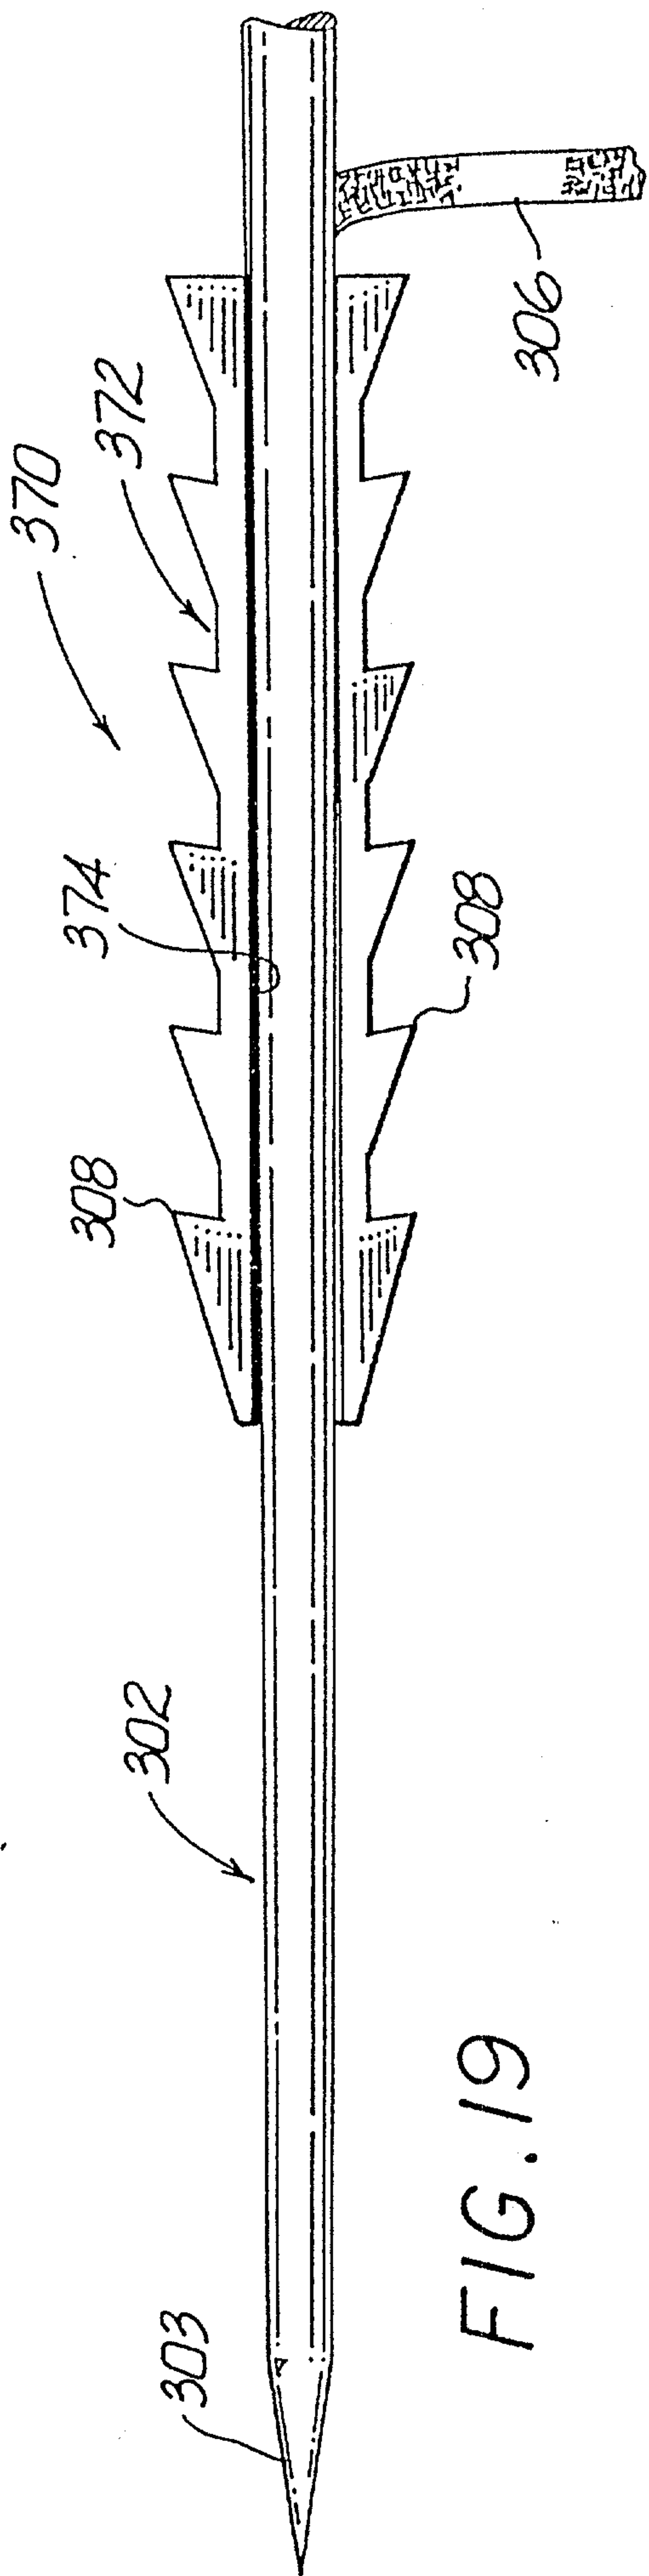


FIG. 19

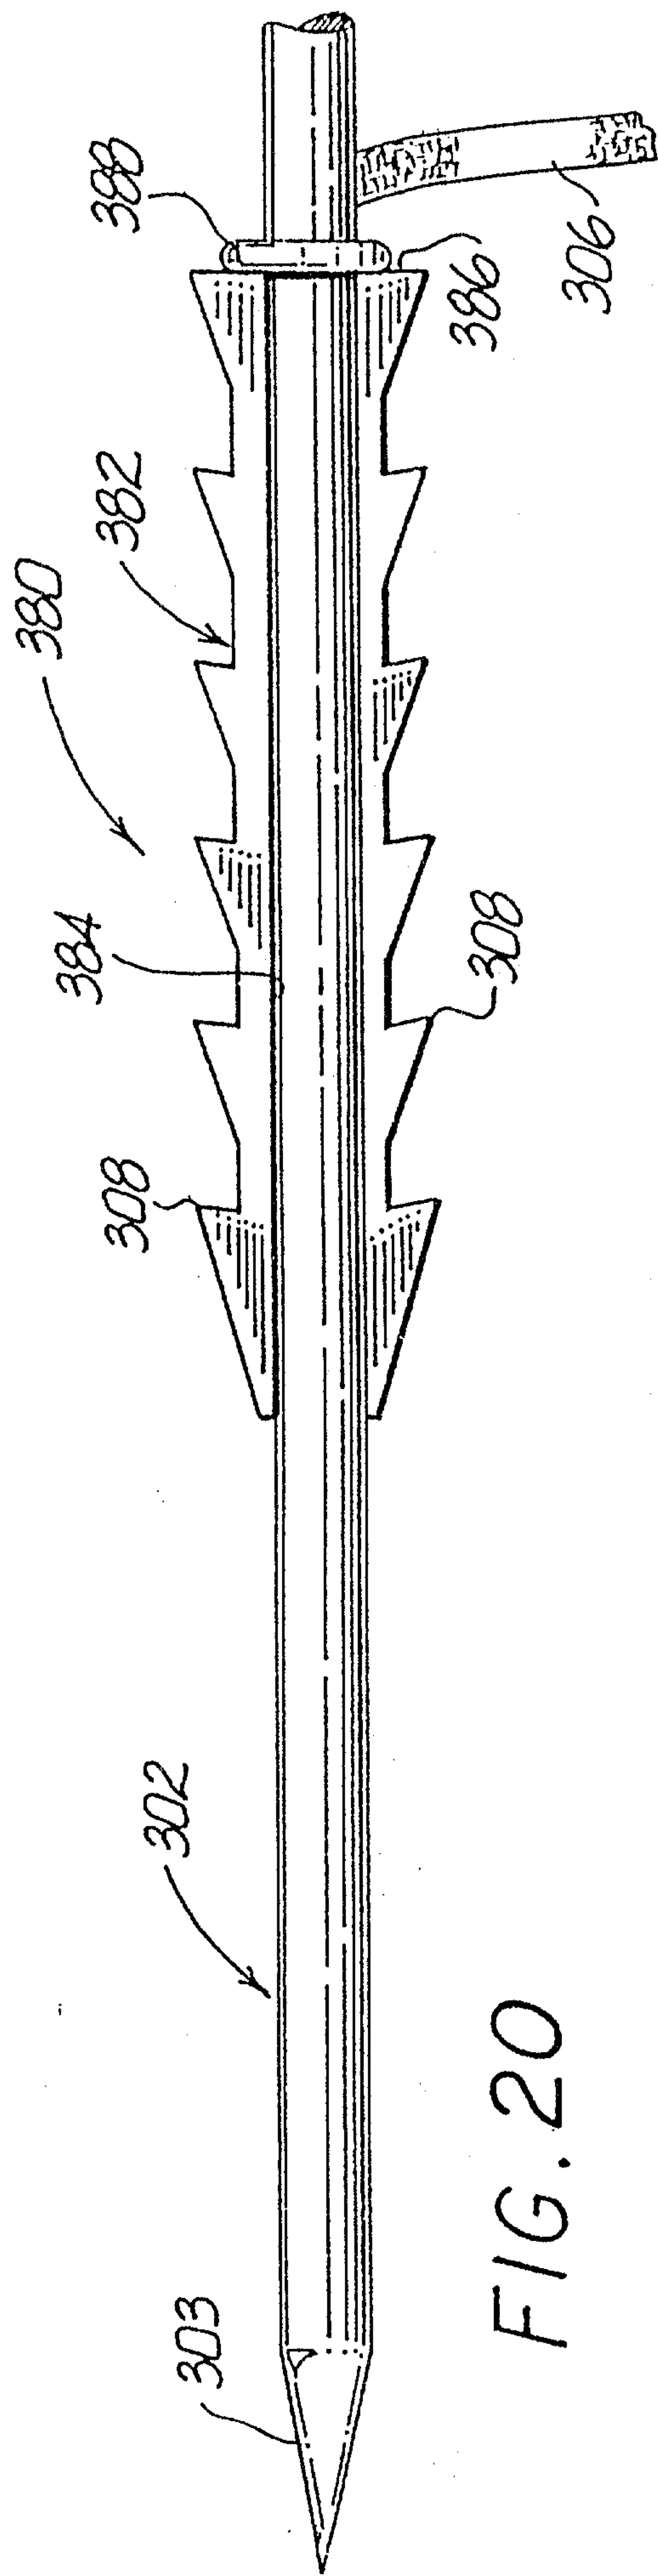


FIG. 20

