

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/095315 A2

(51) International Patent Classification⁷: **C07C 45/00**

(21) International Application Number:
PCT/EP2005/000948

(22) International Filing Date: 28 January 2005 (28.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/805,983 22 March 2004 (22.03.2004) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CAERS, Raphael, F.** [BE/BE]; Prins Boudewijnlaan 189, B-2650, Edegem, Belgium (BE). **VAN DRIESSE, Eddy** [BE/BE]; Kerkelmuut 8, B-9900 Eeklo (BE).

(74) Agent: **DEW, Melvyn, John**; ExxonMobil Chemical Europe Inc., P.O. Box 105, B-1830 Machelen (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: PROCESS FOR HYDROFORMYLATION OF PROPYLENE

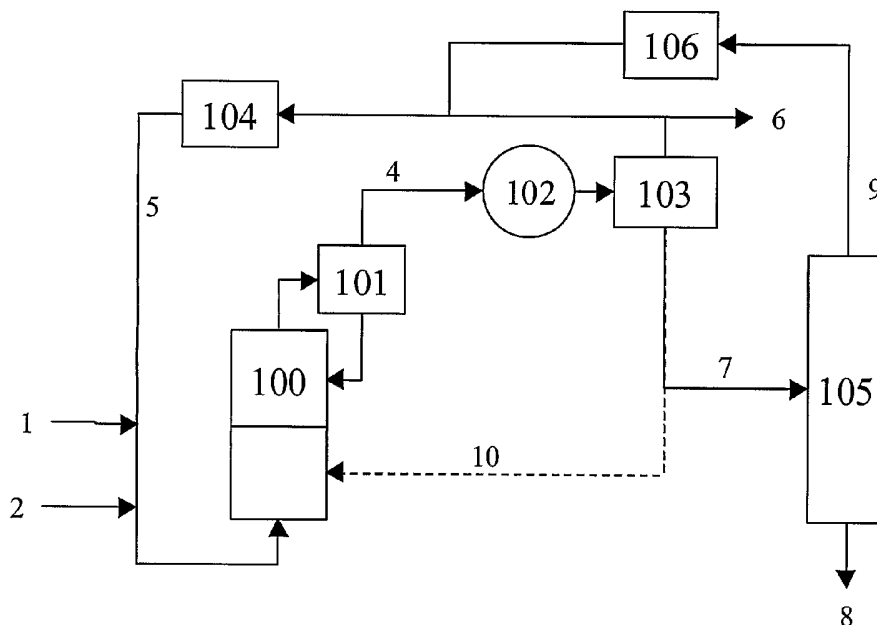

(57) Abstract: Increasing the propylene content of the propylene feed delivered to a continuous hydroformylation process from the 95 mole % maximum level that is usual in typical chemical grade propylene to at least 97 mole %, for example to the 97.5% level obtainable from the conversion of oxygenates to olefins or the 99.5% level of polymer grade propylene, enables adjustments to be made in the syngas feed to the process. This leads to surprising improvements in hydroformylation product yield, in reactor capacity utilization and in the reduction of amounts of waste gases.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PROCESS FOR HYDROFORMYLATION OF PROPYLENE

Field of the Invention

- 5 The present invention relates to improvements in or relating to the commercial scale hydroformylation of propylene to produce butyraldehyde and butanol.

Background of the Invention

- Processes for the hydroformylation of propylene to produce butyraldehyde and butanol are well known and are practised widely. They typically employ liganded
10 rhodium catalysed low pressure hydroformylation technology, sometimes known as the low pressure oxo (LPO) process, in which propylene is reacted with a mixture of carbon monoxide and hydrogen (known as syngas). Examples of the commercial operation of such a process are given in US-A-4,247,486 and in GB-
15 A-1,387,657.

- For economic reasons, the raw material used for such industrial scale processes has been chemical grade propylene, which contains about 90-95 wt% propylene, with the majority of the balance being propane. Industrial hydroformylation
20 processes are generally continuous processes which do not result in 100 % conversion of the propylene. The selectivity to desired products is also not 100%, and a small portion of the propylene is hydrogenated to propane. Accordingly, the products of the hydroformylation of chemical grade propylene include the target butyraldehyde and butanol streams and an off gas stream
25 containing unreacted propylene, propane and unreacted carbon monoxide and hydrogen.

- It is of course economically desirable that the unreacted propylene, carbon monoxide and hydrogen be recycled. However, in order for the continuous
30 hydroformylation process to operate successfully on an industrial scale, it is important to establish a steady state between the feed materials, including any recycle, and the degree of reaction. It is therefore important to prevent excessive

CONFIRMATION COPY

propane build up in the reaction system due to the recycle of the unreacted components. However, propane and propylene are difficult to separate and thus, in order to prevent propane build up due to the recycle, it is necessary to vent off some, if not all, of the propane. This removal of propane however also involves the removal of some propylene resulting in some inefficiencies and economic debits in the process.

The present invention is concerned with the conditions that enable benefits to be realised from the use of propylene feeds of higher purity. In particular the invention is concerned with the conditions that enable benefits to be realised from the use of a propylene feedstock containing at least 97 mole % propylene, especially a propylene feedstock known as polymer grade propylene.

DE-A-10035370 is concerned with an improved two reactor recycle hydroformylation system which reduces propylene losses. This recycle system is said to reduce propylene loss in the off gas. In the Example, polymer grade propylene which contains about 99.5 wt % propylene, the 0.5 wt % balance being propane, is used as the feedstock for low pressure, rhodium catalysed, hydroformylation.

The production of hydroformylated products from an olefin stream made by thermal or catalytic cracking or by dehydrogenation processes can be negatively impacted as a result of undesirable by-products coming into contact with hydroformylation catalysts. Such by-products can cause reduced efficiency in the recovery of useful hydroformylation products or can cause the formation of lower quality derivative products.

Removal of undesirable by-products from an olefin stream can be quite difficult. For example the removal of sulphur, nitrogen and chlorine from cracked hydrocarbon streams, or the removal of dimethyl ether (DME) from C4 or C5 raffinate recovered from a methyl tertiary butyl ether (MTBE) or a tertiary amyl methyl ether (TAME) unit, can require a significant amount of olefin feed

pretreatment. It is, therefore, also desirable to find methods of hydroformylating olefin compositions which do not require extensive pretreatment of the olefin feed to remove contaminants.

5 Summary of the Invention

According to the present invention there is provided a continuous process for the hydroformylation of propylene comprising feeding (i) a propylene stream at a rate of at least 3 tonnes per hour, and (ii) synthesis gas comprising hydrogen and carbon monoxide, to a hydroformylation reactor in which the propylene is hydroformylated over a rhodium containing catalyst, characterised in that (a) the propylene stream contains at least 97 mole % of propylene; (b) the molar ratio of ($H_2 + CO$) contained in the fresh synthesis gas fed to the process, to the propylene contained in the fresh propylene stream fed to the process, is greater than 1.93; and (c) in the synthesis gas feed, the hydrogen is present in molar excess over the amount of carbon monoxide.

By "tonnes" is meant metric tonnes, so 3 tonnes per hour is 3000 kg per hour - in other words, an industrial scale process. Of course, the feed rate is that applicable during normal operation of the process. Shut down of the process for maintenance and other reasons may occur without impacting the scope of the invention.

The term synthesis gas is sometimes abbreviated herein, in accordance with conventional practice, to syngas. Syngas primarily comprises hydrogen and carbon monoxide, but it may contain a few mole % of other components such as methane and/or carbon dioxide.

Detailed Description of the Invention

The ratio of ($H_2 + CO$)/propylene as specified above relates to fresh reaction components introduced into the process. The actual ratio of such components present in the hydroformylation reactor may be different due to the concentration-changing effects of recycle and of gas venting from the system. Preferably the said ratio is greater than 1.935, more preferably greater than 1.94. The preferred

maximum value for the ratio is 2.10, with progressively preferred maxima being, in order, 2.05, 2.00, 1.98, 1.97, 1.96 and 1.95. Ranges for said ratio between any of the stated minimum or preferred minimum values and any of the stated preferred maximum values are, therefore, countenanced for use in performance of
5 the invention.

Hydroformylation is desirably carried out at a temperature of from about 40 to about 200°C, more desirably from about 80 to about 180°C, and preferably from about 90 to about 155°C.

10

The reaction is also desirably carried out at a low pressure, e.g., a pressure of about 0.05 to about 10 MPa (absolute), preferably about 0.1 to about 6 MPaa, more preferably below 5 MPaa, yet more preferably below 3.5 MPaa, and most preferably below about 2.5 MPaa. It is particularly preferred that the carbon
15 monoxide partial pressure be not greater than about 50% of the total pressure. The proportions of carbon monoxide and hydrogen present in the fresh syngas used in the hydroformylation (also known as oxo) reactor that is operating at the foregoing pressures are desirably maintained as follows: CO from about 1 to about 50 mol %, preferably about 1 to about 35 mol %; and H₂ from about 1 to about 98
20 mol %, preferably about 10 to about 90 mol %. The hydrogen should, however, be present in an amount which is in a molar excess over the amount of the carbon monoxide.

The residence time in the reactor may be, for example, as short as 10 or 20
25 seconds; or it may be, for example, as long as up to 4 hours. If a plurality of reactors is employed, the residence time may be, for example, as short as 10 to 15 seconds. Otherwise a preferred residence time is in the range of from about 30 seconds to about 5 minutes.

30 The preferred hydroformylation conditions that are employed convert substantially all the propylene during the hydroformylation reaction. We prefer to use rhodium catalysed hydroformylation at low pressures, because of the lower

investment costs for the equipment, and the lower operating costs, for example for gas compression. However, it is desirable to keep up the hydrogen to carbon monoxide ratio during the hydroformylation reaction, and so it may be necessary to increase the hydrogen partial pressure; accordingly a higher overall pressure may be used. For targeting a higher selectivity to the n-butyraldehyde as compared to the isobutyraldehyde product from propylene hydroformylation, the partial pressure of CO in the reactor itself is preferably kept low, at least lower than the hydrogen partial pressure, but preferably lower than 0.5 MPaa, more preferably below 0.2 MPaa.

10

In a further embodiment of the invention the propylene feed stream that contains at least 97 mole% of propylene contains less than 500 ppb by weight of each of sulphur, nitrogen and chlorine, on an atomic weight basis. In a yet further embodiment the stream may contain more than 100 ppb by weight of dimethyl ether. The balance of the stream is generally primarily propane. Preferably, the stream contains less than 200 ppb, more preferably less than 150 ppb, most preferably less than 100 ppb, and particularly preferably less than 50 ppb, by weight, of each of sulphur, nitrogen and chlorine. In a much preferred embodiment, the propylene stream contains an aggregate total of sulphur, nitrogen and chlorine combined, on an atomic weight basis, of less than 100 ppb, more preferably less than 20 ppb, and most preferably less than 5 ppb.

The sulphur content of the propylene feed used in this invention, particularly as mercaptans but especially as carbonyl sulphide, is desirably sufficiently low that the activity of the catalyst used to form the hydroformylated product is not substantially inhibited. Ideally, the sulphur content in the propylene feed is not greater than about 1 ppm by weight on an atomic basis; progressively more preferably not greater than about 500 ppb, not greater than about 100 ppb, not greater than about 50 ppb, not greater than about 20 ppb, not greater than about 10 ppb, not greater than about 5 ppb, and most preferably, not greater than about 2 ppb by weight, calculated on an atomic basis.

30

The reactive nitrogen content of the propylene feed used in this invention, excluding N₂ but including reactive species like ammonia and amines, and particularly such highly reactive species like nitriles or other cyano compounds, are also desirably sufficiently low that the catalytic activity of the catalyst used to form the hydroformylated product is not substantially inhibited. Preferably, the active nitrogen content in the propylene feed is not greater than about 10 ppm; more preferably, not greater than about 5 ppm; and most preferably, not greater than about 2 ppm by weight, calculated on an atomic basis. More preferably, the active nitrogen content of the stream is not greater than about 1 ppm by weight on an atomic basis; progressively more preferably not greater than about 500 ppb, not greater than about 100 ppb, not greater than about 50 ppb, not greater than about 20 ppb, not greater than about 10 ppb, not greater than about 5 ppb, and most preferably, not greater than about 2 ppb by weight, calculated on an atomic basis. Ammonia itself may not have such a large effect on the catalytic activity of the catalyst, and may be tolerated in significantly higher amounts than nitriles or cyano compounds.

The chlorine content of the propylene feed used in this invention, in particular the ionic chlorine, is also desirably sufficiently low that the catalytic activity of the catalyst used to form the hydroformylated product is not substantially inhibited. Preferably, the chlorine content in the olefin feed is not greater than about 5 ppm; more preferably, not greater than about 2 ppm; and most preferably, not greater than about 1 ppm by weight, calculated on an atomic basis. More preferably, the ionic chlorine content of the stream is not greater than about 1 ppm by weight on an atomic basis; progressively more preferably not greater than about 500 ppb, not greater than about 100 ppb, not greater than about 50 ppb, not greater than about 20 ppb, not greater than about 10 ppb, not greater than about 5 ppb, and most preferably, not greater than about 2 ppb by weight, calculated on an atomic basis. Alkyl chlorides may not have such a large effect on the catalytic activity of the catalyst, and may be tolerated in significantly higher amounts than ionic chlorine.

We have found that the propylene containing stream used as feed according to the invention may contain a non-toxic amount of dimethyl ether. This means that dimethyl ether may be present in the stream delivered to the reactor, which provides the advantage that feed treatment for dimethyl ether removal is not
5 necessary. However, excessive quantities are not desirable from the practical standpoint that in such cases, reactor volume is inefficiently utilized. A propylene stream containing for example up to about 5000 ppm by weight is highly acceptable. The lower the quantity of dimethyl ether, the greater the desirability from a hydroformylation operation standpoint. Feeds containing dimethyl ether at
10 levels of up to about 4000 ppm by weight, up to about 3000 ppm by weight, up to about 2000 ppm by weight, up to about 1000 ppm by weight, up to about 500 ppm by weight or up to about 250 ppm by weight, may be used according to the invention.

15 We have found that the rhodium hydroformylation catalysts which are used in this invention are tolerant to the presence of such amounts of dimethyl ether. Suitable rhodium catalysts or catalyst precursors which can be used in this invention include rhodium(II) and rhodium(III) salts such as rhodium(III) chloride, rhodium(III) nitrate, rhodium(III) sulphate, potassium rhodium sulphate (rhodium
20 alum), rhodium(II) or rhodium(III) carboxylate, preferably rhodium(II) and rhodium(III) acetate, rhodium(III) oxide, salts of rhodic(III) acid, triammonium hexachlororhodate (III).

In one embodiment of the invention, hydroformylation is carried out using an oil-
25 soluble rhodium complex comprising a low valence rhodium (Rh) complexed both with carbon monoxide and a triorganophosphorus compound. The triorganophosphorus compound can include one or more oil-soluble triarylphosphines, trialkylphosphines, alkyl-diaryl-phosphines, aryl-dialkylphosphines, triorganophosphites, particularly trialkylphosphites and
30 triarylphosphites (in which list alkyl includes cycloalkyl), containing one or more phosphorus atoms per molecule capable of complexing with Rh by virtue of having a lone pair of electrons on the phosphorus.

In another embodiment, triorganophosphorus ligands can be used which preferably have (a) a molar P:Rh ratio of at least about 2:1, (b) a total concentration of phosphorus of at least about 0.01 mol/l; and (c) a [P]/P_{CO} ratio maintained in the reactor of at least about 0.1 mmol/l/kPa, where [P] is the total concentration of the phosphorus in solution, expressed in mmol per litre, and P_{CO} is the partial pressure of carbon monoxide in the gas phase, expressed in kPa.


Examples of triorganophosphorus ligands include trioctylphosphine, tricyclohexylphosphine, octyldiphenylphosphine, cyclohexyldiphenylphosphine, phenyldioctylphosphine, phenyldicyclohexylphosphine, triphenylphosphine, tri-p-tolylphosphine, trinaphthylphosphine, phenyl-dinaphthylphosphine, diphenylnaphthylphosphine, tri-(p-methoxyphenyl)phosphine, tri-(p-cyanophenyl)phosphine, tri-(p-nitrophenyl)phosphine, and p-N,N-dimethylaminophenyl(diphenyl)phosphine, trioctylphosphite or tri-p-tolylphosphite. An example of a bidentate compound which can be used is diphos- bis(diphenylphosphino)ethane.

Preferably, Rh concentration in the reaction mixture is in a range of from about 1×10^{-5} to about 1×10^{-2} moles/litre or, in effect, in a range of from about 1 to about 1000 ppm or about 10 to 1000 ppm, preferably about 20 to about 500 ppm, more preferably from 25 to 350 ppm of rhodium, based on the total weight of the solution present in the reactor.

Organophosphite ligands can also be used for example those disclosed in United States Patents 4,599,206, 4,668,651, 4,737,588, 4,748,261, 4,769,498, 4,774,361, 4,789,753, 4,835,299, 4,871,880, 4,885,401, 5,179,055, 5,288,918, 5,312,996, 5,364,950, 5,681,473, 5,756,855 and WO 97/20793. Preferred is 6,6'-[[3,3',5,5'-tetrakis (1,1-dimethylethyl)-1,1'-biphenyl-2,2'-diyl] bis (oxy)] bis-dibenzo [d,f] [1,3,2]-dioxaphosphopin, or 6,6'-[[3,3',5,5'-tetrakis (1,1-dimethylpropyl)-1,1'-biphenyl-2,2'-diyl] bis (oxy)] bis-dibenzo [d,f] [1,3,2]-dioxaphosphopin, or 6,6'-[[3,3'-bis (1,1-dimethylethyl)-5,5'-dimethoxy [1,1'-biphenyl]-2,2'-diyl] bis (oxy)]

bis-dibenzo [d,f] [1,3,2]-dioxaphosphepin, or tris(2,4,6-di-t-butylphenyl)-phosphite. Most preferred is 6,6'-[[3,3',5,5'-tetrakis (1,1-dimethylethyl)-1,1'-biphenyl-2,2'-diyl] bis (oxy)] bis-dibenzo [d,f] [1,3,2]-dioxaphosphepin. Ionic varieties of such phosphites are disclosed in United States Patents 5,059,710 and
 5 5,113,022.

More recently bisphosphite ligands, e.g. of the formula

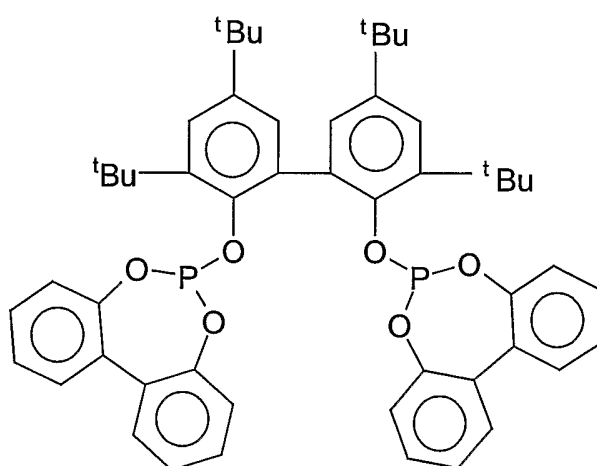

10

have been developed and these are described in United States Patents 5,364,950, 4,835,299 and 5,288,918.

The hydroformylation process may generally be carried out in a manner known by
 15 persons skilled in the art, for example by the process according to United States Patents 4,247,486, 4,287,370, 5,053,551, 6,100,432, WO 02/00582 or DE 10128325 although higher temperatures and/or carbon monoxide partial pressures may be used.

20 The catalyst is desirably contacted with the propylene feed stream in solution. The solution can comprise an oily solvent or a mixture of such solvents. For example, aliphatic and aromatic hydrocarbons (e.g., heptanes, cyclohexane, toluene), esters (e.g., dioctyl phthalate), ethers, and polyethers (e.g., tetrahydrofuran, and tetraglyme), aldehydes (e.g., propanal, butanal) the

condensation products of the oxo product aldehydes or the triorganophosphorus ligand itself (e.g., triphenylphosphine).

Alternatively, as described in United States Patents 4,248,802, 4,808,756,
5 5,312,951 and 5,347,045, the catalyst may contain a hydrophilic group. In such a case, an aqueous medium may be used.

Rhodium can be introduced into the reactor as a preformed catalyst, for example, a solution of hydridocarbonyl tris(triphenylphosphine) rhodium(I); or it can be
10 formed in situ. If the catalyst is formed in situ, the Rh may be introduced as a precursor such as acetylacetonatodicarbonyl rhodium(I) $\{\text{Rh}(\text{CO})_2(\text{acac})\}$, rhodium oxide $\{\text{Rh}_2\text{O}_3\}$, rhodium carbonyls $\{\text{Rh}_4(\text{CO})_{12}$, $\text{Rh}_6(\text{CO})_{16}\}$, tris (acetylacetonato) rhodium(I), $\{\text{Rh}(\text{acac})_3\}$, or a triaryl phosphine-substituted rhodium carbonyl $\{\text{Rh}(\text{CO})_2(\text{PAr}_3)\}_2$, wherein Ar is an aryl group.

15 During the hydroformylation reaction it is believed that the carbon monoxide competes with the phosphorus compound to co-ordinate as ligands to the rhodium metal. Accordingly a higher carbon monoxide partial pressure will co-ordinate more carbon monoxide with the rhodium and less of the much more bulky
20 phosphorus containing ligand will co-ordinate. In this way the metal in the complex becomes more accessible for olefin bonds. Accordingly by increasing the partial pressure of the carbon monoxide, hydroformylation rates can be increased, especially with the bis-phosphite ligand system, but expectedly also with the older rhodium/triphenyl phosphine catalyst system. An additional affect
25 of the higher partial pressures of carbon monoxide is a higher resistance of the rhodium complex against the formation of rhodium clusters, which become less and less active hydroformylation catalysts as more rhodium atoms tie up together, and ultimately may come out of solution and form precipitates. As this deactivation process goes faster at higher temperatures, the higher partial
30 pressures of carbon monoxide permit the operation of the process at higher temperatures, and hence bring even higher additional benefits in terms of reaction rate, which can be translated into productivity, yield and/or investment benefits, or

a combination thereof, as the practitioner may like. On the other hand, a higher carbon monoxide partial pressure may also favor the addition of the carbon monoxide to the non-terminal carbon on the olefinic bond, and hence e.g. favor the formation of isobutyraldehyde at the expense of n-butyraldehyde. When the
5 normal butyraldehyde is the more preferred isomer, a lower carbon monoxide partial pressure may therefore be preferred.

As an extension of the process of the invention the n-butyraldehyde produced by the hydroformulation process of this invention may then be converted to 2 ethyl
10 hexanol or mixtures containing 2-ethyl-hexanol by dimerisation, usually by an aldol reaction, and suitably followed by hydrogenation. The aldolisation may be carried out in the presence of some isobutyraldehyde, so that the 2-ethyl hexanol produced may also contain some 2-ethyl-4-methyl-pentanol. The hydrogenation may be selective to saturate only the alkyl chain and not the aldehyde
15 functionality, such that a saturated aldehyde is formed. Such aldehyde, or mixtures of aldehydes, are readily oxidised to the corresponding acid, such as 2-ethyl hexanoic acid. Alternatively, the n-butyraldehyde and/or isobutyraldehyde, or a mixture thereof, may be hydrogenated to their respective alcohols or a mixture thereof, or they may be oxidised to the corresponding acids, or a mixture
20 thereof.

Such acids and alcohols may be further reacted to commercially interesting derivatives. Acid derivatives include polyol esters and metal salts. Alcohol derivatives also include esters such as phthalates, adipates, acetates, nitrates,
25 acrylates, sulfates and phosphates, but also other surfactant derivatives such as alkoxylates and alkoxysulfates.

According to one embodiment of the invention, therefore, hydroformylation may be accomplished using phosphite ligands with careful control of the temperatures
30 and partial pressures of the reactants and/or products. Thus, when a triorganophosphine ligand is used it is preferably used in an amount of at least 100 mole per gram atom of rhodium. Contrarily, if one prefers to forego the high

selectivity to the normal aldehyde, one may use amounts of triorganosphosphine ligand that are much lower, like 40 or less mole per gram atom of rhodium, but also 20 or less, and even 10 or less, down to 5 or less, or even 2 or less, should one desire to do so. Preferably with bis-phosphite ligands the amount of ligand present is from 1 to about 40 moles of bisphosphite ligand per mole of rhodium, more preferably from 1 to 8 moles ligand per mole rhodium, and most preferably from 1 to 4 moles of bisphosphite ligand per mole of rhodium, said amount of ligand being the sum of both the amount of ligand that is bound (complexed) to the rhodium metal and the amount of free (non-complexed) ligand present. If desired, make-up ligand can be supplied to the reaction medium of the process at any time and in any suitable manner, e.g. to maintain a predetermined level of free ligand in the reaction medium.

In general H_2 to CO molar ratio of gaseous hydrogen to carbon monoxide is $>1:1$. Thus the ratio may, for example, range from about $>1:1$ to 100:1 or higher. The more preferred hydrogen to carbon monoxide molar ratio is from about $>1:1$ to about 10:1, most preferably from 1.1:1 to 1.2:1. Further, the hydroformylation process may be conducted at a reaction temperature from about $45^\circ C$ to about $180^\circ C$. In general hydroformylation reaction temperatures of about $50^\circ C$ to about $170^\circ C$ are preferred, the more preferred reaction temperatures being from about $80^\circ C$ to about $160^\circ C$ and most preferably from about 90, 100, 110, 120, 130 or $140^\circ C$ upwards.

Since the hydroformylation process of the invention advantageously takes place in the liquid phase and the reactants are gaseous compounds, a high contact surface area between the gas and liquid phases is desirable to avoid mass transfer limitations. A high contact surface area between the catalyst solution and the gas phase can be obtained in a variety of ways. For example, the olefin feed stream can be contacted with catalyst solution in, for example, a continuous-flow stirred reactor where the feed is introduced and dispersed at the bottom of the vessel, preferably through a perforated inlet. Good contact between the catalyst and the gas feed can also be ensured by dispersing a solution of the catalyst on a high

surface area support. Such a technique is commonly referred to as supported liquid phase catalysis. The catalyst can also be provided as part of a permeable gel.

- 5 The hydroformylation reaction can be performed in a single reactor. Examples of suitable reactors can be found in United States Patents 4,287,369; 4,287,370; 4,322,564; 4,479,012 and EP-A-114,611; EP-A-103,810 and EP-A-144,745. Two or more reactor vessels or reactor schemes configured in parallel or in series can also be used. In addition, a plug flow reactor design, optionally with partial
10 liquid product backmixing, can give an efficient use of reactor volume.

It is preferred that the hydroformylation reaction be carried out in more than one reaction zone or vessel in series. Suitable reactor configurations are disclosed, for example, by British Patent 1,387,657 and United States Patents 4,593,127;
15 5,105,018 and 5,367,106. Examples of individual hydroformylation reactors can of the standard types described by Denbigh and Turner in "Chemical Reactor Theory" ISBN 0 521 07971 3, by Perry et al in "Chemical Engineers' Handbook" ISBN 0-07-085547-1 or any more recent editions, e.g., a continuous stirred tank or a plug flow reactor with adequate contact of the gas and the liquid flowing
20 through the reactor . Advantageously these plug flow reactor designs or configurations include ways of partial backmixing of the reactor product liquid, as explained, for example in DE 3,220,858.

By using the conditions of the present invention we have found that the efficiency
25 of industrial scale propylene hydroformylation may be improved to a surprising extent. Thus, by increasing the propylene content of the feed to the mole % required by the inventor, it is possible, within the constraints of a plant's gas recycle capability, to increase the amount of hydroformylation product produced for a fixed amount of feed to the reactor. Rather than keeping the feed constant, it
30 is possible to maintain the capacity of the plant with a reduction in feed throughput. Of course optimum commercial operation may involve a combination of these two (capacity or efficiency) advantages. We have found for example that,

- providing these conditions of the invention are employed, an increase in the propylene content of the feed from 95 to at least 97.5 mole % results in an increase in capacity of a nominal 100,000 tonne per year facility to 103200 tonnes per year. An increase in the propylene content from 95 mole % to 99.5% results
- 5 in an increase in capacity to 105800 tonnes per year. We have also found that the utilisation of syngas is improved and that the energy efficiency of the plant, particularly the power required for the compressor systems, is reduced. Waste due to by product venting is also considerably reduced.
- 10 Accordingly for a given hydroformylation reactor size and for a given recycle gas compressor capacity and maintaining the concentration and stability of the catalyst, we have found that by increasing the propylene content of the feed from 95 mole % to 99.5 mole % it is possible within the same reactor equipment and recycle compressor volumetric flow limitations, to produce 5.8% more
- 15 butyraldehyde, and this is achievable at only 94.0% of the propylene containing feed stream flow, per unit of butyraldehyde product, compared with the 95 mole % propylene in feed case. Furthermore the requirements for gas disposal may be reduced by about 35% by weight. If the propylene content of the feed is 97.5 mole % instead of 95 mole %, butyraldehyde production may be increased by
- 20 3.2%. Again, this is achievable at only 96.6% of the propylene containing feedstream flow. Gas venting requirements may be reduced to 80.2% of the original case.

Brief Description of the Drawing

- 25 Figure 1 shows a simplified flow scheme of a low pressure rhodium hydroformylation process useful for performance of the invention. It is further described in Example 1.

Examples

Example 1

The improvements in efficiency in the production of butyraldehyde are shown in the following Table 1 which compares the material balances for the hydroformylation of chemical grade propylene (containing 95.0 mole % propylene); and polymer grade propylene (containing 99.5 mole % propylene).

The material balances are shown for a hydroformylation conducted by the process illustrated in Figure 1, which shows a simplified flow scheme of a butyraldehyde process using low pressure rhodium hydroformylation technology. Propylene feed (1) and syngas feed (2) are mixed with gas recycle stream (5) and fed to the hydroformylation (LPO) reactor (100). Leaving the overhead entrainment separator (101) is reactor effluent (4), which after cooling in condensor (102) is separated into gas and liquid in separator (103). The gas from this separator is partially purged as vent gas (6), and the remainder is recycled via first compressor (104). The liquid from separator (103) is fed via line (7) to a stabiliser (105), although some may be returned via line 10 to the LPO reactor (100). In stabiliser (105), light components are removed as stabiliser overhead gas (9), which is recycled by second compressor (106) to the gas recycle loop that is driven by the first compressor (104). Most of the butyraldehyde product leaves with the stabiliser bottom stream (8). Although the invention is also advantageous in other possible low pressure rhodium hydroformylation flow schemes known in the art, it is particularly advantageous for the process illustrated in Figure 1.

Table 1Calculated Plant Material Balance

Propylene feed quality		Chemical Grade (CG)	Polymer Grade	Relative to CG	Comments
Propylene content	Mole%	95.0	99.5		Balance is primarily propane
Propylene feed (1) flow	kg/h	10000	9947	99.5%	
Contained propylene	kg/h	9477	9895	105.6%	
Syngas feed (2) flow	kg/h	6460	6825	105.6%	H ₂ /CO=1.18; and methane + CO ₂ = 2.0 mole %
(H ₂ +CO)/ propylene mole ratio	-	1.9219	1.9448	101.2%	
Propylene converted	kg/h	8841	9357	105.8%	
Butyraldehyde (n+iso) production rate					
As recovered [in (8)]	kg/h	14634	9357	105.8%	Capacity gain
Vent gas by product (6) flow	kg/h	1751	1205	63.8%	Downgraded to fuel gas
Product utilization (flows per unit of butyraldehyde recovered)					
Propylene feed (1)	kg/kg	0.683	0.642	94.0%	Efficiency gain

Table 1 (Continued)

Syngas feed (2)	kg/kg	0.491	0.441	99.82%	
Total feeds (1 + 2)	kg/kg	1.125	1.083	96.3%	Efficiency gain
Vent gas by-product (6)	kg/kg	0.120	0.078	65.0%	Efficiency gain

Example 2

It has been projected that the following findings will translate to the conditions of the present invention including a continuous process in which the propylene feed is delivered at a rate of at least 3 tonnes per hour.

5

Hydroformylation kinetic experiments were carried out in a standard half litre zipperclave from Autoclave Engineers. Mixing occurred with an air driven stirrer with speed controlled at 2000 revolutions per minute. The mixer had a six bladed impeller that guaranteed a strong mixing between the gas and the liquid phase.

10 Baffles inside the reactor prevented vortex formation and created back mixing. The reaction temperature was controlled at 110°C +/- 1°C. Pressure was controlled at 1000 kPag ±10 kPa (10barg +/-0.1bar). Synthesis gas (48% H₂ and 52% CO) was delivered from a calibrated high pressure storage cylinder equipped with a pressure transmitter allowing pressure reading at 1 kPa (0.01 bar) accuracy.

15

Each experiment started with a catalyst solution of the following composition:

	Triphenyl phosphine (TPP)	= 19.84 g
	Tetraglyme (solvent)	= 191.2 g
20	Rhodium	= 0.00576 g

The rhodium was dosed using rhodium carbonyl acetylacetonate as catalyst precursor.

25 The catalyst solution contained 27 wtppm rhodium.

The catalyst solution was transferred into the reactor and the reactor was purged several times with syngas to remove air. The reactor content was then heated up to 110°C under 200 kPag (2 barg) syngas pressure. Once the desired reaction
30 temperature was reached, about 0.05 mol propylene was injected into the catalyst solution by means of synthesis gas and at the same time as the injection of propylene the pressure was adjusted to 1000 kPag (10 barg).

Immediately after the substrate injection and pressure adjustment, the progress of the reaction was followed by measuring the rate of gas consumption, indicated by the pressure decay (DELTA-P) in the high pressure syngas storage cylinder.

- 5 The reaction was run for 3 hours and at the end of the reaction the gas supply was stopped and the reactor was cooled down to room temperature. A gas sample was taken from the gas phase inside the reactor and analysed on a HP6890 gas chromatograph (supplied by Hewlett-Packard). The chromatograph was equipped with a thermal conductivity detector (TDC) detection system and a poraplotQ
- 10 column of 30m length, 0.53 mm internal diameter (ID), 10 μ m df (standing for "dense phase", and indicating film thickness). A liquid sample was withdrawn from the reactor into a cooled sample vial and analysed for product composition by gas chromatography using a HP6890 gas chromatograph equipped with a Flame Ionisation Detector (FID) detection system and a wall coated open tubular
- 15 (WCOT) Ultimet column of 10m length, 0.53 mm ID, 0.17 μ m df. The column (HT Simdist CB) is a chemically bound high temperature simulated distillation column. "Ultimet" and "poraplotQ" are trade names of the Varian-Chrompack company.
- 20 Sulphur analyses of the products were performed on a HP6890 gas chromatograph equipped with a fused silica column and a model 355 flameless sulphur chemoluminescence detector from Sievers. The column was a CPSIL5CB chemically bound silica column supplied by Chrompack of 30m length, 0.32 mm ID, and 5 μ m df. This method gives quantitative information both about total
- 25 sulphur and about individual sulphur components in the product with a detection limit of about 5 wtppb.

Finally the reactor was depressurised and the liquid recovered and weighed. From the weight of the product, its composition and the composition of the off-gas the

30 end-conversion was calculated. The conversion at any given moment could then be calculated pro-rata the pressure drop at that moment, the measured end-conversion and the total pressure drop achieved at the end of the experiment.

Two experiments served as reference case, providing a base case reaction rate for propylene hydroformylation with rhodium and triphenyl phosphine in absence of any impurity. The two runs also served to demonstrate the reproducibility of the experiments and the results of these experiments are shown in Tables 2 and 3. In those Tables, TPP stands for triphenylphosphine; TPPO stands for triphenylphosphine oxide; and TEGDE stands for tetra-ethylene glycol dimethyl ether (also known as tetraglyme).

In the run reported in Table 4, 0.0011 moles of methyl mercaptan were added and Table 4 illustrates that sulphur is a catalyst poison for the rhodium hydroformylation and significantly reduces the reaction rate.

At 110°C, the graphs of $\ln(1 - \text{conversion})$ versus time showed a linear slope for about the first hour, and first order initial reaction rates of 2.22 h^{-1} and 2.35 h^{-1} were measured respectively for the two reference runs.

Table 2: Propylene reference run 1

PRODUCT COMPOSITION	Wt%	g	moles
Propylene	0.01	0.02	0.0005
i-butanal	0.48	1.00	0.0139
n-butanal	1.85	3.86	0.0536
TPP	9.43	19.70	0.0751
TPPO	0.48	1.00	0.0036
Butyric acid	0.03	0.06	0.0007
TEGDE	87.71	183.23	0.8243
C3 in off gas		0.0110	0.0003

Substrate conversion 98.80 % molar

time, min	DELTA P	Conversion	1-conversion	ln(1-conv)
0	0.000	0.000	1.000	0.000
2	0.860	6.561	0.934	-0.068
3	1.290	9.842	0.902	-0.104
4	1.690	12.893	0.871	-0.138
5	2.090	15.945	0.841	-0.174
6	2.490	18.996	0.810	-0.211
7	2.860	21.819	0.782	-0.246
8	3.210	24.489	0.755	-0.281
10	3.930	29.982	0.700	-0.356
12	4.580	34.941	0.651	-0.430
14	5.180	39.519	0.605	-0.503
16	5.740	43.791	0.562	-0.576
18	6.270	47.834	0.522	-0.651
20	6.750	51.496	0.485	-0.724
23	7.420	56.608	0.434	-0.835
26	8.030	61.262	0.387	-0.948
30	8.730	66.602	0.334	-1.097
35	9.480	72.324	0.277	-1.285
40	10.110	77.130	0.229	-1.475
45	10.610	80.945	0.191	-1.658
50	11.060	84.378	0.156	-1.856
55	11.410	87.048	0.130	-2.044
60	11.690	89.184	0.108	-2.224
90	12.530	95.592	0.044	-3.122
120	12.830	97.881	0.021	-3.854
180	12.950	98.797	0.012	-4.420

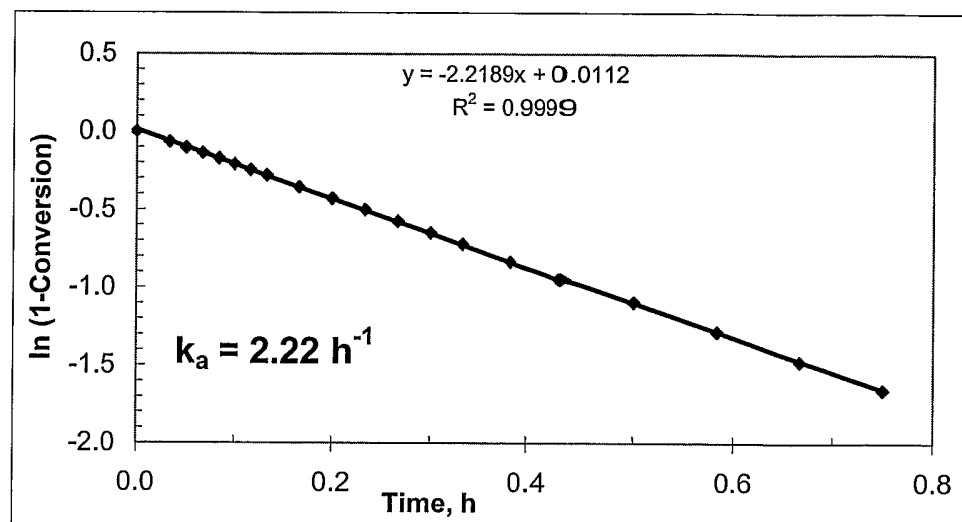


Table 3: Propylene reference run 2

PRODUCT COMPOSITION	Wt%	g	moles
Propylene	0.01	0.02	0.0005
i-butanal	0.43	0.90	0.0125
n-butanal	1.67	3.49	0.0484
TPP	9.27	19.39	0.0740
TPPO	0.55	1.15	0.0041
Butyric acid	0.04	0.08	0.0009
TEGDE	88.03	184.16	0.8285
C3 in off gas		0.0083	0.0002

Substrate conversion 98.61 % molar

time, min	DELTA P	Conversion	1-conversion	ln(1-conv)
0	0.000	0.000	1.000	0.000
2	0.890	7.732	0.923	-0.080
3	1.300	11.294	0.887	-0.120
4	1.680	14.596	0.854	-0.158
5	2.050	17.810	0.822	-0.196
6	2.400	20.851	0.791	-0.234
7	2.750	23.892	0.761	-0.273
8	3.090	26.846	0.732	-0.313
10	3.700	32.146	0.679	-0.388
12	4.280	37.185	0.628	-0.465
14	4.800	41.702	0.583	-0.540
16	5.300	46.046	0.540	-0.617
18	5.750	49.956	0.500	-0.692
20	6.170	53.605	0.464	-0.768
23	6.770	58.818	0.412	-0.887
26	7.290	63.335	0.367	-1.003
30	7.900	68.635	0.314	-1.159
35	8.550	74.282	0.257	-1.358
40	9.050	78.626	0.214	-1.543
45	9.640	83.752	0.162	-1.817
50	9.850	85.577	0.144	-1.936
55	10.070	87.488	0.125	-2.078
60	10.300	89.486	0.105	-2.252
90	11.100	96.437	0.036	-3.334
120	11.300	98.174	0.018	-4.003
180	11.350	98.609	0.014	-4.275

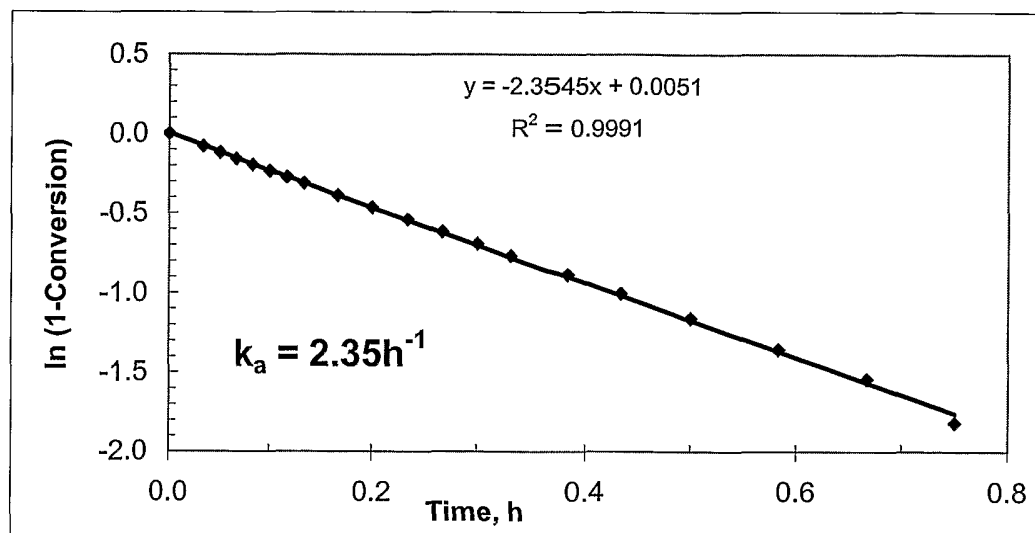



Table 4: Effect of methylmercaptan

PRODUCT COMPOSITION	Wt%	g	moles
Propylene	0.35	0.73	0.0174
i-butanal	0.38	0.80	0.0110
n-butanal	1.52	3.18	0.0441
TPP	9.82	20.55	0.0784
TPPO	0.16	0.33	0.0012
Butyric acid	0.03	0.06	0.0007
TEGDE	87.72	183.60	0.8260
C3 in off gas		0.1700	0.0040

Substrate conversion 57.02 % molar

Sulphur in product, wtppm 238

time, min	DELTA P	Conversion	1-conversion	ln(1-conv)
0	0.000	0.000	1.000	0.000
2	0.090	0.524	0.995	-0.005
3	0.120	0.699	0.993	-0.007
4	0.170	0.990	0.990	-0.010
5	0.220	1.281	0.987	-0.013
6	0.270	1.573	0.984	-0.016
7	0.370	2.155	0.978	-0.022
8	0.430	2.505	0.975	-0.025
10	0.550	3.203	0.968	-0.033
12	0.670	3.902	0.961	-0.040
14	0.780	4.543	0.955	-0.046
16	0.940	5.475	0.945	-0.056
18	1.060	6.174	0.938	-0.064
20	1.130	6.582	0.934	-0.068
25	1.580	9.203	0.908	-0.097
30	1.970	11.474	0.885	-0.122
35	2.320	13.513	0.865	-0.145
40	2.680	15.610	0.844	-0.170
50	3.450	20.094	0.799	-0.224
60	3.810	22.191	0.778	-0.251
90	5.240	30.520	0.695	-0.364
120	6.840	39.839	0.602	-0.508
180	9.790	57.021	0.430	-0.844

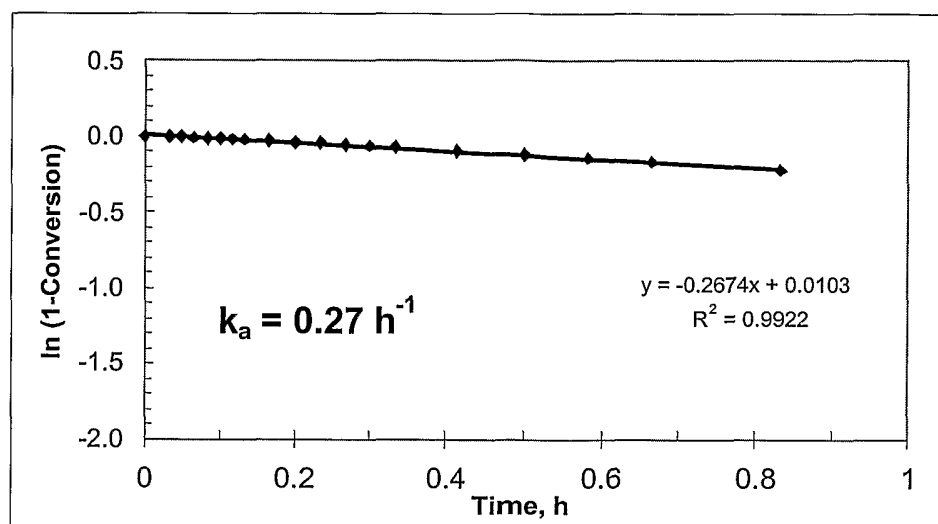

CLAIMS

1. A continuous process for the hydroformylation of propylene comprising feeding
 - 5 (i) a propylene stream at a rate of at least 3 tonnes per hour, and
 - (ii) synthesis gas comprising hydrogen and carbon monoxideto a hydroformylation reactor in which the propylene is hydroformylated over a rhodium containing catalyst, characterised in that
 - 10 (a) the propylene stream contains at least 97 mole % of propylene;
 - (b) the molar ratio of (H₂+CO) contained in the fresh synthesis gas fed to the process, to the propylene contained in the fresh propylene stream fed to the process, is greater than 1.93; and
 - (c) in the synthesis gas feed, the hydrogen is present in molar excess over the amount of carbon monoxide.
- 15 2. The process according to claim 1 in which the propylene stream contains at least 99.5 mole % of propylene.
3. The process according to claim 1 or 2 in which the sulphur content of the propylene feed is not greater than 500 ppb by weight, calculated on an atomic basis.
- 20 4. The process according to any of the preceding claims in which the reactive nitrogen content of the propylene feed is not greater than 10 ppm by weight, calculated on an atomic basis.
- 25 5. The process according to any of the preceding claims in which the chlorine content of the propylene feed is not greater than 5 ppm by weight, calculated on an atomic basis.

6. The process according to claim 3, 4 or 5 wherein the propylene feed contains, by weight and on an atomic basis, less than 50 ppb sulphur or less than 50 ppb reactive nitrogen or less than 50 ppb chlorine.
- 5 7. The process according to claim 6 wherein the aggregate weight content in the propylene feed of sulphur and reactive nitrogen and chlorine, on an atomic basis, is less than 50 ppb.
8. The process according to any of the preceding claims in which the
10 hydroformylation catalyst is an oil-soluble rhodium complex comprising a low valence rhodium (Rh) complexed with a triorganophosphorus compound.
9. The process according to claim 8 in which the triorganophosphorus
15 compound comprises an oil-soluble triarylphosphine, trialkylphosphine, alkyl-diaryl-phosphine, aryl-dialkylphosphine, triorganophosphite or bisphosphite containing, per molecule, one or more phosphorus atoms capable of complexing with Rh.
- 20 10. The process according to claim 9 in which the triorganophosphorus compound is triphenylphosphine or 6,6'-[[3,3',5,5'-tetrakis (1,1-dimethylethyl)-1,1'-biphenyl-2,2'-diyl] bis (oxy)] bis-dibenzo [d,f] [1,3,2]-dioxaphosphin.
- 25 11. The process according to any of the preceding claims in which the Rh concentration in the hydrofomylation reaction mixture is in the range of from 1×10^{-5} to 1×10^{-2} moles/litre.
12. The process according to any of the preceding claims in which the
30 hydroformylation is carried out at a temperature in the range of from 40 to 200°C.

13. The process according to any of the preceding claims in which the hydroformylation is carried out at a pressure in the range of from 0.05 to 10 MPaa.
- 5 14. The process according to any of the preceding claims in which the carbon monoxide partial pressure in the reactor is not greater than 50% of the total pressure.
- 10 15. The process according to any of the preceding claims wherein the propylene feed stream contains up to 5000 ppb by weight of dimethyl ether.
16. The process according to any of the preceding claims wherein the molar ratio of (H₂+CO) to propylene is greater than 1.94.
- 15 17. The process according to any of the preceding claims wherein the molar ratio of (H₂+CO) to propylene is at most 2.00.
- 20 18. The process according to any of the preceding claims wherein the molar ratio of hydrogen to carbon monoxide in the synthesis gas feed is from >1:1 to 10:1.
19. The process according to claim 18 wherein the ratio is from 1.1:1 to 1.2:1.

Figure 1

