

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number  
WO 2007/126302 A1

(51) International Patent Classification:  
H04B 7/26 (2006.01)

Soo-Jung [KR/KR]; #106-1403 Techno Valley Apt., Gwanpyeong-dong, Yuseong-gu, Daejon 305-509 (KR).

(21) International Application Number:  
PCT/KR2007/002179

(74) Agent: SHINSUNG INTERNATIONAL PATENT & LAW FIRM; ID Tower #601, Jungdaero 105, (99-7 Garak-dong), Songpa-gu, Seoul 138-805 (KR).

(22) International Filing Date: 3 May 2007 (03.05.2007)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: Korean  
(26) Publication Language: English  
(30) Priority Data:  
10-2006-0040130 3 May 2006 (03.05.2006) KR  
10-2007-0020162 28 February 2007 (28.02.2007) KR

(71) Applicant (for all designated States except US): ELECTRONICS AND TELECOMMUNICATIONS RESEARCH INSTITUTE [KR/KR]; 161, Gajeong-dong, Yuseong-gu, Daejon 305-350 (KR).  
(72) Inventors; and  
(75) Inventors/Applicants (for US only): KIM, Jae-Heung [KR/KR]; #106-807 Sejong Apt., Jeonmin-dong, Yuseong-gu, Daejon 305-728 (KR). KO, Young-Jo [KR/KR]; #102-706 Mugunghwa Apt., Wolpyeong-dong, Seo-gu, Daejon 302-280 (KR). LEE, Kyoung-Seok [KR/KR]; #608-803 Techno Valley Apt., Gwanpyeong-dong, Yuseong-gu, Daejon 305-509 (KR). KIM, Jung-Im [KR/KR]; #102-706 Mugunghwa Apt., Wolpyeong-dong, Seo-gu, Daejon 302-280 (KR). JUNG,


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR TRANSMITTING UP LINK CONTROL SIGNAL IN MOBILE COMMUNICATION SYSTEM

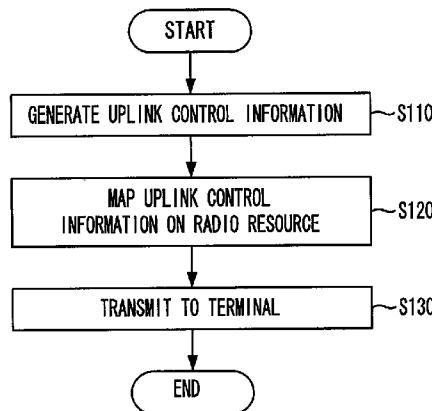

(57) Abstract: The present invention relates to a method for transmitting uplink control information in a mobile communication system; and, more particularly, to a method for effectively forming uplink control information transmitted through a downlink from a base station to a terminal in a mobile communication system for providing a packet service and transmitting the uplink control information with minimum radio resources occupied. The method includes the steps of generating uplink control information; allocating the uplink control information to a downlink-shared radio resource for packet data transmission based on downlink scheduling information; and transmitting the radio resource to a terminal. The present invention is applied to a mobile communication system.

WO 2007/126302 A1

METHOD FOR TRANSMITTING UP LINK CONTROL SIGNAL IN MOBILE  
COMMUNICATION SYSTEM

**DESCRIPTION**

5

**TECHNICAL FIELD**

The present invention relates to a method for transmitting uplink control information in a mobile communication system; and, more particularly, to a method 10 for effectively forming uplink control information transmitted through a downlink from a base station to a user terminal in mobile communication systems for providing a packet service and transmitting the uplink control information with minimum radio resources occupied.

15

**BACKGROUND ART**

A conventional mobile communication system is a circuit based system that enables a base station to transmit a control signal to a user terminal using a 20 downlink-dedicated channel. However, it is difficult to apply a conventional method for transmitting a control signal using the dedicated channel to a long term evolution (LTE) system that is a packet based system introduced for providing various packet services. 25 Currently, the related standardization processes of the LTE system have been in progress.

Unlike the circuit based system that fixedly allocates radio resources to a terminal, a plurality of terminals share radio resources for transmitting packet 30 service data in mobile communication systems for providing a packet service. Accordingly, the packet based mobile communication system needs a method for providing uplink control information to a plurality of terminals in order to enable each of the terminals to 35 distinguish allocated radio resources from the other and

to access the allocated radio resources at a scheduling time. Also, a long term evolution (LTE) system for providing a pure packet service requires a method for forming uplink control information to variably and 5 flexibly use the radio resources of a physical layer and a method for transmitting the uplink control information.

To fulfill such requirements, there have been many researches for developing a method for dividing radio resources into local allocated radio resource and 10 distributed allocated radio resource in order to allocate and manage radio resources adaptively to a wireless environment. In order to effectively allocate the two types of radio resources, there have been also many researches in progress for developing a method for 15 transmitting control information through a control channel shared by a plurality of terminals rather than a Wideband Code Division Multiple Access (WCDMA) scheme and transmitting the predetermined part of the control information through radio resources allocated to each of 20 terminals.

That is, there is a demand for developing a method for effectively forming uplink control information using a downlink from a base station to a terminal and transmitting the uplink control information with minimum 25 radio resource occupied in packet based mobile communication systems developed based on a 3<sup>rd</sup> generation partnership project (3GPP) system so as to improve the utilization of limited radio resources.

30

## DISCLOSURE

### TECHNICAL PROBLEM

An embodiment of the present invention is directed to providing a method for effectively forming uplink control information transmitted through a downlink from a 35 base station to a terminal in a mobile communication

station for providing a packet service and for transmitting the uplink control information with minimum radio resources occupied.

Other objects and advantages of the present invention can be understood by the following description, and become apparent with reference to the embodiments of the present invention. Also, it is obvious to those skilled in the art of the present invention that the objects and advantages of the present invention can be realized by the means as claimed and combinations thereof.

#### **TECHNICAL SOLUTION**

In accordance with an aspect of the present invention, there is provided a method for transmitting uplink control information in a mobile communication system, which includes the steps of: a) generating uplink control information; b) allocating the uplink control information to downlink-shared radio resources for packet data transmission based on downlink scheduling information; and c) transmitting the radio resource to a terminal.

#### **ADVANTAGEOUS EFFECTS**

According to an embodiment of the present invention, the utilization of limited radio resources can be maximized by efficiently forming uplink control information to be transmitted through a downlink from a base station to a terminal in a packet based mobile communication system and transmitting the uplink control information with minimum radio resources occupied.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a flowchart illustrating a method for transmitting uplink control information in a mobile

communication system in accordance with an embodiment of the present invention.

Fig. 2 is a block diagram depicting uplink control information in accordance with an embodiment of the 5 present invention.

Fig. 3 is a diagram showing a radio resource block with uplink control information allocated using downlink scheduling information in accordance with an embodiment of the present invention.

10 Fig. 4 is a diagram illustrating a group identifier of downlink scheduling information in accordance with an embodiment of the present invention.

15 Fig. 5 is a diagram depicting a radio resource block with uplink control information allocated in accordance with an embodiment of the present invention.

#### **BEST MODE FOR THE INVENTION**

The advantages, features and aspects of the invention will become apparent from the following 20 description of the embodiments with reference to the accompanying drawings, which is set forth hereinafter.

Fig. 1 is a flowchart illustrating a method for transmitting uplink control information in a mobile communication system in accordance with an embodiment of the 25 present invention.

At first, a base station generates uplink control information to transmit to a terminal at step S110.

The uplink control information may include at least one among uplink scheduling information, random access 30 response information, and response information for sustaining the uplink synchronization of a physical layer, which are required in a system based on Orthogonal Frequency Division Multiple Access (OFDMA) or Single Carrier - Frequency Division Multiple Access (SC-FDMA) 35 technology. For example, the uplink control information

may include both of uplink scheduling information and uplink random access response information or one of the uplink scheduling information and the uplink random access response information.

5 The uplink scheduling information may include radio resource allocation information, modulation/encoding information, and retransmission information.

10 The radio resource allocation information may include a scheduling identifier, an uplink radio resource block location, and an allocation period. The scheduling identifier is information about a terminal or a terminal group where allocated radio resource belongs to. The uplink radio resource block location is information for addressing the radio resources of an OFDMA system, which 15 are distinguished by frequency and time domains. The allocation period is information about a period when the allocated radio resource is valid.

20 The modulation/encoding information may include information about a transport format and a multi input multi output (MIMO). The transport format may include a modulation scheme applied to an allocated radio resource among modulation schemes, e.g., Quadrature Phase Shift Keying (QPSK), 16-Quadrature Amplitude Modulation (16QAM), and 64-Quadrature Amplitude Modulation (64QAM), and a 25 payload size or an encoding level. That is, the transport formation is information for calculating an encoding level by informing of a size of a payload to transmit through the allocated radio resource or to directly inform of the encoding level. The MIMO related 30 information is control information necessary to improve the system performance by transmitting and receiving data through multiple antennas.

35 The retransmission information is information related to retransmit packet data which is transmitting through the allocated radio resource.

The random access response information may include radio resource allocation information, timing alignment information (TA), and power level information. The random access response information may further include 5 frequency advanced information (FA).

The radio resource allocation information includes information about a terminal identifier and an uplink radio resource block location. The terminal identifier is information about a terminal or a terminal group where 10 a random access response message belongs to. As the terminal identifier, a signature index used for random access or a random access (RA) preamble sequence index used for random access is used. Also, an additional identifier, for example, a random identity can be used. 15 The uplink radio resource block location is information for addressing an uplink radio resource available to a terminal that tries random access.

The timing alignment information is timing adjustment information for a terminal to synchronize the 20 uplink of a physical layer and for reducing a timing error estimated by a base station using a signal sequence pattern transmitted by a terminal to sustain the uplink synchronization, for example, a signature and a predetermined symbol pattern, which are transmitted when 25 an initial random access is tried.

The power level information is information about a power reference level for setting a power level to transmit data from a terminal through an uplink power level measured by a base station using a signal sequence 30 pattern transmitted from a terminal to sustain the uplink synchronization, for example, a signature and a predetermined symbol pattern, which are transmitted when an initial random access is tried.

The response information for sustaining the uplink 35 synchronization of the physical layer may include timing

alignment information, frequency adjustment information, and power level information.

The frequency adjustment information is information for a terminal to synchronize the uplink of a physical layer and for reducing a frequency error estimated by a base station using a signal sequence pattern transmitted by a terminal to sustain the uplink synchronization, for example, a signature and a predetermined symbol pattern, which are transmitted when an initial random access is tried.

After the step S110, a base station allocates the uplink control information to downlink-shared radio resources for transmitting packet data at step S120.

The present invention can be applied to an Orthogonal Frequency Division Multiple (OFDM) group system such as an Orthogonal Frequency Division Multiple Access (OFDMA) or Single Carrier - Frequency Division Multiple Access (SC-FDMA). Unlike the Code Division Multiple Access (CDMA) system that identifies a radio resource exclusively allocated to each terminal by allocating codes, the OFDM group system enables terminals to two dimensionally share radio resources that are identified in a frequency domain and a time domain. That is, a downlink physical channel and an uplink physical channel transmits radio resources formed of a time and a frequency after dividing the radio resources, and the radio resources use a radio resource block divided into a transmitting period TTI(Transmission Time Interval) and a sub carrier group as a sub carrier index.

As a method for allocating uplink control information to a downlink-shared radio resource block, a method for variably allocating radio resources using downlink scheduling information and a method for fixedly allocating a part of radio resources are introduced.

The embodiments of the method for adaptively

allocating radio resources using downlink scheduling information and the method for constantly allocating a part of radio resources will be described with reference to related drawings in later.

5 After the step S120, a base station transmits a downlink radio resource with allocated uplink control information to a terminal at step S130.

10 The uplink control information transmitted through the downlink is transmitted through encoding processes to sustain a predetermined quality in a wireless channel. For this, the uplink control information is transmitted after jointly coding the uplink control information for a plurality of terminals or separately coding of the uplink control information of each terminal.

15 Terminals in a MAC\_Active state for transmitting data can transmit packet data using a radio resource allocated through the uplink scheduling information.

20 That is, a terminal confirms a relation of radio resources and terminal scheduling identifiers by searching uplink scheduling information transmitted to a downlink at every TTI, checks a corresponding radio resource location and a radio resource allocation period when the terminal scheduling identifier of a corresponding terminal or the terminal scheduling 25 identifier of a corresponding group is included therein, and transmits packet data using the radio resources allocated to the corresponding terminal after coding and modulating. Also, the terminal performs a HARQ operation using the retransmission information of the uplink 30 control information.

35 That is, according to the method for using downlink scheduling information to transmit the uplink scheduling information and/or random access response information, a part of a terminal scheduling identifier is reserved and allocated as a group identifier, and the transmission of

response information for uplink scheduling information and/or random access response information is addressed using the group identifier.

Therefore, the terminals can confirm the group identifier to inform of the transmission for the uplink scheduling information and/or random access response information by searching downlink scheduling information. After confirming the group identifier, each of the terminals can obtain the uplink scheduling information and/or random access response information transmitted from a base station through demodulation and decoding the data transmitted on the shared radio resource of an allocated radio resource location having corresponding group scheduling information.

Fig. 2 is a diagram illustrating uplink control information for transmitting uplink scheduling information and random access response information using radio resources allocated as downlink scheduling information using a group identifier in accordance with an embodiment of the present invention.

As shown in Fig. 2, the uplink control information includes a random access response information block 1 formed in a unit of information element IE, uplink scheduling information (UL scheduling information) block 2, a random access response information bit 3 for informing of the existence of the random access response information, and an UL random access information bit 4 for informing of the existence of the UL scheduling information.

If the random access response information bit 3 and the UL scheduling information bit 4 are 1, the random access response information bit 3 and the UL scheduling information bit 4 denote that the corresponding information is included therein. On the contrary, if the random access response information bit 3 and the UL

scheduling information bit 4 are 0, the random access response information bit 3 and the UL scheduling information bit 4 denote that the corresponding information is not included.

5 If the random access response information bit 3 is 1, a terminal trying random access searches the random access response information IE 5.

10 As a terminal identifier 7 of the random access response information IE, a signature index used for random access or a sequence identifier of a preamble used for random access is used.

15 If a terminal identifier 7 in the random access response information IE is matched with the own identifier such as a signature or a sequence index of a preamble transmitted from oneself, a terminal transmits the own information on the uplink using the uplink radio resource block location 8 information in the IE.

20 Herein, the timing synchronization of an uplink is adjusted using the TA information 9 in the random access response information IE. If it is necessary, a power level and a frequency can be properly set when data is transmitted through the uplink by including the FA information 10 and the power level information 11 in the random access response information IE in order to 25 properly transmit data through the uplink.

Also, an extension bit EB 16 is used for denoting whether or not another information IE is included after each information IE in a random access response information block or an UL scheduling information block.

30 If another information IE is included, the EB is set to 0. If another information IE is not included, the EB is set to 1.

Also, if the random access response information bit is set to 1, that is, if the random access response information IE is included, terminals in a MAC\_Active

state for transmitting or receiving data to/from a base station can access UL scheduling information by confirming the EB. On the contrary, if the random access response information is set to 0, that is, if the UL scheduling information is not included, terminals directly search the UL scheduling information IE 6.

If a scheduling identifier 12 is matched with an own scheduling identifier for scheduling after terminals searches UL scheduling information IE, the terminals 10 determine corresponding UL scheduling information IE as UL scheduling control information for radio resources allocated to oneself. Then, the terminals check the uplink radio resource block location 13, the allocation period 14, and the transport format 15, and transmit data 15 to an uplink according to the scheduling information.

Each terminal checks an extension bit EB 15 in each information IE if a terminal identifier in random access response information IE or a scheduling identifier of an UL scheduling information IE is not an own terminal 20 identifier or an own scheduling identifier.

Although the uplink control information includes the uplink scheduling information and the random access response information together in the present embodiment, the uplink control information may include one of the 25 uplink scheduling information and the random access response information as described above.

If a system transmits only random access response information independently, the random access response information bit 3 and the UL scheduling information bit 4 30 are not necessary. Random access response information is independently transmitted by forming a random access response information block 1 for the random access response information using downlink radio resources addressed with a group identifier for transmitting a 35 random access response message.

Also, if uplink scheduling information is independently transmitted, only the uplink scheduling information is transmitted with the same method because the random access response information bit 3 and the UL scheduling information bit 4 are not necessary.

The random access response information and/or the uplink scheduling information can be transmitted to one or multiple terminals using the shared radio resources assigned by downlink scheduling information as described above.

Fig. 3 is a diagram illustrating a radio resources block allocated with uplink control information using downlink scheduling information in accordance with an embodiment of the present invention, and Fig. 4 is a diagram illustrating a group identifier of downlink scheduling information.

As shown in Fig. 3, the uplink control information is local allocation 19-1 or distributed allocation 19-2 according to the amount of uplink control information using DL scheduling information 18 of a certain terminal group, which is a part IE of downlink scheduling information.

The DL scheduling information 18 of the certain terminal group includes a scheduling identifier, allocated radio resource block location information, and an error correction code CRC.

The scheduling identifier, as shown in Fig. 4, includes a group identifier 22 denoting a terminal that receives uplink control information or a terminal group. That is, a predetermined part of a scheduling identifier can be used as a group identifier 22.

The allocated radio resource block location information denotes the location of uplink link control information allocated on the shared radio resource.

Terminals can check a group identifier and allocated

the shared radio resource block location information for transmitting uplink control information by searching downlink scheduling information, and then they can obtain uplink control information like uplink scheduling 5 information and random access response information by demodulating and decoding data transmitted through the allocated radio resource.

When the uplink scheduling information and the random access response information are transmitted using 10 radio resources allocated using downlink scheduling information, a proper radio resource can be allocated according to whether or not the uplink scheduling information and the random access response information are present or according to the sizes thereof. If 15 necessary, the uplink control information can be transmitted by applying the most robust adaptive modulation and decode method available in the system.

Fig. 5 is a diagram illustrating a radio resource block fixedly distribution-allocated with uplink control 20 information in accordance with an embodiment of the present invention.

As shown in Fig. 5, uplink control information such as random access response information 23, uplink scheduling information 24, and response information 25 25 for sustaining uplink synchronization of a physical layer, fixedly distribution-allocated on the downlink radio resource in the present embodiment.

A base station fixedly allocates a downlink distributed allocation radio resource block by reserving 30 the downlink distributed allocation radio resource block to an assigned location at TTI, and transmits the allocated information to entire base stations through a broadcasting channel (BCH), which is system information.

Since terminals recognize the block of random access 35 response information 23 allocated to a downlink radio

resource through a broadcasting channel, uplink scheduling information 24, or response information 25 for sustaining uplink synchronization of a physical layer, the terminals do not need additional control information 5 for addressing a downlink radio resource block where uplink control information is transmitted. Also, if uplink control information to transmit to a downlink is not present at a given TTI, the radio resource block reserved for transmitting uplink control information can 10 be adaptively used for transmitting other information.

The above described method according to the present invention can be embodied as a program and stored on a computer readable recording medium. The computer readable recording medium is any data storage device that 15 can store data which can be thereafter read by the computer system. The computer readable recording medium includes a read-only memory (ROM), a random-access memory (RAM), a CD-ROM, a floppy disk, a hard disk and an optical magnetic disk.

20 While the present invention has been described with respect to certain preferred embodiments, it will be apparent to those skilled in the art that various changes and modifications may be made without departing from the spirits and scope of the invention as defined in the 25 following claims.

**WHAT IS CLAIMED IS:**

1. A method for transmitting uplink control information in a mobile communication system, comprising  
5 the steps of:

- a) generating uplink control information;
- b) allocating the uplink control information on downlink-shared radio resource for packet data transmission based on downlink scheduling information;  
10 and
- c) transmitting the radio resource to a terminal.

2. The method of claim 1, wherein the downlink scheduling information includes a group identifier  
15 denoting a terminal group to receive the uplink control information, and radio resource block location information denoting a location of the downlink-shared radio resource where the uplink control information is allocated.

20

3. The method of claim 2, wherein a predetermined part of a terminal scheduling identifier is reserved and allocated as the group identifier.

25

4. The method of claim 1, wherein in the step b), the uplink control information is variably locally-allocated on the downlink radio resource using the downlink scheduling information.

30

5. The method of claim 1, wherein in the step b), the uplink control information is variably distributed and allocated on the downlink radio resource based on the downlink scheduling information.

6. The method of claim 1, wherein the uplink control information includes at least one among uplink scheduling information, random access response information, and response information for sustaining  
5 uplink synchronization.

7. The method of claim 6, wherein the uplink scheduling information includes a scheduling identifier, a radio resource block location information of the uplink  
10 control information, and an allocation period information.

8. The method of claim 6, wherein the random access response information includes a terminal identifier and uplink radio resource block location  
15 information.

9. The method of claim 1, wherein in the step b) the uplink control information is fixedly allocated to downlink radio resource.

20

10. The method of claim 9, further comprising the step of:

transmitting radio resource fixed allocation information of uplink control information to a terminal  
25 through a broadcasting channel (BCH).

11. A method for transmitting random access response information of a mobile communication system, comprising the steps of:

30 a) generating random access response information; and

b) allocating the random access response information on downlink-shared radio resource using downlink scheduling information,

wherein the downlink scheduling information includes a group identifier denoting a terminal or a terminal group to receive the random access response information.

5

12. The method of claim 11, wherein the random access response information includes at least one among a terminal identifier, timing alignment information, and uplink radio resource block location information.

10

13. The method of claim 11, wherein a predetermined part of a scheduling identifier is reserved and used as the group identifier.

15

14. The method of claim 11, wherein in the step b), random access response information for at least one terminal is allocated to a downlink-shared radio resource.

20

15. A method for receiving random access response information of a mobile communication system, comprising the steps of:

25

a) receiving a downlink-shared radio resource; and

b) obtaining random access response information

from the downlink-shared radio resource based on downlink scheduling information,

wherein the downlink scheduling information includes a group identifier denoting a terminal or a terminal group to receive the random access response information.

30

16. The method of claim 15, wherein the random access response information includes at least one among a terminal identifier, timing alignment information, and uplink radio resource block location information.


35

17. The method of claim 15, wherein a predetermined part of a scheduling identifier is reserved as the group identifier.

5 18. The method of claim 15, wherein random access response information for at least one terminal is allocated to the downlink-shared radio resource.


1/4

FIG. 1

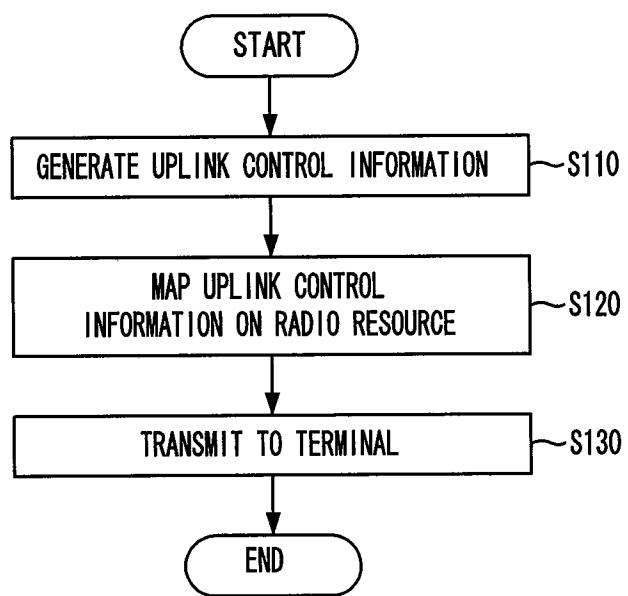

2/4

FIG. 2

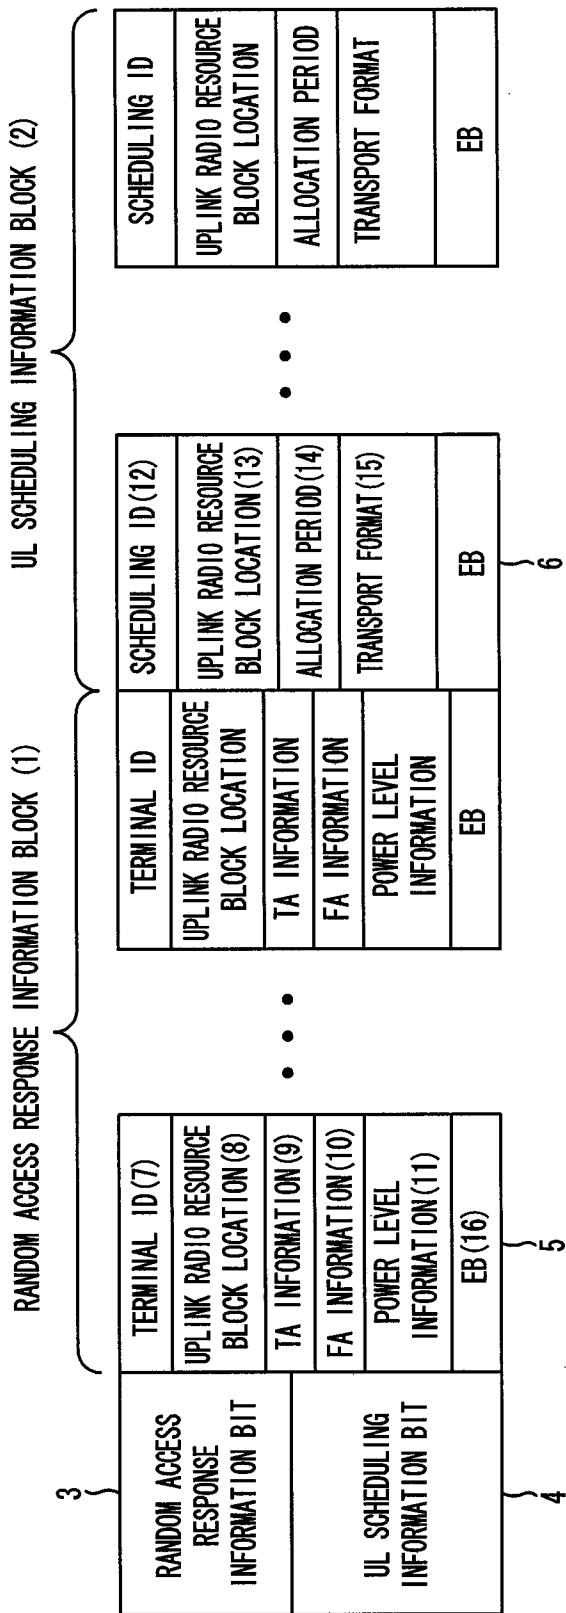

3/4

FIG. 3



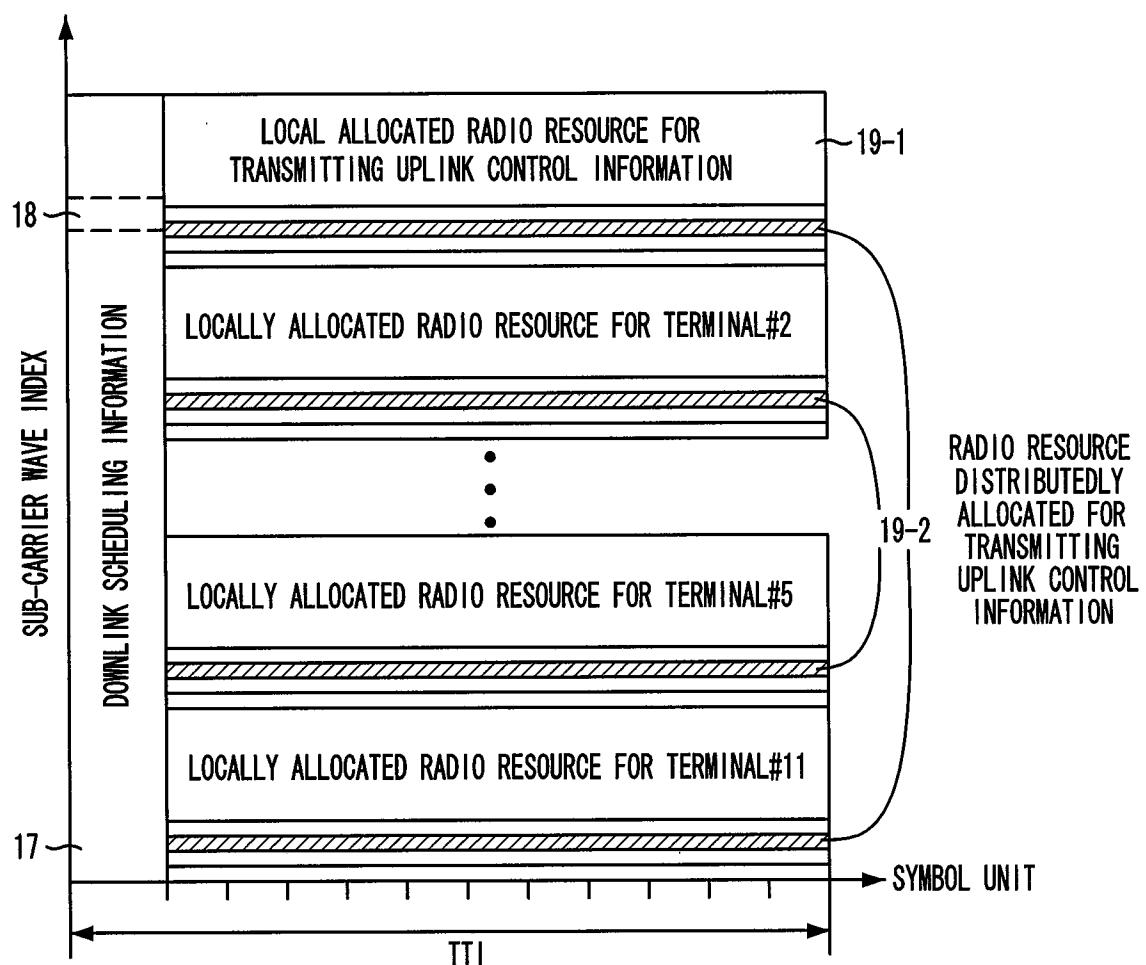


FIG. 4

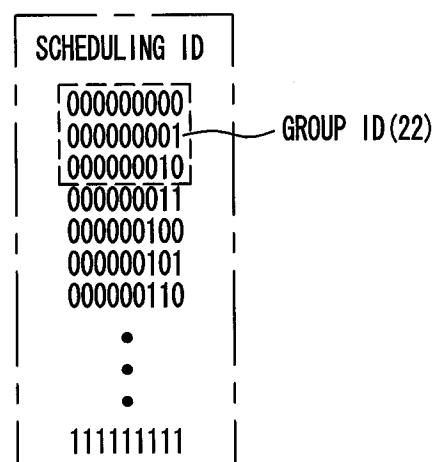

4/4

FIG. 5

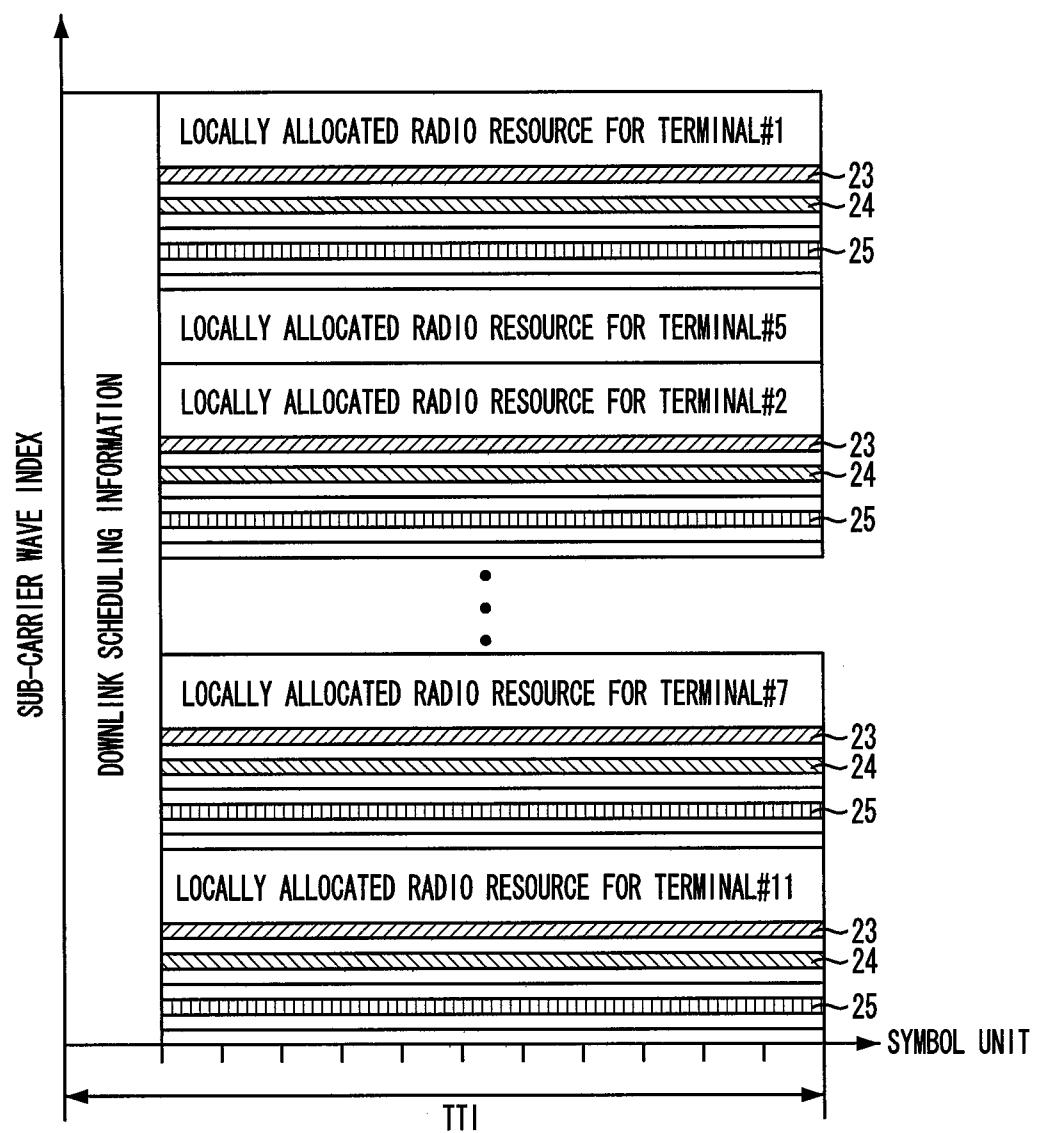

# INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/KR2007/002179**

## A. CLASSIFICATION OF SUBJECT MATTER

**H04B 7/26(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC8 H04B 7/26, H04Q 7/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
KOREAN UTILITY MODELS AND APPLICATIONS FOR UTILITY MODELS SINCE 1975  
JAPANESE UTILITY MODELS AND APPLICATIONS FOR UTILITY MODELS SINCE 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKIPASS, DELPHION, ESPACENET & Keywords : E-UMTS, LTE, packet, uplink, downlink, control, scheduling, shared and similar terms.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US2002-181422 A1 (PARANTAINEN et al.) 5 December 2002 * abstract, paragraphs [0064]-[0069], figure 4 *	1-18
A	KR2002-67245 A (HYNIX SEMICONDUCTOR INC.) 22 August 2002 * abstract, claim 1, figure 3 *	1-18
A	KR2003-29310 A (LG ELECTRONICS INC.) 14 April 2003 * abstract, figure 8 *	1-18

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:  
"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
"&" document member of the same patent family

Date of the actual completion of the international search  
21 AUGUST 2007 (21.08.2007)

Date of mailing of the international search report

**21 AUGUST 2007 (21.08.2007)**

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Sang Woo

Telephone No. 82-42-481-8324



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2007/002179**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US2002-181422 A1	05. 12.2002	US2002181422AA US7092373BB	05. 12.2002 15. 08.2006
KR2002-67245 A	22.08.2002	KR710105 B1	23.04.2007
KR2003-29310 A	14.04.2003	NONE	