



- (51) **International Patent Classification:**
F21V 13/04 (2006.01)
- (21) **International Application Number:**
PCT/US2013/039688
- (22) **International Filing Date:**
6 May 2013 (06.05.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/466,076 7 May 2012 (07.05.2012) US
13/842,776 15 March 2013 (15.03.2013) US
- (71) **Applicant:** CREE, INC. [US/US]; 4600 Silicon Drive,
Durham, North Carolina 27703 (US).
- (72) **Inventor:** CASTILLO, Mario Alberto; 1210 Three
Rivers Cir., New Braunfels, Texas 78130 (US).
- (74) **Agents:** FENSTER, Tatstsana V. et al.; 245 Main Street,
Racine, Wisconsin 53403 (US).
- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) **Title:** LENS FOR WIDE LATERAL-ANGLE DISTRIBUTION

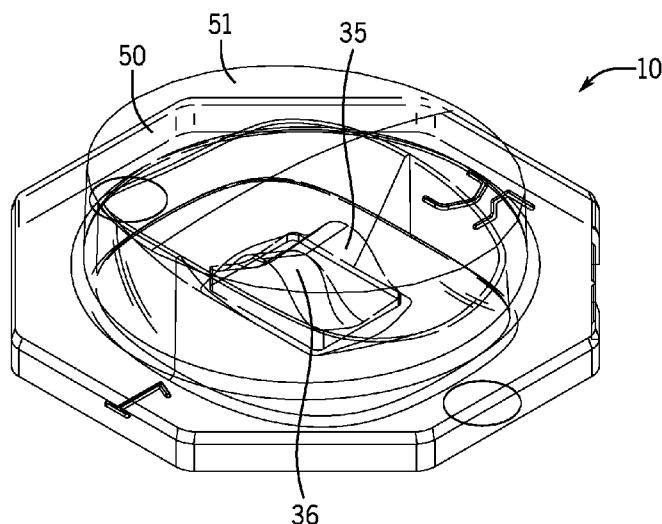


FIG. 1

(57) **Abstract:** A lens (10) for wide lateral-angle distribution of light from an LED light source (20) on a board and defining an axis (6). The lens includes a board-adjacent base (11) spaced from and around the axis, an inner light-receiving surface (30), an intermediate surface (40) and an outer output surface (50) configured for refracting light received from the inner and intermediate surfaces. The base forms an opening into a light-receiving cavity defined by the inner surface which includes (a) substantially planar front and back surface portions (31, 32) each extending from the opening and (b) an end surface portion (33) spanning the cavity between the front and back surfaces and comprising front and back segments (35, 36) extending inwardly from the front and back surface portions, respectively, and each angled with respect to the other. The intermediate surface is positioned and configured for reflecting light received from the inner surface toward the outer output surface.

LENS FOR WIDE LATERAL-ANGLE DISTRIBUTION

FIELD OF THE INVENTION

The invention relates generally to the field of lighting systems and, more particularly, to apparatus for utilizing LED light sources for illuminating areas with a predefined pattern of light intensity.

BACKGROUND OF THE INVENTION

There is a need for lighting apparatus which is low-cost and energy efficient. LEDs (light-emitting diodes) provide light sources which are energy efficient, and advances in LED technology are providing even greater efficiencies over time. Some typical applications for lighting systems are roadway and parking lot lighting in which there are performance requirements such as the requirement that light be most efficiently and uniformly distributed over wide areas which are to be lighted. In applications such as for illuminating information boards or advertisement billboards, signs, including transportation signs and the like, as well as building facade lighting, there is a need to direct light at a widest angle possible in order to draw particular attention to the wide area to be illuminated while utilizing a minimum number of light fixtures.

Some efforts have been made to develop LED lenses for directing LED light into a desired light distribution. Some of such lenses are difficult and expensive to manufacture, which increases overall cost for LED lighting using such lenses. Yet such lenses fall short in providing light distribution required for proper illumination of wide target surfaces.

It would be highly beneficial to provide an improved lighting apparatus which produces a desired light distribution for illumination of wide target surfaces. It would be further beneficial that such lighting apparatus have high efficiency with useful output of maximum emitted light at wide angles and in the desired direction with improved uniformity of distribution of such light across the illuminated area.

SUMMARY OF THE INVENTION

One aspect of this invention is an improved lens for distribution of light from an LED light source on a board and defining an axis.

5 In certain embodiments, the lens includes an inner surface, an intermediate surface and an outer output surface which is configured for refracting light received from the inner and intermediate surfaces.

The inner surface defines a light-receiving cavity. In some embodiments, the inner surface includes substantially planar front and back surface portions and an end surface portion spanning the cavity between the front and back surface portions. Each
10 of the front and back surface portions extends from the opening to terminate at the end surface portion.

The inner surface may also include a pair of substantially planar lateral surface portions each extending from the opening between the front and back surface portions. In some embodiments, the inner front, back and lateral surface portions are
15 substantially parallel to the axis.

In certain embodiments, the inner front and back surface portions are substantially orthogonal to the inner lateral surface portion. In some of such embodiments, the cavity opening is substantially rectangular. The term “substantially rectangular,” as used herein with respect to the cavity opening, means (1) that the
20 cavity opening has four sides and (2) that at least about one-third of the cross-dimension of each side of the cavity opening is straight or that at least about one-third of the cross-dimension of the longer sides (if there is a pair of longer sides) is substantially straight. (It should be recognized that the “square” is a subset of “rectangular.”) It should be noted that while rounded corners of the cavity opening and
25 of the surrounding inner wall do not impact the distribution of light in a significant way, such rounding provides advantages during manufacturing of the inventive lens. In particular, the minimizing of sharpness at corners facilitates accurate molding of the inventive lens.

In certain embodiments, the end surface portion includes front and back
30 segments each extending inwardly from the respective front and back surface portions. Each of the segments may be angled with respect to the other. In some embodiments,

the back segment extends from the back surface portion in a direction toward the board, and in some the front segment extends from the front surface portion in a direction toward the board.

Each of the front and back segments of the end surface portion may extend
5 inwardly from the opposite inner lateral surface portions to positions progressively farther from the board. The back segment may extend to positions farther from the board than the front segment.

In certain embodiments, each of the front and back segments includes a substantially concave middle portion and a pair of opposite substantially convex
10 lateral portions adjoining the substantially convex middle portion. The end surface portion may extend from the inner lateral surface portions. In some of these embodiments, the back segment extends from the back surface portion in a direction toward the board, and in some the front segment extends from the front surface portion in a direction toward the board.

The intermediate surface is positioned and configured for reflecting light
15 received from the front and back inner surface portions toward the outer output surface. In some embodiments, the intermediate surface includes front and back reflective surface portions positioned and configured to reflect light received from the front and back inner surface portions, respectively. The front and back reflective
20 surface portions extend away from the axis radially outwardly of the front and back inner surface portions, respectively. The front reflecting surface portion may have a front curvature configuration which differs from a back curvature configuration of the back reflecting surface portion. It should be understood that the term "curvature" refers to a three-dimensional curved surface. The front and back reflecting surface
25 portions may each be bilaterally symmetric.

In some embodiments, the back reflecting surface portion terminates at a greater distance from the board than the front reflecting surface portion, and in some the back reflecting surface portion terminates at a greater distance from the axis than the front reflecting surface portion.

30 The intermediate surface may further include a pair of intermediate lateral surface portions each adjoining the front and back reflective surface portions such that

the intermediate surface extends continuously around the inner surface. In some of such embodiments, the front and back reflective surface portions are disposed at distances from the board which are greatest along the front and back, respectively, and gradually decrease toward the lateral surface portions. The intermediate lateral surface portions may be substantially free of receiving light from the inner surface.

The intermediate lateral surface portions may have substantially-identical lateral curvatures which differ from the configurations of the front and back curvatures. Another aspect of the rounded corners of the cavity opening and a base edge of the intermediate surface is that such rounding provides smooth transition from the lateral curvatures to the front and back curvatures of the intermediate surface.

In certain embodiments, the outer output surface includes a main output surface portion transverse the axis. In some of such embodiments, the main-output surface portion defines a pair of substantially convex lateral sectors with a front-to-back concavity therebetween for refracting lateral light received from the inner surface laterally away from the axis to facilitate wide lateral-angle distribution. The main output surface portion may be configured for refracting forward and rearward light received from the inner front and back surface portions away from the axis to facilitate uniform distribution of light. To further facilitate uniform distribution of light, the main output surface may be configured for refracting light received from the front and back reflecting surface portions toward the axis.

In some embodiments, the outer output surface includes an outer lateral surface portion which extends from the main output surface portion toward the board. The outer lateral surface portion may be configured for refracting light received from the inner surface toward the axis to facilitate uniformity of the illumination pattern.

The outer lateral surface portion may be substantially parallel to the axis.

In certain embodiments, the outer lateral surface portion is defined by an outer surrounding wall which extends from the main output surface portion and the intermediate surface toward the board. In some of such embodiments, the outer lateral surface portion has a substantially right cylindrical shape of substantially circular cross-sections taken in planes parallel to the board.

Some versions of the inventive lens may include an outward flange extending from the outer surrounding wall away from the axis.

In certain embodiments, the inventive lens is bilaterally symmetric in a front-to-back direction.

5 Another aspect of this invention involves a lighting apparatus which includes a plurality of LED light sources spaced along a circuit board, each of the LED light sources defining an axis. The lighting apparatus includes a plurality of lenses according to the present invention, each lens over a corresponding one of the LED light sources.

10 In some embodiments, the lighting apparatus includes a one-piece lensing member which includes a plurality of lens portions interconnected by a flange portion. In such embodiments, each of the lens portions includes one of the plurality of the lenses.

 When the inventive lens is installed for illumination of a surface such as a
15 billboard of a transportation sign, the configuration of the inner end surface portion in combination with the configuration of the main output surface facilitates directing light for an extended lateral distance along the longer dimension of the illuminated surface. In such applications, the combination of the reflecting surface portions and the configuration of the main output surface narrows the front-to-back light spread to
20 provide desirable maximum illumination along substantially the entirety of the shorter dimension of the illuminated surface. This creates a long and narrow illumination pattern that meets the needs for sign or billboard illumination, but may also be used for illuminating facades of buildings and other surfaces.

 The light source may include at least one light-emitting diode (LED). Such
25 light source may be an LED emitter which may include a single LED (or a closely-spaced group of LEDs) mounted either directly on the board (*e.g.*, a circuit board) or in the form of an LED package with the LED(s) on a submount on the board. The LED emitter may include what is commonly referred to as a primary lens over the LED(s). In some embodiments, the inventive lens is a so-called secondary lens placed
30 over the primary lens. In some other embodiments, the lens according to the present invention is the primary lens directly over the LED(s).

The term “transverse,” as used herein in reference to the main output surface with respect to the emitter axis, means that this surface intersects the emitter axis.

As used herein in referring to portions of the devices of this invention, the terms “upward,” “upwardly,” “upper,” “downward,” “downwardly,” “lower,” “upper,”
5 “top,” “bottom” and other like terms assume that the light fixture is in its usual position of use and do not limit the invention to any particular orientation.

In descriptions of this invention, including in the claims below, the terms “comprising,” “including” and “having” (each in their various forms) and the term “with” are each to be understood as being open-ended, rather than limiting, terms.

10

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a transparent perspective view of one embodiment of the lens of the present invention showing the lens from the light-output side.

FIGURE 2 is a transparent perspective view showing the lens of FIGURE 1
15 from the board side.

FIGURE 3 is a transparent output-side plan view of the embodiment of the lens of FIGURE 1.

FIGURE 4 is a transparent board-side plan view of the embodiment of the lens of FIGURE 1.

FIGURE 5 is a transparent lateral elevation of the embodiment of the lens of
20 FIGURE 1.

FIGURE 6 is a transparent front elevation of the embodiment of the lens of FIGURE 1.

FIGURE 7 is a transparent back elevation of the embodiment of the lens of
25 FIGURE 1.

FIGURE 8 is an opaque perspective view showing the lens of FIGURE 1 from the light-output side.

FIGURE 9 is an opaque perspective view showing the lens of FIGURE 8 from the board side.

FIGURE 10 is an opaque output-side plan view of the lens of FIGURE 8.

FIGURE 11 is an opaque board-side plan view of the lens of FIGURE 8.

FIGURE 12 is an opaque lateral elevation of the lens of FIGURE 8.

FIGURE 13 is an opaque front elevation of the lens of FIGURE 8.

FIGURE 14 is an opaque back elevation of the lens of FIGURE 8.

FIGURE 15 is a side-to-side sectional view of the lens of FIGURE 1 taken
5 along section 15-15 shown in FIGURE 3.

FIGURE 16 is a front-to-back sectional view of the lens of FIGURE 1 taken
along section 16-16 shown in FIGURE 4.

FIGURE 17 is another side-to-side sectional view schematically illustrating
lateral aspects of the near-field light distribution of the lens.

10 FIGURE 18 is a ray-trace schematically illustrating far-field lateral light
distribution of the lens as shown in FIGURE 17.

FIGURE 19 is another front-to-back sectional view schematically illustrating
aspects of the near-field forward and rearward light distribution of the lens.

FIGURE 20 is a ray-trace schematically illustrating far-field forward and
15 rearward light distribution of the lens as shown in FIGURE 19.

FIGURE 21 is a front view of a three-dimensional polar intensity distribution
by a lens according to the present invention.

FIGURE 22 is a side view of a three-dimensional polar intensity distribution
by a lens according to the present invention.

20 FIGURE 23 is another transparent perspective view of the embodiment of the
lens of FIGURE 1 showing the lens from the back side.

FIGURE 24 is a two-dimensional top view ISO plot of luminance intensity by
a lens according to the present invention on an illuminated surface.

FIGURE 25 is a photographic luminance rendering of a 14' x 48' billboard.

25 FIGURE 26 is a schematic illuminance view of a 14' x 48' billboard.

FIGURE 27 is an enlarged perspective view of one example of an LED
package and including an array of eight LEDs on a submount and an asymmetric
primary lens overmolded over the LED array.

FIGURE 28 is an enlarged perspective view of another example of an LED
30 package and including an array of forty-eight LEDs on a submount and an asymmetric
primary lens overmolded over the LED array.

FIGURE 29 is an enlarged perspective of yet another example of an LED package which has a single LED on a submount with a hemispheric primary lens overmolded over the LED.

FIGURE 30 is an enlarged side view of the LED package of FIGURE 29.

5 FIGURE 31 is an enlarged top view of the LED package of FIGURE 29.

FIGURE 32 is an enlarged top view of another exemplary LED package including an array of four LEDs on a submount and a hemispheric primary lens overmolded over the LED array such that the axis of the primary lens is offset from the axis of the LED array.

10 FIGURE 33 is a side-to-side sectional view of one embodiment of a lighting apparatus including a plurality of lenses over a plurality of light sources and schematically illustrating lateral aspects of the near-field light distribution of such lighting apparatus.

FIGURE 34 is a side-to-side sectional view of another embodiment of the
15 lighting apparatus including a one-piece lensing member incorporating a plurality of the lenses each according to the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

FIGURES 1-26 show aspects of an exemplary embodiment of a lens 10 in
20 accordance with this invention. Lens 10 is configured for directing light from a light source 20 on a board and defining an axis 6. The light source may be an LED emitter which includes a single LED (or a closely-spaced group of LEDs) mounted either directly on the board or in the form of an LED package with the LED(s) on a submount on the board. A primary lens may be disposed over the LED(s). In such
25 embodiments, lens 10 is a secondary lens placed over the primary lens as seen in FIGURES 17 and 19.

FIGURES 1-7, 15 and 17 illustrate lens 10 which includes a board-adjacent
base 11 spaced from and around axis 6, an inner surface 30, an intermediate surface
40 and an outer output surface 50. As seen in FIGURES 17 and 19, outer output
30 surface 50 is configured for refracting light received from inner surface 30 and

intermediate surface 40. As best seen in FIGURES 2, 9, 15 and 16, base 11 forms an opening 12 into a light-receiving cavity 13 defined by inner surface 30.

FIGURES 3-7 show lens 10 being bilaterally symmetric in a front-to-back direction.

5 It is best seen in FIGURES 1, 2, 9, 16 and 23 that inner surface 30 includes substantially planar front and back surface portions 31 and 32 and an end surface portion 33 spanning cavity 13 between front and back surface portions 31 and 32. FIGURES 2 and 23 best illustrate each of front and back surface portions 31 and 32 extending from opening 12 to terminate at end surface portion 33.

10 As seen in FIGURES 1, 2, 5-7 and 23, inner surface 30 also includes a pair of substantially planar lateral surface portions 34 each extending from opening 12 between front and back surface portions 31 and 32. FIGURES 5-7, 15-17 and 19 best show, each being substantially parallel to axis 6. FIGURES 1-4 and 23 show that inner front and back surface portions 31 and 32 are substantially orthogonal to inner
15 lateral surface portion 34.

FIGURES 4 and 11 illustrate cavity opening 12 substantially rectangular with inner front, back and lateral surface portions 31, 32 and 34, respectively, each extending from one of four sides of opening 12. Rounded corners 120 of opening 12 and 130 of cavity 13 provide advantages during manufacturing of lens 10 by
20 facilitating accurate molding of the lens surfaces.

As best seen in FIGURES 1, 2, 16 and 23, end surface portion 33 includes front and back segments 35 and 36 each extending inwardly from front and back surface portions 31 and 32, respectively. Back segment 36 extends from back surface portion 32 in a direction toward base 11, and front segment 35 extends from front
25 surface portion 31 in a direction toward base 11.

FIGURES 1, 6, 7 and 23 show each of front and back segments 35 and 36 of end surface portion 33 extending inwardly from the opposite inner lateral surface portions 34 to positions progressively farther from base 11. Back segment 36 extends to positions farther from base 11 than front segment 35, as best seen in FIGURE 16.
30 Each of segments 35 and 36 are angled with respect to the other, as seen FIGURES 16 and 23. Such angled configuration provides initial spreading of high concentration of

light emitted within about 30° angle around axis 6 by spreading the light away from the hot spot location immediately about axis 6 and removing so-called hot spots along axis 6 by refracting the light away from the hot spot location immediately about axis 6, as seen in FIGURE 19.

5 As best seen in FIGURES 1, 2, 6, 7 and 15, front segment 35 includes a substantially concave middle portion 351 and a pair of opposite substantially convex lateral portions 352 and adjoining substantially concave middle portion 351. Back segment 36 also includes a substantially concave middle portion 361 and a pair of opposite substantially convex lateral portions 362 and adjoining substantially convex
10 middle portion 361. The concave shape of middle portions 351 and 361 end surface portion 33 provides lateral spread of light emitted within about 50° angle around emitter axis 6, thereby providing broad light distribution (schematically shown in FIGURE 17) beneficial for wide-lateral angle illumination patterns. The convex shape of lateral portions 352 and 362 provides initial direction of light emitted along
15 angles close to board 21 toward useful angles between board 21 and axis 6.

FIGURE 19 also shows that intermediate surface 40 is positioned and configured for total internal reflection (TIR) of light received from front and back inner surface portions 32 and 33 toward outer output surface 50. It is best seen in FIGURES 16, 19 and 23 that intermediate surface includes front and back reflective
20 surface portions 41 and 42. FIGURE 19 shows that front and back reflective surface portions 41 and 42 are positioned and configured to receive light from front and back inner surface portions 31 and 32, respectively, and reflect such light through TIR toward outer output surface 50. As best seen in FIGURES 2, 9 and 23, front and back reflective surface portions 41 and 42 extend from base 11 away from axis 6 radially
25 outwardly of front and back inner surface portions 31 and 32, respectively. It is further seen in FIGURES 5, 16 and 23 that front reflecting surface portion 41 has a front curvature configuration 410 which differs from a back curvature configuration 420 of back reflecting surface portion 42. FIGURES 4, 6, 7 and 11 show that front and back reflecting surface portions 41 and 42 are bilaterally symmetric.

30 As illustrated in FIGURES 5, 6, 16, 19 and 23, back reflecting surface portion 42 terminates at a greater distance 43 from base 11 than front reflecting surface

portion 41. It is best seen in FIGURE 16 that back reflecting surface portion 42 also terminates at a greater distance 442 from axis 6 than distance 441 at which front reflecting surface portion 41 terminates from axis 6 .

FIGURES 2, 9, 11 and 15 show intermediate surface 40 further includes a pair
5 of intermediate lateral surface portions 45 each adjoining front and back reflective surface portions 41 and 42 such that intermediate surface 40 extends continuously around inner surface 30. Front and back reflective surface portions 41 and 42 are at distances from base 11 which are greatest along front and back 1 and 2, respectively, and gradually decrease toward lateral surface portions 45. FIGURE 17 shows
10 intermediate lateral surface portions 45 positioned and configured to be substantially free of receiving light from inner surface 30.

As best seen in FIGURES 11 and 15, intermediate lateral surface portions 45 have substantially identical lateral curvatures 450 which differ from configurations of front and back curvatures 410 and 420. FIGURES 2, 4, 9 and 11 also show that
15 rounded corners 140 of a base edge 14 of intermediate surface 40 provide smooth transition from lateral curvatures 450 to front and back curvatures 410 and 420 of intermediate surface 40.

FIGURES 1, 5-8, 13-17, 19 and 23 show outer output surface 50 including a main output surface portion 51 transverse axis 6. It is best shown in FIGURES 6, 7,
20 13-15, 19 and 23 that main-output surface portion 51 defines a pair of substantially convex lateral sectors 52 with a front-to-back concavity 53 therebetween for refracting lateral light received from inner surface 30 further laterally away from axis 6, as seen in FIGURE 17, to facilitate wide lateral-angle light distribution as illustrated in FIGURES 18 and 21.

FIGURE 19 shows main output surface portion 51 configured for refracting
25 forward and rearward light received from inner front and back surface portions 31 and 32 further away from axis 6 to facilitate uniform distribution of light, as seen in FIGURES 20 and 22.

As also seen in FIGURE 19, to further facilitate uniform distribution of light,
30 main output surface 51 is also configured for refracting light received from front and back reflecting surface portions 41 and 42 toward axis 6.

It is also seen in FIGURES 1, 5-8, 15-17, 19 and 23 that outer output surface 50 includes an outer lateral surface portion 54 which extends from main output surface portion 51 toward base 11. FIGURE 17 illustrates outer lateral surface portion 54 configured for refracting light received from inner surface 30 toward axis 6 to facilitate uniformity of the illumination pattern seen in FIGURES 25 and 26. As seen in FIGURES 5-7 and 15-17, outer lateral surface portion 54 is substantially parallel to axis 6.

FIGURES 5, 15-17 and 19 show that outer lateral surface portion 54 is defined by an outer surrounding wall 15 which extends from main output surface portion 51 and intermediate surface 40 toward board 21. As seen in FIGURES 3 and 10, outer lateral surface portion 54 has a substantially right cylindrical shape of substantially circular cross-sections taken in planes parallel to base 11. It should be understood that many other configurations for the outer surrounding wall are possible, including without limitation surfaces generated by movement of a line which is other than straight. In some examples, the outer lateral surface may have various annular shapes, including shapes having different cross-sectional configurations at different positions therealong or shapes angled with respect to the emitter axis.

FIGURES 1-17 also show lens 10 including an outward flange 16 extending from outer surrounding wall 15 away from axis 16. Outward flange 16 is shown as having octagonal perimeter which facilitates mounting of the lens during light-fixture assembly. Flange 16, best shown in FIGURES 3, 4, 10 and 11, also has a lens-type-identifying marking 18 and a locator label 17 which references the lens location in an LED-array module. An orientation between marking 18 and label 17 indicates front and back of the light distribution shown in FIGURE 22. These markings are preferably readable by robotic equipment for correct lens placement and orientation during light-fixture assembly. FIGURES 15 and 16 show flange 15 extending beyond a plane 110 of base 11 with respect to emitter axis 6 in a direction opposite the light emission. FIGURES 17 and 19 show that such spacing allows positioning of plane 110 at the same level with the LED(s) of light source 20 for most efficient capturing of emitted light by inner surface 30.

Another aspect of this invention involves a lighting apparatus which includes a plurality of LED light sources spaced along a circuit board, each of the LED light sources defining an axis. The lighting apparatus includes a plurality of the inventive lenses according to the present invention, each lens over a corresponding one of the LED light sources.

In some embodiments, the lighting apparatus includes a one-piece lensing member which includes a plurality of lens portions interconnected by a flange portion. In such embodiments, each of the lens portions includes one of the plurality of the lenses.

It should be noted that inventive lens 10 has the configuration which is described above and which allows for molding of lens 10 in a single-piece mold. In other words, the lens configuration preferably permits easy removal of the lens from the mold without the need for separating the mold pieces as is the case with some lenses that require multiple-piece molds. The inventive lens can be simply pulled out of the mold.

FIGURES 33 and 34 show another aspect of this invention which involves a lighting apparatus 100 including a plurality of LED light sources 20 spaced along a circuit board 21A. Lighting apparatus 100 includes a plurality of inventive lenses 10 each over a corresponding one of LED light sources 20.

FIGURE 34 shows lighting apparatus 100A which includes a one-piece lensing member 101 which includes a plurality of lens portions 102 interconnected by a flange portion 103. Each of lens portions 102 includes one of the plurality of lenses 10.

FIGURES 25 and 26 schematically illustrate lens 10 being used in light fixtures installed for illumination of a surface 3 such as a billboard of a transportation sign. These figures show that light directed for an extended lateral distance along the longer dimension of illuminated surface 3 such that a minimal number of light fixtures need to be installed. FIGURE 26 shows only two light fixtures illuminating the entire surface 3.

In fixtures utilizing a plurality of emitters, a plurality of LEDs or LED arrays may be disposed directly on a common submount in spaced relationship between the LEDs or LED arrays. This type of LED emitters is sometimes referred to as chip-on-

board LEDs. In some other embodiments, each of on a submount and each of the submounts be mounted on the circuit board. In some of such embodiments, each of the LEDs or LED arrays may be overmolded with a respective primary lens. Lens 10 according to the present invention may form the primary lens over a respective one of the LEDs or LED arrays. In some other embodiments, a plurality of inventive lenses 10 form secondary lenses each over a respective one primary lenses. In some of such embodiments, the plurality of lenses 10 may be molded as a single piece which may have a single flange surrounding each of the plurality of lenses 10, as seen in FIGURE 34.

FIGURES 27-32 show light source 20 including at least one light-emitting diode (LED) 22. Light source 20 may be a light emitter in the form of an LED package 23 which has a primary lens 24 over the at least one LED 22. In such embodiments, lens 10 is a secondary lens placed over primary lens 24. Light emitter 20 may be of the type illustrated in FIGURES 29-31 which show LED package 23D with single LED 22 on a submount 26 and hemispheric primary lens 24D coaxially overmolded on submount 26 over LED 22.

FIGURES 27 and 28 illustrate exemplary LED packages 23A and 23B each including an array of LEDs 22 on an LED-populated area 25 which has an aspect ratio greater than 1, and primary lens 24 being overmolded on a submount 26 over LED-populated area 25. It is seen in FIGURE 28 that the array may include LEDs 22 emitting different-wavelength light of different colors such as including red LEDs along with light green or other colors to achieve natural white light. Light emitters of the type as LED packages 23A and 23B are described in detail in Application Serial No. 13/441,558, filed on April 6, 2012, and in Application Serial No. 13/441,620, filed on April 6, 2012. The contents of both applications are incorporated herein by reference in their entirety.

FIGURES 27, 28 and 32 illustrate versions of LED light emitter 20 configured to refract LED-emitted light in a forward direction 1 (*i.e.*, toward front 1). In each LED package 23A, 23B and 23C, each LED array defines an emitter axis. FIGURES 27 and 28 illustrate primary lens 24A configured to refract LED-emitted light forward. FIGURE 32 shows hemispheric primary lens 24C having a centerline 240 offset from the emitter axis. It should be understood that for higher efficiency, LED emitter 20

may have primary lens having both its centerline offset from the emitter axis and also being shaped for refraction of LED-emitted light toward preferential side 2. In FIGURES 27 and 28, primary lens 24A is shown as asymmetric.

5 While the principles of this invention have been described in connection with specific embodiments, it should be understood clearly that these descriptions are made only by way of example and are not intended to limit the scope of the invention.

CLAIMS

1. A lens for distribution of light from an LED light source on a board and defining an axis, the lens comprising:
- 5 • an inner surface defining a light-receiving cavity and comprising (a) substantially planar front and back surface and (b) an end surface portion spanning the cavity between the front and back surfaces and comprising front and back segments extending inwardly from the front and back surface portions, respectively, and each angled with respect to the other;
- 10 • an outer output surface configured for refracting light received from the inner surface; and
- an intermediate surface positioned and configured for reflecting light received from the inner surface toward the outer output surface.
- 15 2. The lens of claim 1 wherein the back segment extends from the back surface portion in a direction toward the board.
3. The lens of claim 2 wherein the front segment extends from the front surface portion in a direction toward the board.
- 20 4. The lens of claim 1 wherein the inner surface further comprises a pair of substantially planar lateral surface portions each extending from the opening between the front and back surface portions.
- 25 5. The lens of claim 4 wherein the inner front, back and lateral surface portions are substantially parallel to the axis.
6. The lens of claim 5 wherein the inner front and back surface portions are substantially orthogonal to inner lateral surface portion.
- 30

7. The lens of claim 4 wherein each of the front and back segments of the end surface portion extends inwardly from the opposite inner lateral surface portions to positions progressively farther from the board.

5 8. The lens of claim 7 wherein the back segment extending to positions farther from the board than the front segment.

9. The lens of claim 7 wherein each of the front and back segments comprises a substantially concave middle portion and a pair of opposite substantially convex lateral portions, each of the lateral portions extending from one of the inner lateral surface portions and adjoining the substantially convex middle portion.

10

10. The lens of claim 9 wherein the back segment extends from the back surface portion in a direction toward the base plane.

15

11. The lens of claim 10 wherein the front segment extends from the front surface portion in a direction toward the board.

12. The lens of claim 9 wherein the intermediate surface comprises front and back reflective surface portions positioned and configured to reflect light received from the front and back inner surface portions, respectively.

20

13. The lens of claim 12 wherein the front and back reflective surface portions extend from the base away from the axis radially outwardly of the front and back inner surface portions, respectively.

25

14. The lens of claim 13 wherein the front reflecting surface portion has a front curvature configuration which differs from a back curvature configuration of the back reflecting surface portion.

30

15. The lens of claim 14 wherein the front and back reflecting surface portions are each bilaterally symmetric.

16. The lens of claim 14 wherein the back reflecting surface portion
5 terminates at a greater distance from the board than the front reflecting surface portion.

17. The lens of claim 16 wherein the back reflecting surface portion
terminates at a greater distance from the axis than the front reflecting surface portion.
10

18. The lens of claim 14 wherein the intermediate surface further comprises a pair of intermediate lateral surface portions each adjoining the front and back reflective surface portions such that the intermediate surface extends continuously around the inner surface, the intermediate lateral surface portions being substantially
15 free of receiving light from the inner surface.

19. The lens of claim 18 wherein the intermediate lateral surface portions have substantially-identical lateral curvatures which differ from configurations of the front and back curvatures.
20

20. The lens of claim 1 wherein the outer output surface comprises a main output surface portion transverse the axis and defining a pair of substantially convex lateral sectors with a front-to-back concavity therebetween for refracting lateral light received from the inner surface laterally away from the axis to facilitate wide lateral-angle distribution.
25

21. The lens of claim 20 wherein the main output surface portion is configured for refracting forward and rearward light received from the inner front and back surface portions away from the axis to facilitate uniform distribution of light.
30

22. The lens of claim 21 wherein the main output surface is configured for refracting light received from the front and back reflecting surface portions toward the axis to further facilitate uniform distribution of light.

23. The lens of claim 20 wherein the outer output surface further comprises an outer lateral surface portion extending from the main output surface portion toward the board, the outer lateral surface portion being configured for refracting light received from the inner surface toward the axis to facilitate uniformity of the illumination pattern.

24. The lens of claim 23 wherein the outer lateral surface portion is substantially parallel to the axis.

25. The lens of claim 24 wherein the outer lateral surface portion is defined by an outer surrounding wall which extends from the main output surface portion and the intermediate surface toward the board.

26. The lens of claim 25 wherein the outer lateral surface portion has a substantially right cylindrical shape of substantially circular cross-sections taken in planes parallel to the board.

27. The lens of claim 25 further comprising an outward flange extending from the outer surrounding wall away from the axis.

28. The lens of claim 1 being bilaterally symmetric in a front-to-back direction.

29. The lens of claim 1 being a part of a lighting apparatus which comprises:

- a plurality of LED light sources spaced along a circuit board, each of the LED light sources defining an axis; and
- a plurality of the lenses each over a corresponding one of the LED light sources.

30. The lens of claim 29 wherein the lighting apparatus includes a one-piece lensing member comprising a plurality of lens portions interconnected by a common flange portion, each of the lens portions including one of the plurality of the lenses.

1 / 16

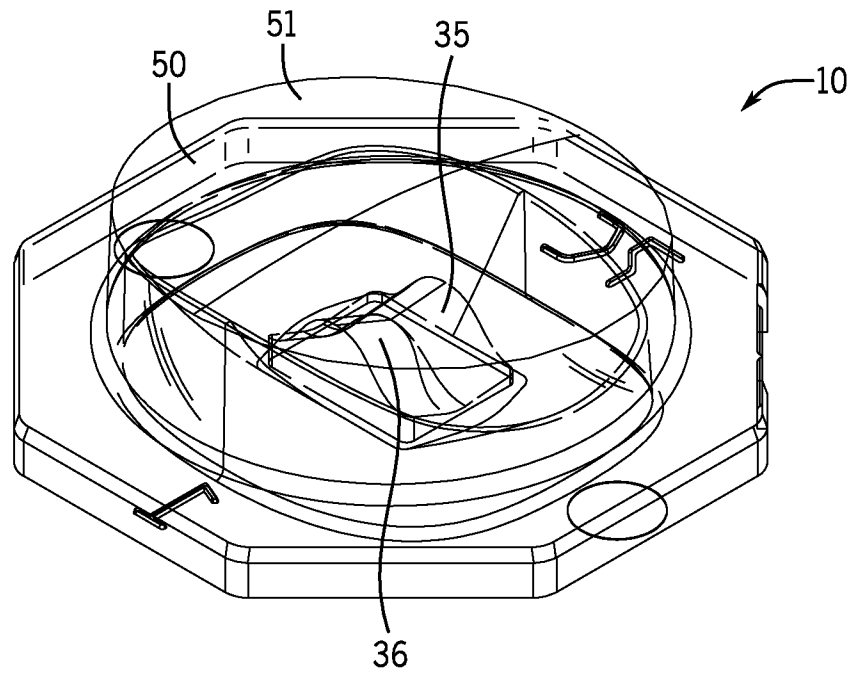


FIG. 1

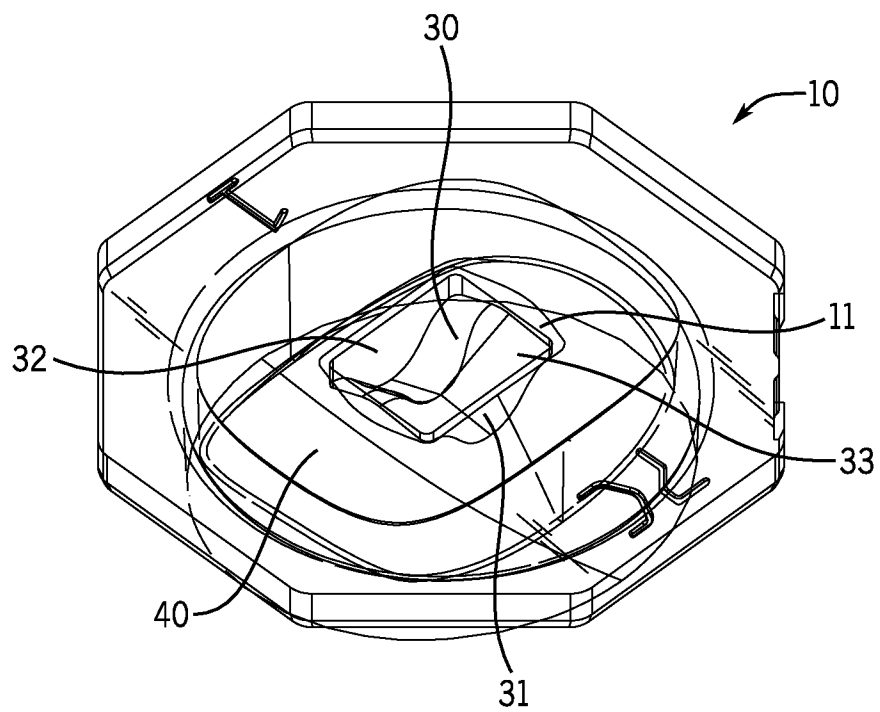


FIG. 2

2 / 16

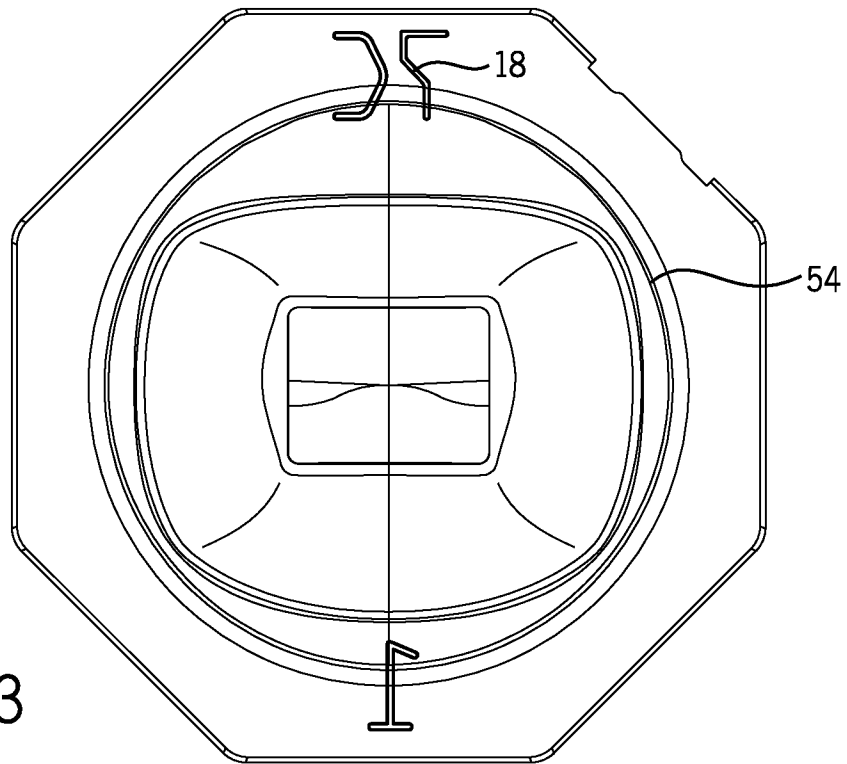


FIG. 3

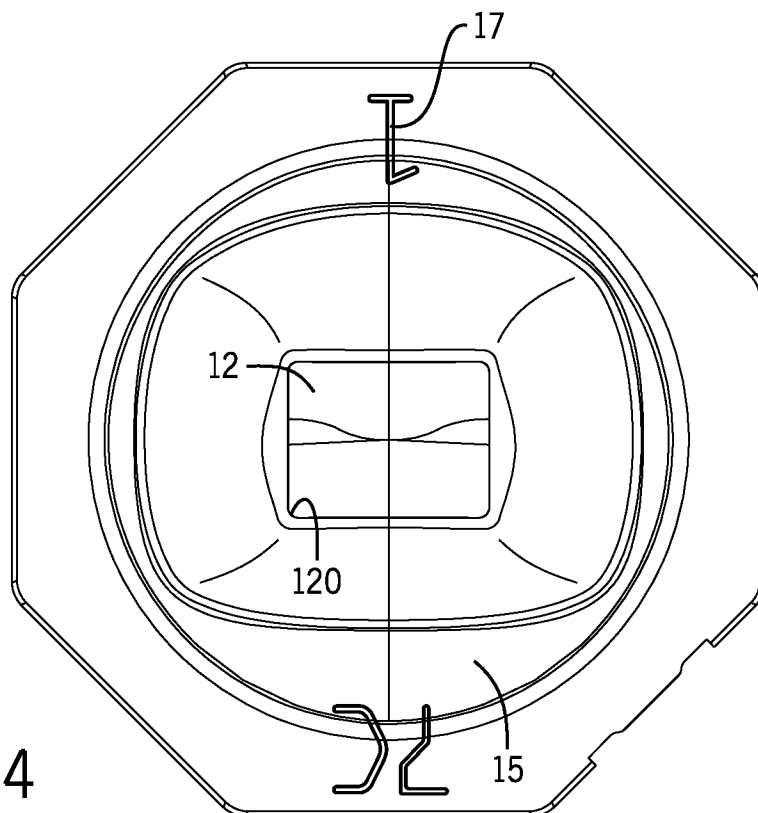


FIG. 4

3 / 16

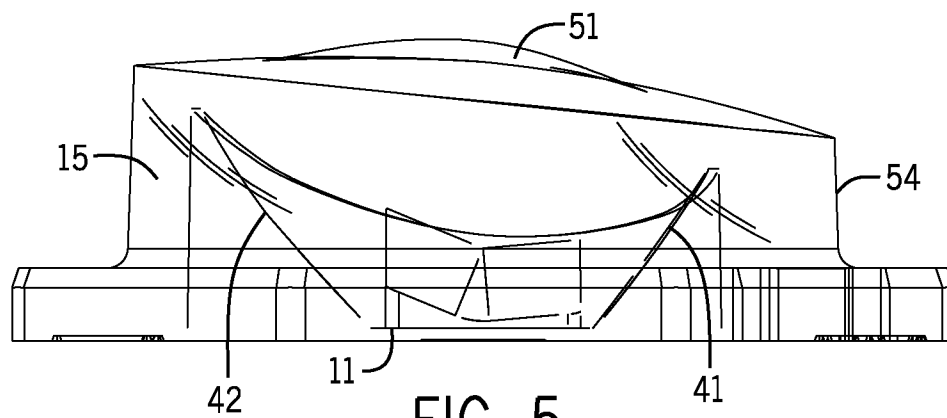


FIG. 5

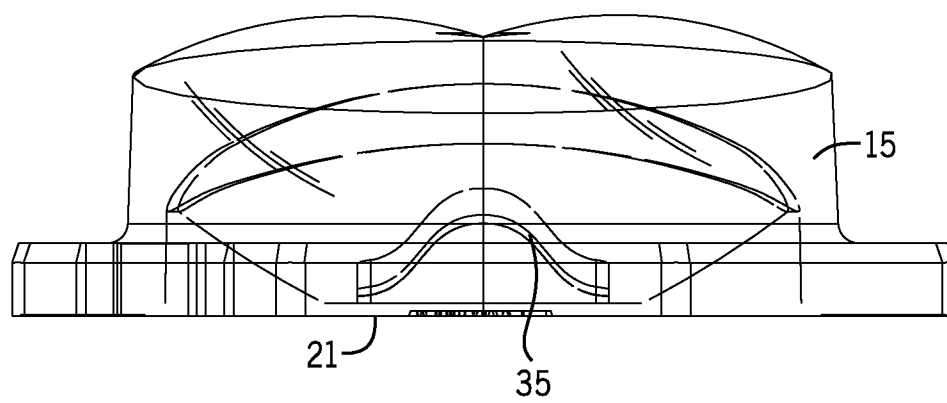


FIG. 6

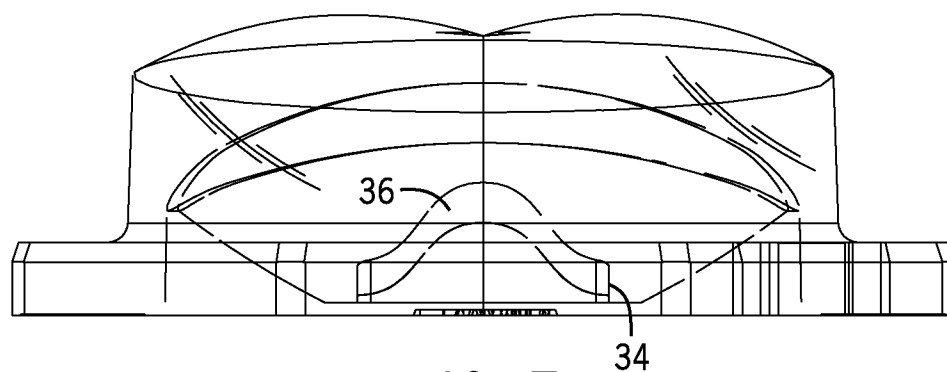


FIG. 7

4 / 16

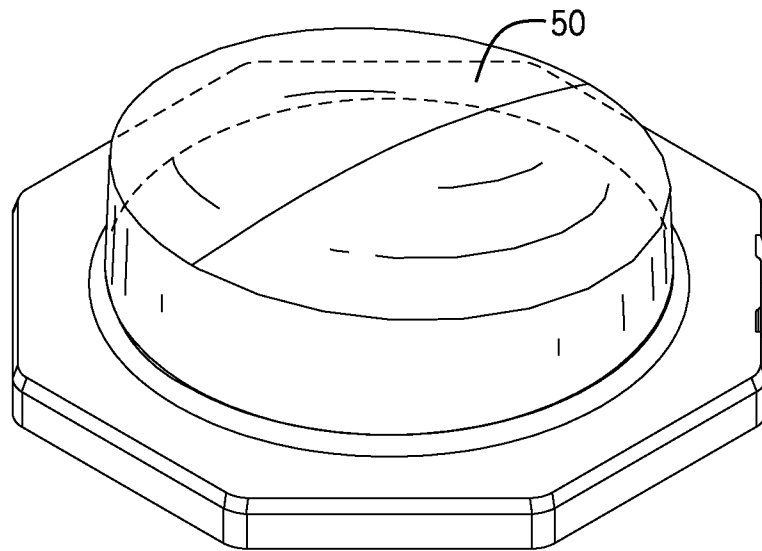


FIG. 8

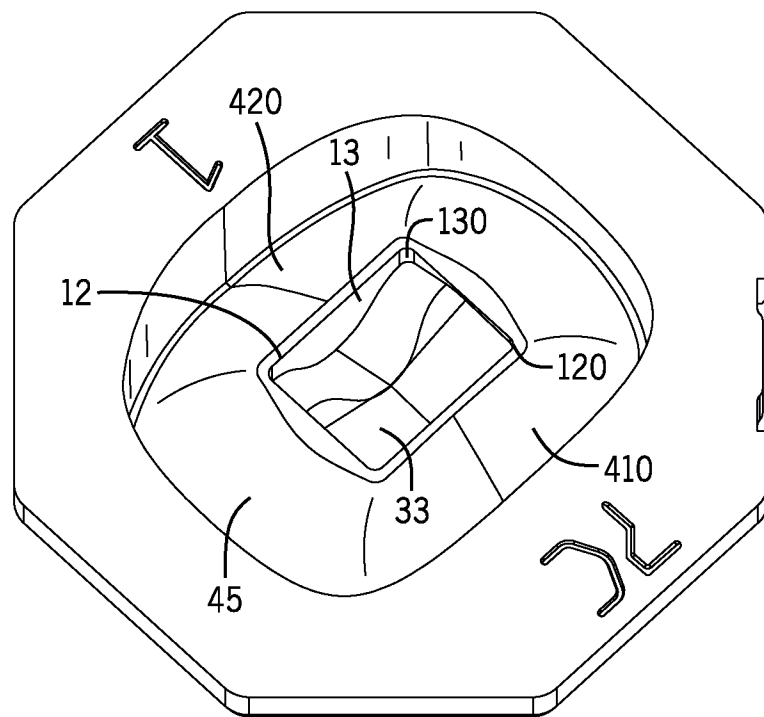


FIG. 9

5 / 16

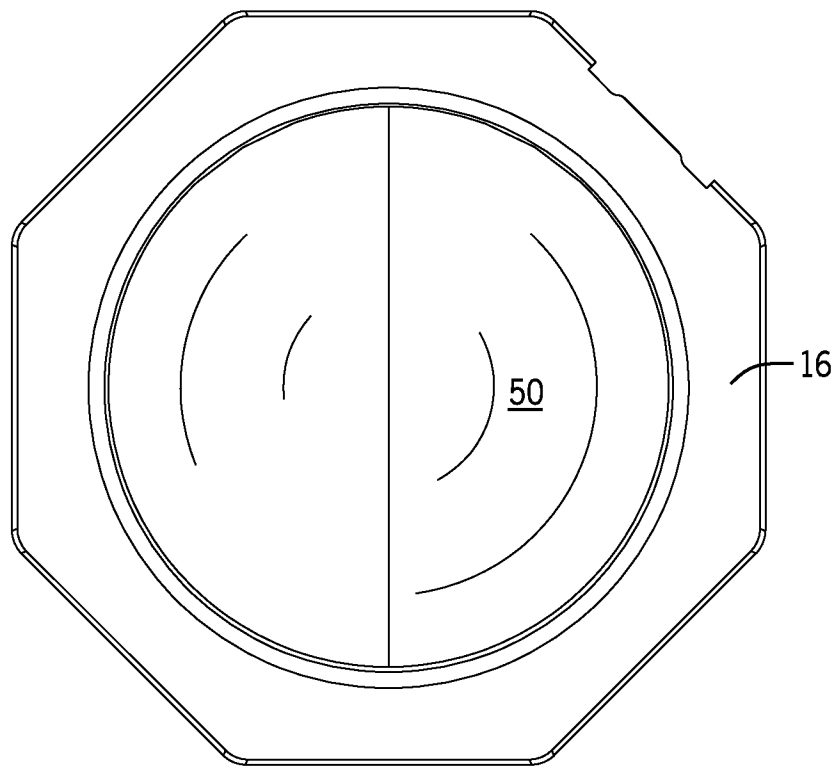


FIG. 10

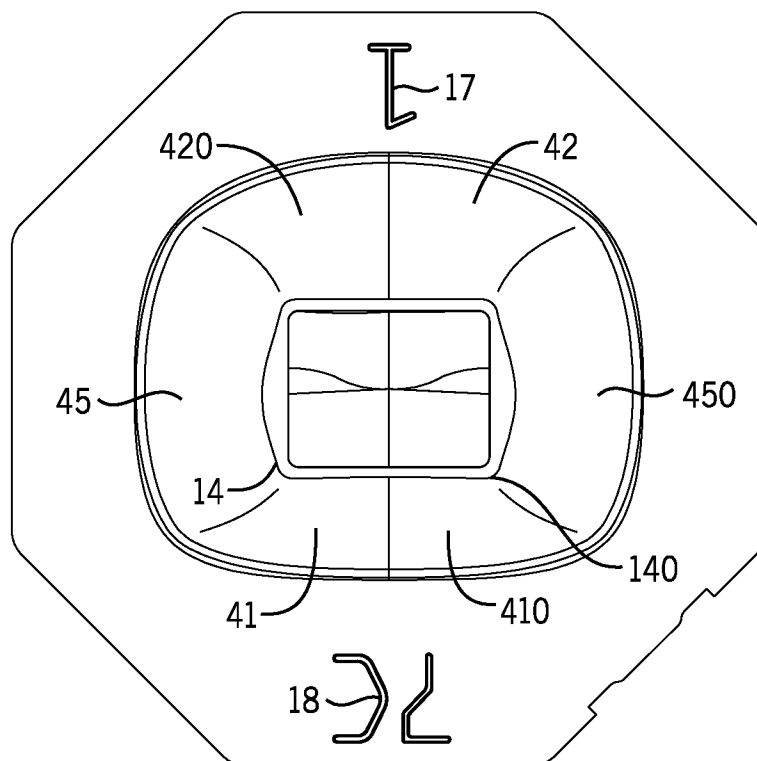


FIG. 11

6 / 16

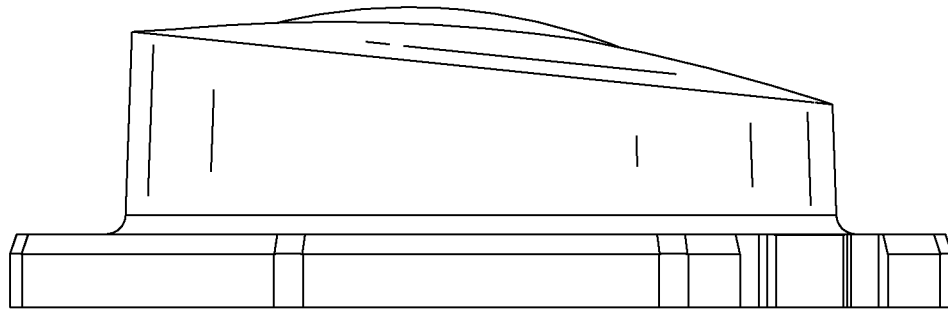


FIG. 12

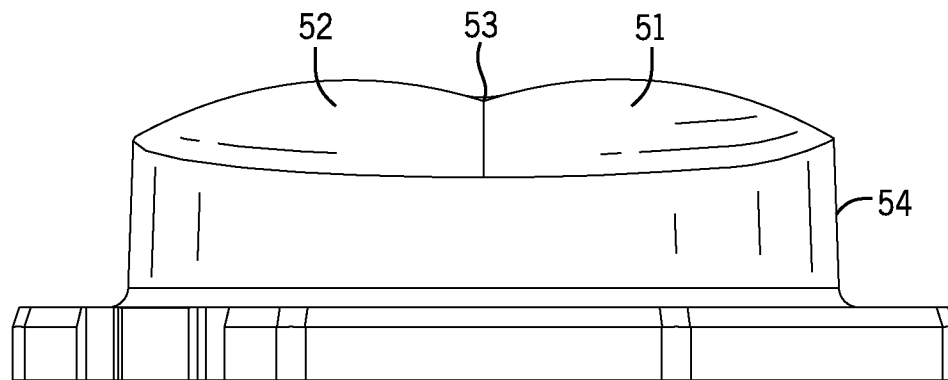


FIG. 13

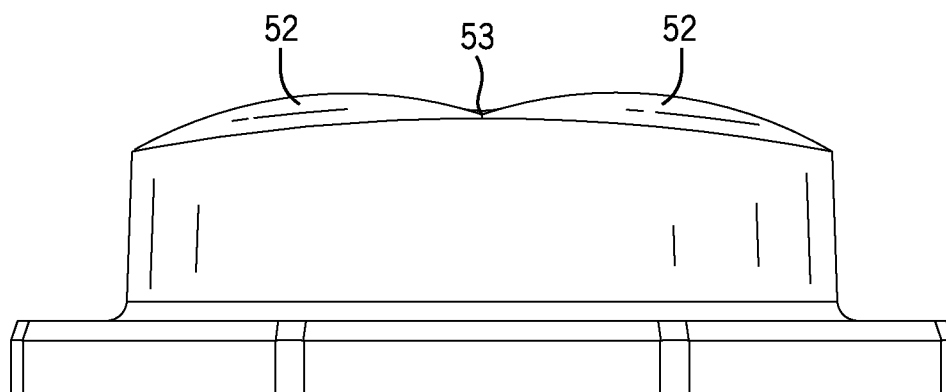


FIG. 14

7 / 16

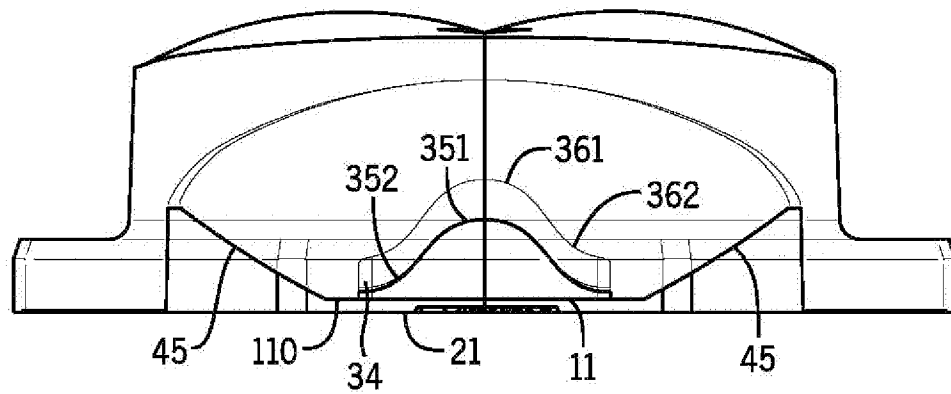


FIG. 15

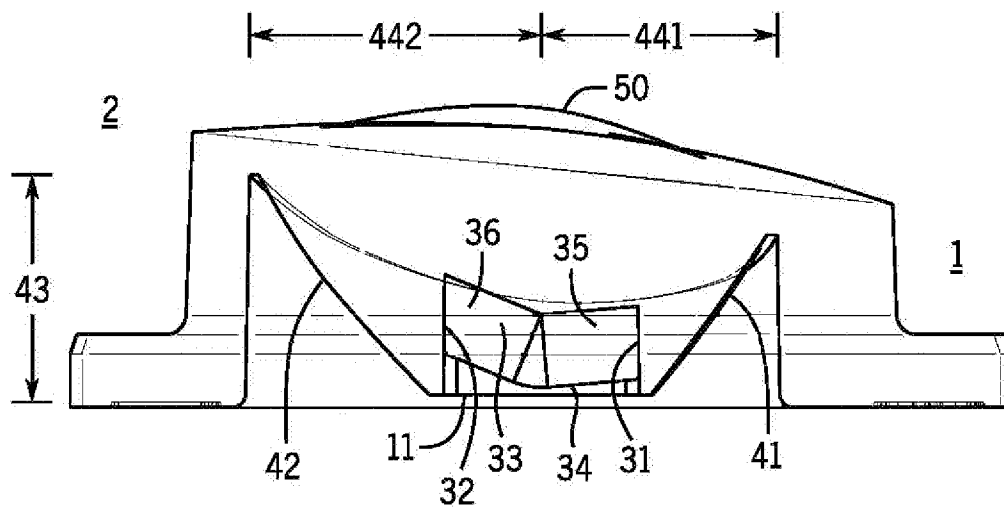


FIG. 16

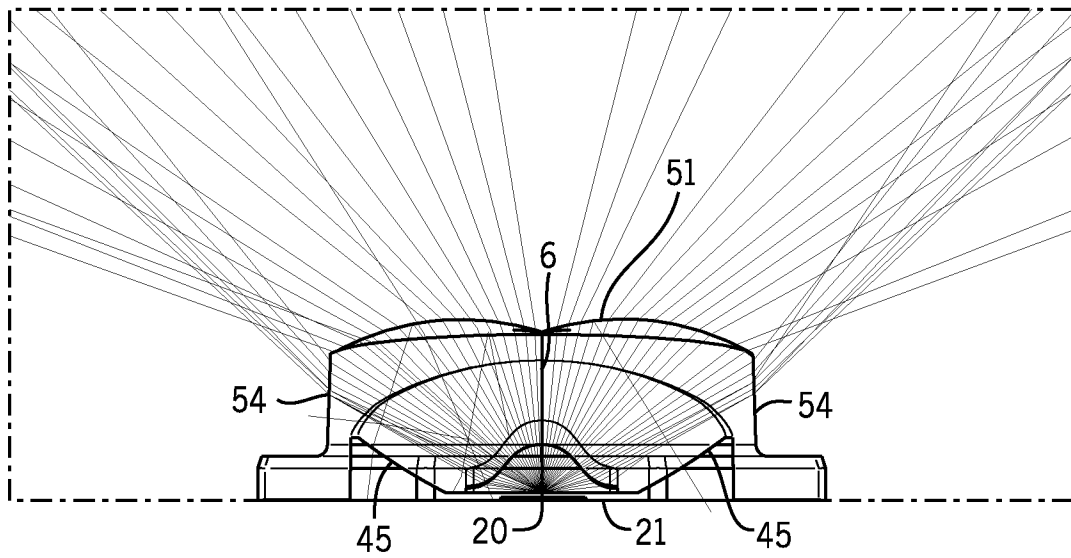


FIG. 17

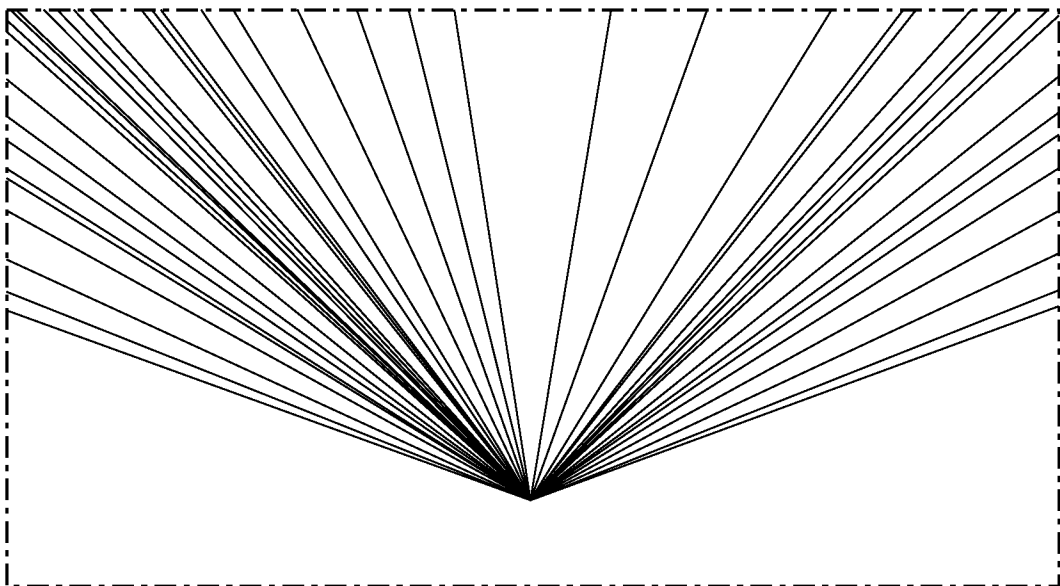


FIG. 18

9 / 16

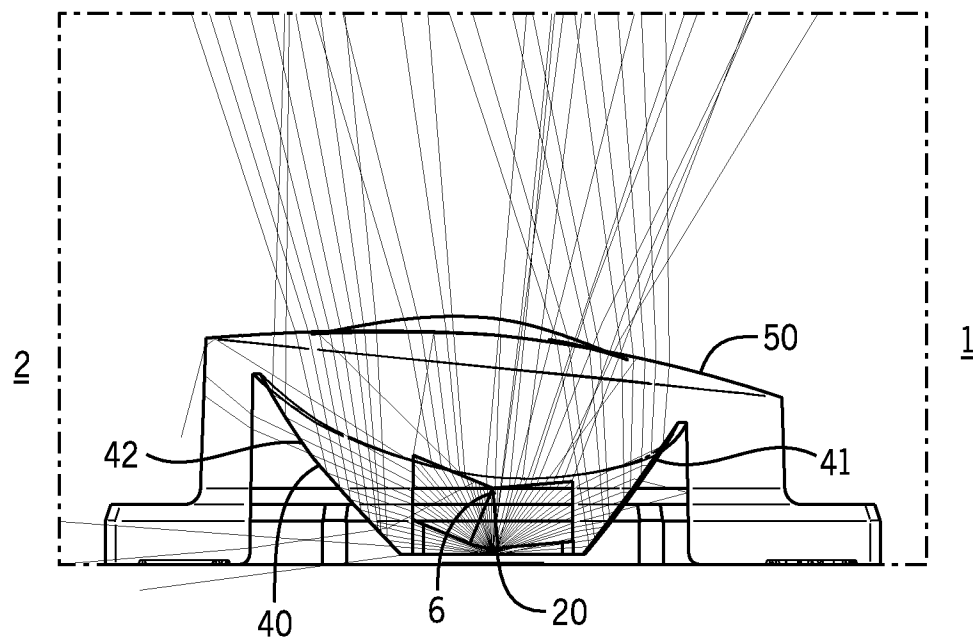


FIG. 19

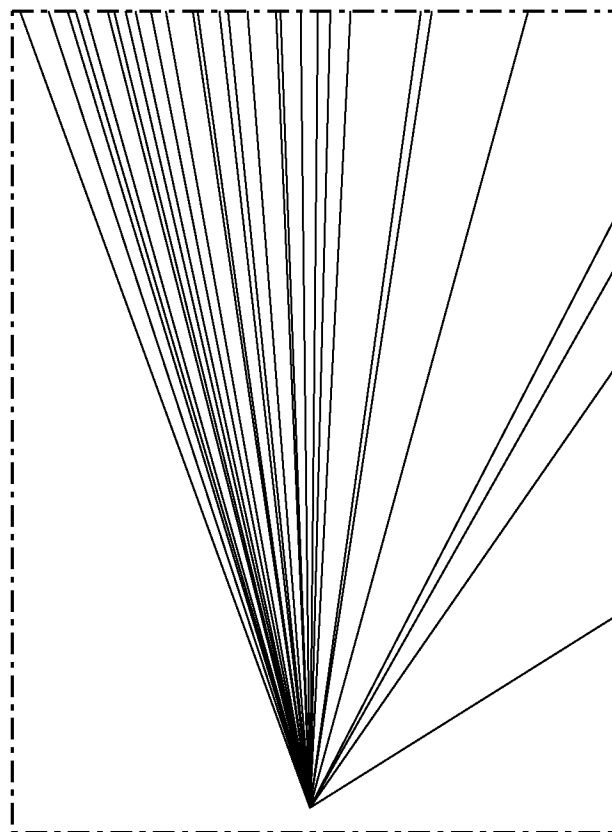


FIG. 20

10 / 16

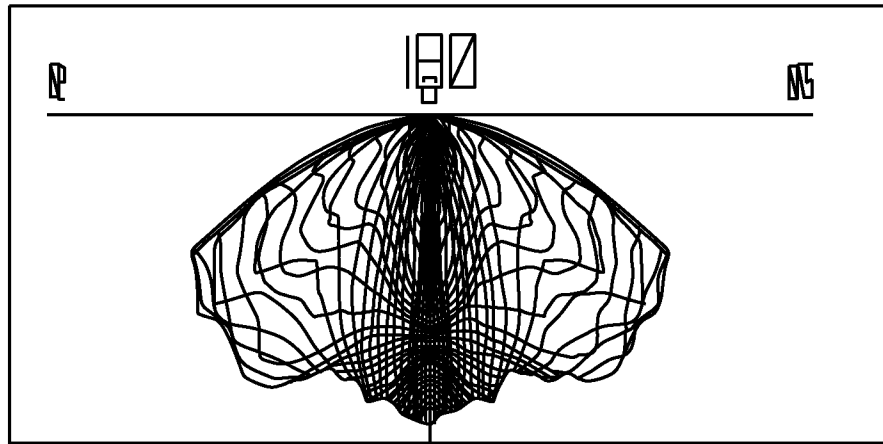


FIG. 21

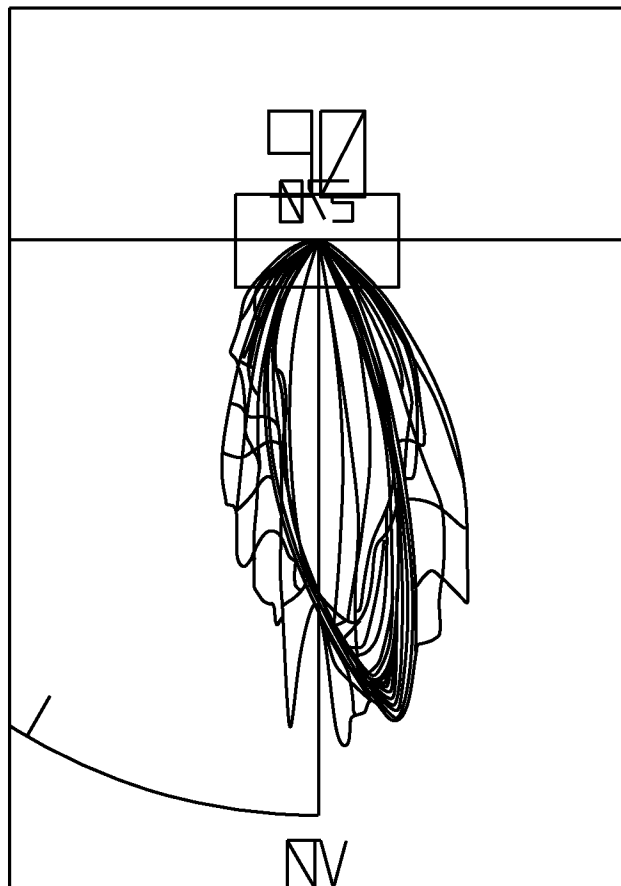


FIG. 22

11 / 16

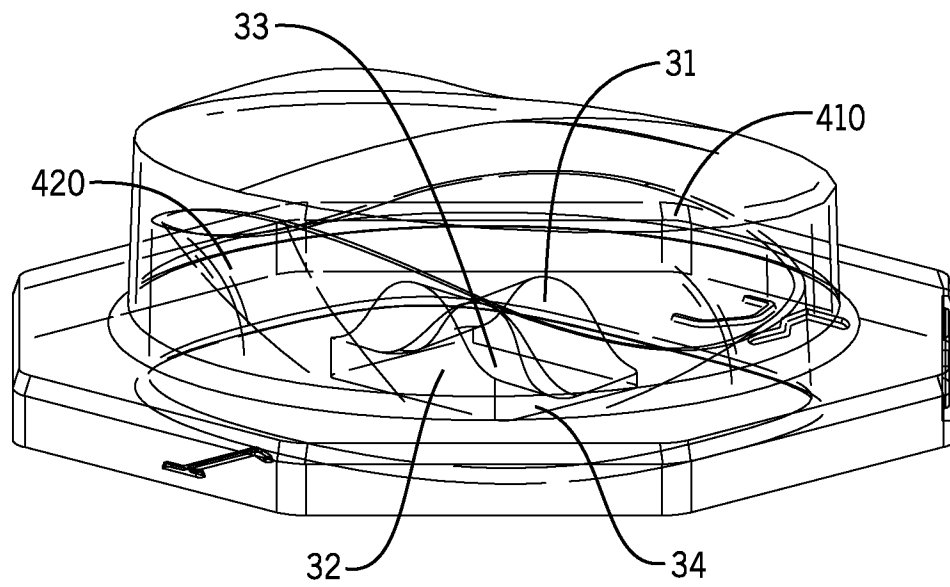


FIG. 23

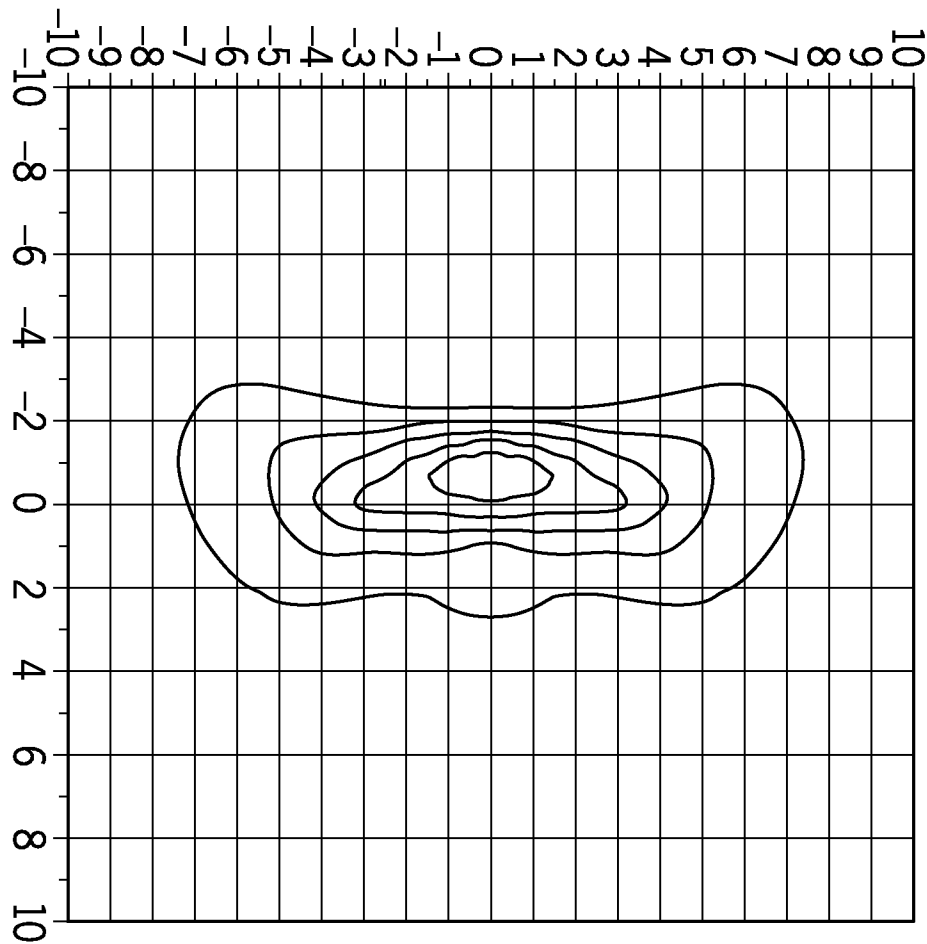


FIG. 24

12 / 16

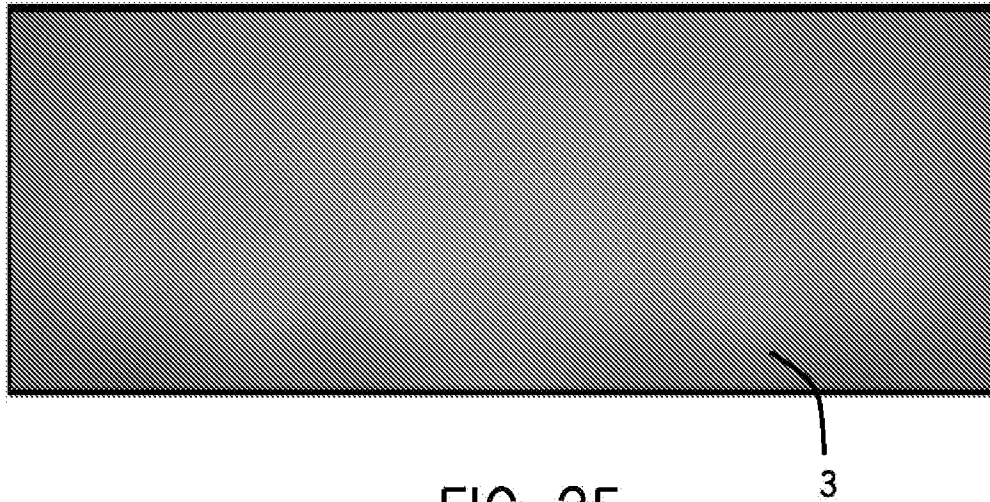


FIG. 25

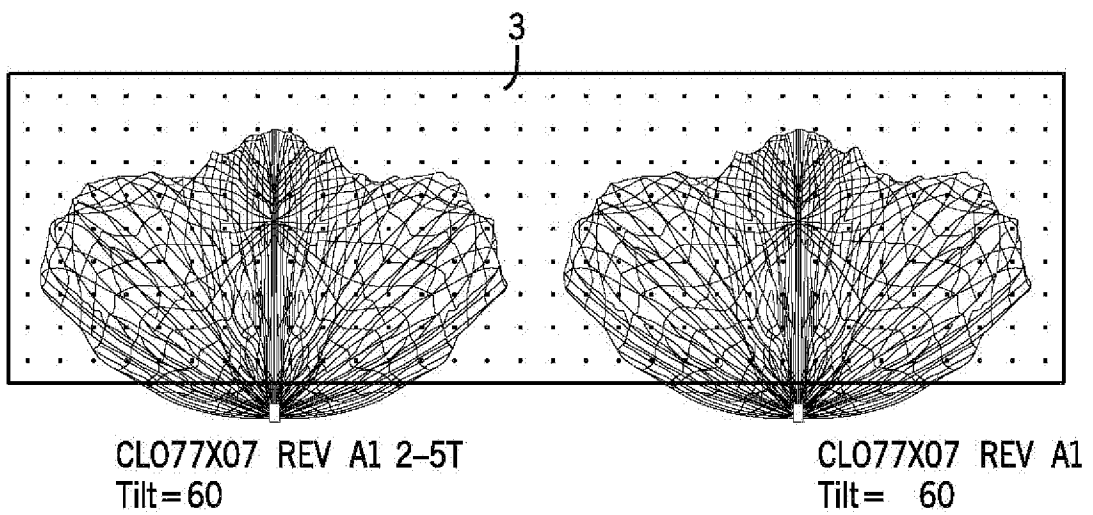
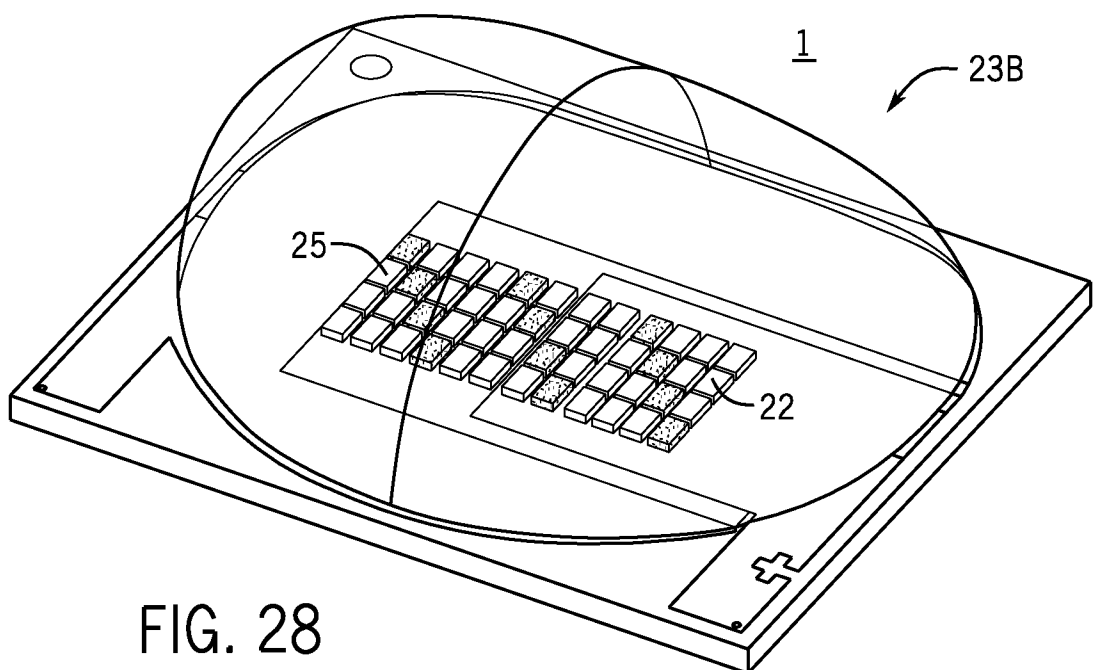
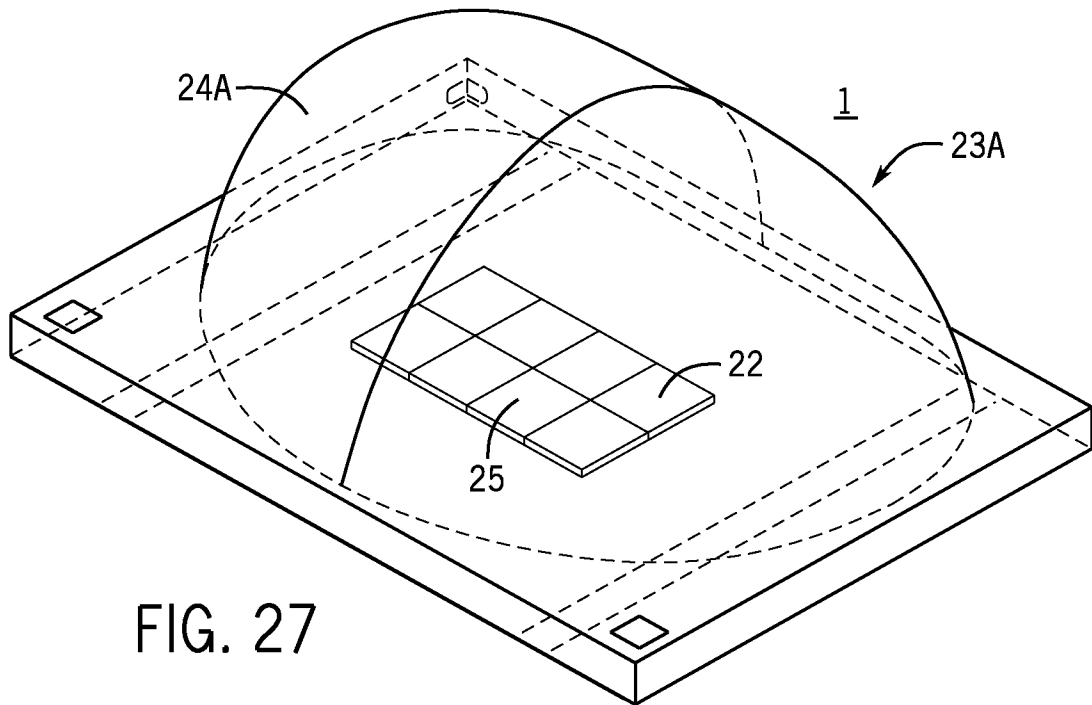


FIG. 26



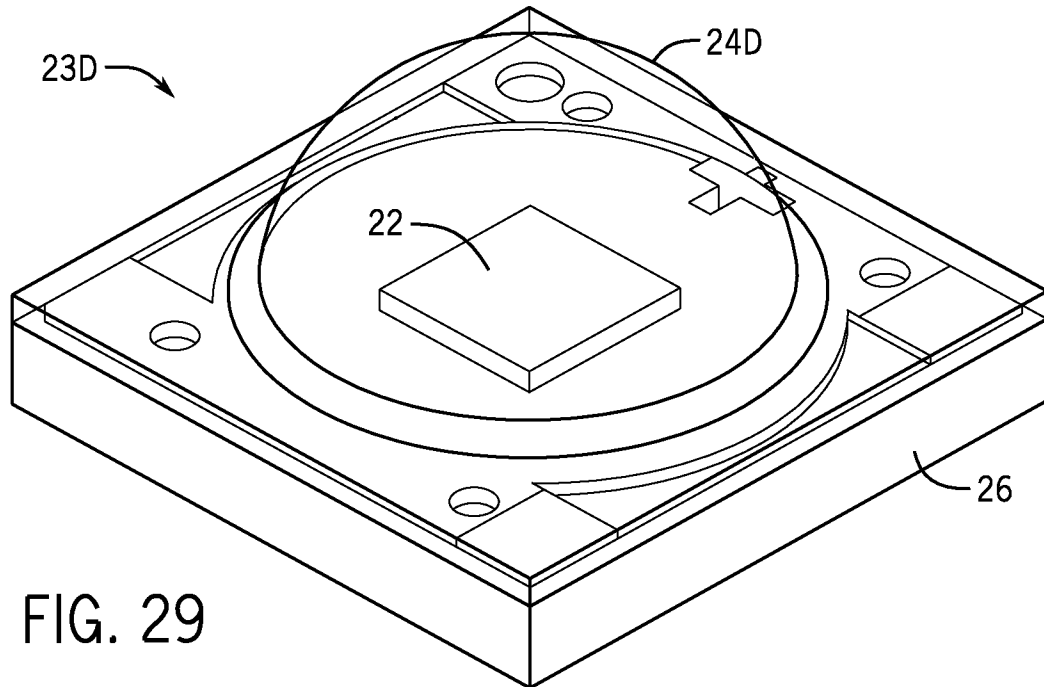


FIG. 29

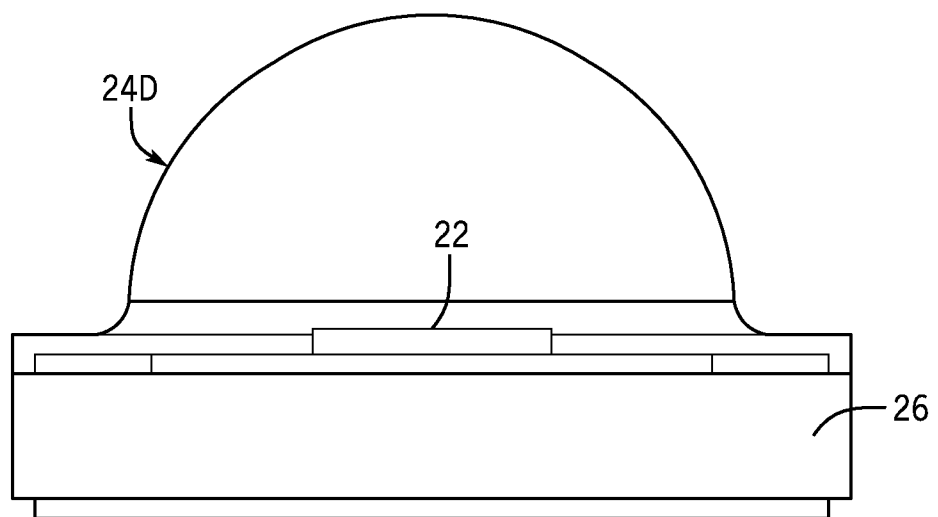


FIG. 30

FIG. 31

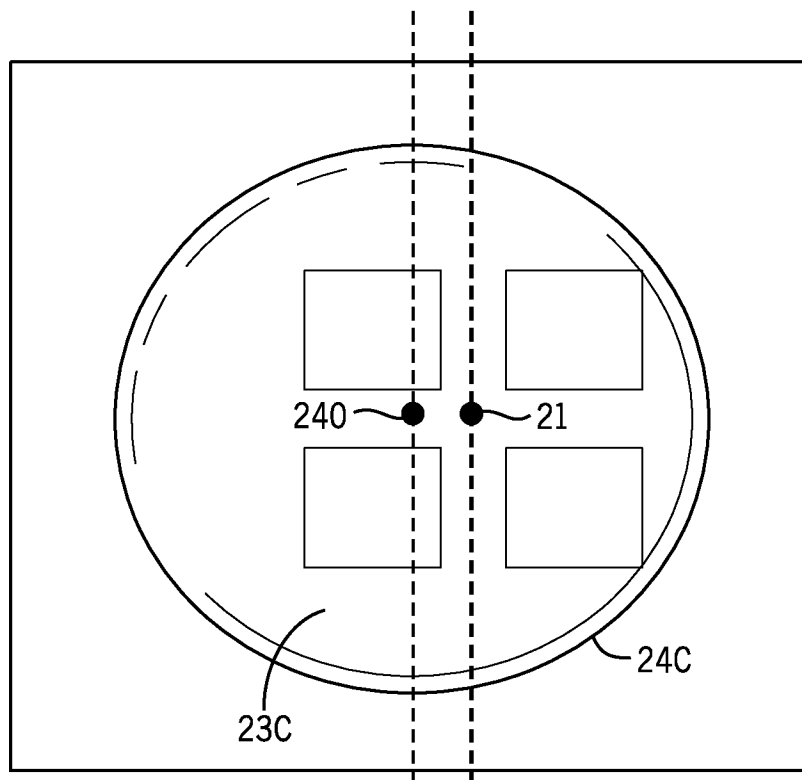
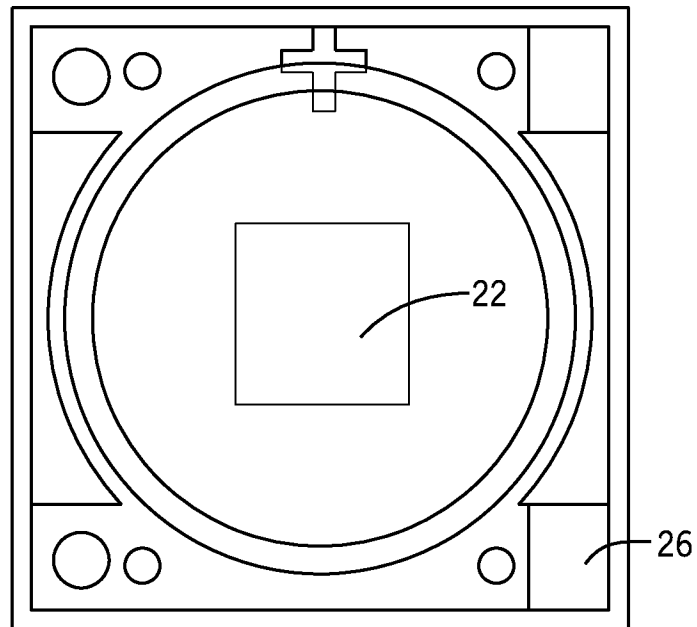


FIG. 32

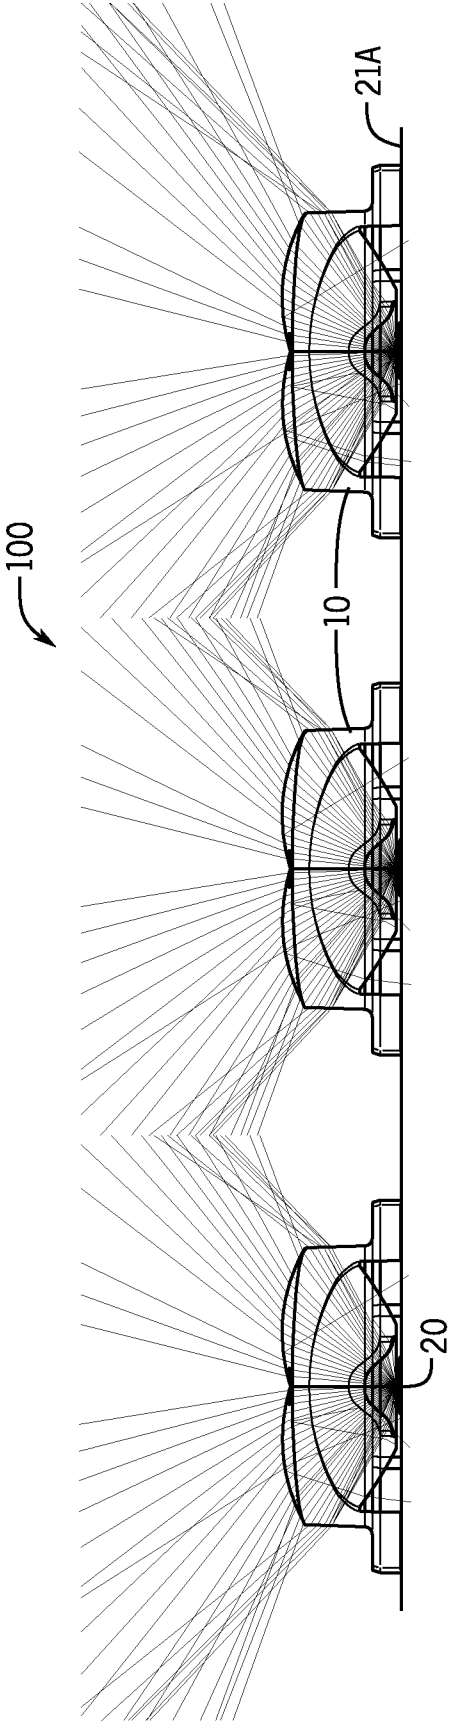


FIG. 33

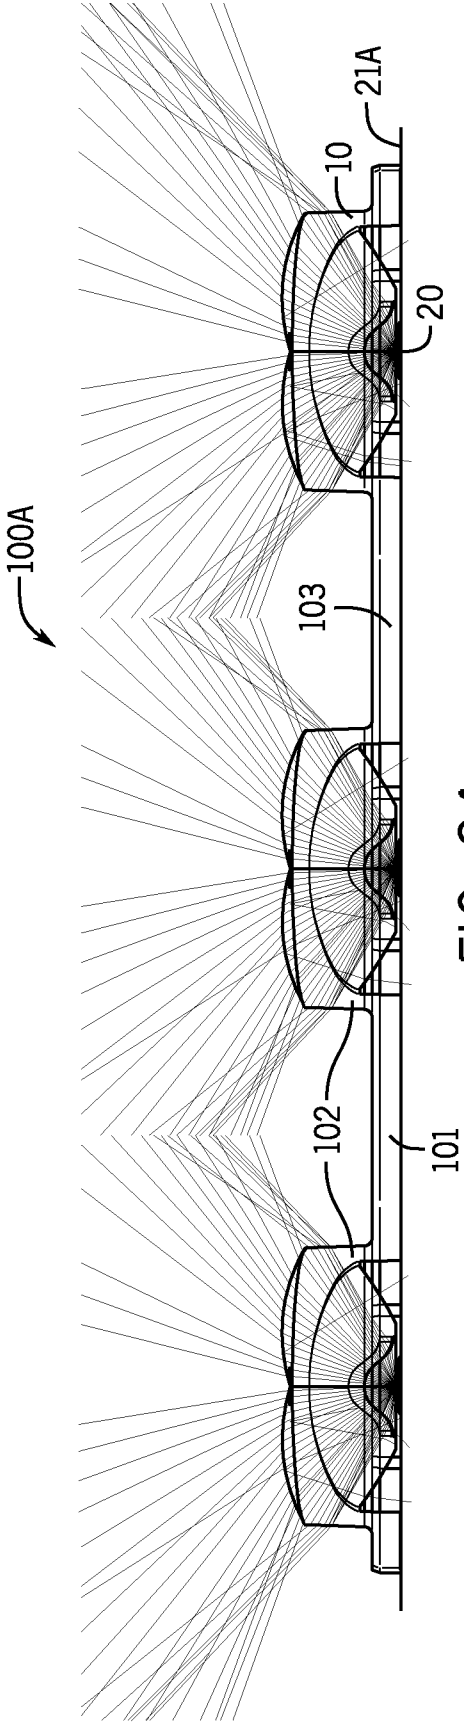


FIG. 34

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2013/039688

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F21V 13/04 (2013.01)

USPC - 362/309

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - F21V 05/00, 02, 04, 06, 13/00, 02, 04, 12, 14; G02B 03/00, 02, 06, 08 (2013.01)

USPC - 313/110, 111, 113, 114; 359/642, 648, 649, 707, 708, 711, 712, 720, 727, 728; cont. on extra sheet

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - F21V 05/00, 02, 04, 06, 13/00, 02, 04, 12, 14; G02B 03/00, 02, 06, 08 (2013.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit, Google, Google Patents

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011/0164425 A1 (CHEN et al) 07 July 2011 (07.07.2011) entire document	1-19,28-30
Y	US 2011/0186897 A1 (LOH) 04 August 2011 (04.08.2011) entire document	1-19,28-30
Y	US 2009/0298376 A1 (GUILLIEN et al) 03 December 2009 (03.12.2009) entire document	29-30
A	US 2007/0274667 A1 (LOH et al) 29 November 2007 (29.11.2007) entire document	1-30
A	US 2011/0103070 A1 (ZHANG et al) 05 May 2011 (05.05.2011) entire document	1-30
A	US 2010/0027271 A1 (WILCOX et al) 04 February 2010 (04.02.2010) entire document	1-30

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 October 2013

Date of mailing of the international search report

18 OCT 2013

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

~~13/03/2013 10:10:20~~
International application No.

PCT/US2013/039688

B. Fields Searched Cont.

USPC - 362/296.01, 297, 307, 308, 309, 310, 311.01, 311.02, 311.06, 311.07, 311.08, 311.09, 311.1, 311.14