

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 October 2011 (06.10.2011)

(10) International Publication Number  
**WO 2011/123861 A2**

(51) International Patent Classification:  
*H04N 1/029* (2006.01)

(21) International Application Number:  
PCT/US2011/031128

(22) International Filing Date:  
4 April 2011 (04.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/320,608 2 April 2010 (02.04.2010) US

(71) Applicant (for all designated States except US): **APP-BANC, LLC** [US/US]; 5201 Great America Pkwy., Suite 320, Santa Clara, CA 95054 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SPRINGER, Gilbert** [US/US]; 47101 Palo Amarillo, Fremont, CA 94539 (US).

(74) Agent: **SAWYER, Joseph, A., Jr.**; Sawyer Law Group, P.C., P.O. Box 51418, Palo Alto, CA 94303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: A SMARTPHONE LENS ASSEMBLY

(57) Abstract: A lens assembly for a smartphone and a method of use is disclosed. In a first aspect, a lens assembly comprises a rotatable wheel; wherein the wheel includes at least two lenses. The lens assembly includes a skin portion coupled to the rotatable wheel, wherein the skin portion is adjustable to cover a smartphone. The at least two lenses of the wheel are positioned such that when one of the lens of the assembly is properly positioned it covers the lens of a camera on the smartphone. In a second aspect the method comprises providing a lens assembly over a camera lens of a smartphone chassis. The lens assembly includes a plurality of lenses that are rotatable. The method includes ensuring that the center of the smartphone lens is congruent with the center of the selected lens of the plurality of lens by referencing at least two surfaces of the smartphone chassis.



**WO 2011/123861 A2**

## A SMARTPHONE LENS ASSEMBLY

### FIELD OF THE INVENTION

The present invention relates generally to smartphones and more particularly to a method and system for providing a lens assembly on a smartphone.

### BACKGROUND OF THE INVENTION

Smart phones are rapidly approaching a dominant posture in the cell phone marketplace worldwide. According to the Gardner Group for example, there will be 75 million iPhones and 425 million competing smartphones sold in 2012. One of the prime attributes of the smartphone is its built in camera that is somewhat compromised in contrast to its hand-held camera cousins owing to the limits volumetrically imposed by the cell phone's portable and wearable dimensions. Accordingly, what is desired is a method and system to overcome these issues. The present invention addresses such a need.

### SUMMARY OF THE INVENTION

A lens assembly for a smartphone and a method of use is disclosed. In a first aspect, a lens assembly comprises a rotatable wheel; wherein the wheel includes at least two lenses. The lens assembly includes a skin portion coupled to the rotatable wheel, wherein the skin portion is adjustable to cover a smartphone. The at least two lenses of the wheel are positioned such that when one of the lens of the assembly is properly positioned it covers the lens of a camera on the smartphone.

In a second aspect the method comprises providing a lens assembly over a camera lens of a smartphone chassis. The lens assembly includes a plurality of lenses that are rotatable. The method includes ensuring that the center of the smartphone lens is congruent with the center of the selected lens of the plurality of lens by referencing at least two surfaces of the smartphone chassis.

## BRIEF DESCRIPTION OF DRAWINGS

The accompanying drawings illustrate an embodiment of the present invention and, together with the description, serve to explain the principle of the invention. One skilled in the art will recognize that the particular embodiments illustrated in the drawings are merely exemplary, and are not intended to limit the scope of the present invention.

Figure 1A-1E illustrate a lens/skin assembly.

Figure 2 illustrates a light ray distortion.

Figure 3 illustrates an image correction mechanism for the lenses of the assembly.

Figure 4A-4E illustrate a portion of the assembly engaging the skin via the carousel wheel.

Figure 5 shows a smartphone with location information relative to various features including the forward facing camera and a companion flash unit.

Figure 6 illustrates a new lens position, which is selected by the users thumb applying a force on the carousel wheel.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention relates generally to smartphones and more particularly to a method and system for providing a lens assembly on a smartphone. The following description is presented to enable one of ordinary skill in the art to make and use the invention and is provided in the context of a patent application and its requirements. Various modifications to the preferred embodiment and the generic principles and features described herein will be readily apparent to those skilled in the art. Thus, the present invention is not intended to be limited to the embodiment shown but is to be accorded the widest scope consistent with the principles and features described herein.

A lens assembly and method of use in accordance with the present invention has a plurality of features. They will be described in detail hereinafter in conjunction with the accompanying figures. The overall goal of this present invention is to provide lens versatilities in a smartphone and to provide a non-invasive solution involving a plurality of lenses resolving close-up (macro), wide-angle and telephoto

range limitations of the smartphone. The avoidance of diminishing portability (wearability) of the smartphone is important. Therefore, bulky lenses, awkward mounting and spatially challenged lens selection mechanisms are not to be utilized.

To address these issues the present invention provides the following features.

1. Lens system comprised of single polymer or glass molded lens with appropriate geometry to allow movable lens placement congruent with camera lens aperture on smartphone.
2. Hole in lens with dual diameters, a geometric assembly to allow "neutral" or smartphone lens without the aid of external optics on lens configuration.
3. Lens configuration with annular form to allow rotary selection of lens.
4. Alternative rectangular lens configuration of a slider geometry to allow lens selection by linear translation of lens.
5. Identifier marking on lens wheel with ring encoding, stamping or insitu molding.
6. Lens system with full or bifurcated companion case for mounting on smartphone.
7. Lens case assembly with aperture(s) to accommodate interface connections, speaker, microphone, and smart phone control switches.

To describe these features in more detail refer now to the following discussion in conjunction with the accompanying Figures. Findings show the integration of lenses on a smartphone non-lens geometric features in a common mold introducing flow stress and annealing stresses, present complex material problems that are difficult to consider for production solutions. These observations have led to a determination that lenses geometries are best behaved when molded as discrete elements in a mold cavity. A further issue for this determination is economic considerations of providing multiple lenses in the smartphone. Therefore, a technique in accordance with an embodiment is applied a single-lens geometry that integrates the telephoto/wide-angle two-component lenses into a single monolithic lens structure. A single mold cycle per lens gives a substantial economic advantage. Further consideration of the lens integration have recognized a multi-cavity of lenses of different design having similar volumes of plastic per lens can

enable a single mold, in the molders profession's term-of-art this configuration is known as a "family mold".

Figure 1A-1E illustrates a lens assembly 100 placed on a skin 10 over a smartphone 14 in accordance with an embodiment. The assembly 100 is connected to a skin 10. The skin 10 is placed over the smartphone 14 such that the lens on the smartphone 14 is covered by the assembly 100. The assembly 100 includes a first and second lens 102 and 104, each of which can be rotatably moved over the lens on the smartphone 14. To ensure portability the lens thickness should typically be from 5-10mm. As shown in Figure 2, a telephoto lens 202 and a wide angle photo lens 204 can be utilized as the two lenses. Where the lenses 202 and 204 optical paths are insufficient to resolve the correct image due to the thickness constraints, such resolution images may take the form of corrected barrel distortion. Note the grid pattern showing to the right of the wide angle lens 204. The curvilinear shape grid (called "barrel distortion") represents a three-color light ray pilot of the lens performance at the smartphone's camera's detector grid array. Software can be utilized to re-assign values from a map of the barrel grid to a rectilinear grid to correct the distorted image. In a similar manner other lens compensations may be corrected by grid element assignments from a distortion map, i.e., that of the telephoto lens of Figure 2.

Implementations described to correct lens resolutions through redistribution of chromic aberration and distortion can be provided. Grid element redistributions to a rectilinear grid format that may be accomplished through algorithms. The implementations can also be accomplished by locating a streaming media alterations corrections with the firmware intelligence to reorganize distortion grids to rectilinear grids in a live data stream in the smartphone, similar in function as the software approach. Figure 3 illustrates an in data stream image correction mechanism for the lenses of the assembly 100. As is seen in Figure 3, a camera 302 or image array can be provided as a video stream. Then a firmware chip 308 provides for image stream correction 312 which allows the video to be corrected. Then, the distortion grid map is dynamically assigned to a rectilinear grid format.

In another embodiment the lens correction software algorithms can be downloaded in the smartphone via developer applications by the phone provider or

downloaded into the smartphone system to specifically apply corrections for each particular lens selected.

In a further embodiment, smartphone camera software application can be provided with selectable "smart tabs" (icons) to coordinate camera photo with selected lens. A smartphone software application will duplicate the smartphone's camera function complete with icon and camera's touch screen or physical switch photo-snap embellished with the added features of icon bars that associate a particular lens selection with the appropriate distortion grid array correction as shown in Figure 2. The application will allow lens selection and photo operation with the appropriate lens selected and corrected.

#### Method of lens selection

Figures 4A-4E illustrate a portion of the assembly engaging the skin via carousel wheel 404. As is seen the carousel wheel 404 is interchangeable with other carousels. In addition, as is seen in Figure 4B the lenses are recessed into the carousel wheel to protect the lens for abrasion and contact impingement. In this embodiment carousel wheel can be interchanged to offer the user flexibility of multiple lens functions. For example a carousel wheel 404 could include a fisheye lens, coated lens, lens of different colors or filters. A critical feature is the selection of the appropriate lens. In an embodiment, a new lens position is selected by applying a force on the carousel wheel 502 typically via the thumb of a user. Referring to Figure 4A the aperture 403 has a differential diameter  $D1/D2$  where the radius of  $D1$  is less than the radius of  $D2$ . This allows a release of the wheel 404 for rotation by moving it from  $D1$  to  $D2$ , slots 504 on the carousel wheel 404 registers a lens stop 610 position, and may be accompanied with an audible (clicking) ratchet action, informing the user when a lens is in the desired position. Accordingly, as is seen the carousel wheel hole with a semi-annular slider surface and case edge margin cooperate to fix the carousel wheel position. A spring 408 seeking the lens stop slot 610 latches the wheel 404 at each lens position whose geometric location directly aligns the azimuth center of the smart phone's camera lens to the azimuth center of the carousel wheel 404 lens, within the appropriate camera lens to carousel azimuth positioning tolerances.

### Method of Lens Location

Figure 5 shows a smartphone 500 with location information relative to various features including the forward facing camera 502 and a companion flash unit 504. The tooled case design utilizes the lens/flash feature coordinates as referenced to the smartphone chassis surfaces closest to the camera to insure maximum location accuracy to the auxiliary lens azimuth. For purposes of fabricating the case enclosure to the highest accuracy, attention to the mold design will focus on the “plastic compensation” design rules to optimize feature dimensions.

Note that uncertainty exists relative to the final size of the molded case enclosure thus demanding an over-sizing of critical case design features for “fine tuning” determined by observing first-article critical feature dimensions then determine final mold critical dimensions. This compensation consideration demands that the deliberate skewed for tuning dimensions, exacerbate the over-sizing compensations, to the case enclosure sides contacting the smart phone chassis opposite those chassis edges used as critical dimension reference edges 500 and 505 of Figure 5, see compensation edges located at the case bottom.

Referring back to Figures 4A-4E, the alignment is achieved through cooperation between a set-positioning receptor slot 410 on the carousel and the mounted-in-case companion deflection spring 408. Figure 6 illustrates a knurl and the lens stop slot on the carousel wheel 404. When the user chooses to rotate the carousel’s lens setting by gripping the knurl on the carousel when moving to a different lens, the previously described slight thumb force is applied on the carousel wheel 604, creating a counter diametric force to the ratchet spring displacing the carousel wheel 404 from D1 to D2 freeing the carousel wheel for rotation. The formed spring appendage, for example a plastic or a metallic springs, is generally located on the inside of the annular formation with an annular shaped nib that engages lens stop 610. Displacement of the carousel wheel against the spring displaces the carousel to D2, thereby breaking stiction and friction between the carousel wheel 404 and its annular well containment near the thumb wheel slot, allowing a free relocation of the lens positions, as shown in Figures 4A-4E.

Although the present invention has been described in accordance with the embodiments shown, one of ordinary skill in the art will readily recognize that there could be variations to the embodiments and those variations would be within the spirit and scope of the present invention. Accordingly, many modifications may be made by one of ordinary skill in the art without departing from the spirit and scope of the appended claims.

5



## CLAIMS

What is claimed is:

- 5           1.       A lens assembly comprising:  
            a rotatable wheel; wherein the wheel includes at least two lenses; and  
            a skin portion coupled to the rotatable wheel, wherein the skin portion is  
adjustable to cover a smartphone; the lenses of the wheel are positioned such that  
when one of the lenses of the assembly is properly positioned it covers a lens of a  
10       camera on the smartphone.
2.       The lens assembly of claim 1, wherein the at least two lenses includes a  
wide angle lens and a telephoto lens.
- 15           3.       The lens assembly of claim 1, wherein the images provided by the at least  
two lenses can be compensated by an error correction mechanism.
4.       The lens assembly of claim 3 wherein the error correction mechanism  
comprises an application that has multiple lens selections that will correct each lens  
20       for is particular distortion pattern.
5.       The lens assembly of claim 4 wherein the error correction mechanism  
comprises an integrated circuit within the smartphone video stream.
6.       The lens assembly of claim 1, wherein the wheel includes a plurality of slots  
25       that are utilized to indicate that one of the two lenses is in a desired position.
7.       The lens assembly of claim 6, wherein a spring latches the wheel at each  
lens position.
- 30           8.       The lens assembly of claim 7 wherein a cooperation of a force applied by the  
spring to a location slot on the wheel displacing the lens to a first diameter and

thereby ensuring the position of the selected lens to be congruent with the camera lens.

5 9. The lens assembly of claim 1, wherein the thickness of the at least two lenses comprise any of a macro lens, telephoto lens, wide angle lens, a fisheye lens, coated lens, and lenses of different colors or filters.

10 10. The lens assembly of claim 1, wherein the thickness of the at least two lenses is from 5-10 millimeters.

11. The lens assembly of claim 1, wherein the at least two lenses are recessed within the carousel wheel.

12. A method comprising:

15 providing a lens assembly over a camera lens of a smartphone chassis; wherein the lens assembly includes a plurality of lenses that are rotatable; and

ensuring that the center of the smartphone lens is congruent with the center of the selected lens of the plurality of lens by referencing at least two surfaces of the smartphone chassis.

20 13. The method of claim 12 wherein the at least two surfaces are the reference surfaces closest to the camera lens.

25

1/6

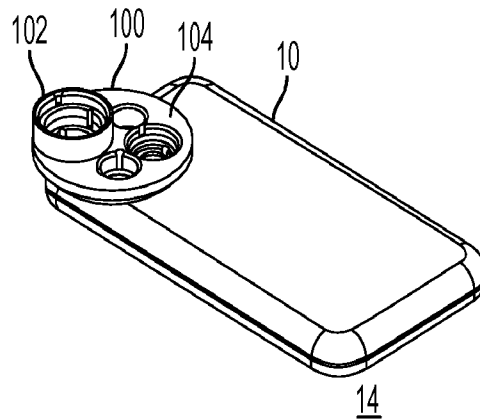


FIG. 1A




FIG. 1B




FIG. 1C

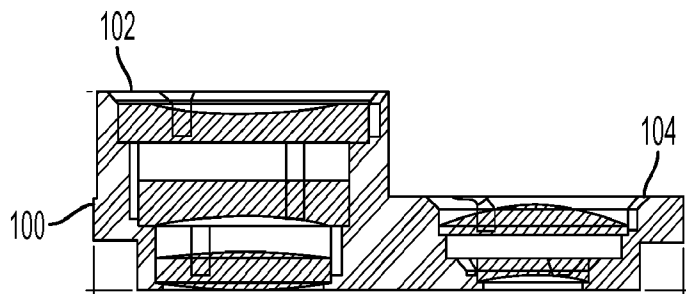


FIG. 1D





FIG. 1E

2/6

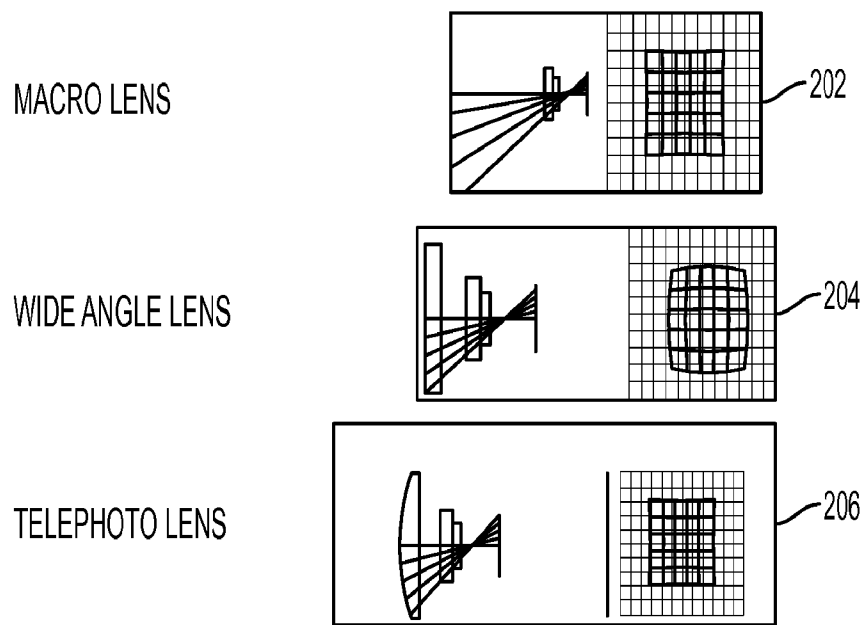

LIGHT RAY DISTORTION

FIG. 2

3/6


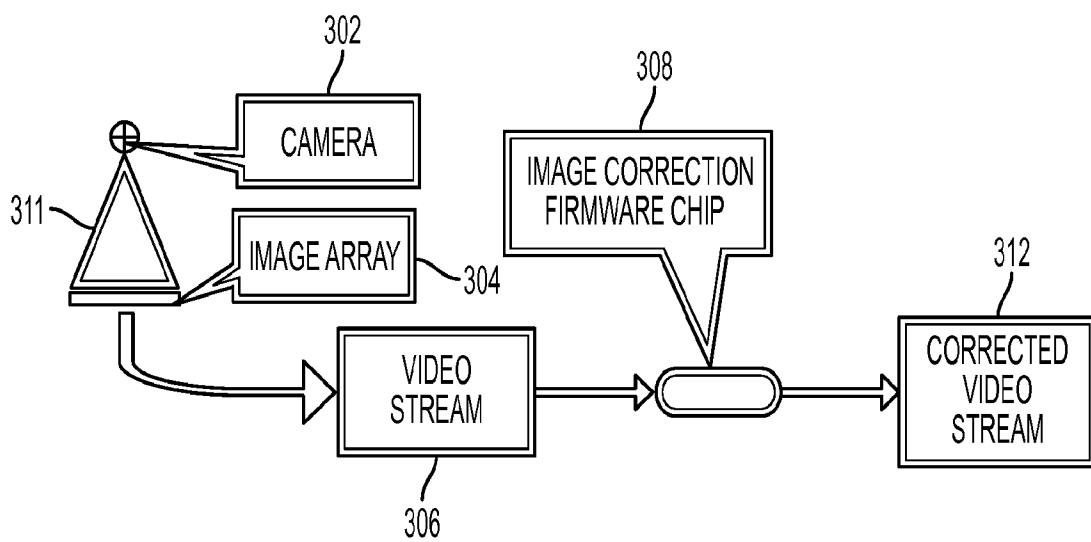



FIG. 3

4/6

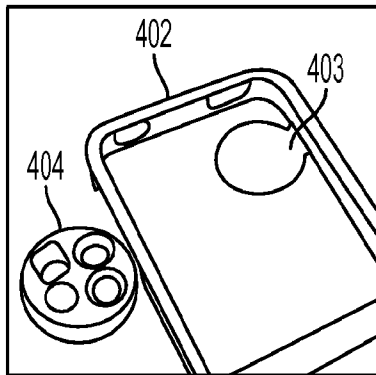


INTERCHANGEABLE  
CAROUSEL & CASE

FIG. 4A

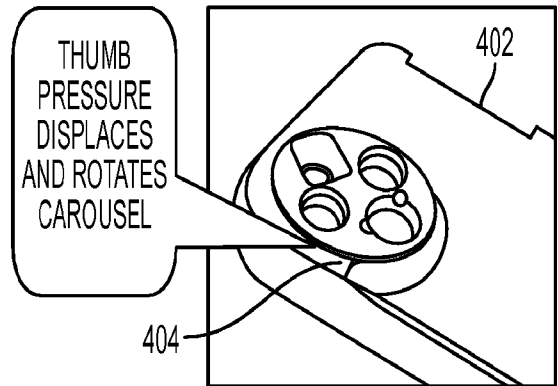


ASSEMBLED CAROUSEL & CASE

FIG. 4B

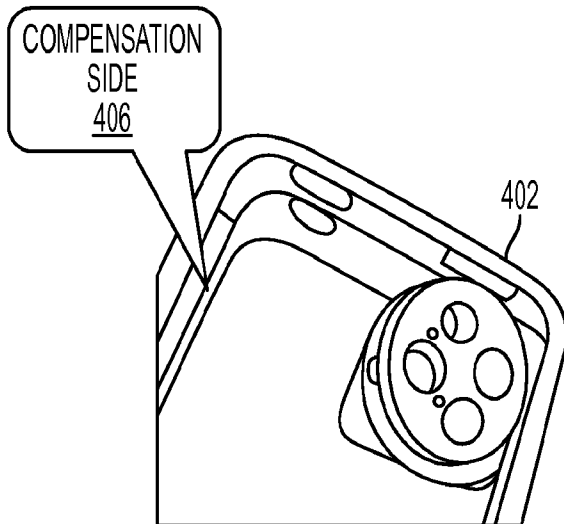


INSERTION OF CAROUSEL TO CASE

FIG. 4C

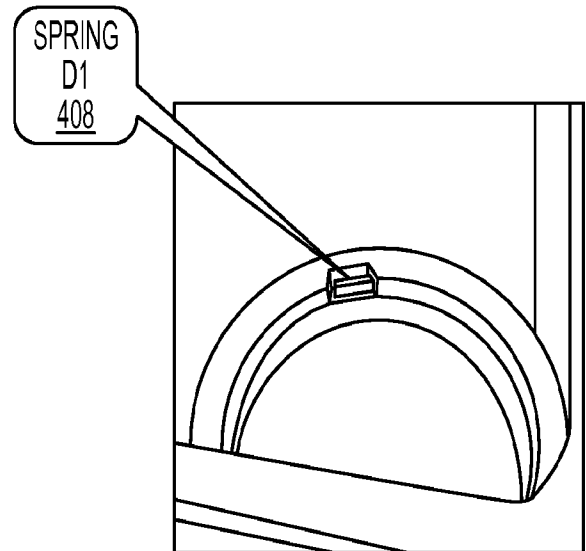

CAROUSEL LOCATION HOLE WITH  
ANNULAR SLIDER SURFACE AND  
CAROUSEL LOCATOR AND LOCK SPRING

FIG. 4D

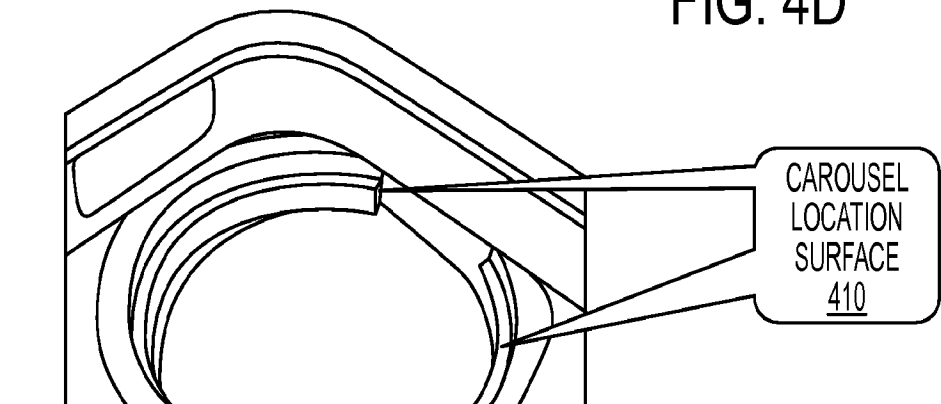

CAROUSEL HOLE WITH SEMI-ANNULAR SLIDER SURFACE  
AND CASE EDGE MARGIN THAT COOPERATES TO FIX  
THE CAROUSEL POSITION

FIG. 4E

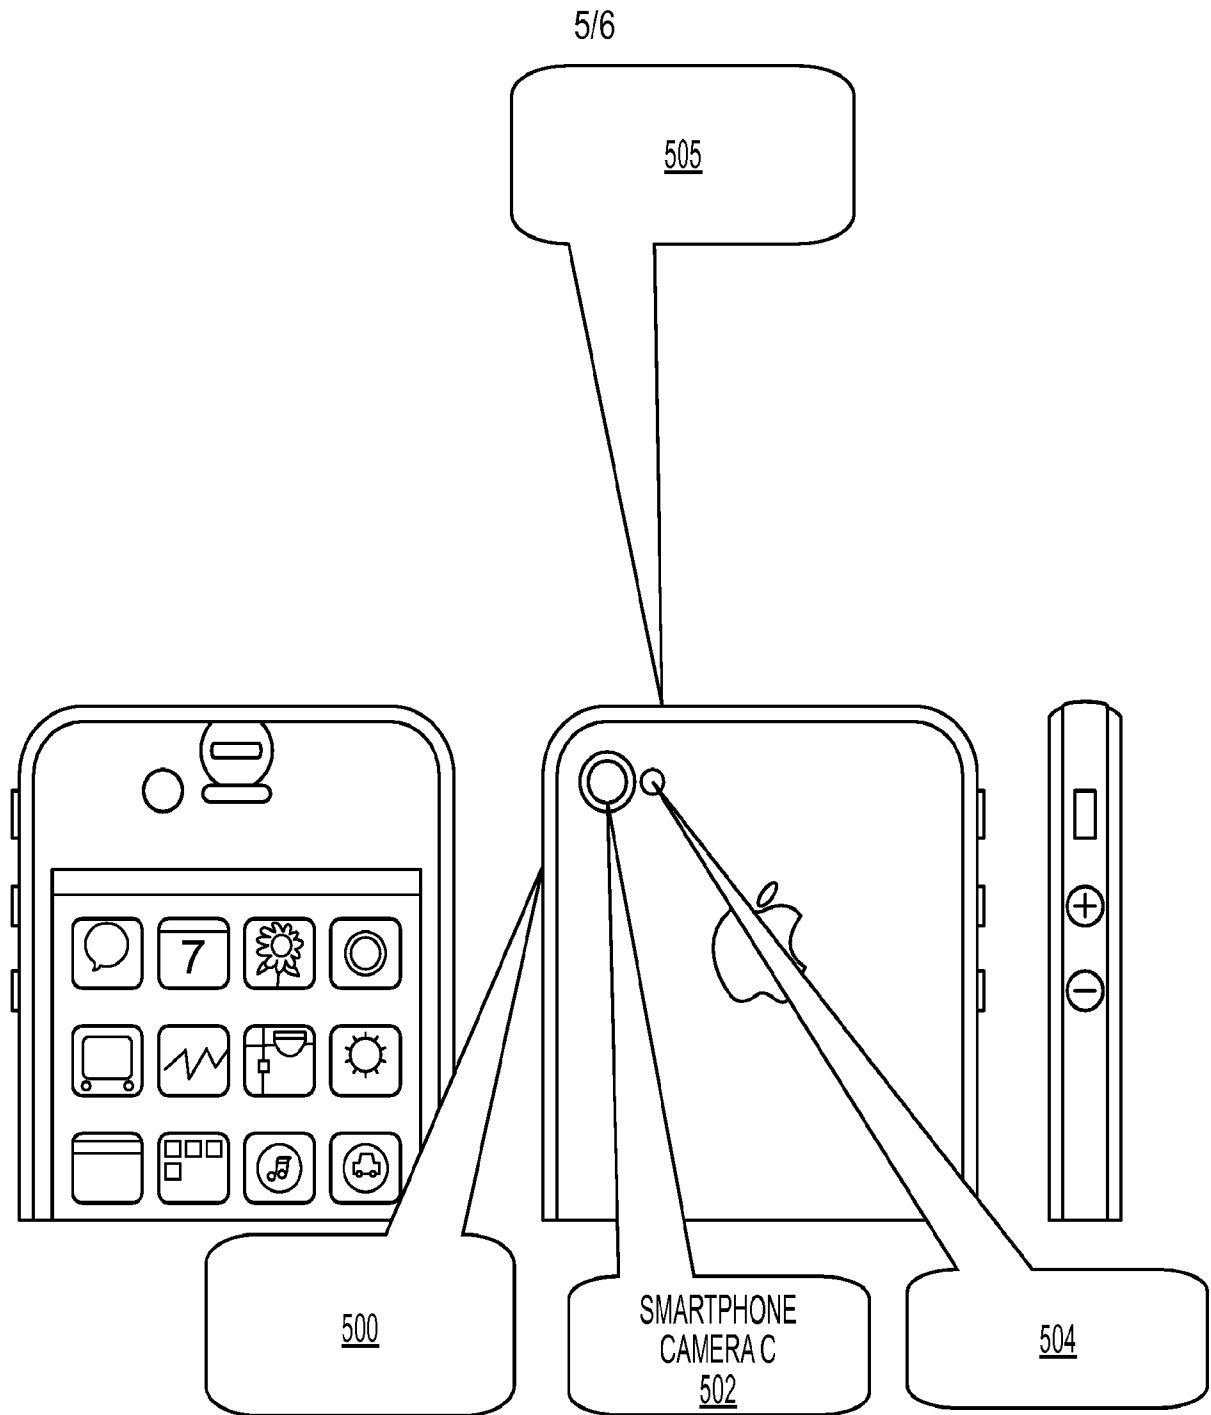


FIG. 5

6/6

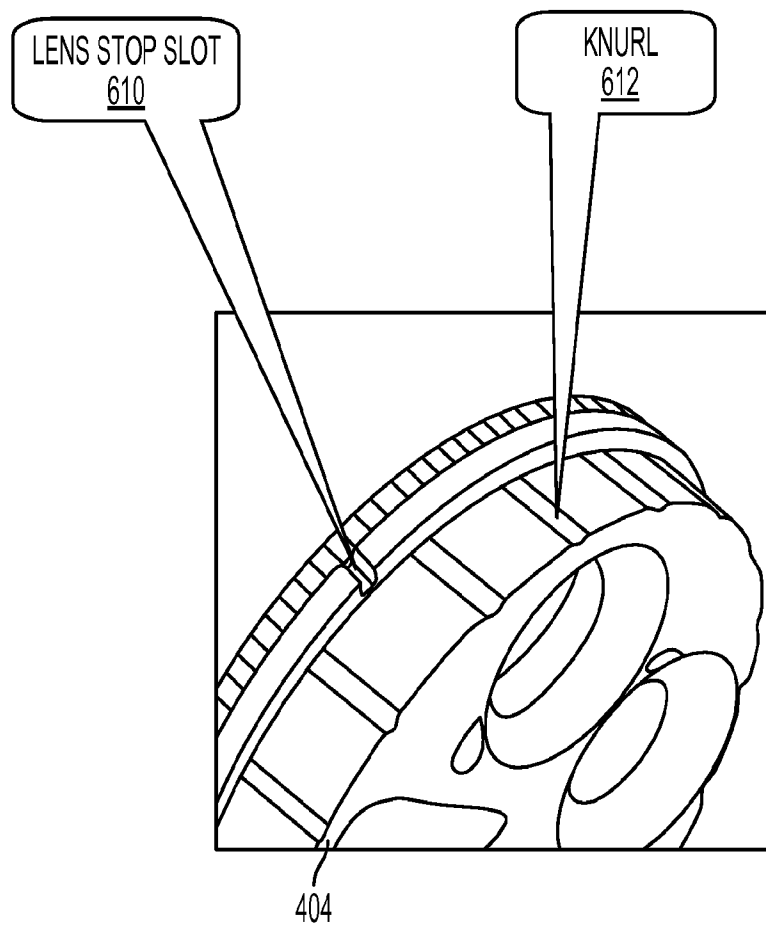


FIG. 6