



(51) International Patent Classification:

H02G 3/18 (2006.01) *H02G 3/08* (2006.01)
H02G 3/14 (2006.01)

(21) International Application Number:

PCT/US2022/011809

(22) International Filing Date:

10 January 2022 (10.01.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/136,127 11 January 2021 (11.01.2021) US

(71) Applicant: **HUBBELL INCORPORATED** [US/US]; 40
Waterview Drive, Shelton, Connecticut 06484 (US).

(72) Inventors: **LI, Jian Hua**; 47th Ave 210th St, Bayside, New
York 11361 (US). **CRETELLA, Joseph Nicholas**; 161
Benz Street, Ansonia, Connecticut 06401 (US).

(74) Agent: **DILWORTH, Michael P.** et al.; Dilworth IP, LLC,
470 James Street, Suite 007, New Haven, Connecticut
06513 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: BACK-TO-BACK TWO-GANG ELECTRICAL BOX

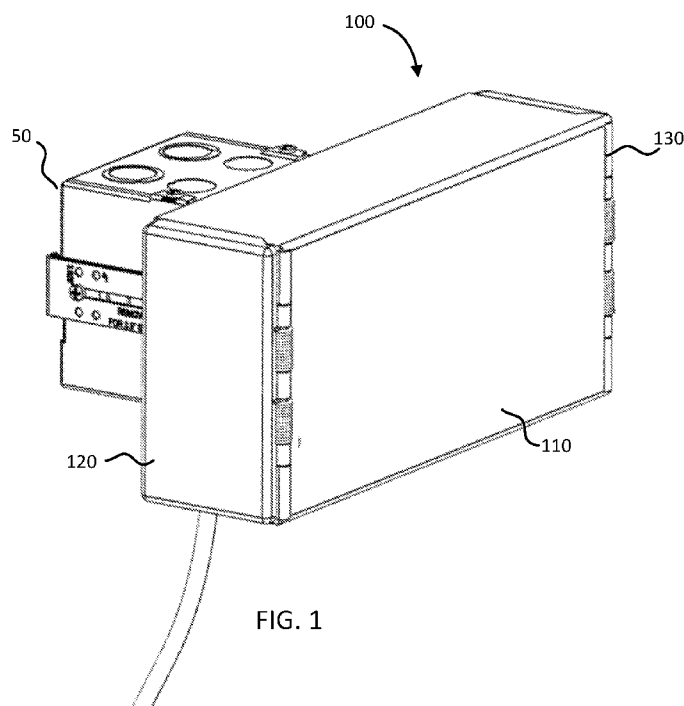


FIG. 1

(57) Abstract: An electrical box including a central housing with a first side opening, a second side opening opposite the first side opening, and a rear opening, each of the first and second side openings configured to receive an electrical or data interface device, a first extension compartment around the first side opening, the first extension compartment including a first door, a second extension compartment around the second side opening, the second extension compartment including a second door, and an exterior cover extending at least partially over the central housing, the first extension compartment, and the second extension compartment.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

BACK-TO-BACK TWO-GANG ELECTRICAL BOX

FIELD OF THE INVENTION

[0001] The present disclosure relates electrical boxes, and more particularly, to a back-to-back electrical box for indoor and outdoor applications.

BACKGROUND

[0002] Various electrical boxes for indoor and outdoor use are known. Electrical boxes can be single gang to accommodate one outlet or switch, or multi-gang to accommodate two or more outlets or switches.

[0003] Multi-gang boxes are generally arranged to position outlets or switches side-by-side. For example, the Hubbell HBL985 wall box is a two-gang box for delivering power, data, or AV side-by-side. These wall boxes are typically mounted with the outlets or switches facing outward from a wall. When outlets are side-by-side, one outlet may be blocked when an oversized plug is used. Further, it may be difficult to use outlets facing outward from a wall when they are located behind furniture or in tight spaces.

[0004] Some devices exist for mounting outlets on outdoor posts, however, most only accommodate single outlets our side-by-side outlets, such as B-K Lighting Receptacle Bollards and Legrand Outdoor Charging Stations. U.S. Patent No. 7,234,670, assigned to Arlington Industries, describes one post that allows for outlets to be mounted opposite one another. However, the post is limited in its applications and cannot be mounted in different configurations.

[0005] The present invention solves these and other problems in the prior art.

SUMMARY

[0006] An object of the present invention is to provide an improved electrical box having

a variety of electrical and data interface devices (i.e., outlets/receptacles, switches, etc.) positioned on opposite sides. A further object of the present invention is to provide an improved electrical box which can be mounted both vertically and horizontally.

[0007] In one exemplary embodiment according the present disclosure, an electrical box is provided including a central housing with a first side opening, a second side opening opposite the first side opening, and a rear opening, each of the first and second side openings configured to receive an electrical or data interface device, a first extension compartment around the first side opening, the first extension compartment including a first door, and a second extension compartment around the second side opening, the second extension compartment including a second door. In some embodiments, an exterior cover extends at least partially over the central housing, the first extension compartment, and the second extension compartment.

[0008] The first side opening may include a first electrical or data interface device and the second side opening may include a second (e.g., different) electrical or data interface device. In some embodiments, the first interface device is a high voltage electrical outlet or switch, and the second interface device is a low voltage data or audio/visual (AV) outlet.

[0009] The electrical box may have a rear side including the rear opening and a front side opposite the rear side, wherein the rear opening is configured to attach to a mount box. In some embodiments, each of the first and second doors are hingedly attached to edges of the front side. The mount box may be a multi-gang box or a single-gang mount box. When a single-gang mount box is used, the electrical box may include a mud ring at least partially closing the rear opening of the central housing around an opening of the single-gang mount box.

[0010] In some embodiments, the central housing includes a slot extending therethrough on the front side. A barrier may be positioned in the slot extending through the central housing

and at least partially into the mount box. In some embodiments, the mount box is mounted in a wall and the electrical box is mounted against the wall. In some embodiments, the mount box is mounted on a top of a pedestal, and the electrical box is mounted against the top of the pedestal.

[0011] In another exemplary embodiment according the present disclosure, an electrical box is provided including a central housing with a first side opening, a second side opening opposite the first side opening, and a rear opening configured to attach to a mount box, each of the first and second side openings configured to receive an electrical or data interface device, a recess on a front side of the central housing including holes to receive fasteners for attaching the central housing to the mount box, and a slot in the recess extending into the central housing.

[0012] In some embodiments, a barrier extends through the slot and the rear opening at least partially into the mount box. A removable cover may be positioned within the recess.

[0013] The electrical box according to embodiments of the present disclosure is adapted to accommodate dual voltage and can be mounted in a vertical orientation (e.g., wall mounting) or a horizontal orientation (e.g., on a pedestal) on a standard single or two gang boxes. The electrical box is particularly suitable for outdoor applications, such as outside a home or business or in an outdoor recreational area such as a beach or park. For example, the electrical box may be mounted in the horizontal orientation in an outdoor recreational area or other public space for charging devices. The electrical box has indoor applications as well. For example, the electrical box can be used indoors for receptacles which are located behind beds to comply with NEC requirements (e.g., Article 210-60(b) of NEC 2014), such as in health care facilities. With the electrical box disclosed herein, a bed can be up against the box and the plug/receptacle connection is protected.

[0014] The electrical box according to the present disclosure provides consumers with

the capability of installing multi-voltage devices with a provided barrier (e.g., mounted to Hubbell's two-gang box HBL985) or with single voltage devices where no barrier is required. If one power output is blocked by an oversize plug, the box provides consumers additional opportunity to use another side. In some embodiments, the electrical box includes a mud ring for power distribution applications.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] A more complete appreciation of the present disclosure and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

[0016] FIG. 1 is an isometric view of an electrical box according to an exemplary embodiment of the present disclosure mounted to a two-gang box;

[0017] FIG. 2 is a top view of the electrical box shown in FIG. 1;

[0018] FIG. 3 is a front view of the electrical box shown in FIG. 1;

[0019] FIG. 4 is an isometric view of the electrical box shown in FIG. 1 with a first door in an open position;

[0020] FIGS. 5A and 5B are side views of the electrical box shown in FIG. 1 with first and second doors in open positions;

[0021] FIG. 6 is an isometric view of an electrical box according to an exemplary embodiment of the present disclosure mounted in a vertical configuration on a wall;

[0022] FIG. 7 is an isometric view of an electrical box according to an exemplary embodiment of the present disclosure mounted in a horizontal configuration on a pedestal;

[0023] FIG. 8A is an isometric view of an electrical box according to an exemplary

embodiment of the present disclosure mounted to a two-gang box with an exterior cover removed;

[0024] FIG. 8B is a front view of the electrical box shown in FIG. 8A with a slot cover removed;

[0025] FIG. 9 is an isometric view of the electrical box shown in FIGS. 8A-8B with a first extension compartment removed;

[0026] FIG. 10 is an isometric view of the electrical box shown in FIG. 9 with a central housing removed;

[0027] FIG. 11 is a rear isometric view of a central housing of an electrical box according to an exemplary embodiment of the present disclosure mounted to a two-gang box;

[0028] FIG. 12 is an exploded view of the central housing and the two-gang box shown in FIG. 11;

[0029] FIG. 13 is a top view of an electrical box according to an exemplary embodiment of the present disclosure mounted to a single-gang box;

[0030] FIG. 14 is a rear isometric view of the electrical box shown in FIG. 13;

[0031] FIG. 15 is an isometric view of the electrical box shown in FIG. 13 with an exterior cover and a first extension compartment removed; and

[0032] FIG. 16 is an isometric view of the electrical box shown in FIG. 15 with a central housing removed.

DETAILED DESCRIPTION

[0033] The present disclosure may be understood more readily by reference to the following detailed description of the disclosure taken in connection with the accompanying drawing figures, which form a part of this disclosure. It is to be understood that this disclosure is

not limited to the specific devices, methods, conditions, or parameters described and/or shown herein, and that the terminology used herein is for the purpose of describing particular embodiments by way of example only and is not intended to be limiting of the claimed disclosure.

[0034] Also, as used in the specification and including the appended claims, the singular forms “a,” “an,” and “the” include the plural, and reference to a particular numerical value includes at least that particular value, unless the context clearly dictates otherwise. Ranges may be expressed herein as from “about” or “approximately” one particular value and/or to “about” or “approximately” another particular value. When such a range is expressed, another embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent “about,” it will be understood that the particular value forms another embodiment. It is also understood that all spatial references, such as, for example, horizontal, vertical, top, upper, lower, bottom, left and right, are for illustrative purposes only and can be varied within the scope of the disclosure.

[0035] FIG. 1 shows an electrical box 100 according to an exemplary embodiment of the present disclosure mounted to a two-gang box 50. FIGS. 2 and 3 illustrate top and front views of the electrical box 100 shown in FIG. 1. The electrical box 100 has a rear side adjacent to the box 50, an opposite front side, and top and bottom sides. In this exemplary embodiment, the two-gang box 50 may be, for example, a Hubbell HBL985 or any other suitable multi-gang (e.g., two-gang) box. As further described below, the electrical box 100 may alternatively be mounted to a single-gang box (see FIGS. 13-16). The box 50 may be secured at least partially within a wall or pedestal.

[0036] The electrical box 100 may further include an exterior skin or cover 110, a first

end with first door 120, and second end opposite the first end with a second door 130. The cover 110 extends over the front, top, and sides of the electrical box 100. The cover 110, and/or the doors 120,130 and other components of the electrical box 100, may be manufactured from a corrosion resistant metal such as aluminum (e.g., cast aluminum), stainless steel or other material suitable for outdoor use, or plastic or metal for indoor use. In some embodiments, the cover 110 can be different colors.

[0037] As shown in FIGS. 3 and 4, the first and second doors 120,130 may be hingedly attached to the electrical box 100 and/or cover 110 with hinges including springs 122,132 to bias the doors 120,130 closed. Preferably the doors 120,130 are hinged at an outside edge at the front of the electrical box 100. Therefore, the doors 120,130 open from the wall outward when the electrical box 100 is vertically mounted, or upward from the ground when horizontally mounted, to protect the switch or outlets and the mating plugs or connector devices while in use from the elements.

[0038] As shown in FIG. 4, the electrical box 100 includes a first extension compartment 140 or recessed frame with an interior cavity exposed when the door 120 is opened. The first extension compartment 140 may include cable cutouts 142,144 on two or more of its sidewalls to route a cord 152 (having a plug 154) when the door 120 is fully closed. The electrical box 100 may include plugs 145 that snap into the cutouts 142,144 when not in use. A second extension compartment 160 (shown in FIGS. 8A-10) has the same features. The exterior cover 110 may also have corresponding tabs 112 that are removable (e.g., break off) to reveal the cutouts 142,144.

[0039] FIG. 5A is a side view of the first end of the electrical box 100 with the first door 120 in an open position. In the exemplary embodiment, the cavity of the first extension

compartment 140 surrounds and encloses a high voltage electrical power outlet 150. FIG. 5B is a side view of the second end of the electrical box 100 with the second door 130 in an open position. In the exemplary embodiment, the cavity of the second extension compartment 160 surrounds and encloses a low voltage data or audio/visual (AV) outlet. The outlets shown herein are only exemplary. A variety of electrical and data interface devices may be installed in the electrical box 100. Examples include, without limitation, high voltage electrical power outlets, electrical switches, data, or audio/visual outlets (e.g., ethernet, coaxial, telephone, HDMI), and combined power and data outlets (e.g., USB, USB-C, etc.).

[0040] The electrical box 100 according to an exemplary embodiment of the present disclosure may be mounted in vertical and horizontal configurations. FIG. 6 is an isometric view of the electrical box 100 mounted in a vertical configuration on a wall 200. The vertical configuration can, for example, be used indoors for receptacles which are located behind beds to comply with NEC requirements, such as in health care facilities. FIG. 7 is an isometric view of the electrical box 100 mounted in a horizontal configuration on top of a pedestal 220.

[0041] FIG. 8A is an isometric view of the electrical box 100 mounted to a two-gang box 50 with the exterior cover 110 removed to illustrate the internal components. The electrical box 100 includes a central back-to-back housing 180 with a first end and opening and a second opposite end and opening. The central housing 180 is secured to the box 50 with a gasket in between. Extension compartments 140, 160 are secured over the outlets 150, 170 and to respective ends of the central housing 180 with gaskets in between.

[0042] The central housing 180 may have top and bottom cutouts 181 to reduce material and form a partial backstop on each side for outlets or switches. As shown in FIGS. 8A and 8B, the central housing 180 may also include a removable (e.g., snap in) cover 182 to allow access to

fasteners (e.g., four fasteners 183) for securing the central housing 180 to the box 50. FIG. 8B shows the electrical box 100 with the cover 182 removed. Removal of the cover 182 also reveals a vertical slot 185 for the insertion and inspection of a barrier between the two outlets 150,170. The slot 185 extends into the central housing 180 allowing a barrier to be placed between the first and second side openings of the central housing 180 and out through the rear opening. As one skilled in the art will understand, a barrier is used particularly when the voltages are different between the two outlets 150,170, such as when one outlet 150 is high voltage electrical power and the other outlet 170 is low voltage data or audio/visual (AV).

[0043] FIG. 9 is an isometric view of the electrical box 100 shown in FIG. 8A with the first extension compartment 140 removed and a first side opening 184 of the central housing 180 exposed. The outlet 150 is secured into the first side opening 184 of the central housing 180. The central housing 180 includes connection mechanisms, such as threaded holes 188 (see FIG. 11), to receive fasteners 151 (e.g., screws) to attach the outlets 150,170. A gasket 186 is positioned around the first side opening 184 of the central housing 180.

[0044] FIG. 10 is an isometric view of the electrical box 100 shown in FIG. 9 with a central housing 180 removed. The gasket 52 between the central housing 180 and the box 50 is shown. A gasket 186 positioned around a second side opening (opposite the first side opening 184) of the central housing 180 is also shown. A barrier 54 extends between the first and second outlets 150,170 and into the box 50. The barrier 54 may be inserted and inspected via the slot 185 behind the removable cover 182.

[0045] FIG. 11 is a rear isometric view of the central housing 180 of the electrical box 100 mounted to a two-gang box 50, with sidewalls of the box 50 removed for clarity. FIG. 12 is an exploded view of the central housing 180 and the two-gang box 50 shown in FIG. 11. The

central housing 180 includes a rear opening engaging with the box 50. The gasket 52 surrounds the rear opening of the central housing 180. Each side of the central housing 180 has two or more holes 188 for receiving fasteners 151 to attach the outlet 150 (or other electrical or data interface device). The central housing 180 also includes holes 190 for receiving fasteners to attach the extension compartment 140 to the central housing 180. There may also be a hole 192 for receiving a grounding fastener.

[0046] As discussed above, the electrical box 100 may be mounted to a single or multi-gang boxes. FIG. 13 is a top view of an electrical box 100 according to an exemplary embodiment of the present disclosure mounted to a single-gang box 60. FIG. 14 is a rear isometric view of the electrical box 100 shown in FIG. 13.

[0047] FIGS. 15 and 16 are isometric views of the electrical box 100 shown in FIG. 13 with portions removed to illustrate the internal components. The same central housing 180 may be used for a single-gang box 60 and secured together with fasteners under a removable cover 182. A gasket 62 is positioned between the box 60 and the central housing 180. Further, when a single-gang box 60 is used, an optional mud ring 66 may be provided to close the opening, at least partially, between the box 60 and the rear opening of the central housing 180.

[0048] As shown throughout the drawings, like reference numerals designate like or corresponding parts. While illustrative embodiments of the present disclosure have been described and illustrated above, it should be understood that these are exemplary of the disclosure and are not to be considered as limiting. Additions, deletions, substitutions, and other modifications can be made without departing from the spirit or scope of the present disclosure. Accordingly, the present disclosure is not to be considered as limited by the foregoing description.

WHAT IS CLAIMED IS:

1. An electrical box, comprising:

a central housing with a first side opening, a second side opening opposite the first side opening, and a rear opening, each of the first and second side openings is configured to receive an electrical or data interface device;

a first extension compartment around the first side opening, said first extension compartment including a first door;

a second extension compartment around the second side opening, said second extension compartment including a second door; and

an exterior cover extending at least partially over said central housing, said first extension compartment, and said second extension compartment.

2. The electrical box of claim 1, wherein the first side opening includes a first electrical or data interface device and the second side opening includes a second electrical or data interface device, wherein the first electrical or data interface device is a high voltage electrical outlet or switch and the second electrical or data interface device is a low voltage data or audio/visual (AV) outlet.

3. The electrical box of claim 1, wherein each of said first and second extension compartments are removably attached to said central housing.

4. The electrical box of claim 1, wherein each of the first and second doors are hingedly

attached to the electrical box.

5. The electrical box of claim 1, comprising a rear side including the rear opening and a front side opposite the rear side, wherein the rear side is configured to attach to a mount box.

6. The electrical box of claim 5, wherein each of the first and second doors are hingedly attached to edges of the front side.

7. The electrical box of claim 5, wherein said exterior cover extends over the front side, a bottom side, and a top side of the electrical box.

8. The electrical box of claim 5, wherein the mount box is a two-gang mount box.

9. The electrical box of claim 5, wherein the mount box is a single-gang mount box.

10. The electrical box of claim 9, further comprising a mud ring at least partially closing the rear opening of said central housing around an opening of the single-gang mount box.

11. The electrical box of claim 5, wherein said central housing includes a slot extending therethrough on the front side.

12. The electrical box of claim 11, further comprising a barrier in the slot extending through said central housing and at least partially into the mount box.

13. The electric box of claim 5, wherein the mount box is mounted in a wall, and wherein the electrical box is mounted against the wall.

14. The electric box of claim 5, wherein the mount box is mounted on a top of a pedestal, and wherein the electrical box is mounted against the top of the pedestal.

15. The electrical box of claim 1, wherein at least one of said first and second extension compartments includes a cable cutout on each of at least two sides of the at least one of said first and second extension compartments.

16. The electrical box of claim 15, wherein the at least one of said first and second extension compartments includes a removable plug closing at least one of the cable cutouts.

17. An electrical box, comprising:

a central housing with a first side opening, a second side opening opposite the first side opening, and a rear opening configured to attach to a mount box, each of the first and second side openings configured to receive an electrical or data interface device;

a recess on a front side of said central housing including holes to receive fasteners for attaching said central housing to the mount box; and

a slot in said recess extending into said central housing.

18. The electrical box of claim 17, further comprising a barrier extending through the slot

and the rear opening at least partially into the mount box.

19. The electrical box of claim 18, wherein the first side opening includes a first electrical or data interface device and the second side opening includes a second electrical or data interface device, wherein the first electrical or data interface device is a high voltage electrical outlet or switch and the second electrical or data interface device is a low voltage data or audio/visual (AV) outlet.

20. The electrical box of claim 17, further comprising a removable cover within the recess.

21. The electrical box of claim 17, further comprising a first extension compartment removably attachable to said central housing around the first side opening, said first extension compartment including a first door, and a second extension compartment removably attachable to said central housing around the second side opening, said second extension compartment including a second door.

22. The electrical box of claim 21, further comprising a gasket between each of said first and second extension compartments and said central housing.

23. The electrical box of claim 21, further comprising an exterior cover extending at least partially over said central housing, said first extension compartment, and said second extension compartment.



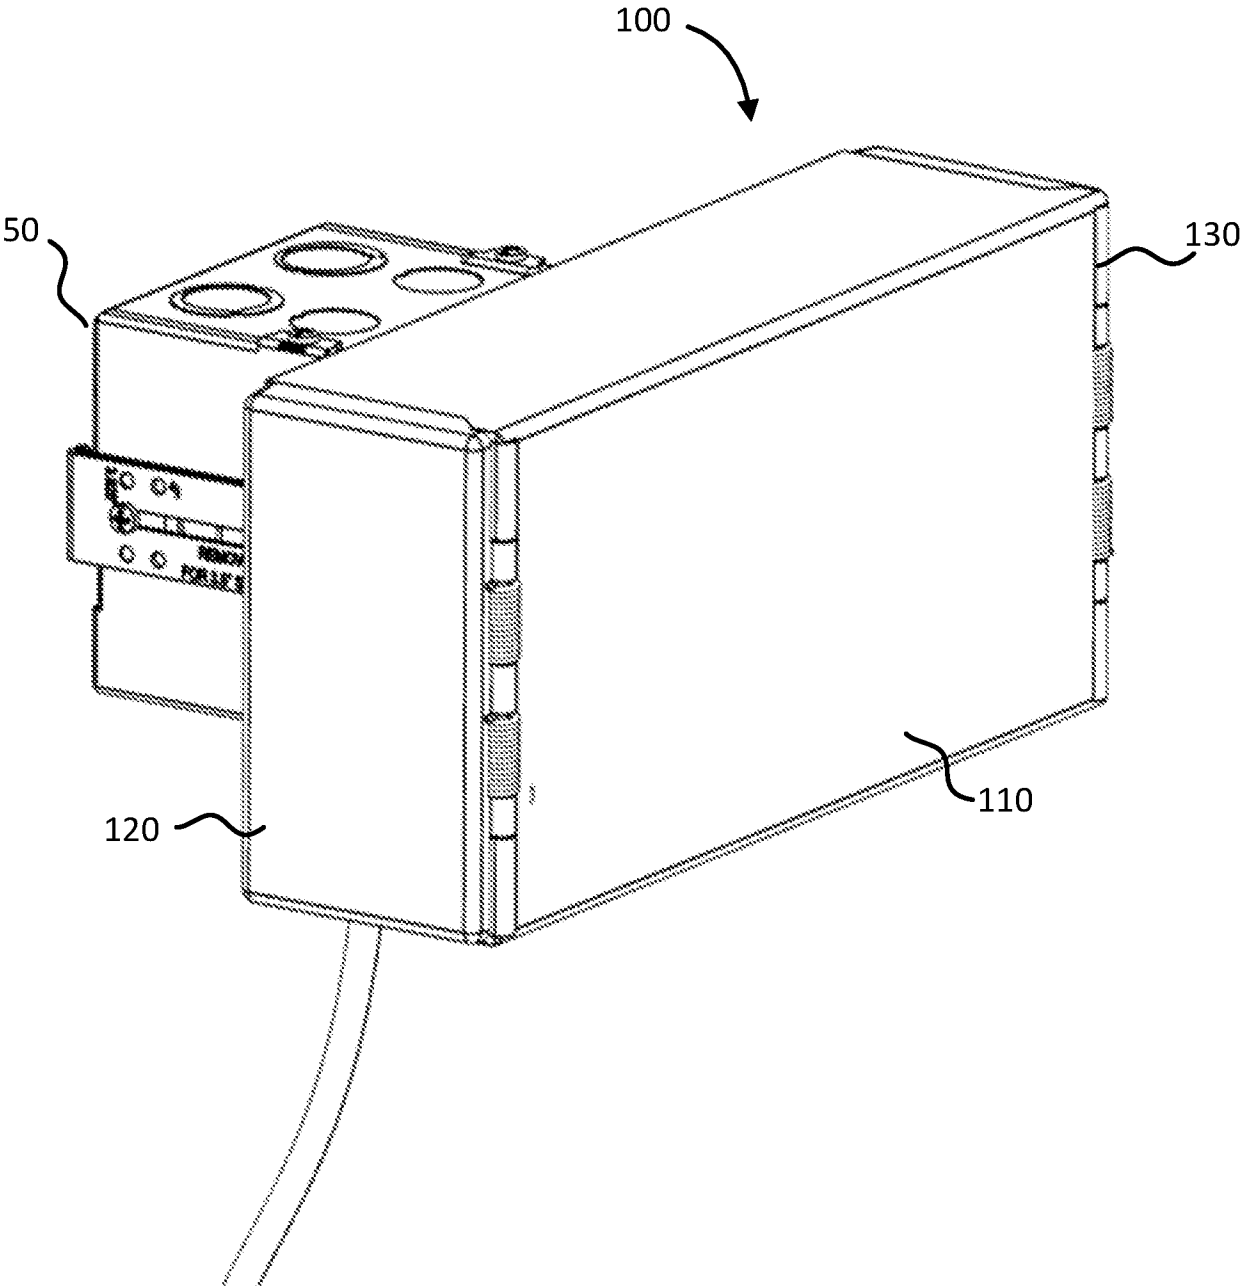


FIG. 1

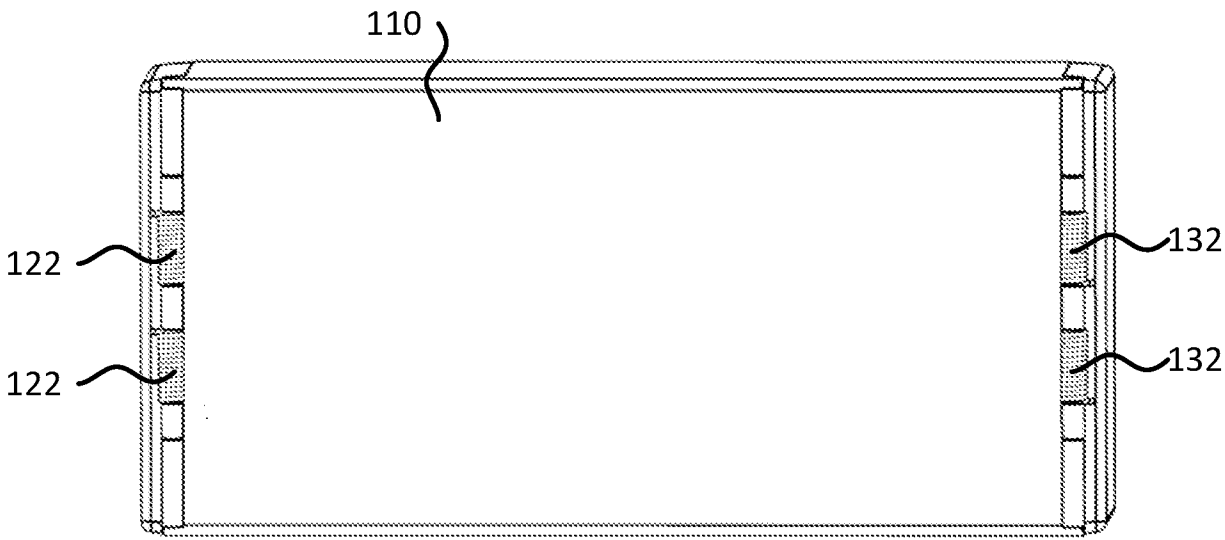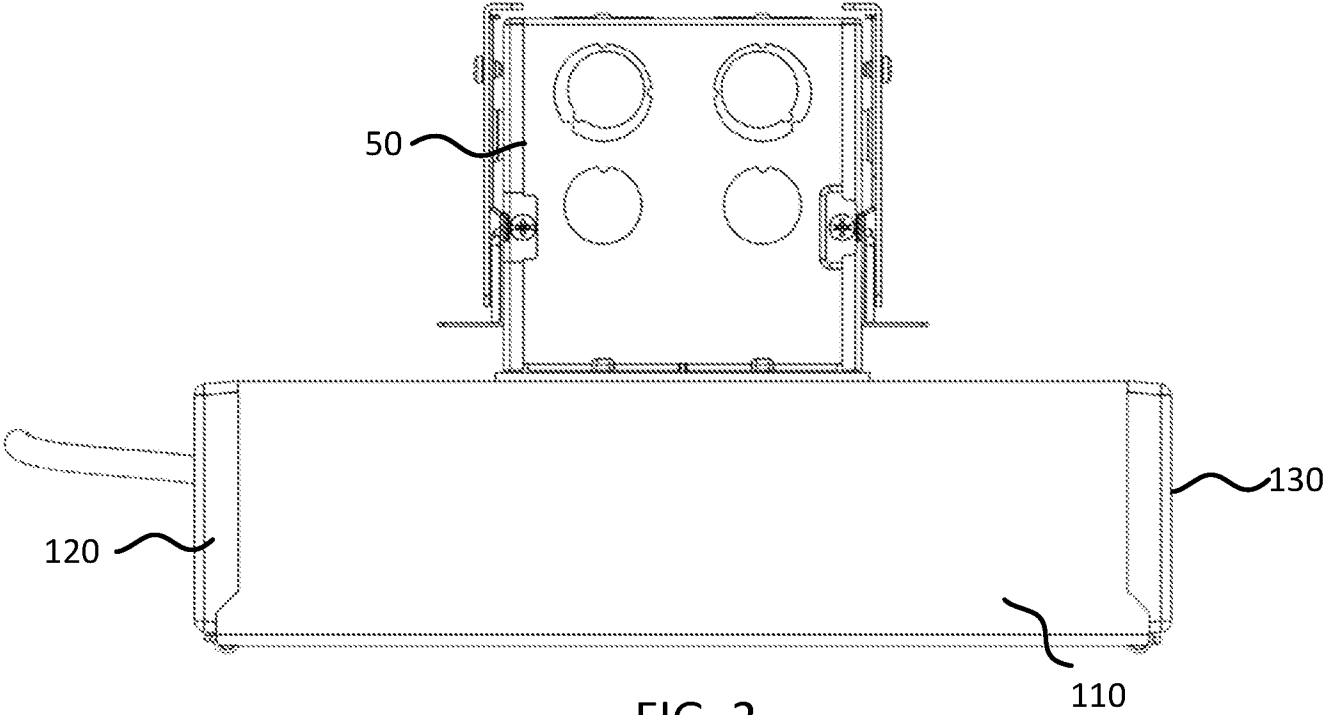

3/15

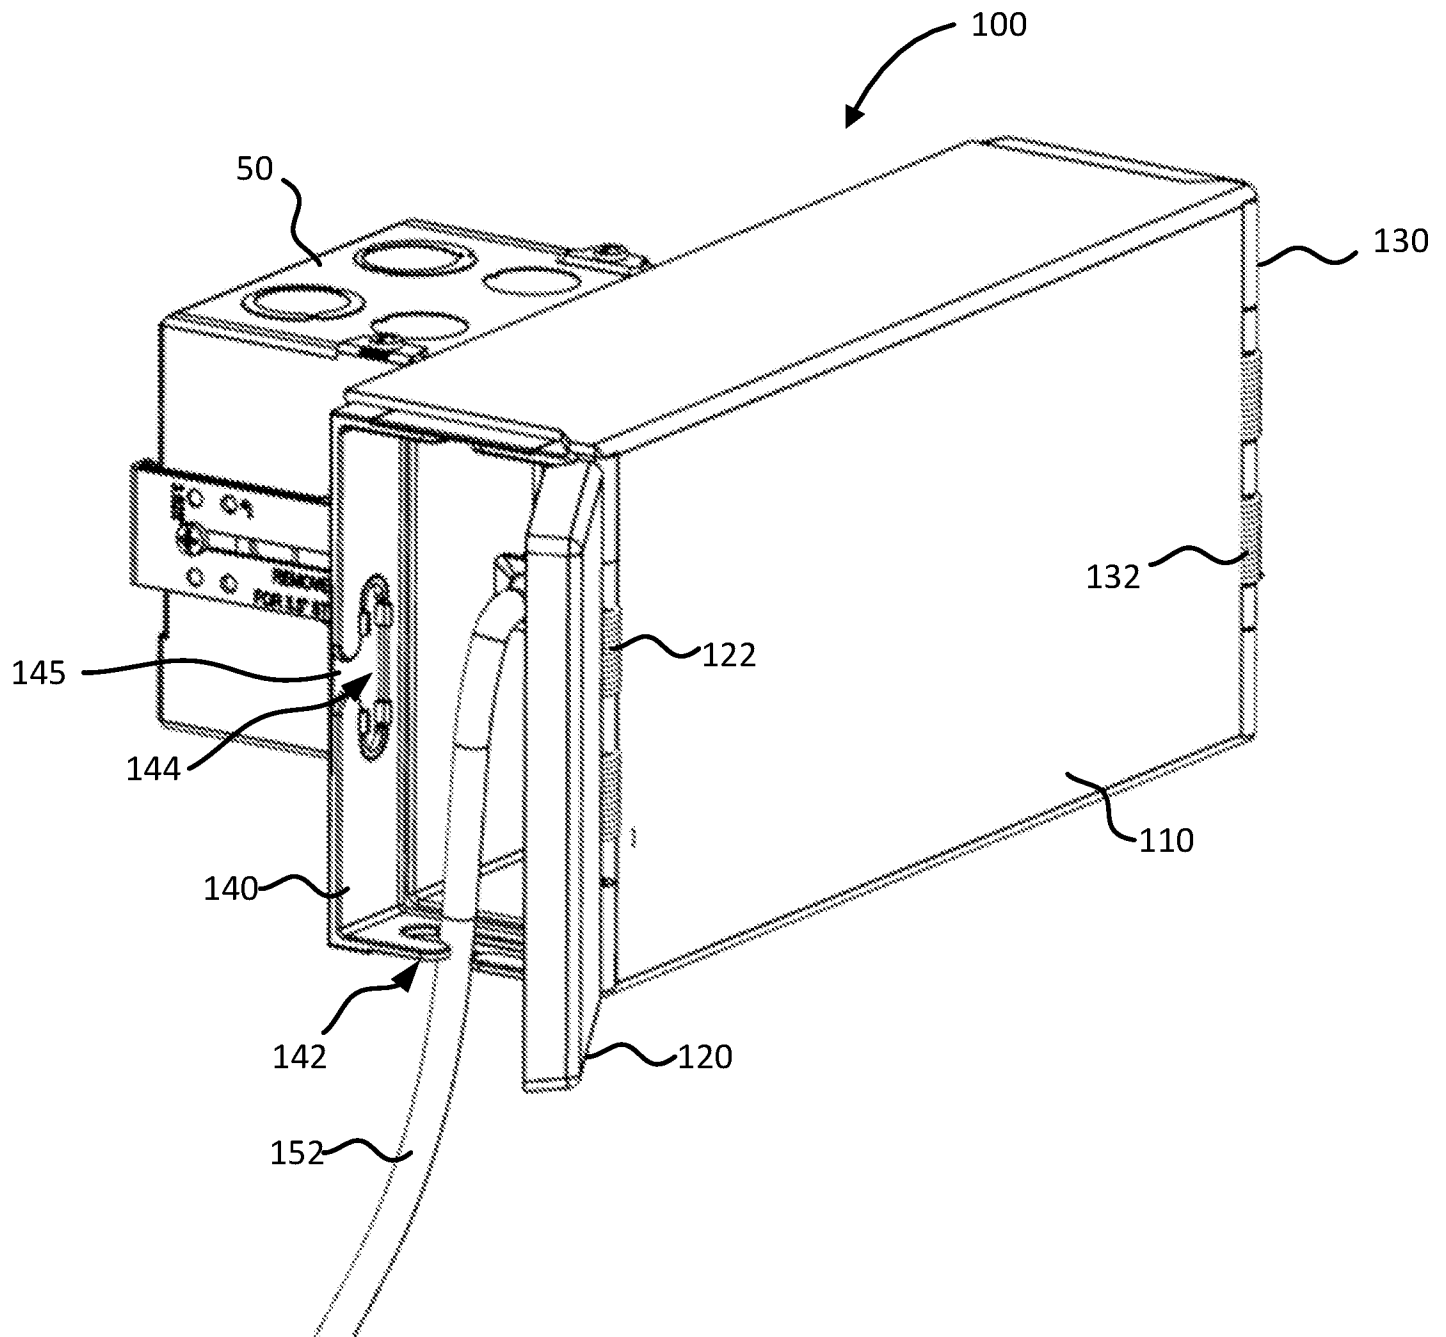


FIG. 4

4/15

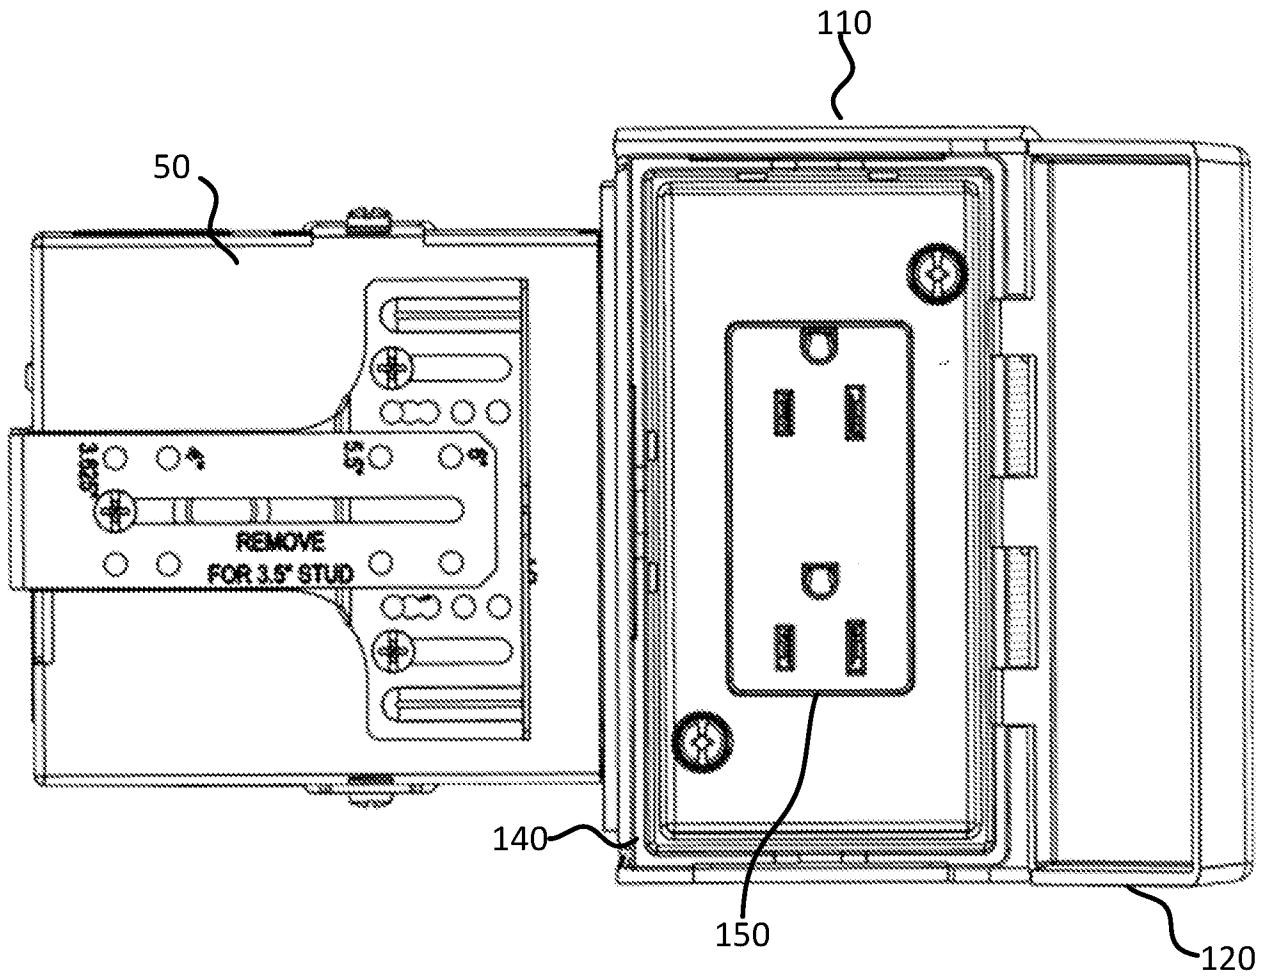


FIG. 5A

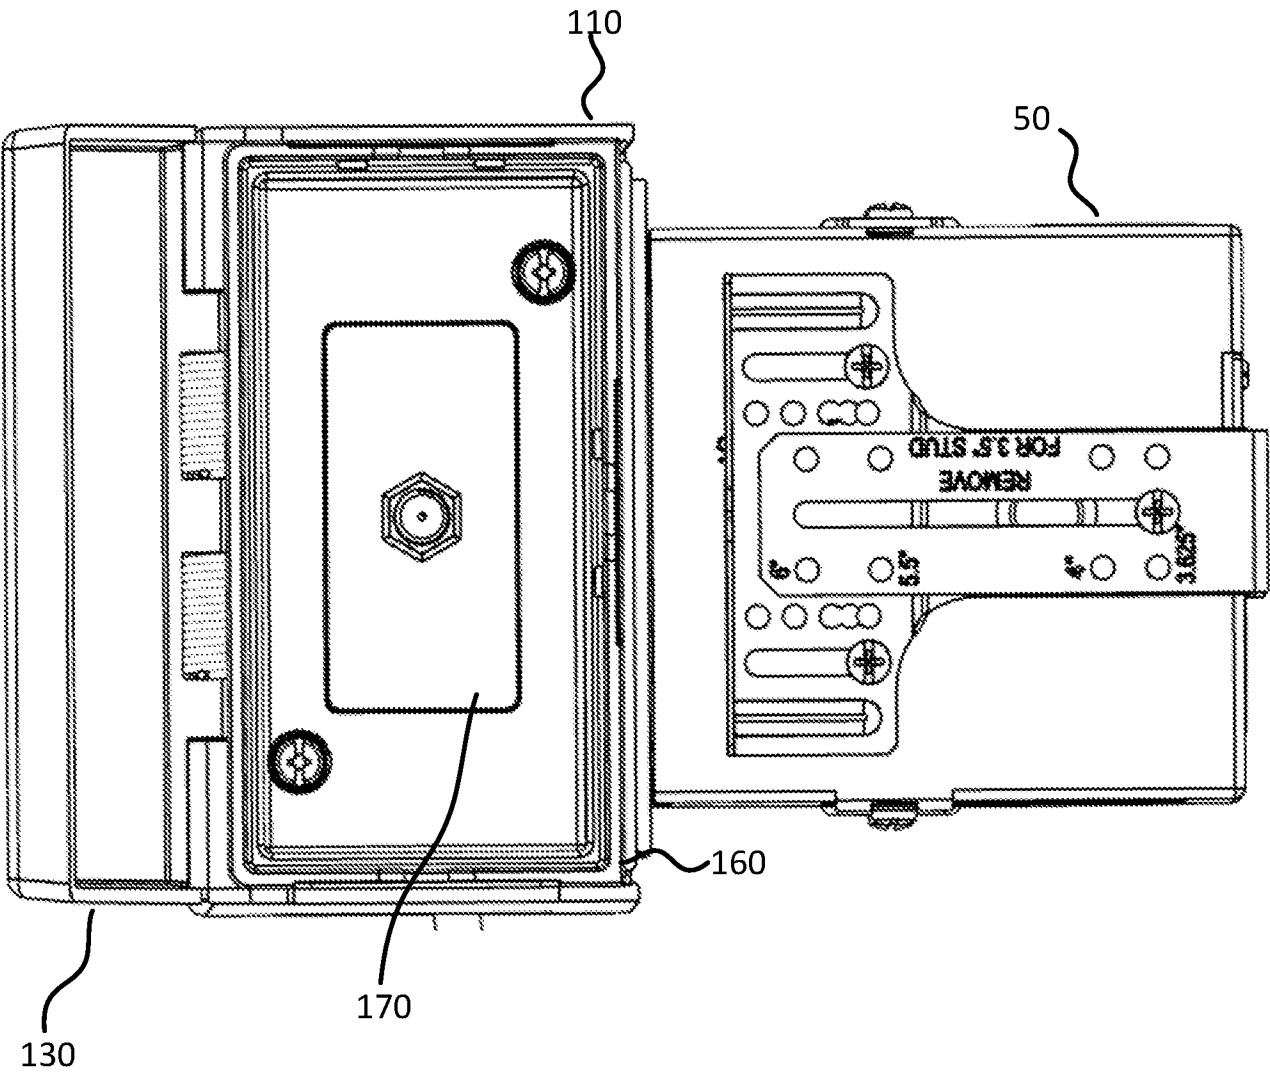


FIG. 5B

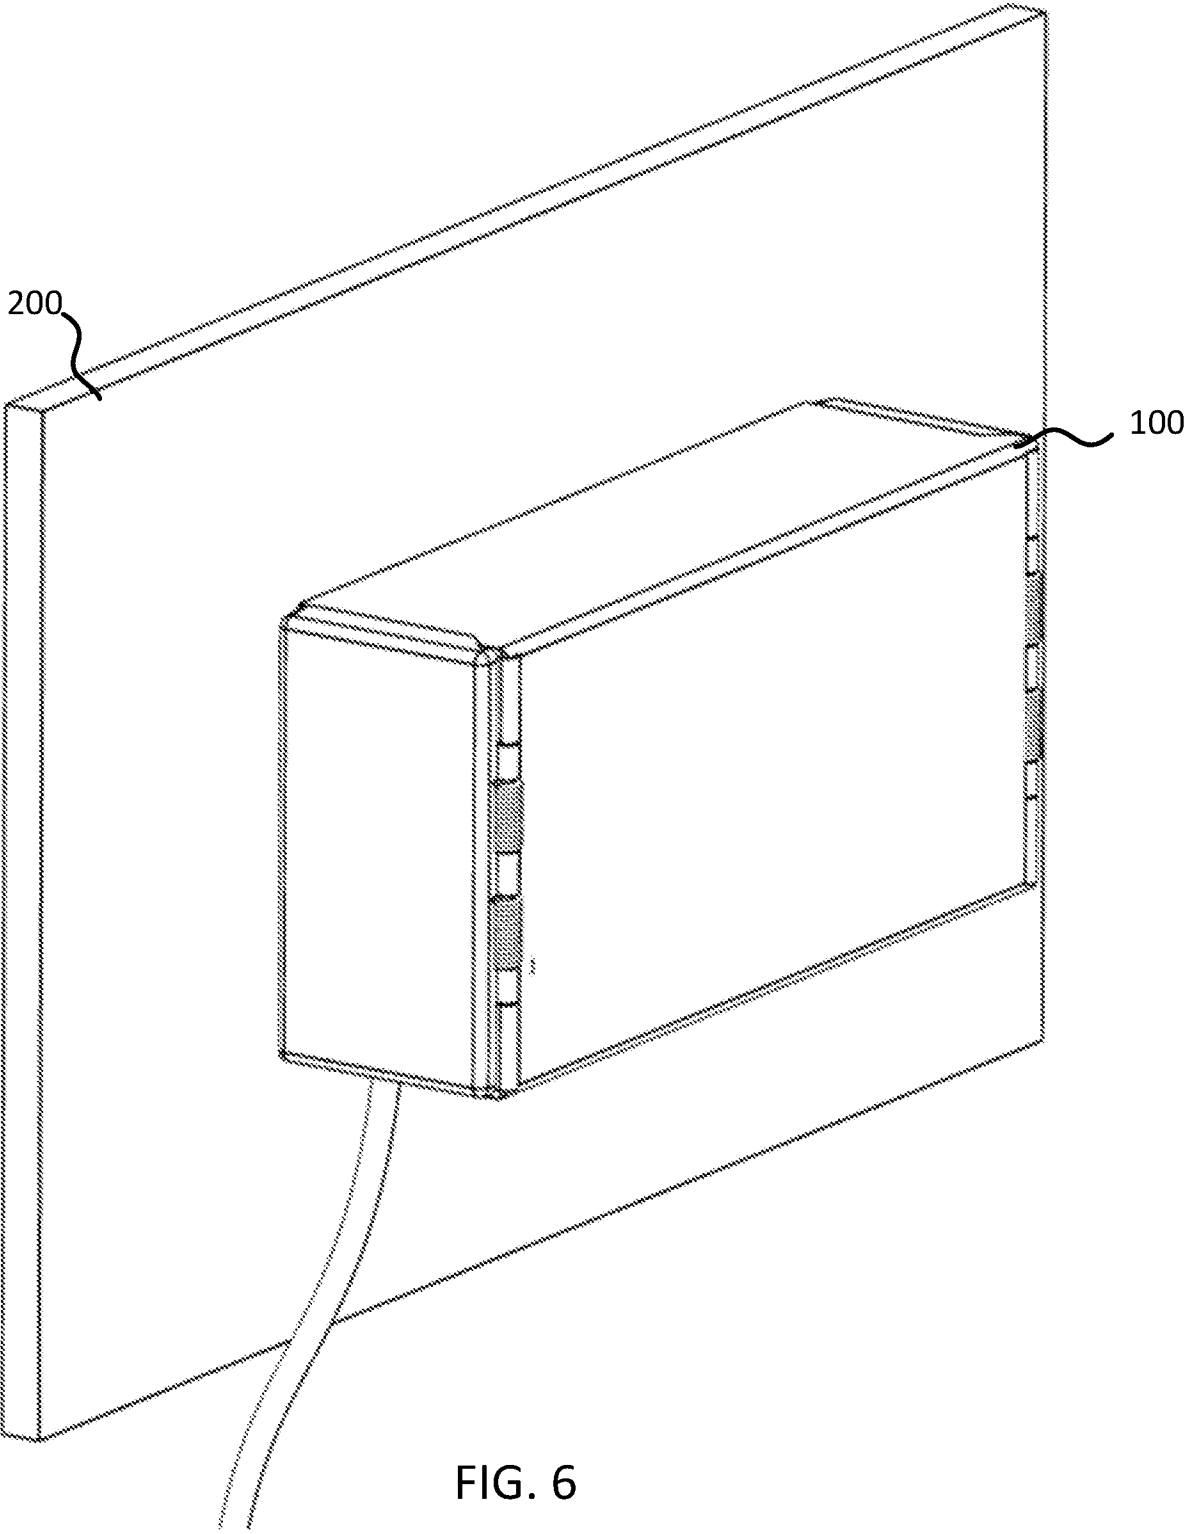


FIG. 6

7/15

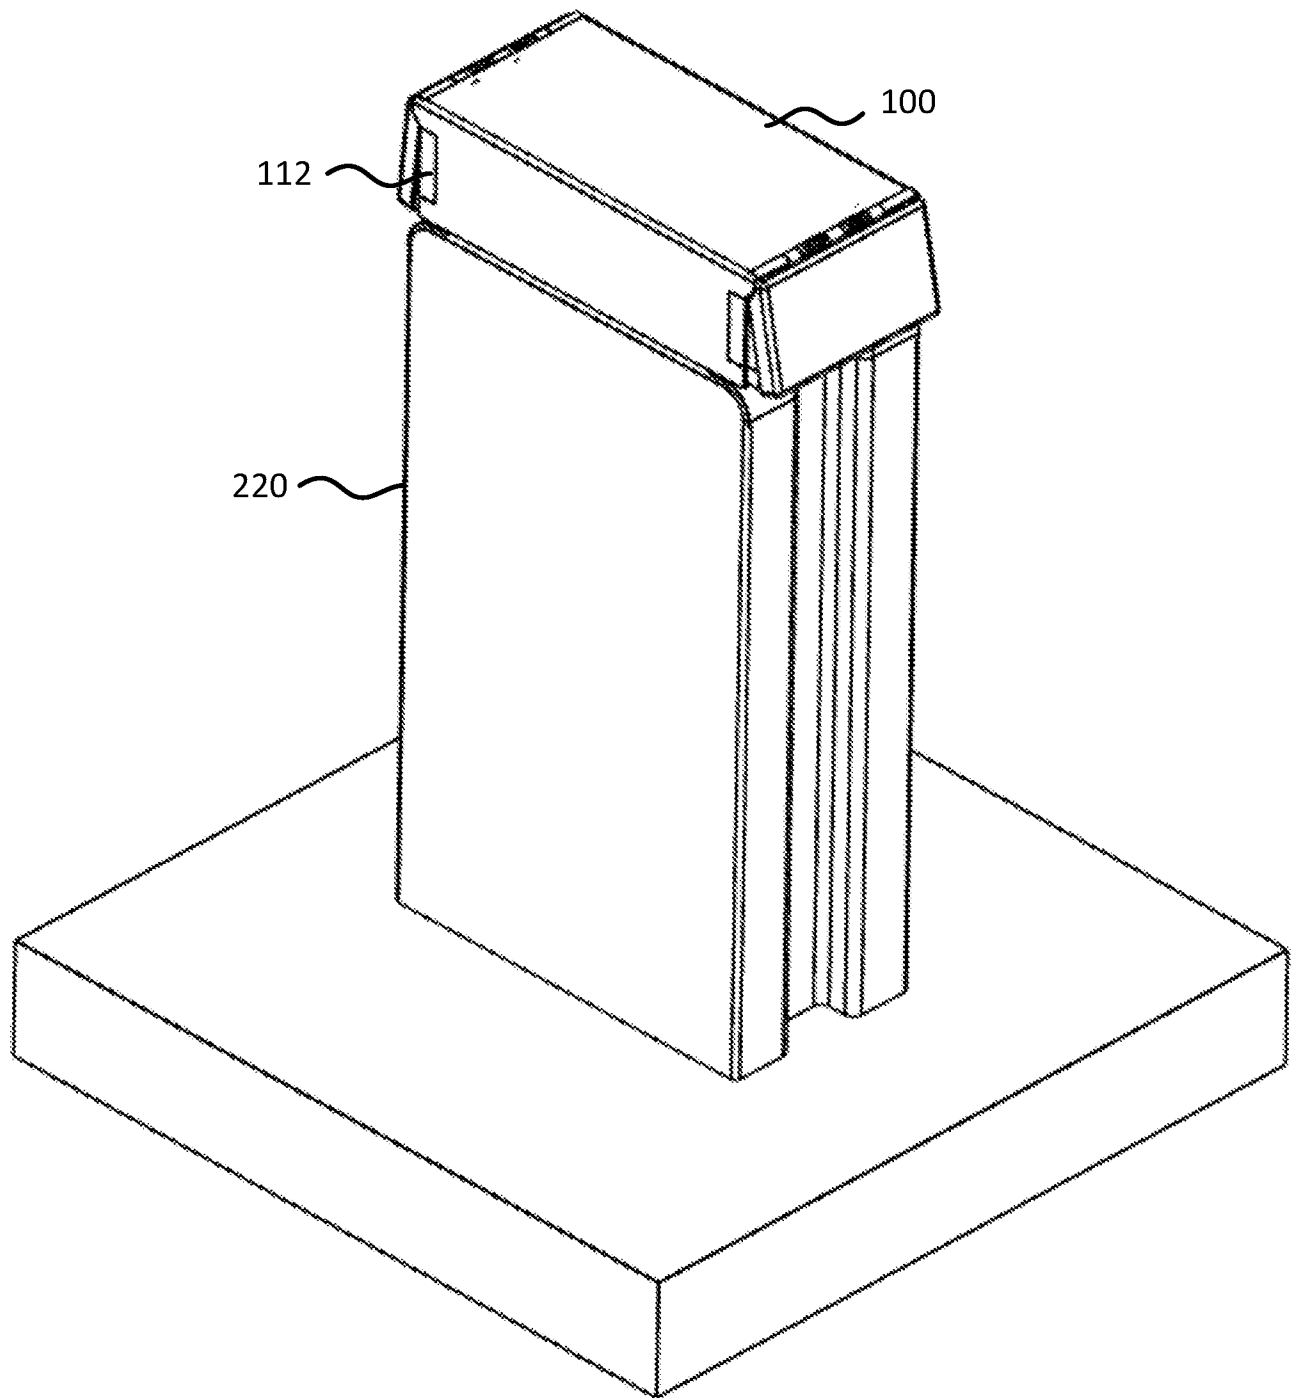


FIG. 7

8/15

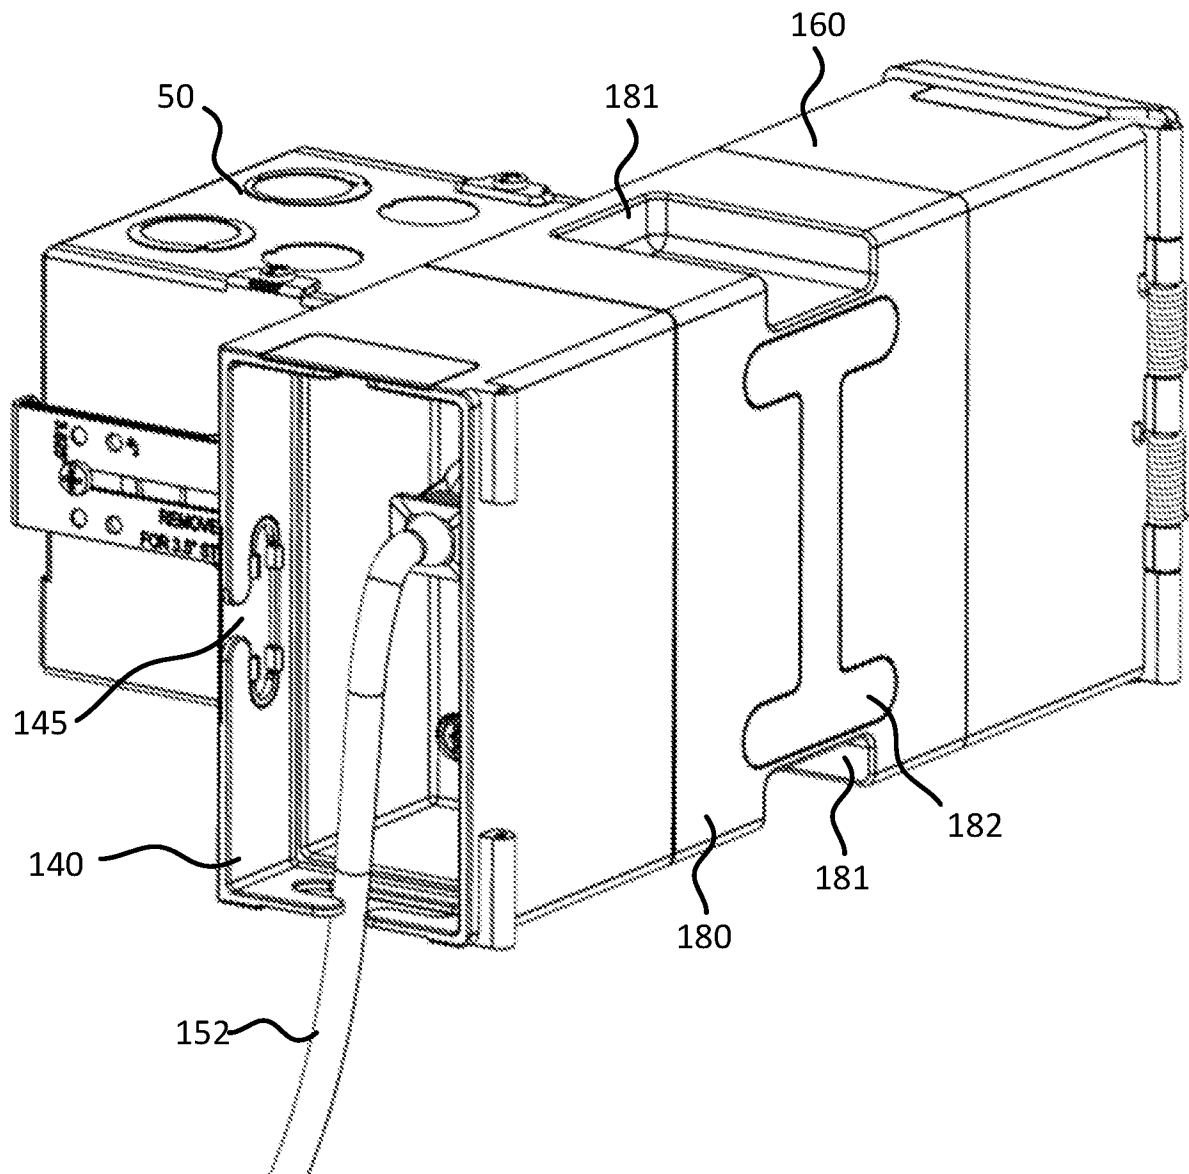


FIG. 8A

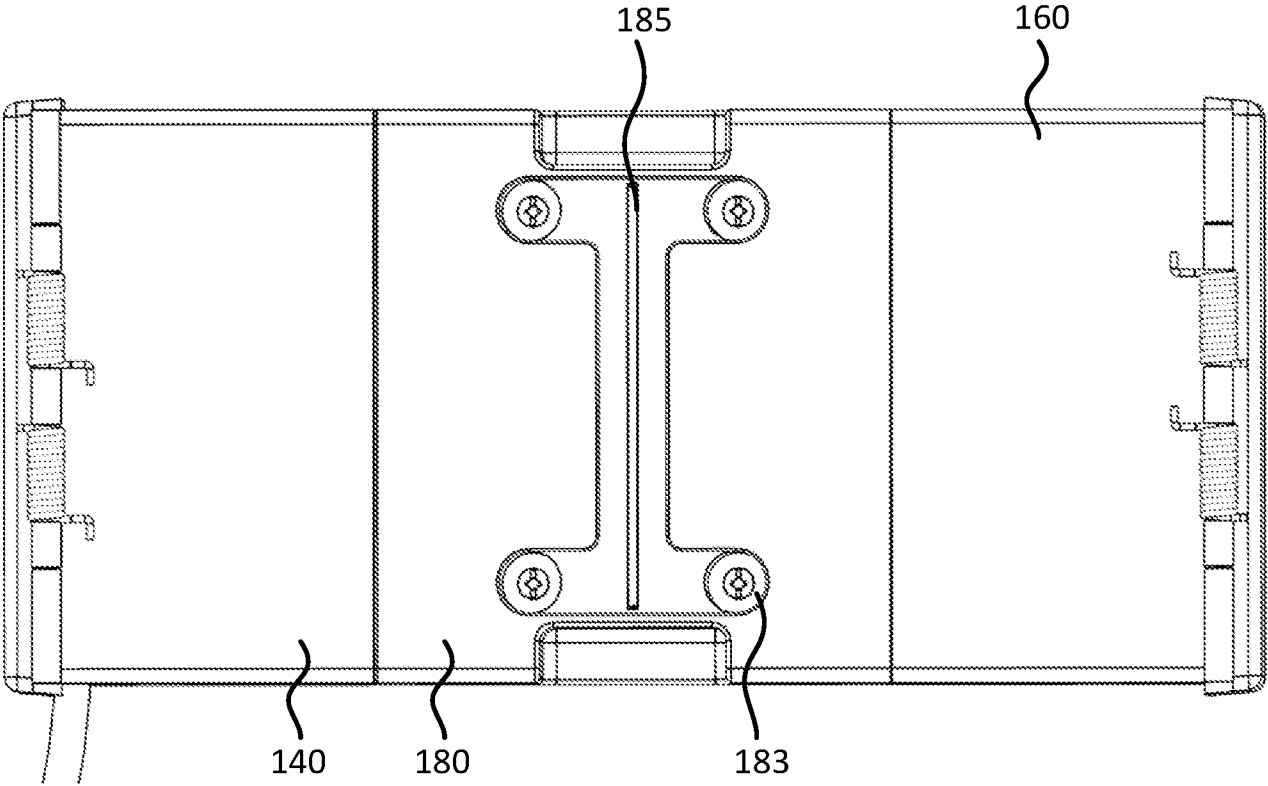


FIG. 8B

10/15

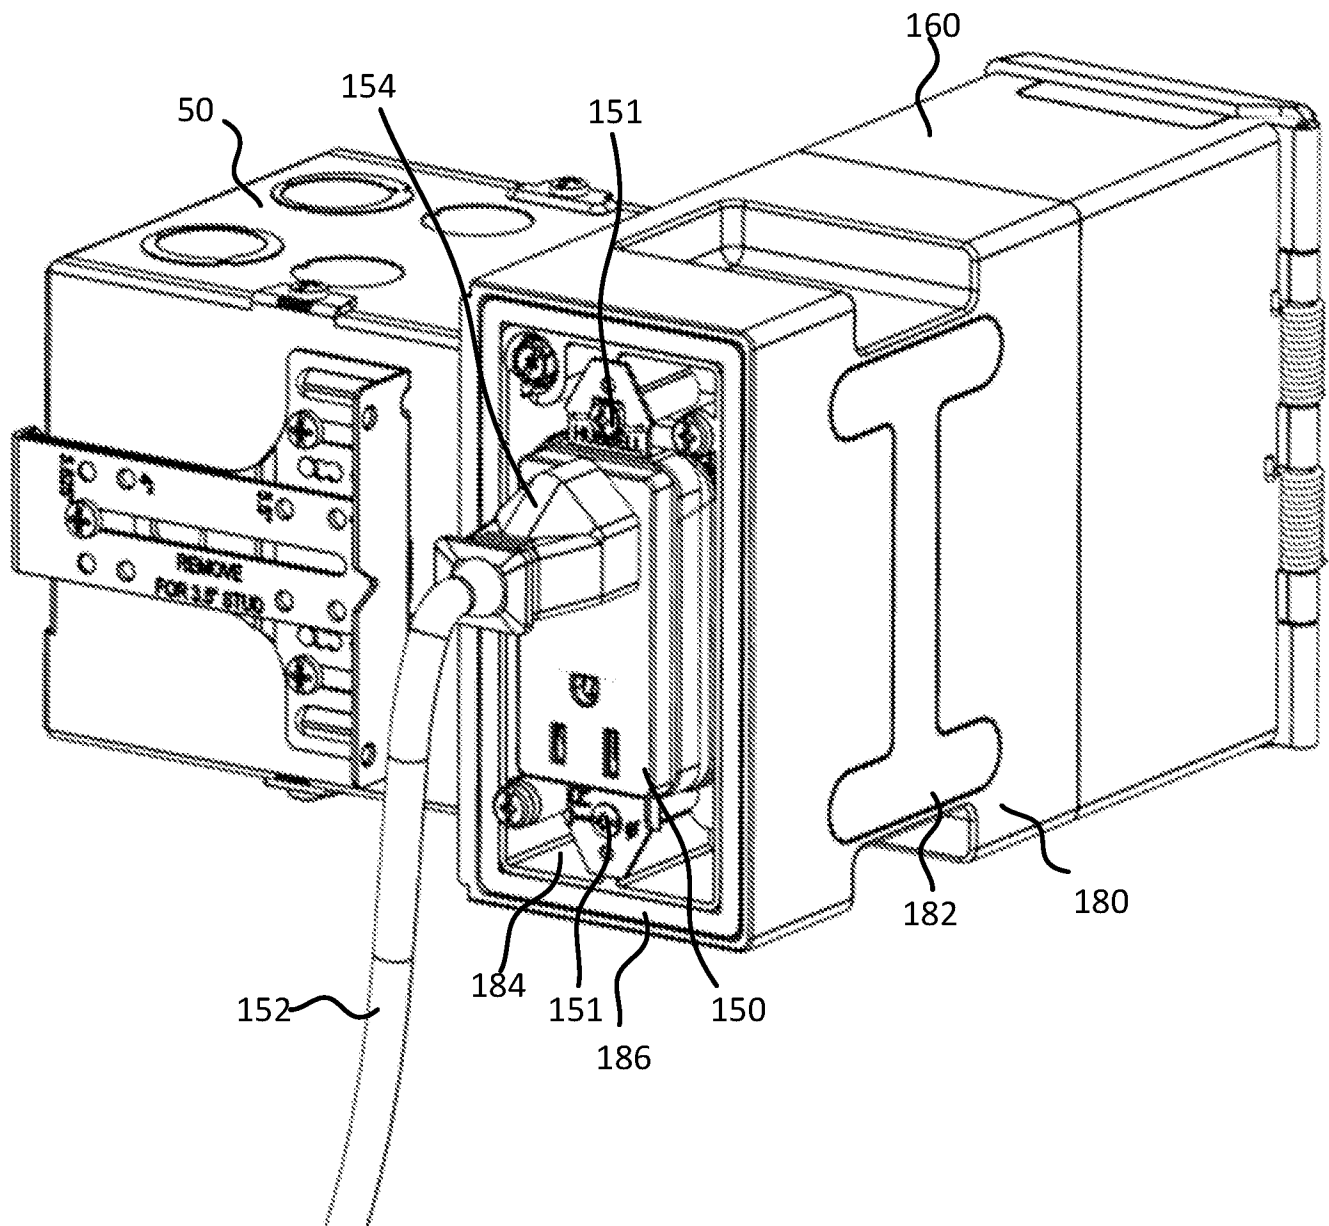


FIG. 9

11/15

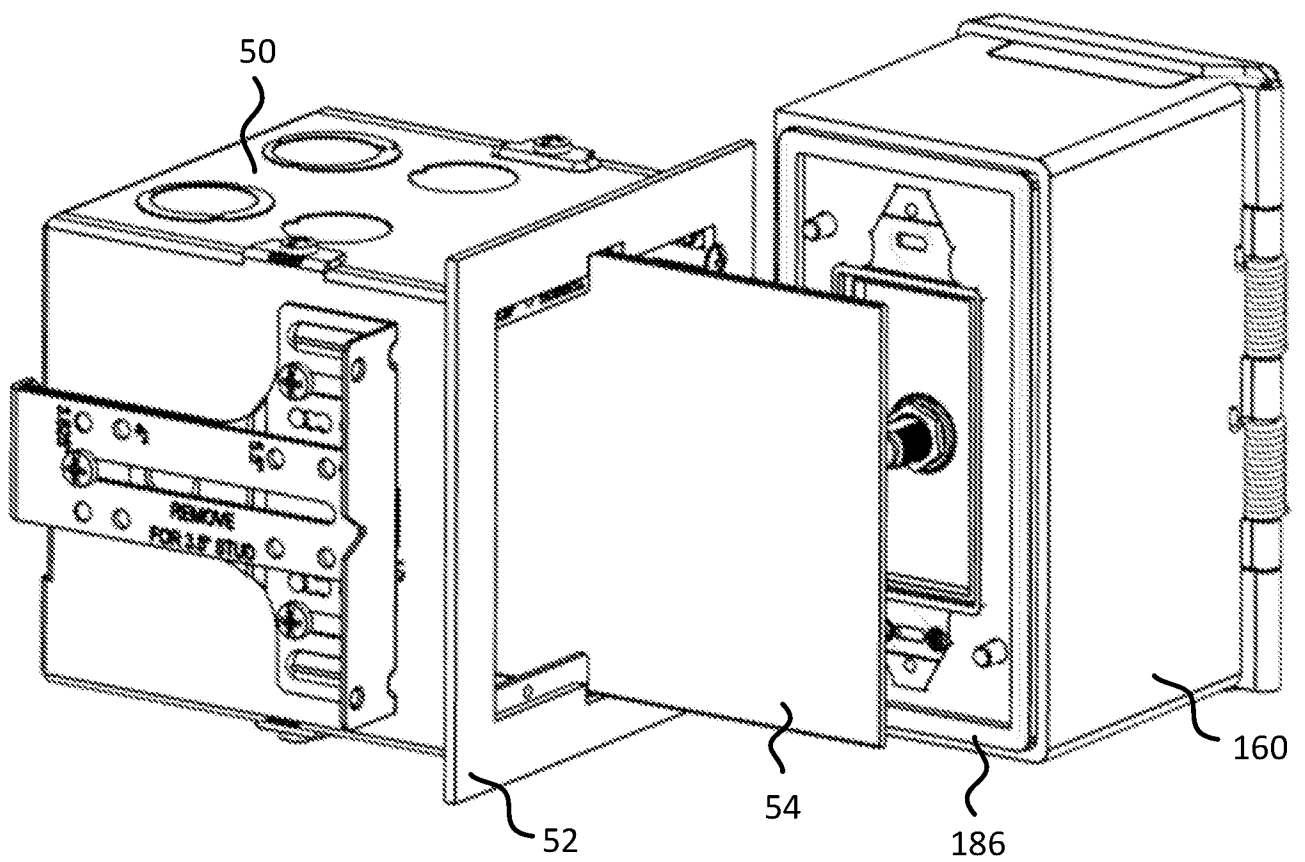


FIG. 10

12/15

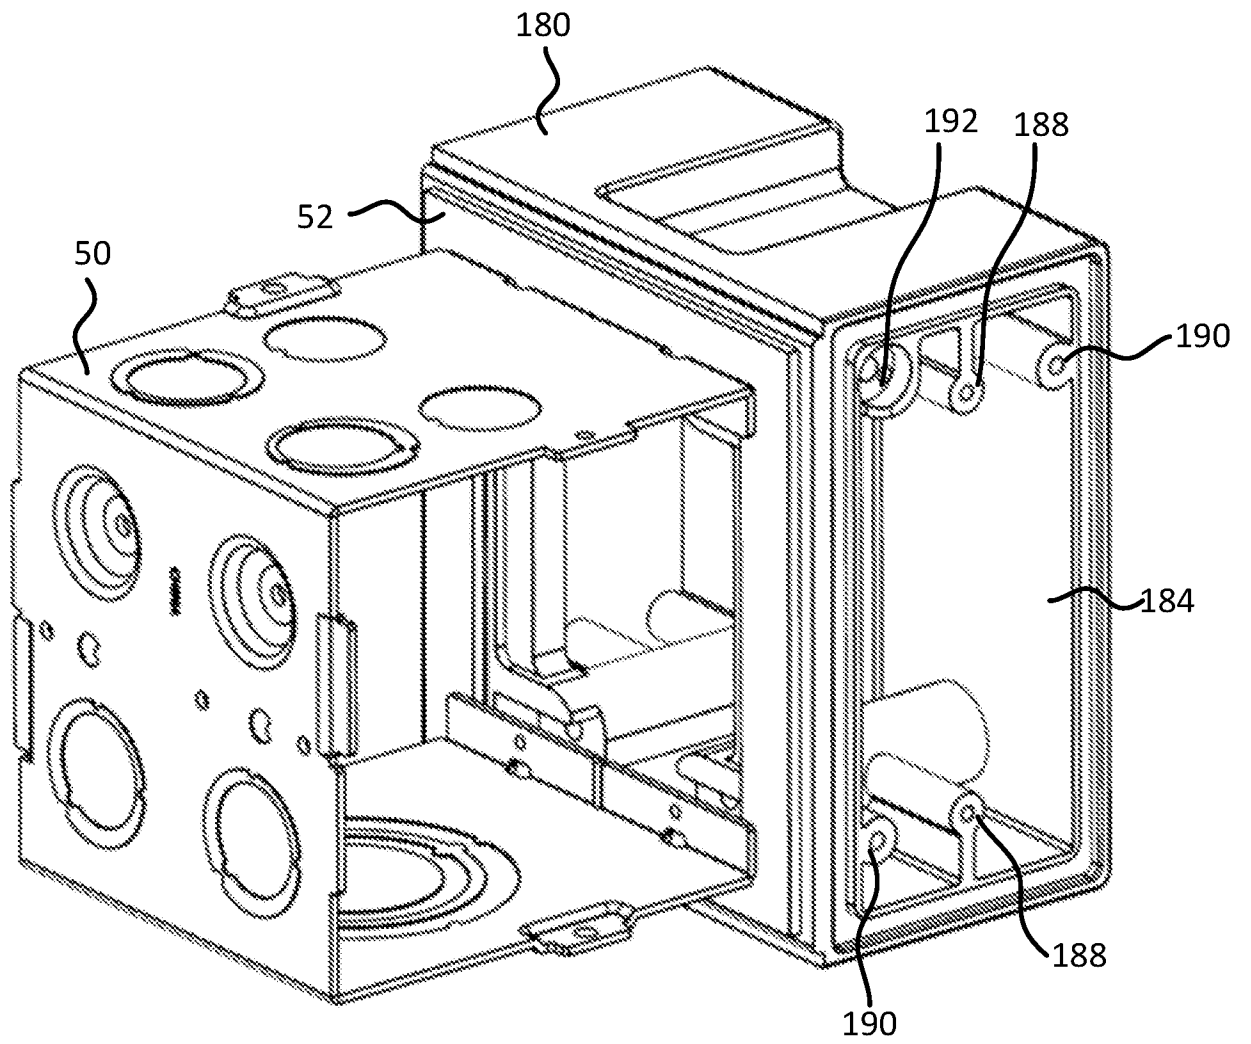


FIG. 11

13/15

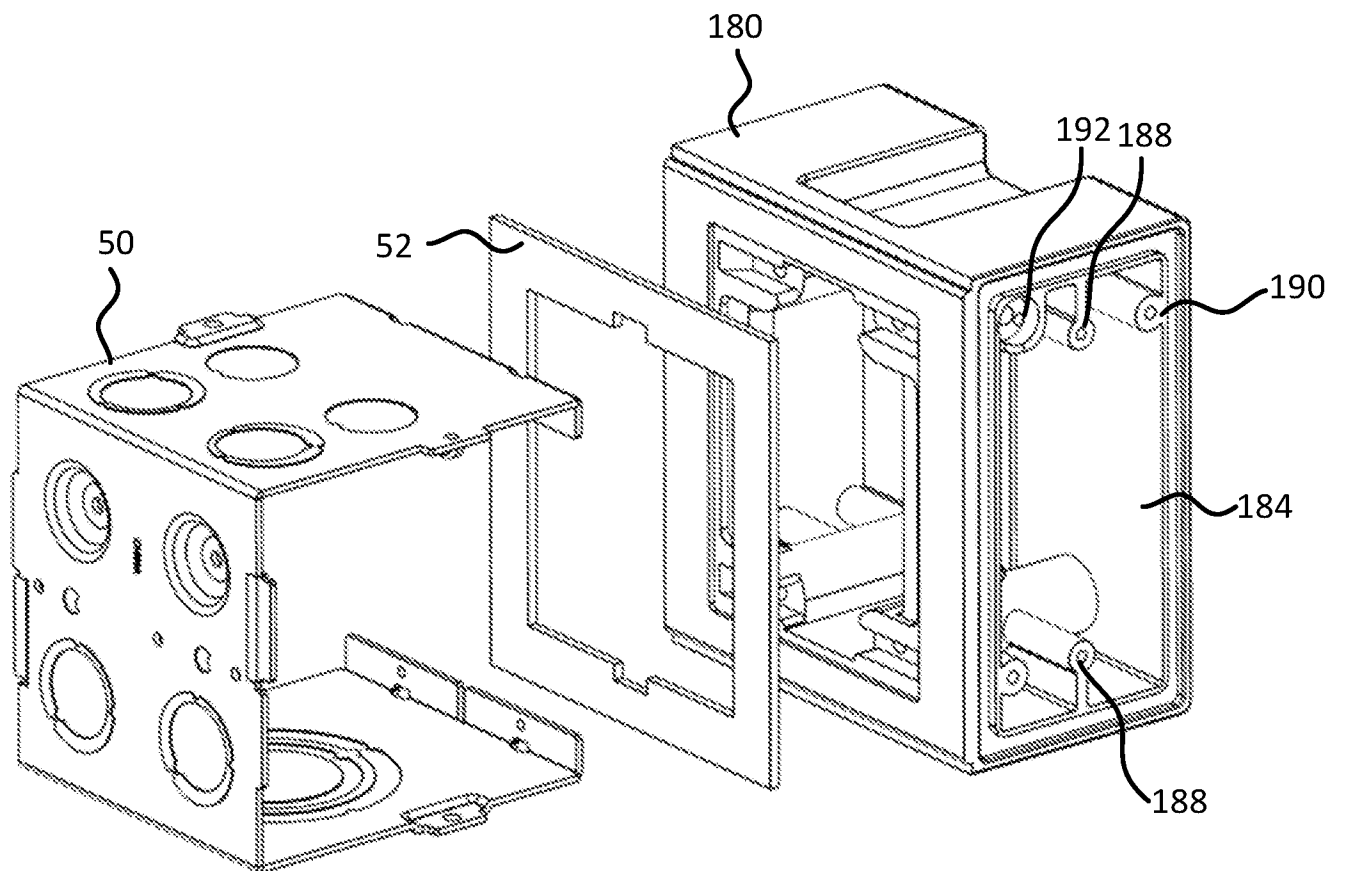


FIG. 12

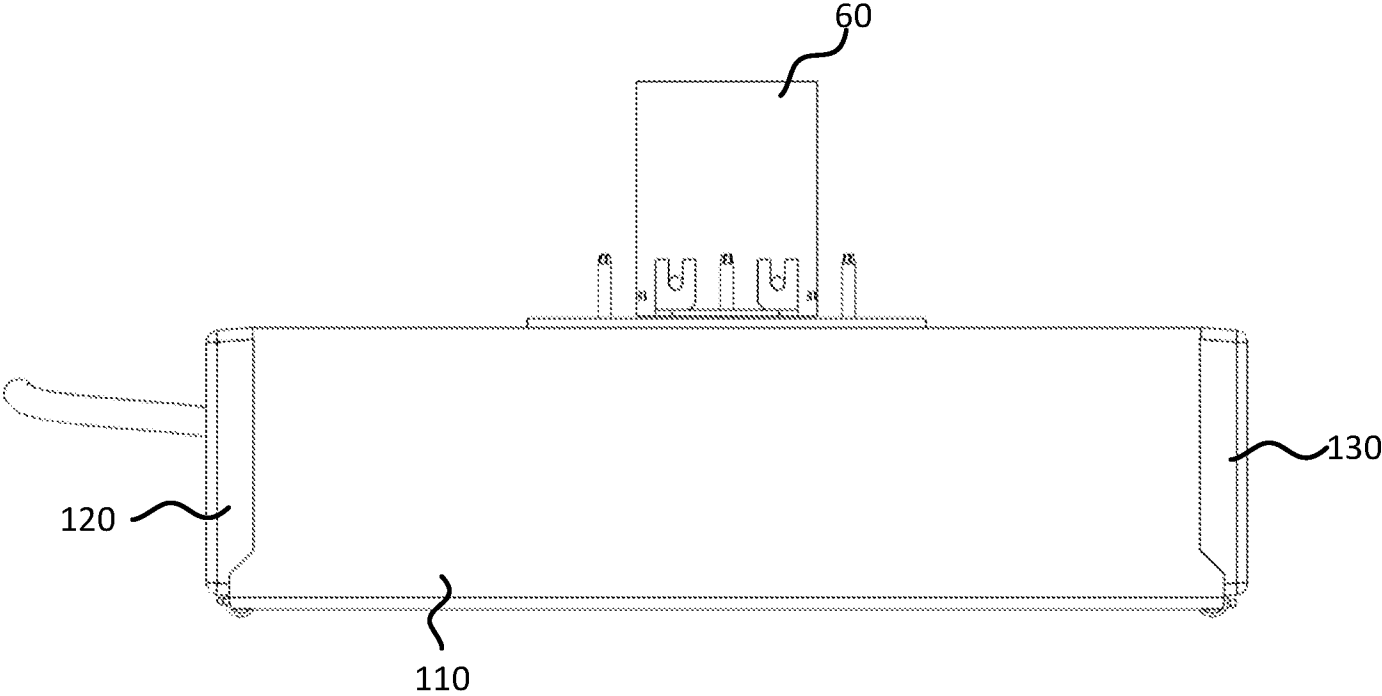


FIG. 13



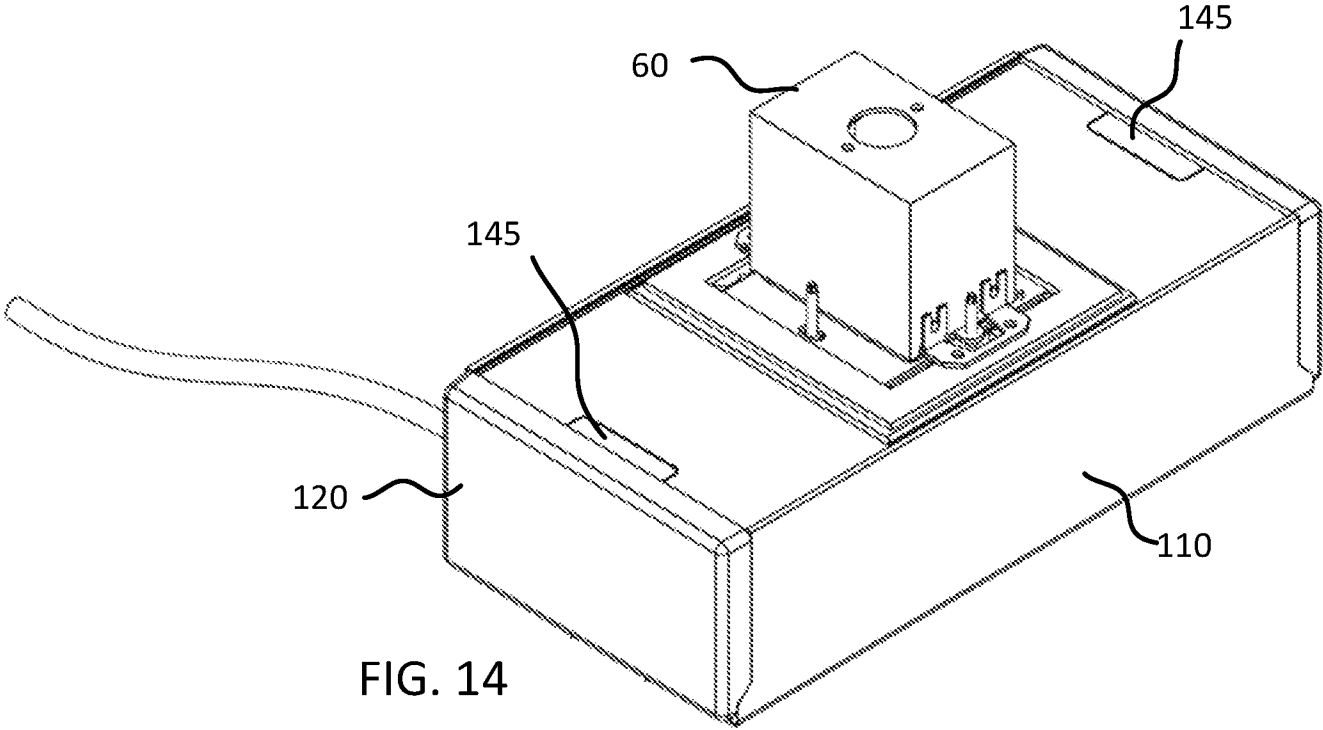


FIG. 14

15/15

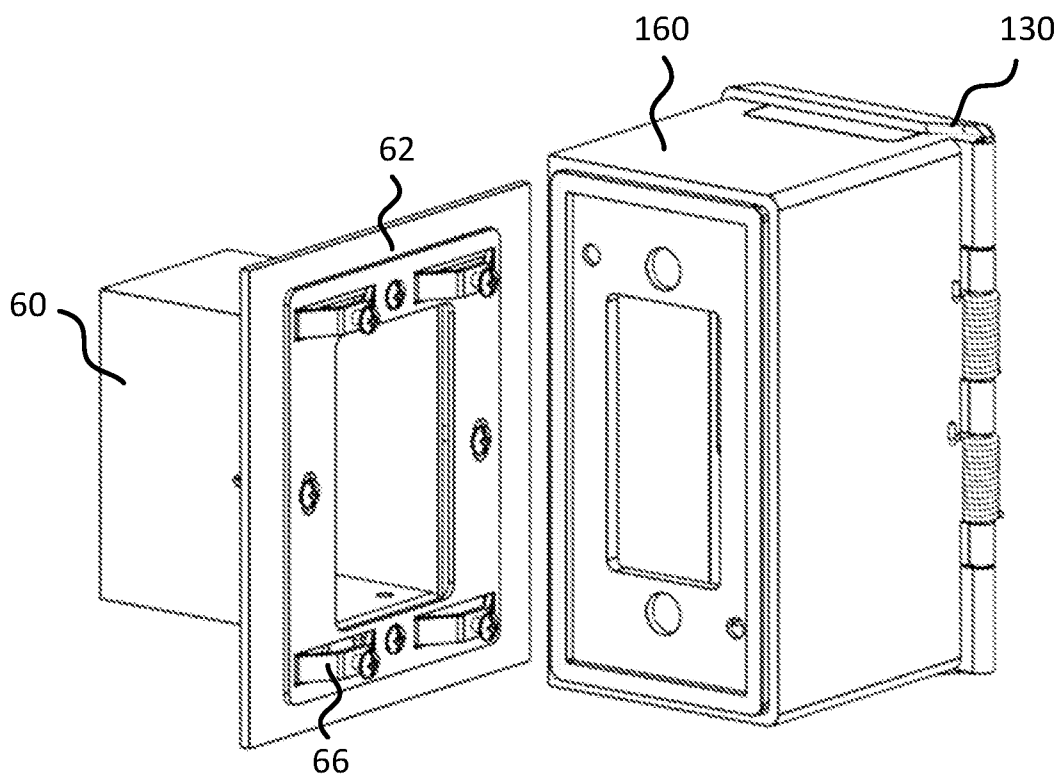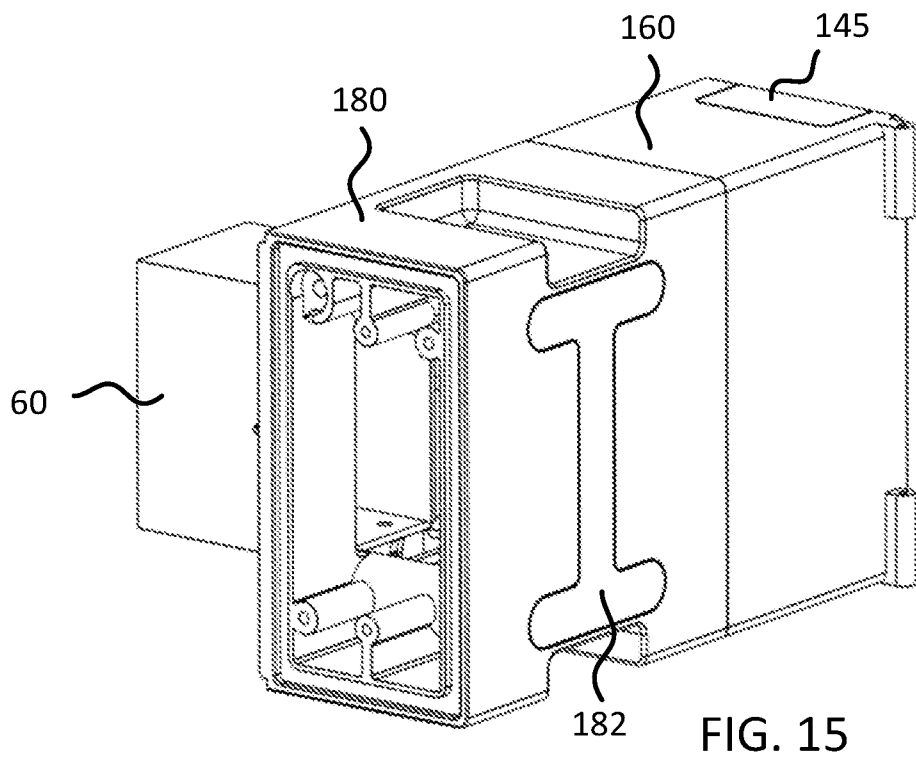

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/011809

A. CLASSIFICATION OF SUBJECT MATTER INV. H02G3/18 H02G3/14 H02G3/08 ADD. H02G3/12		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H02G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2 932 683 A (FLACHBARTH CHARLES T) 12 April 1960 (1960-04-12) column 1, line 42 - column 2, line 64; figures 1-3 -----	1-16
Y	US 4 240 688 A (SOTOLONGO THOMAS J [US]) 23 December 1980 (1980-12-23) column 2, line 4 - column 3, line 22; figures 1, 2, 4 -----	1-16
Y	US 4 470 656 A (MOSER JESSIE L [US] ET AL) 11 September 1984 (1984-09-11) column 1, line 62 - column 3, line 3; figures 1-4 -----	1-16
Y	US 2006/231282 A1 (GREENFIELD PETER [US]) 19 October 2006 (2006-10-19) paragraphs [0030] - [0037]; figures 1-2 ----- -/--	1-14
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance;; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance;; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 13 April 2022		Date of mailing of the international search report 20/06/2022
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Hermann, Robert

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/011809

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2018/048132 A1 (DINH CONG THANH [US] ET AL) 15 February 2018 (2018-02-15) paragraphs [0032] - [0040], [0044]; figures 1-4 -----	1-9, 13-16

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2022/011809

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims;; it is covered by claims Nos.:

1-16

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-16

Electrical box with a central housing, two extension compartments each of the extension compartments having a door, and an exterior cover.

2. claims: 17-23

Electrical box with a central housing configured to attach to a mounting box, a recess on a front side of the central housing to receive fasteners for attaching said housing to the mount box, and a slot in said recess extending into said central housing.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2022/011809

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2932683	A	12-04-1960	NONE	
US 4240688	A	23-12-1980	NONE	
US 4470656	A	11-09-1984	NONE	
US 2006231282	A1	19-10-2006	NONE	
US 2018048132	A1	15-02-2018	CA 2976073 A1 US 2018048132 A1	10-02-2018 15-02-2018