

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/103643 A1

(51) International Patent Classification⁷: **G01N 1/22**

(21) International Application Number:
PCT/DK2005/000279

(22) International Filing Date: 21 April 2005 (21.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA200400640 22 April 2004 (22.04.2004) DK

(71) Applicant (for all designated States except US): **FLS AIRLOQ A/S** [DK/DK]; Høffdingsvej 34, DK-2500 Valby (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FLOOR, Karsten, Brink** [DK/DK]; Nærum Hovedgade 91B, DK-2850 Nærum (DK).

(74) Agent: **ZACCO DENMARK A/S**; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR TAKING GASEOUS SAMPLES

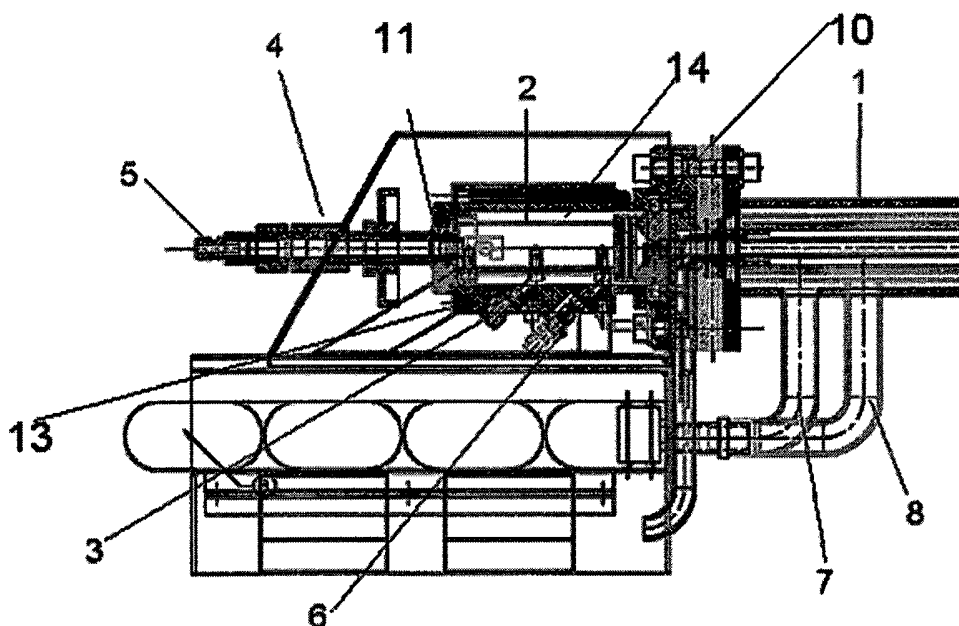

(57) Abstract: An apparatus and a method for taking out samples of a gaseous medium containing particles, the apparatus comprising a pipe having one end adapted for introduction into the gaseous medium, a tubular filter positioned coaxially with the pipe, a removable closure positioned on the down stream side of the tubular filter, means for removing filtered gas from the outside of the tubular filter and separate blow back means in communication with the outer side of the tubular filter.

WO 2005/103643 A1

Apparatus and method for taking gaseous samples

Field of invention

5 This invention relates to an apparatus for taking samples of a gaseous medium containing solid particles, said apparatus comprising a pipe having one end adapted for introduction into said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe, and means for
10 withdrawing filtered gaseous medium from the outer side of the tubular filter.

Background for the invention

15 In production processes involving a high fuel consumption, such as the processes in a cement production plant, it is important to know the composition of the gasses present during the process. The knowledge of the composition of the gasses is important in order to optimize the combustion process, to prohibit dangerous process situations, to reduce emission and to improve the quality of the product.

20

The temperature within a rotary kiln used for the production of cement is typically of the order of 1300°C and sometimes even above 1500°C and the combustion gasses have a dust content of up to 3000 g/Nm³. These harsh conditions set serious demands to the equipment used for measuring the
25 composition of the combustion gasses which has to be able to withstand the temperature as well as dealing the high dust content.

Normally the composition of the process gases is determined by taking out a small sample and analyzing said sample. This procedure is complicated by
30 the fact that the composition of the gasses changes over time and with temperature changes. Thus it is important to be able to get the sample fast

from the process to the sensors determining the composition but at the same time the dust must be separated from the gas to be analyzed.

5 Previous attempts to solve this problem all have disadvantages. It has been tried to withdraw the sample of the dust-containing gaseous medium through a filter placed in a pipe being introduced into the combustion chamber or by using a filter placed outside in a housing. This results in the inevitable clogging of the filter and in a manner which makes it very difficult to clean the filter and further there is a risk that the particles remain in the pipe and
10 cools/influences the new samples or even worse the particles begins to calcinate. Also visual inspection of the pipe is prohibited by the filter or the filter itself has to be removed prior to inspection. Inspection of such an arrangement takes up to 2 hours.

15 Another approach has been to withdraw a stream of dust containing gaseous medium from a combustion chamber, passing said stream through a filter device comprising a tubular filter and continuously recycling the flow to the combustion chamber. Samples of dust free gaseous medium are obtained by withdrawing gaseous medium from a zone surrounding the tubular filter. This
20 approach gives a heavy wear and tear due to the large amount of hot dust flowing through the system.

Thus there is a need for an apparatus and a method for taking out gas samples from medium containing solid particles which do not have the
25 drawbacks of the prior art.

According to the invention there is provided an apparatus for taking samples of a gaseous medium containing solid particles, said apparatus comprising a pipe having one end adapted for introduction into said gaseous medium, a
30 tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe, a

removable closure being positioned on the downstream side of the tubular filter and coaxially with the pipe and withdrawal means for withdrawing the filtered gaseous medium from the outer side of the tubular filter, the apparatus being characterized in that it further comprises separate blow back
5 means in communication with the outer side of the tubular filter.

According to another aspect of the invention there is provided an apparatus for taking samples of a gaseous medium containing solid particles, said apparatus comprising a pipe having one end adapted for introduction into
10 said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe, a removable closure being positioned on the downstream side of the tubular filter and coaxially with the pipe and withdrawal means for withdrawing the filtered gaseous medium from the outer side of the tubular
15 filter, the apparatus being characterized in that the pipe has cooling means for cooling the end adapted for introduction into the gaseous medium.

According to another aspect of the invention there is provided an apparatus for taking samples of a gaseous medium containing solid particles, said
20 apparatus comprising a pipe having one end adapted for introduction into said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe, a removable closure being positioned on the downstream side of the tubular filter and coaxially with the pipe and withdrawal means for
25 withdrawing the filtered gaseous medium from the outer side of the tubular filter, the apparatus being characterized in that the removable closure comprises an access port positioned coaxially with the pipe.

The apparatus of the invention operates as follows:
30

When the one end of the pipe is introduced into the gaseous medium from which samples are to be taken the means for withdrawing filtered gaseous medium from the outer side of the tubular filter will cause a slow of gaseous medium containing suspended solid particles to pass through the pipe and
5 the tubular filter and to form a layer of solid particles on the inner side of the tubular filter.

At intervals the access port in the closure on the downstream side of the tubular filter is opened thus allowing the interior side of the pipe and the filter
10 to be inspected. Preferably the access port further comprises a quick connector thus allowing for blow back of gas through the pipe during cleaning.

The layer of solid particles formed on the inner side of the filter may be
15 removed when appropriate by discontinuing the withdrawal of gaseous medium from the outer side of the tubular filter and by passing a stream of gaseous medium such as air from the outer side of the filter and into the pipe as explained in more details below.

20 The end adapted for being introduced into the gaseous medium is either permanently in the gaseous medium or as preferred the pipe is mounted in a slidable member and the moved into the gaseous medium when the samples are taken.

25 Due to the high temperatures present in a kiln it is often necessary to cool the end adapted for introduction into the gaseous medium, otherwise there is a risk that the end might melt or bend. If the end is cooled it should be done in a manner which at least minimizes the risk of calcinations resulting from reaction between different dust particles present in the kiln occurring within
30 the pipe or at the end of the pipe.

Further it is preferred that the cooling is preformed in a manner which prohibits formation of corrosive compounds e.g. reactions products of SO₂ or NO₂.

- 5 In a preferred embodiment of the apparatus the pipe has cooling means for cooling the end of the pipe being introduced into the gaseous medium and more preferred is an embodiment in which the cooling is performed by letting a liquid flow in a cavity in the pipe, preferably the cavity is provided in such a manner that it is unable to reach physical contact with the gaseous medium.

10

The sample is withdrawn by withdrawing filtered gaseous medium from the outer side of the tubular filter. This results in gaseous medium containing solid particle being transported from e.g. the kiln via the interior of the pipe to the inner side of the tubular filter. The gaseous medium then passes through
15 the tubular filter leaving the solid particles on the inside of the filter. Preferably the sample is with drawn by means of a pump and more preferably only the amount of gaseous medium needed for the analyse is withdrawn. Thus the amount of gas passing through the pipe can be heavily reduced. Previously the amount of gas passed through the pipe using
20 continuously flow is in order of 30-40 m³/h, with this new apparatus there is only need for 50-70 l/h and an visual inspection is allowed.

In a preferred embodiment of the invention the tubular filter is attached in the apparatus with an elastic material so as to allow it to expand when heated by
25 the gaseous medium. More preferably the filter is attached by means of at least one O-ring made of an elastic material and even more preferably the filter is attached by means of two O-rings. The O-ring also serves as a gas tight sealing thus securing the no sample gas bypass the filter. By using such an attachment of the filter it is possible to use a variety of filtering material
30 since the person skilled in the art do not have to worry about expansion of the filter. Further this design allows for at larger temperature range in which

the apparatus can be used since the filter as mentioned can expand during heating. This is an advantage compared to prior mounting of the filter.

5 The tubular filter can be made of any conventional filter material. In a preferred embodiment the filter is made of: centred stainless steel, reinforced fibre glass, a porous material or a ceramic material.

In a preferred embodiment inner diameter of the tubular filter has a ratio to the inner diameter of the pipe within the ranges of: 1:1 to 1:5.

10

Preferably the withdrawal means are in form of a withdrawal port and preferably the blow back means are in form of a blow back port. The advantage of having the blow back port separated from the withdrawal port is that there it solves the problem that occurs when mixing cold cleaning gas with hot sample gas inside the port. In this case there is a risk of condensation of both water and acid components from the sample gas due to the temperature change of the sample gas when it meets the cold cleaning gas. By using dry cleaning gas in a separate port condensation is avoided.

20 Even though only a small amount of gas is passed through the tubular filter from time to time it will be necessary to clean the filter. In this new apparatus the cleaning procedure is much easier than the previously known procedures. Further with this new procedure a much more powerful cleaning can be obtained. This is a result of having one straight pipe which secures that the pressure drop is minimal thus all the power in the cleaning blow is used to transport dust out of the pipe.

30 First a small amount of gaseous medium is passed from the outer side of the tubular filter to the inner side of said filter, thus lifting the filtered particles from the filter surface. Preferably the gaseous medium is supplied by means of a pump in communication with the outside of the tubular filter e.g. by

having a compressor creating a super-pressure in a storage tank and the lead gas from said storage tank to the outside of the filter.

5 The particles lifted from the filter surface are then carried back into the kiln by a second gas flow, which preferably is provided through the access port and preferably by means of another pump or even more preferably by leading a second gas stream from the previously mentioned storage tank or from a second storage tank to the quick connector of the access port in the removable closure. In a more preferred embodiment the second gas flow is
10 provided by means of a pressure tube.

After this cleaning a visual inspection of the pipe is often desirable. In this new apparatus such an inspection only takes in the order of 2 minutes. The access port is opened and then there is line of sight through the pipe allowing
15 for inspection by looking through the pipe. Previously the pipe arrangement has to be disconnected or the filter has to be removed and operation which takes from 30 minutes up to 2 hours. If necessary it is possible to manually clean the pipe by introducing a rod through the access port and into the pipe thus removing any particulate matter in the pipe.

20

By using the apparatus according to the invention also a new method is provided i.e. a method for withdrawing a sample of gaseous medium from a gaseous medium containing solid particles comprising the steps of:

- 25 - withdrawing a sample of gaseous medium through a pipe having one end adapted for introduction into said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe and said pipe having cooling means for cooling the end adapted for introduction
30 into the gaseous medium

- passing the sample through the tubular filter from the inner side to the outer side for filtering off the solid particles
- withdrawing the filtered gaseous medium from the outer side of the tubular filter.

5

Further the apparatus provides a new method for visual inspection of the pipe in an apparatus according to the invention, said method comprising the step of:

- 10 - opening an access port in a removable closure
- inspecting the pipe
- optionally closing the access port in the removable closure

Further the invention provides a new method for cleaning an apparatus of the
15 above mentioned kind, the method comprising the steps of

- introducing a first cleaning gas to the outer side of a tubular filter via separate blow back means
- passing the cleaning gas from the outer side of the tubular filter to the
20 inner side of the tubular filter
- introducing a stream of a second cleaning gas coaxially with the axis of the pipe so as to carry particulate matter to the end of the pipe adapted for introduction into the gaseous medium

25

The term separate blow back means it to be understood as means different from those means use to withdraw filtered gas.

In a preferred embodiment the first and the second cleaning gasses are
30 introduced simultaneously.

The first and the second cleaning gasses can be of the same kind or being different, preferably they are the same.

In another preferred embodiment the first and the second cleaning gas are introduced alternatingly.

In the following the invention will be described in further details with reference to the figures.

Figure 1 shows an embodiment of the apparatus according to the invention.

Figure 2 shows a longitudinally view of the apparatus from the end comprising the removable closing.

Figure 3 shows an enlargement of the pipe.

Figure 4 shows an enlargement of the pipe with the removable closure removed.

Figure 5 shows the mechanism of taking out gaseous samples.

Figure 6 shows the mechanism of cleaning.

Figure 1 illustrates an apparatus for taking out a sample of a gaseous medium containing solid particles according to the invention said apparatus comprises a pipe (1) with a coaxially mounted tube-shaped filter (2). On the outside of said tube-shaped filter (2) there are means (3) for sucking out the filtered gas. The tube-shaped filter is mounted in the apparatus by two O-rings (10) which is made of an elastic material. The filtered gas is led to an analyzing chamber (not shown) where the composition of the gas is determined. In the end of the pipe being opposite to the end being introduced

into the gaseous medium is a removable closing (11). The removable closing (11) is positioned after the pipe-shaped filter and is placed coaxially with the pipe. The removable closing further comprises an access port (4) positioned coaxially with the pipe and which allows for rapid inspection of the pipe and cleaning if necessary. The access port has connecting means (5) for
5 connecting a pressure tube to the closing, thus providing the option of blowing cleaning gas through the pipe in the opposite direction than the flow direction of the sample being taken out. One of the walls (13) embracing the chamber (14) positioned on the outside of the filter also has means (6) for
10 connecting a gas source to the apparatus. During cleaning, gas is supplied from a gas source via the means (6) to the outside of the filter. The gas is then passed from the outside of the filter to the inside of the filter and during this passing the solid particles is lifted from the inside surface of the filter and is carried out of the pipe by the cleaning gas flowing through connecting
15 means (5). This embodiment of the apparatus further comprises cooling means for cooling the end of the pipe being introduced into the gaseous medium. A liquid is passed from (7) via at least one cavity in the pipe to the end being introduced into the gaseous medium and back to the exit (8) or visa versa. The cavity in the pipe is made in such a manner that the liquid
20 flowing in the cavity is unable have physical contact with the gaseous medium and/or the sample being taken out i.e. the cavity is adapted to receive a cooling liquid.

In figure 2 the apparatus is shown from the end having the removable
25 closing. It can be seen how it is possible to visual inspection of the pipe (1) since it is strait. Further the cavity (9) for the cooling liquid is illustrated.

In figure 3 the pipe is enlarged. The pipe-shaped filter (2) is attached to the removable closure (11) and as can be seen in figure 4 the pipe-shaped filter
30 can be removed along with the removable closure.

Figure 5 illustrates how the gaseous medium containing solid particles passes through the pipe to the filter, which the gaseous medium passes leaving the solid particles on the inner side of the filter and that the filtered gas is withdrawn from the outside.

- 5 Figure 6 illustrates the cleaning procedure in which gas is blown from the outside of the filter, through the filter lifting off the filter off particles. The lifter particles in then carrier out of the pipe by a second gas flow.

CLAIMS

1. An apparatus for taking samples of a gaseous medium containing solid particles, said apparatus comprising a pipe having one end adapted for introduction into said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe, a removable closure being positioned on the downstream side of the tubular filter and coaxially with the pipe and withdrawal means for withdrawing the filtered gaseous medium from the outer side of the tubular filter, the apparatus being characterized in that it further comprises separate blow back means in communication with the outer side of the tubular filter.
2. An apparatus according to claim 1, characterized in that the removable closure comprises an access port positioned coaxially with the pipe.
3. An apparatus according to claim 1 or 2, characterized in that the pipe has cooling means for cooling the end adapted for introduction into the gaseous medium.
4. An apparatus according to any one of claims 1-3, characterized in that the apparatus further comprises at least one connecting means for connecting the apparatus to a gas source.
5. An apparatus according to any one of claims 2 or 4, characterized in that the access port has connecting means (5) for connecting the apparatus to a gas source.
6. An apparatus according to any one of claims 1 to 5, characterized in that the separate blow back means is positioned in one of the walls embracing a chamber (14) on the outside of the filter.
7. An apparatus according to any one of claims 1 to 6, characterized in that both the access port (5) and one of the walls embracing the

chamber on the outside of the filter has means for connecting the apparatus to a gas source.

8. An apparatus according to any one of the preceding claims, characterized in that the pipe (1) has at least one cavity (9) adapted to receive a cooling liquid.

9. A method for withdrawing a sample of gaseous medium from a gaseous medium containing solid particles comprising the steps of:

- withdrawing a sample of gaseous medium through a pipe having one end adapted for introduction into said gaseous medium, a tubular filter for filtering off the solid particles, said filter being positioned coaxially with the pipe and communicating with the interior of the pipe and said pipe having cooling means for cooling the end adapted for introduction into the gaseous medium
- passing the sample through the tubular filter from the inner side to the outer side for filtering off the solid particles
- withdrawing the filtered gaseous medium from the outer side of the tubular filter.

10. A method for visual inspection in an apparatus according to claim 1 to 8 comprising the step of:

- opening an access port in a removable closure
- inspecting the pipe
- optionally closing the access port in the removable closure


11. A method for cleaning an apparatus according to any one of claims 1 to 8 comprising the steps of

- introducing a first cleaning gas to the outer side of a tubular filter via separate blow back means

- passing the cleaning gas from the outer side of the tubular filter to the inner side of the tubular filter
 - introducing a stream of a second cleaning gas coaxially with the axis of the pipe so as to carry particulate matter to the end of the pipe adapted for introduction into the gaseous medium
- 5

1/3

FIGURE 1

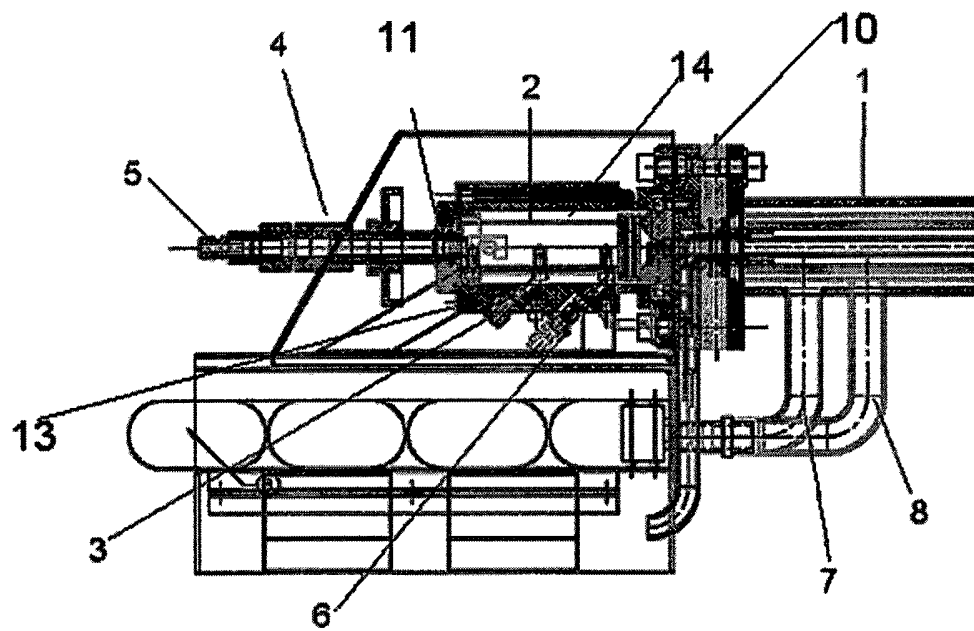

2/3

FIGURE 2


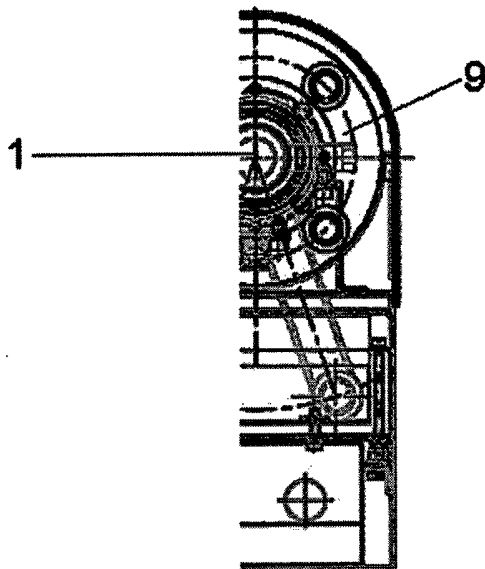


FIGURE 3

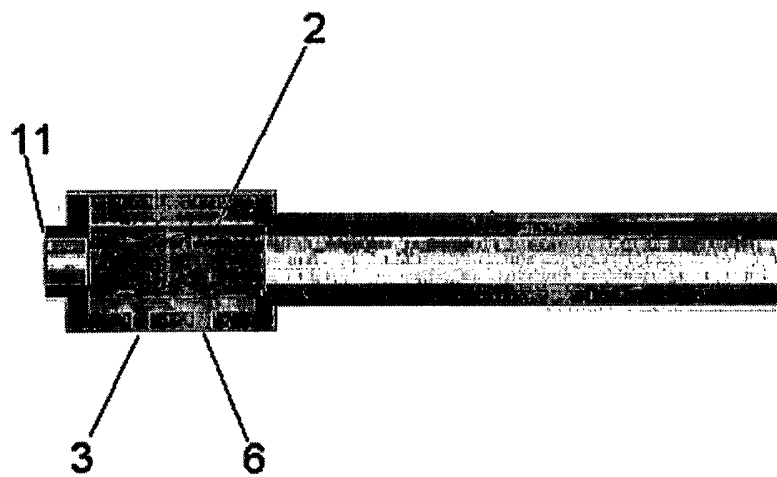

3/3

FIGURE 4



FIGURE 5


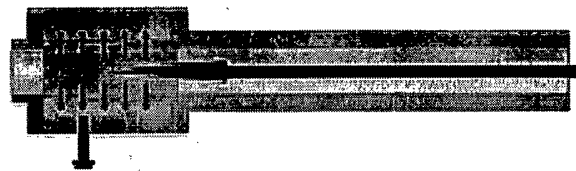


FIGURE 6

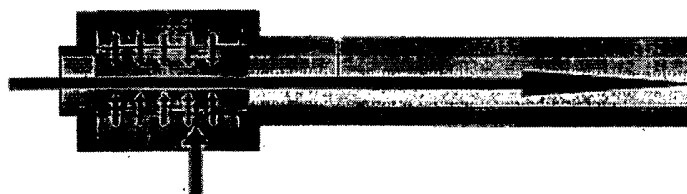

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK2005/000279

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N1/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB, BIOSIS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 379 412 A (WOOD RICHARD D) 12 April 1983 (1983-04-12)	1,2,4-7, 10
Y	column 2 - column 3 figure 1	3,8
X	FR 2 715 732 A (INST FRANCAIS DU PETROL) 4 August 1995 (1995-08-04)	9
Y	page 3, line 23 - page 4, line 5 page 5, line 4 - line 29 page 6, line 13 - line 17 figures 1,2	3,8
X	EP 0 530 684 A (TOMLIN ROBERT L) 10 March 1993 (1993-03-10)	1,2,4-7, 10
	column 6, line 42 - column 9, line 12 figures 2,3	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2005

Date of mailing of the international search report

25/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Timonen, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK2005/000279

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 738 147 A (TOMLIN ROBERT L) 19 April 1988 (1988-04-19) column 2, line 57 - column 3, line 12 figure 2 -----	1-11
A	US 2003/110950 A1 (EBNER TIMOTHY ET AL) 19 June 2003 (2003-06-19) paragraph '0015! - paragraph '0017! figures 1-3 -----	1-11
A	WO 97/12658 A (FLOOR KARSTEN BRINK ; FLS AUTOMATION A S (DK)) 10 April 1997 (1997-04-10) page 5, line 14 - page 6, line 9 figures 1,2 -----	1-11
A	US 5 490 429 A (JAROLICS GYULA) 13 February 1996 (1996-02-13) column 2, line 48 - line 64 figures 1,4 -----	1-11
A	GB 1 525 336 A (LEEDS & NORTHRUP SPA) 20 September 1978 (1978-09-20) page 2, line 9 - line 37 figures 1-3 -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK2005/000279

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4379412	A	12-04-1983	DE 3245632 A1	30-06-1983
			GB 2112133 A ,B	13-07-1983
			JP 58111739 A	02-07-1983
			NL 8204922 A	18-07-1983
FR 2715732	A	04-08-1995	FR 2715732 A1	04-08-1995
EP 0530684	A	10-03-1993	US 5178022 A	12-01-1993
			CA 2077036 A1	28-02-1993
			EP 0530684 A1	10-03-1993
US 4738147	A	19-04-1988	NONE	
US 2003110950	A1	19-06-2003	NONE	
WO 9712658	A	10-04-1997	AU 7126596 A	28-04-1997
			WO 9712658 A1	10-04-1997
US 5490429	A	13-02-1996	DK 93692 A	22-01-1994
			DE 4323453 A1	27-01-1994
			US 5413001 A	09-05-1995
GB 1525336	A	20-09-1978	IT 1033189 B	10-07-1979
			DE 2603948 A1	02-09-1976
			FR 2302521 A1	24-09-1976