



(51) International Patent Classification:
F02K 1/38 (2006.01) *F02K 1/48* (2006.01)

(21) International Application Number:
PCT/US2010/031940

(22) International Filing Date:
21 April 2010 (21.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/483,424 12 June 2009 (12.06.2009) US

(71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CERRA, David F.** [US/US]; 12720 NE 10th PL, D102, Bellevue, Washington 98005 (US). **GEA, Lie-Mine** [US/US]; 14271 Wyeth Avenue, Irvine, California 92606 (US). **WILLIE, Robert H.** [US/US]; 3706 185th Street SE, Bothell, Washington 98012 (US). **HEBERT, Leonard J.** [US/US]; 10528 NE 118th Lane, Kirkland, Washington 98034 (US). **ROBINSON, Donald E.** [US/US]; 9715 SE 40th Street, Mercer Island, Washington 98040 (US).

(74) Agents: **WOO, Euclid** et al.; The Boeing Company, P.O. Box 2515, MC 110-SD54, Seal Beach, California 90740-1515 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: GAS TURBINE ENGINE ASSEMBLY AND CORRESPONDING OPERATING METHOD

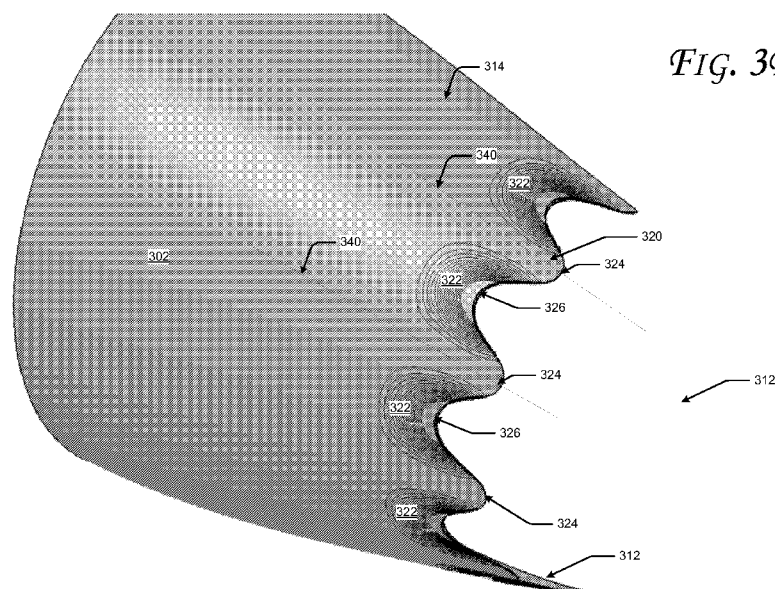


FIG. 3B

(57) Abstract: A gas turbine engine exhaust nozzle comprises a housing having a length which extends along a central longitudinal axis and comprising an interior surface and an exterior surface, and a row of chevrons extending from an aft end of the housing, the chevrons having a root region and a tip, wherein at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.



GAS TURBINE ENGINE ASSEMBLY AND CORRESPONDING OPERATING METHOD

FIELD OF THE DISCLOSURE

The subject matter described herein relates to gas turbine engines, and more particularly to nozzle configurations for gas turbine engines.

5

BACKGROUND

Aircraft engines have been made quieter as a result of advanced high bypass ratio engines. High bypass ratio engines derive a substantial fraction of their total thrust from bypass air which is propelled around the core of the engine by an engine-driven forwardly mounted fan. This approach results in less engine noise than pure turbojet engines or low bypass ratio engines.

10

One approach to further reducing engine noise is to increase the amount of mixing between the high velocity gases exiting the engine, and the surrounding freestream air. In that regard, the use of geometric structures known as chevrons may reduce low-frequency noise by increasing the rate at which the engine flow streams mix with the surrounding freestream air in the aft region of the nozzle. However, in some circumstances existing chevron designs may increase the drag of the duct, thereby decreasing engine efficiency. Accordingly, additional chevron designs may find utility.

15

SUMMARY

20

In various aspects, gas turbine nozzle configurations are provided. In some embodiments, gas turbine nozzle configurations as described herein include features to reduce drag associated with the nozzle or to tailor airflow through the nozzle.

25

Thus, in one aspect there is provided a gas turbine engine exhaust nozzle. In one embodiment, the gas turbine engine exhaust nozzle comprises a housing having a length which extends along a central longitudinal axis and comprising an interior surface and an exterior surface and a row of chevrons extending from an aft end of the housing, the chevrons having a root region and a tip. At least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.

30

In another aspect there is provided a gas turbine engine assembly. In one embodiment, the assembly comprises an engine assembly disposed about a longitudinal axis, a first housing surrounding portions of the engine assembly and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, and defining a core flow aperture at

an aft end of the housing, a second housing surrounding portions of the first housing and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, the exterior surface of the first housing and the interior surface of the second housing defining a fan flow aperture at an aft end of the second housing. In one embodiment at least one of the first
5 housing or the second housing comprises a row of chevrons extending from an aft end of the housing, the chevrons having a root region and a tip, and at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.

In another aspect, there is provided a method of operating an aircraft engine assembly. In one embodiment, the method comprises generating a flow of exhaust gas in an aircraft engine,
10 and directing the flow of exhaust gas through an exhaust nozzle exit aperture of a first housing surrounding at least a portion of the aircraft engine. In one embodiment the aperture has a perimeter with a row of chevrons extending from an aft end of the housing, the chevrons have a root region and a tip, and at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.

In another aspect, there is provided an aircraft. In one embodiment, the aircraft
15 comprises a fuselage, wings, and a gas turbine engine assembly. The engine assembly, in turn, comprises an engine assembly disposed about a longitudinal axis, a first housing surrounding portions of the engine assembly and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, and defining a core flow aperture at an aft end of the
20 housing, a second housing surrounding portions of the first housing and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, the exterior surface of the first housing and the interior surface of the second housing defining a fan flow aperture at an aft end of the second housing. In one embodiment at least one of the first housing or the second housing comprises a row of chevrons extending from an aft end of the housing, the
25 chevrons having a root region and a tip, and at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.

The features, functions and advantages discussed herein can be achieved independently in various embodiments described herein or may be combined in yet other embodiments, further details of which can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The detailed description is described with reference to the accompanying figures.

Fig. 1 is a schematic illustration of a gas turbine engine nozzle, according to embodiments.

5 Fig. 2 is a schematic illustration of an aircraft having a gas turbine engine nozzle configured according to embodiments.

Fig. 3A is a schematic, perspective view of a gas turbine engine nozzle configured according to embodiments.

10 Fig. 3B is a schematic, perspective view of a scalloped chevron gas turbine engine nozzle surface, according to embodiments.

Fig. 3C is a schematic, perspective, close-up view of a section of a scalloped gas turbine engine chevron nozzle, according to embodiments.

Fig. 4 is a schematic, perspective line view of a scalloped gas turbine engine chevron nozzle surface, according to embodiments.

15 Fig. 5 is a schematic, perspective line view of a scalloped gas turbine engine chevron nozzle surface, according to embodiments.

Fig. 6 is a flowchart illustrating operations in a method to operate an aircraft engine assembly, according to embodiments.

DETAILED DESCRIPTION

20 Described herein are exemplary gas turbine engine nozzle configurations and methods to operate gas turbine engines, and aircraft incorporating such nozzles. In some embodiments, a gas turbine engine exhaust nozzle comprises a housing having a row of chevrons extending from an aft end of the housing. The chevrons may be generally triangular in shape having a tip and defining a root region proximate the base of adjacent chevrons. As described herein, portions of
25 at least one of the interior surface or the exterior surface of the housing are removed proximate the root regions of the chevrons to define regions referred to herein as “scalloped” root regions. Some or all of the root regions may be scalloped. In some embodiments, introducing scalloped

root regions into an exhaust nozzle may reduce the drag coefficient of the nozzle, which in turn may increase the efficiency of the engine. Alternatively, or in addition, scalloped regions may tailor airflow through the engine.

In the following description, numerous specific details are set forth to provide a thorough understanding of various embodiments. However, it will be understood by those skilled in the art that the various embodiments may be practiced without the specific details. In other instances, well-known methods, procedures, components, and circuits have not been illustrated or described in detail so as not to obscure the particular embodiments.

Fig. 1 is a schematic illustration of an exemplary jet engine nozzle, according to embodiments. Referring to Fig. 1, a nozzle 20 has chevrons extending from an aft section of the nozzle 20. Chevrons generally include certain types of serrations on the nozzle lip, typically, triangular in shape having some curvature in the lengthwise cross-section, which slightly immerses them in the adjacent flow. A chevron can project either inwardly or outwardly, by an amount that is on the order of the upstream boundary layer thickness on the inner or outer surface, respectively. In general, the chevron planform shape can also be trapezoidal or rectangular. The nozzle 20 includes a core flow duct 40 through which the engine core flow is directed, and a fan flow duct 30 arranged annularly around the core flow duct 40, through which the fan air passes. The exit aperture of the fan flow duct 30 can include fan flow chevrons 35, and the exit aperture of the core flow duct 40 can include core flow chevrons 45.

Fig. 2 is a schematic illustration of an aircraft 200 having a nozzle configured according to embodiments. Referring to Fig. 2, a commercial jet transport aircraft 200 comprises wings 202, a fuselage 201, and a propulsion system 203. The illustrated propulsion system 203 comprises at least one gas turbine engine, which may be implemented as a turbofan engine 206 carried by the wings 202. Each engine 206 is housed in a nacelle 204, which includes an inlet 205 and a nozzle 220. The nozzles 220 include chevrons having features, discussed in greater detail below, to reduce the coefficient of drag associated with the nozzle. In other embodiments, the aircraft 200 can include a different number of engines and/or engines carried by different portions of the aircraft, along with nozzles 220 that are tailored to the particular installation.

Figs. 3A-3C offer various views of a gas turbine engine nozzle configured according to embodiments. Fig. 3A is a schematic, perspective view of a jet engine nozzle configured according to embodiments. Referring first to Fig. 3A, in some embodiments a gas turbine engine

exhaust nozzle 300 comprises a housing 302 having a length which extends along a central longitudinal axis 310 and comprising an interior surface 312 and an exterior surface 314.

5 A row of chevrons 320 extends from an aft end of the housing 302. The chevrons 320 may be generally triangular or sinusoidal in shape and have tip 324 and a base 326. Further, the chevrons 324 define a root region 322 proximate the base of adjacent triangles. As used herein, the phrase "root region" refers generally to portions of the surface area of the chevron displaced from tip of the chevrons.

10 In some embodiments the row of chevrons 320 encompasses the complete annulus of the aft end of the housing 302, while in other embodiments the row of chevrons may encompass only a portion of the annulus of the housing 302. Further, in the embodiment depicted in Fig. 3A, the various chevrons 320 are substantially uniform in size and shape, while in other embodiments the various chevrons 320 may vary in size and shape, e.g., to reduce noise in selected directions.

15 As illustrated in Fig. 3A, the surface of the annular housing 302 converges toward the longitudinal axis 310 proximate the aft end of the housing 302, such that the diameter of the housing decreases progressively toward the aft end of the housing 302. In some embodiments, the row of chevrons 320 essentially follows the contoured surface of the housing 302 such that each of the chevrons 320 lies in a plane that intersects the longitudinal axis 310.

20 In some embodiments, at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region 322 of a chevron 320. This is illustrated in Fig. 3B, which is a schematic, perspective view of a scalloped chevron nozzle surface, according to embodiments. Referring to Fig. 3B, portions of the root regions 322 are removed to define a scalloped surface area in the root regions 322. The scalloped root regions 322 in Fig. 3B are depicted by contoured lines analogous to topographical lines on a map. The scalloped root regions are generally laterally displaced from an axis 340 extending longitudinally along the surface 302 of the nozzle 300 and through the tip 324 of adjacent chevrons 320, and extend from the base 326 of the chevron. In some embodiments, the chevrons measure between 10 centimeters and 60 centimeters from the base to the tip, and the scalloped root regions 322 measure between approximately 5 and 75 centimeters in width and 5 and 90 centimeters in length. Of course, one skilled in the art will recognize that the specific measurements may vary both as a function of the engine size and as a function of engine load.

30

As a result of the scalloped root regions 322, the thickness of the annular housing varies in a cross-sectional plane drawn through the root regions 322 of the housing 302. This is illustrated in Fig. 3C, which is a schematic, perspective, close-up view of a section of a scalloped chevron nozzle, according to embodiments. Referring to Fig. 3C, the thickness of the housing 302 is depicted by contour lines 350 and 352, which follow the interior surface 312 of housing 302 and the exterior surface 314 of housing 302, respectively. The thickness of the housing 302 varies between a maximum thickness at a point along a longitudinal axis 354 extending through the tip 324 of the chevron 320 to a minimum at a point along a longitudinal axis 356 extending through the base 326 of the chevron. In some embodiments, the thickness of the housing varies between a maximum thickness of 2.5 centimeters and a minimum thickness of 0.25 centimeters. Of course, ones skilled in the art will understand that the thickness of the housing varies both as a function of the engine size and as a function of engine load.

Differences between the surface contours of a conventional, constant-thickness housing and a contoured housing that implements scalloped root regions are illustrated in Figs. 4 and 5. Fig. 4 is a schematic, perspective line view of a scalloped chevron nozzle surface, according to embodiments. In Fig. 4 the scalloped surface is indicated by solid contour lines and the conventional surface is indicated by dashed lines. The scalloped root region is indicated generally by reference numeral 322. The contour lines 410, 412, 414, 416, 418, 420, 422, and 424 represent lateral cross-section contour lines at various positions along the longitudinal axis 356 of the housing 302.

The first contour line 410 represents a lateral cross-section taken outside the scalloped root region 322. In this region the contour lines are coextensive. However, the contour lines diverge as they approach the base 326 of the chevron. Thus, the surfaces begin to diverge when the contour line 412 crosses the scalloped region 322. Successive contour lines 414, 416, 418, show increasing greater divergence between the surface contours. The divergence is at a maximum along the longitudinal axis 356 that extends through the base 326 of the chevron and the contour lines converge at a point along a longitudinal axis 354 extending through the tip 324 of the chevron.

Fig. 5 is a schematic, perspective line view of a scalloped chevron nozzle surface, according to embodiments. In Fig. 5 the scalloped surface is indicated by solid contour lines and the conventional surface is indicated by dashed lines. The scalloped root region is indicated generally by reference numeral 322. The contour lines 510, 512, 514 are taken in a longitudinal

direction, rather than a lateral direction. Thus, the contour lines 510, 514, taken along a longitudinal axis through the peak 324 of a chevron are substantially coextensive, indicating that the surfaces are of substantially equal thicknesses along those axes. By contrast, the contour lines 512, taken along a longitudinal axis through the base 326 of a chevron diverge as the lines
5 approach the base 326, illustrating the contoured surface of a scalloped chevron root region 322.

Fig. 6 is a flowchart illustrating operations in a method to operate an aircraft engine assembly, according to embodiments. Referring to Fig. 6, at operation 610 an exhaust flow is generated. In some embodiments, operation 610 may be implemented by a gas turbine engine such as, e.g., a jet engine. At operation 615 the exhaust flow is directed through an exhaust
10 nozzle have at least one scalloped root region, such as the nozzles described herein.

Thus, as described herein a gas turbine engine nozzle may be provided with chevrons having scalloped root regions. The root regions may be scalloped on at least one of the interior surface, the exterior surface, or both. In some embodiments, a scalloped root region may decrease the drag coefficient of the nozzle, thereby enhancing the efficiency of the engine. In
15 another embodiment, a scalloped root region may modulate exhaust flow and or may improve the fuel efficiency of the engine and exhaust system.

Reference in the specification to “one embodiment” or “some embodiments” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least an implementation. The appearances of the phrase “in one embodiment” in
20 various places in the specification may or may not be all referring to the same embodiment.

Although embodiments have been described in language specific to structural features and/or methodological acts, it is to be understood that claimed subject matter may not be limited to the specific features or acts described. Rather, the specific features and acts are disclosed as sample forms of implementing the claimed subject matter.

CLAIMS

What is claimed is:

1. A gas turbine engine assembly, comprising:
an engine assembly disposed about a longitudinal axis;
5 a first housing surrounding portions of the engine assembly and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, and defining a core flow aperture at an aft end of the housing;
a second housing surrounding portions of the first housing and having a length which extends along the longitudinal axis, an interior surface and an exterior surface, the exterior
10 surface of the first housing and the interior surface of the second housing defining a fan flow aperture at an aft end of the second housing, and
wherein at least one of the first housing or the second housing comprises:
a row of chevrons extending from an aft end of the housing, the chevrons having a root region and a tip, and
15 wherein at least a portion of at least one of the interior surface or the exterior surface is scalloped proximate the root region of a chevron.
2. The gas turbine engine assembly of claim 1, wherein:
at least one of the first housing or the second housing comprises a contoured surface which converges toward the central longitudinal axis proximate the aft end of the housing; and
20 the row of chevrons follows the contoured surface such that the tip of the chevrons point toward the central longitudinal axis.
3. The gas turbine engine assembly of claim 1, wherein:
at least one of the first housing or the second housing has a thickness that is substantially constant in cross-sectional stations forward of the aft end of the housing.
- 25 4. The gas turbine engine assembly of claim 1, wherein:
at least one of the first housing or the second housing has a thickness that varies in cross-sectional stations proximate the root regions of the chevrons.
5. The gas turbine engine assembly of claim 4, wherein:
the row of chevrons extends about the entire end of the housing; and
30 the chevrons are substantially uniform in size and shape. OK

6. The gas turbine engine assembly of claim 4, wherein:
the row of chevrons extends about the entire end of the housing; and
the chevrons vary in size and shape.

7. A method of operating an aircraft engine assembly, comprising:
5 generating a flow of exhaust gas in an aircraft engine; and
directing the flow of exhaust gas through an exhaust nozzle exit aperture of a first
housing surrounding at least a portion of the aircraft engine, the aperture having a perimeter with
a row of chevrons extending from an aft end of the housing, the chevrons having a root region
and a tip, and wherein at least a portion of at least one of the interior surface or the exterior
10 surface is scalloped proximate the root region of a chevron.

8. The method of claim 7, wherein the aircraft engine assembly comprises a second housing
surrounding portions of the first housing and having a length which extends along the
longitudinal axis, such that a region between the second housing and the first housing defines a
fan flow aperture at an aft end of the second housing, and further comprising:
15 directing a flow of exhaust gas through the fan flow aperture, the fan flow aperture
having a perimeter with a row of chevrons extending from an aft end of the housing, the
chevrons having a root region and a tip, and wherein at least a portion of at least one of the
interior surface or the exterior surface is scalloped proximate the root region of a chevron.

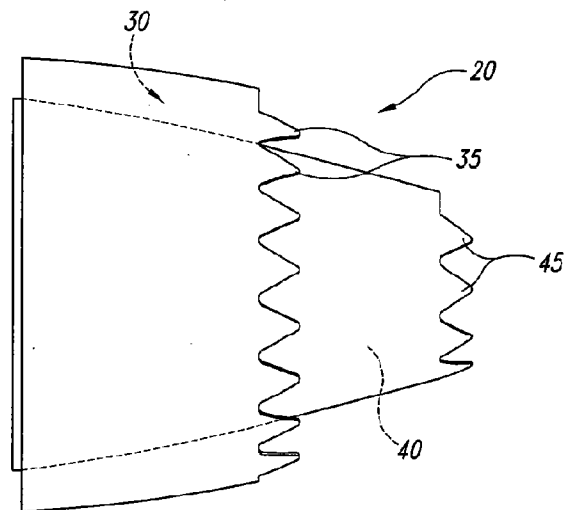


Fig. 1

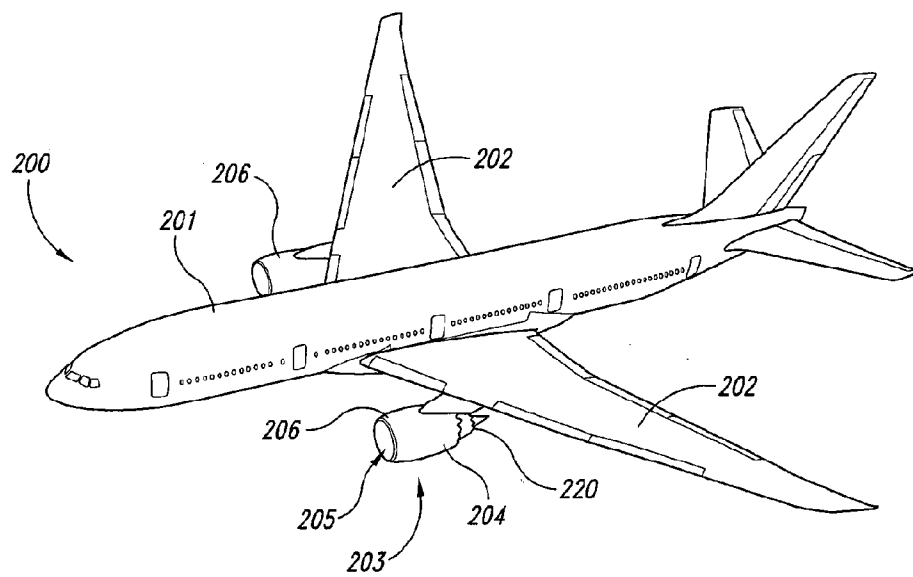


Fig. 2

FIG. 3A

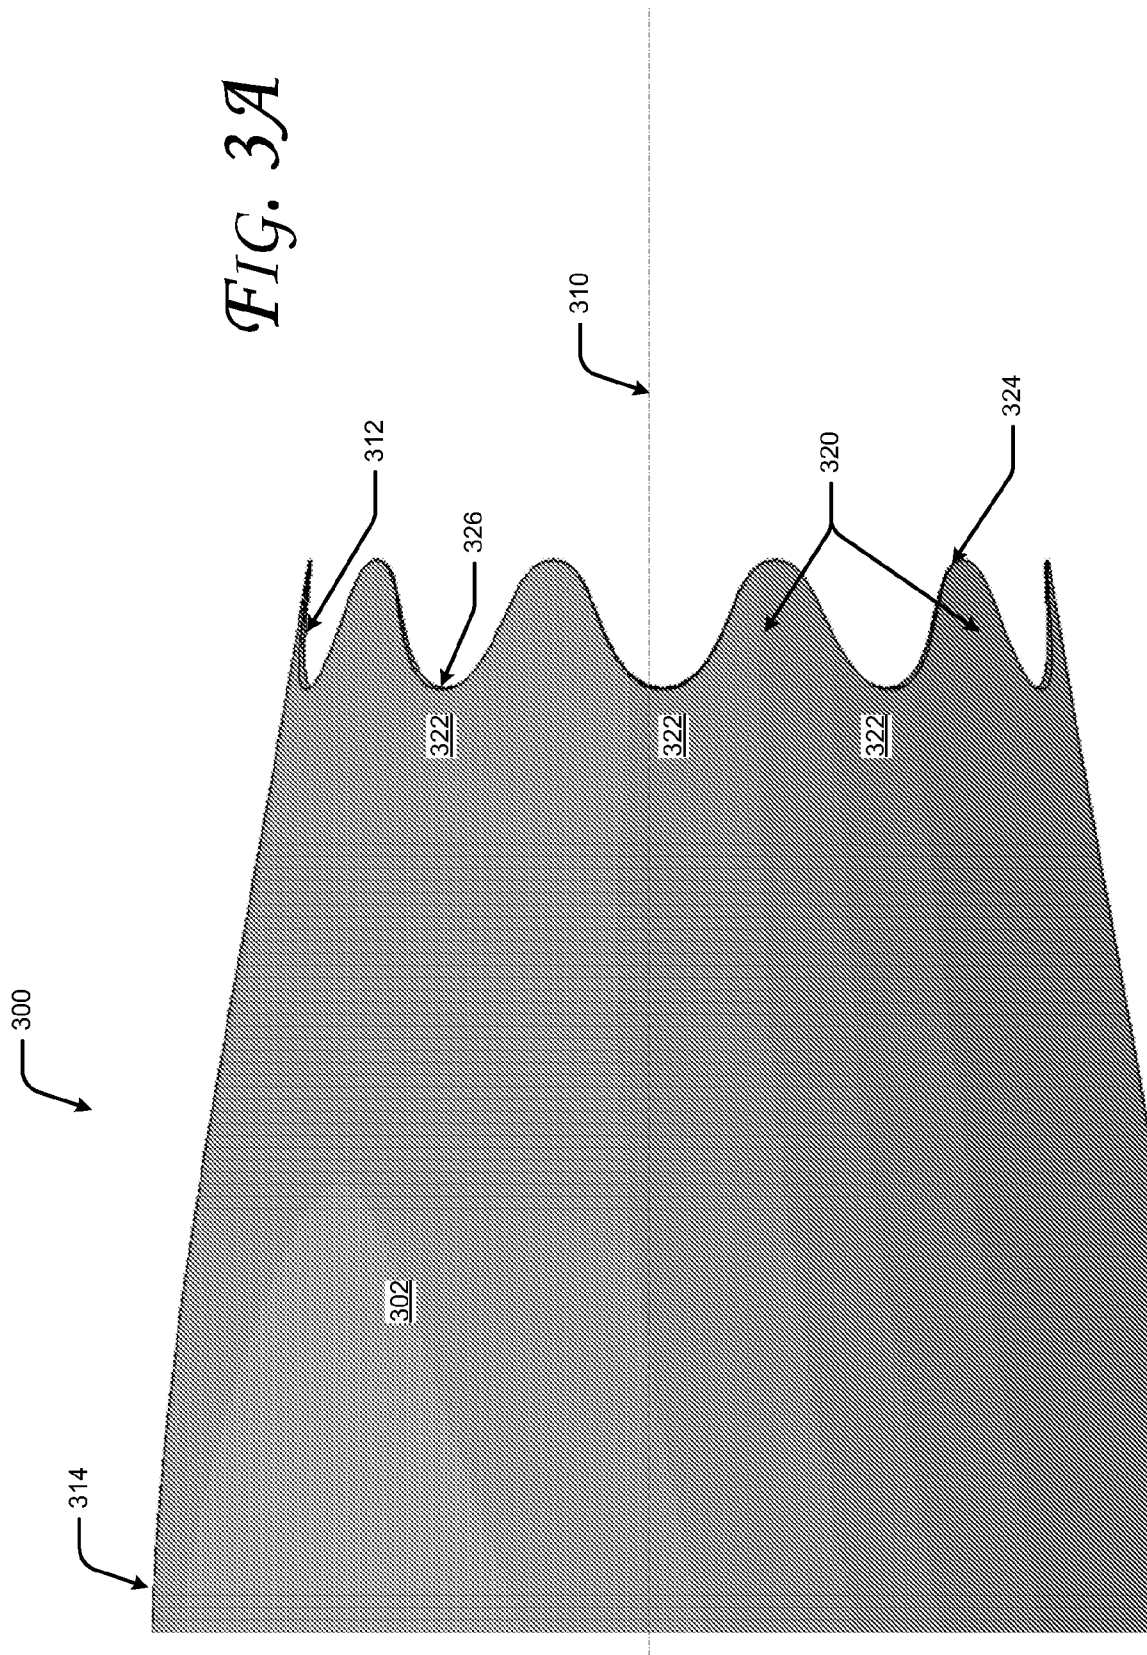
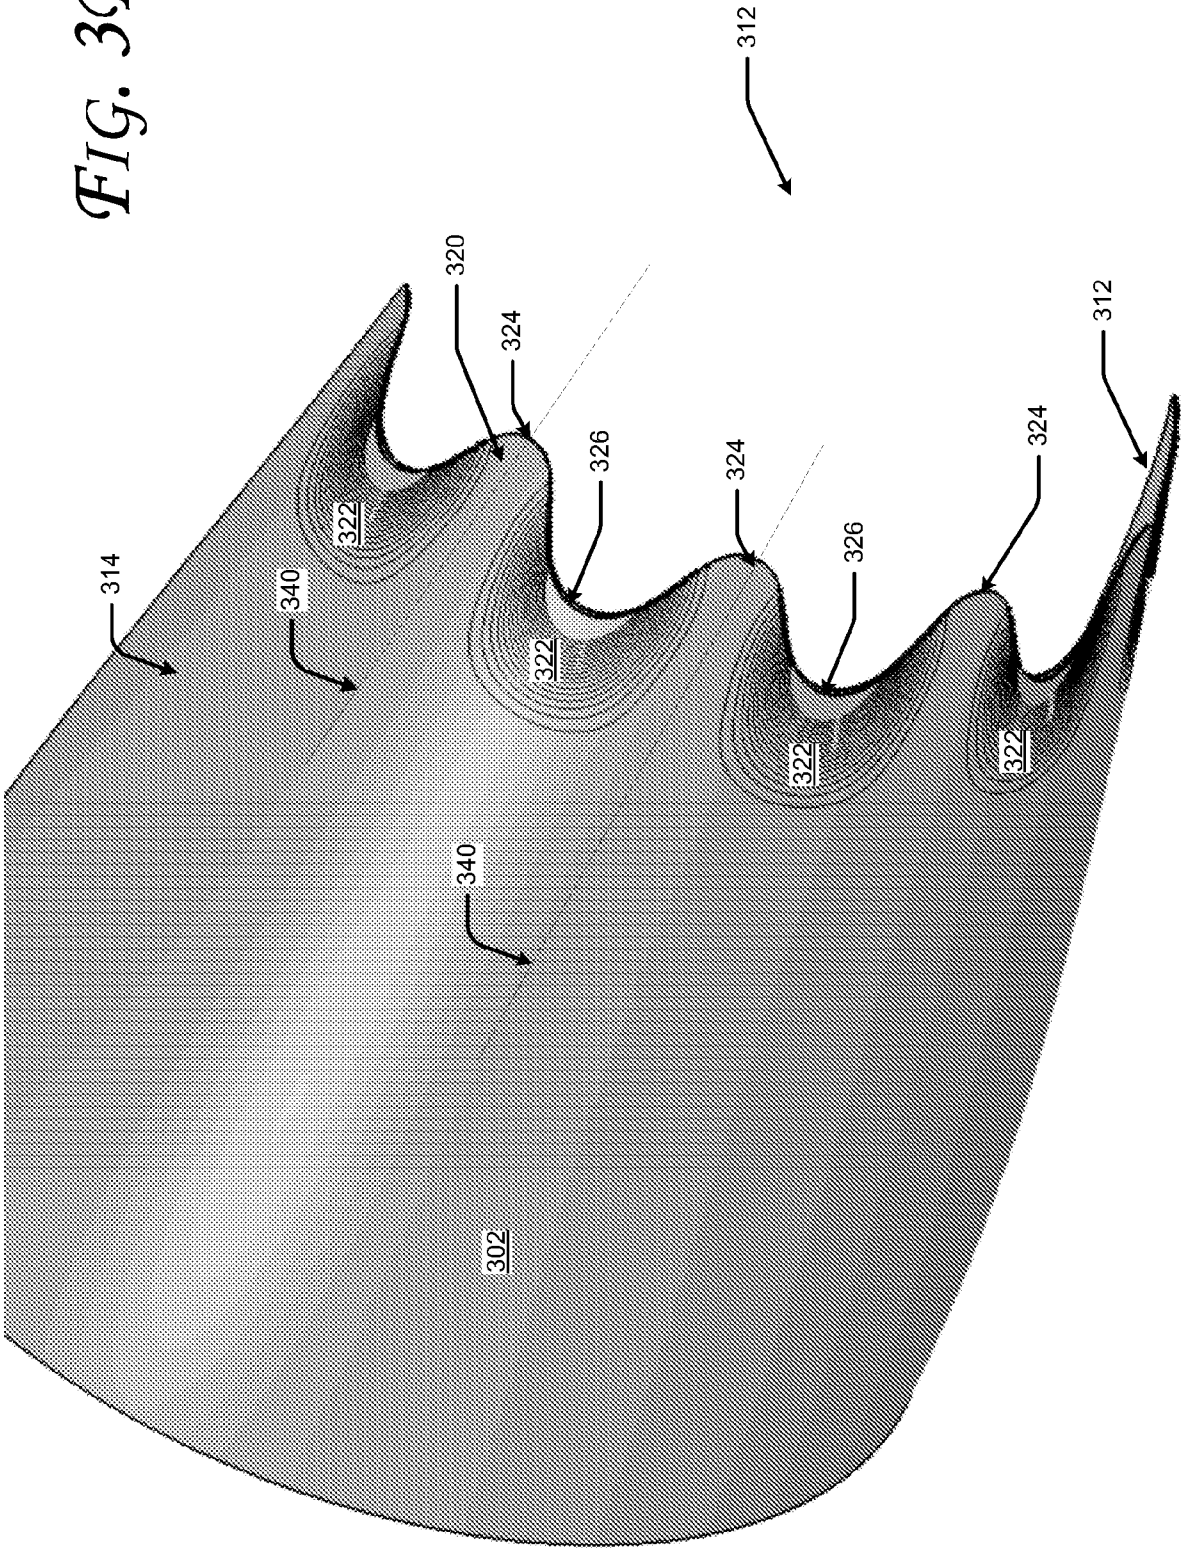


FIG. 3B



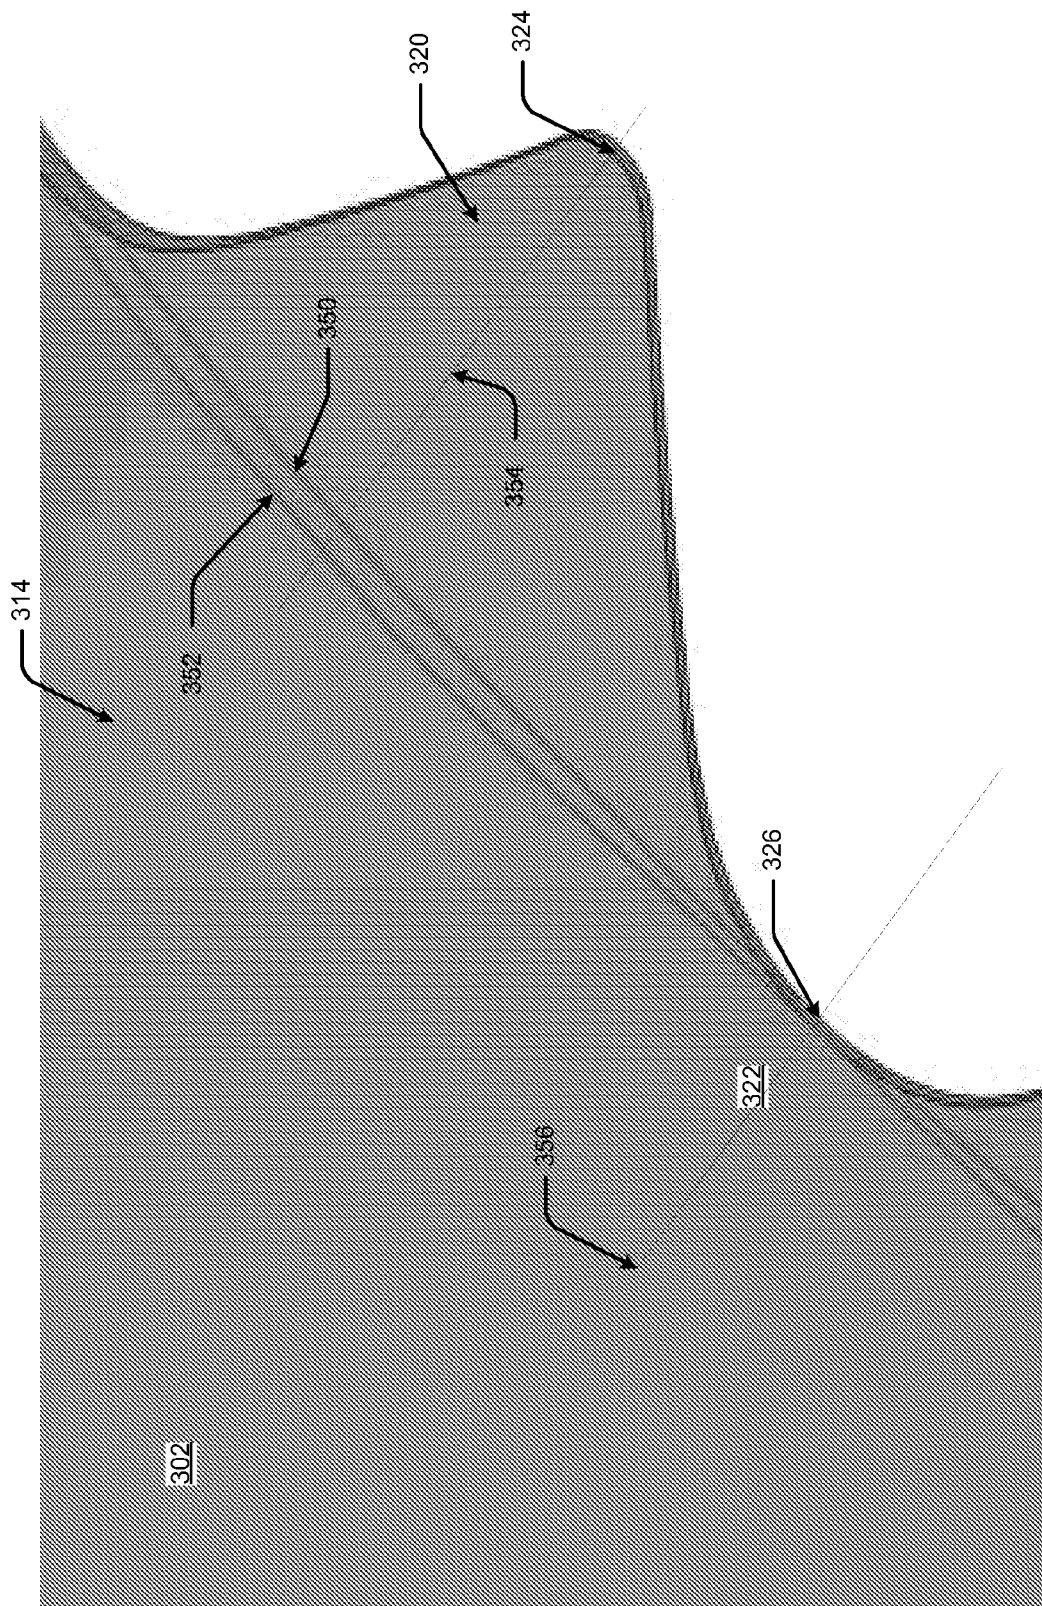
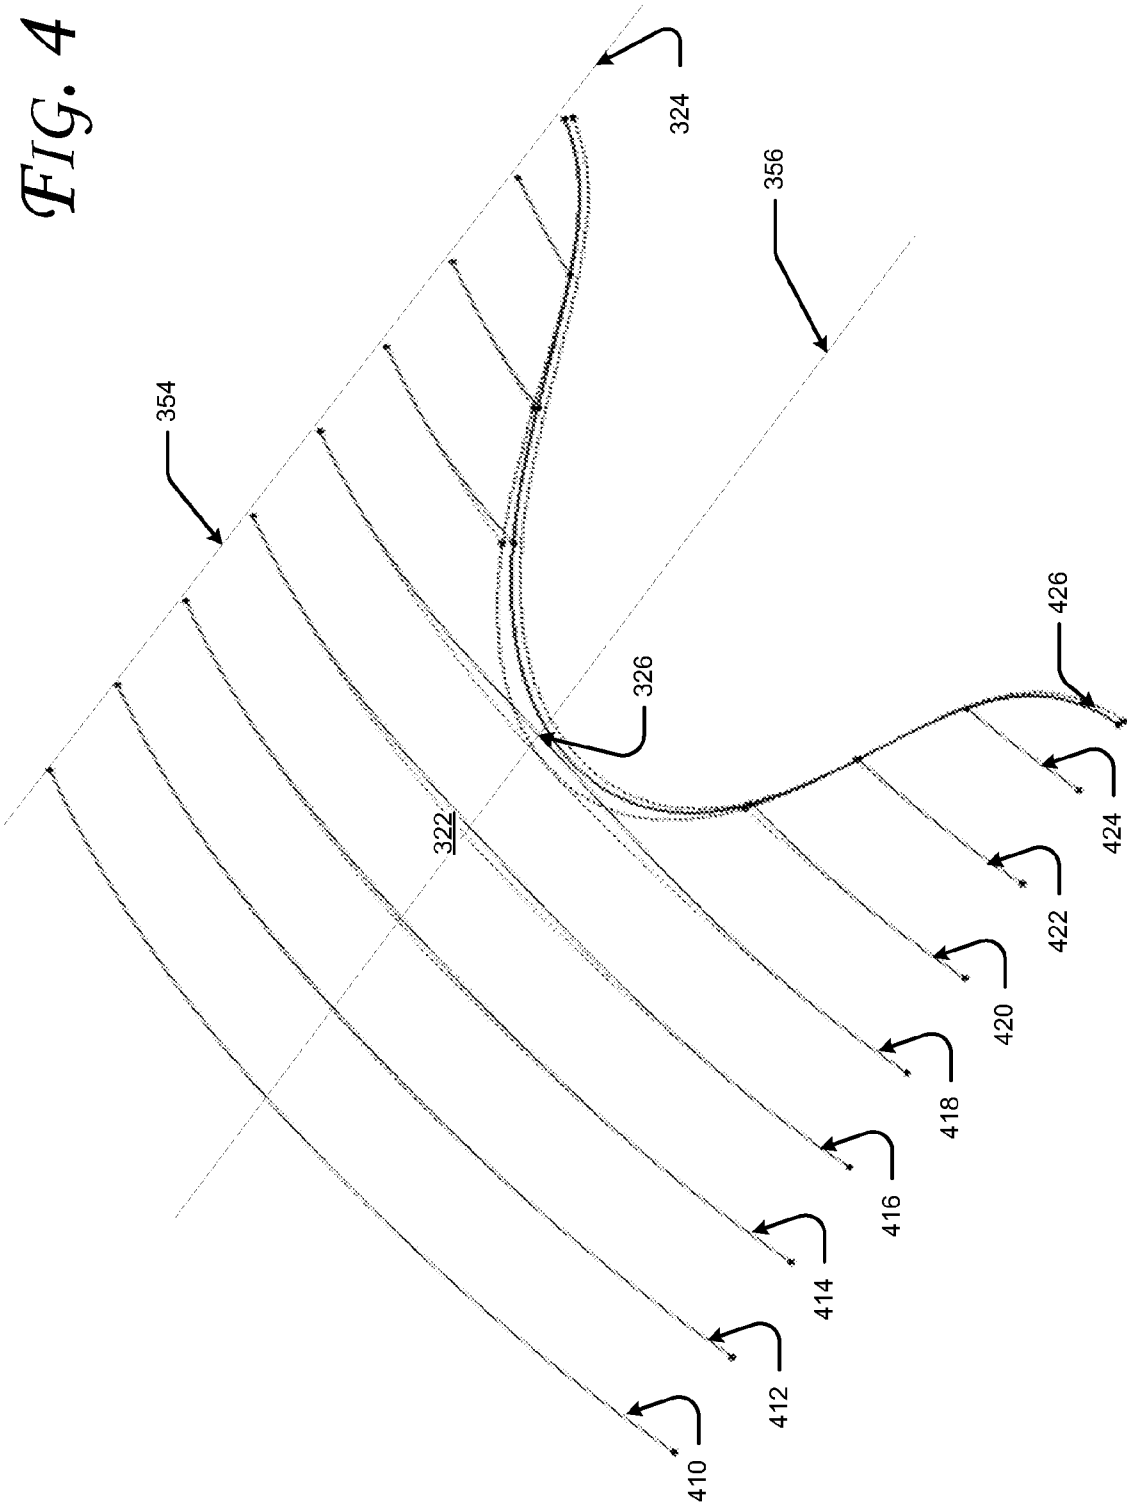
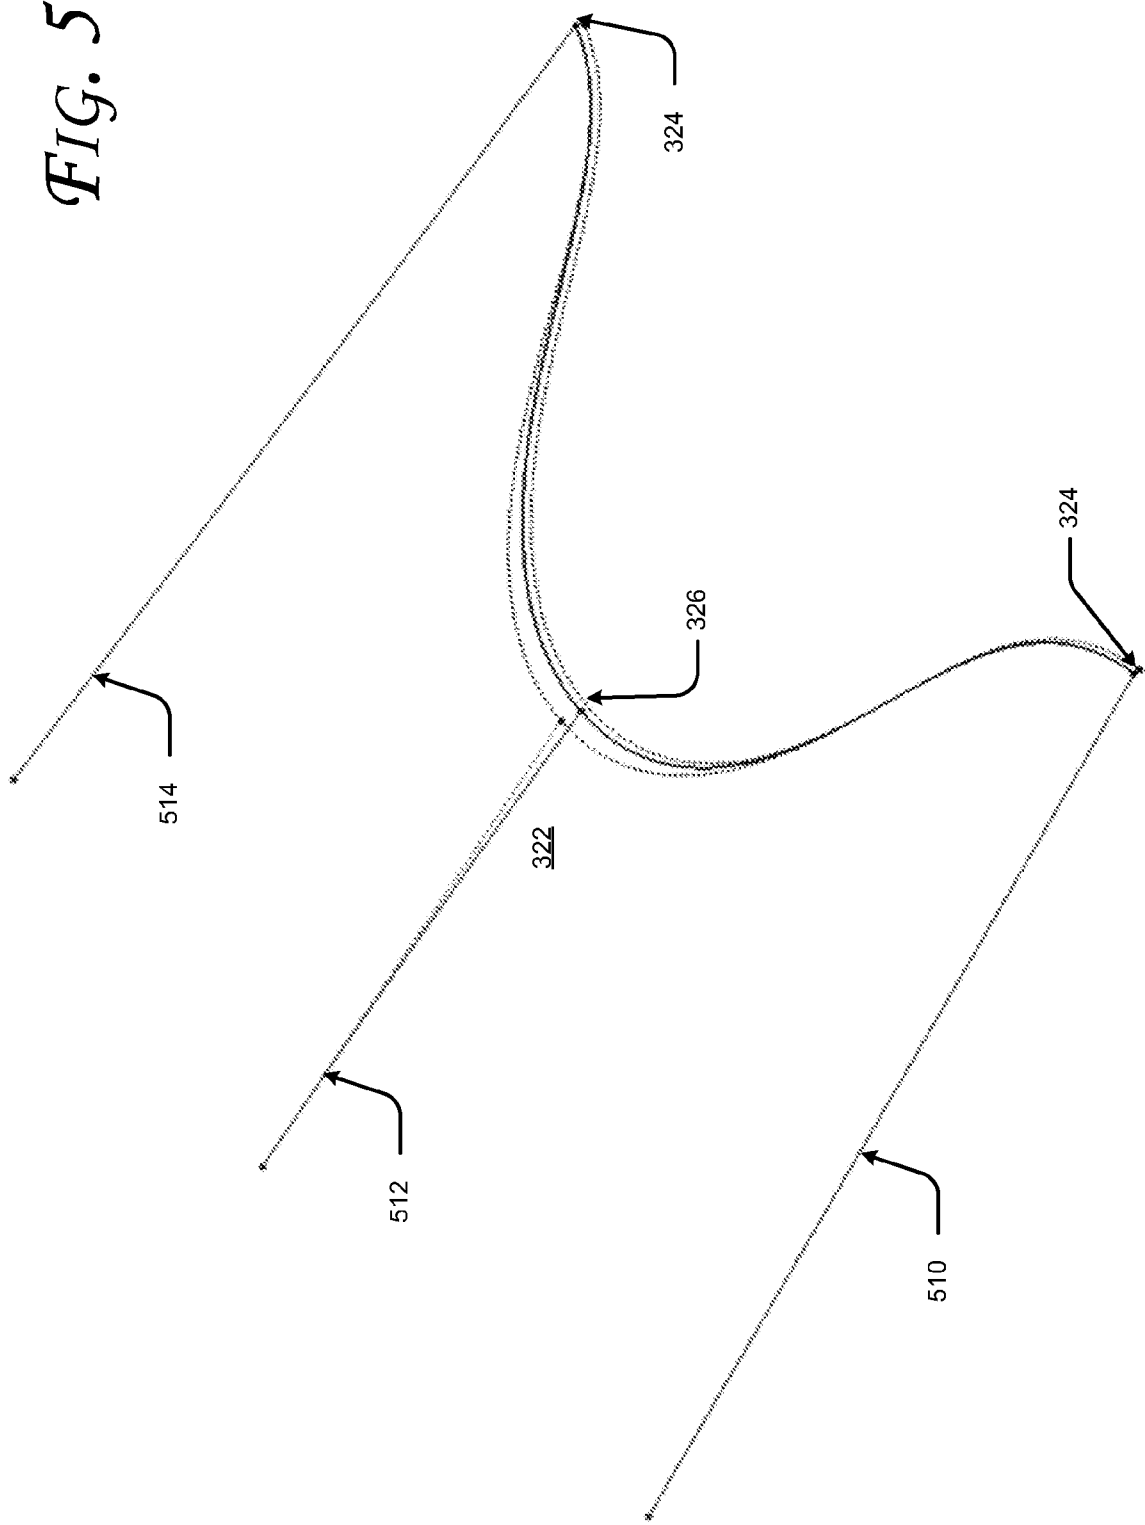
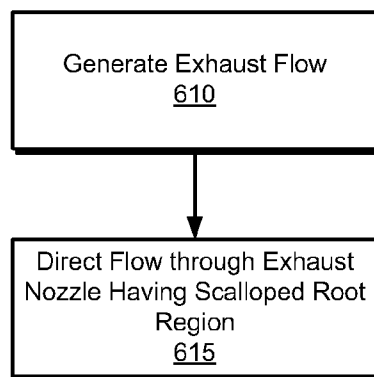


Fig. 3C





*FIG. 6*

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/031940

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F02K1/38 F02K1/48
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 F02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 752 649 A2 (UNITED TECHNOLOGIES CORP [US]) 14 February 2007 (2007-02-14)	1-5,7,8
Y	paragraph [0012]; figures 1c,1d,2a,2b	6
X	EP 1 703 114 A1 (ROLLS ROYCE PLC [GB]) 20 September 2006 (2006-09-20)	1-5,7,8
Y	figures 16,18	6
X	EP 1 995 441 A2 (GEN ELECTRIC [US]) 26 November 2008 (2008-11-26)	1-5,7,8
Y	figures	6
Y	US 2008/272228 A1 (MENGLA VINOD G [US] ET AL) 6 November 2008 (2008-11-06)	6
	figures	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

28 June 2010

Date of mailing of the international search report

05/07/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Raspo, Fabrice

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/031940

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1752649	A2	14-02-2007	CA 2551929 A1	10-02-2007
			CN 1912372 A	14-02-2007
			JP 2007046598 A	22-02-2007
			US 2007033922 A1	15-02-2007
EP 1703114	A1	20-09-2006	DE 602006000051 T2	22-11-2007
			US 7735601 B1	15-06-2010
EP 1995441	A2	26-11-2008	JP 2008286187 A	27-11-2008
			US 2009071164 A1	19-03-2009
US 2008272228	A1	06-11-2008	NONE	