(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
29 January 2015 (29.01.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/012962 A1

(51) International Patent Classification:
B05C 11/10 (2006.01) *B05C 17/01* (2006.01)
B05B 12/10 (2006.01) *B05C 17/015* (2006.01)

(21) International Application Number:
PCT/US2014/040989

(22) International Filing Date:
5 June 2014 (05.06.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/951,817 26 July 2013 (26.07.2013) US

(71) Applicant: **THE BOEING COMPANY** [US/US]; 5301 Bolsa Avenue, Mailcode: H011-B171, Huntington Beach, CA 92647 (US).

(72) Inventors: **TOPF, Richard, Philip**; 100 N. Riverside Plaza, Chicago, IL 60606 (US). **GUIRGUIS, Martin**; 100 N. Riverside Plaza, Chicago, IL 60606 (US).

(74) Agents: **HALPERIN, Brett** et al.; 5301 Bolsa Avenue, Mail code: H011-B171, Huntington Beach, CA 92647 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) **Title**: FEEDBACK CONTROL SYSTEM FOR PERFORMING FLUID DISPENSING OPERATIONS

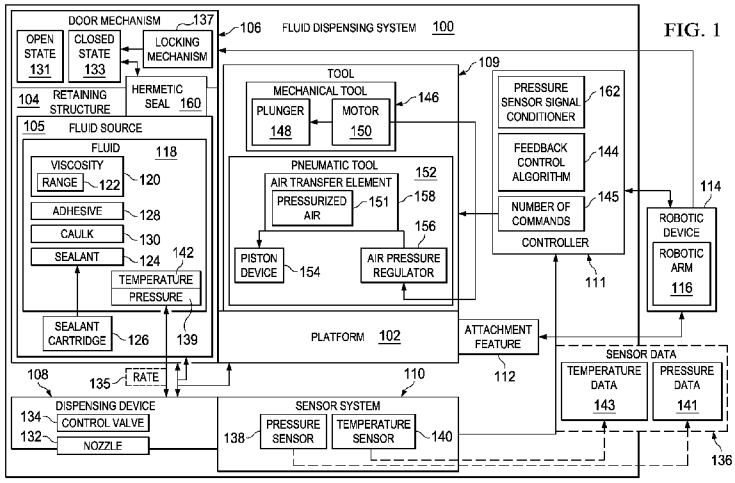


FIG. 1

(57) **Abstract**: A method and apparatus for controlling a dispensing device. Sensor data about fluid that is being dispensed through the dispensing device may be received. A pressure of the fluid may be identified using the sensor data. A tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device may be controlled.

WO 2015/012962 A1

FEEDBACK CONTROL SYSTEM FOR PERFORMING FLUID DISPENSING OPERATIONS

BACKGROUND INFORMATION

1. Field:

The present disclosure relates generally to fluid dispensing operations and, in particular, to a feedback control system for performing fluid dispensing operations. Still more particularly, the present disclosure relates to a method and apparatus for using pressure data and temperature data about the fluid being dispensed from a dispensing device to control a rate at which fluid flows to the dispensing device.

2. Background:

Oftentimes, fluid dispensing operations, such as, for example, without limitation, sealant dispensing operations, are performed manually. However, performing these operations manually may be more time-consuming and labor-intensive than desired. Further, ensuring that a fluid, such as sealant, is dispensed at a substantially constant rate may be more difficult than desired when performing these operations manually.

With some currently available sealant dispensing systems, a pneumatic hand-held dispensing device may be operated by a human operator. The human operator may push a trigger button that controls a pressure applied to a sealant, thereby controlling the rate at which the sealant is dispensed. However, when performing this type of operation, the pressure applied to the sealant may be varied, resulting in uneven dispensing and application of the sealant.

In other currently available sealant dispensing systems, a mechanical plunger may be moved through a sealant cartridge at a substantially constant speed. In other words, the mechanical plunger may be moved a selected distance per second. The

distance moved by the plunger may be related to the volume of sealant extruded from the sealant dispensing system. However, the volume of sealant extruded may not remain constant when performing this type of operation due to variations in the pressure of the sealant within the sealant cartridge.

Additionally, with some currently available sealant dispensing systems, the insertion, removal, and/or replacement of sealant cartridges may require more time than desired. In some cases, inserting, removing, and/or replacing sealant cartridges in sealant dispensing systems that use mechanical systems to create a motive force that dispenses the sealant from a sealant cartridge towards a nozzle or exit of the sealant dispensing system may be more complicated than desired. Further, oftentimes, a human operator may be needed to complete the insertion, removal, and/or replacement of a sealant cartridge. Therefore, it would be desirable to have a method and apparatus that take into account at least some of the issues discussed above, as well as other possible issues.

SUMMARY

In one illustrative embodiment, an apparatus may comprise a sensor system and a controller. The sensor system may be associated with a dispensing device and configured to generate sensor data about fluid being dispensed from the dispensing device. The controller may be configured to receive the sensor data, identify a pressure of the fluid using the sensor data, and control a tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device.

In another illustrative embodiment, a fluid dispensing system may comprises a platform, a retaining structure associated with the platform, a dispensing device, a sensor

system associated with the dispensing device, a controller, and a door mechanism associated with the retaining structure. The retaining structure may be configured to hold a fluid source. The dispensing device may be configured to receive a fluid from the fluid source and dispense the fluid. The sensor system comprises at least one of a pressure sensor and a temperature sensor. The pressure sensor may be configured to measure a pressure of the fluid being dispensed from the dispensing device to generate pressure data for the fluid. The temperature sensor may be configured to measure a temperature of the fluid being dispensed from the dispensing device to generate temperature data for the fluid. The controller may be configured to receive the pressure data and the temperature data. The controller may be further configured to use the pressure data, the temperature data, and a feedback control algorithm to generate a number of commands to control a tool to control a rate at which the fluid flows from the fluid source to the dispensing device such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant. The tool may be selected from one of a mechanical tool and a pneumatic tool. The door mechanism may be configured to be moved between an open state and a closed state. The open state may allow the fluid source to be either removed from or inserted into the retaining structure. The closed state may form a hermetic seal with the fluid source.

In yet another illustrative embodiment, a method for controlling a dispensing device may be provided. Sensor data about fluid that is being dispensed through a dispensing device may be received. A pressure of the fluid may be identified using the sensor data. A tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device may be controlled.

In still yet another illustrative embodiment, a method for controlling a dispensing of fluid may be provided. A door mechanism associated with a retaining structure may be moved into an open state to allow a fluid source to be inserted into the retaining structure configured to hold the fluid source. The fluid source may hold the fluid. The door mechanism may be moved into a closed state to form a hermetic seal with the fluid source. The fluid may be dispensed from the dispensing device configured to receive the fluid from the fluid source. Sensor data about the fluid that is being dispensed through the dispensing device may be generated using a sensor system associated with the dispensing device. The sensor data may include at least one of temperature data and pressure data for the fluid. The sensor data may be received at a controller. A number of commands may be generated using the sensor data and a feedback control algorithm to control a tool that is configured to control a rate at which the fluid flows from the fluid source to the dispensing device such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant. The number of commands may be sent to the tool to control the tool.

In summary, according to one aspect of the invention there is provided an apparatus including a sensor system associated with a dispensing device and configured to generate sensor data about fluid being dispensed from the dispensing device; and a controller configured to receive the sensor data, identify a pressure of the fluid using the sensor data, and control a tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device.

Advantageously the apparatus wherein the sensor system comprises at least one of: a pressure sensor configured to generate pressure data for the fluid being dispensed from the

dispensing device; and a temperature sensor configured to generate temperature data for the fluid being dispensed from the dispensing device.

Advantageously the apparatus wherein the controller identifies the pressure of the fluid using the pressure data and a temperature of the fluid using the temperature data and wherein the controller determines whether a force being applied by the tool to move the fluid from the fluid source to the dispensing device needs to be increased or decreased based on the pressure identified and the temperature identified.

Advantageously the apparatus wherein the controller is configured to generate a number of commands to control the force being applied by the tool.

Advantageously the apparatus wherein the controller uses the sensor data and a feedback control algorithm to generate a number of commands to control the tool.

Advantageously the apparatus wherein the controller is configured to generate the number of commands needed to control the tool using the sensor data and the feedback control algorithm such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant.

Advantageously the apparatus wherein the tool is a mechanical tool including a plunger configured to be moved relative to the fluid source to control the rate at which the fluid flows from the fluid source to the dispensing device; and a motor configured to control movement of the plunger relative to the fluid source.

Advantageously the apparatus wherein the controller is configured to generate a number of commands for the motor based on the sensor data and send the number of commands to the motor.

Advantageously the apparatus wherein the tool is a pneumatic tool including a piston device configured to be moved relative to the fluid source to control the rate at which the fluid flows from the fluid source to the dispensing device; and

an air pressure regulator configured to control movement of the piston device relative to the fluid source.

Advantageously the apparatus wherein the controller is configured to generate a number of commands for the air pressure regulator based on the sensor data and send the number of commands to the air pressure regulator.

Advantageously the apparatus wherein the pneumatic tool further includes an air transfer element configured to allow pressurized air to flow from the air pressure regulator towards the piston device.

Advantageously the apparatus further including a retaining structure configured to hold the fluid source.

Advantageously the apparatus further including a door mechanism associated with the retaining structure, wherein the door mechanism is configured to be moved between an open state and a closed state.

Advantageously the apparatus wherein the door mechanism is configured to be moved into the open state to allow the fluid source to be either removed from or inserted into the retaining structure.

Advantageously the apparatus wherein the door mechanism is configured to be moved into the closed state to form a hermetic seal with the fluid source.

Advantageously the apparatus wherein the door mechanism includes a locking mechanism configured to lock the door mechanism in the closed state.

Advantageously the apparatus further including an air cylinder configured to move the door mechanism between the open state and the closed state, wherein the door mechanism is configured to move from the closed state to the open state when the air cylinder loses air pressure beyond a selected threshold in response to a pressure of air within the fluid source increasing.

Advantageously the apparatus further including a platform, wherein the door mechanism and the retaining structure are associated with the platform; and an attachment feature configured for use in attaching the platform to a robotic device.

Advantageously the apparatus wherein the fluid is a sealant and wherein the fluid source is a sealant cartridge that is at least partially transparent and pre-filled with the sealant.

According to another aspect of the invention there is provided a fluid dispensing system including a platform; a retaining structure associated with the platform and configured to hold a fluid source; a dispensing device configured to receive a fluid from the fluid source and dispense the fluid; a sensor system associated with the dispensing device in which the sensor system comprises at least one of: a pressure sensor configured to measure a pressure of the fluid being dispensed from the dispensing device to generate pressure data for the fluid; and a temperature sensor configured to measure a temperature of the fluid being dispensed from the dispensing device to generate temperature data for the fluid; a controller configured to receive the pressure data and the temperature data and to use the pressure data, the temperature data, and a feedback control algorithm to generate a number of commands to control a tool to control a rate at which the fluid flows from the fluid source to the dispensing device such that the pressure of the fluid being dispensed from the dispensing device remains substantially constant in which the tool is selected from one of a mechanical tool and a pneumatic tool; and a door mechanism associated with the retaining structure in which the door mechanism is configured to be moved between an open state and a closed state in which the open state allows the fluid source to be either removed from or inserted into the retaining structure and the closed state forms a hermetic seal with the fluid source.

According to yet another aspect of the invention there is provided a method for controlling a dispensing device including receiving sensor data about fluid that is being dispensed through the dispensing device; identifying a pressure of the fluid using the sensor data; and controlling a tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device.

Advantageously the method further including generating the sensor data using a sensor system associated with the dispensing device.

Advantageously the method wherein generating the sensor data comprises at least one of: measuring the pressure of the fluid using a pressure sensor associated with the dispensing device to generate pressure data for the fluid; and measuring a temperature of the fluid using a temperature sensor associated with the dispensing device to generate temperature data for the fluid.

Advantageously the method wherein controlling the tool includes generating a number of commands for the tool using the sensor data and a feedback control algorithm such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant; and sending the number of commands to the tool to control the tool.

Advantageously the method wherein sending the number of commands to the tool to control the tool includes sending the number of commands to a motor to operate the motor, wherein the motor is configured to control movement of a plunger relative to the fluid source in which movement of the plunger relative to the fluid source controls the rate at which the fluid flows from the fluid source to the dispensing device.

Advantageously the method wherein sending the number of commands to the tool includes sending the number of commands to

an air pressure regulator, wherein the air pressure regulator is configured to control movement of a piston device relative to the fluid source using pressurized air in which movement of the piston device relative to the fluid source controls the rate at which the fluid flows from the fluid source to the dispensing device.

Advantageously the method further including moving a door mechanism associated with a retaining structure into an open state to allow the fluid source to be either inserted into or removed from the retaining structure.

Advantageously the method further including moving the door mechanism into a closed state to form a hermetic seal with the fluid source.

Advantageously the method wherein moving the door mechanism into the open state and moving the door mechanism into the closed state are performed using a robotic device.

According to still another aspect of the invention there is provided a method for controlling a dispensing of fluid, the method including moving a door mechanism associated with a retaining structure into an open state to allow a fluid source to be inserted into the retaining structure configured to hold the fluid source in which the fluid source holds the fluid; moving the door mechanism into a closed state to form a hermetic seal with the fluid source; dispensing the fluid from the dispensing device configured to receive the fluid from the fluid source; generating sensor data about the fluid that is being dispensed through the dispensing device using a sensor system associated with the dispensing device in which the sensor data includes at least one of temperature data and pressure data for the fluid; receiving the sensor data at a controller; generating a number of commands using the sensor data and a feedback control algorithm to control a tool that is configured to control a rate at which the fluid flows from the fluid source to the dispensing device such that a pressure of the fluid being

dispensed from the dispensing device remains substantially constant; and sending the number of commands to the tool to control the tool.

The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives and features thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of a fluid dispensing system in the form of a block diagram in accordance with an illustrative embodiment;

Figure 2 is an illustration of a sealant dispensing system with a door mechanism in a closed state in accordance with an illustrative embodiment;

Figure 3 is an illustration of a sealant dispensing system with a door mechanism in an open state in accordance with an illustrative embodiment;

Figure 4 is an illustration of another sealant dispensing system in accordance with an illustrative embodiment;

Figure 5 is an illustration of a process for controlling a fluid dispensing device in the form of a flowchart in accordance with an illustrative embodiment;

Figure 6 is an illustration of a process for controlling a dispensing of a fluid in the form of a flowchart in accordance with an illustrative embodiment;

Figure 7 is an illustration of a process for controlling a fluid dispensing device in the form of a flowchart in accordance with an illustrative embodiment;

Figure 8 is an illustration of a data processing system in the form of a block diagram in accordance with an illustrative embodiment;

Figure 9 is an illustration of an aircraft manufacturing and service method in the form of a flowchart in accordance with an illustrative embodiment; and

Figure 10 is an illustration of an aircraft in the form of a block diagram in which an illustrative embodiment may be implemented.

DETAILED DESCRIPTION

The illustrative embodiments recognize and take into account different considerations. For example, the illustrative embodiments recognize and take into account that it may be desirable to have an automated fluid dispensing system. The illustrative embodiments recognize and take into account that automating fluid dispensing operations may allow fluid to be dispensed more accurately and consistently. Thus, the illustrative embodiments provide a method and apparatus for controlling a fluid dispensing device using automated feedback control. Further, the illustrative embodiments provide a method and apparatus for use in automating the insertion, removal, and replacement of fluid cartridges within fluid dispensing systems.

Referring now to the figures and, in particular, with reference to **Figure 1**, an illustration of a fluid dispensing system is depicted in the form of a block diagram in accordance with an illustrative embodiment. In this illustrative example, fluid dispensing system **100** may include platform **102**, retaining structure **104**, door mechanism **106**, dispensing device **108**, tool

109, sensor system **110**, controller **111**, and attachment feature **112**.

Attachment feature **112** may be associated with platform **102**. As used herein, when one component is "associated" with another component, the association is a physical association in the depicted examples.

For example, without limitation, a first component, such as attachment feature **112**, may be considered to be associated with a second component, such as platform **102**, by being secured to the second component, bonded to the second component, mounted to the second component, welded to the second component, fastened to the second component, and/or connected to the second component in some other suitable manner. The first component also may be connected to the second component using a third component. Further, the first component may be considered to be associated with the second component by being formed as part of and/or as an extension of the second component.

Attachment feature **112** may be configured for use in attaching platform **102**, and thus fluid dispensing system **100**, to robotic device **114**. Robotic device **114** may take the form of, for example, without limitation, robotic arm **116**. In this manner, fluid dispensing system **100** may be considered an end effector for robotic arm **116**.

As depicted, retaining structure **104** may also be associated with platform **102**. Retaining structure **104** may be configured to retain, or hold, fluid source **105**. Fluid source **105** may hold fluid **118**. In this illustrative example, fluid **118** may be a compressible fluid. A compressible fluid may be comprised of one or more gases and/or liquids that can be compressed.

In this illustrative example, fluid **118** may have viscosity **120** within range **122**. In one illustrative example, fluid **118** may take the form of sealant **124** and fluid source **105** may take the form of sealant cartridge **126**. Sealant **124** may be compressible. Range **122** of viscosity **120** for sealant **124** may be

between, for example, without limitation, about 1 centipoise and about 100 centipoise.

Of course, in other illustrative examples, fluid **118** may take some other form. For example, without limitation, fluid **118** may take the form of adhesive **128**, caulk **130**, or some other type of fluid.

As depicted, door mechanism **106** may be associated with retaining structure **104**. Door mechanism **106** may comprise a number of different components. For example, without limitation, door mechanism **106** may comprise at least one of a latch mechanism, a hinge, a clamping mechanism, an air cylinder, a number of fasteners, a number of moveable joints, a number of bearings, or some other type of component.

As used herein, the phrase "at least one of," when used with a list of items, means different combinations of one or more of the listed items may be used and only one of the items in the list may be needed. The item may be a particular object, thing, or category. In other words, "at least one of" means any combination of items or number of items may be used from the list, but not all of the items in the list may be required.

For example, "at least one of item A, item B, and item C" may mean item A; item A and item B; item B; item A, item B, and item C; or item B and item C. In some cases, "at least one of item A, item B, and item C" may mean, for example, without limitation, two of item A, one of item B, and ten of item C; four of item B and seven of item C; or some other suitable combination.

Door mechanism **106** may be configured to allow access to fluid source **105** retained by retaining structure **104**. In particular, door mechanism **106** may be moved between open state **131** and closed state **133**. Door mechanism **106** may be moved into open state **131** to allow fluid source **105** to be either inserted into or removed from retaining structure **104**. For example, without limitation, robotic device **114** may be configured to move

door mechanism **106** into open state **131** such that fluid source **105** held within retaining structure **104** may be removed and replaced with a new fluid source.

Further, robotic device **114** may be configured to move door mechanism **106** into closed state **133** to cover fluid source **105** and ensure that fluid source **105** cannot be moved out of retaining structure **104**. In this manner, the process of replacing sealant cartridges may be automated.

In this illustrative example, door mechanism **106** may have locking mechanism **137**. Both locking mechanism **137** and door mechanism **106** may be operated by robotic device **114**.

Locking mechanism **137** may be configured to lock door mechanism **106** in closed state **133** such that door mechanism **106** does not move into open state **131** during the dispensing of fluid **118**. In particular, locking mechanism **137** may ensure that the increase in air pressure within fluid source **105** and/or retaining structure **104** that occurs during the dispensing of fluid **118** does not cause door mechanism **106** to move into open state **131**.

For example, without limitation, door mechanism **106** may move into open state **131** when the air pressure within fluid source **105** and/or retaining structure **104** increases. Locking mechanism **137** may comprise one or more clamping devices used to prevent door mechanism **106** from moving from closed state **133** to open state **131** during the dispensing of fluid **118**. Locking mechanism **137** may comprise any number of components, depending on the implementation. Locking mechanism **137** may include at least one of, for example, without limitation, a clamping device, a lever clamp, or some other type of locking device.

In this illustrative example, dispensing device **108** may be associated with at least one of retaining structure **104** and fluid source **105**. In particular, dispensing device **108** may be associated with at least one of retaining structure **104** and

fluid source **105** in a manner such that fluid **118** may be allowed to flow from fluid source **105** into dispensing device **108**.

As depicted, dispensing device **108** may be associated with nozzle **132**. Fluid **118** may be configured to be dispensed from, or exit, dispensing device **108** through nozzle **132**. Nozzle **132** may be formed as part of dispensing device **108** in some cases. In other cases, nozzle **132** may be a separate component that may be attached to dispensing device **108**.

In some illustrative examples, dispensing device **108** may include control valve **134**. Control valve **134** may be used to control the flow of fluid **118** received from fluid source **105** through dispensing device **108** and/or out of dispensing device **108**.

Tool **109** may be associated with at least one of platform **102**, retaining structure **104**, and dispensing device **108**. Tool **109** may be used to move fluid **118** held within fluid source **105** to dispensing device **108**. In particular, tool **109** may control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**. For example, without limitation, tool **109** may apply force, or pressure, to fluid source **105**, and thereby fluid **118** within fluid source **105**, to move fluid **118** to dispensing device **108**.

In this illustrative example, sensor system **110** may be associated with dispensing device **108**. Sensor system **110** may be configured to generate sensor data **136** about fluid **118** being dispensed from dispensing device **108**. For example, without limitation, sensor system **110** may include pressure sensor **138** and temperature sensor **140**.

Pressure sensor **138** may be configured to measure pressure **139** of fluid **118** being dispensed from dispensing device **108** to generate pressure data **141** for fluid **118**. Temperature sensor **140** may be configured to measure temperature **142** of fluid **118** being dispensed from dispensing device **108** to generate temperature data **143** for fluid **118**.

Sensor system **110** may be configured to send sensor data **136** to controller **111** using one or more communications links. These communications links may include at least one of a wired communications link, a wireless communications link, and an optical communications link.

Controller **111** may be implemented using hardware, software, or a combination of the two. In one illustrative example, controller **111** may be implanted using a microprocessor associated with platform **102**. Of course, in other illustrative examples, controller **111** may be implemented using at least one of a microprocessor, a number of computers, a computer system, an integrated circuit, an electronic circuit, or some other type of device.

Controller **111** may be configured to use sensor data **136** to control tool **109**. For example, without limitation, controller **111** may use sensor data **136** and feedback control algorithm **144** to generate number of commands **145** for tool **109**.

Controller **111** may use temperature data **143** to identify temperature **142** of fluid **118** within fluid source **105**. Temperature **142** may be an indication of viscosity **122** of fluid **118**. For example, without limitation, fluid **118** having a higher temperature may have a lower viscosity than fluid **118** having a lower temperature. In other words, fluid **118** having a higher temperature may flow more easily than fluid **118** having a lower temperature.

Further, controller **111** may use pressure data **141** to identify pressure **139** of fluid **118** within fluid source **105**. Based on temperature **142** and pressure **139** of fluid **118**, controller **111** may determine whether fluid **118** is flowing as desired, more easily than desired, or less easily than desired. Based on a determination of how fluid **118** is flowing, controller **111** may determine whether the force, or pressure, being applied to fluid **118** within fluid source **105** by tool **109** needs to be adjusted.

For example, without limitation, when temperature **142** and pressure **139** indicate that fluid **118** is flowing more easily than desired, controller **111** may generate number of commands **145** that will cause tool **109** to reduce the force, or pressure, being applied to fluid **118** within fluid source **105**. When temperature **142** and pressure **139** indicate that fluid **118** if flowing less easily than desired, controller **111** may generate number of commands **145** that will cause tool **109** to increase the force, or pressure, being applied to fluid **118** within fluid source **105**.

As one illustrative example, tool **109** may take the form of mechanical tool **146**. Mechanical tool **146** may comprise plunger **148** and motor **150**. Plunger **148** may be configured to be moved relative to fluid source **105** to control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**. In particular, plunger **148** may be pushed towards fluid **118** held within fluid source **105** to apply pressure to fluid **118** such that fluid **118** may be extruded from fluid source **105** and sent to dispensing device **108**. The amount of pressure placed on fluid **118** by plunger **148** may determine rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**.

The movement of plunger **148** may be controlled by motor **150**. Controller **111** may send number of commands **145** to motor **150** to operate motor **150**, and thereby control the movement of plunger **148**. In other words, controller **111** may control the force with which plunger **148** pushes against fluid source **105** in order to apply pressure to fluid **118** within fluid source **105**. In particular, controller **111** may evaluate sensor data **136** using feedback control algorithm **144** to determine whether fluid **118** is flowing to dispensing device **108** at a desired rate. If fluid **118** is not flowing at the desired rate, controller **111** may send number of commands **145** to motor **150** to adjust the operation of motor **150** such that rate **135** may be adjusted.

In another illustrative example, tool **109** may take the form of pneumatic tool **152**. Pneumatic tool **152** may comprise piston

device **154** and air pressure regulator **156**. Piston device **154** may be configured to move relative to fluid source **105** to control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**. In particular, piston device **154** may be pushed towards fluid **118** held within fluid source **105** by pressurized air **151** to apply pressure to fluid **118** such that fluid **118** may be extruded from fluid source **105** and sent to dispensing device **108**. The pressure applied by piston device **154** may be applied directly by piston device **154** or indirectly by air between piston device **154** and fluid **118** in fluid source **105**.

The amount of pressure placed on fluid **118** by piston device **154** may determine rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**. The movement of piston device **154** may be controlled by air pressure regulator **156**. Air pressure regulator **156** may regulate the flow and/or pressure of pressurized air **151** flowing towards piston device **154** to control the movement of piston device **154**.

Pressurized air **151** may flow from air pressure regulator **156** through air transfer element **158**. Air transfer element **158** may comprise any number of tubes, hoses, pipes, and/or other types of hollow elongate members configured to allow the flow of air. Air transfer element **158** may be connected to air pressure regulator **156** and at least one of retaining structure **104**, piston device **154**, or fluid source **105**. When door mechanism **106** is in closed state **133**, door mechanism **106** may provide hermetic seal **160** such that the pressure of pressurized air **151** may be maintained.

Controller **111** may send number of commands **145** to air pressure regulator **156** to operate air pressure regulator **156**, and thereby control the movement of piston device **154**. In particular, controller **111** may evaluate sensor data **136** using feedback control algorithm **144** to determine whether fluid **118** is flowing to dispensing device **108** at a desired rate. If fluid

118 is not flowing at the desired rate, controller **111** may send number of commands **145** to air pressure regulator **156** to adjust the flow and/or pressure of pressurized air **151** being applied towards piston device **154** such that rate **135** may be adjusted.

In this manner, controller **111** may be configured to generate number of commands **145** needed to control tool **109** using sensor data **136** and feedback control algorithm **144** such that a pressure of fluid **118** being dispensed from dispensing device **108** remains substantially constant. Thus, the process of continuously dispensing fluid **118** using fluid dispensing system **100** over some selected period of time may be automated. Sensor system **110**, controller **111**, and tool **109** may form a feedback control system for controlling the fluid dispensing operations performed using fluid dispensing system **100**.

Of course, in other illustrative examples, it may be desirable that the pressure of fluid **118** being dispensed not be substantially constant. For example, without limitation, it may be desirable that rate **135** at which fluid **118** flows to dispensing device **108** follow some selected pattern or curve. Controller **111** may use sensor data **136** and feedback control algorithm **144** to generate number of commands **145** that allow rate **135** to be controlled such that rate **135** follows this selected pattern or curve.

The illustration of fluid dispensing system **100** in **Figure 1** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

For example, in some cases, sensor system **110** may not include temperature sensor **140**. Rather, sensor system **110** may

include some type of device configured to directly measure viscosity **122** of fluid **118** within fluid source **105**. Controller **111** may use the data provided by this type of device and pressure data **141** to control tool **109**.

For example, in some cases, retaining structure **104** may not include door mechanism **106**. In some illustrative examples, tool **109** may be implemented in some other manner to control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108**.

In other illustrative examples, controller **111** may be implemented as part of robotic device **114** or as part of a control unit configured to control both robotic device **114** and fluid dispensing system **100**. In still other illustrative examples, air pressure regulator **156** may be implemented as part of robotic device **114**.

In some illustrative examples, controller **111** may include pressure signal conditioner **162**. Pressure signal conditioner **162** may be configured to receive sensor data **136** from pressure sensor **138** and amplify sensor data **136** such that sensor data **136** may be suitable for use in identifying number of commands **145**. Of course, in other illustrative examples, pressure signal conditioner **162** may be separate from controller **111** and may be configured to communicate with both pressure sensor **138** and controller **111**.

With reference now to **Figure 2**, an illustration of a sealant dispensing system with a door mechanism in a closed state is depicted in accordance with an illustrative embodiment. In this illustrative example, sealant dispensing system **200** may be an example of one implementation for fluid dispensing system **100** in **Figure 1**.

As depicted, sealant dispensing system **200** may include platform **202**, retaining structure **204**, door mechanism **206**, dispensing device **208**, pneumatic tool **209**, sensor system **210**, controller **212**, and attachment feature **214**. Platform **202**,

retaining structure **204**, door mechanism **206**, dispensing device **208**, pneumatic tool **209**, sensor system **210**, controller **212**, and attachment feature **214** may be examples of implementations for platform **102**, retaining structure **104**, door mechanism **106**, dispensing device **108**, pneumatic tool **152**, sensor system **110**, controller **111**, and attachment feature **112**, respectively, in **Figure 1**.

In this illustrative example, attachment feature **214** may be associated with platform **202** and configured for use in attaching platform **202** to a robotic device, such as, for example, without limitation, robotic device **114** in **Figure 1**. As depicted, retaining structure **204** may also be associated with platform **202**. Retaining structure **204** may retain sealant cartridge **216**. Sealant cartridge **216** may be an example of one implementation for sealant cartridge **126** in **Figure 1**.

Retaining structure **204** may have level indicator **218**. Level indicator **218** may take the form of plurality of holes **220** in this illustrative example. Plurality of holes **220** may allow sealant cartridge **216** to be seen. Sealant cartridge **216** may be at least partially transparent, in this illustrative example. In this manner, a level of sealant (not shown) held within sealant cartridge **216** may be visible. Plurality of holes **220** may allow this sealant level to be visible outside of retaining structure **204**.

Door mechanism **206** may be used to replace sealant cartridge **216**. Door mechanism **206** may include door **222**, hinge mechanism **224**, and air cylinder **226**. In this illustrative example, door mechanism **206** may be in closed state **227**. Air cylinder **226** may be used to move door mechanism **206** between an open state (not shown) and closed state **227**. When door mechanism **206** is in the open state, door **222** may be opened such that access to the interior of retaining structure **204** may be provided. When door mechanism **206** is in closed state **227**, door **222** may be closed

such that access to the interior of retaining structure **204** may be prevented.

When door mechanism **206** is moved into closed state **227**, air cylinder **226** may have a certain level of air pressure. Air cylinder **226** may lose air pressure when the pressure of air within sealant cartridge **216** increases. When air cylinder **226** loses air pressure beyond some selected threshold, door mechanism **206** may be moved from closed state **227** to an open state.

In one illustrative example, air cylinder **226** may be operated using the robotic device (not shown) attached to attachment feature **214**. This same robotic device or a different robotic device may then be used to insert sealant cartridge **216** into or remove sealant cartridge **216** from retaining structure **204**. In this manner, the changing of sealant cartridges may be automated.

Dispensing device **208** may be configured to receive the sealant held within sealant cartridge **216** and then dispense this sealant onto a surface. Pneumatic tool **209** may be used to control the flow of sealant from sealant cartridge **216** to dispensing device **208**.

As depicted, pneumatic tool **209** may include air pressure regulator **228**, air hose **230**, and a piston device (not shown in this view). Air pressure regulator **228** and air hose **230** may be examples of implementations for air pressure regulator **156** and air transfer element **158**, respectively, in **Figure 1**.

Air pressure regulator **228** may control the flow and/or pressure of pressurized air flowing through air hose **230** towards the piston device (not shown) to control the movement of the piston device relative to sealant cartridge **216**. In this manner, the amount of pressure applied to the sealant within sealant cartridge **216** may be controlled and thus, the rate at which the sealant is extruded from sealant cartridge **216** may be controlled.

Sensor system **210** may include a pressure sensor (not shown) and a temperature sensor (not shown) configured to generate pressure data and temperature data, respectively, about the fluid being dispensed from dispensing device **208**. Sensor system **210** may send this sensor data to controller **212**. Controller **212** may use this sensor data to generate a number of commands for air pressure regulator **228**. Controller **212** may then send the number of commands to air pressure regulator **228** wirelessly. In this manner, the operation of air pressure regulator **228** may be controlled using feedback provided by sensor system **210**.

With reference now to **Figure 3**, an illustration of sealant dispensing system **200** from **Figure 2** with door mechanism **206** in an open state is depicted in accordance with an illustrative embodiment. In this illustrative example, door mechanism **206** has been moved from closed state **227** in **Figure 2** to open state **300**.

With reference now to **Figure 4**, an illustration of another sealant dispensing system is depicted in accordance with an illustrative embodiment. In this illustrative example, sealant dispensing system **400** may be an example of one implementation for fluid dispensing system **100** in **Figure 1**.

As depicted, sealant dispensing system **400** may include platform **402**, retaining structure **404**, dispensing device **406**, mechanical tool **408**, sensor system **410**, controller **411**, and attachment feature **412**. Platform **402**, retaining structure **404**, dispensing device **406**, mechanical tool **408**, sensor system **410**, controller **411**, and attachment feature **412** may be examples of implementations for platform **102**, retaining structure **104**, dispensing device **108**, mechanical tool **146**, sensor system **110**, controller **111**, and attachment feature **112**, respectively, in **Figure 1**.

In this illustrative example, attachment feature **412** may be associated with platform **402** and configured for use in attaching

platform **402** to a robotic device, such as, for example, without limitation, robotic device **114** in **Figure 1**.

Retaining structure **404** may be associated with platform **402** and configured to hold sealant cartridge **416**. Dispensing device **406** may be configured to receive the sealant held within sealant cartridge **416** and then dispense this sealant onto a surface. Mechanical tool **408** may be used to control the flow of sealant from sealant cartridge **416** to dispensing device **406**.

As depicted, mechanical tool **408** may include motor **418** and plunger **420**. Motor **418** and plunger **420** may be examples of implementations of motor **150** and plunger **148**, respectively, in **Figure 1**. Plunger **420** may be pushed against the sealant held within sealant cartridge **416** to extrude the sealant from sealant cartridge **416**. Motor **418** may control the distance per second by which plunger **420** is moved relative to sealant cartridge **416**. In this manner, motor **418** may control the rate at which the sealant is extruded from sealant cartridge **416**.

Sensor system **410** may include a pressure sensor (not shown) and a temperature sensor (not shown) configured to generate pressure data and temperature data, respectively, about the fluid being dispensed from dispensing device **406**. Sensor system **410** may send this sensor data to controller **411**. Controller **411** may use this sensor data to generate a number of commands for motor **418**. Controller **411** may then send the number of commands to motor **418** wirelessly. In this manner, the operation of motor **418** may be controlled using feedback provided by sensor system **410**.

The illustrations of sealant dispensing system **200** in **Figure 2** and sealant dispensing system **400** in **Figure 4** are not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional.

The different components shown in **Figures 2-3** may be illustrative examples of how components shown in block form in **Figure 1** can be implemented as physical structures. Additionally, some of the components in **Figures 2-3** may be combined with components in **Figure 1**, used with components in **Figure 1**, or a combination of the two.

With reference now to **Figure 5**, an illustration of a process for controlling a fluid dispensing device is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 5** may be implemented using fluid dispensing system **100** in **Figure 1**. In particular, the process illustrated below may be implemented using controller **111** in **Figure 1**.

The process may begin by receiving sensor data **136** about fluid **118** that is being dispensed through dispensing device **108** (operation **500**). In operation **500**, sensor data **136** may be received from sensor system **110** associated with dispensing device **108**. Sensor data **136** may include pressure data **141**, temperature data **143**, and/or other types of data.

Thereafter, tool **109**, which may be configured to control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108** may be controlled based on sensor data **136** (operation **502**). The process may then return to operation **500** as described above. In one illustrative example, this process may be continuously performed during the entire fluid dispensing operation. In this manner, the rate at which fluid **118** is extruded from fluid source **105** to dispensing device **108** may be continuously adjusted based on feedback provided in the form of sensor data **136**.

With reference now to **Figure 6**, an illustration of a process for controlling a dispensing of a fluid is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 6** may be implemented using fluid dispensing system **100** in **Figure 1**. In

particular, the process illustrated below may be implemented using controller **111** in **Figure 1.**

The process may begin by moving door mechanism **106** associated with retaining structure **104** into open state **131** to allow fluid source **105** to be inserted into retaining structure **104** configured to hold fluid source **105** in which fluid source **105** holds fluid **118** (operation **600**). Next, door mechanism **106** may be moved into closed state **133** to form hermetic seal **160** with fluid source **105** (operation **602**). Fluid **118** may then be dispensed from dispensing device **108** which is configured to receive fluid **118** from fluid source **105** (operation **604**).

Sensor data **136** about fluid **118** that is being dispensed through dispensing device **108** may be generated using sensor system **110** associated with dispensing device **108** in which sensor data **136** includes at least one of temperature data **143** and pressure data **141** for fluid **118** (operation **606**). Sensor data **136** may be received at controller **111** (operation **608**). Number of commands **145** may be generated by controller **111** using sensor data **136** and feedback control algorithm **144** to control tool **109** that is configured to control rate **135** at which fluid **118** flows from fluid source **105** to dispensing device **108** such that a pressure of fluid **118** being dispensed from dispensing device **108** remains substantially constant (operation **610**). Number of commands **145** may be sent to tool **109** to control tool **109** (operation **612**).

[0001] A determination may then be made as to whether the dispensing of fluid **118** has been completed (operation **614**). If the dispensing of fluid **118** has been completed, the process terminates. Otherwise, the process returns to operation **610** as described above. In this illustrative example, operation **604** and operation **606** may be continuously performed until the dispensing of fluid **118** has been completed. The dispensing of fluid **118** may be completed when a selected amount of fluid **118** has been dispensed, when the portion of a surface to be covered

by fluid **118** has been completely covered, and/or based on other factors. In this manner, operation **610** and operation **612** may be performed to form a feedback control loop for the dispensing of fluid **118** from dispensing device **108**.

[0002] With reference now to **Figure 7**, an illustration of a process for controlling a fluid dispensing device is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 7** may be implemented using fluid dispensing system **100** in **Figure 1**. This process may be used to implement operations **500** and **502** described in **Figure 5** when sensor data **136** received in operation **500** in **Figure 5** includes both temperature data **143** and pressure data **141** in **Figure 1**.

[0003] The process may begin by receiving pressure data **141** and temperature data **143** for fluid **118** being dispensed from dispensing device **108** (operation **700**). A temperature of fluid **118** may be identified based on temperature data **143** (operation **702**). Next, a pressure of fluid **118** may be identified based on pressure data **141** (operation **704**).

In operation **702**, the temperature identified may be an indication of viscosity **120** of fluid **118**. Controller **111** may use the identified temperature and pressure of fluid **118** to determine whether fluid **118** is flowing as desired, more easily than desired, or less easily than desired.

Thereafter, a determination may be made as to whether the pressure of fluid **118** is equal to a desired pressure for fluid **118**, within selected tolerances, based on the temperature of fluid **118** (operation **706**). When the pressure is equal to the desired pressure, within selected tolerances, fluid **118** may be flowing as desired and the force, or pressure, being applied to fluid **118** by tool **109** may not need to be adjusted.

If the pressure of fluid **118** is equal to the desired pressure for fluid **118** within selected tolerances, the process returns to operation **700** as described above. Otherwise, the

process determines whether the pressure of fluid **118** is higher or lower than the desired pressure for fluid **118** (operation **708**). When the pressure is higher than the desired pressure, fluid **118** may be flowing more easily than desired and the force, or pressure, being applied to fluid **118** by tool **109** may be causing rate **135** and/or amount of fluid **118** flowing to dispensing device **108** to be greater than desired. Conversely, when the pressure is lower than the desired pressure, fluid **118** may be flowing less easily than desired and the force, or pressure, being applied to fluid **118** by tool **109** may be causing rate **135** and/or amount of fluid **118** flowing to dispensing device **108** to be less than desired.

With reference to operation **708**, if the pressure of fluid **118** is higher than the desired pressure, number of commands **145** may be generated for tool **109** to reduce the amount of pressure being applied to fluid **118** held within fluid source **105** by tool **109** (operation **710**). The process may then return to operation **700** as described above.

With reference again to operation **708**, if the pressure of fluid **118** is lower than the desired pressure, number of commands **145** may be generated for tool **109** to increase the amount of pressure being applied to fluid **118** held within fluid source **105** by tool **109** (operation **712**). The process may then return to operation **700** as described above.

The process described above may be repeated continuously during the dispensing of fluid **118** from dispensing device **108**. In this manner, pressure data **141** and temperature data **143** provide feedback control data that may be used to control the use of tool **109** in dispensing fluid **118**.

Turning now to **Figure 8**, an illustration of a data processing system is depicted in the form of a block diagram in accordance with an illustrative embodiment. Data processing system **800** may be used to implement controller **111** in **Figure 1**. As depicted, data processing system **800** includes communications

framework **802**, which provides communications between processor unit **804**, storage devices **806**, communications unit **808**, input/output unit **810**, and display **812**. In some cases, communications framework **802** may be implemented as a bus system.

Processor unit **804** is configured to execute instructions for software to perform a number of operations. Processor unit **804** may comprise a number of processors, a multi-processor core, and/or some other type of processor, depending on the implementation. In some cases, processor unit **804** may take the form of a hardware unit, such as a circuit system, an application specific integrated circuit (ASIC), a programmable logic device, or some other suitable type of hardware unit.

Instructions for the operating system, applications, and/or programs run by processor unit **804** may be located in storage devices **806**. Storage devices **806** may be in communication with processor unit **804** through communications framework **802**. As used herein, a storage device, also referred to as a computer readable storage device, is any piece of hardware capable of storing information on a temporary and/or permanent basis. This information may include, but is not limited to, data, program code, and/or other information.

Memory **814** and persistent storage **816** are examples of storage devices **806**. Memory **814** may take the form of, for example, without limitation, a random access memory or some type of volatile or non-volatile storage device. Persistent storage **816** may comprise any number of components or devices. For example, without limitation, persistent storage **816** may comprise a hard drive, a flash memory, a rewritable optical disk, a rewritable magnetic tape, or some combination of the above. The media used by persistent storage **816** may or may not be removable.

Communications unit **808** allows data processing system **800** to communicate with other data processing systems and/or

devices. Communications unit **808** may provide communications using physical and/or wireless communications links.

Input/output unit **810** allows input to be received from and output to be sent to other devices connected to data processing system **800**. For example, input/output unit **810** may allow user input to be received through a keyboard, a mouse, and/or some other type of input device. As another example, input/output unit **810** may allow output to be sent to a printer connected to data processing system **800**.

Display **812** is configured to display information to a user. Display **812** may comprise, for example, without limitation, a monitor, a touch screen, a laser display, a holographic display, a virtual display device, and/or some other type of display device.

In this illustrative example, the processes of the different illustrative embodiments may be performed by processor unit **804** using computer-implemented instructions. These instructions may be referred to as program code, computer usable program code, or computer readable program code and may be read and executed by one or more processors in processor unit **804**.

[0004] In these examples, program code **818** is located in a functional form on computer readable media **820**, which is selectively removable, and may be loaded onto or transferred to data processing system **800** for execution by processor unit **804**. Program code **818** and computer readable media **820** together form computer program product **822**. In this illustrative example, computer readable media **820** may be computer readable storage media **824** or computer readable signal media **826**.

[0005] Computer readable storage media **824** is a physical or tangible storage device used to store program code **818** rather than a medium that propagates or transmits program code **818**. Computer readable storage media **824** may be, for example, without limitation, an optical or magnetic disk or a persistent storage device that is connected to data processing system **800**.

[0006] Alternatively, program code **818** may be transferred to data processing system **800** using computer readable signal media **826**. Computer readable signal media **826** may be, for example, a propagated data signal containing program code **818**. This data signal may be an electromagnetic signal, an optical signal, and/or some other type of signal that can be transmitted over physical and/or wireless communications links.

[0007] The illustration of data processing system **800** in **Figure 8** is not meant to provide architectural limitations to the manner in which the illustrative embodiments may be implemented. The different illustrative embodiments may be implemented in a data processing system that includes components in addition to or in place of those illustrated for data processing system **800**. Further, components shown in **Figure 8** may be varied from the illustrative examples shown.

Illustrative embodiments of the disclosure may be described in the context of aircraft manufacturing and service method **900** as shown in **Figure 9** and aircraft **900** as shown in **Figure 9**. Turning first to **Figure 9**, an illustration of an aircraft manufacturing and service method is depicted in the form of a flowchart in accordance with an illustrative embodiment. During pre-production, aircraft manufacturing and service method **900** may include specification and design **902** of aircraft **1000** in **Figure 10** and material procurement **904**.

During production, component and subassembly manufacturing **906** and system integration **908** of aircraft **1000** in **Figure 10** takes place. Thereafter, aircraft **1000** in **Figure 10** may go through certification and delivery **910** in order to be placed in service **912**. While in service **912** by a customer, aircraft **1000** in **Figure 10** is scheduled for routine maintenance and service **914**, which may include modification, reconfiguration, refurbishment, and other maintenance or service.

Each of the processes of aircraft manufacturing and service method **900** may be performed or carried out by a system

integrator, a third party, and/or an operator. In these examples, the operator may be a customer. For the purposes of this description, a system integrator may include, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party may include, without limitation, any number of vendors, subcontractors, and suppliers; and an operator may be an airline, a leasing company, a military entity, a service organization, and so on.

With reference now to **Figure 10**, an illustration of an aircraft is depicted in the form of a block diagram in which an illustrative embodiment may be implemented. In this example, aircraft **1000** is produced by aircraft manufacturing and service method **900** in **Figure 9** and may include airframe **1002** with plurality of systems **1004** and interior **1006**. Examples of systems **1004** include one or more of propulsion system **1008**, electrical system **1010**, hydraulic system **1012**, and environmental system **1014**. Any number of other systems may be included. Although an aerospace example is shown, different illustrative embodiments may be applied to other industries, such as the automotive industry.

Apparatuses and methods embodied herein may be employed during at least one of the stages of aircraft manufacturing and service method **900** in **Figure 9**. In particular, fluid dispensing system **100** from **Figure 1** may be used during any one of the stages of aircraft manufacturing and service method **900**. For example, without limitation, fluid dispensing system **100** from **Figure 1** may be used to dispense and apply sealant **124** onto one or more surfaces and/or interfaces during at least one of component and subassembly manufacturing **906**, system integration **908**, in service **912**, routine maintenance and service **914**, or some other stage of aircraft manufacturing and service method **900**.

For example, without limitation, fluid dispensing system **100** in **Figure 1** may be used to dispense and apply sealant **124**

onto one or more surfaces and/or interfaces used in the assembly of airframe **1002** of aircraft **1000** during component and subassembly manufacturing **906**. In some cases, fluid dispensing system **100** in **Figure 1** may be used to dispense and apply sealant **124** onto one or more surfaces of interior **1006**, propulsion system **1008**, and/or hydraulic system **1012** of aircraft **1000**.

In one illustrative example, components or subassemblies produced in component and subassembly manufacturing **906** in **Figure 9** may be fabricated or manufactured in a manner similar to components or subassemblies produced while aircraft **1000** is in service **912** in **Figure 9**. As yet another example, one or more apparatus embodiments, method embodiments, or a combination thereof may be utilized during production stages, such as component and subassembly manufacturing **906** and system integration **908** in **Figure 9**. One or more apparatus embodiments, method embodiments, or a combination thereof may be utilized while aircraft **1000** is in service **912** and/or during maintenance and service **914** in **Figure 9**. The use of a number of the different illustrative embodiments may substantially expedite the assembly of and/or reduce the cost of aircraft **1000**.

The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatuses and methods in an illustrative embodiment. In this regard, each block in the flowcharts or block diagrams may represent a module, a segment, a function, and/or a portion of an operation or step.

In some alternative implementations of an illustrative embodiment, the function or functions noted in the blocks may occur out of the order noted in the figures. For example, in some cases, two blocks shown in succession may be executed substantially concurrently, or the blocks may sometimes be performed in the reverse order, depending upon the functionality

involved. Also, other blocks may be added in addition to the illustrated blocks in a flowchart or block diagram.

Thus, the illustrative embodiments may provide an automated method and apparatus for dispensing sealant, such as sealant **124** in **Figure 1**. In particular, a pressure of sealant **124** and/or rate **135** at which sealant **124** is extruded from sealant cartridge **126** may be monitored and controlled using feedback provided in the form of sensor data **136**. In particular, fluid dispensing system **100** may be used to accurately dispense sealant **124** continuously such that a consistent bead of sealant **124** may be applied at a substantially constant rate to a surface or interface.

The feedback control system provided by sensor system **110**, controller **111**, and tool **109** may be used to recover from air bubbles that may be present within sealant **124** to maintain a desired pressure and/or flow rate for sealant **124**.

Further, the illustrative embodiments may provide door mechanism **106** for use with retaining structure **104**. Door mechanism **106** may be operated by robotic device **114** such that pre-filled sealant cartridges may be inserted into and ejected from retaining structure **104** quickly. In this manner, the changing of sealant cartridges for fluid dispensing system **100** may be automated.

The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different features as compared to other desirable embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments

with various modifications as are suited to the particular use contemplated.

CLAIMS:

What is claimed is:

1. An apparatus comprising:

a sensor system associated with a dispensing device and configured to generate sensor data about fluid being dispensed from the dispensing device; and

a controller configured to receive the sensor data, identify a pressure of the fluid using the sensor data, and control a tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device.

2. The apparatus of claim 1, wherein the sensor system comprises at least one of:

a pressure sensor configured to generate pressure data for the fluid being dispensed from the dispensing device; and

a temperature sensor configured to generate temperature data for the fluid being dispensed from the dispensing device.

3. The apparatus of claim 2, wherein the controller identifies the pressure of the fluid using the pressure data and a temperature of the fluid using the temperature data and wherein the controller determines whether a force being applied by the tool to move the fluid from the fluid source to the dispensing device needs to be increased or decreased based on the pressure identified and the temperature identified.

4. The apparatus of claim 3, wherein the controller is configured to generate a number of commands to control the force being applied by the tool.

5. The apparatus of claim 1, wherein the controller uses the sensor data and a feedback control algorithm to generate a number of commands to control the tool.

6. The apparatus of claim 5, wherein the controller is configured to generate the number of commands needed to control the tool using the sensor data and the feedback control algorithm such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant.

7. The apparatus of claim 1, wherein the tool is a mechanical tool comprising:

a plunger configured to be moved relative to the fluid source to control the rate at which the fluid flows from the fluid source to the dispensing device; and

a motor configured to control movement of the plunger relative to the fluid source.

8. The apparatus of claim 7, wherein the controller is configured to generate a number of commands for the motor based on the sensor data and send the number of commands to the motor.

9. The apparatus of claim 1, wherein the tool is a pneumatic tool comprising:

a piston device configured to be moved relative to the fluid source to control the rate at which the fluid flows from the fluid source to the dispensing device; and

an air pressure regulator configured to control movement of the piston device relative to the fluid source.

10. The apparatus of claim 9, wherein the controller is configured to generate a number of commands for the air pressure regulator based on the sensor data and send the number of commands to the air pressure regulator.

11. The apparatus of claim 9, wherein the pneumatic tool further comprises:

an air transfer element configured to allow pressurized air to flow from the air pressure regulator towards the piston device.

12. The apparatus of claim 1 further comprising:

a retaining structure configured to hold the fluid source.

13. The apparatus of claim 12 further comprising:

a door mechanism associated with the retaining structure, wherein the door mechanism is configured to be moved between an open state and a closed state.

14. The apparatus of claim 13, wherein the door mechanism is configured to be moved into the open state to allow the fluid source to be either removed from or inserted into the retaining structure.

15. The apparatus of claim 13, wherein the door mechanism is configured to be moved into the closed state to form a hermetic seal with the fluid source.

16. The apparatus of claim 13, wherein the door mechanism comprises:

a locking mechanism configured to lock the door mechanism in the closed state.

17. The apparatus of claim 13 further comprising:

an air cylinder configured to move the door mechanism between the open state and the closed state, wherein the door mechanism is configured to move from the closed state to the open state when the air cylinder loses air pressure beyond a

selected threshold in response to a pressure of air within the fluid source increasing.

18. The apparatus of claim 13 further comprising:

a platform, wherein the door mechanism and the retaining structure are associated with the platform; and

an attachment feature configured for use in attaching the platform to a robotic device.

19. The apparatus of claim 1, wherein the fluid is a sealant and wherein the fluid source is a sealant cartridge that is at least partially transparent and pre-filled with the sealant.

20. A fluid dispensing system comprising:

a platform;

a retaining structure associated with the platform and configured to hold a fluid source;

a dispensing device configured to receive a fluid from the fluid source and dispense the fluid;

a sensor system associated with the dispensing device in which the sensor system comprises at least one of:

a pressure sensor configured to measure a pressure of the fluid being dispensed from the dispensing device to generate pressure data for the fluid; and

a temperature sensor configured to measure a temperature of the fluid being dispensed from the dispensing device to generate temperature data for the fluid;

a controller configured to receive the pressure data and the temperature data and to use the pressure data, the temperature data, and a feedback control algorithm to generate a number of commands to control a tool to control a rate at which the fluid flows from the fluid source to the dispensing device such that the pressure of the fluid being dispensed from the

dispensing device remains substantially constant in which the tool is selected from one of a mechanical tool and a pneumatic tool; and

a door mechanism associated with the retaining structure in which the door mechanism is configured to be moved between an open state and a closed state in which the open state allows the fluid source to be either removed from or inserted into the retaining structure and the closed state forms a hermetic seal with the fluid source.

21. A method for controlling a dispensing device comprising:

receiving sensor data about fluid that is being dispensed through the dispensing device;

identifying a pressure of the fluid using the sensor data; and

controlling a tool configured to move the fluid from a fluid source to the dispensing device based on the pressure identified to control a rate at which the fluid flows from the fluid source to the dispensing device.

22. The method of claim 21 further comprising:

generating the sensor data using a sensor system associated with the dispensing device.

23. The method of claim 22, wherein generating the sensor data comprises at least one of:

measuring the pressure of the fluid using a pressure sensor associated with the dispensing device to generate pressure data for the fluid; and

measuring a temperature of the fluid using a temperature sensor associated with the dispensing device to generate temperature data for the fluid.

24. The method of claim 21, wherein controlling the tool comprises:

generating a number of commands for the tool using the sensor data and a feedback control algorithm such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant; and

sending the number of commands to the tool to control the tool.

25. The method of claim 24, wherein sending the number of commands to the tool to control the tool comprises:

sending the number of commands to a motor to operate the motor, wherein the motor is configured to control movement of a plunger relative to the fluid source in which movement of the plunger relative to the fluid source controls the rate at which the fluid flows from the fluid source to the dispensing device.

26. The method of claim 24, wherein sending the number of commands to the tool comprises:

sending the number of commands to an air pressure regulator, wherein the air pressure regulator is configured to control movement of a piston device relative to the fluid source using pressurized air in which movement of the piston device relative to the fluid source controls the rate at which the fluid flows from the fluid source to the dispensing device.

27. The method of claim 21 further comprising:

moving a door mechanism associated with a retaining structure into an open state to allow the fluid source to be either inserted into or removed from the retaining structure.

28. The method of claim 27 further comprising:

moving the door mechanism into a closed state to form a hermetic seal with the fluid source.

29. The method of claim 28, wherein moving the door mechanism into the open state and moving the door mechanism into the closed state are performed using a robotic device.

30. A method for controlling a dispensing of fluid, the method comprising:

moving a door mechanism associated with a retaining structure into an open state to allow a fluid source to be inserted into the retaining structure configured to hold the fluid source in which the fluid source holds the fluid;

moving the door mechanism into a closed state to form a hermetic seal with the fluid source;

dispensing the fluid from the dispensing device configured to receive the fluid from the fluid source;

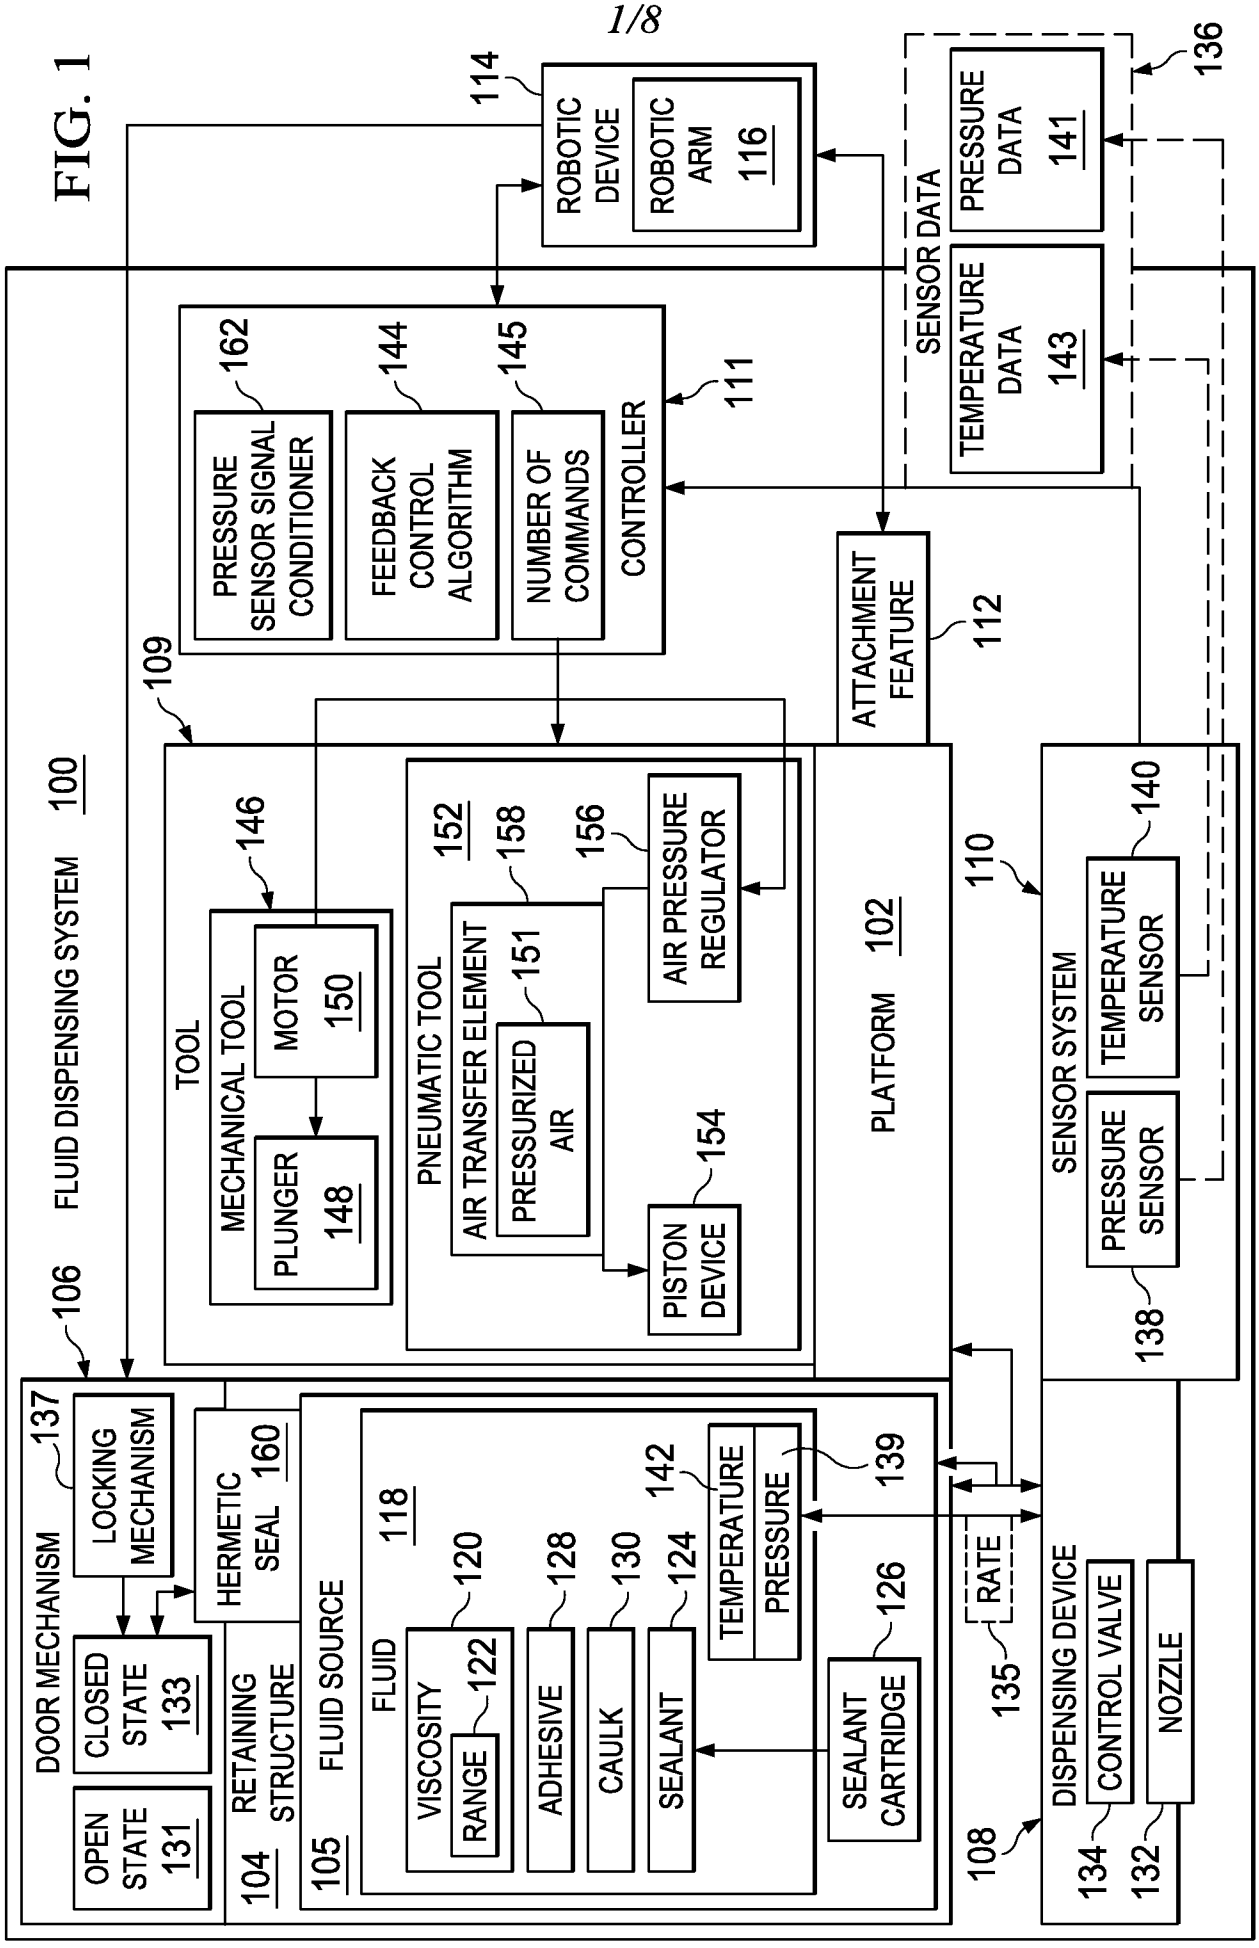
generating sensor data about the fluid that is being dispensed through the dispensing device using a sensor system associated with the dispensing device in which the sensor data includes at least one of temperature data and pressure data for the fluid;

receiving the sensor data at a controller;

generating a number of commands using the sensor data and a feedback control algorithm to control a tool that is configured to control a rate at which the fluid flows from the fluid source to the dispensing device such that a pressure of the fluid being dispensed from the dispensing device remains substantially constant; and

sending the number of commands to the tool to control the tool.

FIG. 1


FLUID DISPENSING SYSTEM 100
ROBOTIC DEVICE 114
ROBOTIC ARM 116
SENSOR DATA 136
PRESSURE DATA 141
TEMPERATURE DATA 143
CONTROLLER 111
PRESSURE SENSOR SIGNAL CONDITIONER 162
FEEDBACK CONTROL ALGORITHM 144
NUMBER OF COMMANDS 145
ATTACHMENT FEATURE 112
109
TOOL
MECHANICAL TOOL 146
MOTOR 150
PLUNGER 148
PNEUMATIC TOOL 152
AIR TRANSFER ELEMENT 158
PRESSURIZED AIR 151
AIR PRESSURE REGULATOR 156
PISTON DEVICE 154
PLATFORM 102
110
SENSOR SYSTEM
TEMPERATURE SENSOR 140
PRESSURE SENSOR 138
106
DOOR MECHANISM 137
LOCKING MECHANISM
HERMETIC SEAL 160
OPEN STATE 131
CLOSED STATE 133
RETAINING STRUCTURE 104
FLUID SOURCE 105
FLUID 118
VISCOSITY 120
RANGE 122
ADHESIVE 128
CAULK 130
SEALANT 124
TEMPERATURE 142
PRESSURE 139
SEALANT CARTRIDGE 126
RATE 135
108
DISPENSING DEVICE
CONTROL VALVE 134
NOZZLE 132

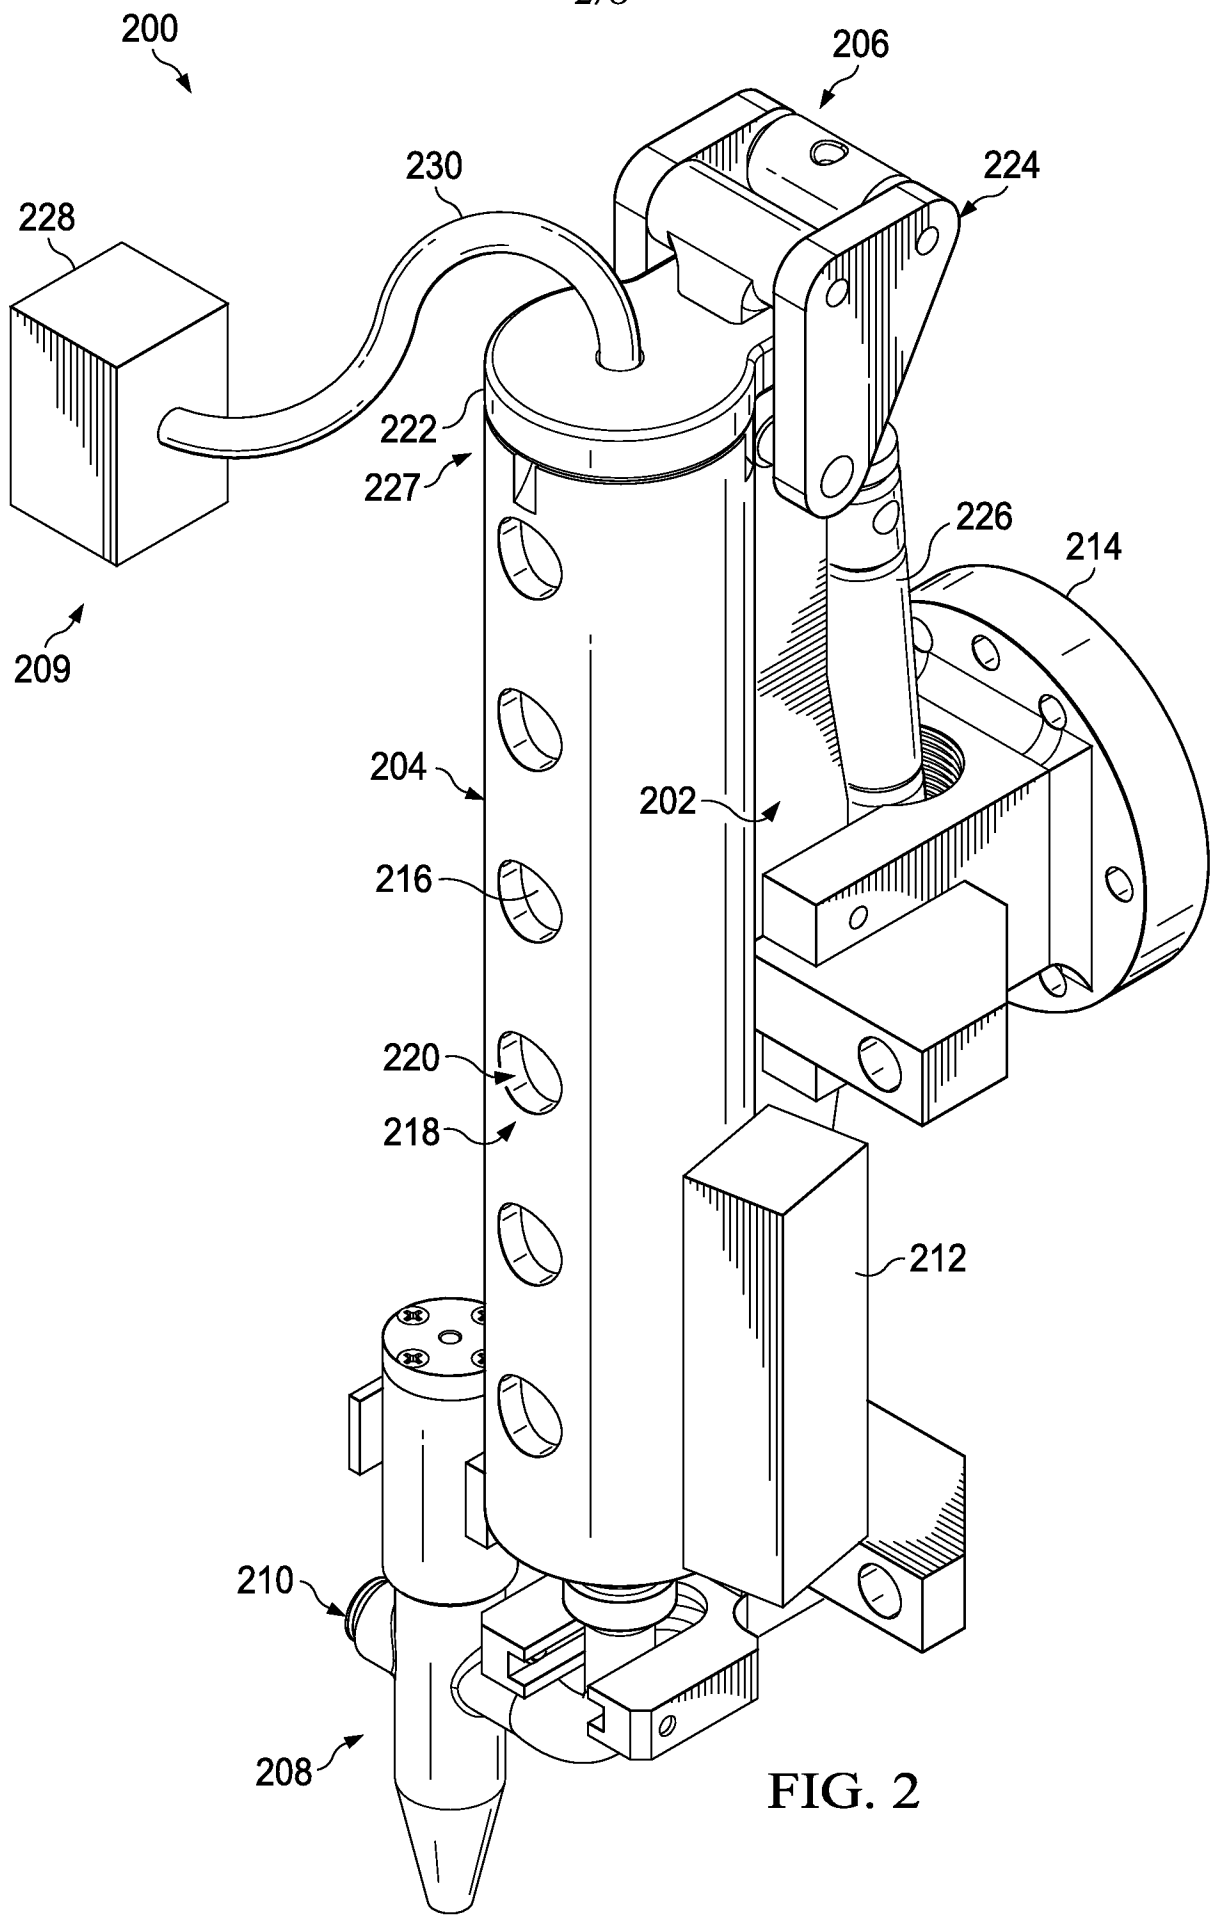

200
206
230
224
228
222
227
226
214
209
204
202
216
220
218
212
210
208

FIG. 2

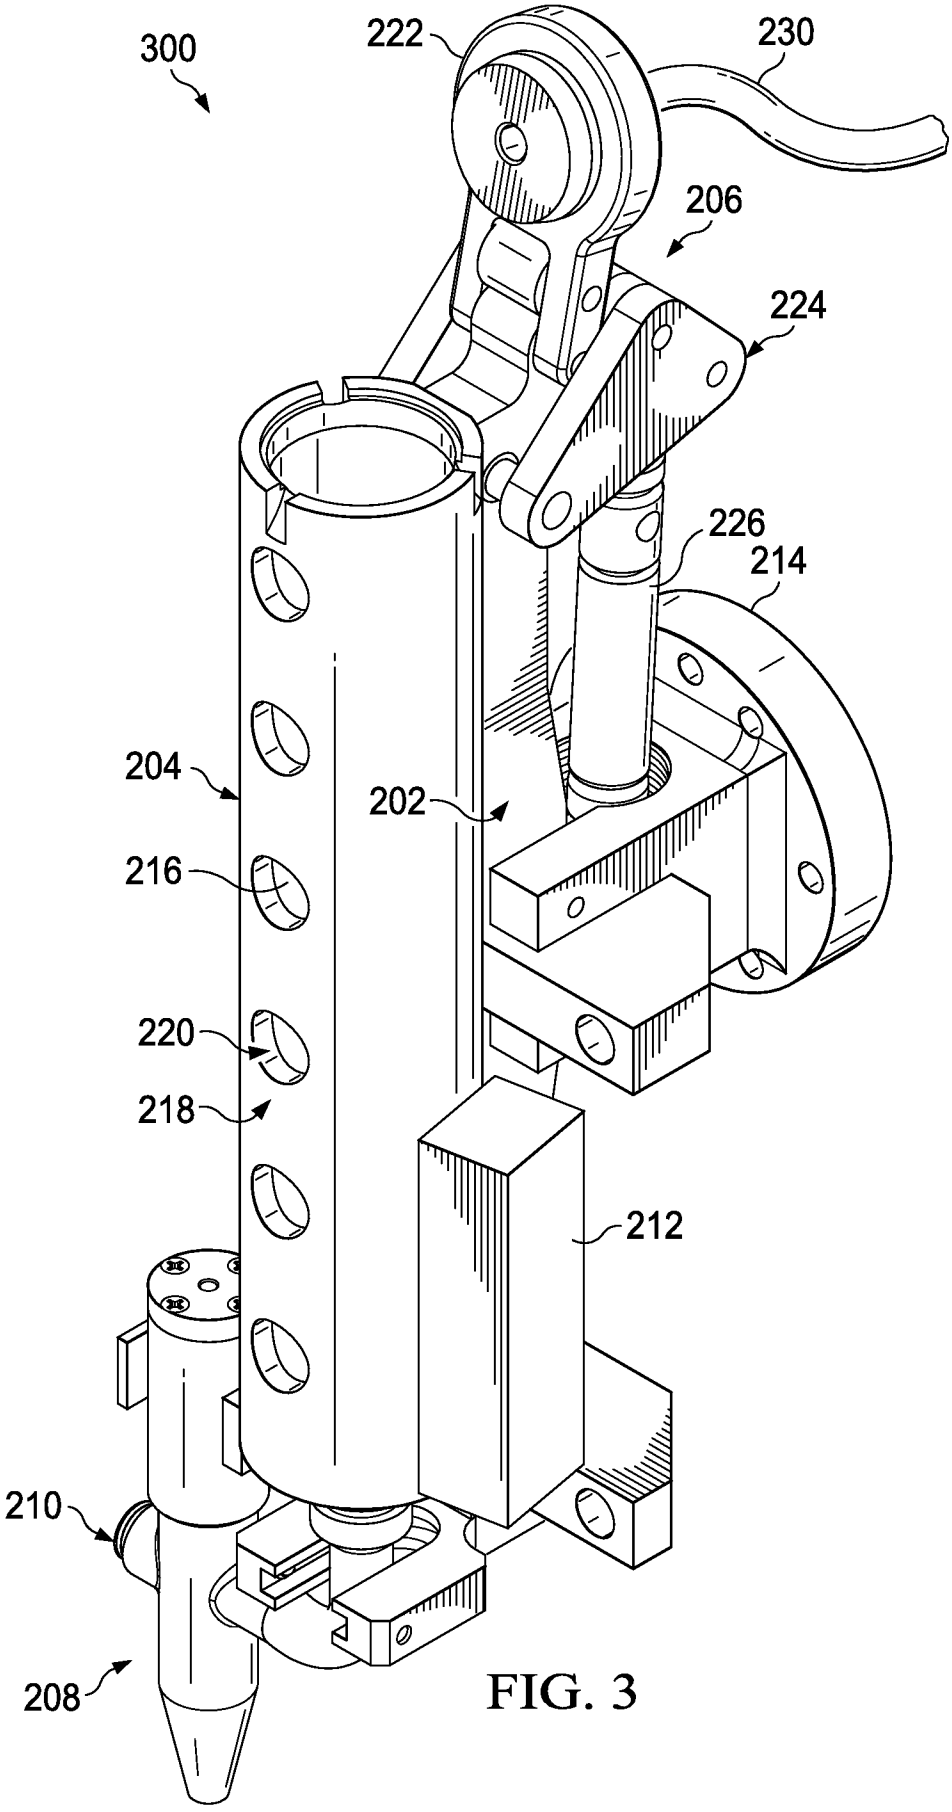


FIG. 3

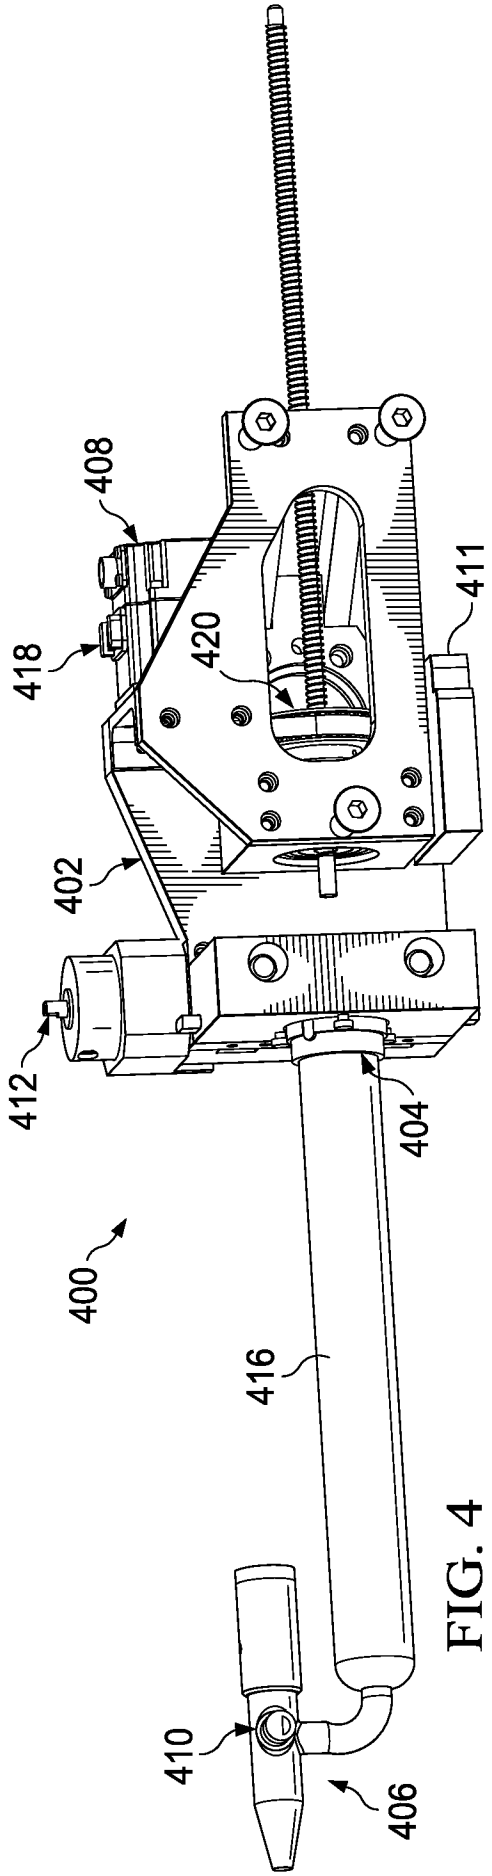

408
418
420
411
402
412
404
400
416
410
406

FIG. 4

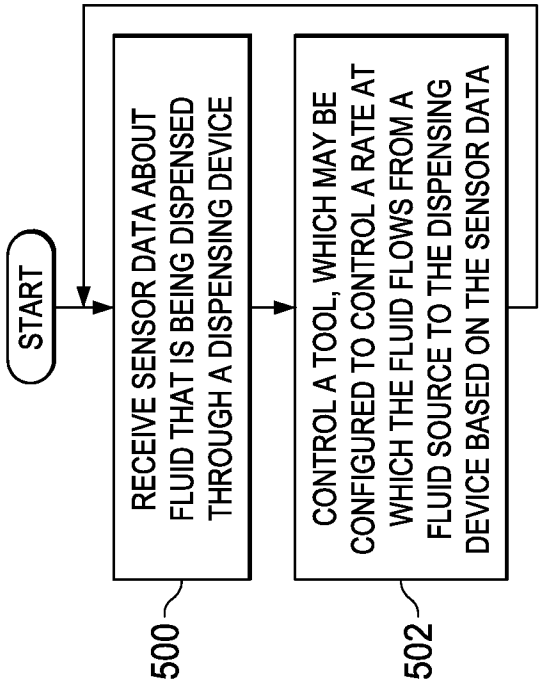

START
RECEIVE SENSOR DATA ABOUT FLUID THAT IS BEING DISPENSED THROUGH A DISPENSING DEVICE
CONTROL A TOOL, WHICH MAY BE CONFIGURED TO CONTROL A RATE AT WHICH THE FLUID FLOWS FROM A FLUID SOURCE TO THE DISPENSING DEVICE BASED ON THE SENSOR DATA
500
502

FIG. 5

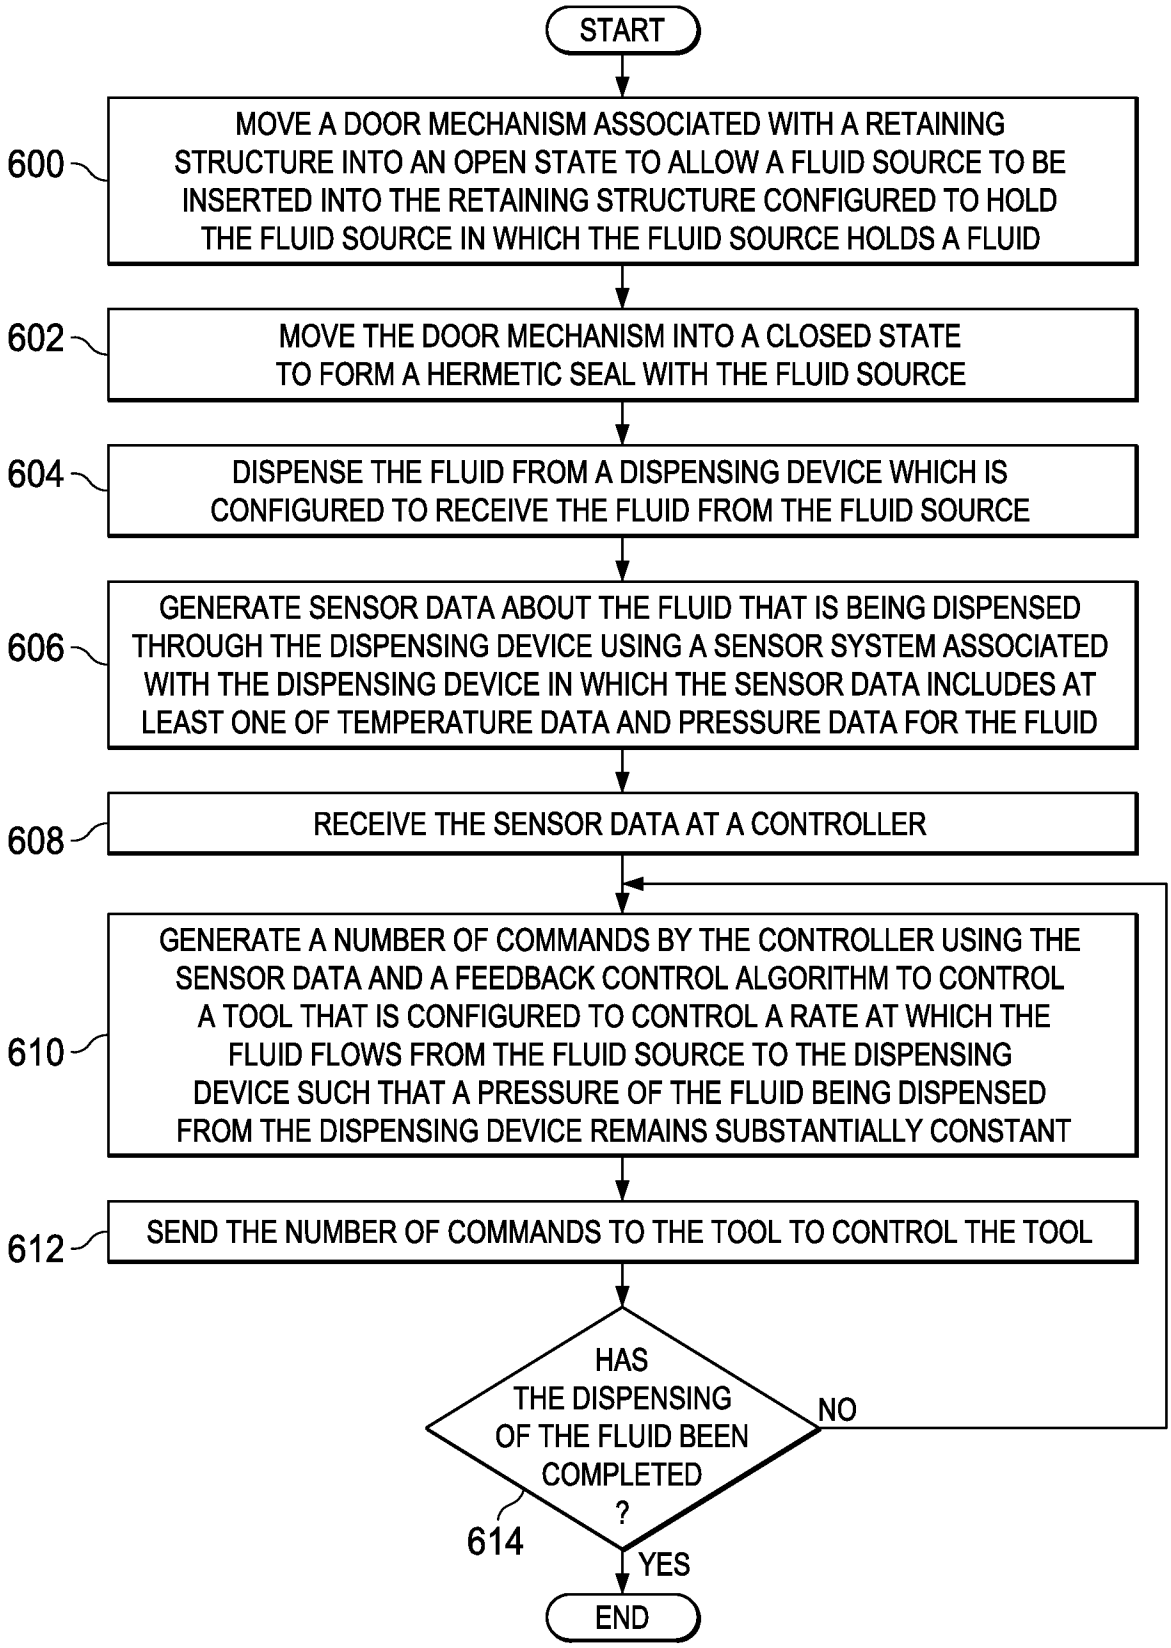

START
600
MOVE A DOOR MECHANISM ASSOCIATED WITH A RETAINING STRUCTURE INTO AN OPEN STATE TO ALLOW A FLUID SOURCE TO BE INSERTED INTO THE RETAINING STRUCTURE CONFIGURED TO HOLD THE FLUID SOURCE IN WHICH THE FLUID SOURCE HOLDS A FLUID
602
MOVE THE DOOR MECHANISM INTO A CLOSED STATE TO FORM A HERMETIC SEAL WITH THE FLUID SOURCE
604
DISPENSE THE FLUID FROM A DISPENSING DEVICE WHICH IS CONFIGURED TO RECEIVE THE FLUID FROM THE FLUID SOURCE
606
GENERATE SENSOR DATA ABOUT THE FLUID THAT IS BEING DISPENSED THROUGH THE DISPENSING DEVICE USING A SENSOR SYSTEM ASSOCIATED WITH THE DISPENSING DEVICE IN WHICH THE SENSOR DATA INCLUDES AT LEAST ONE OF TEMPERATURE DATA AND PRESSURE DATA FOR THE FLUID
608
RECEIVE THE SENSOR DATA AT A CONTROLLER
610
GENERATE A NUMBER OF COMMANDS BY THE CONTROLLER USING THE SENSOR DATA AND A FEEDBACK CONTROL ALGORITHM TO CONTROL A TOOL THAT IS CONFIGURED TO CONTROL A RATE AT WHICH THE FLUID FLOWS FROM THE FLUID SOURCE TO THE DISPENSING DEVICE SUCH THAT A PRESSURE OF THE FLUID BEING DISPENSED FROM THE DISPENSING DEVICE REMAINS SUBSTANTIALLY CONSTANT
612
SEND THE NUMBER OF COMMANDS TO THE TOOL TO CONTROL THE TOOL
HAS THE DISPENSING OF THE FLUID BEEN COMPLETED ?
614
NO
YES
END

FIG. 6

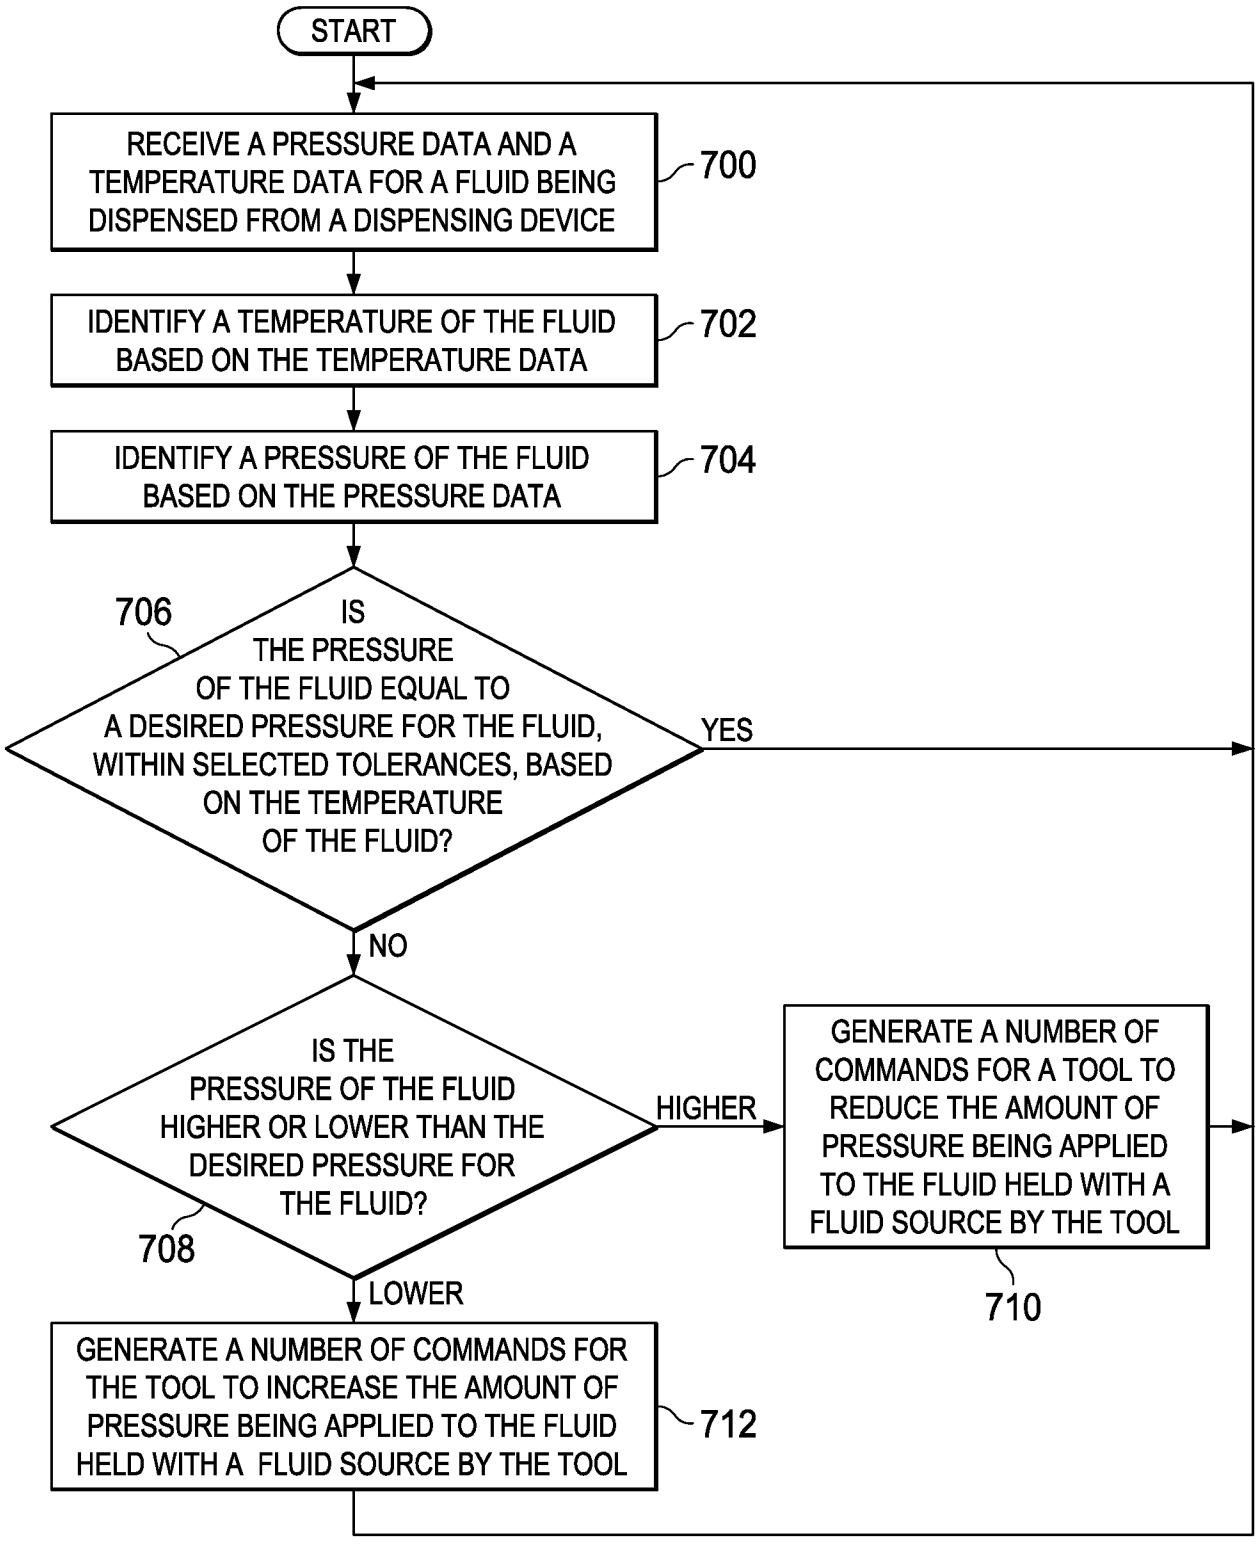

START
RECEIVE A PRESSURE DATA AND A TEMPERATURE DATA FOR A FLUID BEING DISPENSED FROM A DISPENSING DEVICE
700
IDENTIFY A TEMPERATURE OF THE FLUID BASED ON THE TEMPERATURE DATA
702
IDENTIFY A PRESSURE OF THE FLUID BASED ON THE PRESSURE DATA
704
706
IS THE PRESSURE OF THE FLUID EQUAL TO A DESIRED PRESSURE FOR THE FLUID, WITHIN SELECTED TOLERANCES, BASED ON THE TEMPERATURE OF THE FLUID?
YES
NO
IS THE PRESSURE OF THE FLUID HIGHER OR LOWER THAN THE DESIRED PRESSURE FOR THE FLUID?
708
HIGHER
GENERATE A NUMBER OF COMMANDS FOR A TOOL TO REDUCE THE AMOUNT OF PRESSURE BEING APPLIED TO THE FLUID HELD WITH A FLUID SOURCE BY THE TOOL
710
LOWER
GENERATE A NUMBER OF COMMANDS FOR THE TOOL TO INCREASE THE AMOUNT OF PRESSURE BEING APPLIED TO THE FLUID HELD WITH A FLUID SOURCE BY THE TOOL
712

FIG. 7

FIG. 8

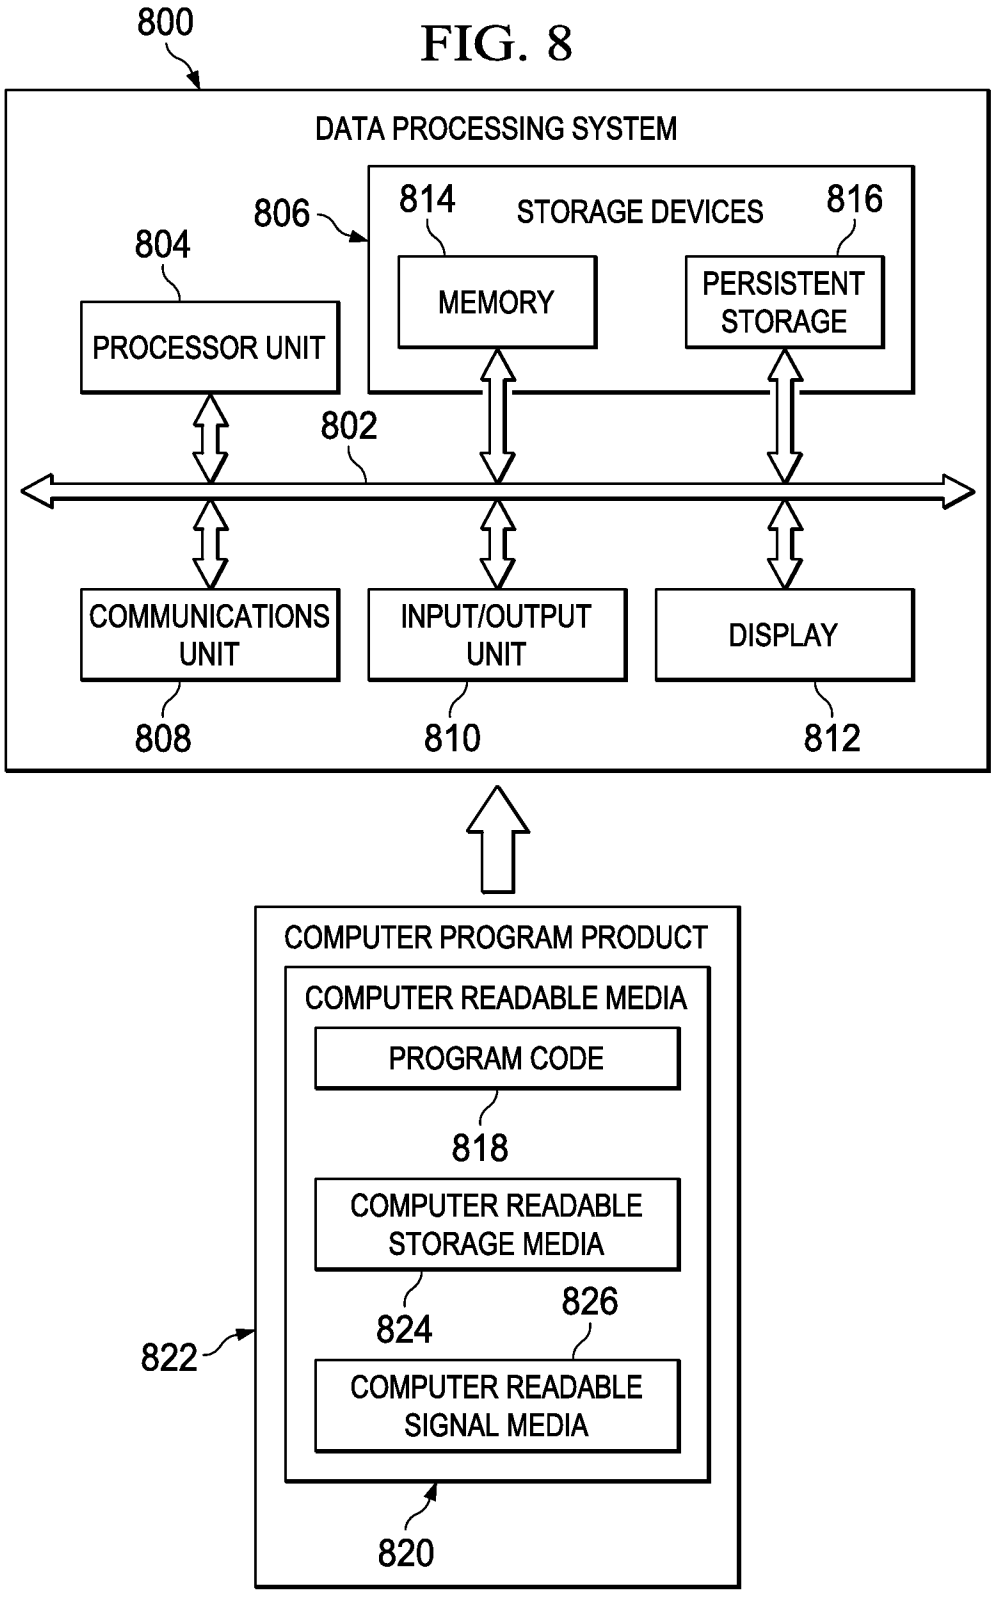

800
DATA PROCESSING SYSTEM
806
814
STORAGE DEVICES
816
804
MEMORY
PERSISTENT STORAGE
PROCESSOR UNIT
802
COMMUNICATIONS UNIT
INPUT/OUTPUT UNIT
DISPLAY
808
810
812
COMPUTER PROGRAM PRODUCT
COMPUTER READABLE MEDIA
PROGRAM CODE
818
COMPUTER READABLE STORAGE MEDIA
824
826
822
COMPUTER READABLE SIGNAL MEDIA
820

FIG. 9

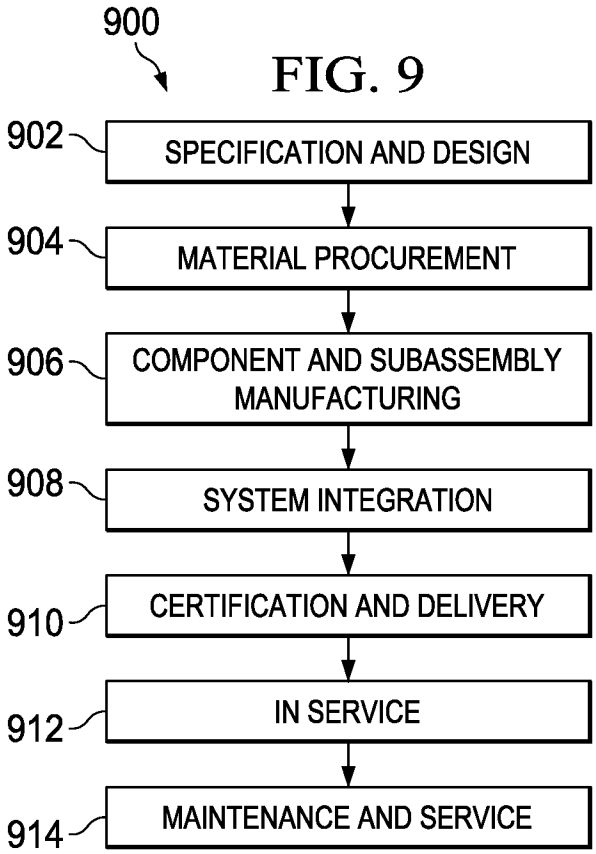
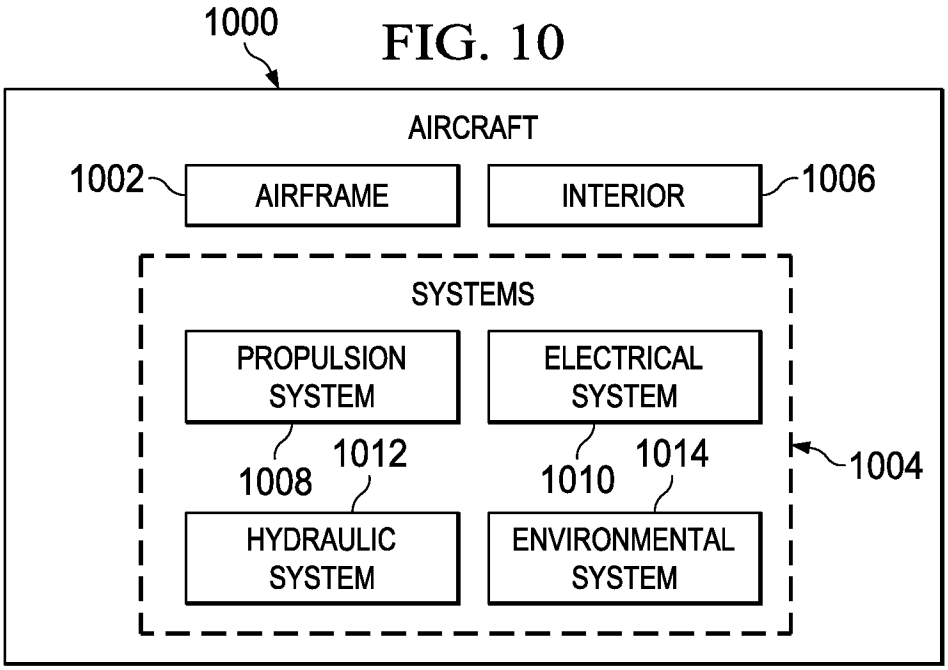

900
902
SPECIFICATION AND DESIGN
904
MATERIAL PROCUREMENT
906
COMPONENT AND SUBASSEMBLY MANUFACTURING
908
SYSTEM INTEGRATION
910
CERTIFICATION AND DELIVERY
912
IN SERVICE
914
MAINTENANCE AND SERVICE

FIG. 10


1000
AIRCRAFT
1002
AIRFRAME
INTERIOR
1006
SYSTEMS
PROPULSION SYSTEM
ELECTRICAL SYSTEM
1008
1012
1010
1014
1004
HYDRAULIC SYSTEM
ENVIRONMENTAL SYSTEM

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/040989

A. CLASSIFICATION OF SUBJECT MATTER
INV. B05C11/10
ADD. B05B12/10 B05C17/01 B05C17/015

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05C B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/108358 A2 (DOW CORNING TORAY CO LTD [JP]; IMAIZUMI TORU [JP]; OZAKI KOUICHI [JP]) 9 September 2011 (2011-09-09) paragraphs [0046] - [0049]; figure -----	1-15, 20-29
X	WO 2005/012845 A2 (FRAUNHOFER GES FORSCHUNG [DE]; OTHMAN NABIH [DE]) 10 February 2005 (2005-02-10) page 5, last paragraph - page 6 page 8, paragraph 4 - page 9, paragraph 1; figures -----	1-28,30
X A	US 2010/260531 A1 (RADEMACHER LOTHAR [DE]) 14 October 2010 (2010-10-14) paragraphs [0002], [0026] - [0030], [0035]; figures -----	1,5-8, 21,22,24 20,30
	-/--	

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 September 2014	07/10/2014

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Brévier, François

2

Form PCT/ISA/210 (second sheet) (April 2005)

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/040989

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2004 042211 A1 (PORSCHE AG [DE]) 2 March 2006 (2006-03-02) paragraph [0014]; figures ----- US 2012/095588 A1 (BARKMANN RALF [DE] ET AL) 19 April 2012 (2012-04-19) paragraphs [0012] - [0013], [0035], [0042] -----	9-16,18, 26-28 1,2,5, 20-23,30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2014/040989

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011108358 A2	09-09-2011	CN 102770216 A	07-11-2012
		EP 2542351 A2	09-01-2013
		JP 2011179468 A	15-09-2011
		KR 20130036216 A	11-04-2013
		TW 201143910 A	16-12-2011
		US 2012325864 A1	27-12-2012
		WO 2011108358 A2	09-09-2011
WO 2005012845 A2	10-02-2005	AT 379199 T	26-04-2006
		DE 10335146 A1	03-03-2005
		EP 1649252 A2	26-04-2006
		WO 2005012845 A2	10-02-2005
US 2010260531 A1	14-10-2010	CN 101855024 A	06-10-2010
		DE 102007053073 A1	04-06-2009
		EP 2185293 A1	19-05-2010
		ES 2389132 T3	23-10-2012
		KR 20100092442 A	20-08-2010
		PL 2185293 T3	30-11-2012
		US 2010260531 A1	14-10-2010
		WO 2009059753 A1	14-05-2009
DE 102004042211 A1	02-03-2006	NONE	
US 2012095588 A1	19-04-2012	CN 102802930 A	28-11-2012
		DE 102009029821 A1	23-12-2010
		EP 2442970 A1	25-04-2012
		US 2012095588 A1	19-04-2012
		WO 2010145748 A1	23-12-2010