



(22) **Date de dépôt/Filing Date:** 2009/10/16

(41) **Mise à la disp. pub./Open to Public Insp.:** 2010/09/11

(45) **Date de délivrance/Issue Date:** 2015/06/16

(30) **Priorité/Priority:** 2009/03/11 (CA2,658,088)

(51) **Cl.Int./Int.Cl.** *H01H 25/06* (2006.01),
H01H 1/18 (2006.01), *H01R 29/00* (2006.01),
H01R 9/03 (2006.01)


(72) **Inventeur/Inventor:**
BILDER, GEOFFREY, CA

(73) **Propriétaire/Owner:**
BILDER, GEOFFREY, CA

(74) **Agent:** G. RONALD BELL & ASSOCIATES

(54) **Titre : SELECTEUR DE STANDARD DE CABLAGE**

(54) **Title: WIRING STANDARD SELECTOR SWITCH**

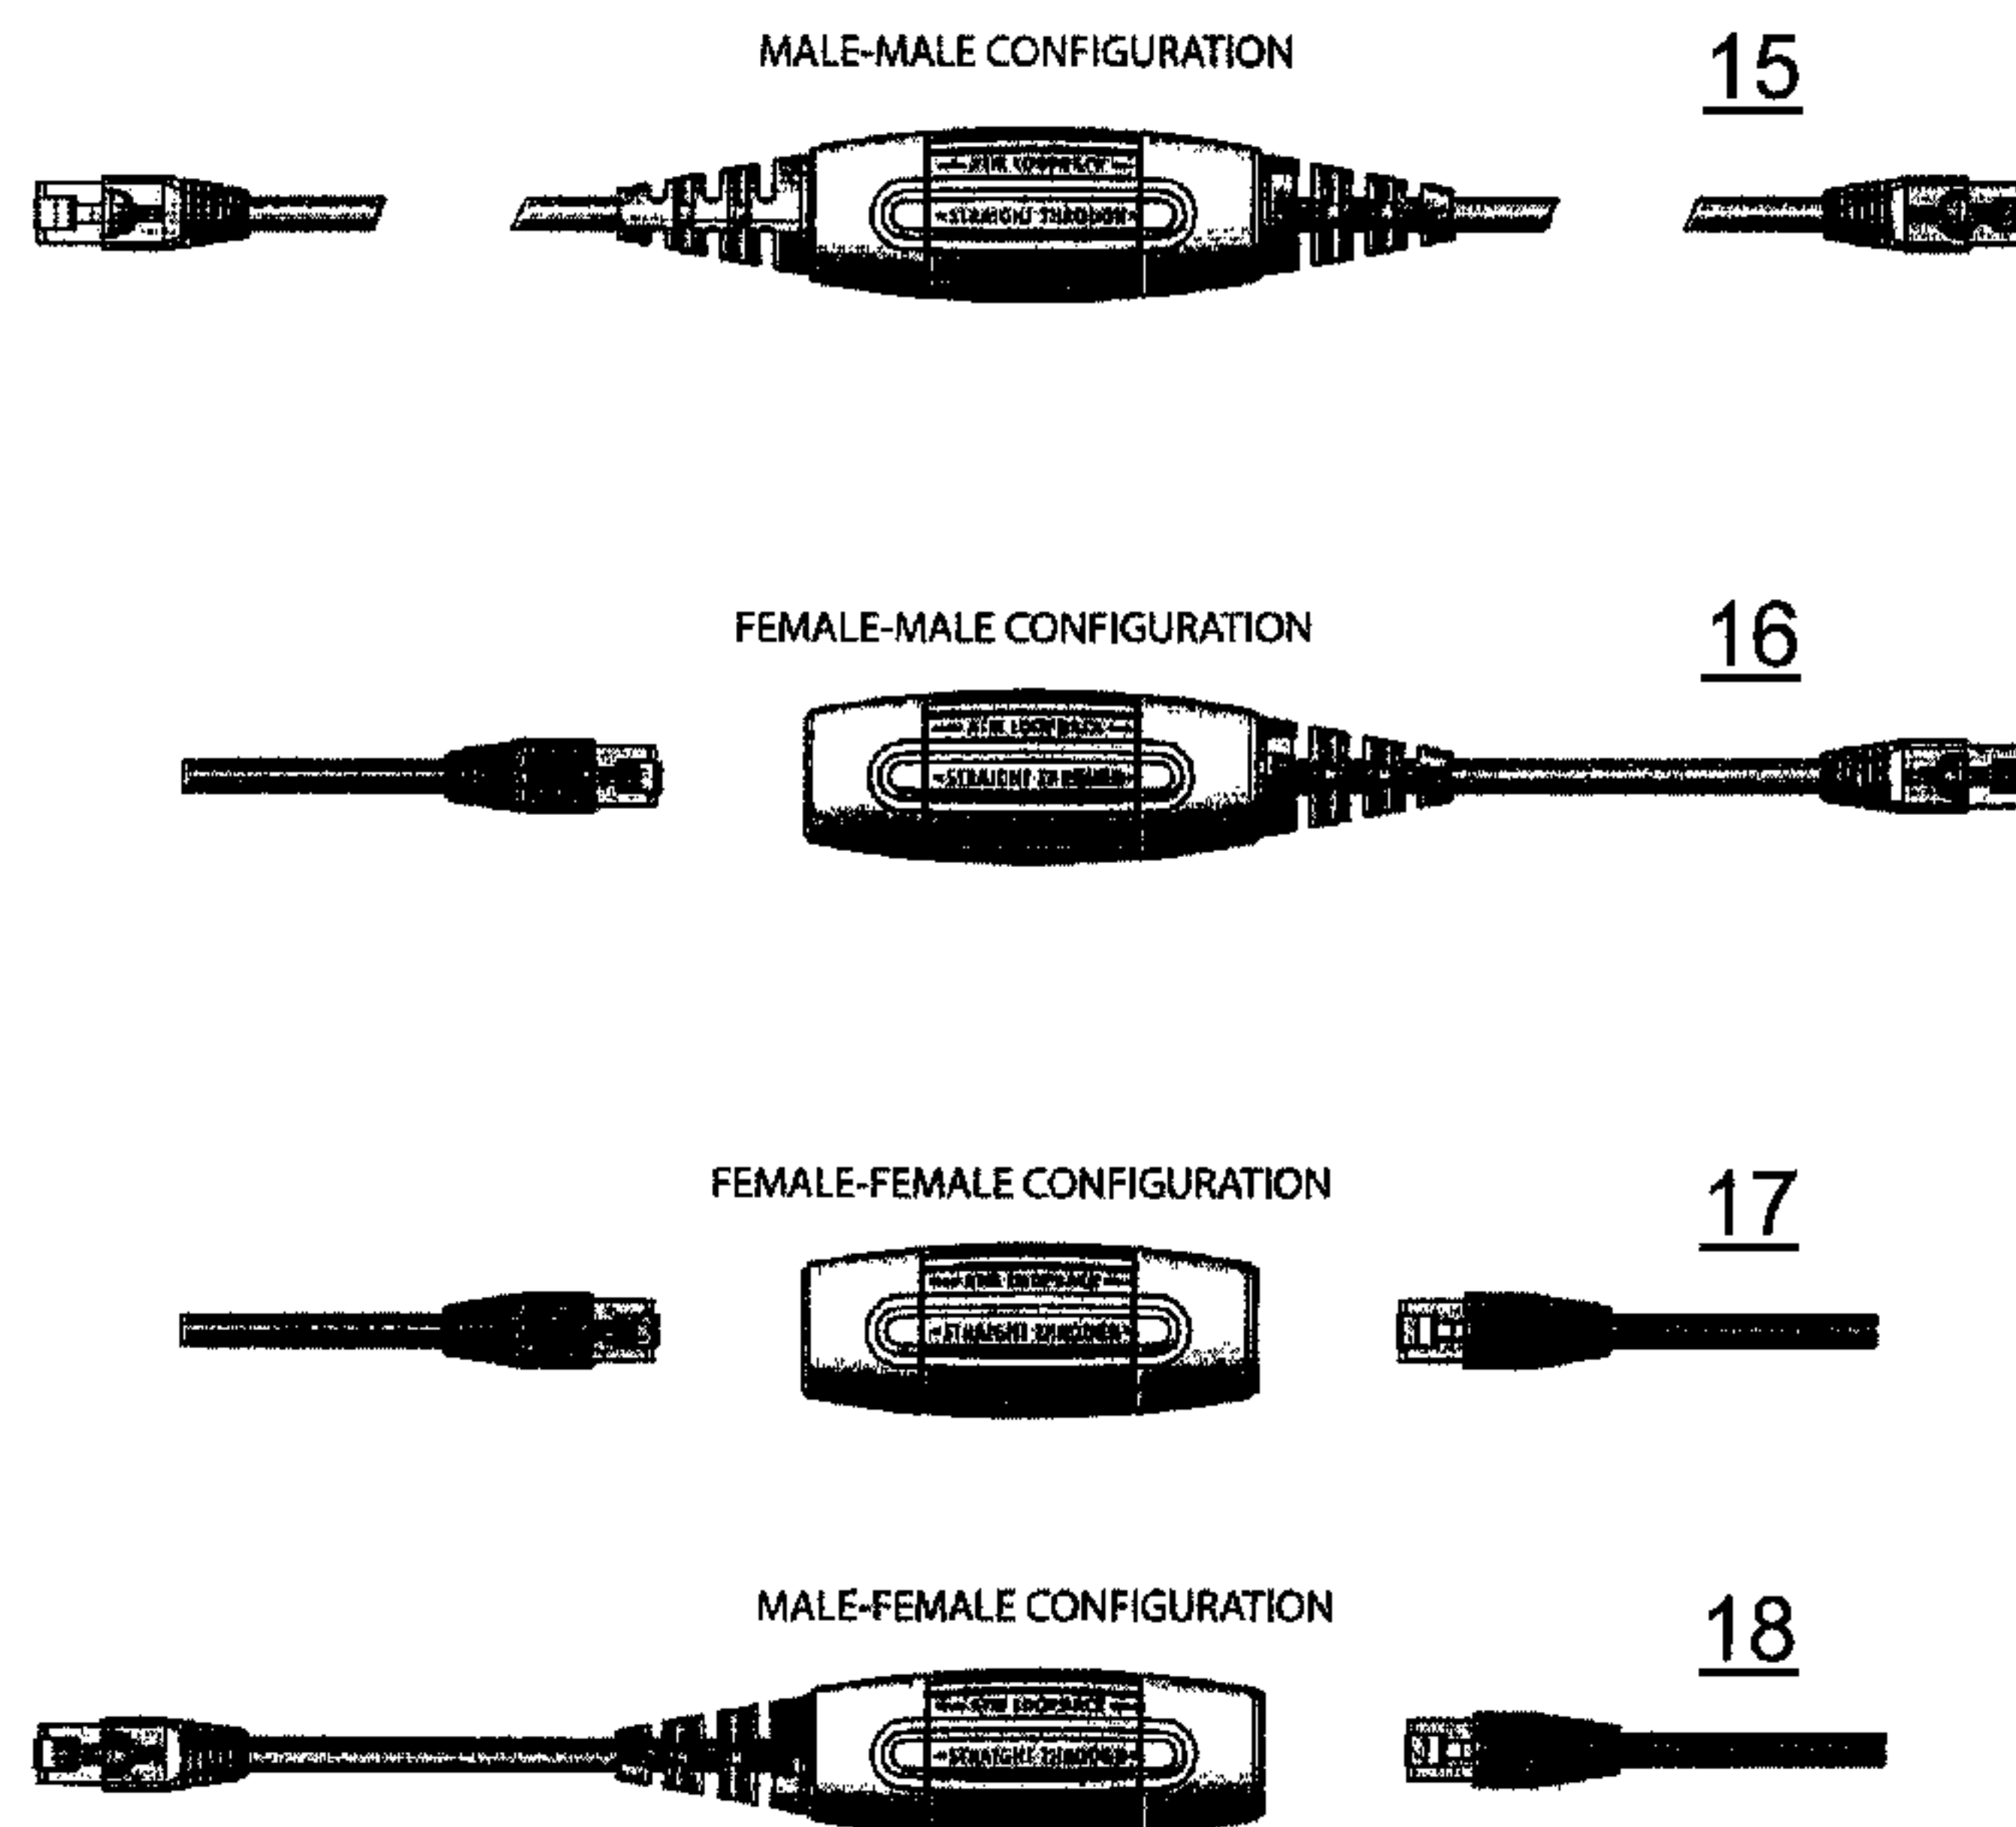

(57) **Abbrégé/Abstract:**

A wiring standard selector switch is used in a wired computer network and has the ability to easily switch between various network wiring standards, such as, for example, Rolled, ATM loopback, T1, Cross-over, and Straight-through. Rotating the switching collar causes the printed circuit board containing a wiring standard printed circuit to change the input/output relationship of the individual wires in the input and output network cables.

ABSTRACT

A wiring standard selector switch is used in a wired computer network and has the ability to easily switch between various network wiring standards, such as, for example, Rolled, ATM loopback, T1, Cross-over, and Straight-through. Rotating the switching collar causes the printed circuit board containing a wiring standard printed circuit to change the input/output relationship of the individual wires in the input and output network cables.

WIRING STANDARD SELECTOR SWITCH

FIELD OF THE INVENTION

The present invention relates to wired computer network technologies. In particular, the present invention relates to a wiring standard selector switch capable of switching between multiple wiring standards used in wired computer networks, such as, cross-over and straight through, for example.

BACKGROUND OF THE INVENTION

The present invention is an improvement over Canadian Patent Application No. 2,658,088, filed March 11, 2009 wherein a universal network cable and a wiring standard selector switch are disclosed. Further developments have been revealed that outline the need for the production of an upgraded wiring standard selector switch. For a ready understanding of the current state of the wiring standard selector switch the reader is directed to Canadian Patent Application No. 2,658,088.

Wired computer networks generally consist of a plurality of network devices connected to each other using a plurality of network cables to enable data communication between each of the network devices. One of the most common forms of cabling that is used in wired networks are Category 5 (Cat5) Twisted Pair, which consists of 8 wires (4 pairs). Each of the four pairs of wires is colour coded with a primary wire (solid colour) and its counterpart secondary wire (striped colour), the T-568A and T-568B Cat5 network cable colouring schemes are presented in Figure 1. To be able to connect the Cat5 network cable to network devices a male 8 Position 8 Contact (8P8C) connector or more commonly referred to as an RJ45 connector is fitted and crimped onto each end of the Cat5 network cable. Each of the primary and secondary wires at each end of the Cat5 cable is fitted into an 8P8C connector in a pre-determined order. The pre-determined wiring order are specific wiring standards and are dependant on a number of variables including, for example, the type of network device (e.g. a hub, router, network card, etc.) and whether the connection is directly connected (e.g. network card to network card) or routed through a network device (e.g. network card to network hub to network card). This is due to the fact that

each of the primary and secondary wires is given a specific function which may differ between network devices, the specific function of each of the wires in the T-568A and T-568B Cat5 network cable colouring schemes are also presented in Figure 1. Some of the more common wiring standards include, for example, crossover, straight-through, T1, ATM loopback, rolled, etc. In each of the aforementioned wiring standards it is necessary to use a specific Cat5 network cable, i.e. a cross-over cable, or a straight-through cable, to connect the network devices together.

Generally, when Network Technicians or the like are on the job they perform various tasks which may include, setting up a wired computer network, configuring network devices or troubleshooting network connectivity problems. These tasks require network connectivity between network devices and the Network Technicians' network device (in many instances this device is a notebook computer). Each of the network devices requiring the Network Technician to connect to may use a different wiring standard; thus requiring the Network Technician to have readily available a separate Cat5 network cable for each device connection. It can become expensive to purchase and cumbersome to carry all of the different types of Cat5 network cables the Network Technician might come across on the job. It would be beneficial for a Network Technician to achieve network connectivity with a variety of network devices having a variety of wiring standards using a single Cat5 network cable.

Canadian Patent Application No. 2,658,088, filed March 11, 2009 (Bilder) describes a universal network cable and a wiring standard selector switch. The embodiment of the invention that is disclosed in the application uses a slidable switch actuating means to change between different wiring standards.

United States Patent No. 6,794,577, issued September 21, 2004 (Bhogal) describes cables used in computer networks and more specifically cables that incorporate multiple configuration settings. In an embodiment of the invention the network cable includes two connectors and a corresponding set of connector pins and signal wires. A coupling piece with at least two configuration settings controls the routing between the set of signal wires. The cable is transitionable between the at least two configuration settings with a hand settable switch, the position of the switch

dictates the coupling configuration such as, a pass-through configuration and a crossover configuration, for example.

United States Patent Application No. 2008/0274629, published November 6, 2008 (Meyer) describes an apparatus for enabling serial communication between two
5 devices utilizing different cables, connectors or wiring schemes. An embodiment of the apparatus is composed of a rack-mountable housing with two RJ45 standard modular jacks for receiving RJ45 cables. The apparatus houses a plurality of electrical connections between the two RJ45 standard modular jacks, and the electrical connections effect a remapping of the signals between the two jacks. The remapping
10 of the wiring may be implemented using wires connected between posts, using a printed circuit board, a programmable or processing device, or any other method for making the electrical connections between the two cable ports. The remapping of the wiring may be implemented or updated on the fly, using software or hardware switching or programming, or alternatively, hardwired at the time of manufacture. The
15 electronic devices may each represent a component in a computer network, including, a personal computer, a router, a gateway, a modem, a printer, a scanner, a keyboard, a mouse, or any other electronic device capable of communication using a serial communication standard.

United States Patent No. 4,579,407, issued April 1, 1986 (Shimada) describes
20 an interface cable, of the RS232C standard type interface, which can perform many kinds of cable connections. A plurality of changeover switches are provided between the RS232C connectors connected at the ends of the connecting cable, which contains multiple lines therein, the switches being used for selectively changing the connection with respect to at least a part of the multiple lines. By selectively turning 'on' or 'off'
25 each of the changeover switches various kinds of cable connections can be performed using only a single cable, such as, between modem equipment and terminal equipment, between modem equipment to modem equipment, and between terminal equipment and terminal equipment, for example.

United States Patent Application No. 2005/0059291, published March 17, 2005
30 (Wood) describes an improved method of assembling electrical connectors to wiring, such as, for example, RJ-45 connectors. The invention provides a connector plug with

an internal circuit board for rerouting the wires, and a method of attaching wires from a multi-wire cable to an RJ-45 connector plug without the requirement to manually separate, sort and route individual wires to specific pins. The wires are attached to the connector plug in the same order that they are arranged within the cable. The circuit
5 board with the connector plug, is interposed between the pins on the connector plug, which are connected to the cable wires, and the connector pins on the other end are attached to a wall jack or a device.

The present invention was made in recognition of the above-identified art and with a view to aiding Network Technicians too easily and more efficiently enable
10 connectivity between two network devices having different wiring standards.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a wiring standard selector switch capable of easily switching between a plurality of wiring standards used
15 in computer networks.

Accordingly, as an aspect of the present invention, there is provided a wiring standard selector switch for use in wired computer networks, the switch comprising a first printed circuit board having thereon a wiring standard printed circuit defining a plurality of different network wiring standards. A second printed circuit board having
20 thereon a set of input contacts and a set of output contacts arranged to be in electrical contact with the first printed circuit board and a set of input leads electrically connected to the set of input contacts and being adapted to receive an input connector and a set of output leads electrically connected to the set of output contacts and being adapted to receive an output connector. A selector switch enclosure being adapted to ensure
25 that the first and second printed circuit boards are parallel and in electrical contact with each other and allowing the first printed circuit board to be longitudinally slidable in relation to the second printed circuit board via at least one longitudinal guiding slot. A switching collar rotatably mounted on the outer surface of the selector switch enclosure having at least one guiding cam groove on its inner surface for guiding at least one
30 stud of a cam follower that is adapted to be rigidly affixed to the first printed circuit board. Whereby the rotating mechanical action from a rotation of the switching collar

at predetermined amounts is converted into a longitudinal mechanical action via the at least one guiding cam groove, the at least one longitudinal guiding slot and the at least one stud causes the cam follower which is rigidly affixed to the first printed circuit board to longitudinally slide at predetermined space intervals. The set of input contacts
5 and the set of output contacts engage the wiring standard printed circuit so as to establish a different complete circuit at each of the predetermined space intervals between each of the set of input leads and the set of output leads. Each of the different complete circuits correspond to one of the plurality of different network wiring standards.

10 The set of input leads and the set of output leads of the present invention may be electrically connected to an input network cable and an output network cable, respectively and preferable that the input network cable and the output network cable are each fitted with a male connector.

The set of input leads and the set of output leads of the present invention may
15 be electrically connected to an input female connector and an output network cable, respectively and preferable that the output network cable is fitted with a male connector.

The set of input leads and the set of output leads of the present invention may be electrically connected to an input network cable and an output female connector,
20 respectively and preferable that the input network cable is fitted with a male connector.

The set of input leads and the set of output leads of the present invention may be electrically connected to an input female connector and an output female connector, respectively.

The set of input contacts and the set of output contacts of the present invention
25 are preferably made of an electrically conducting material with low corroding properties, for example, but not limited to, aluminium, copper, gold, etc.

The set of input contacts and the set of output contacts of the present invention are preferably of any type known in the art, for example, but not limited to, brush contacts, spring loaded contacts, omega contacts, u-shaped contacts, finger contacts,
30 etc.

The predetermined amounts of the present invention are preferably defined on the selector switch enclosure by a series of markings on the cover and more preferably are index labels indicating the network wiring standard selected.

5 The set of input contacts and the set of output contacts of the present invention preferably contain the same number of contacts and, in a preferred embodiment, each set is linearly arranged perpendicular to the slidable direction.

The wiring standard printed circuit of the present invention defines a series of circuit connectors arranged in a grid pattern with columns equal to the number predetermined space intervals and rows equal to the number of contact members in
10 either the set of input contacts or the set of output contacts.

The set of input contacts of the present inventions are preferably in electrical contact with only one column of the series of circuit connectors at each of the predetermined space intervals.

15 The set of output contacts of the present invention are preferably always in electrical contact with one column of the series of circuit connectors.

The number of contacts in each of the set of input contacts and the set of output contacts of the present invention is preferably equal to 8.

The selector switch enclosure and switching collar of the present invention are preferably made from a hard durable plastic. When the set of input leads or the set of
20 output leads of the present invention are electrically connected to a network cable, it is preferable that the network cable and selector switch enclosure is fitted with a durable and flexible rubber strain relief mechanism.

The male connector of the present invention is preferably a 8 Position 8 Contact (8P8C) plug. The female connector of the present invention is preferably an 8 Position
25 8 Contact (8P8C) socket.

The network cable of the present invention is preferably any 4 pair twisted network cable and more preferably is a Category 5 or higher grade network cable.

The different network wiring standards of the present invention preferably include, but are not limited to, Rolled, ATM loopback, T1, Cross-over, and Straight-
30 through.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will be further described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 depicts a wiring colour scheme of a typical four pair twisted network
5 cable;

Figure 2 is a 3-dimensional exploded view of the wiring standard selector switch of an embodiment of the present invention;

Figure 3 are perspective side views of an embodiment of the wiring standard selector switch of the present invention;

10 Figure 4 is cross-sectional view of the internal components of an embodiment of the wiring standard selector switch of the present invention;

Figure 5 is a perspective top view of an embodiment of the printed circuit board;

Figure 6 are side views of various embodiments of the present invention; and

15 Figure 7 is a set of tables showing the input/output relations of individual wires in a typical four pair twisted network cable of five common wiring standards.

DETAILED DESCRIPTION OF THE INVENTION

Standard network cables that are used in wired computer networks are compatible with only one type of wiring standard, such as, straight through or cross-
20 over, for example. Network technicians, or the like, who need network connectivity with various network devices may, on any given day, encounter a number of different wiring standards, and as a result, must be equipped with a different type of network cable for each of the wiring standards. The present invention overcomes this difficulty by providing a wiring standard selector switch capable of switching between a plurality of
25 wiring standards, thus enabling a Network technician, or the like, to be equipped with only a single network cable.

Figures 2 to 4 show different views of the wiring standard selector switch of an embodiment of the present invention. The wiring standard selector switch (1) may consist of an enclosure (2), a switching collar (3), a first printed circuit board (4), a
30 second printed circuit board (5), and a cam follower (6). The second printed circuit board (5) has thereon a set of input contacts (7) and set of output contacts (8) that

arranged to be in electrical contact with a wiring standard printed circuit (9) that is defined on the first printed circuit board (4). The wiring standard printed circuit (9) defines a plurality of network wiring standards which create an electrical signal path between each of the set of input contacts (7) and the set of output contacts (8). The
5 second printed circuit board (5) also has thereon a set of input leads (not shown) electrically connected to the set of input contacts (7) and being adapted to receive an input connector (10) and a set of output leads (not shown) electrically connected to the set of output contacts (8) and being adapted to receive an output connector (11). The input connector (10) and the output connector (11) shown in Figures 2 and 3 show an
10 embodiment where the connectors are 8P8C Female Sockets. The enclosure (2) surrounds and protects the internal components of the switch (1) and is adapted to ensure that the first printed circuit board (4) and the second printed circuit board (5) are kept parallel and in constant electrical contact with each other. The enclosure (2) is also adapted to allow the first printed circuit board (4) to be longitudinally slidable in
15 relation to the second printed circuit board (5) via cam studs (12) on the cam follower (6) that is adapted to be rigidly affixed to the first printed circuit board (4) along longitudinal guiding slots (not shown). However, any enclosure adapted to the purpose of the invention herein may be used as known to a person skilled in the art. The switching collar (3) is rotatably mounted on the outer surface of the enclosure (2) and
20 has guiding cam grooves (13) on its inner surface for facilitating the longitudinal motion of the first printed circuit board (4). The rotating mechanical action(movement) from a rotation of the switching collar (3) by a predetermined amount is converted into a longitudinal mechanical action(movement) via a combination of the guiding cam grooves (13), the longitudinal guiding slots, and cam studs (12) to cause the cam
25 follower (6), which is rigidly affixed to the first printed circuit board (4), to longitudinally slide at predetermined space intervals. The set of input contacts (7) and the set of output contacts (8) engage the wiring standard printed circuit so as to establish a different complete circuit at each of the predetermined space intervals between each of the set of input leads and the set of output leads. Each of the different complete
30 circuits correspond to one of the plurality of different network wiring standards. Once

a wiring standard is chosen the switch is locked into place, creating a secure electrical circuit without fear of losing connection.

Figure 5 is a perspective view of an embodiment of the wiring standard printed circuit (9). The printed circuit conductors (14) on the output side (right side of Figure 5) of the wiring standard printed circuit (9) are positioned and aligned in such a way that at any given time the set of output contacts (8) are always in electrical contact with each other. The printed circuit conductors (14) on the input side (left side of Figure 5) of the wiring standard printed circuit (9) are positioned and aligned such that at any given time only the desired column (wiring standard selection) of printed circuit conductors (13) are in electrical contact with the set of input contacts (7). This allows the wiring standard selector switch (1) to be manually set between network wiring standards without fear of having improper or loose electrical connections.

To provide customizability, the wiring standard selector switch (1) may be provided with different configurations of an input connector (10) paired with output connector (11), some of which are shown in Figure 6. The different combinations may be, a male plug input connector paired with a male plug output connector (15), a female socket input connector paired with a male plug output connector (16), a female socket input connector paired with a female socket output connector (17), a male plug input connector paired with a female socket output connector (18). The configurations containing the female socket connectors allow the Network Technician, or the like, to selectively use pre-made network cables to be used in conjunction with the wiring standard selector switch (1).

Figure 7 presents a set of tables that correspond to different wiring standards. For each wiring standard, the table defines the paired electrical connection between each of the set of input contacts (7) and the set of output contacts (8).

Cam systems are commonly known in the art, and are not specific to the present invention. Thus it will be known to one skilled in the art how to integrate such devices with the selector switch enclosure described herein.

Electrical contacts are commonly known in the art, and are not specific to the present invention. Thus it will be known to one skilled in the art how to integrate such devices with the wiring standard printed circuit (9) described herein.

Network cables are commonly known in the art, and are not specific to the present invention. Thus it will be known to one skilled in the art how to integrate such devices with the wiring standard selector switch described herein.

Printed circuits boards are commonly known in the art, and are not specific to
5 the invention. Thus, it will be known to one skilled in the art how to design and integrate such a device together with the wiring standard selector switch (1) described herein.

While the invention has been particularly shown and described with reference to exemplary embodiments thereof, the scope of the claims should not be limited by
10 the preferred embodiments set forth in the examples, but should be given the broadest interpretation consistent with the description as a whole.

THE EMBODIMENTS OF THE PRESENT INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A wiring standard selector switch comprising:

a first printed circuit board having thereon a wiring standard printed circuit defining a plurality of different network wiring standards;

a second printed circuit board having thereon a set of input contacts and a set of output contacts arranged to be in electrical contact with the first printed circuit board and a set of input leads electrically connected to the set of input contacts and being adapted to receive an input connector and a set of output leads electrically connected to the set of output contacts and being adapted to receive an output connector;

a selector switch enclosure being adapted to ensure that the first printed circuit board and the second printed circuit board are parallel and in electrical contact with each other and allowing the first printed circuit board to be longitudinally slideable in relation to the second printed circuit board via at least one longitudinal guiding slot; and

a switching collar rotatably mounted on the outer surface of the selector switch enclosure having at least one helical guiding cam groove on its inner surface for guiding at least one stud of a cam follower that is adapted to be rigidly affixed to the first printed circuit board;

whereby a rotating mechanical action from a rotation of the switching collar at predetermined amounts is converted into a longitudinal mechanical action via a combination of the at least one helical guiding cam groove, the at least one longitudinal guiding slot and the at least one stud causes the cam follower which is rigidly affixed to the first printed circuit board to longitudinally slide at predetermined space intervals, the set of input contacts and the set of output contacts engage the wiring standard printed circuit so as to establish a different complete circuit at each of the predetermined space intervals between each of the set of input leads and the set of output leads, wherein each of the different complete circuits correspond to one of the plurality of different network wiring standards.

2. The wiring standard selector switch according to claim 1, wherein the set of input contacts and the set of output contacts each contain the same number of contacts and each set is linearly arranged perpendicular to a slidable direction;

wherein the wiring standard printed circuit board defines a series of circuit connectors arranged in a grid pattern with columns equal to the number predetermined space intervals and rows equal to the number of contact members in either the set of input contacts or the set of output contacts;

wherein the set of input contacts are in electrical contact with only one column of the circuit connectors at each of the predetermined space intervals; and

wherein the set of output contacts are in constant electrical contact with one column of the circuit connectors.

3. The wiring standard selector switch according to claim 1 or 2, wherein the number of contacts in each of the set of input contacts and the set of output contacts is equal to 8.

4. The wiring standard selector switch according to any one of claims 1 to 3, wherein the set of input leads and the set of output leads are electrically connected to an input network cable fitted with a male connector and an output network cable fitted with another male connector, respectively.

5. The wiring standard selector switch according to any one of claims 1 to 3, wherein the set of input leads and the set of output leads are electrically connected to an input female connector and an output network cable fitted with a male connector, respectively.

6. The wiring standard selector switch according to any one of claims 1 to 3, wherein the set of input leads and the set of output leads are electrically connected to an input network cable fitted with a male connector and an output female connector, respectively.

7. The wiring standard selector switch according to claim 4, wherein each male connector is an 8 position 8 contact plug.

8. The wiring standard selector switch according to claim 5 or 6, wherein the male connector is an 8 position 8 contact plug and the female connector is an 8 position 8 contact socket.

9. The wiring standard selector switch according to any one of claims 1 to 3, wherein the set of input leads and the set of output leads are electrically connected to an input female connector and an output female connector, respectively.

10. The wiring standard selector switch according to claim 9, wherein each female connector is an 8 position 8 contact socket.

11. The wiring standard selector switch according to any one of claims 4 to 8, wherein the network cables are Category 5 or higher grade network cables.

12. The wiring standard selector switch according to any one of claims 1 to 11, wherein the set of input contacts and the set of output contacts are selected from the group consisting of electrical finger contacts, electrical u-shaped contacts, electrical omega contacts, spring loaded electrical contacts, and electrical brush contacts.

13. The wiring standard selector switch according to any one of claims 1 to 12, wherein the predetermined amounts are defined by a series of markings on the selector switch enclosure.

14. The wiring standard selector switch according to claim 13, wherein the series of markings are index labels indicating the network wiring standard selected.

15. The wiring standard selector switch according to any one of claims 1 to 14, wherein the selector switch enclosure and switching collar are made from a hard durable plastic.

16. The wiring standard selector switch according to any one of claims 1 to 15, wherein the plurality of different network wiring standards include: Rolled, ATM loopback, T1, Cross-over, or Straight-through.

Figure 1

T-568A			
Wire Number	Wire Colour	Pair	Description
1	white/green	3	TxData +
2	green	3	TxData -
3	white/orange	2	RxData +
4	blue	1	unused
5	white/blue	1	unused
6	orange	2	RxData -
7	white/brown	4	unused
8	brown	4	unused

T-568B			
Wire Number	Wire Colour	Pair	Description
1	white/orange	2	TxData +
2	orange	2	TxData -
3	white/green	3	RxData +
4	blue	1	unused
5	white/blue	1	unused
6	green	3	RxData -
7	white/brown	4	unused
8	brown	4	unused

Figure 2

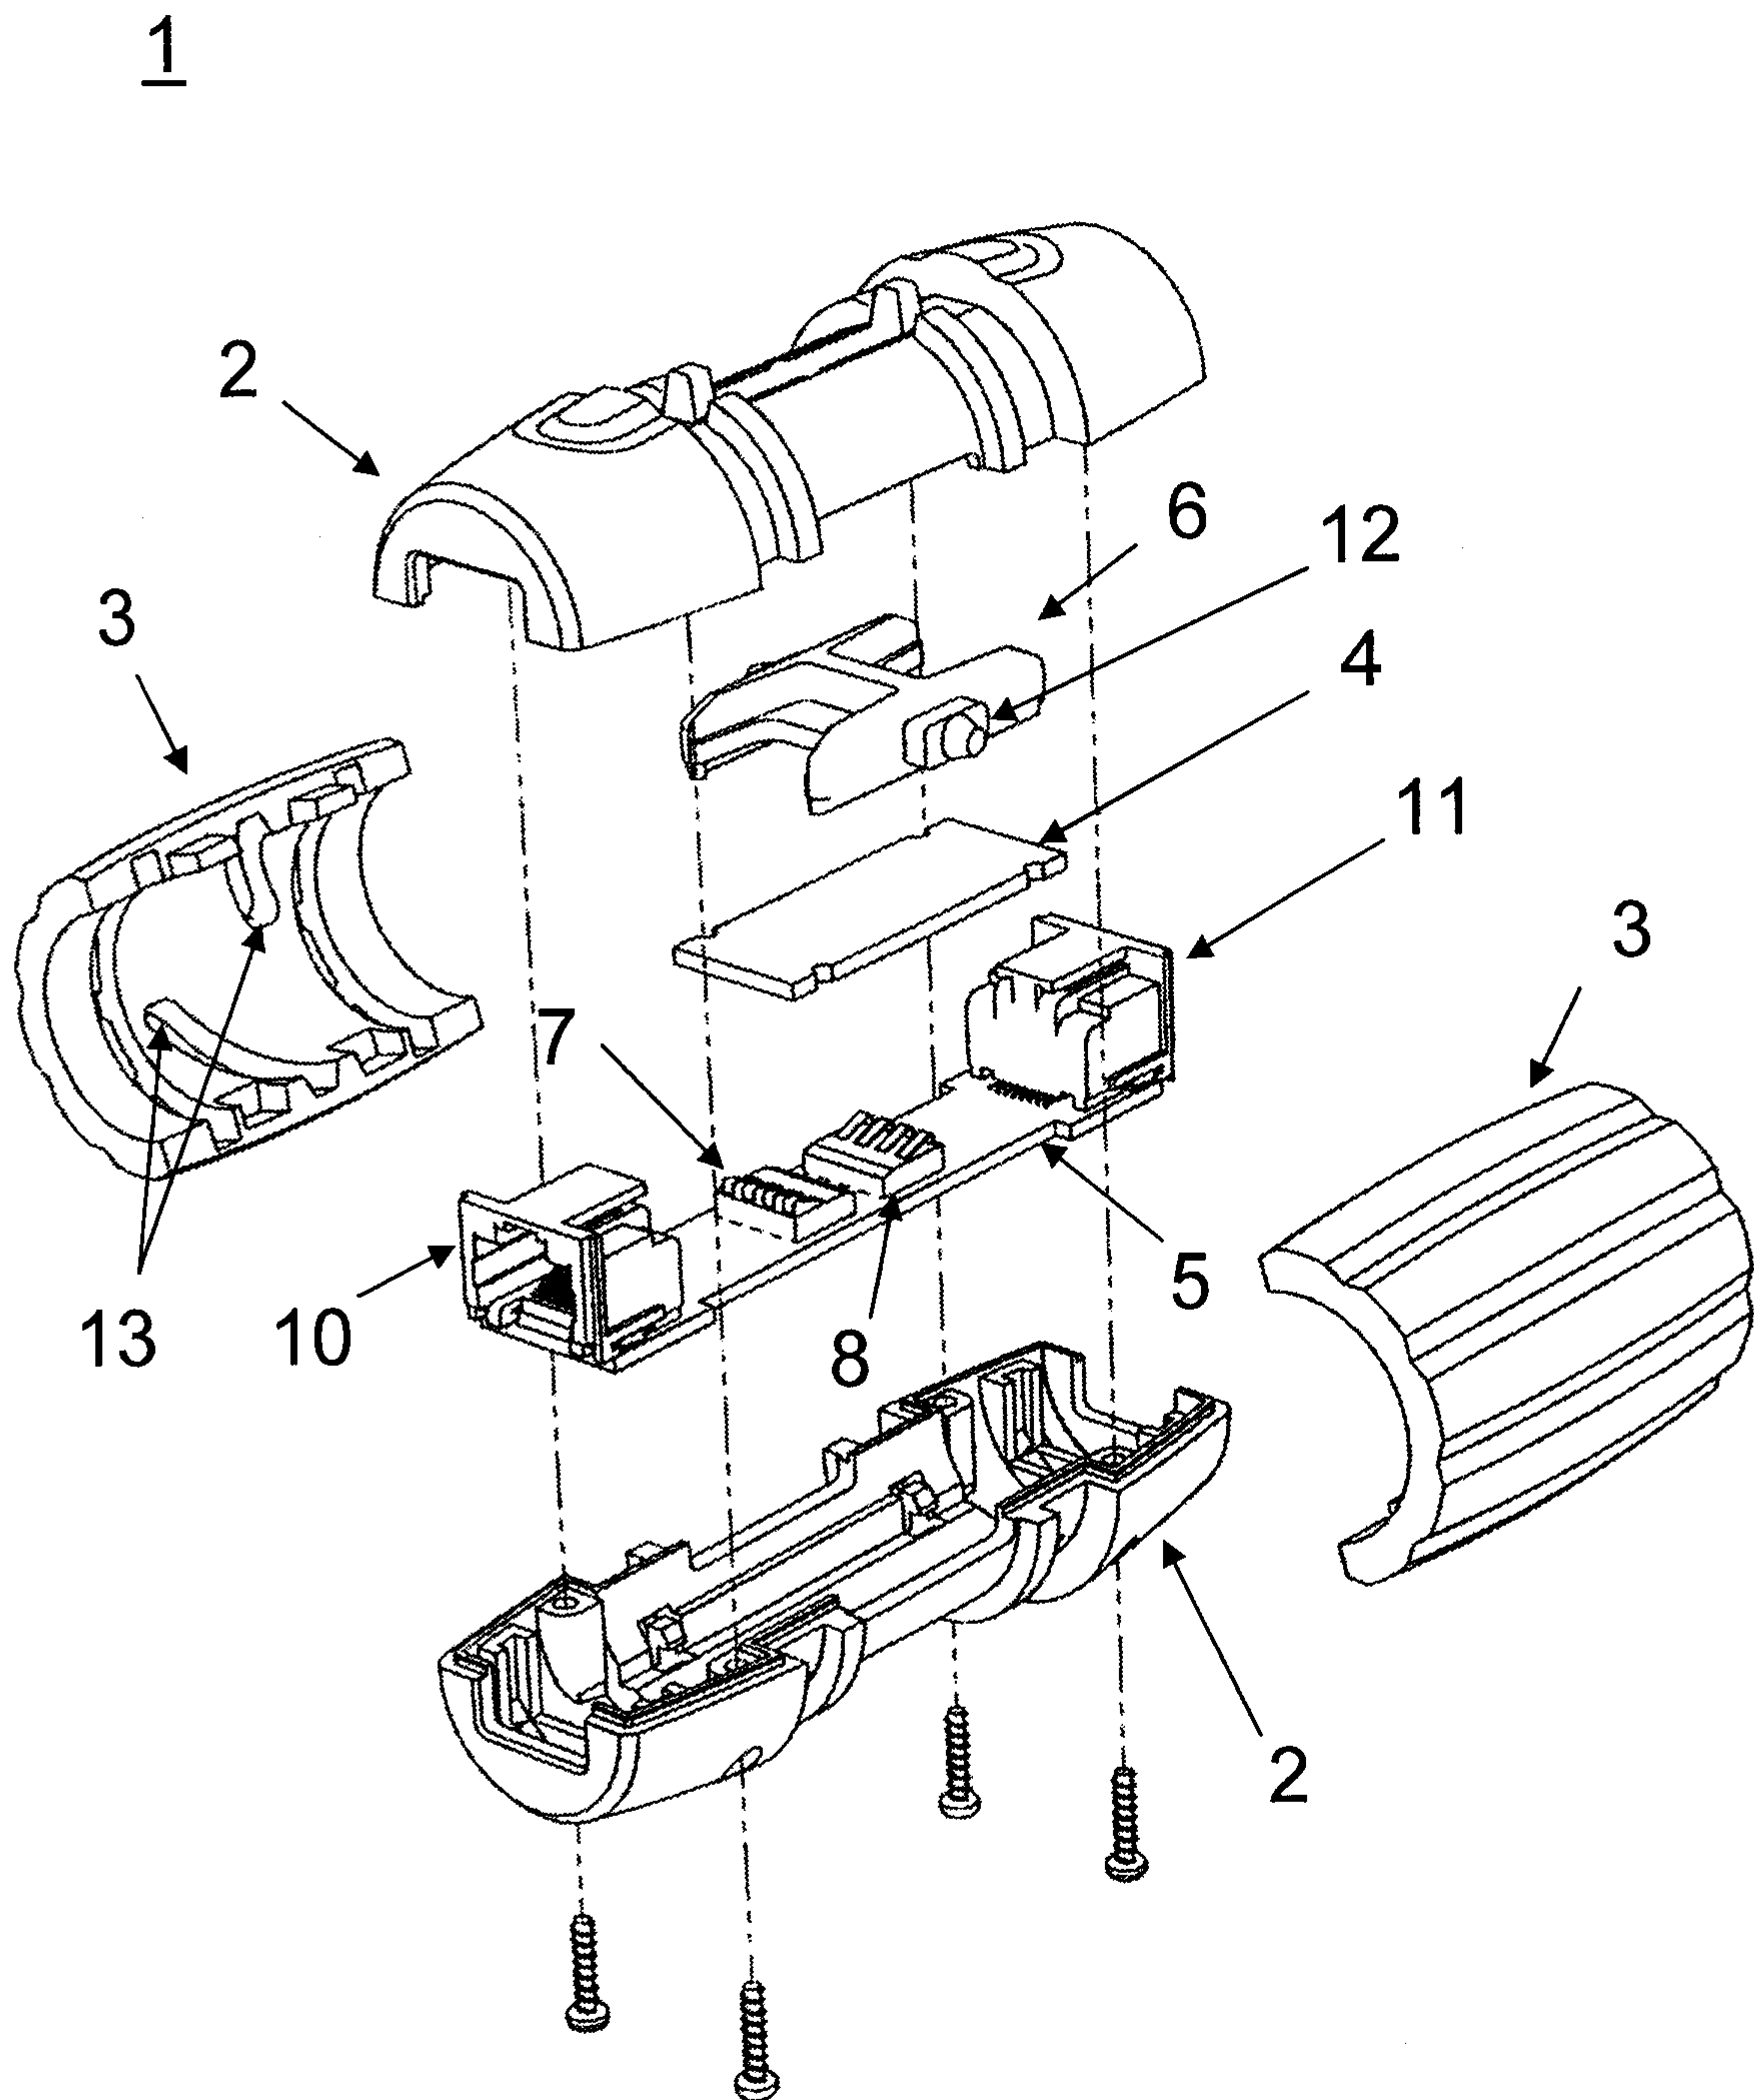


Figure 3

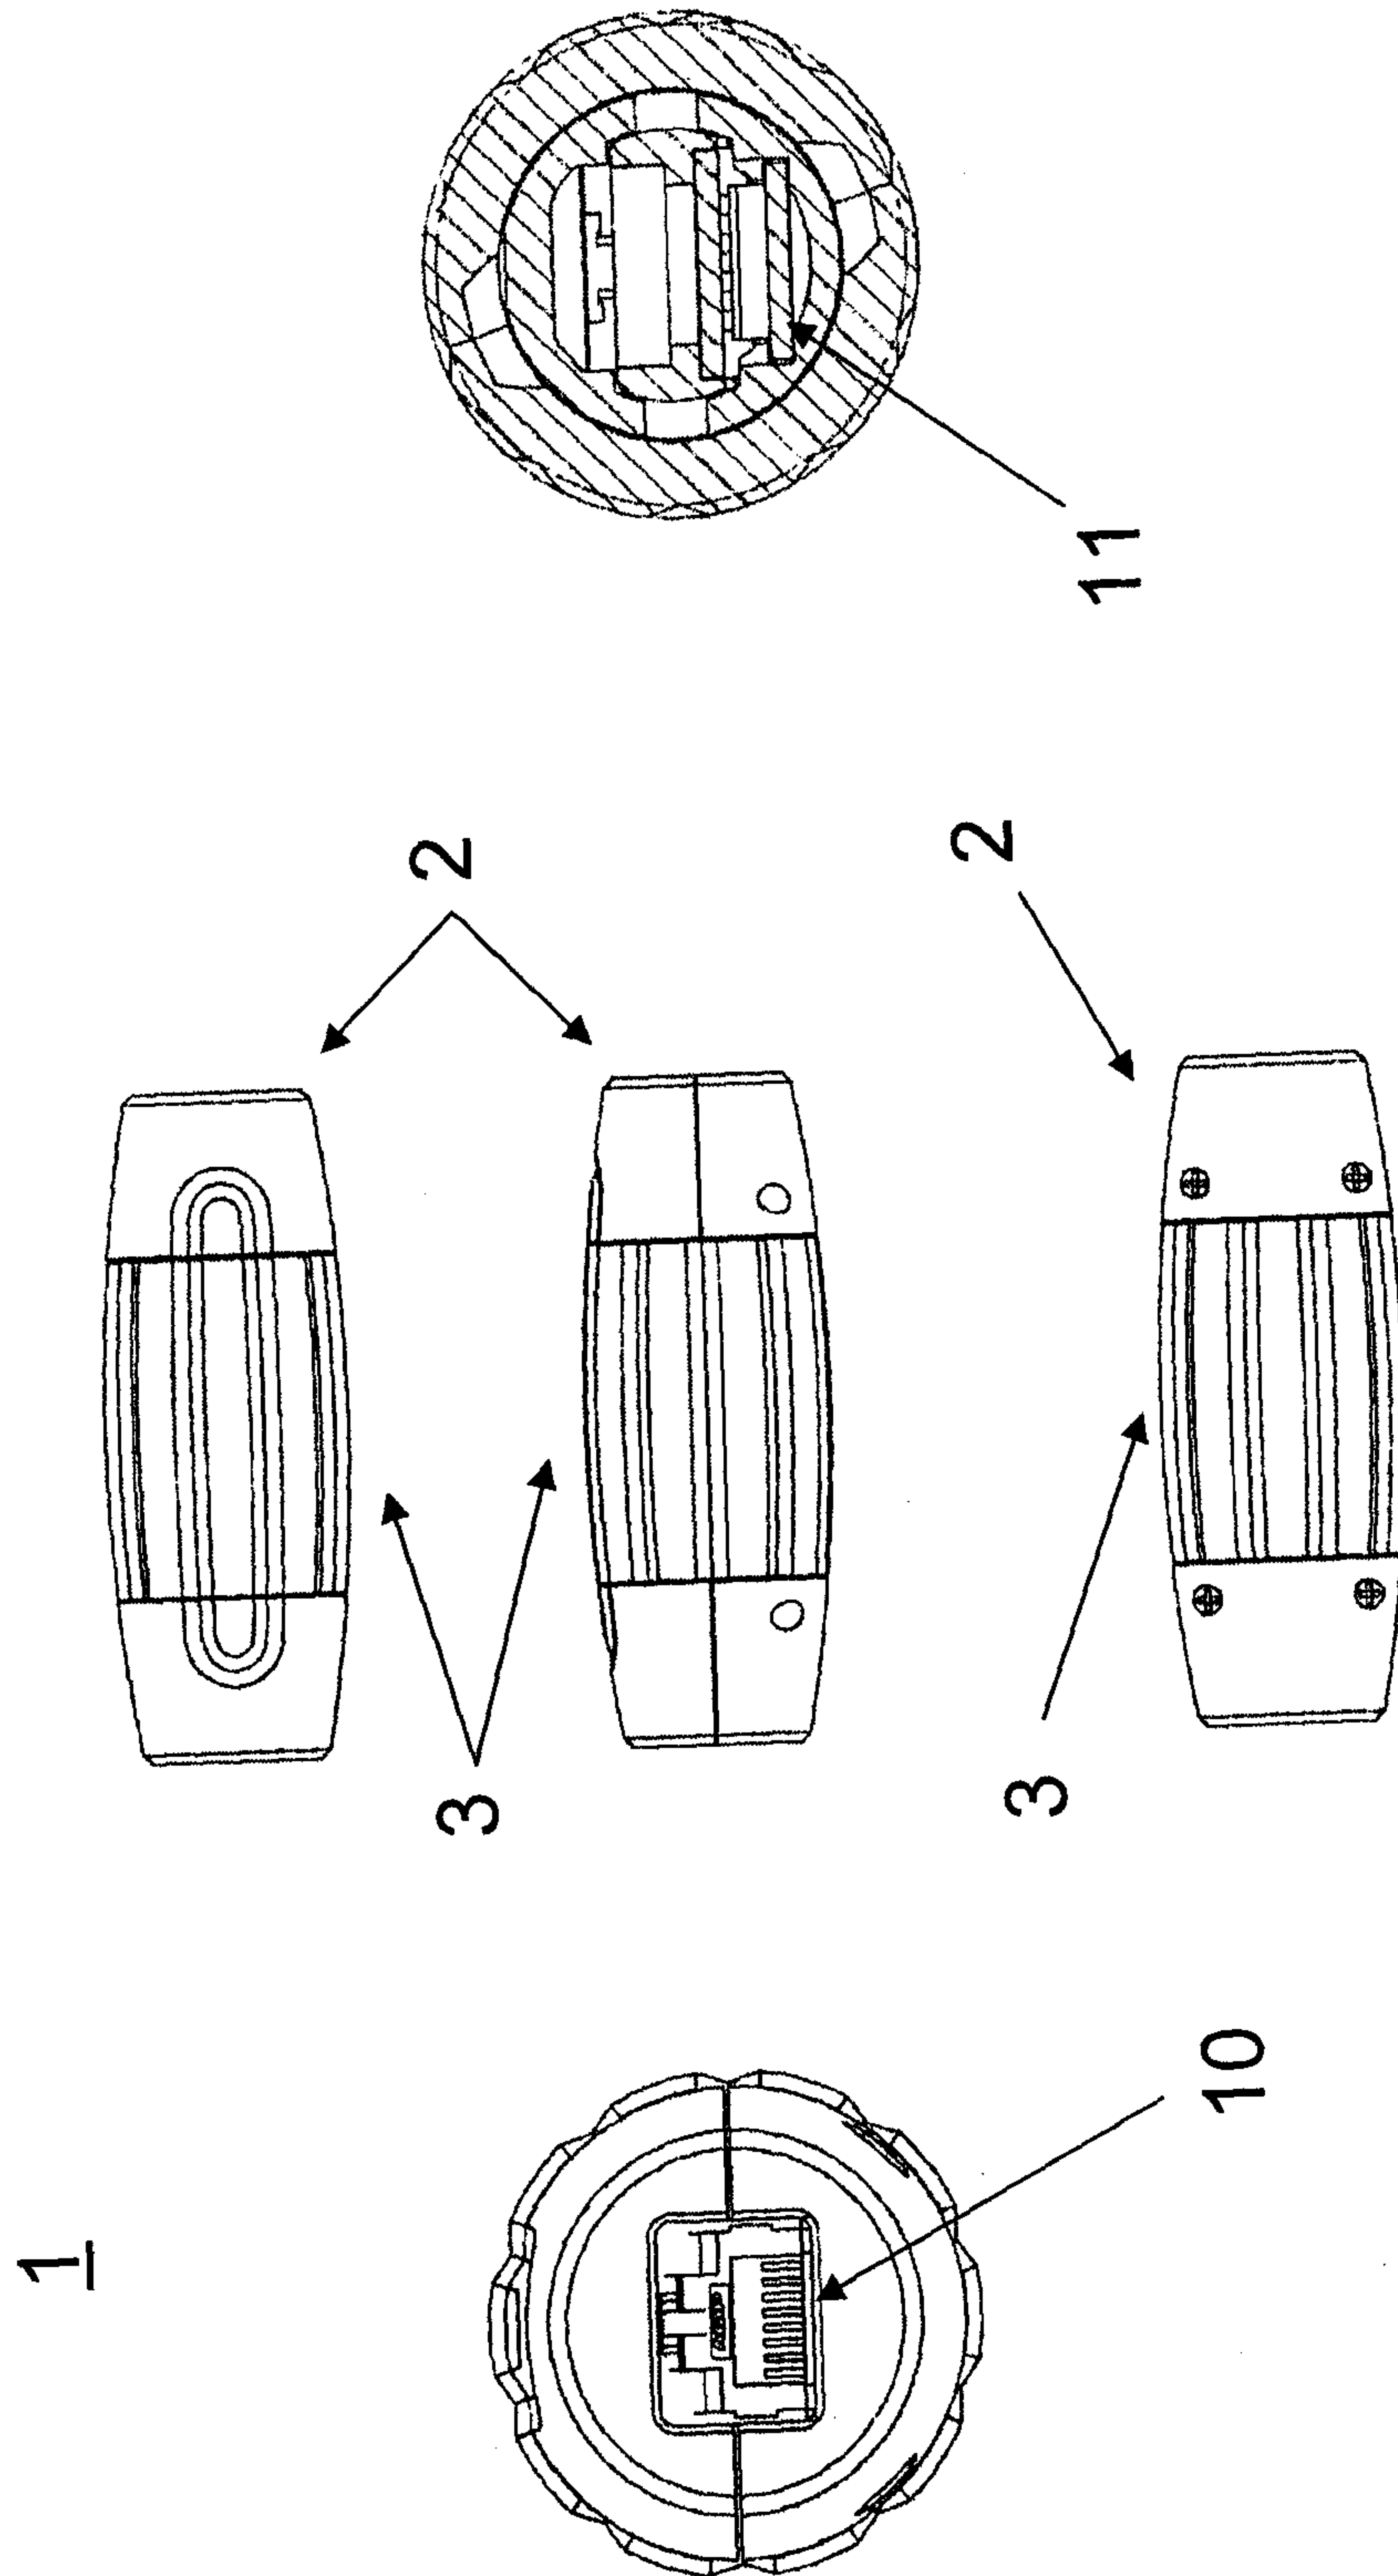


Figure 4

1

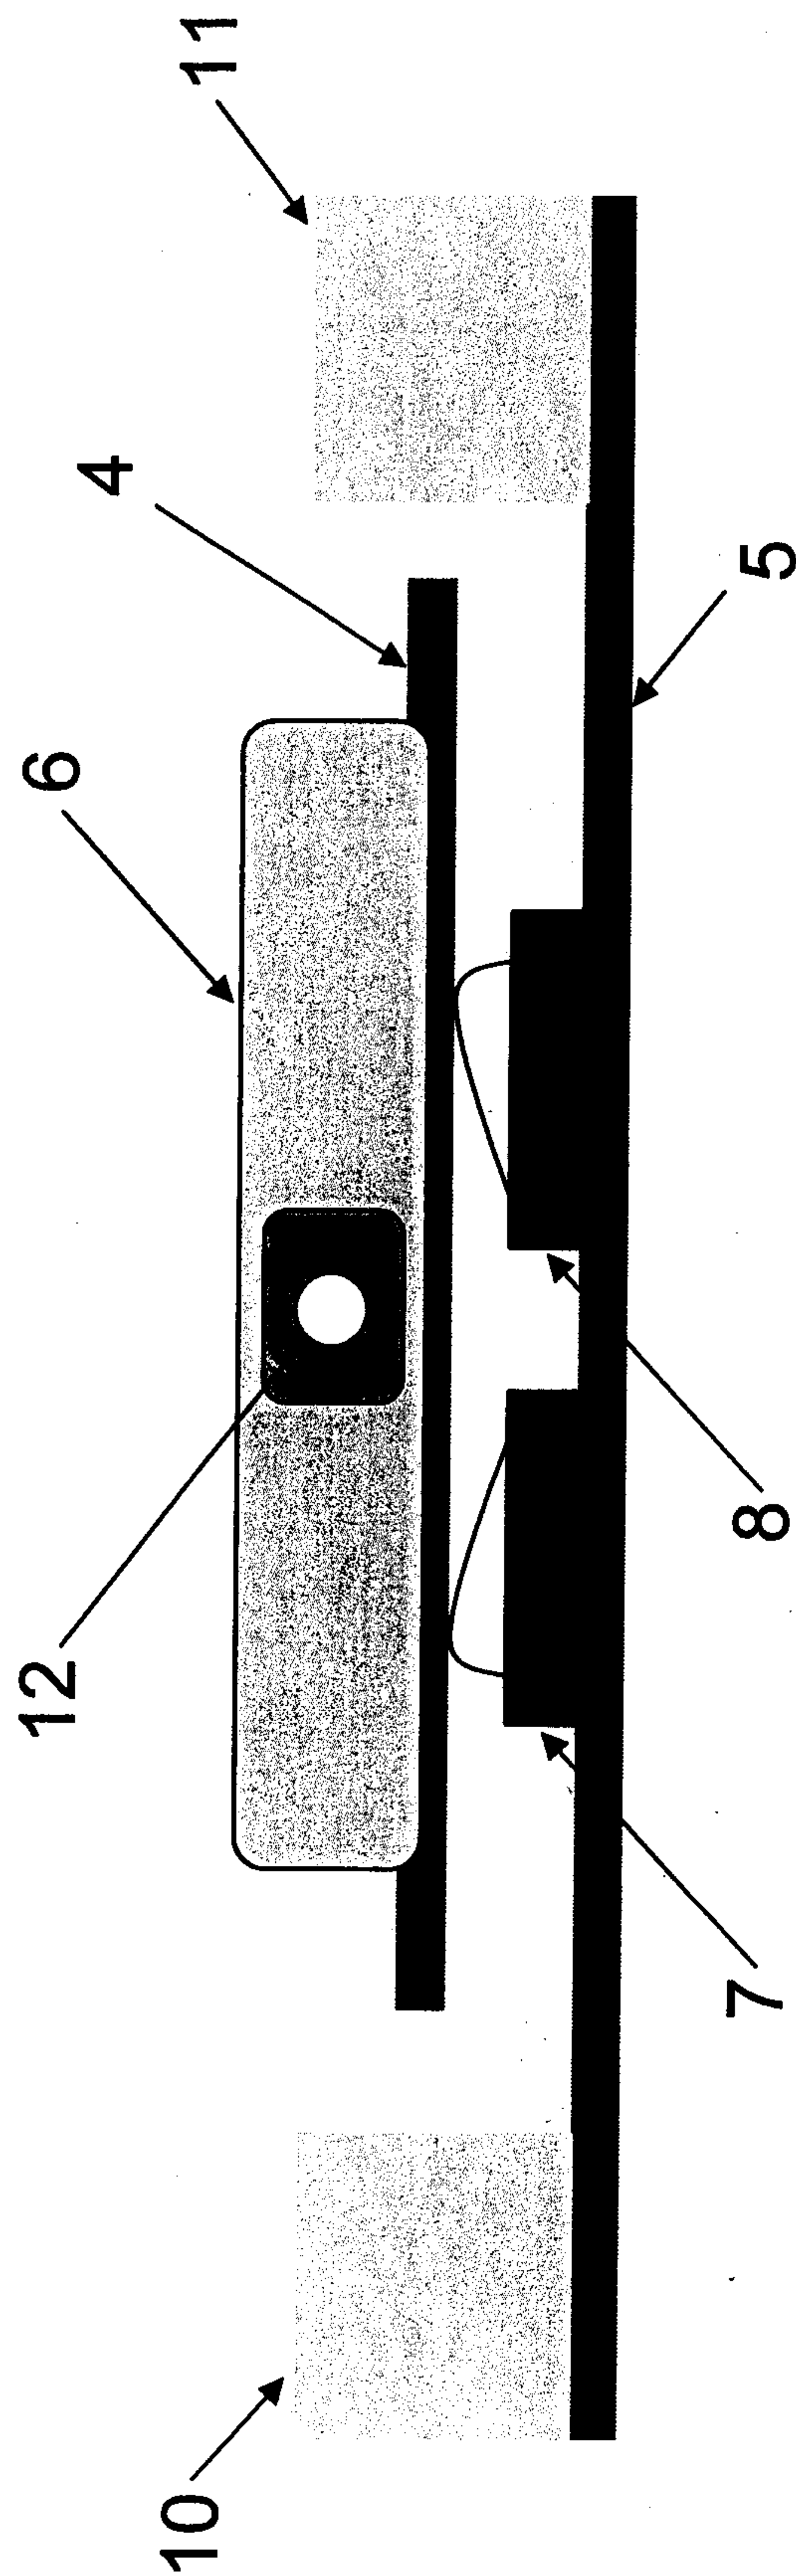


Figure 5

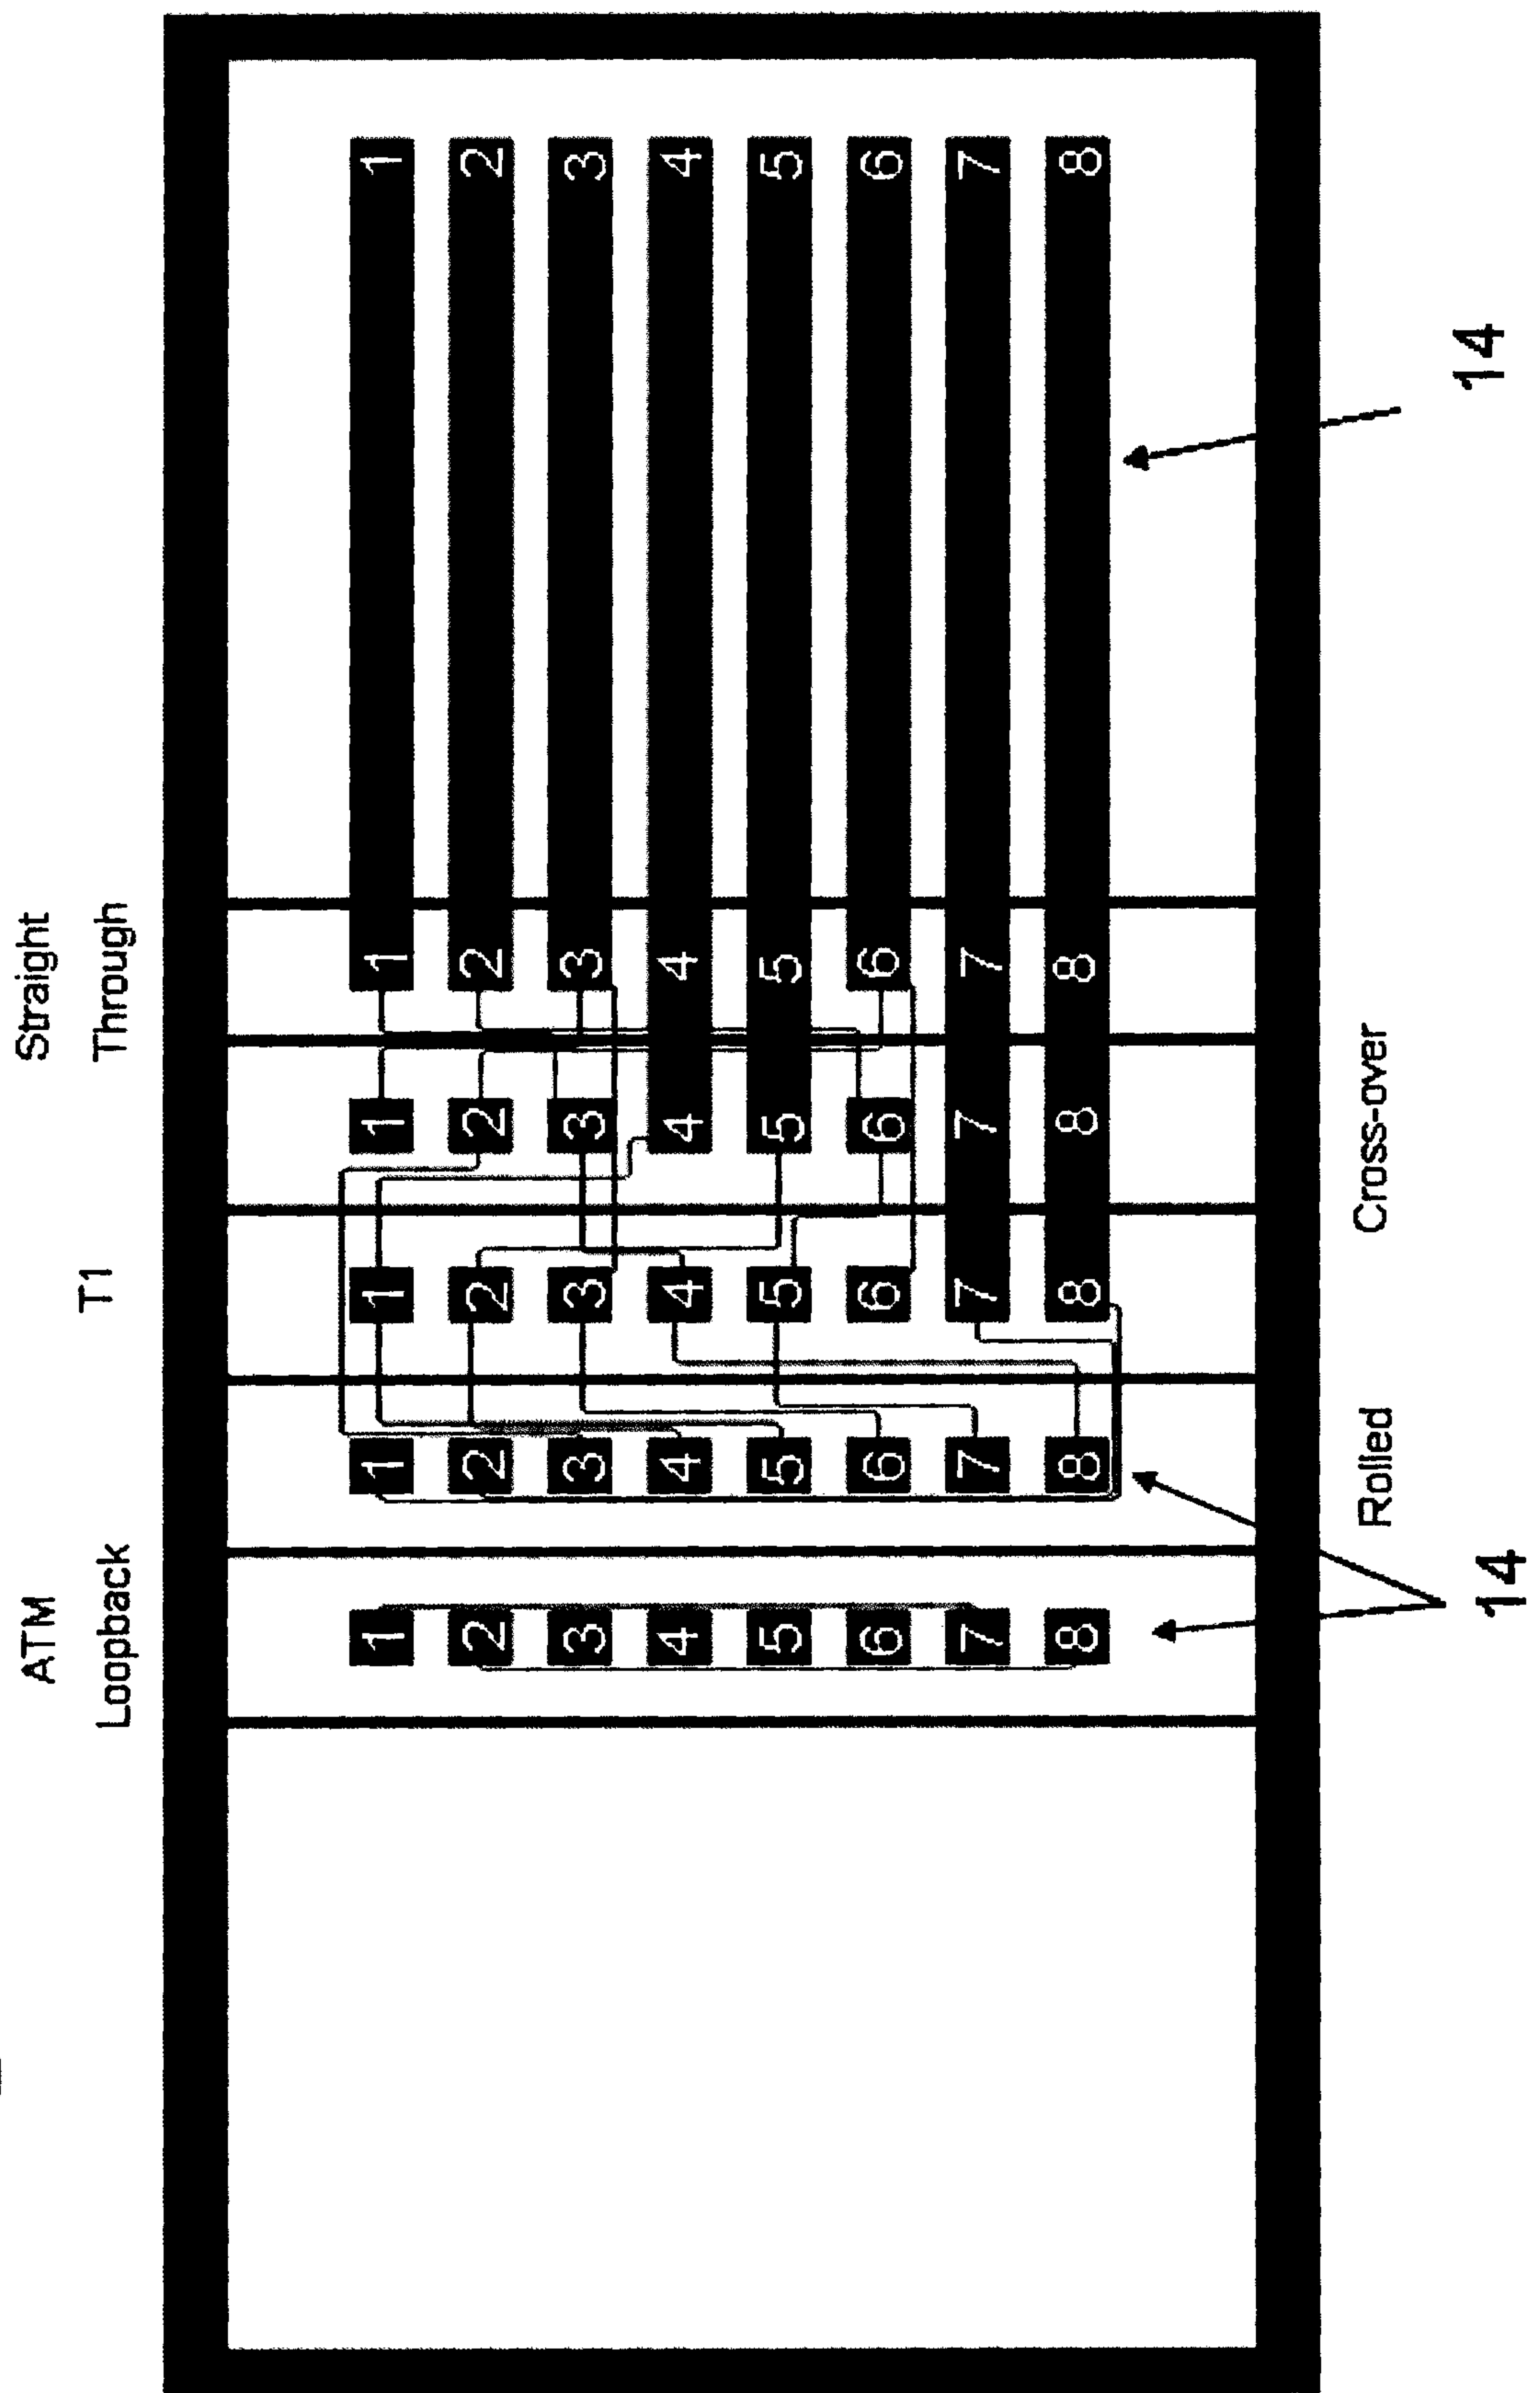


Figure 6


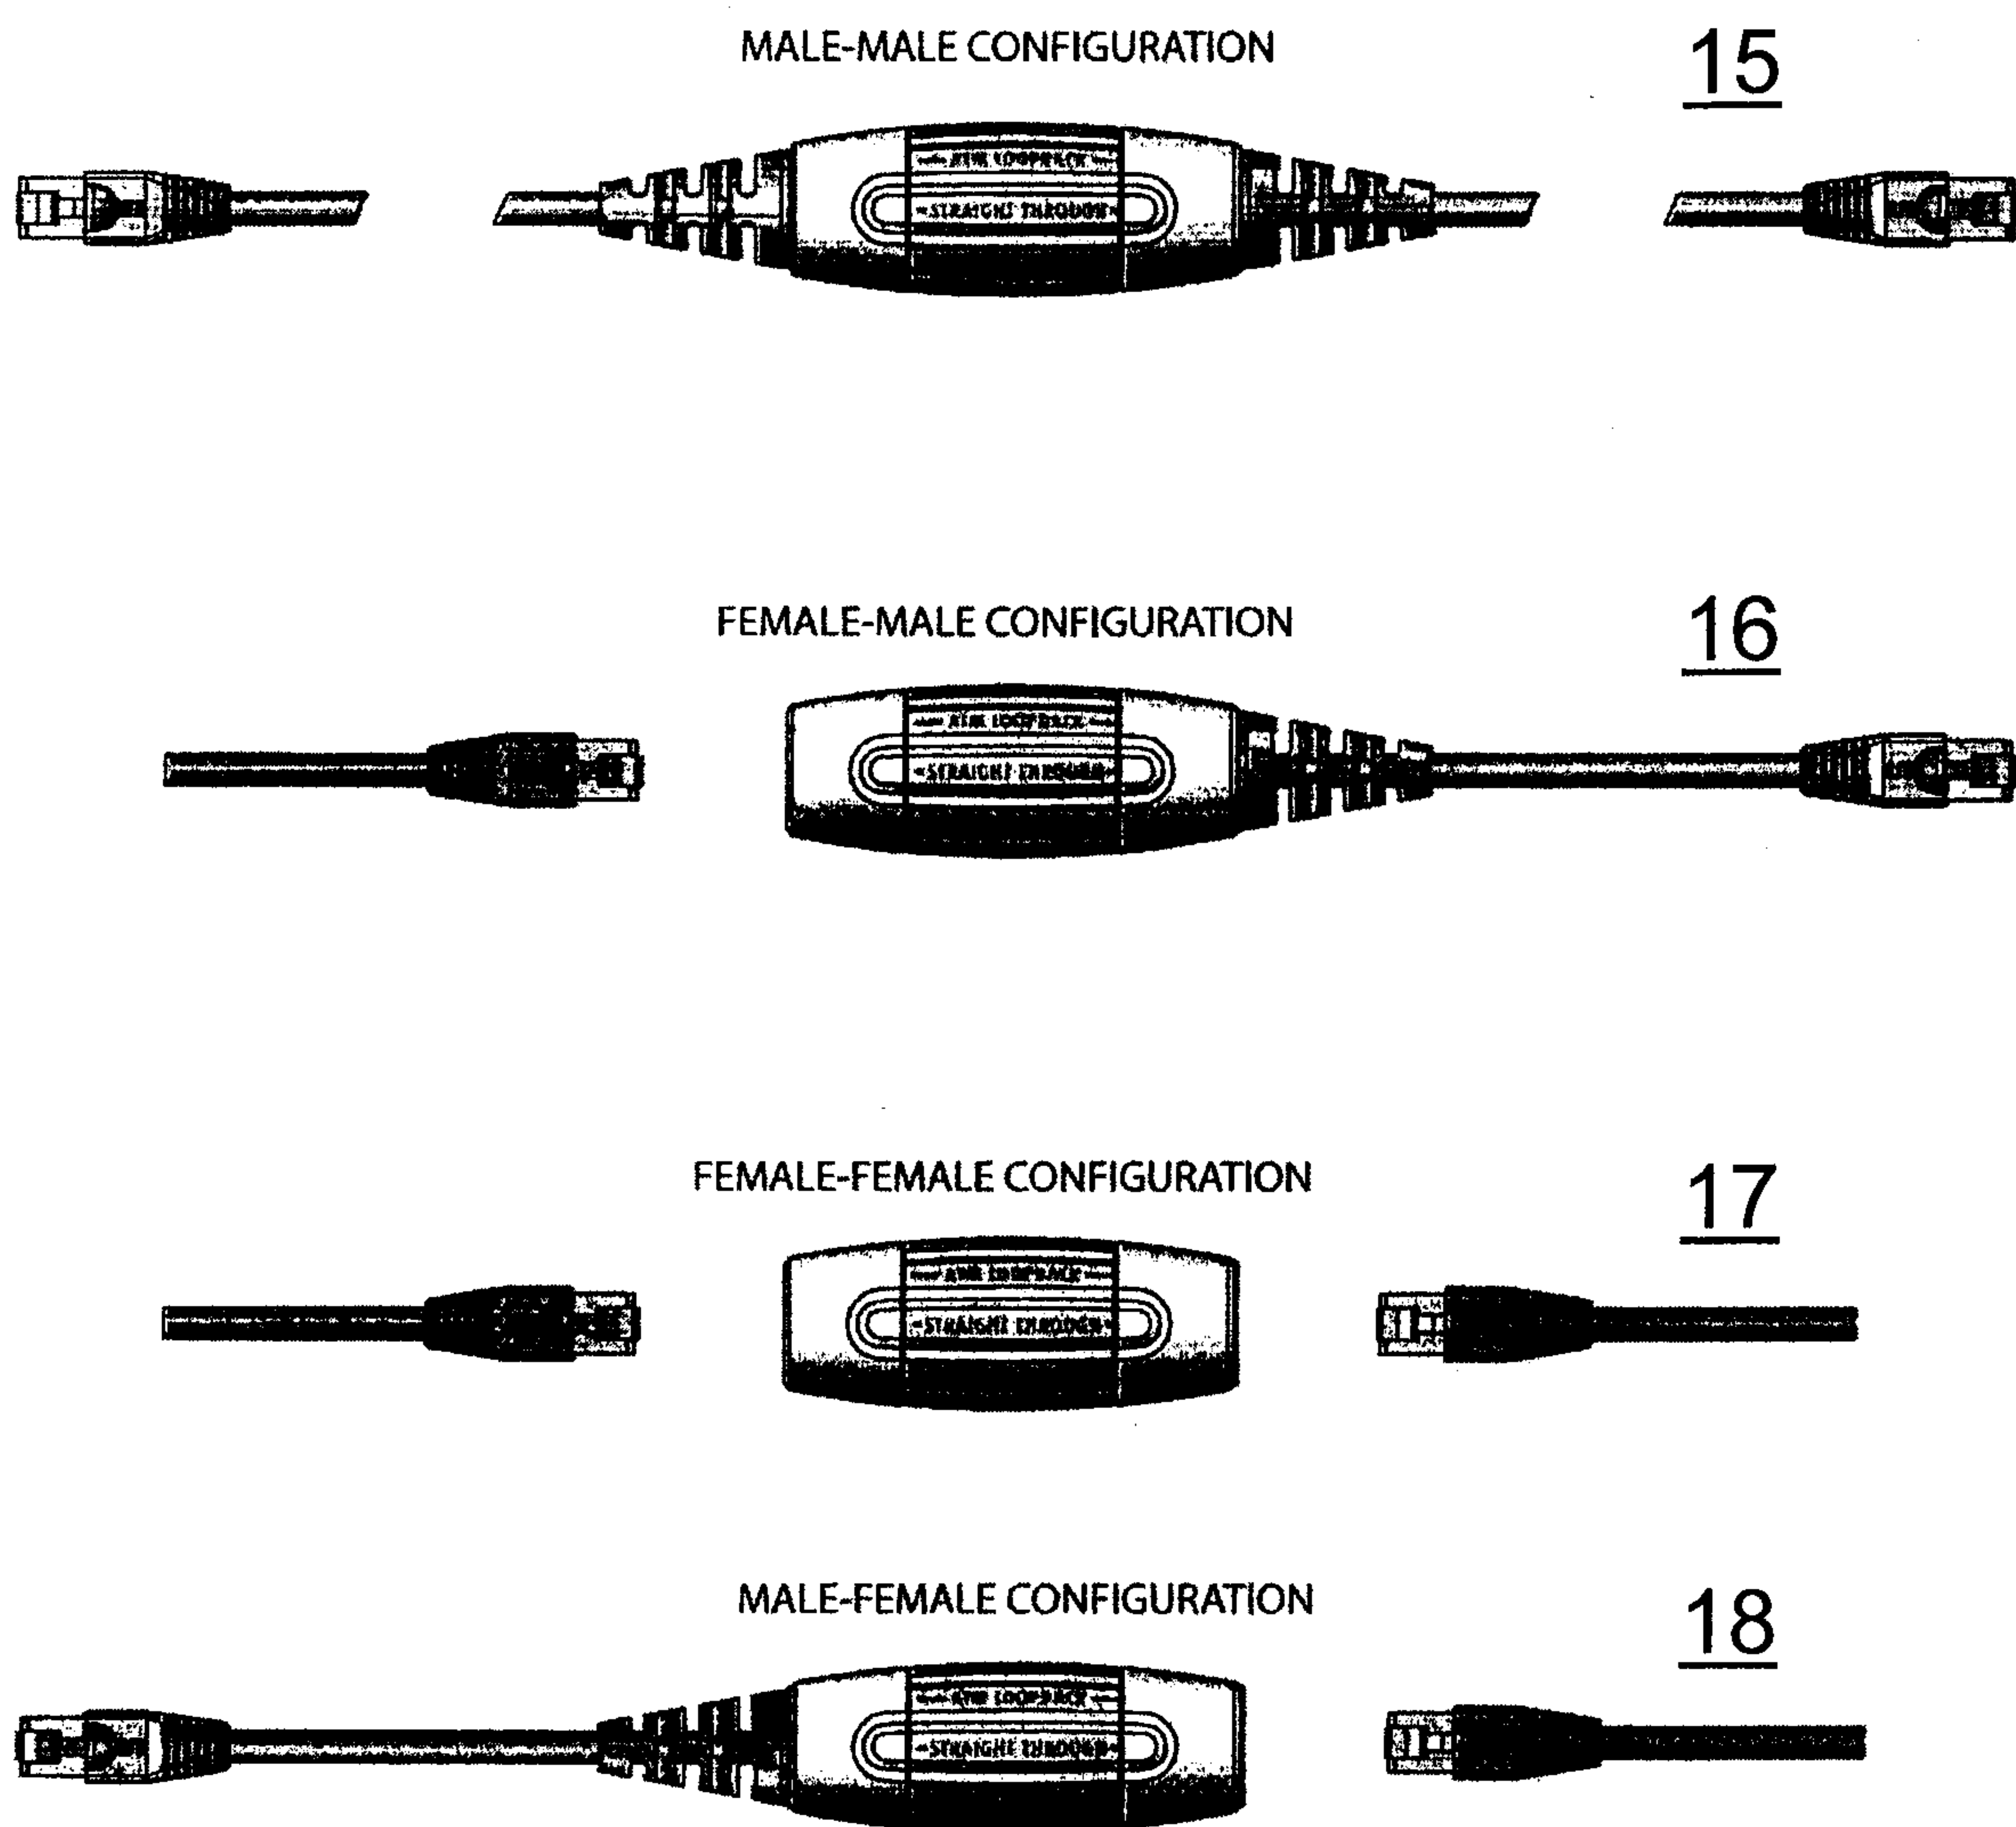


Figure 7



MALE-MALE CONFIGURATION

15

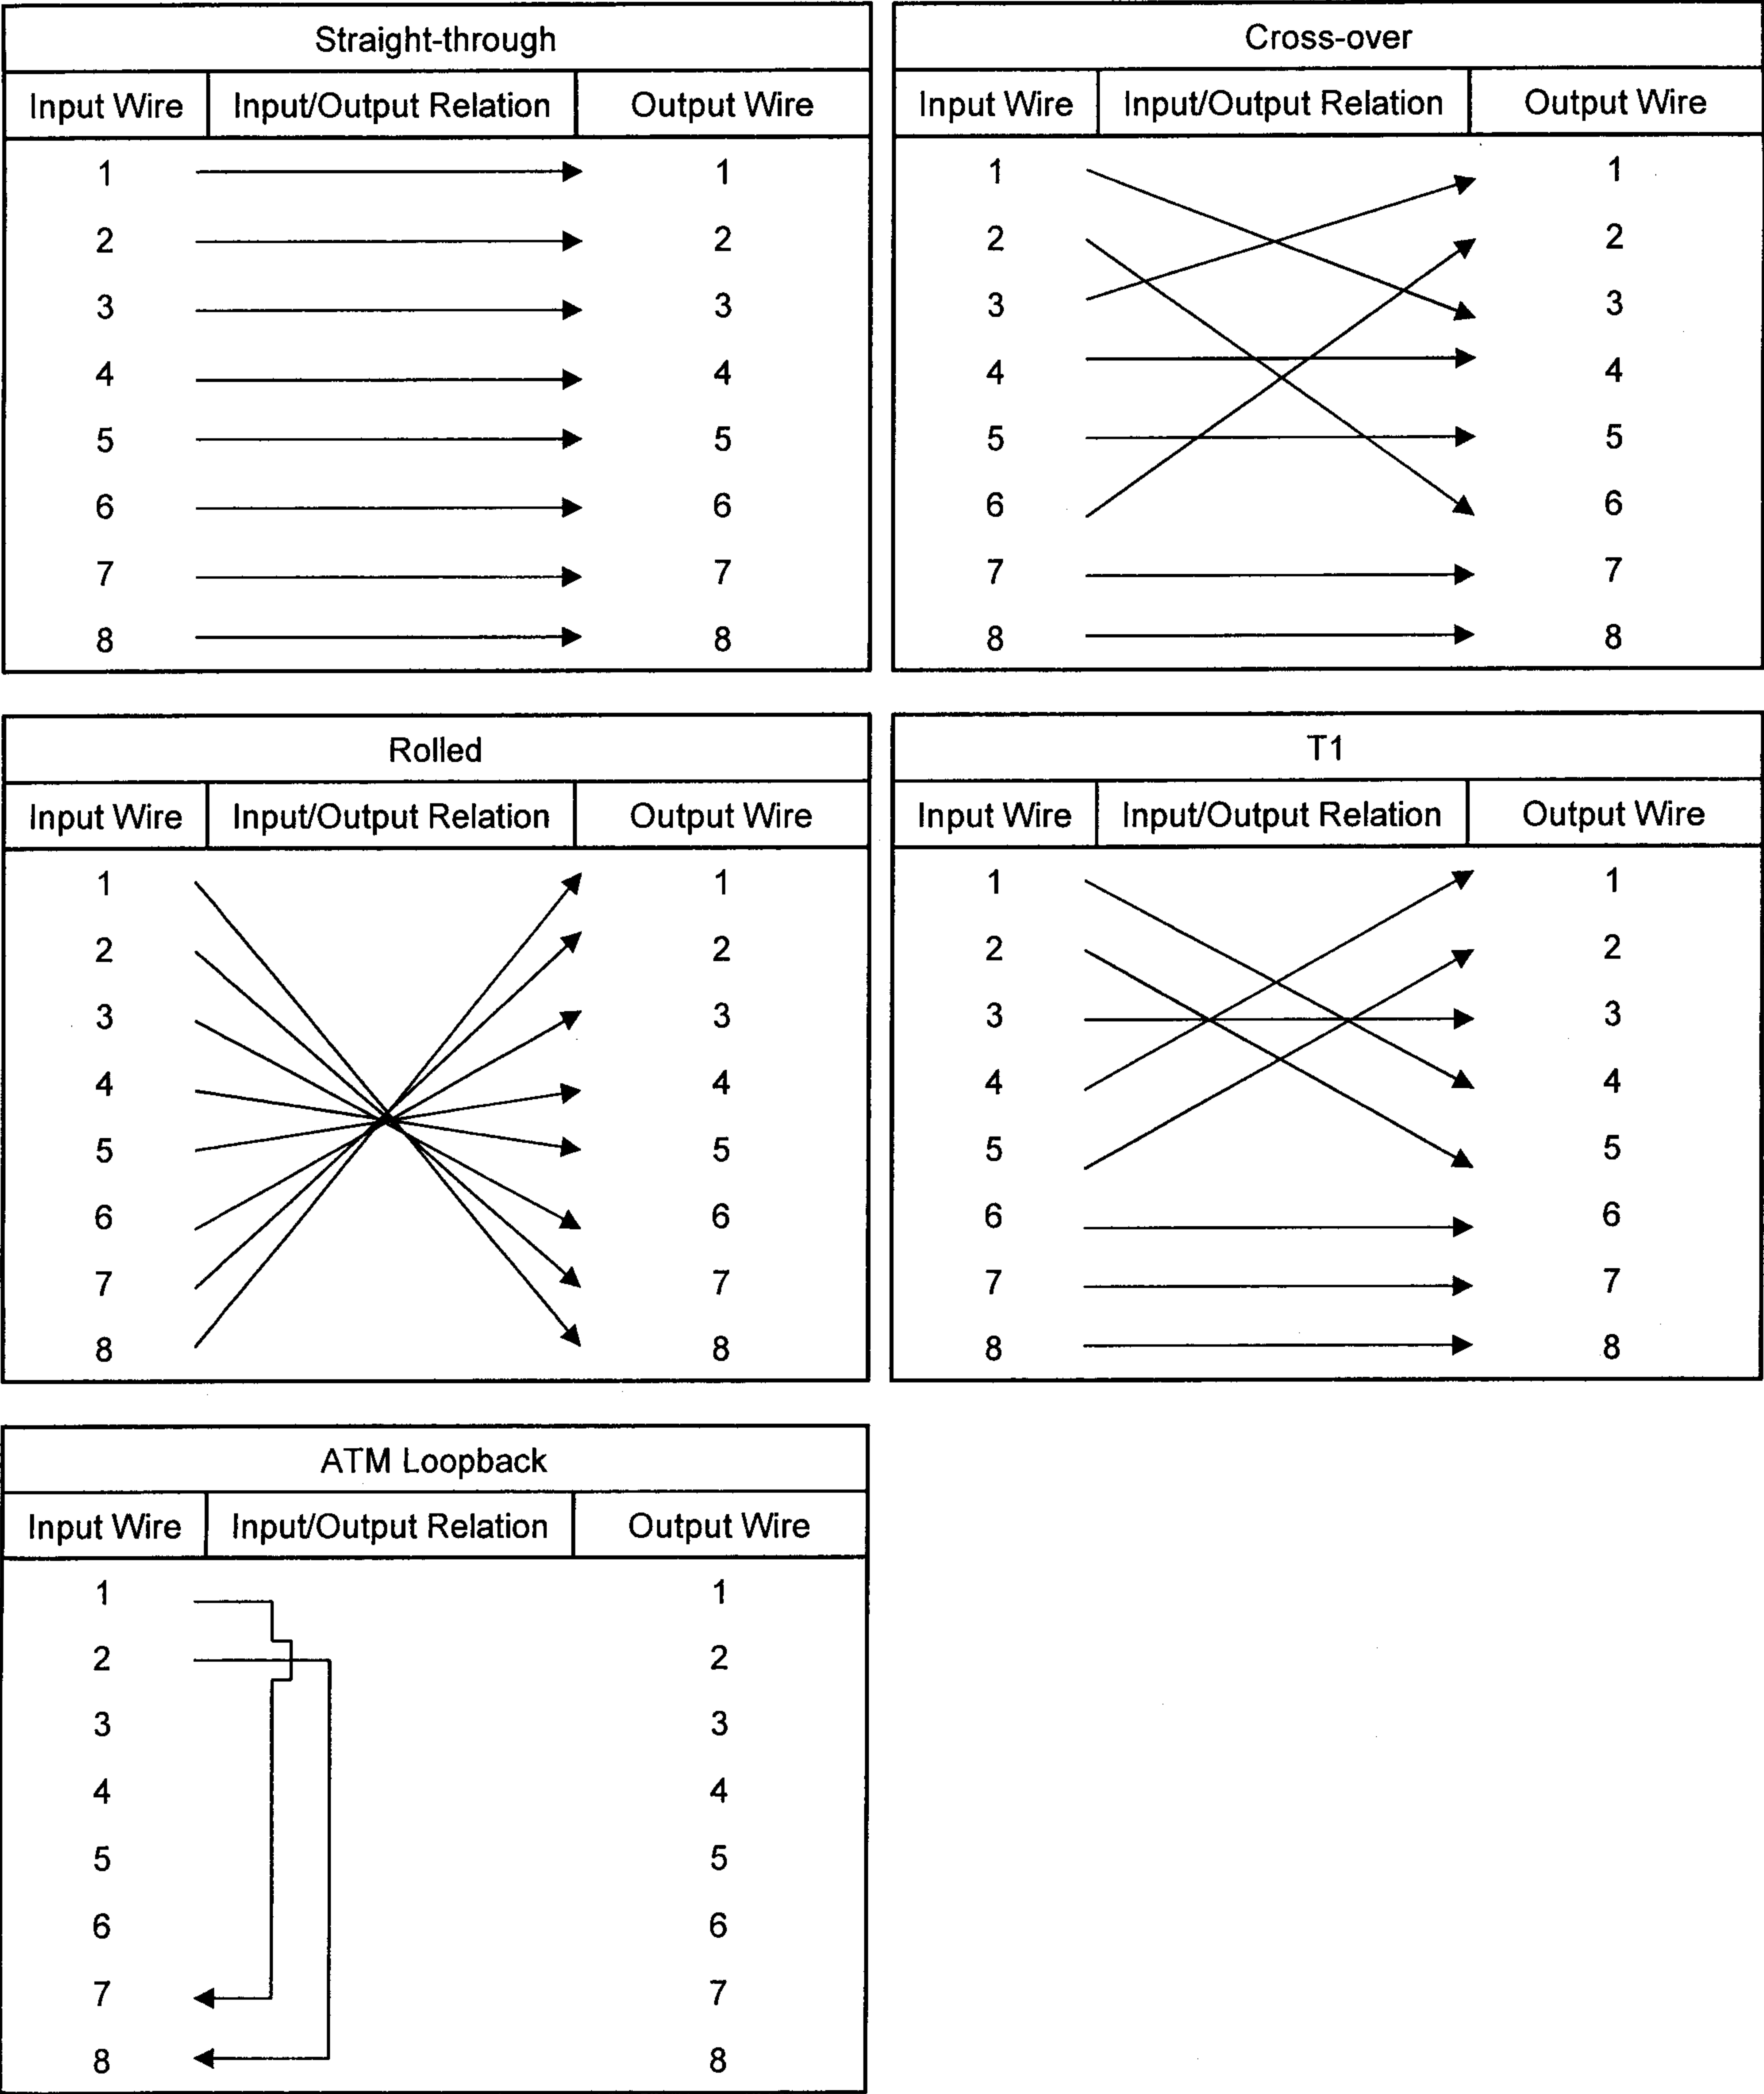

FEMALE-MALE CONFIGURATION

16



FEMALE-FEMALE CONFIGURATION

17



MALE-FEMALE CONFIGURATION

18

