



(51) International Patent Classification:
H04M 1/02 (2006.01) *G06F 1/16* (2006.01)

(21) International Application Number:
PCT/CN2017/098974

(22) International Filing Date:
25 August 2017 (25.08.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2017100137455 09 January 2017 (09.01.2017) CN
2017200229664 09 January 2017 (09.01.2017) CN

(71) Applicant: **GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP., LTD.** [CN/CN];
No. 18, Haibin Road, Wusha, Chang'an, Dongguan, Guang-
dong 523860 (CN).

(72) Inventor: **CHENG, Jiao**; NO. 18, Haibin Road, Wusha,
Chang'an, Dongguan, Guangdong 523860 (CN).

(74) Agent: **TSINGYIHUA INTELLECTUAL PROPERTY
LLC**; Room 301 Trade Building, Zhaolanyuan, Tsinghua
University, Qinghuayuan, Haidian District, Beijing 100084
(CN).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: DISPLAY SCREEN ASSEMBLY, ASSEMBLING METHOD THEREOF AND ELECTRONIC DEVICE

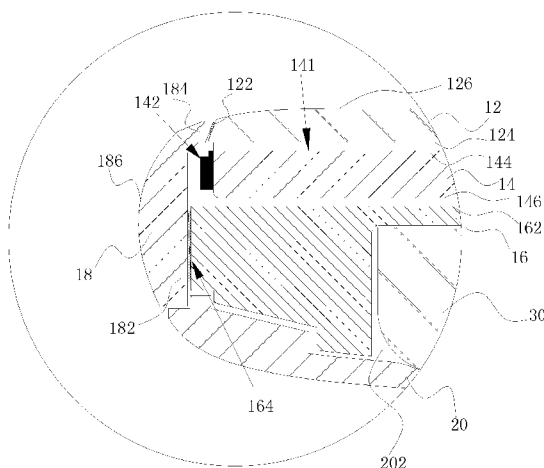


Fig. 4

(57) Abstract: The present disclosure relates to a display screen assembly, an electronic device and an assembling method of the display screen assembly. The display screen assembly includes a cover plate, a display screen, a bracket and a decoration enclosure. A top surface of the display screen is joined with a lower surface of the cover plate, a width of the display screen is larger than that of the cover plate, and a side edge of the cover plate is indented inwards relative to the display screen. The bracket includes a top portion joined with a bottom surface of the display screen and a side wall. The decoration enclosure includes a first joining part joined with the side wall and a second joining part. The second joining part is joined with the side edge of the cover plate and configured to cover a non-display area of the display screen.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

DESCRIPTION

DISPLAY SCREEN ASSEMBLY, ASSEMBLING METHOD THEREOF AND ELECTRONIC DEVICE

5

FIELD

The present disclosure relates to a technical field of electronic devices, particularly to a display screen assembly, an electronic device and an assembling method of the display screen assembly.

10

BACKGROUND

With developments of technologies, smartphones are used more and more widely and have more and more functions, and smartphones have become requisite electronic apparatuses in people's daily lives. The existing smartphones have a low screen-to-body ratio, so that the user experience of a user is not good.

15

SUMMARY

Embodiments of the present disclosure provide a display screen assembly, an electronic device and an assembling method of the display screen assembly.

20

According to a first aspect of embodiments of the present disclosure, there is provided a display screen assembly. The display screen assembly includes a cover plate, a display screen, a bracket and a decoration enclosure. A top surface of the display screen is joined with a lower surface of the cover plate, a width of the display screen is larger than a width of the cover plate, and a side edge of the cover plate is indented inwards relative to the display screen. The bracket includes a top portion and a side wall, and a bottom surface of the display screen is joined with the top portion of the bracket. The decoration enclosure includes a first joining part and a second joining part bending from the first joining part. The first joining part is joined with the side wall of the bracket, and the second joining part is joined with the side edge of the cover plate and configured to cover a non-display area of the display screen.

25

30

In some embodiments, the side edge of the cover plate is configured as a first inclined surface, and a surface of the second joining part joined to the side edge of the cover plate is configured as a

second inclined surface configured to be fitted with the first inclined surface.

In some embodiments, the first joining part is joined with the side wall of the bracket in an adhering manner.

5 In some embodiments, the top surface of the display screen is joined with the lower surface of the cover plate in a full lamination manner.

In some embodiments, the top surface of the display screen is laminated with the lower surface of the cover plate through an optically clear adhesive.

In some embodiments, the bottom surface of the display screen is joined with the top portion of the bracket in an adhering manner.

10 In some embodiments, the cover plate is configured as a touch-screen cover plate.

In some embodiments, an outer surface of the decoration enclosure is configured as an arc surface.

15 According to a second aspect of embodiments of the present disclosure, there is provided an electronic device. The electronic device includes a display screen assembly according to any embodiment described above and a rear cover coupled to the display screen assembly to define an accommodating space therebetween.

In some embodiments, the electronic device further includes a battery, and the battery is received in the accommodating space.

In some embodiments, the cover plate is configured as a touch-screen cover plate.

20 In some embodiments, the cover plate includes: a touch panel having a touch control circuit and configured to achieve a touch operation of the display screen assembly; and a protection cover sheet provided on the touch panel and configured to protect the touch panel from being damaged due to direct touch operations on the touch panel.

25 According to a third aspect of embodiments of the present disclosure, there is provided an assembling method. The assembling method includes:

providing a bracket, in which the bracket includes a top portion and a side wall;

providing a decoration enclosure, in which the decoration enclosure includes a first joining part and a second joining part bending from the first joining part;

30 joining the first joining part with the side wall of the bracket by dispensing adhesive therebetween;

providing a display screen and a cover plate;

mounting the display screen and the cover plate on the top portion of the bracket; and
joining a side edge of the cover plate with the second joining part by dispensing adhesive
therebetween and shielding a non-display area of the display screen by the second joining part.

In some embodiments, mounting the display screen and the cover plate on the top portion of
5 the bracket includes:

adhering the display screen on the top portion; and
laminating the cover plate on the display screen fully.

In some embodiments, mounting the display screen and the cover plate on the top portion
includes:

10 laminating the cover plate on the display screen fully; and
mounting the cover plate and the display screen fully laminated with the cover plate on the
top portion of the bracket.

In the display screen assembly, the electronic device and the assembling method according to
embodiments of the present disclosure, the cover plate has no black-ink edge, so that a user will
15 not see the black-ink edge on the screen. Thus, a screen-to-body ratio is increased, a product
quality is enhanced and the user experience is improved.

Additional aspects and advantages of embodiments of the present disclosure will be given in
part in the following descriptions, become apparent in part from the following descriptions, or be
learned from the practice of the embodiments of the present disclosure.

20

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects and advantages of embodiments of the present disclosure will
become apparent and readily appreciated from descriptions made with reference to following
drawings.

25 Fig. 1 illustrates a perspective view of an electronic device according to an embodiment of
the present disclosure.

Fig. 2 illustrates a plan view of an electronic device according to an embodiment of the
present disclosure.

Fig. 3 illustrates a sectional view of the electronic device in Fig. 2 taken along line III-III.

30 Fig. 4 illustrates an enlarged view of portion IV in Fig. 3.

Fig. 5 illustrates a flow chart of an assembling method of a display screen assembly according

to an embodiment of the present disclosure.

Fig. 6 illustrates a flow chart of an assembling method of a display screen assembly according to an embodiment of the present disclosure.

Fig. 7 illustrates a flow chart of an assembling method of a display screen assembly according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

Embodiments of the present disclosure will be described in detail and examples of the embodiments will be illustrated in the drawings, where same or similar reference numerals are used to indicate same or similar members or members with same or similar functions. The embodiments described herein with reference to drawings are explanatory, illustrative, and used to generally understand the present disclosure. The embodiments shall not be construed to limit the present disclosure.

In the specification, it is to be understood that terms such as “central”, “longitudinal”, “lateral”, “length”, “width”, “thickness”, “upper”, “lower”, “front”, “rear”, “left”, “right”, “vertical”, “horizontal”, “top”, “bottom”, “inner”, “outer”, “clockwise” and “counterclockwise”, should be construed to refer to the orientation as then described or as shown in the drawings under discussion. These relative terms are for convenience of description and do not require that the present disclosure be constructed or operated in a particular orientation. In addition, terms such as “first” and “second” are used herein for purposes of description and are not intended to indicate or imply relative importance or significance. Thus, features limited by “first” and “second” are intended to indicate or imply including one or more than one these features. In the description of the present disclosure, “a plurality of” means two or more than two, unless specified otherwise.

In the present disclosure, unless specified or limited otherwise, the terms “mounted”, “connected”, “coupled”, “fixed” and the like are used broadly, and can be, for example, fixed connections, detachable connections, or integral connections; can also be mechanical or electrical connections; can also be direct connections or indirect connections via intervening structures; can also be inner communications of two elements. The above terms can be understood by those skilled in the art according to specific situations.

In the description of the present disclosure, a structure in which a first feature is “on” a second feature can include an embodiment in which the first feature directly contacts the second

feature, and can also include an embodiment in which an additional feature is formed between the first feature and the second feature so that the first feature does not directly contact the second feature, unless otherwise specified. Furthermore, a first feature “on”, “above”, or “on top of” a second feature can include an embodiment in which the first feature is right “on”, “above” or “on top of” the second feature, and can also include an embodiment in which the first feature is not right “on”, “above” or “on top of” the second feature, or just means that the first feature has a sea level elevation larger than the sea level elevation of the second feature. While first feature “beneath”, “below” or “on bottom of” a second feature can include an embodiment in which the first feature is right “beneath”, “below” or “on bottom of” the second feature, and can also include an embodiment in which the first feature is not right “beneath”, “below” or “on bottom of” the second feature, or just means that the first feature has a sea level elevation smaller than the sea level elevation of the second feature.

The following disclosure provides many different embodiments or examples to realize different structures of the present disclosure. To simplify the disclosure of the present disclosure, components and configurations in particular examples are elaborated. Of course, they are illustrative, and are not intended to limit the present disclosure. Moreover, reference numbers and/or letters can be repeated in different examples of the present disclosure for the purpose of simplicity and clarity, which shall not be constructed to indicate the relationships among various embodiments and/or configurations. In addition, the present disclosure provides examples of various specific processes and materials, but applicability of other processes and/or utilization of other materials are conceivable for those skilled in the art.

As illustrated in Figs. 1 to 3, an electronic device 100 according to embodiments of the present disclosure includes a display screen assembly 10, a rear cover 20 and a battery 30. The electronic device 100 includes but is not limited to a mobile phone, a tablet computer, a smart watch and the like.

In some embodiments, the display screen assembly 10 is configured to display images, texts and so on. Moreover, the display screen assembly 10 can also be configured to receive a touch operation of a user. As illustrated in Fig. 3, the display screen assembly 10 includes a cover plate 12, a display screen 14, a bracket 16 and a decoration enclosure 18.

As illustrated in Fig. 4, in an embodiment of the present disclosure, the cover plate 12 is configured as a touch-screen cover plate. In other words, a touch control circuit of a touch screen

is integrated in the cover plate 12, and a touch control function can be achieved by clicking the cover plate 12. The cover plate 12 can be made of materials such as glass, sapphire or polyvinyl chloride (PVC), etc. In some embodiments, the cover plate 12 is configured to have two layers of structures, namely a touch panel and a protection cover sheet disposed on the touch panel. The touch panel includes the touch control circuit of the touch screen and is configured to achieve a touch operation of the display screen assembly 10, and the protection cover sheet is configured to protect the touch panel from being damaged due to direct touch operations on the touch panel. In other words, the cover plate 12 serves as the touch screen with better protection thereof. A side edge 122 of the cover plate 12 is configured as an inclined surface. In other words, the cover plate 12 has a trapezoidal cross section. An area of an upper surface 126 of the cover plate 12 is less than an area of a lower surface 124 of the cover plate 12.

A top surface 144 of the display screen 14 is joined with the lower surface 124 of the cover plate 12. The lower surface 124 of the cover plate 12 and the top surface 144 of the display screen 14 can be laminated in a full lamination manner. In some embodiments of the present disclosure, the lower surface 124 of the cover plate 12 and the top surface 144 of the display screen 14 can be laminated by means of an optically clear adhesive (OCA). A width of the display screen 14 is larger than a width of the cover plate 12, and the side edge 122 of the cover plate 12 is indented inwards relative to the display screen 14. In other words, the cover plate 12 cannot cover the display screen 14 completely, and is configured to have a stepped shape gradually expanding in a direction from the cover plate 12 to the display screen 14. The display screen 14 and the cover plate 12 are laminated in a full lamination manner. The display screen 14 can be configured as a liquid crystal display (LCD), an organic light-emitting diode (OLED) display screen or a flexible OLED display screen. The display screen 14 includes a display area 141 and a non-display area 142, the display area 141 is configured to achieve a function of the display screen assembly 10 for displaying images, texts and the like, and the non-display area 142 is configured for wiring.

The bracket 16 includes a top portion 162 and a side wall 164, and a bottom surface 146 of the display screen 14 is joined with the top portion 162 of the bracket 16. In some embodiments of the present disclosure, the bottom surface 146 of the display screen 14 is joined with the top portion 162 of the bracket 16 in an adhering manner. In some embodiments of the present disclosure, the adhering manner can be achieved by dispensing an adhesive or using a double sided adhesive, or by a combination thereof.

The decoration enclosure 18 includes a first joining part 182 and a second joining part 184 bending from the first joining part 182, and the first joining part 182 is joined with the side wall 164. In some embodiments of the present disclosure, the first joining part 182 is joined with the side wall 164 in an adhering manner. In some embodiments of the present disclosure, the adhering manner can be achieved by dispensing the adhesive. The second joining part 184 is joined with the side edge 122 of the cover plate 12 by means of dispensing adhesive therebetween, and shields the non-display area 142 of the display screen 14. In other words, the second joining part 184 protrudes towards the side edge 122 of the cover plate, so that a width difference between the cover plate 12 and the display screen 14 can be compensated to enclose the display screen 14 in the display screen assembly 10. A surface of the second joining part 184 joined to the side edge 122 of the cover plate 12 is configured as an inclined surface, and has an inclined angle approximate to or consistent with an inclined angle of the side edge 122 of the cover plate 12. An outer surface 186 of the decoration enclosure 18 is configured to have an arc shape. In some embodiments of the present disclosure, the decoration enclosure 18 can surround the side edge 122 of the cover plate 12.

The rear cover 20 is joined with the display screen assembly 10 to define an accommodating space 202, and the battery 30 is received in the accommodating space 202. The accommodating space 202 has a size and a shape which are matched with a size and a shape of the battery 30. Specifically, the rear cover 20 can be coupled to the bracket 16 or the decoration enclosure 18 by means of adhering, snapping or screwing. A coupling manner is not limited to the above kinds. The rear cover 20 can be joined with the display screen assembly 10 by selecting an appropriate manner in a practical application. The rear cover 20 can be made of metal materials, such as steel, aluminum alloy or magnesium alloy. The rear cover 20 can also be made of nonmetal materials, such as acrylonitrile-butadiene-styrene copolymer (ABS), polyvinyl chloride (PVC) or polycarbonate (PC). The material of the rear cover 20 is not limited to the materials mentioned above, and an appropriate material can be selected according to requirements in a practical application.

During assembling the display screen assembly 10 according to embodiments of the present disclosure, the cover plate 12 is fully laminated with the display screen 14 first, and then the bottom surface 146 of the display screen 14 is joined with the top portion 162 of the bracket 16 by dispensing adhesive therebetween after the cover plate 12 and the display screen 14 are laminated

fully, so that the cover plate 12, the display screen 14 and the bracket 16 are joined as a whole. Further, the decoration enclosure 18 is fitted onto the bracket 16, the first joining part 182 is joined with the side wall 164 by dispensing adhesive therebetween, and the second joining part 184 is joined with the side edge 122 of the cover plate 12 by dispensing adhesive therebetween. Thus, the display screen assembly 10 is formed. The bottom surface 146 of the display screen 14 can also be joined with the top portion 162 of the bracket 16 first, and then the cover plate 12 is fully laminated with the display screen 14.

In the display screen assembly 10 according to embodiments of the present disclosure, the second joining part 184 protrudes towards the side edge 122 of the cover plate 12, and is joined with the side edge 122 of the cover plate 12 to shield the non-display area 142 of the display screen 14. However, the cover plate in the related art is screen-printed with a circle of black-ink edge at its periphery to shield the non-display area 142 of the display screen 14 and other internal structures. In the display screen assembly 10 according to embodiments of the present disclosure, since structures of the decoration enclosure 18, the cover plate 12 and the display screen 14 are reasonably designed, the second joining part 184 is joined with the side edge 122 of the cover plate 12 to shield the non-display area 142 of the display screen 14 and other internal structures, thus replacing the black-ink edge in the related art, which avoids the circle of black-ink edge screen-printed at the periphery of the cover plate 12, and hence improves a screen-to-body ratio.

The display screen assembly 10 according to embodiments of the present disclosure eliminates the black-ink edge of the cover plate 12. When the display screen assembly 10 according to embodiments of the present disclosure is applied to an electronic device 100, the user will not see the black-ink edge on the screen. Thus, the screen-to-body ratio is increased, the product quality is enhanced and the user experience is improved.

Further, the second joining part 184 is joined with the side edge 122 of the cover plate 12 by dispensing adhesive therebetween. This joining manner allows the second joining part 184 to be fixedly coupled to the side edge 122 of the cover plate 12, and also provides a good sealing performance to achieve a waterproof function. Thus, a waterproof performance of the electronic device 100 is enhanced, and the user experience is further improved.

Furthermore, when the electronic device 100 is configured as the mobile phone, the tablet computer or other handheld electronic devices, the outer surface 186 of the decoration enclosure 18 which has the arc shape can improve a hand feel of holding the electronic device 100 by hands.

Thus, the user can hold the electronic device 100 by hands comfortably.

In addition, the second joining part 184 protrudes towards the side edge 122 of the cover plate 12, and the second joining part 184 is joined with the side edge 122 of the cover plate 12 to shield the non-display area 142 of the display screen 14. The second joining part 184 serves as an inwards-fastening structure to hold the display screen 14 in the electronic device 100, so that the structure of the electronic device 100 is more stable. Moreover, since the black-ink edge is not needed to be screen-printed at the periphery of the cover plate 12, manufacturing processes of the electronic device 100 and the display screen assembly 10 can be simplified.

Further, since the first joining part 182 of the decoration enclosure 18 is joined with the side wall 164 of the bracket 16 by dispensing adhesive therebetween, and the second joining part 184 is joined with the side edge 122 of the cover plate 12 by dispensing adhesive therebetween, when the electronic device 100 is thrown up, falls down or collides with other objects at a high speed, a force exerted on the display screen 14 can be alleviated to prevent a separation phenomenon of layers of the display screen 14.

As illustrated in Figs. 4 and 5, an assembling method according to embodiments of the present disclosure includes actions at following blocks.

At block S11: a bracket 16 is provided, in which the bracket 16 includes a top portion 162 and a side wall 164.

At block S13: a decoration enclosure 18 is provided, in which the decoration enclosure 18 includes a first joining part 182 and a second joining part 184 bending from the first joining part 182.

At block S14: the first joining part 182 is joined with the side wall 164 by dispensing adhesive therebetween.

At block S15: a display screen 14 and a cover plate 12 are provided.

At block S17: the display screen 14 and the cover plate 12 are arranged on the top portion 162.

At block S19: the second joining part 184 is joined with a side edge 122 of the cover plate 12 by dispensing adhesive therebetween and the second joining part 184 shields a non-display area 142 of the display screen 14.

The cover plate 12 is configured as a touch-screen cover plate. In other words, a touch control circuit of a touch screen is integrated in the cover plate 12, and a touch control function can be

achieved by clicking the cover plate 12. The cover plate 12 can be made of materials such as glass, sapphire or polyvinyl chloride (PVC), etc. In some embodiments, the cover plate 12 is configured to have two layers of structures, namely a touch panel and a protection cover sheet disposed on the touch panel. The touch panel includes the touch control circuit of the touch screen and is
5 configured to achieve a touch operation of the display screen assembly 10, and the protection cover sheet is configured to protect the touch panel from being damaged due to direct touch operations on the touch panel. In other words, the cover plate 12 serves as the touch screen with better protection thereof. The side edge 122 of the cover plate 12 is configured as an inclined surface. In other words, the cover plate 12 has a trapezoidal cross section. An area of an upper
10 surface 126 of the cover plate 12 is less than an area of a lower surface 124 of the cover plate 12.

The second joining part 184 of the decoration enclosure 18 protrudes towards the side edge 122 of the cover plate, so that a width difference between the cover plate 12 and the display screen 14 is compensated to enclose the display screen 14 in the display screen assembly 10. A surface of the second joining part 184 joined to the side edge 122 of the cover plate 12 is configured as an
15 inclined surface, and has an inclined angle approximate to or consistent with an inclined angle of the side edge 122 of the cover plate 12. An outer surface 186 of the decoration enclosure 18 is configured to have an arc shape. In some embodiments of the present disclosure, the decoration enclosure 18 can surround the side edge 122 of the cover plate 12.

In combination with Fig. 6, in some embodiments, the action at step S17 includes actions at
20 following blocks.

At block S171: the display screen 14 is adhered on the top portion 162.

At block S173: the cover plate 12 is fully laminated on the display screen 14.

The lower surface 124 of the cover plate 12 and the top surface 144 of the display screen can be laminated by means of an optically clear adhesive (OCA). A width of the display screen 14 is
25 larger than a width of the cover plate 12, and the side edge 122 of the cover plate 12 is indented inwards relative to the display screen 14. In other words, the cover plate 12 cannot cover the display screen 14 completely, and is configured to have a stepped shape gradually expanding in a direction from the cover plate 12 to the display screen 14. The display screen 14 and the cover plate 12 are laminated in a full lamination manner. The display screen 14 can be configured as a
30 liquid crystal display (LCD), an organic light-emitting diode (OLED) display screen or a flexible OLED display screen. The display screen 14 includes a display area 141 and the non-display area

142, the display area 141 is configured to achieve a function of the display screen assembly 10 for displaying images, texts and the like, and the non-display area 142 is configured for wiring.

The display screen assembly 10 assembled by the assembling method according to embodiments of the present disclosure eliminates the black-ink edge of the cover plate 12, so that when the display screen assembly 10 is applied to an electronic device 100, the user will not see the black-ink edge on the screen. Thus, a screen-to-body ratio is increased, a product quality is enhanced and the user experience is improved.

Further, the second joining part 184 is joined with the side edge 122 of the cover plate 12 by dispensing adhesive therebetween. This joining manner allows the second joining part 184 to be fixedly coupled to the side edge 122 of the cover plate 12, and also provides a good sealing performance to achieve a waterproof function. Thus, a water proof performance of the electronic device 100 is enhanced, and the user experience is further improved.

Furthermore, when the electronic device 100 is configured as the mobile phone, the tablet computer or other handheld electronic devices, the outer surface 186 of the decoration enclosure 18 which has the arc shape can improve a hand feel of holding the electronic device 100 by hands. Thus, the user can hold the electronic device 100 by hands comfortably.

In addition, the second joining part 184 protrudes towards the side edge 122 of the cover plate 12, and the second joining part 184 is joined with the side edge 122 of the cover plate 12 to shield the non-display area 142 of the display screen 14. The second joining part 184 serves as an inwards-fastening structure to hold the display screen 14 in the electronic device 100, so that the structure of the electronic device 100 is more stable. Moreover, since the black-ink edge is not needed to be screen-printed at the periphery of the cover plate 12, manufacturing processes of the electronic device 100 and the display screen assembly 10 can be simplified.

Further, since the first joining part 182 of the decoration enclosure 18 is joined with the side wall 164 of the bracket 16 by dispensing adhesive therebetween, and the second joining part 184 is joined with the side edge 122 of the cover plate 12 by dispensing adhesive therebetween, when the electronic device 100 is thrown up, falls down or collides with other objects at a high speed, a force exerted on the electronic device 100 can be alleviated to prevent a separation phenomenon of layers of the display screen 14.

In combination with Fig. 7, in some embodiments, the action at step S17 includes actions at following blocks.

At block S172: the cover plate 12 is fully laminated on the display screen 14.

At block S174: the cover plate 12 and the display screen 14 fully laminated with the cover plate 12 are mounted on the top portion 162.

In other words, the display screen 14 can be adhered to the top portion 162 first, and then the cover plate 12 is fully laminated on the display screen 14. In some embodiments of the present disclosure, the cover plate 12 can be fully laminated on the display screen 14 first, and then the bottom surface 146 of the display screen 14 is adhered to the top portion 162.

Reference throughout this specification to “an embodiment”, “some embodiments”, “an illustrative embodiment”, “an example”, “a specific example” or “some examples”, means that a particular feature, structure, material, or characteristic described in connection with the embodiment or example is included in at least one embodiment or example of the present disclosure. Thus, the appearances of the phrases in various places throughout this specification are not necessarily referring to the same embodiment or example of the present disclosure. Furthermore, the particular features, structures, materials, or characteristics can be combined in any suitable manner in one or more embodiments or examples.

In addition, terms such as “first” and “second” are used herein for purposes of description and are not intended to indicate or imply relative importance or significance. Thus, the feature defined with “first” and “second” can comprise one or more of this feature. In the description of the present disclosure, “a plurality of” means two or more than two, unless specified otherwise.

Although explanatory embodiments have been shown and described, it would be appreciated by those skilled in the art that the above embodiments cannot be construed to limit the present disclosure, and changes, alternatives, and modifications can be made in the embodiments without departing from principles and scope of the present disclosure. The scope of the present disclosure is limited by the claims and its equivalence.

CLAIMS

What is claimed is:

- 5 1. A display screen assembly (10), comprising:
a cover plate (12);
a display screen (14) having a top surface (144) joined with a lower surface (124) of the cover plate (12), a width of the display screen (14) being larger than a width of the cover plate (12), and the cover plate (12) having a side edge (122) indented inwards relative to the display screen (14);
10 a bracket (16) having a top portion (162) and a side wall (164), and the top portion (162) of the bracket (16) being joined with a bottom surface (146) of the display screen (14); and
a decoration enclosure (18) having a first joining part (182) and a second joining part (184) bending from the first joining part (182), the first joining part (182) being joined with the side wall (164) of the bracket (16), and the second joining part (184) being joined with the side edge (122)
15 of the cover plate (12) and configured to shield a non-display area of the display screen (14).
2. The display screen assembly (10) according to claim 1, wherein the side edge (122) of the cover plate (12) is configured as a first inclined surface, and a surface of the second joining part (184) joined to the side edge (122) of the cover plate (12) is configured as a second inclined surface configured to be fitted with the first inclined surface.
- 20 3. The display screen assembly (10) according to claim 1, wherein the first joining part (182) is joined with the side wall (164) of the bracket (16) in an adhering manner.
4. The display screen assembly (10) according to claim 1, wherein the top surface (144) of the display screen (14) is joined with the lower surface (124) of the cover plate (12) in a full lamination manner.
- 25 5. The display screen assembly (10) according to claim 1, wherein the top surface (144) of the display screen (14) is laminated with the lower surface (124) of the cover plate (12) through an optically clear adhesive.
6. The display screen assembly (10) according to claim 1, wherein the bottom surface (146) of the display screen (14) is joined with the top portion (162) of the bracket (16) in an adhering
30 manner.
7. The display screen assembly (10) according to claim 1, wherein the cover plate (12) is

configured as a touch-screen cover plate.

8. The display screen assembly (10) according to claim 1, wherein an outer surface (186) of the decoration enclosure (18) is configured as an arc surface.

9. An electronic device (100), comprising a display screen assembly (10) according to any
5 one of claims 1 to 8 and a rear cover (20) coupled to the display screen assembly (10) so as to define an accommodating space (202) therebetween.

10. The electronic device (100) according to claim 9, further comprising a battery (30), wherein the battery (30) is received in the accommodating space (202).

11. The electronic device (100) according to claim 9, wherein the cover plate (12) is
10 configured as a touch-screen cover plate.

12. The electronic device (100) according to claim 11, wherein the cover plate (12) comprises:

a touch panel having a touch control circuit and configured to achieve a touch operation of the display screen assembly (10); and

15 a protection cover sheet provided on the touch panel and configured to protect the touch panel from being damaged due to direct touch operations on the touch panel.

13. An assembling method, comprising:

providing a bracket having a top portion and a side wall;

providing a decoration enclosure having a first joining part and a second joining part bending
20 from the first joining part;

joining the first joining part with the side wall of the bracket by dispensing adhesive therebetween;

providing a display screen and a cover plate;

mounting the display screen and the cover plate on the top portion of the bracket; and

25 joining a side edge of the cover plate with the second joining part by dispensing adhesive therebetween and shielding a non-display area of the display screen by the second joining part.

14. The assembling method according to claim 13, wherein mounting the display screen and the cover plate on the top portion of the bracket comprises:

adhering the display screen on the top portion; and

30 laminating the cover plate on the display screen fully.

15. The assembling method according to claim 13, wherein mounting the display screen and

the cover plate on the top portion comprises:

laminating the cover plate on the display screen fully; and

mounting the cover plate and the display screen fully laminated with the cover plate on the top portion of the bracket.

DRAWINGS

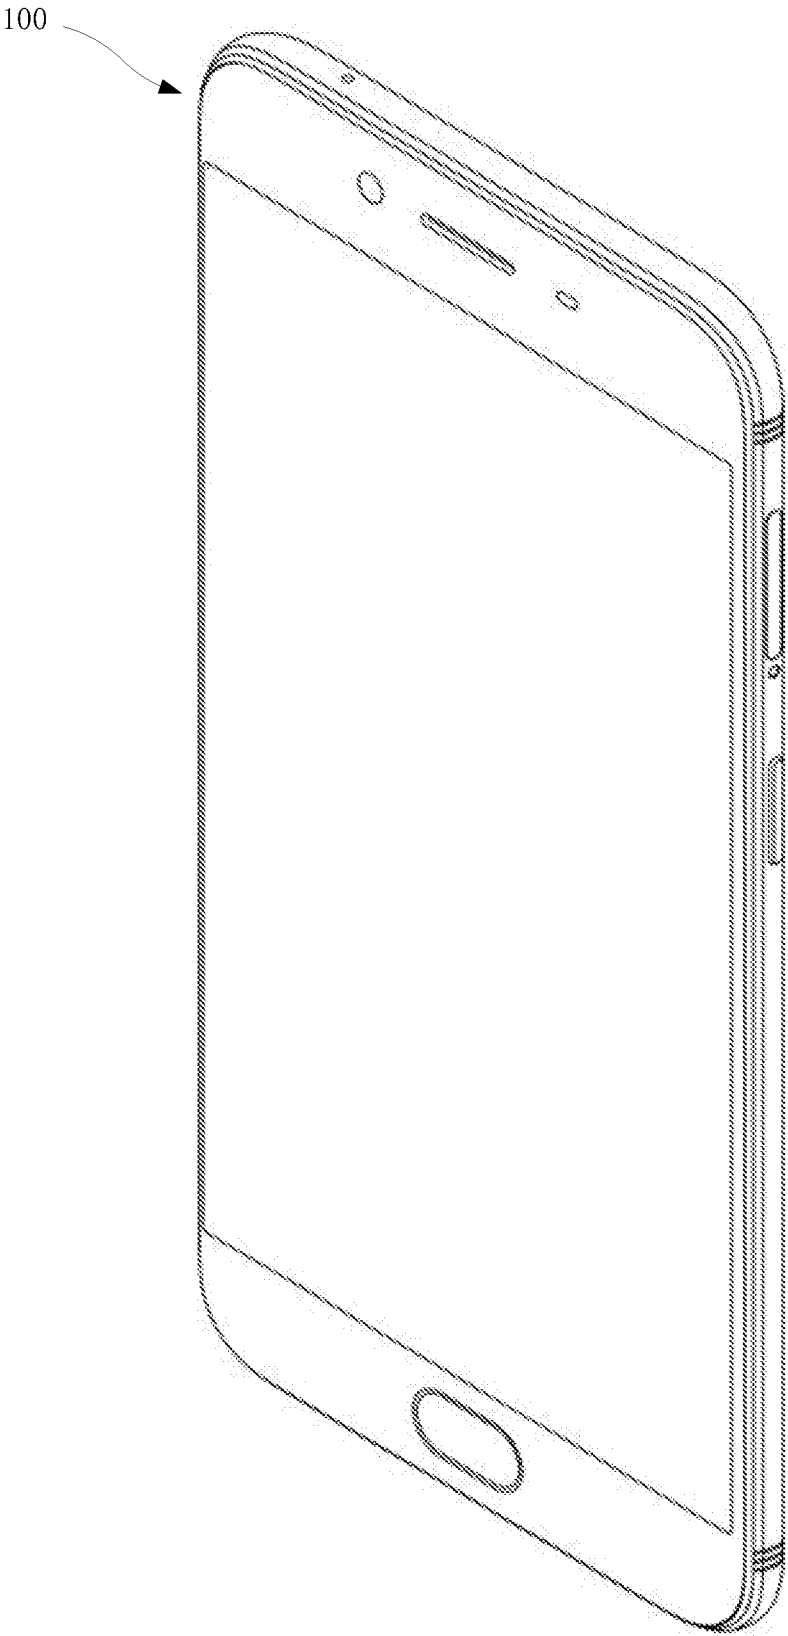


Fig. 1

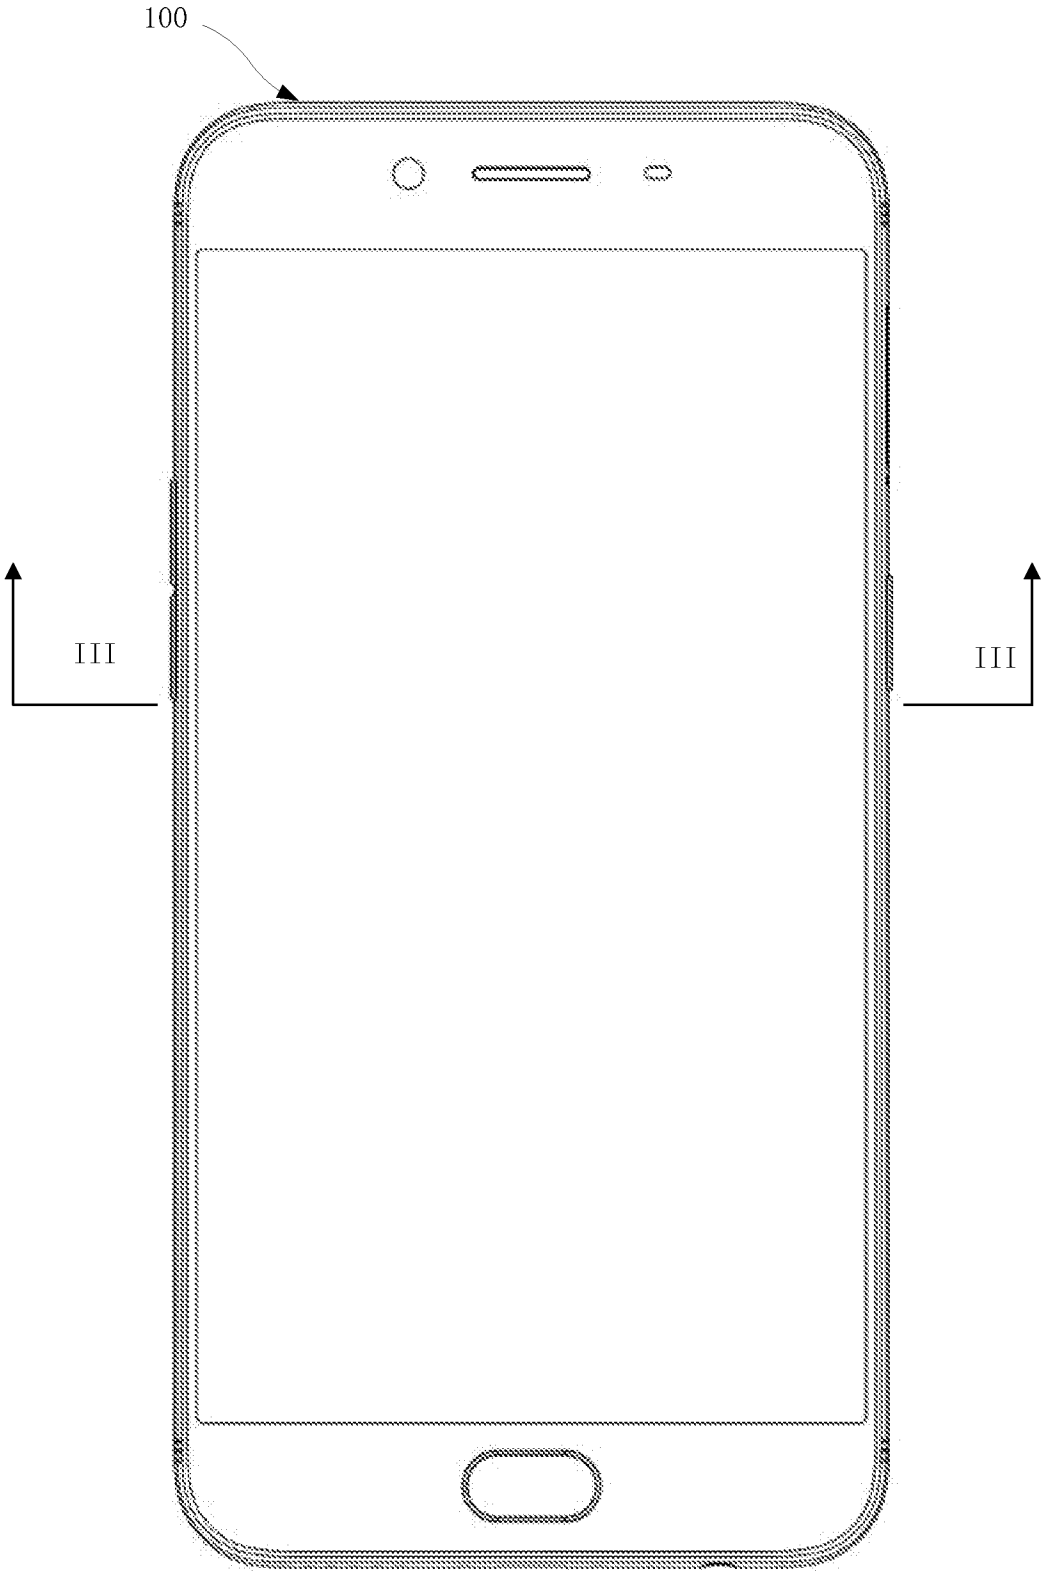


Fig. 2

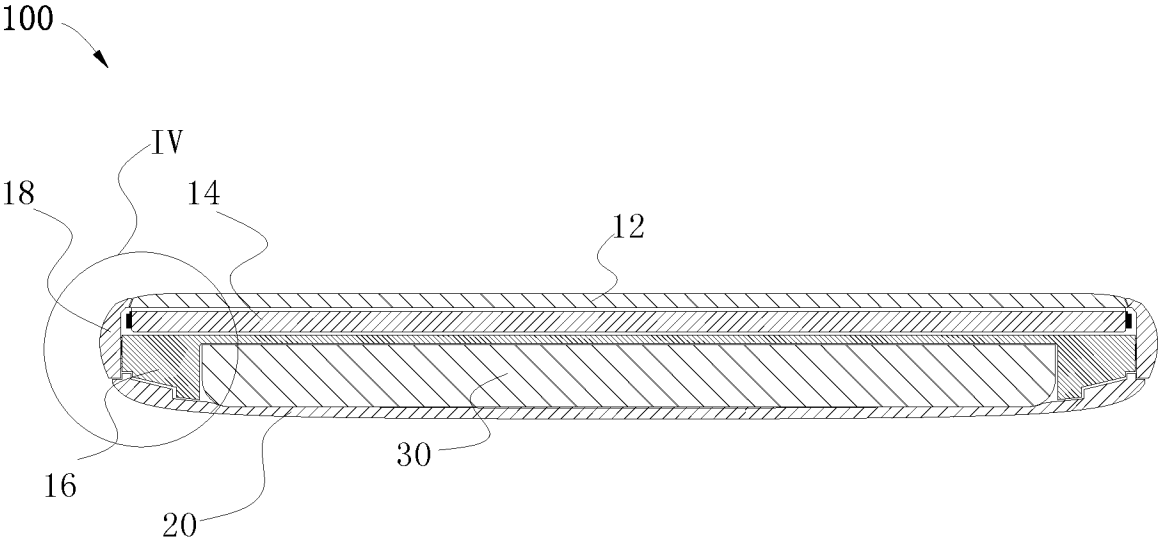


Fig. 3

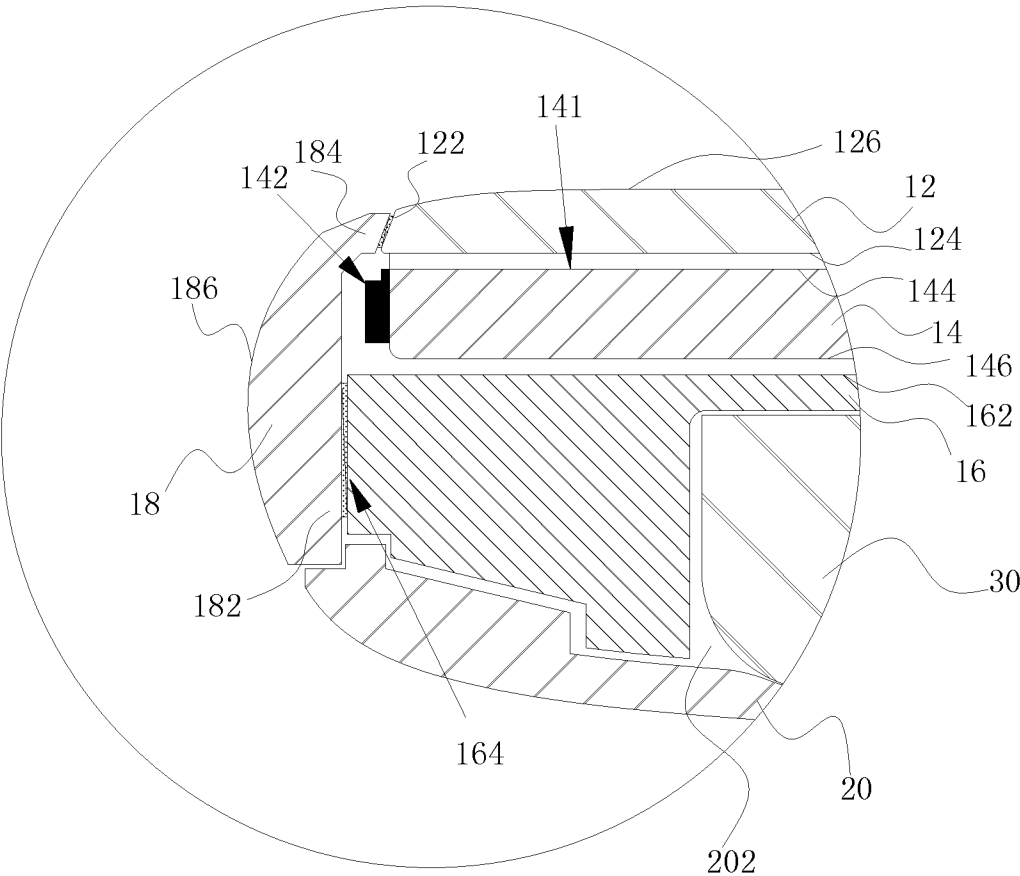


Fig. 4

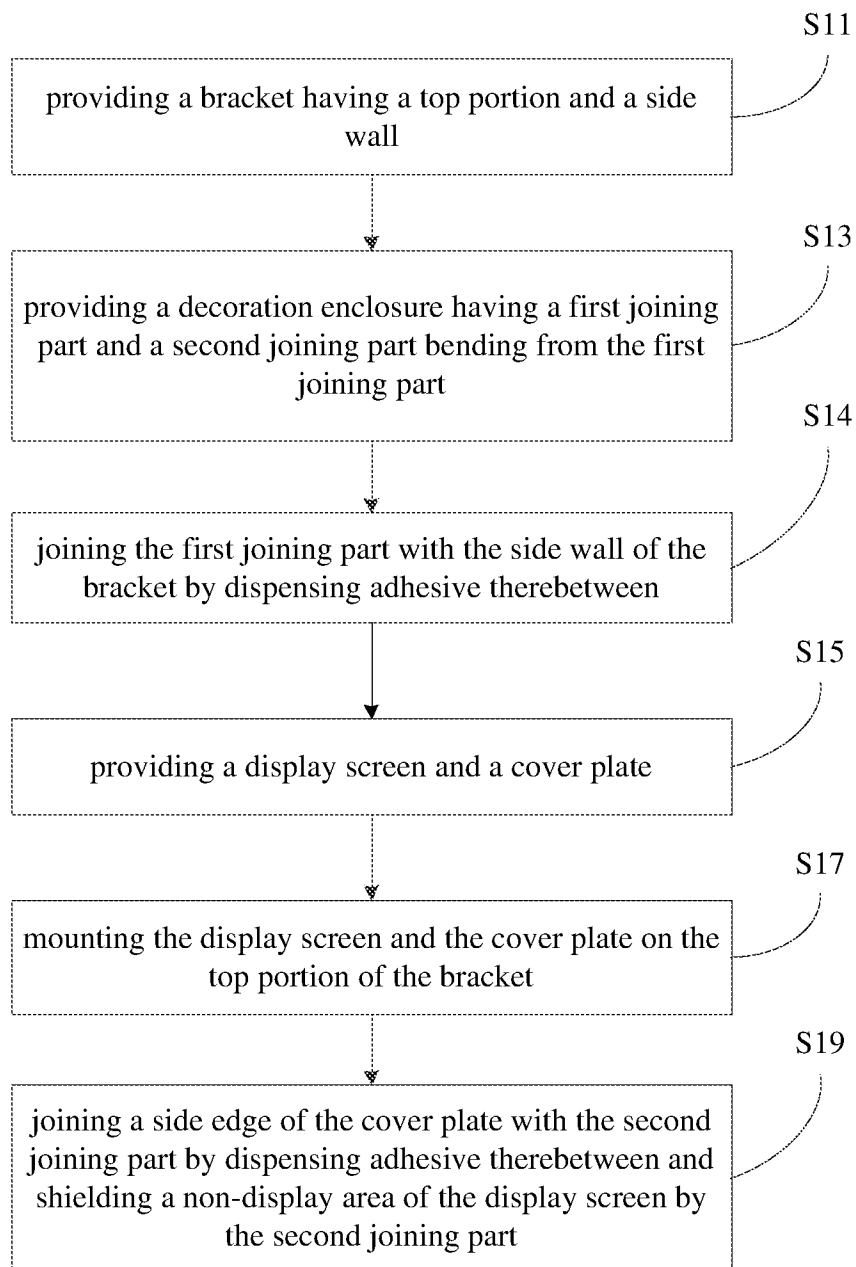


Fig. 5

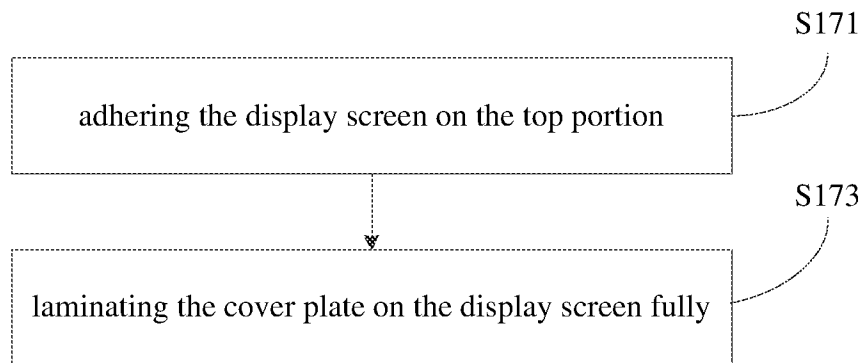


Fig. 6

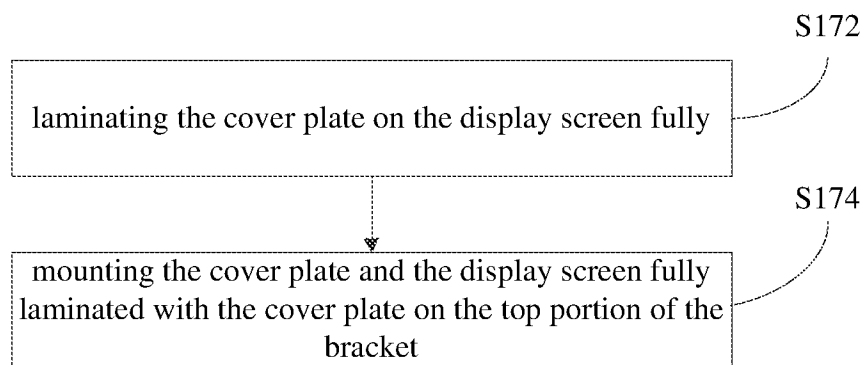


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/098974

A. CLASSIFICATION OF SUBJECT MATTER H04M 1/02(2006.01)i; G06F 1/16(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H04M G06F Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNABS,CNTXT,CNKI,VEN,USTXT: display,screen,bracket,cover,shell,non-display,black,shield,join		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 105916317 A (SHANGHAI HUAQIN TELECOM TECHNOLOGY CO., LTD.) 31 August 2016 (2016-08-31) description, paragraphs [0001], [0036]-[0060], figures 2-9	1-15
X	CN 102880350 A (SHANGHAI HUAQIN TELECOM TECHNOLOGY CO., LTD.) 16 January 2013 (2013-01-16) description, paragraphs [0003], [0012]-[0019], figures 2-6	1-15
X	CN 104866021 A (UANGDONG OPPO MOBILE TELECOMMUNICATIONS CORPORATION) 26 August 2015 (2015-08-26) description, paragraphs [0023]-[0040], figures 1-6	1-15
X	CN 104933970 A (UANGDONG OPPO MOBILE TELECOMMUNICATIONS CORPORATION) 23 September 2015 (2015-09-23) description, paragraphs [0021]-[0041], figures 1-4	1-15
X	CN 202750130 U (HUIZHOU TCL MOBILE COMM CO., LTD.) 20 February 2013 (2013-02-20) description, paragraphs [0020]-[0028], figures 1-3	1-15
A	US 2014240926 A1 (JONG HYUN CHOI) 28 August 2014 (2014-08-28) the whole document	1-15
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search 10 November 2017		Date of mailing of the international search report 17 November 2017
Name and mailing address of the ISA/CN STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088 China Facsimile No. (86-10)62019451		Authorized officer CHEN,Junru Telephone No. (86-10)62089549

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/098974

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	105916317	A	31 August 2016	None			
CN	102880350	A	16 January 2013	CN	102880350	B	21 December 2016
CN	104866021	A	26 August 2015	None			
CN	104933970	A	23 September 2015	None			
CN	202750130	U	20 February 2013	None			
US	2014240926	A1	28 August 2014	US	9553962	B2	24 January 2017
				KR	20140108399	A	11 September 2014