



- (51) International Patent Classification:
G06F 11/30 (2006.01)
- (21) International Application Number:
PCT/CN2013/090539
- (22) International Filing Date:
26 December 2013 (26.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
201310185841.X 17 May 2013 (17.05.2013) CN
- (71) Applicant: **TENCENT TECHNOLOGY (SHENZHEN) COMPANY LIMITED** [CN/CN]; Room 403, East Block 2, SEG Park, Zhenxing Road, Futian District, Shenzhen, Guangdong 518044 (CN).
- (72) Inventors: **CHEN, Yong**; Room 403, East Block 2, SEG Park, Zhenxing Road, Futian District, Shenzhen, Guangdong 518044 (CN). **FANG, Yi**; Room 403, East Block 2, SEG Park, Zhenxing Road, Futian District, Shenzhen, Guangdong 518044 (CN). **WANG, Bin**; Room 403, East Block 2, SEG Park, Zhenxing Road, Futian District, Shenzhen, Guangdong 518044 (CN). **HUANG, Shizhu**; Room 403, East Block 2, SEG Park, Zhenxing Road, Futian District, Shenzhen, Guangdong 518044 (CN).
- (74) Agents: **ADVANCE CHINA I.P. LAW OFFICE** et al.; Suite 918-920, 9/F., Dongshan Plaza, No 69 Xianlie Central Road, Guangzhou, Guangdong 510095 (CN).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD, DEVICE AND COMPUTER STORAGE MEDIUM FOR DETECTING POWER CONSUMPTION OF AN APPLICATION

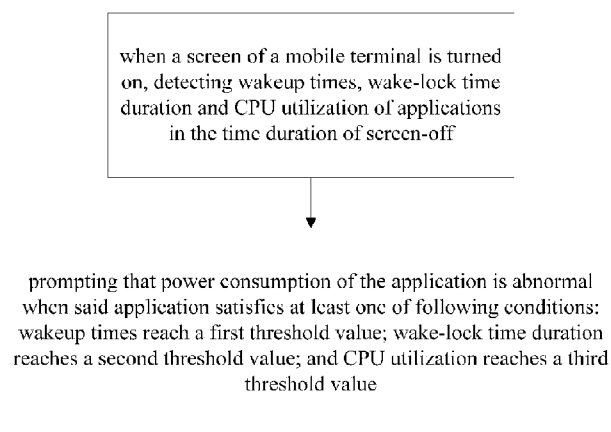


Figure 1

(57) Abstract: Provided is a method for detecting power consumption of an application, including following steps: when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of an application; prompting that power consumption of an application is abnormal by said device when said application satisfies at least one of following conditions: wakeup times reach a first threshold value; wake-lock time duration reaches a second threshold value; CPU utilization reaches a third threshold value. The method provided in the present disclosure is capable of detecting whether power consumption of an application is abnormal. In addition, the present disclosure further provides a device and a computer storage medium for detecting power consumption of an application.



Published:

— *with international search report (Art. 21(3))*

Description

Title of Invention: METHOD, DEVICE AND COMPUTER STORAGE MEDIUM FOR DETECTING POWER CONSUMPTION OF AN APPLICATION

[1] **【FIELD OF THE INVENTION】**

[2] This application claims priority to Chinese Application No. 201310185841.X, "METHOD AND DEVICE FOR DETECTING POWER CONSUMPTION OF AN APPLICATION", filed on May 17, 2013, which is hereby incorporated by reference in its entirety.

[3] The present disclosure relates to smart mobile terminal technology, more particularly to a method, device and a computer storage medium for detecting power consumption of an application.

[4] **【BACKGROUND OF THE INVENTION】**

[5] With the development of mobile internet, smart mobile terminals are more and more widespread, and large amount of applications spring up to attract massive users. However, some applications often consume too much power due to defects on design or due to inconsideration of power saving.

[6] The prior art method for detecting power consumption of applications is realized by acquiring the amount of power consumption of applications directly, and then analyzing and ranking said applications according to the amount of power consumption (as shown in figure 5). Said prior art method for detecting power consumption of applications is based on the amount of power consumption only, however, higher amount of power consumption does not means that the power consumption is abnormal. Therefore, said traditional method can not detect whether power consumption of an application is abnormal.

[7] **【SUMMARY OF THE INVENTION】**

[8] In view of defects existing in the prior art mentioned above, in one aspect, the present disclosure provides a method for detecting whether power consumption of an application is abnormal:

[9] A method for detecting power consumption of an application includes following steps:

[10] when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off by a device for detecting power consumption of an application;

[11] when an application satisfies at least one of following conditions, prompting that power consumption of the application is abnormal by said device:

- [12] wakeup times reaches a first threshold value;
- [13] wake-lock time duration reaches a second threshold value; and
- [14] CPU utilization reaches a third threshold value.
- [15] In another aspect, the present disclosure provides a device for detecting power consumption of an application, including:
- [16] a detecting module, used for detecting, when the screen of the mobile terminal is turned on, wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off; and
- [17] an abnormal prompting module, used for prompting that power consumption of an application is abnormal when said application satisfies at least one of following conditions:
- [18] wakeup times reaches a first threshold value;
- [19] wake-lock time duration reaches a second threshold value; and
- [20] CPU utilization reaches a third threshold value.
- [21] In another aspect, the present disclosure provides a computer storage medium for detecting power consumption of an application, including computer executable instructions, said computer executable instructions are used for executing a method for detecting power consumption of an application, wherein, the method includes:
- [22] when a screen of a mobile device is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off by a device for detecting power consumption of an application;
- [23] when an application satisfies at least one of following conditions, prompting that power consumption of the application is abnormal by said device:
- [24] said wakeup times reaches a first threshold value;
- [25] said wake-lock time duration reaches a second threshold value; and
- [26] said CPU utilization reaches a third threshold value.
- [27] The method, device and non-transitory computer readable storage medium mentioned above are used for detecting power consumption of an application by detecting, when the screen of the mobile terminal is turned on, wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off. When at least one of the three parameters reaches corresponding threshold value, said device prompts that power consumption of an application is abnormal. Because, if the wakeup times or wake-lock time duration or CPU utilization of an application is too high in the time duration of screen-off, it reflects that there are excessive activities existing in said application, which causes power consumption abnormal. Therefore, said method and device are capable of detecting power consumption of an application, thereby the user can process said application having abnormal power consumption according to the prompt.

[28] **【BRIEF DESCRIPTION OF THE DRAWINGS】**

[29] Figure 1 is a schematic flow diagram illustrating the method for detecting power consumption of an application according to one embodiment of the present invention;

[30] Figure 2 is a flow diagram illustrating a method for detecting power consumption of an application according to another embodiment of the present invention;

[31] Figure 3 is a structure diagram illustrating the device for detecting power consumption of an application according to one embodiment of the present invention;

[32] Figure 4 is a structure diagram illustrating a device for detecting power consumption of an application according to another embodiment of the present invention;

[33] Figure 5 is a schematic diagram illustrating a ranking list of power consumption of applications in the prior art.

[34] **【DETAILED DESCRIPTION OF THE EMBODIMENTS】**

[35] In one embodiment as shown in Figure 1, a method for detecting power consumption of an application is provided, the method includes following steps:

[36] S102, when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of an application.

[37] The mobile terminal mentioned in the present disclosure refers to all kinds of portable mobile intelligent devices used under wireless network environment, including a mobile phone, a PDA and a tablet PC, and so on. Said time duration of screen-off refers to the period from screen-off to screen-on of a mobile terminal.

[38] In the period from screen-off to screen-on of a mobile terminal, if there is an application whose wakeup times is too many, wake-lock time duration is too long and CPU utilization is too high, it reflects that there are excessive activities existing in said application, which causes power consumption abnormal.

[39] In one embodiment, when a screen of a said mobile terminal is turned on, detecting whether time duration of screen-off reaches preset value of time duration, if it does, then detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off; if not, then not processing.

[40] In one embodiment, recording current first wakeup times, first wake-lock time duration and first CPU time slice when a screen of a mobile terminal is turned off; furthermore, recording current second wakeup times, second wake-lock time duration and second CPU time slice when said screen of said mobile terminal is turned on.

[41] Furthermore, in said S102, the wakeup times of an application in the time duration of screen-off is calculated as a ratio of the difference between said second wakeup times and said first wakeup times to said time duration of screen-off; the wake-lock time duration of an application in the time duration of screen-off is calculated as a ratio of the difference between said second wake-lock time duration and said first wake-lock

time duration to said time duration of screen-off; and the CPU utilization of an application in the time duration of screen-off is calculated as a ratio of the difference between said second CPU time slice and said first CPU time slice to said time duration of screen-off.

[42] S104, prompting that power consumption of the application is abnormal when said application satisfies at least one of following conditions by said device: wakeup times reach a first threshold value; wake-lock time duration reaches a second threshold value; and CPU utilization reaches a third threshold value.

[43] Particularly, when the application satisfies at least one of the three conditions, it reflects that power consumption of said application is abnormal, the method is capable of prompting the user that power consumption of the application is abnormal, and the user may process said application having abnormal power consumption according to the prompt.

[44] In another embodiment as shown in Figure 2, a method for detecting power consumption of an application is provided, the method includes following steps:

[45] S202, when said screen of said mobile terminal is turned off, recording current first wakeup times, first wake-lock time duration, first CPU time slice and current first time by said device.

[46] S204, when said screen of said mobile terminal is turned on, recording current second wakeup times, second wake-lock time duration, second CPU time slice and current second time by said device.

[47] S206, detecting whether time duration of screen-off reaches preset value of time duration by said device, if it does, then turning to S208, if not, then going to the end.

[48] Particularly, said time duration of screen-off is time difference between said first time and said second time. Preferably, said preset value of time duration may be, but not limited to, 15 minutes. The possibility of misjudgments can be reduced efficiently and the accuracy of detection can be improved by means of detecting wakeup times, wake-lock time duration and CPU utilization of applications until time duration of screen-off reaches said preset value of time duration.

[49] S208, calculating wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by said device.

[50] Particularly, the formula for calculating said wakeup times of each application in the time duration of screen-off is: $(R2-R1)/(T2-T1)$; the formula for calculating said wake-lock time duration of each application in the time duration of screen-off is: $(W2-W1)/(T2-T1)$; the formula for calculating said CPU utilization of each application is: $(N2-N1)/(T2-T1)$. Wherein, R2 is the second wakeup times, R1 is the first wakeup times, W2 is the second wake-lock time duration, W1 is the first wake-lock time duration, N2 is the second CPU time slice, N1 is the first CPU time slice, T2 is the

second time, and T1 is the first time.

- [51] S210, detecting whether wakeup times of an application reaches a first threshold value by said device.
- [52] S212, detecting whether wake-lock time duration of an application reaches a second threshold value by said device.
- [53] S214, detecting whether CPU utilization of an application reaches a third threshold value by said device.
- [54] S216, judging whether at least one of the conditions mentioned above is satisfied by said device, if it is, then turning to S218, if not, then going to the end.
- [55] S218, prompting that power consumption of said application is abnormal by said device.
- [56] During the period that a mobile terminal turns from screen-off working state to screen-off standby state, if there is an application not releasing wake-type-partial lock, said mobile terminal will be kept in screen-off working state, thereby causing abnormal power consumption. In this embodiment, wake-lock time duration of each application in the time duration of screen-off can be calculated, if wake-lock time duration of an application reaches said preset second threshold value in the time duration of screen-off, it reflects that said application is likely to continue working in the time duration of screen-off, therefore the power consumption of said application is abnormal.
- [57] Moreover, when said mobile terminal gets into screen-off standby state, if there is an application setting an RTC-Wakeup timer, when a certain time is met, system of said mobile terminal will be awakened up and get into screen-off working state, thereby causing power consumption abnormal. In this embodiment, wakeup times of said application can be accumulated and recorded whenever the system is awakened up and gets into screen-off working state, so that, said first wakeup times can be obtained when the screen of said mobile terminal is turned off, and said second wakeup times can be obtained when the screen of said mobile terminal is turned on. If said wakeup times of an application in the time duration of screen-off reaches said first threshold value, it reflects that said wakeup times of said application is too many, and the power consumption of said application is abnormal.
- [58] Taking a mobile phone as an example, working states of a mobile phone include screen-on working state, screen-dark working state, screen-off working state and screen-off standby state. Abnormal power consumption means that there are excessive activities existing in an application in the time duration of screen-off of said mobile phone. When the working state of said mobile phone migrates through each of the above working states one by one from screen-on working state to screen-off standby state, the faster is the migration, the lower is the power consumption of said mobile

phone. During the process that the working state of said mobile phone migrates from screen-on working state to screen-off standby state, if there is an application maintaining a wake-type-partial lock, said mobile phone will stay at screen-off working state; until all applications release said lock, said mobile phone is able to migrate to screen-off standby state. At screen-off standby state, if there is an application setting an RTC-wakeup timer, when the preset time is met, the system will be awakened up and get into screen-off working state.

- [59] Therefore, it can be known effectively which application has excessive activities in the time duration of screen-off of the mobile terminal by detecting wakeup times, wake-lock time duration and CPU utilization of each application in the time duration of screen-off, thereby the system can identify which application has abnormal power consumption, and prompt the user to process the application having abnormal power consumption.
- [60] In one preferred embodiment, said first threshold value is 40 times/hour, said second threshold value is 2minutes/hour and said third threshold value is 3%. It should be understood that said first threshold value, second threshold value and third threshold value are not limited to the values provided in said preferred embodiment.
- [61] In one embodiment as shown in Figure 3, a device for detecting power consumption of an application is provided; the device includes a detecting module 10 and an abnormal prompting module 20.
- [62] Wherein, said detecting module 10 is used for detecting, when the screen of the mobile terminal is turned on, wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off.
- [63] In an embodiment, said detecting module 10 is used for detecting, when the screen of the mobile terminal is turned on, whether time duration of screen-off reaches preset value of time duration, if it does, then detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off. Preferably, said preset value of time duration may be, but not limited to, 15 minutes. The possibility of misjudgments can be reduced efficiently and the accuracy of detection can be improved by means of detecting wakeup times, wake-lock time duration and CPU utilization of applications until time duration of screen-off reaches said preset value of time duration.
- [64] Said abnormal prompting module 20 is used for promoting that power consumption of an application is abnormal when said application satisfies at least one of following conditions: wakeup times reaches a first threshold value; wake-lock time duration reaches a second threshold value; and CPU utilization reaches a third threshold value.
- [65] In one preferred embodiment, said first threshold value is 40 times/hour, said second threshold value is 2 minutes/hour and said third threshold value is 3%.

- [66] In another embodiment as shown in Figure 4, said device for detecting power consumption of an application further includes a recording module 30, used for recording, when said screen of said mobile terminal is turned off, current first wakeup times, first wake-lock time duration and first CPU time slice.
- [67] Furthermore, in one embodiment, said recording module 30 is further used for recording, when said screen of said mobile terminal is turned on, current second wakeup times, second wake-lock time duration and second CPU time slice.
- [68] In this embodiment, said detecting module 10 is used for calculating the wakeup times of applications being as a ratio of the difference between said second wakeup times and said first wakeup times to said time duration of screen-off; calculating the wake-lock time duration of applications being as a ratio of the difference between said second wake-lock time duration and said first wake-lock time duration to said time duration of screen-off; and calculating the CPU utilization of applications being as a ratio of the difference between said second CPU time slice and said first CPU time slice to said time duration of screen-off.
- [69] Furthermore, said recording module 30 is capable of recording current first time when the screen of said mobile terminal is turned off and current second time when the screen of said mobile terminal is turned on. Said time duration of screen-off is the time difference between said first time and said second time.
- [70] Since said method, device and computer storage medium for detecting power consumption of an application mentioned above are capable of detecting wakeup times, wake-lock time duration and CPU utilization of applications, it can be detected which application has excessive activities in the time duration of screen-off, thereby the system of the device can identify which application has abnormal power consumption, and prompt the user to process the application having abnormal power consumption.
- [71] By means of setting preset value of time duration, the possibility of misjudgments can be reduced efficiently and the accuracy of detection can be improved by means of detecting the abnormal power consumption of the application until time duration of screen-off reaches said preset value of time duration.
- [72] It should be understood by those skilled in the art that all or part of the processes of preferred embodiments disclosed above may be realized through relevant hardware commanded by computer program instructions. Said program may be saved in a computer readable storage medium of the computer, and said program may include the processes of the preferred embodiments mentioned above when it is executed. Wherein, said storage medium may be a diskette, optical disk, ROM (Read-Only Memory) or RAM (Random Access Memory), and so on.
- [73] It should be understood by those skilled in the art that what described above are preferred embodiments of the present invention. Various modifications and re-

placements may be made therein without departing from the theory of the present disclosure, which should also be seen in the scope of the present disclosure.

Claims

- [Claim 1] A method for detecting power consumption of an application, comprising following steps:
when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off by a device for detecting power consumption of an application;
when an application satisfies at least one of following conditions, prompting that power consumption of the application is abnormal by said device:
said wakeup times reaches a first threshold value;
said wake-lock time duration reaches a second threshold value; and
said CPU utilization reaches a third threshold value.
- [Claim 2] The method for detecting power consumption of an application according to claim 1, wherein, said step of when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of an application is specified as follows:
when a screen of a mobile terminal is turned on, detecting whether time duration of screen-off reaches a preset value of time duration by said device, if it does, then detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off.
- [Claim 3] The method for detecting power consumption of an application according to claim 1, further comprising:
recording, when said screen of mobile terminal is turned off, current first wakeup times, first wake-lock time duration and first CPU time slice of applications by said device.
- [Claim 4] The method for detecting power consumption of an application according to claim 3, further comprising:
recording, when said screen of mobile terminal is turned on, current second wakeup times, second wake-lock time duration and second CPU time slice of applications by said device.
- [Claim 5] The method for detecting power consumption of an application according to claim 4, wherein, said step of detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of

an application is specified as follows:

calculating said wakeup times of applications being as a ratio value of a difference between said second wakeup times and said first wakeup times to said time duration of screen-off by said device;

calculating said wake-lock time duration of applications being as a ratio value of a difference between said second wake-lock time duration and said first wake-lock time duration to said time duration of screen-off by said device; and

calculating said CPU utilization of applications being as a ratio value of a difference between said second CPU time slice and said first CPU time slice to said time duration of screen-off by said device.

[Claim 6] A device for detecting power consumption of an application, comprising:

a detecting module, used for detecting, when a screen of a mobile terminal is turned on, wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off;

an abnormal prompting module, used for prompting that power consumption of an application is abnormal when said application satisfies at least one of following conditions:

said wakeup times reaches a first threshold value;

said wake-lock time duration reaches a second threshold value; and

said CPU utilization reaches a third threshold value.

[Claim 7] The device for detecting power consumption of an application according to claim 6, wherein, said detecting module is used for detecting whether said time duration of screen-off reaches a preset value of time duration, if it does, then detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off.

[Claim 8] The device for detecting power consumption of an application according to claim 6, further comprises:
a recording module, used for recording, when said screen of said mobile terminal is turned off, current first wakeup times, first wake-lock time duration and first CPU time slice of applications.

[Claim 9] The device for detecting power consumption of an application according to claim 8, wherein, said recording module is further used for recording, when said screen of said mobile terminal is turned on, current second wakeup times, second wake-lock time duration and second CPU time slice of applications.

- [Claim 10] The device for detecting power consumption of an application according to claim 9, wherein, said detecting module is used for calculating said wakeup times of applications being as a ratio value of a difference between said second wakeup times and said first wakeup times to said time duration of screen-off; calculate said wake-lock time duration of applications being as a ratio value of a difference between said second wake-lock time duration and said first wake-lock time duration to said time duration of screen-off; and calculate said CPU utilization of applications being as a ratio value of a difference between said second CPU time slice and said first CPU time slice to said time duration of screen-off.
- [Claim 11] The device for detecting power consumption of an application according to any one of claims 6-10, wherein, said device is a mobile terminal.
- [Claim 12] The device for detecting power consumption of an application according to claim 11, wherein, said mobile terminal is a mobile phone or a personal digital assistant or a tablet PC.
- [Claim 13] A non-transitory computer readable storage medium, including computer executable instructions, said computer executable instructions are used for executing a method for detecting power consumption of an application, wherein, the method comprises:
when a screen of a mobile terminal is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in a time duration of screen-off by a device for detecting power consumption of an application;
when an application satisfies at least one of following conditions, prompting that power consumption of the application is abnormal by said device:
said wakeup times reaches a first threshold value;
said wake-lock time duration reaches a second threshold value; and
said CPU utilization reaches a third threshold value.
- [Claim 14] The non-transitory computer readable storage medium according to claim 13, wherein, said step of when a screen of a mobile device is turned on, detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of an application is specified as follows:
when a screen of a mobile terminal is turned on, detecting whether time

duration of screen-off reaches a preset value of time duration by said device, if it does, then detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off.

[Claim 15]

The non-transitory computer readable storage medium according to claim 13, wherein, the method further comprises:

recording, when said screen of mobile terminal is turned off, current first wakeup times, first wake-lock time duration and first CPU time slice of applications by said device.

[Claim 16]

The non-transitory computer readable storage medium according to claim 15, wherein, the method further comprises:

recording, when said screen of mobile terminal is turned on, current second wakeup times, second wake-lock time duration and second CPU time slice of applications by said device.

[Claim 17]

The non-transitory computer readable storage medium according to claim 16, wherein, step of detecting wakeup times, wake-lock time duration and CPU utilization of applications in the time duration of screen-off by a device for detecting power consumption of an application is specified as follows:

calculating said wakeup times of applications being as a ratio value of a difference between said second wakeup times and said first wakeup times to said time duration of screen-off by said device;

calculating said wake-lock time duration of applications being as a ratio value of a difference between said second wake-lock time duration and said first wake-lock time duration to said time duration of screen-off by said device; and

calculating said CPU utilization of applications being as a ratio value of a difference between said second CPU time slice and said first CPU time slice to said time duration of screen-off by said device.

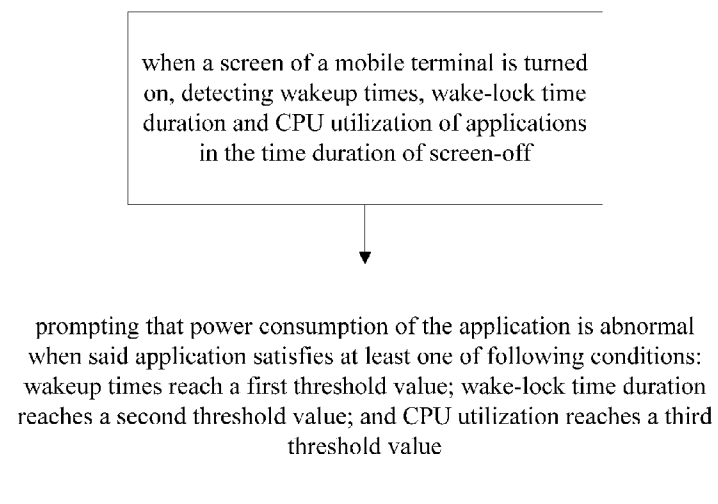


Figure 1

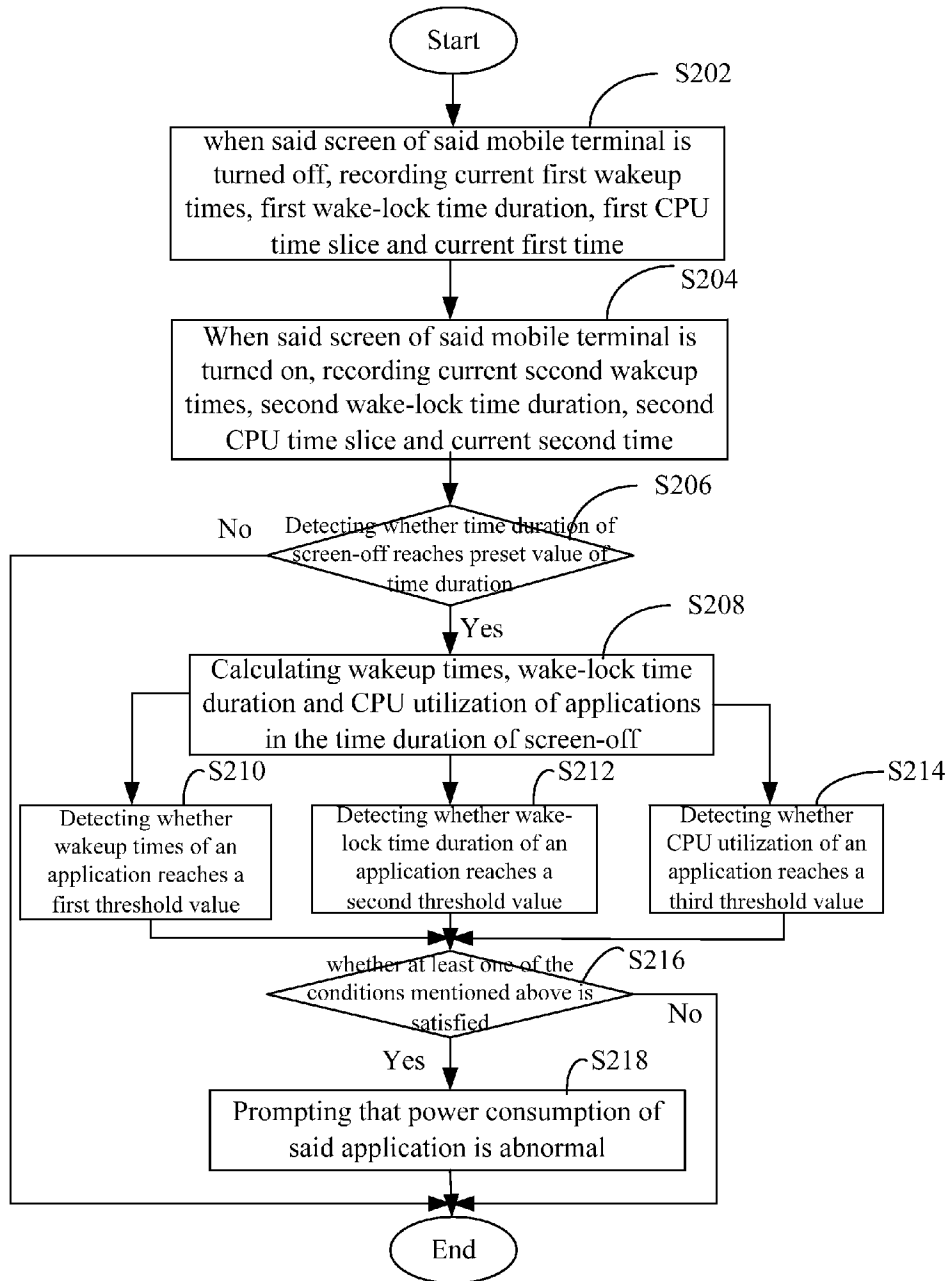


Figure 2

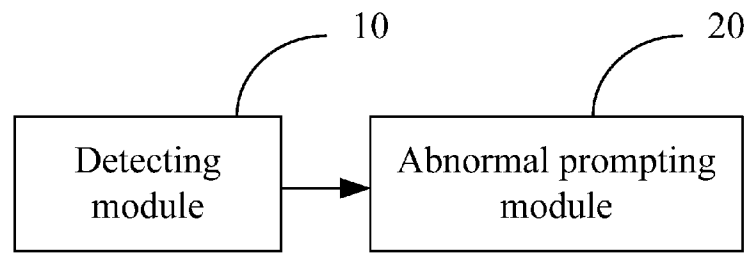


Figure 3

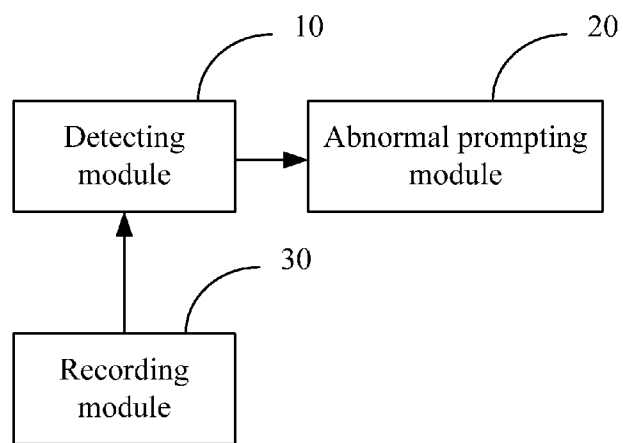


Figure 4



Figure 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/090539

A. CLASSIFICATION OF SUBJECT MATTER

G06F 11/30 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G06F/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI;EPODOC;CNKI;IEEE;CNPAT

Power, consumption, application, screen, detect+, wakeup, wake w lock, cpu, utilization, time, prompt+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 102200942 A (YULONG COMP COMM SCI & TECH) 28 September 2011 (28.09.2011) description, pages 3-5 , figures 1-5	1,6,11-13
Y	CN 102306118 A (ZTE CORP) 04 January 2012 (04.01.2012) description, pages 3-4	1,6,11-13
A	CN 102759673 A (HUIZHOU TCL MOBILE COMM CO., LTD.) 30 October 2012 (30.10.2012) see the whole document	1-17

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

11 March 2014 (11.03.2014)

Date of mailing of the international search report

20 Mar. 2014 (20.03.2014)

Name and mailing address of the ISA/CN

The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088

Facsimile No. 86-10-62019451

Authorized officer

LI, Le

Telephone No. (86-10)62411827

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CN2013/090539

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102200942 A	28.09.2011	None	
CN 102306118 A	04.01.2012	WO 2013029355 A1	07.03.2013
CN 102759673 A	30.10.2012	None	