



(11) **EP 4 123 228 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.06.2024 Bulletin 2024/26

(51) International Patent Classification (IPC):
F24F 1/0014 ^(2019.01) **F24F 11/52** ^(2018.01)
F24F 11/63 ^(2018.01) **F24F 11/79** ^(2018.01)
F24F 13/08 ^(2006.01) **F24F 13/10** ^(2006.01)

(21) Application number: **22186431.7**

(52) Cooperative Patent Classification (CPC):
F24F 1/0014; F24F 11/52; F24F 11/63; F24F 11/79;
F24F 13/08; F24F 13/10; F24F 1/0047; F24F 11/46;
F24F 11/61; F24F 2110/10; F24F 2120/12

(22) Date of filing: **22.07.2022**

(54) **AIR CONDITIONER AND CONTROL METHOD THEREOF**
KLIMAANLAGE UND STEUERUNGSVERFAHREN DAFÜR
CLIMATISEUR ET SON PROCÉDÉ DE FONCTIONNEMENT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

- **Kim, Sungyong**
08592 Seoul (KR)
- **Han, Dongwoo**
08592 Seoul (KR)

(30) Priority: **22.07.2021 KR 20210096540**

(74) Representative: **Ter Meer Steinmeister & Partner**
Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)

(43) Date of publication of application:
25.01.2023 Bulletin 2023/04

(73) Proprietor: **LG Electronics, Inc.**
Yeongdeungpo-gu
Seoul 07336 (KR)

(56) References cited:
EP-A1- 3 450 868 GB-A- 2 513 694
US-A- 5 875 639 US-A1- 2018 209 681

(72) Inventors:
• **Chae, Yeonkyung**
08592 Seoul (KR)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the invention

[0001] The present invention relates to an air conditioner and a control method thereof, and more particularly, to an air conditioner being able to individually controlling an air flow to an area out of a plurality of divided areas, and a control method thereof, whereas the areas are detected by using a camera.

2. Description of the Related Art

[0002] An air conditioner may be installed on a wall surface, a floor surface, or a ceiling of an indoor space depending on a structure. GB 2 513 694 A relates to an indoor unit comprising: human body detection means configured to detect a person within an air-conditioned space; an air inlet through which air is taken into a main body; a plurality of air outlets through which air from the main body is blown out at different positions, respectively; a plurality of vanes provided at the respective air outlets and controlling a direction in which the air is blown out; and an indoor control unit controlling the vane provided at the air outlet that is determined on the basis of detection of the human body detection means and performing a short cycle in which air blown out from the determined air outlet is guided to the air inlet.

[0003] A ceiling type air conditioner may be mounted on a ceiling, and discharge a heat-exchanged air downward. In addition, the ceiling type air conditioner includes a plurality of outlets opened in different directions, and thus may discharge the heat-exchanged air to a plurality of areas.

[0004] In the ceiling type air conditioner, when wind adjusters disposed in or at the plurality of outlets are identically controlled, the same air flow is formed over an entire area. Such an air discharge forms the same air flow over the entire area, so that the temperature can be uniformly changed in a plurality of directions of the indoor space.

[0005] KR 10-2034663 B1 discloses the content of detecting the temperature of a floor, and controlling a wind adjuster disposed in a plurality of outlets based on the temperature of the floor. However, such control can perform a control only according to the temperature of the floor, but there is a problem in that an unnecessary air control can be accomplished for an area where a user does not mainly move or live or cannot live.

SUMMARY OF THE INVENTION

[0006] The present invention has been made in view of the above problems, and provides an air conditioner that maintains a comfortable indoor space in consideration of the living environment of occupants, and a control

method thereof.

[0007] It is an object of the present invention to provide an air conditioner capable of quickly reaching a desired temperature of an indoor space in the living area of an occupant, and maintaining the comfort of the indoor space while minimizing the air flow in a direction of the occupant when it approaches the desired temperature, and a control method thereof.

[0008] It is an object of the present invention to provide an air conditioner capable of increasing the accuracy of classification between living area and non-living area of an indoor space, and a control method thereof.

[0009] The object of the present invention is solved by the features of the independent claims. Preferred embodiments are given in the dependent claims.

[0010] In accordance with an aspect of the present invention, the air conditioner includes: a plurality of outlets opened downward and a plurality of wind adjusters disposed in the plurality of outlets, and a controller is configured to divide the plurality of outlets into a first area outlet facing a living area and a second area outlet facing a non-living area based on accumulated data of the image information obtained from the camera, and adjusts each of the plurality of wind adjusters so that air discharged from the first area outlet and air discharged from the second area outlet are formed differently in the up-and-down side direction, so that the airflows discharged to the living area and the non-living area can be formed differently.

[0011] The air conditioner may further include a temperature sensor for detecting a temperature of the indoor space.

[0012] The controller may adjust the wind adjuster to change airflow in the up-and-down side direction of the first area outlet, when the temperature detected by the temperature sensor is within a set temperature range, so that airflow can be set differently depending on whether the indoor temperature is within or beyond the set temperature range.

[0013] When the temperature detected by the temperature sensor is beyond a set range, the controller may control the wind adjuster so that air discharged to the first area outlet is formed or blown lower in an up-and-down side direction than air discharged to the second outlet, so that direct airflow can be formed in the living area, to thereby reduce the temperature in that first area.

[0014] When the temperature detected by the temperature sensor is within a set range, the controller may adjust the wind adjuster so that air discharged through the first outlet is formed higher in an up-and-down side direction than air discharged through the second area outlet, so that indirect airflow can be formed in the living area.

[0015] The controller may adjust the wind adjuster so that air discharged through the first area outlet is discharged in a first direction toward a ground, when the temperature detected by the temperature sensor is beyond a set range, and may adjust the wind adjuster so that the air discharged to the first area outlet is discharged

in a second direction toward an upper side than the first direction, when the temperature detected by the temperature sensor is within the set temperature range, so that the airflow range can be adjusted in the up-and-down side direction according to the temperature of the indoor air.

[0016] The controller may adjust the wind adjuster so that the air discharged to the second area outlet is discharged in a third direction between the first direction and the second direction in an up-and-down side direction, so that a uniform airflow can be formed in the non-living area.

[0017] The wind adjuster may include a vane which is disposed in the outlet and which may change a disposition to adjust a wind direction of air flowing through the outlet.

[0018] The controller may change a disposition of vane disposed in each of the first area outlet and the second area outlet, so that the airflows of the air discharged to the living area and the non-living area can be formed differently.

[0019] The wind adjuster may comprise a wind direction adjusting fan which is disposed in one side of the outlet, and may adjust a wind direction of air discharged through the outlet by adjusting a rotation speed.

[0020] The controller may adjust a rotation speed of the wind direction adjusting fan disposed in each of the first area outlet and the second area outlet, so that the airflows of the air discharged to the living area and the non-living area can be formed differently.

[0021] According to the invention, the air conditioner includes a timer for measuring a time during which the camera obtains an image.

[0022] The controller classifies a user's living area from accumulated image information obtained from the camera, after a set time measured by the timer, thereby enhancing the accuracy of the classification between the living area and the non-living area.

[0023] The air conditioner may further include an output unit for outputting an image obtained from the camera.

[0024] The controller may divide an image, which may optionally displayed on the output unit, into a plurality of areas, and classify a living area and a non-living area of an occupant.

[0025] The image, which might be preferably displayed on the output unit, may be divided based on a direction in which the outlet faces, so that the living area and the non-living area can be classified based on the area in which the air flow is controlled by the outlet.

[0026] In accordance with another aspect of the present invention as defined in claim 9, a method of controlling an air conditioner is provided, including: obtaining an image of a plurality of areas into which the plurality of outlets discharge air by a camera; determining a living area and a non-living area based on image information obtained by the camera; and adjusting a wind adjuster so that up-and-down side airflows discharged from each

of a first area outlet facing the living area and a second area outlet facing the non-living area are set differently, so that airflow can be controlled for each classified area by classifying the indoor space into the living area and the non-living area.

[0027] The adjusting a wind adjuster may include: detecting a temperature of an indoor space by a temperature sensor; and adjusting the wind adjuster so that airflow of an air discharged from the first area outlet is varied based on a relationship between the temperature of the indoor space sensed by the temperature sensor and a set temperature range, so that airflow can be controlled in detail based on whether the temperature of the indoor space reaches the set temperature range.

[0028] When the temperature of the indoor space sensed by the temperature sensor is within the set temperature range, the wind adjuster may be adjusted to set the airflow of the air discharged from the first area outlet to be higher than airflow of an air discharged from the second area outlet, thereby sending an indirect airflow into the living area.

[0029] When the temperature of the indoor space sensed by the temperature sensor is beyond the set temperature range, the wind adjuster may be adjusted to set the airflow of the air discharged from the first area outlet to be lower than airflow of an air discharged from the second area outlet, thereby sending a direct airflow into the living area.

[0030] The determining a living area and a non-living area may include classifying the plurality of outlets into the first area outlet disposed in the living area and the second area outlet disposed in the non-living area, thereby distinguishing the outlets disposed to face the living area and the non-living area.

[0031] According to the invention, the determining a living area and a non-living area includes: dividing an area displayed on an output unit into a plurality of areas based on a direction in which the plurality of outlets face; accumulating the image information obtained by the camera over the set time; and determining the living area and the non-living area based on the accumulated image information obtained by the camera.

[0032] The adjusting a wind adjuster may include: uniformly maintaining an air flow discharged from the second area outlet; and forming an air flow discharged from the first area outlet to be higher or lower than the air flow discharged from the second area outlet, so that the airflow of the first area outlet disposed in the living area may be varied in the up-and-down side direction.

[0033] The adjusting a wind adjuster may comprise disposing a vane disposed in the first area outlet and a vane disposed in the second area outlet differently, so that the airflows of the air discharged to the living area and the non-living area can be formed differently.

[0034] The adjusting a wind adjuster may comprise adjusting rotation speeds of each of a wind direction adjusting fan disposed in the first area outlet and a wind direction adjusting fan disposed in the second area outlet to

be different from each other, so that the airflows of the air discharged to the living area and the non-living area can be formed differently.

[0035] The details of other embodiments are included in the detailed description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] The above and other objects, features and advantages of the present invention will be more apparent from the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 is a perspective view of an air conditioner of a first embodiment of the present invention;

FIG. 2 is a cross-sectional view of one side of the air conditioner according to the first embodiment of the present invention;

FIG. 3 is a view for explaining an outlet and a wind adjuster of the air conditioner according to the first embodiment of the present invention;

FIG. 4A is a view for explaining a disposition of a first position of the wind adjuster according to the first embodiment of the present invention;

FIG. 4B is a view for explaining a disposition of a second position of the wind adjuster according to the first embodiment of the present invention;

FIG. 4C is a view for explaining a disposition of a third position of the wind adjuster according to the first embodiment of the present invention;

FIG. 5A is a view for explaining an airflow range according to a disposition of the wind adjuster in a heating mode of an air conditioner according to an embodiment of the present invention;

FIG. 5B is a view for explaining an airflow range according to a disposition of the wind adjuster in a cooling mode of an air conditioner according to an embodiment of the present invention;

FIG. 6 is a block diagram of a controller of an air conditioner according to an embodiment of the present invention and a relevant configuration;

FIG. 7A is a view for explaining a corresponding area of an air conditioner and an output unit of an embodiment of the present invention, (a) is a view of the first embodiment in which the output unit is partitioned, and (b) is a view showing a disposition of an outlet of the air conditioner;

FIG. 7B is a view for explaining a corresponding area of an air conditioner and an output unit of an embodiment of the present invention, (a) is a view of a second embodiment in which the output unit is partitioned, and (b) is a view showing a disposition of an outlet of the air conditioner;

FIG. 8A is an image which is a divided image output to the output unit according to an embodiment of the present invention;

FIG. 8B is a view illustrating a cumulative detection area of a human body in a cumulative image of FIG.

8A;

FIG. 8C is a view in which a living area and a non-living area are divided in the output unit based on the view of FIG. 8B;

FIG. 9 is data showing a change in airflow setting for each outlet according to a temperature change in an indoor space;

FIG. 10A is a view for explaining an air flow for each outlet in an indirect air flow of FIG. 9;

FIG. 10B is a view for explaining an air flow for each outlet in a direct air flow of FIG. 9;

FIG. 11 is a flowchart of a method for controlling an air conditioner according to an embodiment of the present invention;

FIG. 12 is a flowchart of a control method of the air conditioner embodying a living area determination step of FIG. 11;

FIG. 13 is a flowchart of a control method of the air conditioner embodying an airflow control step for each outlet of FIG. 11;

FIG. 14 is a cross-sectional view of one side of an air conditioner according to a second embodiment of the present invention;

FIG. 15A is a view for explaining a disposition of a first position of a wind adjuster according to the second embodiment of the present invention;

FIG. 15B is a view for explaining a disposition of a second position of the wind adjuster according to the second embodiment of the present invention;

FIG. 15C is a view for explaining a disposition of a third position of the wind adjuster according to the second embodiment of the present invention;

FIG. 16 is a cross-sectional view of one side of an air conditioner according to a third embodiment of the present invention;

FIG. 17A is a view for explaining a disposition of a first position of a wind adjuster according to the third embodiment of the present invention;

FIG. 17B is a view for explaining a disposition of a second position of the wind adjuster according to the third embodiment of the present invention;

FIG. 17C is a view for explaining a disposition of a third position of the wind adjuster according to the third embodiment of the present invention;

FIG. 18 is a cross-sectional view of one side of an air conditioner according to a fourth embodiment of the present invention;

FIG. 19A is a view for explaining an air flow according to a first rotation speed of a wind adjuster according to the fourth embodiment of the present invention;

FIG. 19B is a view for explaining an air flow according to a second rotation speed of the wind adjuster according to the fourth embodiment of the present invention and

FIG. 19C is a view for explaining an air flow according to a third rotation speed of the wind adjuster according to the fourth embodiment of the present invention

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0037] Advantages and features of the present invention and methods of achieving them will become apparent with reference to the embodiments described below in detail in conjunction with the accompanying drawings.

[0038] However, the present invention is not limited to the embodiments disclosed below, but may be implemented in various different forms, and these embodiments are provided only to allow the disclosure of the present invention to be complete, the present invention being only defined by the scope of the claims. Like reference numerals refer to like elements throughout.

[0039] Hereinafter, the disclosure of the present invention will be described with reference to the drawings for explaining a method of controlling an air conditioner according to embodiments of the present invention.

[0040] A configuration of an air conditioner 100 according to a first embodiment will be described with reference to FIGS 1 to 4C.

[0041] The air conditioner 100 of the present invention may be an air conditioner 100 mounted on a ceiling.

[0042] Referring to FIG. 1, the air conditioner 100 includes an inlet 122 opened downwardly, and an outlet 124 which is disposed around the inlet 122 and also opened downwardly.

[0043] Referring to FIG. 2, the air conditioner 100 includes a case 110 that forms a space therein and is opened downwardly, a panel 120 which is disposed on or in a lower side of the case 110 and forms the inlet 122 and the outlet 124, a fan 112 disposed inside the case 110, a fan motor 114 for rotating the fan 112, a heat exchanger 116 which is disposed inside the case 110, and exchanges the air flowing by the fan 112, and a wind adjuster 130 which is disposed in the outlet 124 and adjusts the wind direction of the flowing air.

[0044] Referring to FIG. 1, in the panel 120, a plurality of outlets 124a, 124b, 124c, and 124d spaced apart from each other are formed around the inlet 122 or at each side of the inlet 122. The outlet 124 includes a first outlet 124a, a second outlet 124b, a third outlet 124c, and a fourth outlet 124d. Each of the first outlet 124a, the second outlet 124b, the third outlet 124c, and the fourth outlet 124d is adjacent to each other, and is disposed in a direction perpendicular to each other based on the inlet 122. In each of the first outlet 124a, the second outlet 124b, the third outlet 124c, and the fourth outlet 124d, a first wind adjuster 130a, a second wind adjuster 130b, a third wind adjuster 130c, and a fourth wind adjuster 130d are disposed.

[0045] Since the configuration of one outlet 124 and the wind adjuster 130 disposed therein that are described below can be applied to the other outlets and the wind direction controlling device disposed therein, a common reference numeral is used.

[0046] Referring to FIG. 3, the wind adjuster 130 includes a first vane 140 connected to two links 160 and

170, and a second vane 150 which is connected to one link that is connected to the first vane 140, and has one side that is rotatably connected to the panel 120. The first vane 140 and the second vane 150 disposed in each of the first outlet 124, the second outlet 124, the third outlet 124, and the fourth outlet 124 may be disposed in different positions.

[0047] The first vane 140 may cover the outlet 124 or may be disposed in the lower side of the outlet 124. The first vane 140 is formed longer than the second vane 150.

[0048] Referring to FIG. 3, the first vane 140 is disposed in the lower side than the second vane 150, in a stop state in which a fan 112 does not operate. The first vane 140 includes a first vane plate 142 for guiding the wind direction of flowing air, and a first link plate 144 which protrudes upward from both ends in the left-right direction of the first vane plate 142 and is connected to a plurality of links 160 and 170.

[0049] The second vane 150 includes a second vane plate 152, a second link plate 154 that protrudes upward from both ends in the left-right direction of the second vane plate 152 and is connected to a third link 180, and a connector 156 which is disposed in the left-right direction of the second vane plate 152 and connected to the panel 120. The second vane plate 152 may be formed in a curved shape. However, as another embodiment, the second vane plate 152 may have a flat shape.

[0050] Referring to FIG. 3, the wind adjuster 130 includes a first link 160 rotatably connected to the panel 120 and the first vane 140, and a second link 170 which is spaced apart from the first link 160 and rotatably connected to the panel 120 and the first vane 140. Referring to FIG. 3, the wind adjuster 130 includes a third link 180 rotatably connected to one end of the first link 160 and the second vane 150.

[0051] The first link 160 is rotatably connected to the first vane 140 and the second vane 150. The first link 160 may be connected to a vane motor (not shown) to rotate. The first link 160 includes a panel connection portion 162 rotatably connected to the panel 120, a first link bar 164 which extends from the panel connection portion 162 toward the first vane 140 and has a distal end rotatably connected to the first vane 140, and a second link bar 166 which extends from the panel connection portion 162 toward the second vane 150 and has a distal end rotatably connected to the second vane 150.

[0052] Referring to FIG. 4A, a length 164L of the first link bar 164 is formed to be longer than a length 166L of the second link bar 166. The length 164L of the first link bar 164 is formed to be shorter than a length 170L of the second link 170. The length 164L of the first link bar 164 is formed to be longer than a length 180L of the third link 180.

[0053] The first link 160 is disposed adjacent to the inlet 122 than the second link 170.

[0054] The disposition of the first vane 140 may be changed by the first link 160 and the second link 170. Since the disposition of the first vane 140 is changed by

the first link 160 and the second link 170, the first vane 140 may be disposed to be spaced downward from the outlet 124. The first vane 140 is elevated downward from the outlet 124, and then the inclination is changed in a direction perpendicular to a ground.

[0055] In the second vane 150, a first end 151a moves downward, and then the first end 151a may move inwardly and outwardly according to the disposition of the third link 180.

[0056] Referring to FIG. 3, each of the first vane 140 and the second vane 150 sets an end that is disposed at a distance to the inlet 122 as a first end 141a, 151a, and sets an end that is adjacent to the inlet 122 as a second end 141b, 151b. Hereinafter, the first vane 140 and the second vane 150 will be described.

[0057] The second vane 150 is rotatably connected to the panel 120 in an inward direction than the first vane 140. Here, the direction adjacent to the inlet 122 may be set as an inward direction, and the direction away from the inlet 122 may be set as an outward direction.

[0058] Referring to FIGS. 4A to 4C, the wind adjuster 130 according to a first embodiment may adjust the wind direction of the air discharged through the outlet 124 according to the disposition.

[0059] Referring to FIG. 4A, the wind adjuster 130 may be disposed in a first position P1 for transmitting the air discharged through the outlet 124 in a direction horizontal to a ground. Referring to FIG. 4A, when the wind adjuster 130 is disposed in the first position P1, the first vane 140 may be disposed substantially horizontal to a ground. Referring to FIG. 4A, when the wind adjuster 130 is disposed in the first position P1, the first vane 140 may form a first inclination angle θ_1 within 30 degrees with respect to a virtual horizontal line parallel to the ground. Here, the first inclination angle θ_1 is an inclination angle formed between a virtual horizontal line parallel to the ground and the first vane 140, and may vary depending on the disposition of the first vane 140.

[0060] Referring to FIG. 4A, when the wind adjuster 130 is disposed in the first position P1, the second end 141b of the first vane 140 may be disposed adjacent to the first end 151a of the second vane 150. The second end 141b of the first vane 140 may be disposed to face the first end 151a of the second vane 150.

[0061] Referring to FIG. 4A, when the wind adjuster 130 is disposed in the first position P1, the first inclination angle θ_1 between the first vane 140 and the virtual horizontal line may be formed to be smaller than a second inclination angle θ_2 (or 'second inclination angle between the second vane and a virtual horizontal line') between a virtual line connecting the first end 151a and the second end 151b of the second vane 150 and a virtual horizontal line. Here, the second inclination angle θ_2 is an inclination angle formed between a virtual line connecting the first end 151a and the second end 151b of the second vane 150 and a virtual horizontal line, and may vary depending on the disposition of the second vane 150.

[0062] Accordingly, the air flowing downward through

the outlet 124 may sequentially flow through the second vane 150 and the first vane 140. Referring to FIG. 4A, when the wind adjuster 130 is disposed in the first position P1, the air discharged from the outlet 124 may flow in a direction horizontal to the ground.

[0063] Referring to FIG. 4B, the first vane 140 and the second vane 150 may be disposed in a second position P2 for transmitting the air discharged from the outlet 124 in a direction perpendicular to the ground. Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the first vane 140 may be disposed substantially perpendicular to the ground. Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the first vane 140 may form a first inclination angle θ_1 of 60 degrees or more with respect to a virtual horizontal line parallel to the ground.

[0064] Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the second end 141b of the first vane 140 may be disposed to be spaced apart from the first end 151a of the second vane 150. Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the second end 141b of the first vane 140 may be disposed in the upper side than the first end 151a of the second vane 150.

[0065] Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the second end 141b of the first vane 140 is disposed to face to the upper side than the second end 151b of the second vane 150. Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the first vane 140 and the second vane 150 may be disposed substantially parallel to each other.

[0066] Referring to FIG. 4B, when the wind adjuster 130 is disposed in a second position P2, the first inclination angle θ_1 between the first vane 140 and the virtual horizontal line is formed similarly to the second inclination angle θ_2 between the second vane 150 and the virtual horizontal line. Referring to FIG. 4B, when the wind adjuster 130 is disposed in the second position P2, the air discharged from the outlet 124 may flow in a direction perpendicular to the ground.

[0067] Referring to FIG. 4C, the first vane 140 and the second vane 150 may be disposed in a third position P3 which transmit the air discharged from the outlet 124 in an inclined direction to the ground. When the wind adjuster 130 is disposed in the third position P3, the air discharged through the first vane 140 and the second vane 150 is directed to a lower side than a horizontal wind in the first position P1, and may form an inclined wind that is directed to an upper side than a vertical wind in the second position P2.

[0068] Referring to FIG. 4C, when the wind adjuster 130 is disposed in the third position P3, the first vane 140 may be disposed at an inclination angle between the first vane 140 when the wind adjuster 130 is disposed in the first position P1, and the first vane 140 when the wind adjuster 130 is disposed in the second position P2. Referring to FIG. 4C, when the wind adjuster 130 is disposed

in the third position P3, the first vane 140 may form a first inclination angle θ_1 of 30 degrees or more and 60 degrees or less with respect to a virtual horizontal line parallel to the ground.

[0069] When the wind adjuster 130 is disposed in the third position P3, a spaced distance between the second end 141b of the first vane 140 and the first end 151a of the second vane 150 is formed to be longer than a spaced distance between the second end 141b of the first vane 140 and the first end 151a of the second vane 150 in the first position.

[0070] When the wind adjuster 130 is disposed in the third position P3, a spaced distance between the second end 141b of the first vane 140 and the first end 151a of the second vane 150 is formed to be shorter than a spaced distance between the second end 141b of the first vane 140 and the first end 151a of the second vane 150 when the wind adjuster 130 is disposed in the second position P2.

[0071] When the wind adjuster 130 is disposed in the first position P1, it is possible to form an indirect wind that sends the air discharged through the outlet in a direction horizontal to the ground. When the wind adjuster 130 is disposed in the second position P2, it is possible to form a vertical wind that sends the air discharged through the outlet in a direction perpendicular to the ground. When the wind adjuster 130 is disposed in the third position P3, it is possible to form an inclined wind that sends the air discharged through the outlet into between the indirect wind and the vertical wind.

[0072] Referring to FIGS. 5A and 5B, the air discharged through the outlet 124 may be divided into three directions in an up-and-down side direction by the wind adjuster 130.

[0073] When the wind adjuster 130 is disposed in the first position P1, the air discharged from the outlet 124 may flow in an upward direction. When the wind adjuster 130 is disposed in the second position P2, the air discharged from the outlet 124 may flow in a downward direction. When the wind adjuster 130 is disposed in the third position P3, the air discharged from the outlet 124 may flow in an intermediate direction between the upward direction and the downward direction.

[0074] In the range of up-and-down side airflows according to the first position P1, the second position P2, and the third position P3 of the wind adjuster 130, in the case of third position P3, it is formed to be lower than the airflow at the first position P1, and to be higher than the airflow at the second position P2.

[0075] In a cooling condition and a heating condition, the range of the up-and-down side airflows of the wind adjuster 130 according to the first position P1, the second position P2, and the third position P3 may be different

[0076] Referring to FIGS. 5A and 5B, when the wind adjuster 130 is disposed in the first position P1, the air discharged from the outlet 124 may flow in a first direction D1. Here, the first direction D1 may mean that the angle, which is formed between a direction in which the main

airflow of the air discharged from the outlet 124 flows and a ground, is formed in a range of 0 degrees to 30 degrees. The first direction D1 may be formed in the same manner under the heating condition or the cooling condition.

[0077] Referring to FIGS. 5A and 5B, when the wind adjuster 130 is disposed in the second position P2, the air discharged from the outlet 124 may flow in a second direction D2.

[0078] The second direction D2 may be formed to have a different range under the heating condition and the cooling condition. Referring to FIG. 5A, in the heating condition, the second direction D2 may mean that the angle, which is formed between a direction in which the main airflow of the air discharged from the outlet 124 flows and a ground, is formed in a range of 60 degrees to 90 degrees. Referring to FIG. 5B, in the cooling condition, the second direction D2 may mean that the angle, which is formed between a direction in which the main airflow of the air discharged from the outlet 124 flows and a ground, is formed in a range of 45 degrees to 90 degrees.

[0079] Referring to FIGS. 5A and 5B, when the wind adjuster 130 is disposed in the third position P3, the air discharged from the outlet 124 may flow in a third direction D3.

[0080] The third direction D3 may be formed to have a different range under the heating condition and the cooling condition. Referring to FIG. 5A, in the heating condition, the third direction D3 may mean that the angle, which is formed between a direction in which the main airflow of the air discharged from the outlet 124 flows and a ground, is formed in a range of 30 degrees to 60 degrees. Referring to FIG. 5B, in the cooling condition, the third direction D3 may mean that the angle, which is formed between a direction in which the main airflow of the air discharged from the outlet 124 flows and a ground, is formed in a range of 45 degrees to 60 degrees.

[0081] The angle ranges of the first direction D1, the second direction D2, and the third direction D3 are just an embodiment, and may be set differently depending on a space in which the air conditioner is disposed or a structure of the air conditioner.

[0082] In addition, in FIGS. 5A to 5B, there are three divided areas, but there can be 4 to 6 subdivided areas.

<Relation to a controller>

[0083] The air conditioner of the present invention includes a camera 510 which is disposed in one side of the panel 120, and obtains image information of an indoor space.

[0084] The air conditioner of the present invention may also include an output unit 530 that outputs the image information obtained from the camera 510

[0085] The air conditioner of the present invention preferably includes a temperature sensor 520 that detects the temperature of the indoor space. According to the invention, a controller 500 adjusts the wind adjuster 130 based on the image information obtained from the cam-

era 510

[0086] Referring to FIG. 7A(a), the output unit 530 may be divided into a plurality of areas. The output unit 530 of FIG. 7A(a) may be divided into a plurality of areas (I, II, III, IV, V, VI) which are divided based on a direction in which the plurality of outlets 124a, 124b, 124c, and 124d disposed in the air conditioner of FIG. 7A(b) are directed.

[0087] Referring to FIG. 7A(a), the area displayed on the output unit 530 may be divided into a first area (I), a second area (II), a third area (III), and a fourth area (IV) based on the outlet 124a, 124b, 124c, and 124d shown in FIG. 7A(b). In addition, according to the screen display of the output unit 530, an additional area may be divided into a fifth area (V) and a sixth area (VI) in the outside of the second area (II) and the fourth area (IV).

[0088] Referring to FIG. 7B(a), the area displayed on the output unit 530 may be divided into a first area (I), a second area (II), a third area (III), and a fourth area (IV) based on the outlet 124a, 124b, 124c, and 124d shown in FIG. 7A(b). In addition, an additional area may be divided into a fifth area (V) and a sixth area (VI) in the outside of the second area (II) and the fourth area (IV), and an additional area may be divided into a seventh area (V) and an eighth area (VI) in the outside of the first area (I) and the third area (III).

[0089] The controller 500 may determine the living area of the occupant based on the image obtained by the camera 510. The controller 500 may capture an image photographed by the camera 510, and detect a human body based on the obtained image. In addition, by accumulating position information of the human body based on the accumulated image information, it is possible to determine an area in which the position information of the human body is accumulated as a living area.

[0090] The camera 510 may include an image sensor (not shown) that converts light into an electrical signal. The image sensor may include a plurality of photodiodes corresponding to a plurality of pixels constituting an image. The image sensor may be implemented of a charged coupled device (CCD) sensor or a complementary metal oxide semiconductor (CMOS) sensor, but the present invention is not limited thereto.

[0091] Meanwhile, the air conditioner may further include a lens through which light emitted from a subject passes, a digital signal processor which constructs and processes an image based on a signal output from the image sensor, and the like. Here, the digital signal processor may be configured as at least a portion of the controller 500, or may be configured as a separate processor operated independently of the controller 500. For example, when the digital signal processor is configured as a separate processor, the image processed by the digital signal processor may be stored in a storage unit 540 by the controller 500 intactly or after an additional processing.

[0092] The controller 500 may process the image obtained through the image sensor. For example, the controller 500 may remove noise from an image, or may per-

form signal processing such as gamma correction, color filter array interpolation, color matrix, color correction, and color enhancement for an image.

[0093] The controller 500 may detect an object included in the image using at least one method. For example, the controller 500 may extract a feature point included in the image through a method such as scale invariant feature transform (SIFT), and histogram of oriented gradient (HOG), and may detect an object included in the image based on the extracted feature point. In this case, the controller 500 may detect the object included in the image by determining a boundary of the object through an algorithm such as a support vector machine (SVM), and AdaBoost.

[0094] The controller 500 may detect a motion of an object included in the plurality of images, based on a result of processing the plurality of images. For example, the controller 500 may calculate a motion vector for a plurality of pixels constituting the object detected from the image by using a dense optical flow method, and may compute the motion of the object based on the calculated motion vector. In the present embodiment, it is described that a dense optical flow method is used, but the present invention is not limited thereto, and a sparse optical flow method of calculating a motion vector for some characteristic pixels may be used.

[0095] The controller 500 may determine the amount of activity of the object detected from the image. For example, the controller 500 may determine the amount of activity of the object included in the image, according to a value obtained by dividing the sum of the magnitudes of motion vectors for pixels constituting the object by the number of pixels constituting the object.

[0096] The air conditioner of the present invention may include a storage unit 540 for storing an image obtained from the camera 510 and a timer 550 for measuring an image acquisition time of the camera 510. The storage unit 540 may sequentially store images obtained from the camera 510.

[0097] After a set time measured by the timer 550, the controller 500 may classify the user's living area from the accumulated image information obtained from the camera, thereby increasing the accuracy of the classification between the living area and the non-living area.

[0098] Referring to FIGS. 8A to 8C, based on the image information obtained from the camera 510, the first area (I), the fourth area (IV), and the sixth area (VI) are determined as living area, and the second area (II), the third area (III), and the fifth area (V) may be determined as non-living area. At this time, the outlet 124a and 124d disposed to face the first area (I), the fourth area (IV), and the sixth area (VI) may be set as a first area outlet 124-1, and the outlet 124b and 124c disposed to face the second area (II), the third area (III), and the fifth area (V) may be set as a second area outlet 124 - 2.

[0099] Specifically, as shown in FIG. 8A, the screen displayed on the output unit 530 is divided into a plurality of areas based on the area where the outlet is disposed.

The image shown in FIG. 8A is an image photographed from a ceiling through the camera 510 disposed in one side of the panel 120.

[0100] As shown in FIG. 8B, an area in which a human body is detected is extracted based on the accumulated image information. Based on the data extracted in FIG. 8B, the area divided in the output unit 530 is divided into a living area and a non-living area as shown in FIG. 8C.

[0101] The controller 500 may receive human body detection data including a result of recognizing an occupant's position from the image information obtained from the camera 510, and may accumulate the received human body detection data. The controller 500 may generate a histogram, if a certain number or more of data is accumulated while accumulating and counting human body detection data.

[0102] The controller 500 may use the generated histogram as input data to classify a living area and a non-living area based on machine learning. The machine learning may use a technique such as a support vector machine (SVM) or Adaboost, and more preferably, use a deep learning technique.

[0103] The controller 500 may include an artificial neural network pre-learned by machine learning, generate a histogram for each of a plurality of areas, and use the generated histogram as input data of the artificial neural network to classify the living area and the non-living area.

[0104] In addition, while repeatedly performing the above process, the controller 500 may collect a plurality of classification result, and finally classify the plurality of areas of the indoor space into living area and non-living area based on the collected result. That is, by deriving the final result when the living area classification result is accumulated over a certain number, the reliability of the living area recognition result can be secured, and temporary errors in the non-living area caused by the human body detection error can be removed.

[0105] The controller 500 may adjust a first area wind adjuster 130 disposed in the first area outlet 124-1 disposed in the living area. The controller 500 may adjust a second area wind adjuster 130 disposed in the second area outlet 124-2 disposed in the non-living area.

[0106] The controller 500 may adjust the second wind adjuster 130 to uniformly form a discharge direction of the second area outlet 124-2 disposed in the non-living area. The controller 500 may adjust the first area wind adjuster 130 so that the discharge direction of the first area outlet 124-1 disposed in the living area is formed to be higher or lower than the discharge direction of the second area outlet 124-2.

[0107] The controller 500 may adjust the wind adjuster 130 based on the temperature of the indoor space detected by the temperature sensor 520 and a desired temperature set by a user.

[0108] The controller 500 may adjust the wind adjuster 130 depending on whether the temperature of the indoor space detected by the temperature sensor 520 is within or outside a set temperature range.

[0109] The set temperature range may be set to a value which is obtained by considering a correction temperature for the desired temperature set by a user. The desired temperature may be set by a user. The correction temperature may be set according to a use environment, and the like.

[0110] That is, the set temperature range may be set to a desired temperature $\pm$ a correction temperature. Referring to FIG. 9, when the correction temperature is set to 2 degrees, the controller 500 may determine as the set temperature range from an area that is 2 degrees higher than the desired temperature.

[0111] The controller 500 may adjust the second area wind adjuster 130 so that the air discharged from the second area outlet 124-2 flows in the third direction D3. Referring to FIGS. 10A to 10B, the air discharged from the second area outlet 124-2 may be formed uniformly regardless of the temperature of the indoor space. However, the air discharged from the second area outlet 124-2 may have different up-and-down side airflows depending on the cooling condition or the heating condition.

[0112] The controller 500 may adjust the first area wind adjuster 130 so that the air discharged from the first area outlet 124-1 flows in the first direction D1 or the third direction D3. Referring to FIG. 10A, when the temperature detected by the temperature sensor 520 is beyond the set temperature range, the first area wind adjuster 130 may be controlled so that the air discharged from the first area outlet 124-1 flows in the second direction D2 that is lower than the third direction D3. Referring to FIG. 10B, when the temperature detected by the temperature sensor 520 is within the set temperature range, the first area wind adjuster 130 may be controlled so that the air discharged from the first area outlet 124-1 flows in the first direction D1 that is higher than the third direction D3.

[0113] Hereinafter, a method of controlling the air conditioner will be described with reference to FIGS. 11 to 13.

[0114] The air conditioner is operated, and the camera 510 goes through a step S100 of obtaining image information. The camera 510 may be disposed in one side of the panel 120 to photograph the lower space from a ceiling of an indoor space.

[0115] Thereafter, the controller 500 undergoes a step S200 of determining a living area with respect to a space photographed by the camera 510, based on the accumulated data of image information obtained by the camera 510. In the step S200 of determining the living area, a portion having a high accumulated detection of the human body may be classified as a living area, and the remaining area may be classified as a non-living area. In the step S200 of determining the living area, the plurality of outlets 124a, 124b, 124c and 124d may be classified into a first area outlet 124-1 facing the living area and a second area outlet 124-2 facing the non-living area.

[0116] Referring to FIG. 12, the step S200 of determining as the living area and the non-living area may include a step S210 of detecting a human body with respect to the image obtained from the camera 510, and a step

S220 of accumulating position information of the human body.

[0117] The controller 500 may capture the image photographed by the camera 510, and detect a human body based on the obtained image. In addition, an area in which the position information of the human body is accumulated may be determined as a living area, by accumulating the position information of the human body based on the accumulated image information.

[0118] The controller 500 may determine an area in which the human body information is accumulated as a living area, and may determine the remaining area as a non-living area, based on the plurality of areas partitioned in the output unit 530.

[0119] The step S200 of determining as the living area and the non-living area may include a step S230 of determining whether a set time for the camera 510 to obtain image information has elapsed. When the set time for the camera 510 to acquire image information is elapsed, the controller 500 may divide the indoor space into the living area and the non-living area through the accumulated data of the position information of the human body. When the accumulated position information of the human body is determined based on data over a certain period of time, the accuracy of the occupant's actual life area and non-living area may be improved.

[0120] The controller 500 may perform a step S300 of controlling the airflow for each outlet.

[0121] The controller 500 may set the outlet disposed in a direction toward the living area as the first area outlet 124-1, and set the outlet disposed in a direction toward the non-living area as the second area outlet 124-2, among the plurality of outlets formed in the air conditioner.

[0122] The controller 500 controls the wind adjuster 130 so that the airflow of the air discharged from the first area outlet 124-1 and the airflow of the air discharged from the second area outlet 124-2 are set differently in the up-and-down side direction.

[0123] The wind adjuster 130 may be divided into a first area wind adjuster 130 disposed in the first area outlet 124-1, and a second area wind adjuster 130 disposed in the second area outlet 124-2.

[0124] The step S300 of adjusting the wind adjuster may maintain the airflow discharged from the second area outlet 124-2 uniformly, and may form the airflow discharged from the first area outlet 124-1 to be higher or lower than the air flow discharged from the second area outlet 124-2.

[0125] The step S300 of controlling the airflow for each outlet may include a step S310 of detecting the temperature of the indoor space by a temperature sensor, and a step S320 of determining whether the temperature of the indoor space detected by the temperature sensor is included in the set temperature range.

[0126] When the temperature of the indoor space detected by the temperature sensor 520 is within the set temperature range, the wind adjuster 130 may be controlled

so that the airflow of the air discharged from the first area outlet 124-1 is set to be higher than the airflow of the air discharged from the second area outlet 124-2 (S330). That is, referring to FIGS. 5A and 5B, the wind adjuster 130 may be controlled so that the air discharged from the second area outlet 124-2 flows in the third direction D3, and the air discharged from the first area outlet 124-1 flows in the first direction D1.

[0127] In addition, when the temperature of the indoor space detected by the temperature sensor 520 is beyond the set temperature range, the wind adjuster 130 may be controlled so that the airflow of the air discharged from the first area outlet 124-1 is formed to be lower than the airflow of the air discharged from the second area outlet 124-2 (S340). That is, referring to FIGS. 5A and 5B, the wind adjuster 130 may be controlled so that the air discharged from the second area outlet 124-2 flows in the third direction D3, and the air discharged from the first area outlet 124-1 flows in the second direction D2.

[0128] However, when a user sets an indirect wind as a preferred wind, the wind adjuster 130 may be controlled so that the air discharged from the first area outlet 124-1 flows in the first direction D1, and the air discharged from the second area outlet 124-2 flows in the second direction D2. The user may set a preferred wind through an input unit such as a remote control (not shown). Here, the indirect wind refers to a case in which a vane is disposed so that the air flow is not directly transmitted to a user.

[0129] When the user sets the indirect wind as the preferred wind, only an indirect air flow is set in the first area outlet 124-1 for discharging air to the living area. Accordingly, the first area outlet 124-1 discharges air in the first direction D1. However, when the indoor temperature is beyond the set temperature range, the second area outlet 124-2 for discharging air to the non-living area may discharge air in the second direction D2 so as to quickly reach the set temperature.

[0130] The step S300 of adjusting the wind adjuster may maintain the airflow discharged from the second area outlet 124-2 uniformly, and may form the airflow discharged from the first area outlet 124-1 to be higher or lower than the air flow discharged from the second area outlet 124-2.

<Second embodiment>

[0131] Hereinafter, a configuration of an air conditioner 200 according to a second embodiment will be described with reference to FIGS. 14 and 15C.

[0132] The air conditioner 200 according to the second embodiment is different from the air conditioner 100 according to the first embodiment in a configuration of a wind adjuster 230.

[0133] Accordingly, for the remaining configuration excluding the wind adjuster 230, the description of the air conditioner 100 according to the first embodiment may be substituted.

[0134] The wind adjuster 230 of the air conditioner 200

according to the second embodiment includes one vane 240 disposed in each outlet 224, and a vane motor (not shown) for driving the vane 240. The disposition of the vane 240 is varied by the operation of the vane motor.

[0135] Referring to FIGS. 15A to 15C, the wind adjuster 230 may adjust the wind direction of the air flowing through an outlet 224 by varying the inclination angle of the vanes 240 disposed in the outlet 224. The vane 240 is disposed to close the outlet 224, or to control the wind direction of the air flowing through the outlet 224.

[0136] Referring to FIG. 15A, the wind adjuster 230 may be disposed in a first position P1 in which the vane 240 is disposed substantially parallel to a virtual horizontal line parallel to a ground. When the wind adjuster 230 is disposed in the first position P1, the vanes 240 may form an inclination angle θ within 30 degrees for a virtual horizontal line HL. The inclination angle θ is formed between the vane 240 and the virtual horizontal line HL, and may vary depending on the disposition of the vane 240.

[0137] Referring to FIG. 15B, the wind adjuster 230 may be disposed in a second position P2 in which the vane 240 is disposed substantially perpendicular to a horizontal line parallel to a ground. When the wind adjuster 230 is disposed in the second position P2, an inclination angle θ of 60 degrees or more may be formed for the virtual horizontal line HL.

[0138] Referring to FIG. 15C, the wind adjuster 230 may be disposed in a third position P3 in which the vane 240 forms an angle between the first position P1 and the second position P2. When the wind adjuster 230 is disposed in the third position P3, an inclination angle θ of 30 degrees or more and 60 degrees or less may be formed for the virtual horizontal line HL.

[0139] When the wind adjuster 230 is disposed in the first position P1, an indirect wind that sends the air discharged through the outlet in a direction horizontal to a ground may be formed. When the wind adjuster 230 is disposed in the second position P2, a vertical wind that sends the air discharged through the outlet in a direction perpendicular to the ground may be formed. When the wind adjuster 230 is disposed in the third position P3, an inclined wind that sends the air discharged through the outlet into between the indirect wind and the vertical wind may be formed.

[0140] As in FIGS. 5A to 5B, the air conditioner according to the second embodiment may also send the air discharged from the outlet 224 in the first direction D1, the second direction D2, and the third direction D3, according to the first position P1, the second position P2, and the third position P3 of the wind adjuster 230.

<Third embodiment>

[0141] Hereinafter, the configuration of the air conditioner according to a third embodiment will be described with reference to FIGS. 16 to 17C.

[0142] An air conditioner 300 according to the third em-

bodiment is different from the air conditioner according to the first embodiment in the configuration and operation structure of the wind adjuster. In addition, the shape of outlet and the disposition of vane are different. Accordingly, the remaining configuration excluding the shape of outlet and the wind adjuster may be replaced with the description of the air conditioner according to the first embodiment.

[0143] In the air conditioner 300 according to the third embodiment, a plurality of outlets 324 are formed in the outer circumference of an inlet 322. Here, the inlet 322 has a rectangular shape, and an outlet 324 is formed to be spaced apart from each side forming the inlet 322 to the outside. In addition, the inlet 322 may also have a circular shape. At this time, a plurality of outlets 324 may be formed in a position spaced apart from each other in a radial direction from the outer circumference of the circular inlet 322.

[0144] In the outlet 324 formed in the air conditioner 300 according to the third embodiment, an outer end 324b is disposed in the upper side than an inner end 324a. In addition, a discharge flow path 335 formed in the upper side of the outlet 324 has a structure extending outwardly as it progresses from the upper side to the lower side.

[0145] The wind adjuster 350 of the air conditioner according to the third embodiment includes a vane 340 which is disposed in the panel 320, and protrudes with a variable length to the outlet 324, a vane motor (not shown) which is disposed in the panel 320, and drives the vane 340, and a vane gear 350 which rotates by the vane motor, and is engaged with the vane 340 to move the disposition of the vane 340.

[0146] One end of the vane 340 engaged with the vane gear 350 may have a rack gear structure.

[0147] The vane 340 is disposed in the inner end 324a of the outlet 324. The vane 340 is disposed to protrude outward from the inner end 324a of the outlet 324. The length of the vane 340 protruding to the outlet 324 is varied by the operation of the vane motor.

[0148] The wind adjuster 330 may adjust the wind direction of the air flowing through the outlet 324 according to the length of the vane 340 protruding to the outlet 324.

[0149] Referring to FIGS. 17A to 17C, the wind adjuster 330 may adjust the wind direction of the air flowing through the outlet 324, by varying the length of the vane 340 protruding to the outlet 324.

[0150] Referring to FIG. 17A, the wind adjuster 330 may be disposed in a first position P1 in which the vane 340 protrudes to the outlet 324 to the maximum. When the wind adjuster 330 is disposed in the first position P1, the vane 340 may protrude to the maximum of the protruding range. Accordingly, when the wind adjuster 330 is disposed in the first position P1, the air flowing through the discharge flow path 335 may be guided in a direction horizontal to a ground. When the wind adjuster 330 is disposed in the first position P1, the vanes 340 is disposed to be lower than the outer end 324b of the outlet

324. Therefore, the air discharged through the outlet 324 may flow in a direction horizontal to the ground along the vane 340.

[0151] Referring to FIG. 17B, the wind adjuster 330 may be disposed in a second position P2 in which the vane 340 does not protrude to the outlet 324. When the wind adjuster 330 is disposed in the second position P2, it is disposed so as not to be exposed to the outlet 324. Accordingly, when the wind adjuster 330 is disposed in the second position P2, the air flowing through the discharge flow path 335 may be discharged in a direction substantially perpendicular to a ground through the outlet 324. However, according to the shape of the discharge flow path 335, the air flowing through the outlet 324 is able to flow at some oblique angles to the ground.

[0152] Referring to FIG. 17C, the wind adjuster 330 is disposed in a third position P3 in which it protrudes to be shorter than a protrusion length of the vane 340 which is disposed in the first position P1. When the wind adjuster 330 is disposed in the third position P3, the vane 340 protrudes to be longer than the length of the vane 340 protruding to the outlet 324 in the second position P2. When the wind adjuster 330 is disposed in the third position P3, it may protrude with a length of 1/3 to 2/3 of a length of the vane 340 protruding to the outlet 324 when the wind adjuster 330 is disposed in the second position P2.

[0153] When the wind adjuster 330 is disposed in the first position P1, an indirect wind that sends the air discharged through the outlet in a direction horizontal to the ground may be formed. When the wind adjuster 330 is disposed in the second position P2, a vertical wind that sends the air discharged through the outlet in a direction perpendicular to the ground may be formed. When the wind adjuster 330 is disposed in the third position P3, an inclined wind that sends the air discharged through the outlet into between the indirect wind and the vertical wind may be formed.

[0154] As in FIGS. 5A to 5B, the air conditioner according to the third embodiment may also send the air discharged from the outlet 324 in the first direction D1, the second direction D2, and the third direction D3, according to the first position P1, the second position P2, and the third position P3 of the wind adjuster 330.

<Fourth embodiment>

[0155] Hereinafter, the configuration of the air conditioner according to a fourth embodiment will be described with reference to FIGS. 18 to 19C.

[0156] An air conditioner 400 according to the fourth embodiment is different from the air conditioner 100 according to the first embodiment in the configuration of the wind adjuster. In the air conditioner according to the fourth embodiment, an inlet 422 may have a circular shape, and an outlet 424 may be formed in an annular shape around the inlet 422.

[0157] The wind adjuster 430 of the air conditioner ac-

cording to the fourth embodiment includes a wind direction adjusting fan 440 disposed in one side of the outlet 424. The wind direction adjusting fan 440 may be disposed in one side of the direction in which the inlet 422 is disposed in an area where the outlet 424 is formed, thereby adjusting the wind direction of the air discharged through the outlet 424.

[0158] The wind direction adjusting fan 440 is disposed in one side of the outlet 424 to control the wind direction of the air discharged through the outlet 424. A plurality of wind direction adjusting fans 440 are spaced apart along the circumferential direction of the annular shape in which the outlet 424 is formed.

[0159] The wind direction adjusting fan 440 may adjust the wind direction of the air flowing to the outlet 424 by changing the pressure by sucking the air around the outlet 424. The wind direction adjusting fan 440 may control the suction amount of air around the outlet 424.

[0160] The wind adjuster 430 may adjust the wind direction of the air discharged through the outlet 424 by adjusting or stopping the rotation speed of the wind direction adjusting fan 440. When the wind direction adjusting fan 440 is stopped, the air flowing to the outlet 424 is affected by the shape of a discharge flow path 425 and the opening direction of the outlet 424. Accordingly, when the wind direction adjusting fan 440 is stopped, the air flowing through the outlet 424 may be discharged in a direction perpendicular to the ground.

[0161] However, when the wind direction adjusting fan 440 is operated, a portion of the air discharged through the outlet 424 is affected by the wind direction adjusting fan 440. Therefore, the air discharged through the outlet 424 may be inclined in a direction horizontal to the ground to flow. In this case, the flow direction of the air flowing through the outlet 424 may be adjusted according to the amount of air sucked into the wind direction adjusting fan 440. When the rotation speed of the wind direction adjusting fan 440 is increased, the amount of air sucked into the wind direction adjusting fan 440 is increased, so that air can flow in a direction parallel to the ground.

[0162] Referring to FIGS. 19A to 19C, the wind adjuster 430 may adjust the wind direction of the air discharged through the outlet 424 by adjusting the operation or rotation speed of the wind direction adjusting fan 440.

[0163] Referring to FIG. 19A, the wind adjuster 430 may rotate at a first set speed for rotating the rotation speed of the wind direction adjusting fan 440 to a maximum value. When the wind adjuster 430 rotates at the first set speed, an indirect wind that sends the air discharged through the outlet in a direction horizontal to the ground may be formed.

[0164] Referring to FIG. 19B, the wind adjuster 430 may rotate at a second set speed for rotating the wind direction adjusting fan 440 to a minimum value or for stopping the rotation. Here, the second set speed corresponds to a speed including '0'. Accordingly, the second set speed of the wind adjuster 430 may include a state in which the wind direction adjusting fan 440 is stopped.

When the wind adjuster 430 rotates at the second set speed, a vertical wind that sends the air discharged through the outlet in a direction perpendicular to the ground may be formed.

[0165] Referring to FIG. 19C, the wind adjuster 430 may rotate at a third set speed for rotating the wind direction adjusting fan 440 at the rotation speed in a range between the first set speed and the second set speed. When the wind adjuster 430 rotates at the third set speed, an inclined wind that sends the air discharged through the outlet into between the indirect wind and the vertical wind may be formed.

[0166] When the wind adjuster 430 rotates at the first rotation speed which is the maximum speed, the indirect wind that sends the air discharged through the outlet in a direction horizontal to the ground may be formed. When the wind adjuster 430 rotates at the second set speed for rotating the wind direction adjusting fan 440 to a minimum value or for stopping the rotation, the vertical wind that sends the air discharged through the outlet in a direction perpendicular to the ground may be formed. When the wind adjuster 430 rotates at the third rotation speed corresponding to between the first rotation speed and the second rotation speed, the inclined wind that sends the air discharged through the outlet into between the indirect wind and the vertical wind may be formed.

[0167] As in FIGS. 5A to 5B, the air conditioner according to the fourth embodiment may also send the air discharged from the outlet 424 in the first direction D 1, the second direction D2, and the third direction D3, according to the first rotation speed, the second rotation speed, and the third rotation speed of the wind adjuster 430.

[0168] The control method of the air conditioner according to FIGS. 11 to 13 may be applied to the air conditioner according to the second to fourth embodiments.

[0169] According to the air conditioner of the present invention and the control method thereof, there are one or more of the following effects.

[0170] First, the airflow of the air discharged to the living area and the non-living area of the occupant can be set differently in the indoor space, thereby enhancing the comfort level in the living area of the occupants.

[0171] Second, the desired temperature can be reached quickly in the living area by adjusting the relative height of the airflow discharged from the indoor space to the living area of the occupant and the airflow discharged to the non-living area.

[0172] In addition, when the indoor space approaches the desired temperature, the discomfort caused by the direct friction of the air discharged to the occupant can be minimized by adjusting the relative height of the airflow discharged to the living area and the airflow discharged to the non-living area.

[0173] Third, the accuracy of the living area determination can be enhanced by classifying the living area and the non-living area based on the accumulated position detection of the human body.

[0174] While the present invention has been particu-

larly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and detail may be made herein without departing from the scope of the present invention as defined by the following claims

Claims

1. An air conditioner comprising:

a case (110) having a space therein and having an open lower side;
a panel (120) disposed in the lower side of the case, and having an inlet (122) and a plurality of outlets (124) disposed around the inlet (122);
a fan (114) disposed inside the case (110), the fan is provided for forming an air flow from the inlet (122) to the plurality of outlets (124);
a plurality of wind adjuster (130), one wind adjuster (130) is disposed in one of the outlets, respectively, the outlets are provided for adjusting a wind direction of air flowing through each of the outlets (124);
a camera (510) disposed in one side of the panel (120), the camera is provided to obtain one or more images of an indoor space;
a controller (500) configured to control one or more of the wind adjusters (130) based on image information obtained from the camera (510); and
a timer (550) for measuring a time during which the camera (510) obtains an image, wherein the controller (500) is configured to assign one or more of the outlets to a first area outlet facing a living area and to a second area outlet facing a non-living area based on image information obtained from the camera, and to adjust one or more of the wind adjusters (130) so that air discharged from the first area outlet and air discharged from the second area outlet are formed differently in the up-and-down side direction, and wherein the controller (500) is configured to classify a user's living area from accumulated image information obtained from the camera (510), after a set time measured by the timer (550).

2. The air conditioner of claim 1, further comprising a temperature sensor (520) for detecting a temperature of the indoor space, wherein the controller (500) is configured to adjust the one or more wind adjusters (130) of the first area outlet to change the airflow in up-and-down side direction, when the temperature detected by the temperature sensor (520) is within a set temperature range.

3. The air conditioner of claim 1 or 2, wherein when the

- temperature detected by the temperature sensor (520) is beyond the set temperature range, the controller (500) is configured to control the one or more wind adjusters (130) so that air discharged to the first area outlet is formed lower in an up-and-down side direction than air discharged to the second area outlet.
4. The air conditioner of claim 1, 2 or 3, wherein when the temperature detected by the temperature sensor (520) is within the set temperature range, the controller (500) is configured to adjust the one or more wind adjusters (130) so that air discharged through the first area outlet is formed higher in an up-and-down side direction than air discharged through the second area outlet.
 5. The air conditioner of any one of the preceding claims, wherein the controller (500) is configured to adjust the one or more wind adjusters (130) so that air discharged through the first area outlet is discharged in a first direction (D1), when the temperature detected by the temperature sensor (520) is within the set temperature range, and to adjust the one or more wind adjusters (130) so that the air discharged to the first area outlet is discharged in a second direction (D2) toward a lower side than the first direction (D1), when the temperature detected by the temperature sensor (520) is beyond the set temperature range, wherein the controller (500) is configured to adjust the one or more wind adjusters (130) so that the air discharged to the second area outlet is discharged in a third direction (D3) between the first direction (D1) and the second direction (D2) in an up-and-down side direction.
 6. The air conditioner of any one of the preceding claims, wherein the wind adjuster (130) comprises a vane (140, 150, 240, 340) disposed in the outlet (124), the vane (140, 150, 240, 340) is configured to change a disposition to adjust a wind direction of air flowing through the outlet (124), and/or the controller (500) is configured to change a disposition of the vane (140, 150, 240, 340) disposed in each of the first area outlet and the second area outlet.
 7. The air conditioner of any one of the preceding claims, wherein the wind adjuster (430) comprises a wind direction adjusting fan (440) disposed in one side of the outlet (424), the wind direction adjusting fan (440) is provided to adjust a wind direction of air discharged through the outlet (424) by adjusting a rotation speed, the wind direction adjusting fan (440) is provided to adjust a wind direction of air discharged through the outlet (424) by changing the pressure by sucking the air around the outlet (424), and/or wherein the controller (500) is configured to adjust a rotation speed of the wind direction adjusting fan (440) disposed in each of the first area outlet and the second area outlet.
 8. The air conditioner of any one of the preceding claims, further comprising an output unit (530) for outputting an image obtained from the camera (510), wherein the controller (500) is configured to divide an image displayed on the output unit (530) into a plurality of areas, and to classify a living area and a non-living area of an occupant, the image displayed on the output unit (530) is divided based on a direction in which the plurality of outlets (124) faces.
 9. A method of controlling an air conditioner (100) having an inlet (122) and a plurality of outlets (124) disposed around the inlet (122), wherein the plurality of outlets (124) discharge air to different areas, the method comprising:
 - obtaining (S100) by a camera (510) an image of a plurality of areas to which the plurality of outlets (124) discharge air;
 - determining (S200) a living area and a non-living area based image information obtained by the camera (510); and
 - adjusting (S300) a wind adjuster (130) so that up-and-down side airflows discharged from each of a first area outlet facing the living area and a second area outlet facing the non-living area are set differently, wherein determining (S200) a living area and a non-living area comprises:
 - dividing an area displayed on an output unit (530) into a plurality of areas based on a direction in which the plurality of outlets (124) face;
 - accumulating the image information obtained by the camera over a set time; and
 - determining the living area and the non-living area based on the accumulated image information obtained by the camera (510).
 10. The method of claim 9, wherein adjusting (S300) a wind adjuster (130) comprises:
 - detecting (S310) a temperature of an indoor space by a temperature sensor (520); and
 - adjusting the wind adjuster (130) so that airflow of an air discharged from the first area outlet is varied based on a relationship between the temperature of the indoor space sensed by the temperature sensor (520) and a set temperature range.
 11. The method of claim 10, wherein when the temperature of the indoor space sensed by the temperature sensor (520) is within the set temperature range

(S330), the wind adjuster (130) is adjusted to set the airflow of the air discharged from the first area outlet to be higher than airflow of an air discharged from the second area outlet, wherein when the temperature of the indoor space sensed by the temperature sensor (520) is beyond the set temperature range (S340), the wind adjuster (130) is adjusted to set the airflow of the air discharged from the first area outlet to be lower than airflow of an air discharged from the second area outlet.

12. The method of any one of claim 9, 10 or 11, wherein adjusting (S300) a wind adjuster comprises:

uniformly maintaining an air flow discharged from the second area outlet; and forming an air flow discharged from the first area outlet to be higher or lower than the air flow discharged from the second area outlet.

13. The method of any one of the preceding claims 9-12, wherein adjusting (S300) a wind adjuster comprises disposing a vane (140, 150, 240, 340) disposed in the first area outlet and a vane (140, 150, 240, 340) disposed in the second area outlet differently.

Patentansprüche

1. Klimaanlage, die Folgendes umfasst:

ein Gehäuse (110), das einen darin ausgebildeten Raum aufweist und eine offene untere Seite hat;
eine Platte (120), die in der unteren Seite des Gehäuses angeordnet ist, und die einen Einlass (122) und mehrere Auslässe (124), die um den Einlass (122) angeordnet sind, aufweist;
ein Gebläse (114), das im Gehäuse (110) angeordnet ist, wobei das Gebläse zum Erzeugen einer Luftströmung vom Einlass (122) zu den mehreren Auslässen (124) vorgesehen ist;
mehrere Windeinstellelemente (130), wobei jeweils ein Windeinstellelement (130) in einem der Auslässe angeordnet ist, wobei die Auslässe zum Einstellen einer Windrichtung von Luft, die durch jeden der Auslässe (124) strömt, vorgesehen sind;
eine Kamera (510), die in einer Seite der Platte (120) angeordnet ist, wobei die Kamera vorgesehen ist, um ein oder mehrere Bilder eines Innenraums zu erhalten;
eine Steuereinheit (500), die konfiguriert ist, ein oder mehrere der Windeinstellelemente (130) auf der Basis von Bildinformationen, die von der Kamera (510) erhalten werden, zu steuern; und
eine Zeitmessvorrichtung (550) zum Messen einer Zeit, während der die Kamera (510) ein Bild

erhält,

wobei die Steuereinheit (500) konfiguriert ist, einen oder mehrere der Auslässe einem Auslass für einen ersten Bereich, der zu einem Wohnbereich zeigt, und einem Auslass für einen zweiten Bereich, der zu einem Nicht-Wohnbereich zeigt, auf der Basis von Bildinformationen, die von der Kamera erhalten werden, zuzuweisen, und ein oder mehrere der Windeinstellelemente (130) so einzustellen, dass Luft, die vom Auslass für den ersten Bereich abgeführt wird, und Luft, die vom Auslass für den zweiten Bereich abgeführt wird, in einer Richtung nach oben und nach unten unterschiedlich erzeugt wird, und wobei die Steuereinheit (500) konfiguriert ist, einen Wohnbereich eines Benutzers aus gesammelten Bildinformationen, die von der Kamera (510) erhalten werden, nach einer eingestellten Zeit, die durch die Zeitmessvorrichtung (550) gemessen wird, zu klassifizieren.

2. Klimaanlage nach Anspruch 1, die ferner einen Temperatursensor (520) zum Detektieren einer Temperatur des Innenraums umfasst, wobei die Steuereinheit (500) konfiguriert ist, dass eine oder die mehreren Windeinstellelemente (130) des Auslasses für den ersten Bereich einzustellen, um die Luftströmung in einer Richtung nach oben und nach unten zu ändern, wenn die Temperatur, die durch den Temperatursensor (520) detektiert wird, innerhalb eines eingestellten Temperaturbereichs liegt.
3. Klimaanlage nach Anspruch 1 oder 2, wobei die Steuereinheit (500) konfiguriert ist, dann, wenn die Temperatur, die durch den Temperatursensor (520) detektiert wird, außerhalb des eingestellten Temperaturbereichs liegt, dass eine oder die mehreren Windeinstellelemente (130) so zu steuern, dass Luft, die zum Auslass für den ersten Bereich abgeführt wird, in einer Richtung nach oben und nach unten tiefer erzeugt wird als Luft, die zum Auslass für den zweiten Bereich abgeführt wird.
4. Klimaanlage nach Anspruch 1, 2 oder 3, wobei die Steuereinheit (500) konfiguriert ist, dann, wenn die Temperatur, die durch den Temperatursensor (520) detektiert wird, innerhalb des eingestellten Temperaturbereichs liegt, dass eine oder die mehreren Windeinstellelemente (130) so einzustellen, dass Luft, die durch den Auslass für den ersten Bereich abgeführt wird, in einer Richtung nach oben und nach unten höher erzeugt wird als Luft, die durch den Auslass für den zweiten Bereich abgeführt wird.
5. Klimaanlage nach einem der vorhergehenden Ansprüche, wobei die Steuereinheit (500) so konfiguriert ist, dass sie das eine oder die mehreren Windeinstellelemente (130) so einstellt, dass Luft, die

- durch den Auslass für den ersten Bereich abgeführt wird, in einer ersten Richtung (D1) abgeführt wird, wenn die Temperatur, die durch den Temperatursensor (520) detektiert wird, innerhalb des eingestellten Temperaturbereichs liegt, und
- dass sie das eine oder die mehreren Windeinstellelemente (130) so einstellt, dass die Luft, die zum Auslass für den ersten Bereich abgeführt wird, in einer zweiten Richtung (D2) zu einer tieferen Seite als die erste Richtung (D1) abgeführt wird, wenn die Temperatur, die durch den Temperatursensor (520) detektiert wird, außerhalb des eingestellten Temperaturbereichs liegt, wobei die Steuereinheit (500) konfiguriert ist, das eine oder die mehreren Windeinstellelemente (130) so einzustellen, dass die Luft, die zum Auslass für den zweiten Bereich abgeführt wird, in einer Richtung nach oben und nach unten in einer dritten Richtung (D3) zwischen der ersten Richtung (D1) und der zweiten Richtung (D2) abgeführt wird.
6. Klimaanlage nach einem der vorhergehenden Ansprüche, wobei das Windeinstellelement (130) einen Flügel (140, 150, 240, 340), der im Auslass (124) angeordnet ist, umfasst, wobei der Flügel (140, 150, 240, 340) konfiguriert ist, eine Anordnung zu ändern, um eine Windrichtung von Luft, die durch den Auslass (124) strömt, zu ändern, und/oder wobei die Steuereinheit (500) konfiguriert ist, eine Anordnung des Flügels (140, 150, 240, 340), der jeweils im Auslass für den ersten Bereich und im Auslass für den zweiten Bereich angeordnet ist, zu ändern.
7. Klimaanlage nach einem der vorhergehenden Ansprüche, wobei das Windeinstellelement (430) ein Windrichtung-Einstellgebläse (440), das in einer Seite des Auslasses (424) angeordnet ist, umfasst, wobei das Windrichtung-Einstellgebläse (440) vorgesehen ist, eine Windrichtung von Luft, die durch den Auslass (424) abgeführt wird, durch Einstellen einer Drehzahl einzustellen, wobei das Windrichtung-Einstellgebläse (440) vorgesehen ist, eine Windrichtung von Luft, die durch den Auslass (424) abgeführt wird, durch Ändern des Drucks durch Ansaugen der Luft um den Auslass (424) einzustellen, und/oder wobei die Steuereinheit (500) konfiguriert ist, eine Drehzahl des Windrichtung-Einstellgebläses (440), das jeweils im Auslass für den ersten Bereich und im Auslass für den zweiten Bereich angeordnet ist, einzustellen.
8. Klimaanlage nach einem der vorhergehenden Ansprüche, die ferner eine Ausgabeeinheit (530) zum Ausgeben eines Bilds, das von der Kamera (510) erhalten wird, umfasst, wobei die Steuereinheit (500) konfiguriert ist, ein Bild, das auf der Ausgabeeinheit (530) angezeigt wird, in mehrere Bereiche zu unterteilen, und einen Wohnbereich und einen Nicht-

Wohnbereich eines Bewohners zu klassifizieren, wobei das Bild, das auf der Ausgabeeinheit (530) angezeigt wird, auf der Basis einer Richtung geteilt wird, in die die mehreren Auslässe (124) zeigen.

9. Verfahren zum Steuern einer Klimaanlage (100), die einen Einlass (122) und mehrere Auslässe (124), die um den Einlass (122) angeordnet sind, aufweist, wobei die mehreren Auslässe (124) Luft zu unterschiedlichen Bereichen abführen, wobei das Verfahren die folgenden Schritte umfasst:

Erhalten (S100) eines Bildes von mehreren Bereichen, zu denen die mehreren Auslässe (124) Luft abführen, durch eine Kamera (510);
Ermitteln (S200) eines Wohnbereichs und eines Nicht-Wohnbereichs auf der Basis von Bildinformationen, die durch die Kamera (510) erhalten werden; und
Einstellen (S300) eines Windeinstellelements (130), so dass Luftströmungen nach oben und nach unten, die jeweils vom Auslass für den ersten Bereich, der zum Wohnbereich zeigt, und vom Auslass für den zweiten Bereich, der zum Nicht-Wohnbereich zeigt, unterschiedlich eingestellt sind, wobei das Ermitteln (S200) eines Wohnbereichs und eines Nicht-Wohnbereichs die folgenden Schritte umfasst:

Teilen eines Bereichs, der auf einer Ausgabeeinheit (530) angezeigt wird, in mehrere Bereiche auf der Basis einer Richtung, in die die mehreren Auslässe (124) zeigen;
Sammeln der Bildinformationen, die durch die Kamera über einen eingestellten Zeitraum erhalten werden; und
Ermitteln des Wohnbereichs und des Nicht-Wohnbereichs auf der Basis der gesammelten Bildinformationen, die durch die Kamera (510) erhalten werden.

10. Verfahren nach Anspruch 9, wobei das Einstellen (S300) eines Windeinstellelements (130) die folgenden Schritte umfasst:

Detektieren (S310) einer Temperatur eines Innenraums durch einen Temperatursensor (520); und
Einstellen des Windeinstellelements (130), so dass eine Luftströmung von Luft, die vom Auslass für den ersten Bereich abgeführt wird, auf der Basis einer Beziehung zwischen der Temperatur des Innenraums, die durch den Temperatursensor (520) gemessen wird, und eines eingestellten Temperaturbereichs geändert wird.

11. Verfahren nach Anspruch 10, wobei dann, wenn die Temperatur des Innenraums, die durch den Temperatursensor (520) gemessen wird, innerhalb des eingestellten Temperaturbereichs (S330) liegt, das Windeinstellelement (130) so eingestellt wird, dass die Luftströmung der Luft, die vom Auslass für den ersten Bereich abgeführt wird, höher als eine Luftströmung von Luft ist, die vom Auslass für den zweiten Bereich abgeführt wird, wobei dann, wenn die Temperatur des Innenraums, die durch den Temperatursensor (520) gemessen wird, außerhalb des eingestellten Temperaturbereichs (S340) liegt, das Windeinstellelement (130) so eingestellt ist, dass es die Luftströmung der Luft, die vom Auslass für den ersten Bereich abgeführt wird, tiefer als die Luftströmung von Luft, die vom Auslass für den zweiten Bereich abgeführt wird, einstellt.
12. Verfahren nach einem der Ansprüche 9, 10 oder 11, wobei das Einstellen (S300) eines Windeinstellelements die folgenden Schritte umfasst:
- konstantes Beibehalten einer Luftströmung, die vom Auslass für den zweiten Bereich abgeführt wird; und
- Erzeugen einer Luftströmung, die vom Auslass für den ersten Bereich abgeführt wird, so dass sie höher oder tiefer als die Luftströmung ist, die vom Auslass für den zweiten Bereich abgeführt wird.
13. Verfahren nach einem der vorhergehenden Ansprüche 9-12, wobei das Einstellen (S300) eines Windeinstellelements das unterschiedliche Anordnen eines Flügels (140, 150, 240, 340), der im Auslass für den ersten Bereich angeordnet ist, und eines Flügels (140, 150, 240, 340), der im Auslass für den zweiten Bereich angeordnet ist, umfasst.

Revendications

1. Climatiseur comportant :

un boîtier (110) ayant un espace dans celui-ci et ayant un côté inférieur ouvert ;
 un panneau (120) disposé dans le côté inférieur du boîtier, et ayant une entrée (122) et une pluralité de sorties (124) disposées autour de l'entrée (122) ;
 un ventilateur (114) disposé à l'intérieur du boîtier (110), le ventilateur étant destiné à former un écoulement d'air depuis l'entrée (122) jusqu'à la pluralité de sorties (124) ;
 une pluralité d'éléments de réglage du vent (130), un élément de réglage du vent (130) étant disposé dans l'une des sorties, respectivement, les sorties étant destinées à régler une direction

du vent de l'air s'écoulant à travers chacune des sorties (124) ;
 un appareil de prise de vues (510) disposé dans un côté du panneau (120), l'appareil de prise de vues étant prévu pour obtenir une ou plusieurs images d'un espace intérieur ;
 une commande (500) configurée pour commander un ou plusieurs des éléments de réglage du vent (130) sur la base d'informations d'image obtenues à partir de l'appareil de prise de vues (510) ; et
 un chronomètre (550) pour mesurer un temps pendant lequel l'appareil de prise de vues (510) obtient une image,
 dans lequel la commande (500) est configurée pour affecter une ou plusieurs des sorties à une première sortie de zone dirigée vers une zone de séjour et à une seconde sortie de zone dirigée vers une zone de non-séjour sur la base d'informations d'image obtenues à partir de l'appareil de prise de vues, et pour régler un ou plusieurs des éléments de réglage du vent (130) de sorte que l'air évacué à partir de la première sortie de zone et l'air évacué à partir de la seconde sortie de zone sont formés différemment dans la direction latérale vers le haut et vers le bas, et dans lequel la commande (500) est configurée pour classer une zone de séjour de l'utilisateur à partir d'informations d'image cumulées obtenues à partir de l'appareil de prise de vues (510), après un temps de consigne mesuré par le chronomètre (550).

2. Climatiseur selon la revendication 1, comportant en outre un capteur de température (520) pour détecter une température de l'espace intérieur, dans lequel la commande (500) est configurée pour régler l'élément ou les éléments de réglage du vent (130) de la première sortie de zone pour changer l'écoulement d'air dans la direction latérale vers le haut et vers le bas, lorsque la température détectée par le capteur de température (520) est dans les limites d'une plage de températures de consigne.

3. Climatiseur selon la revendication 1 ou 2, dans lequel la température détectée par le capteur de température (520) est au-delà de la plage de températures de consigne, la commande (500) étant configurée pour commander l'élément ou les éléments de réglage du vent (130) de sorte que l'air évacué vers la première sortie de zone est formé plus bas dans une direction latérale vers le haut et vers le bas que l'air évacué vers la seconde sortie de zone.

4. Climatiseur selon la revendication 1, 2 ou 3, dans lequel lorsque la température détectée par le capteur de température (520) est dans les limites de la plage de températures de consigne, la commande (500)

est configurée pour régler l'élément ou les éléments de réglage du vent (130) de sorte que l'air évacué à travers la première sortie de zone est formé plus haut dans une direction latérale vers le haut et vers le bas que l'air évacué à travers la seconde sortie de zone.

5. Climatiseur selon l'une quelconque des revendications précédentes, dans lequel la commande (500) est configurée pour régler l'élément ou les éléments de réglage du vent (130) de sorte que de l'air évacué à travers la première sortie de zone est évacué dans une première direction (D1), lorsque la température détectée par le capteur de température (520) est dans les limites de la plage de températures de consigne, et pour régler l'élément ou les éléments de réglage du vent (130) de sorte que l'air évacué vers la première sortie de zone est évacué dans une deuxième direction (D2) vers un côté plus bas que la première direction (D1), lorsque la température détectée par le capteur de température (520) est au-delà de la plage de températures de consigne, dans lequel la commande (500) est configurée pour régler l'élément ou les éléments de réglage du vent (130) de sorte que l'air évacué vers la seconde sortie de zone est évacué dans une troisième direction (D3) entre la première direction (D1) et la deuxième direction (D2) dans une direction latérale vers le haut et vers le bas.
6. Climatiseur selon l'une quelconque des revendications précédentes, dans lequel l'élément de réglage du vent (130) comporte une ailette (140, 150, 240, 340) disposée dans la sortie (124), l'ailette (140, 150, 240, 340) étant configurée pour changer une disposition afin de régler une direction du vent de l'air s'écoulant à travers la sortie (124), et/ou la commande (500) étant configurée pour changer une disposition de l'ailette (140, 150, 240, 340) disposée dans chaque sortie parmi la première sortie de zone et la seconde sortie de zone.
7. Climatiseur selon l'une quelconque des revendications précédentes, dans lequel l'élément de réglage du vent (430) comporte un ventilateur de réglage de direction du vent (440) disposé dans un côté de la sortie (424), le ventilateur de réglage de direction du vent (440) étant prévu pour régler une direction du vent de l'air évacué à travers la sortie (124) en réglant une vitesse de rotation, le ventilateur de réglage de direction du vent (440) étant prévu pour régler une direction du vent de l'air évacué vers la sortie (424) en changeant la pression en aspirant l'air autour de la sortie (424) et/ou dans lequel la commande (500) est configurée pour régler une vitesse de rotation du ventilateur de réglage de direction du vent (440) disposé dans chaque sortie parmi la première sortie de zone et la seconde sortie de zone.

8. Climatiseur selon l'une quelconque des revendications précédentes, comportant en outre une unité de sortie (530) pour délivrer en sortie une image obtenue à partir de l'appareil de prise de vues (510), dans lequel la commande (500) est configurée pour diviser une image affichée sur l'unité de sortie (530) en une pluralité de zones, et pour classer une zone de séjour et une zone de non-séjour d'un occupant, l'image affichée sur l'unité de sortie (530) étant divisée sur la base d'une direction dans laquelle la pluralité de sorties (124) est dirigée.

9. Procédé de commande d'un climatiseur (100) ayant une entrée (122) et une pluralité de sorties (124) disposées autour de l'entrée (122), dans lequel les sorties de la pluralité de sorties (124) évacuent l'air vers différentes zones, le procédé comportant les étapes consistant à :

obtenir (5100), par un appareil de prise de vues (510), une image d'une pluralité de zones vers lesquelles la pluralité de sorties (124) évacue l'air ;

déterminer (5200) une zone de séjour et une zone de non-séjour sur la base d'informations d'image obtenues par l'appareil de prise de vues (510) ; et

régler (S300) un élément de réglage du vent (130) de sorte que des écoulements d'air latéraux vers le haut et vers le bas évacués à partir de chaque sortie parmi une première sortie de zone dirigée vers la zone de séjour et une seconde sortie de zone dirigée vers la zone de non-séjour sont réglés différemment, dans lequel la détermination (S200) d'une zone de séjour et d'une zone de non-séjour comporte de :

diviser une zone affichée sur une unité de sortie (530) en une pluralité de zones sur la base d'une direction dans laquelle les sorties de la pluralité de sorties (124) sont dirigées ;

accumuler les informations d'image obtenues par l'appareil de prise de vues sur un temps de consigne ; et

déterminer la zone de séjour et la zone de non-séjour sur la base des informations d'image accumulées obtenues par l'appareil de prise de vues (510).

10. Procédé selon la revendication 9, dans lequel le réglage (S300) d'un élément de réglage du vent (130) comporte les étapes consistant à :

détecter (S310) une température d'un espace intérieur par un capteur de température (520) ; et

réglage de l'élément de réglage du vent (130) de sorte qu'un écoulement d'air d'un air évacué à partir de la première sortie de zone varie sur la base d'une relation entre la température de l'espace intérieur détectée par le capteur de température (520) et d'une plage de températures de consigne. 5

11. Procédé selon la revendication 10, dans lequel lorsque la température de l'espace intérieur détectée par le capteur de température (520) est dans les limites de la plage de températures de consigne (S330), l'élément de réglage du vent (130) est réglé de manière à placer l'écoulement d'air de l'air évacué à partir de la première sortie de zone pour qu'il soit plus haut que l'écoulement d'air d'un air évacué à partir de la seconde sortie de zone, dans lequel lorsque la température de l'espace intérieur détectée par le capteur de température (520) est au-delà de la plage de températures de consigne (S340), l'élément de réglage du vent (130) est réglé pour placer l'écoulement d'air de l'air évacué à partir de la première sortie de zone pour qu'il soit plus bas que l'écoulement d'air d'un air évacué à partir de la seconde sortie de zone. 10 15 20 25

12. Procédé selon l'une quelconque des revendications 9, 10 ou 11, dans lequel le réglage (S300) d'un élément de réglage du vent comporte les étapes consistant à : 30

maintenir uniformément un écoulement d'air évacué à partir de la seconde sortie de zone ; et former un écoulement d'air évacué à partir de la première sortie de zone pour qu'il soit plus haut ou plus bas que l'écoulement d'air évacué à partir de la seconde sortie de zone. 35

13. Procédé selon l'une quelconque des revendications 9 à 12 précédentes, dans lequel le réglage (S300) d'un élément de réglage du vent comporte de disposer différemment une pale (140, 150, 240, 340) disposée dans la première sortie de zone et une pale (140, 150, 240, 340) disposée dans la seconde sortie de zone. 40 45

50

55

Fig. 1

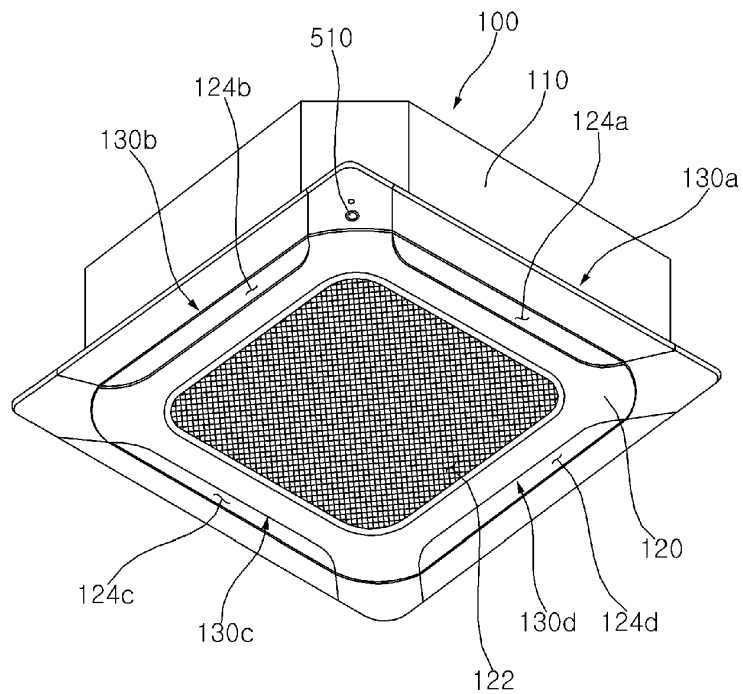


Fig. 2

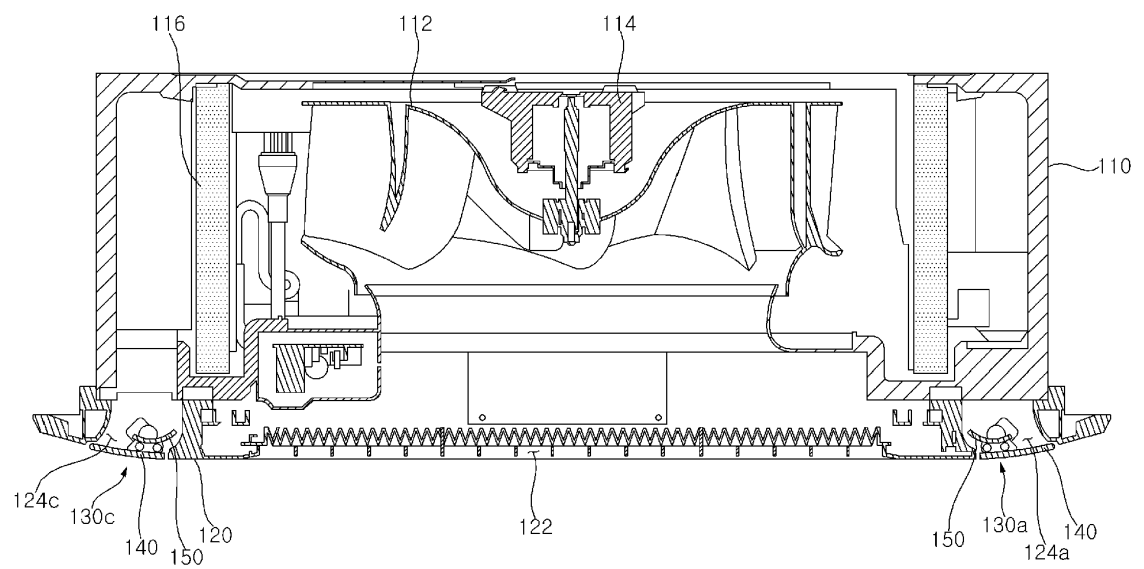


Fig. 3

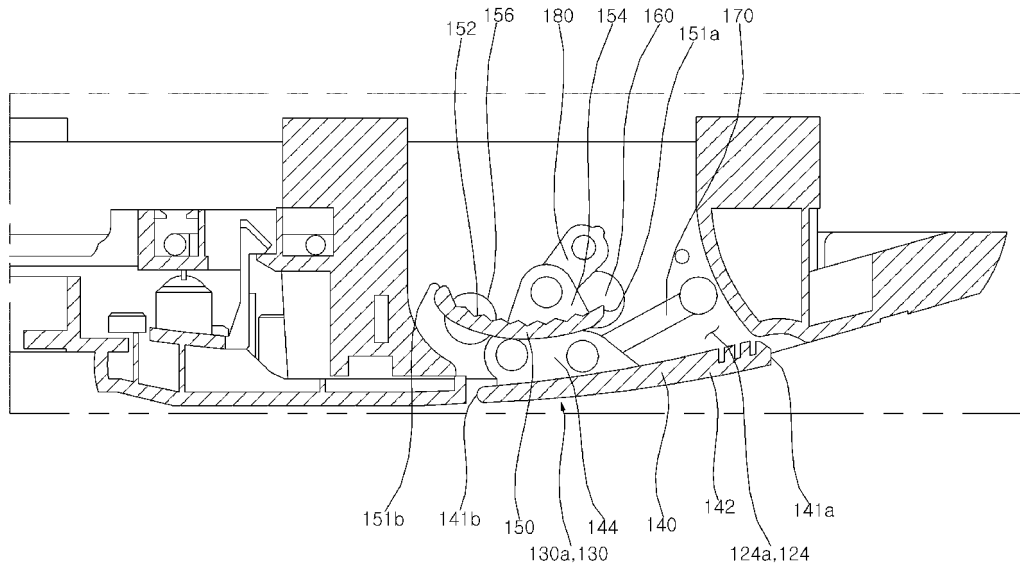


Fig. 4a

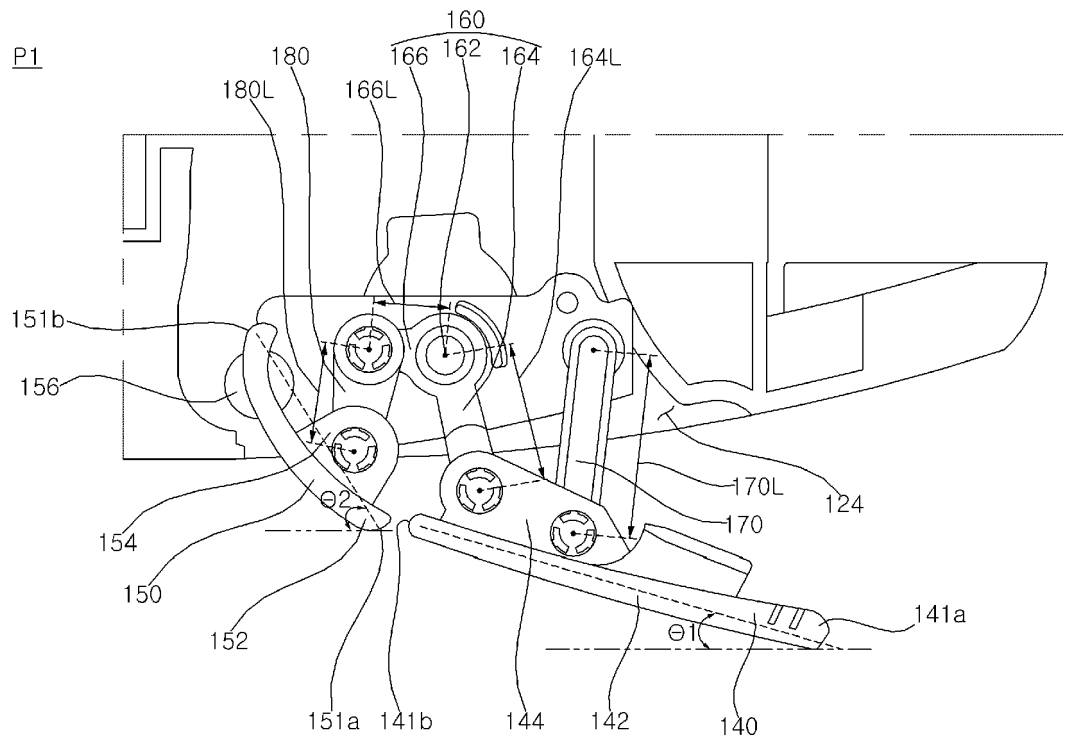


Fig. 4b

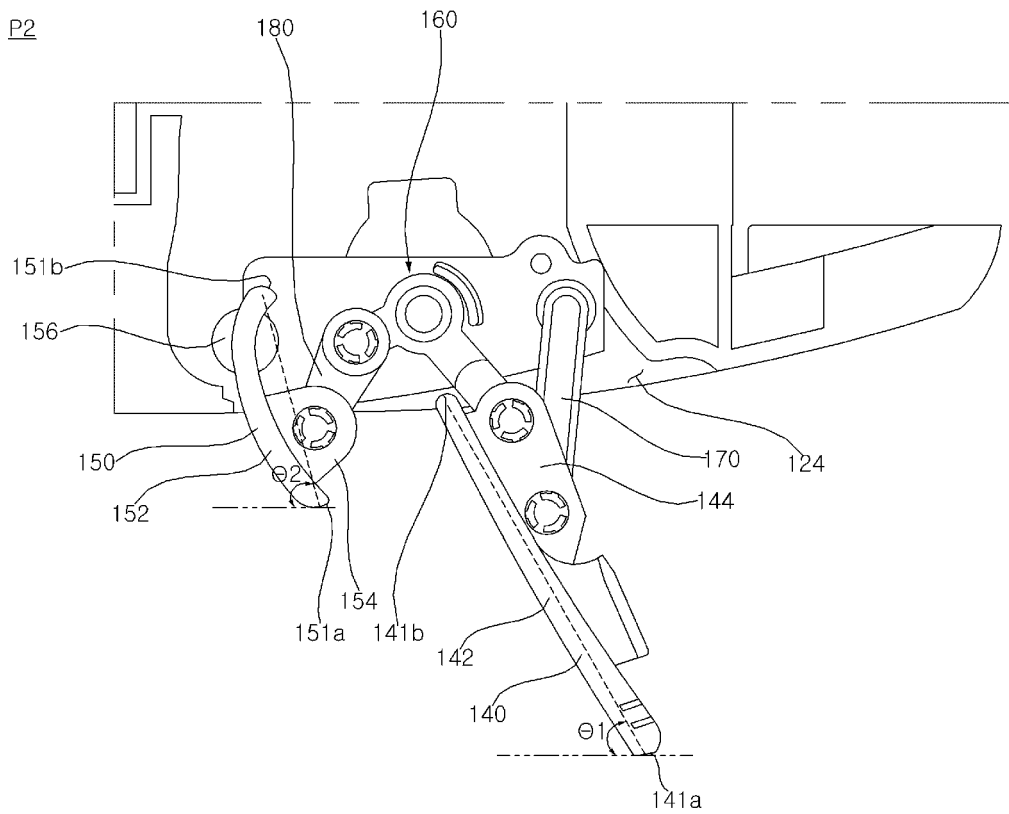


Fig. 4c

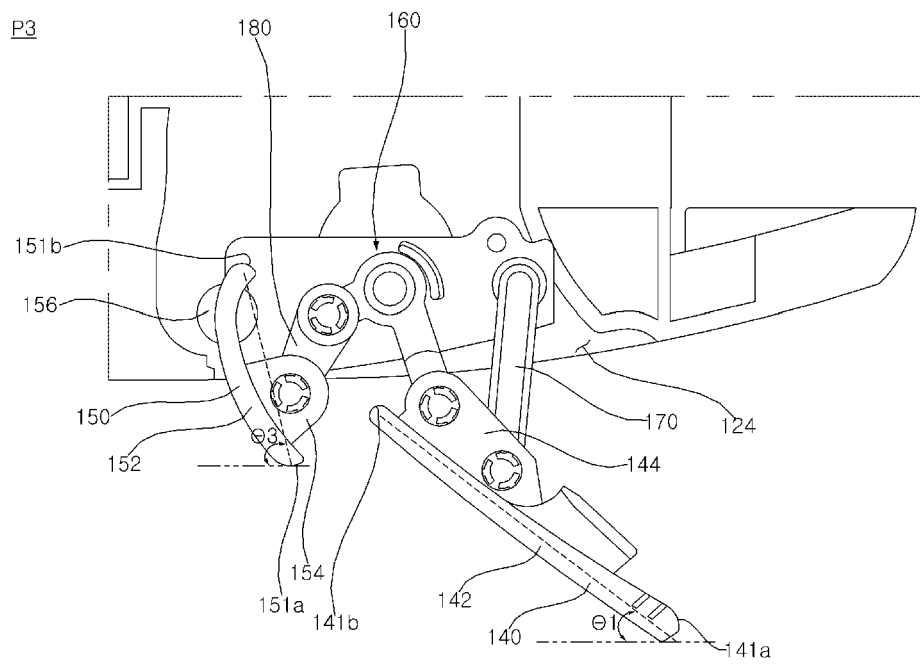


Fig. 5a

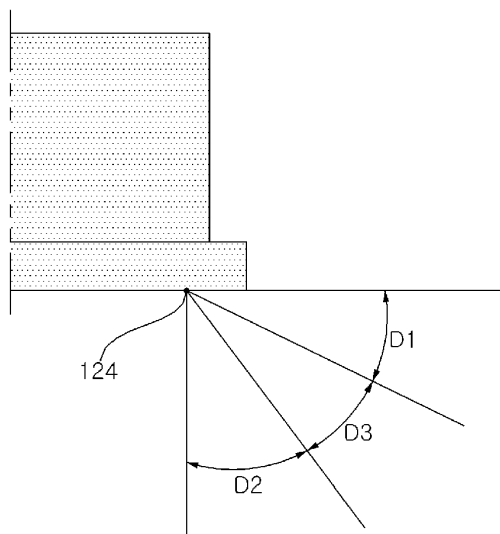


Fig. 5b

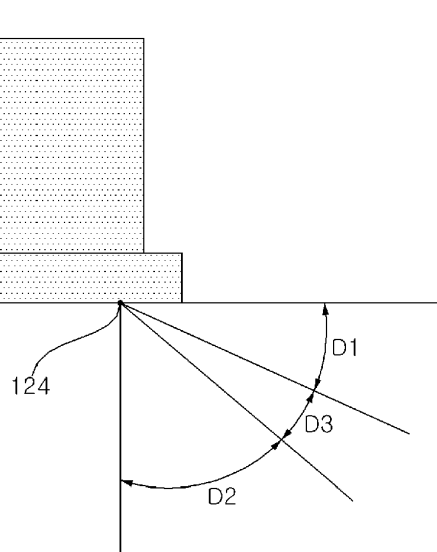


Fig. 6

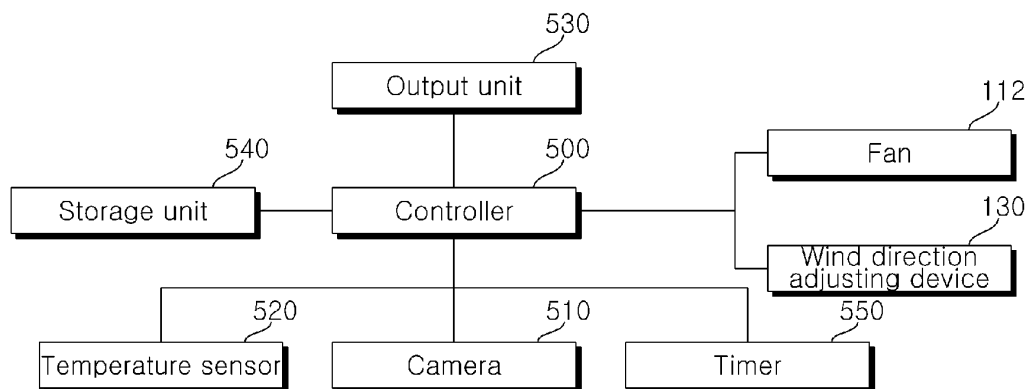


Fig. 7a

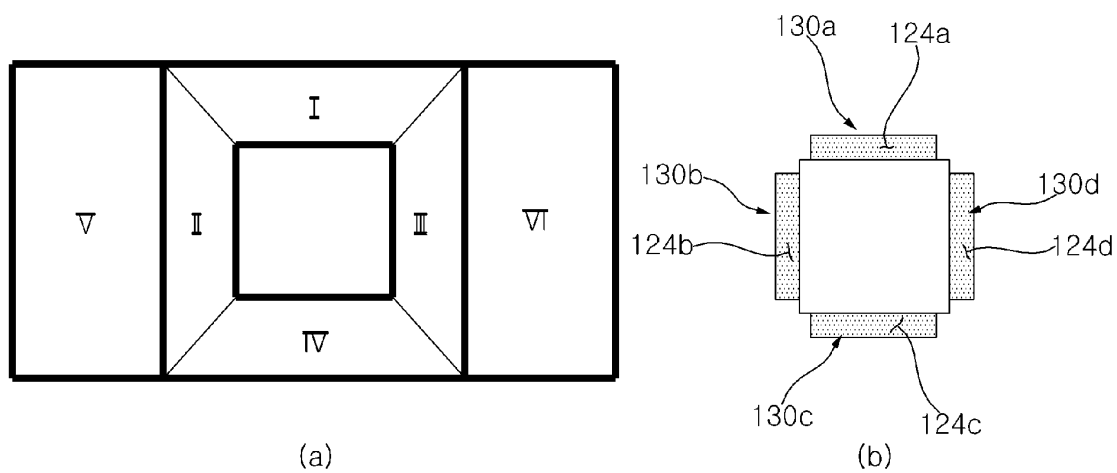


Fig. 7b

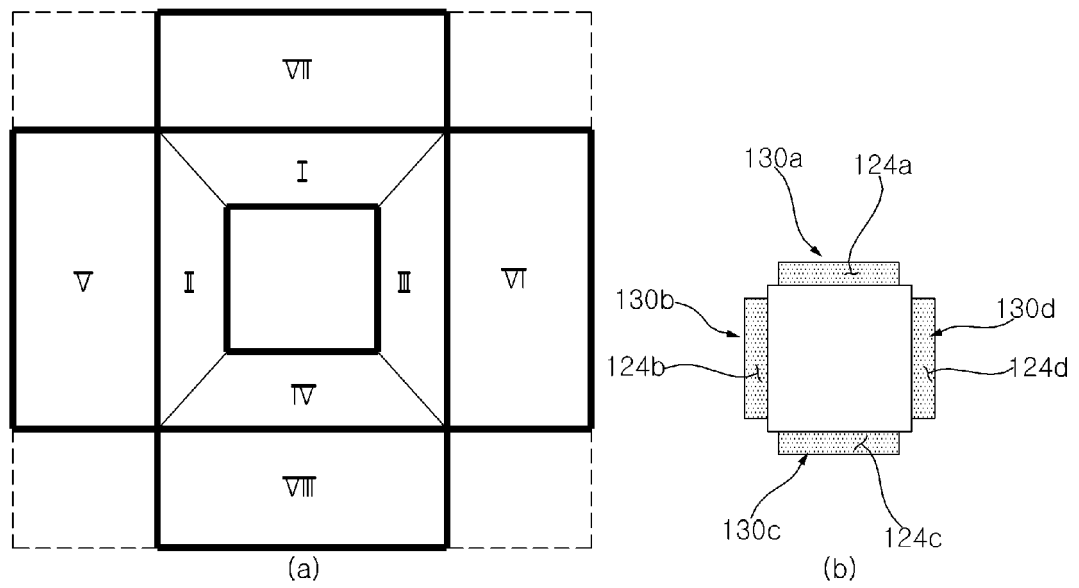


Fig. 8a

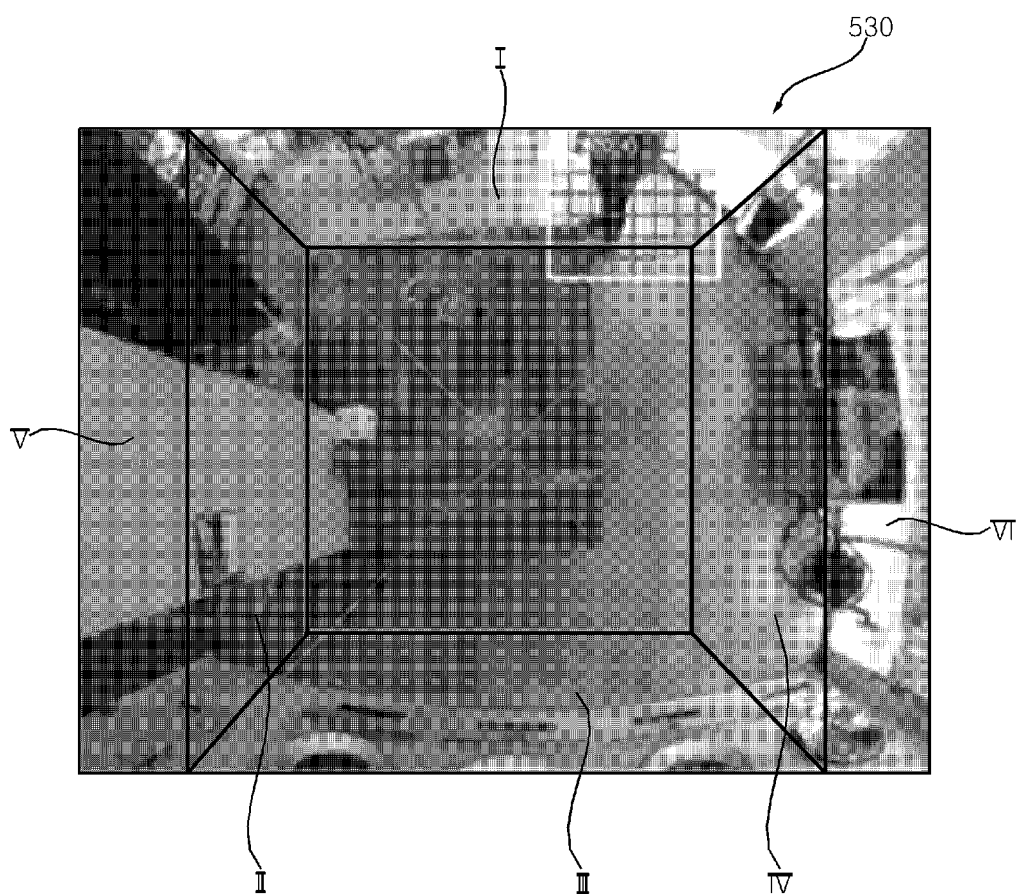


Fig. 8b

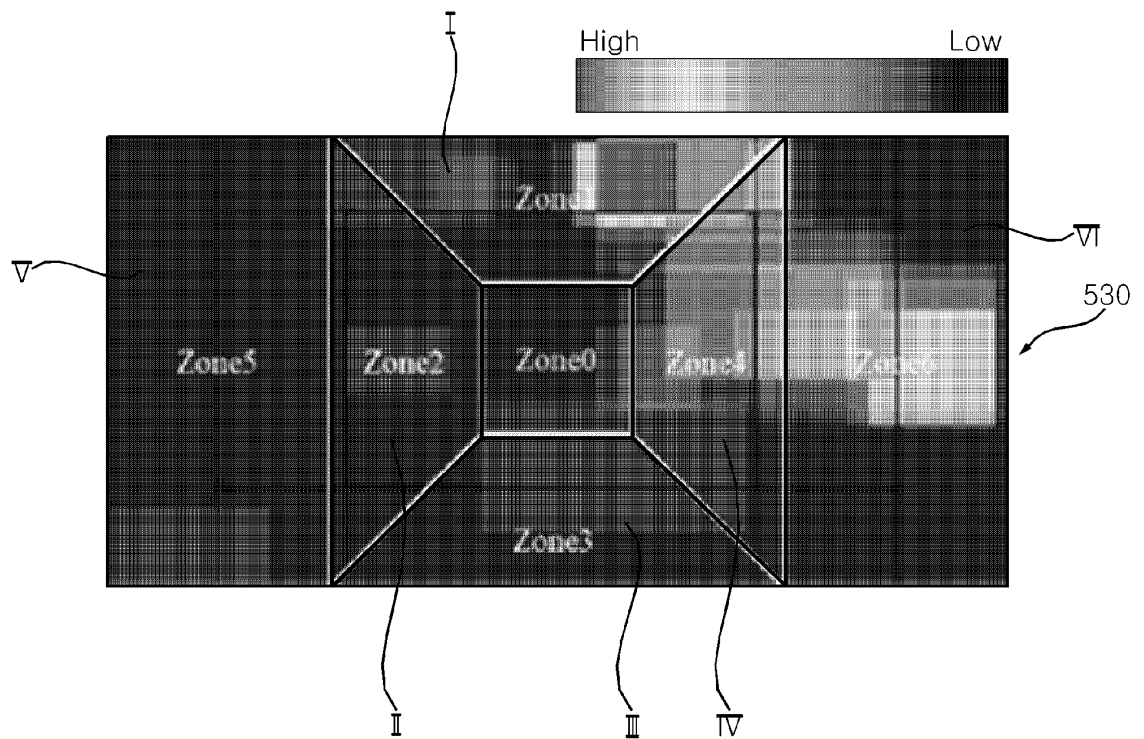


Fig. 8c

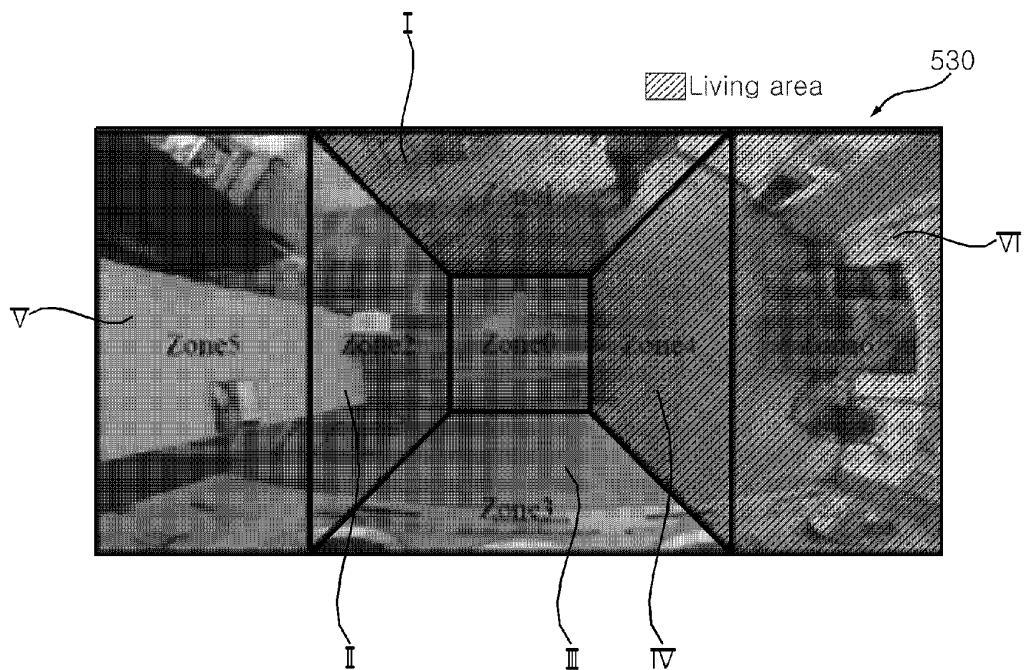


Fig. 9

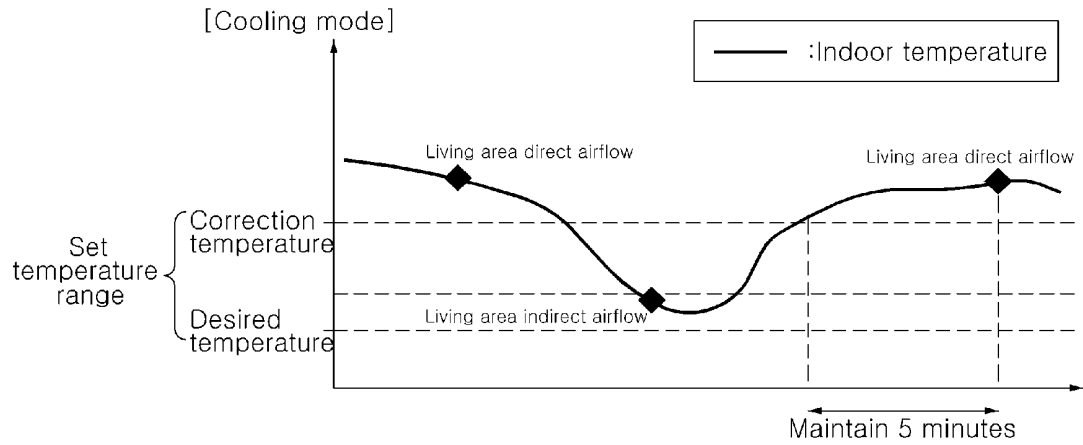


Fig. 10a

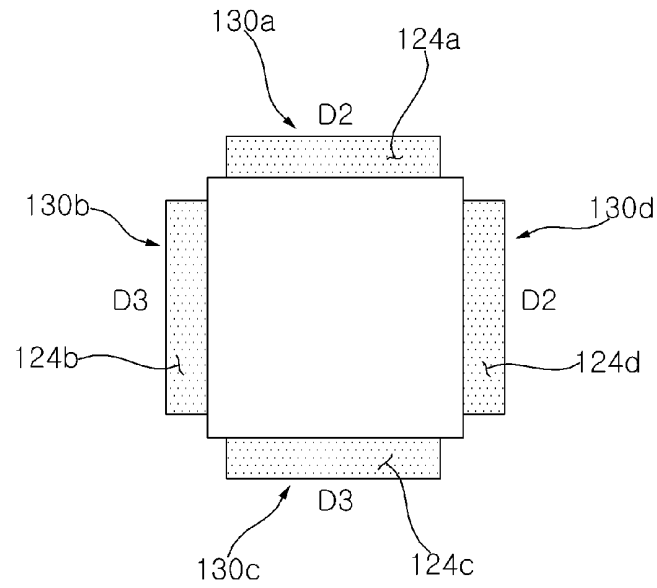


Fig. 10b

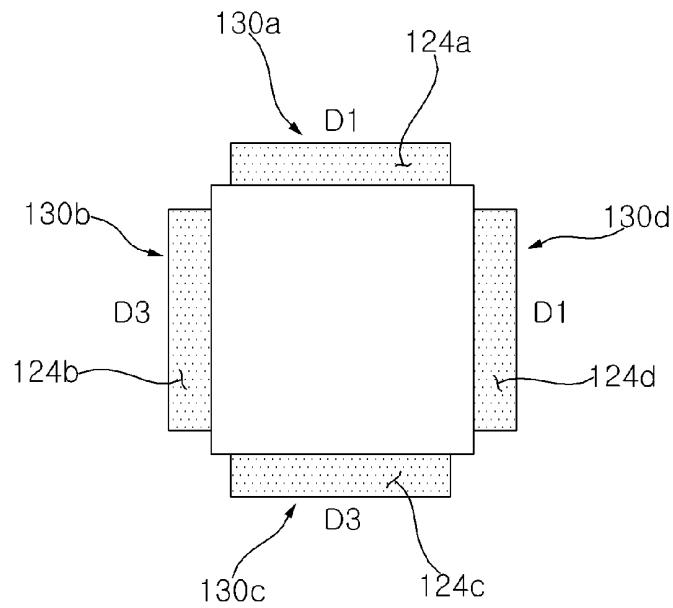


Fig. 11

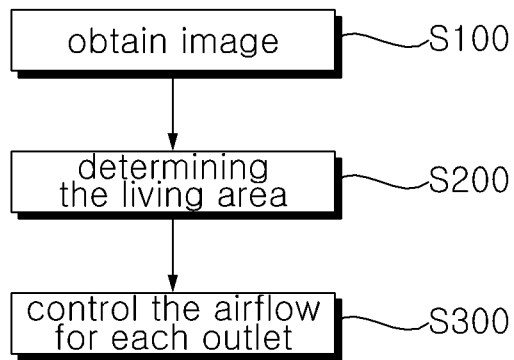


Fig. 12

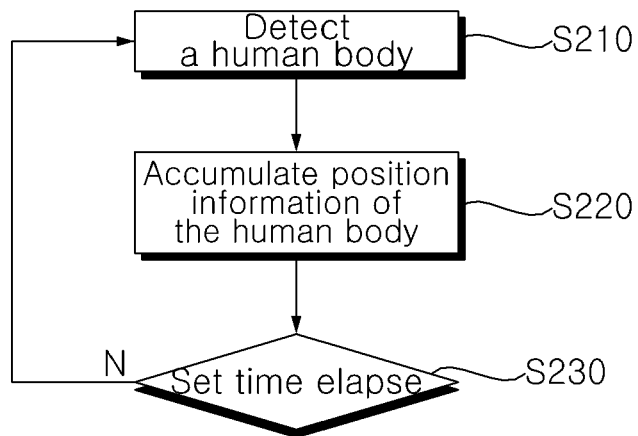


Fig. 13

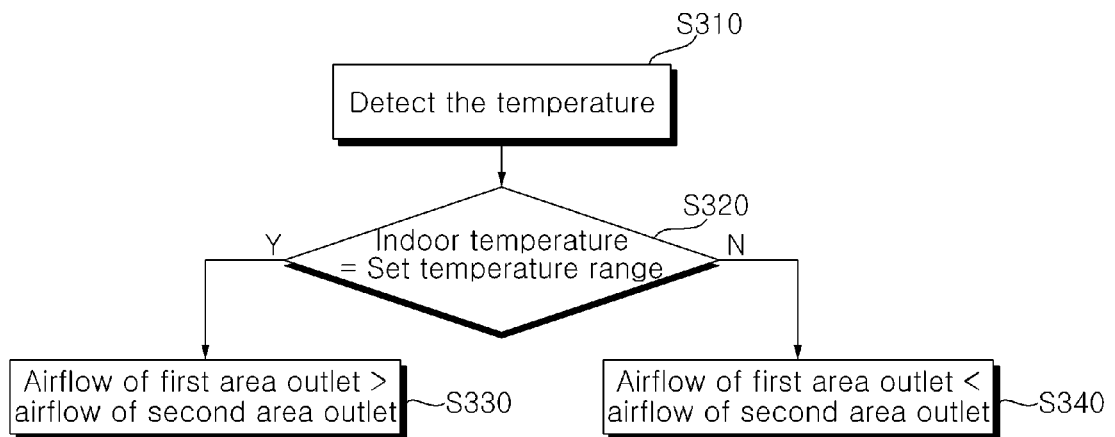


Fig. 14

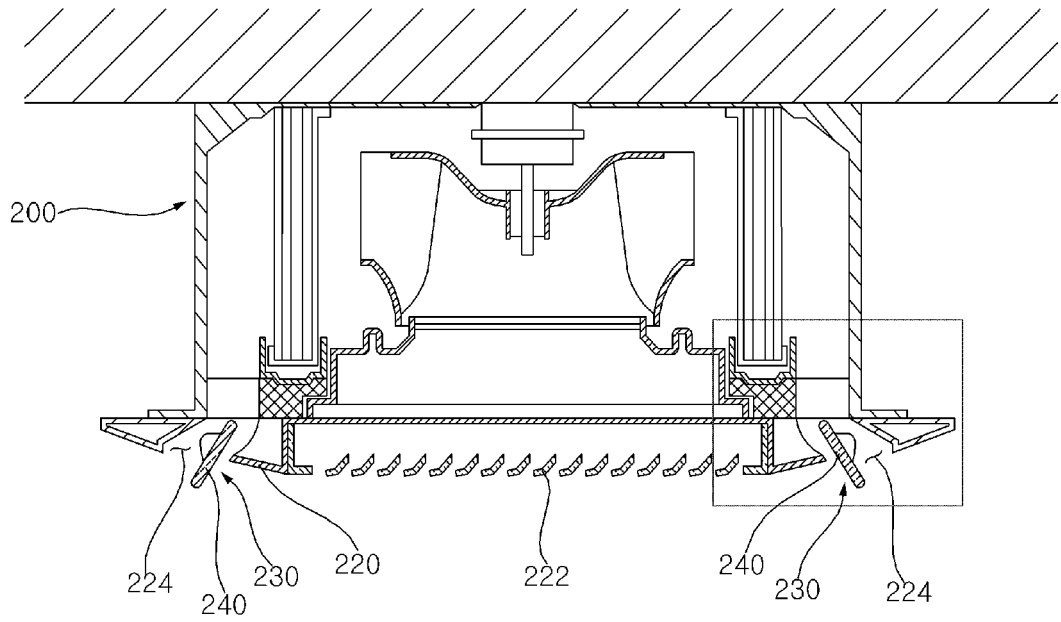


Fig. 15a

P1

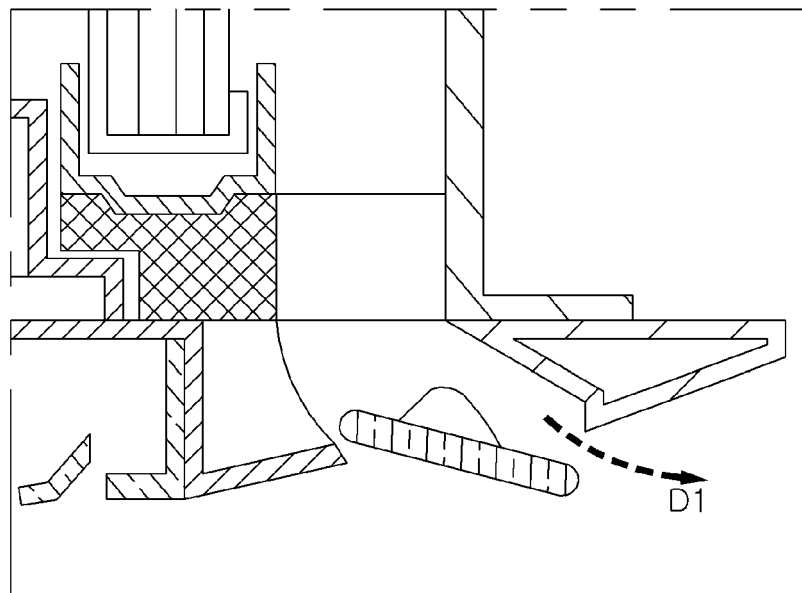


Fig. 15b

P2

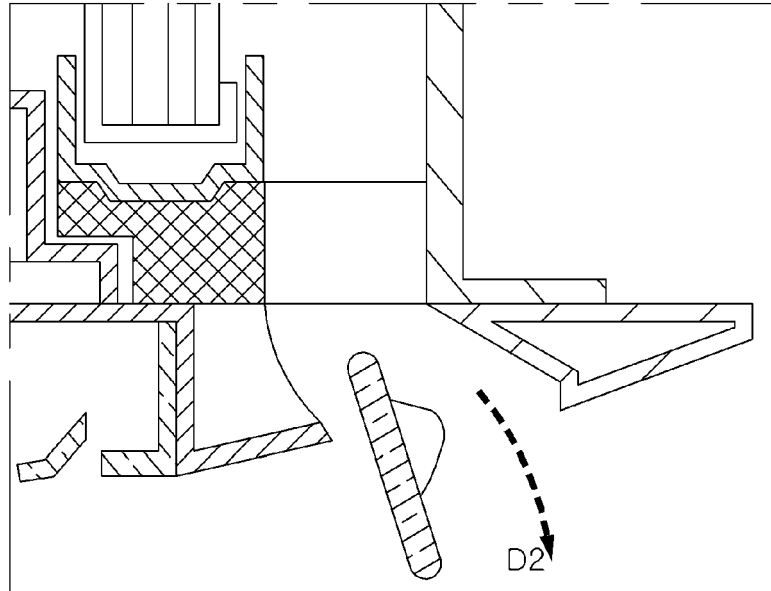


Fig. 15c

P3

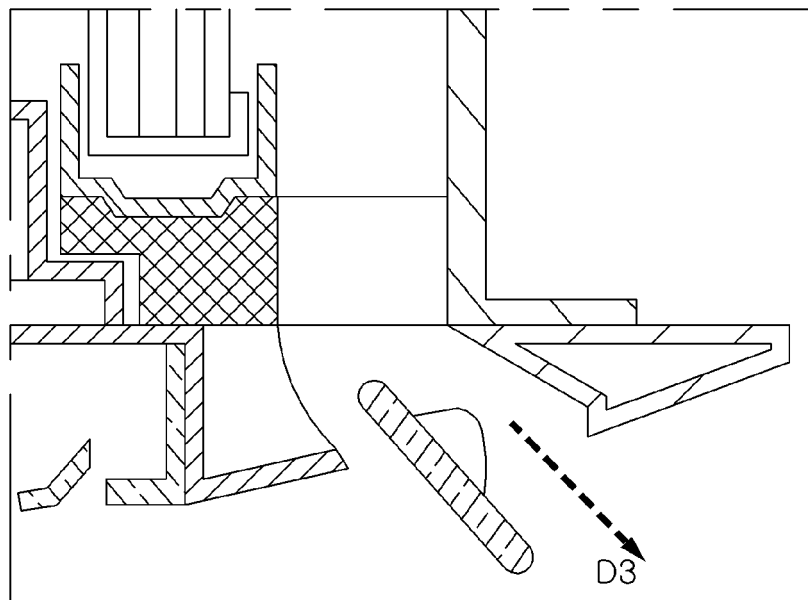


Fig. 16

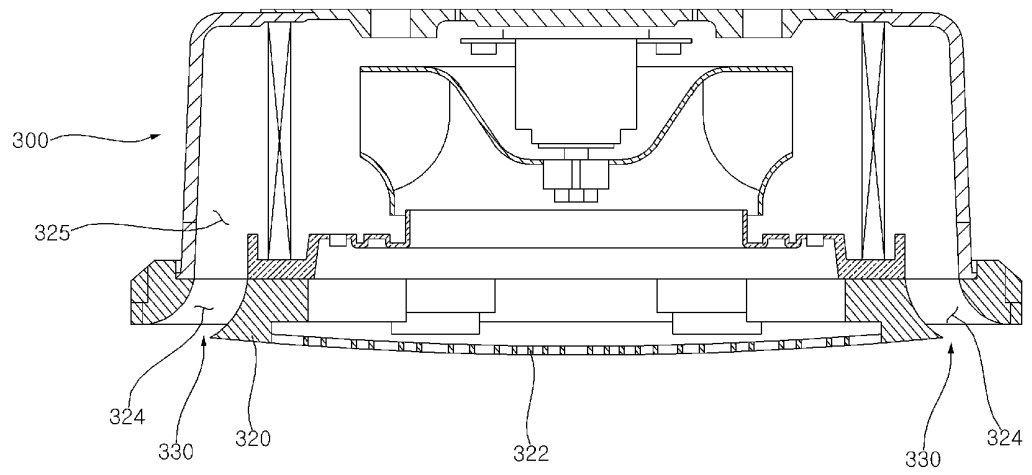


Fig. 17a

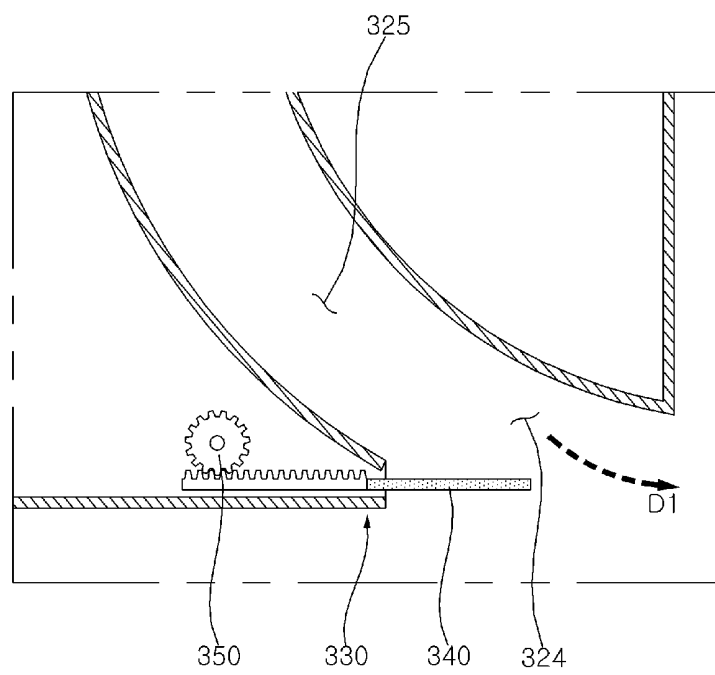


Fig. 17b

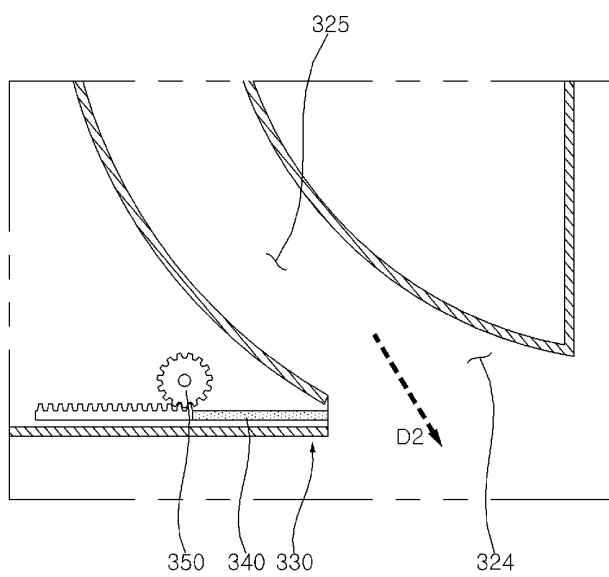


Fig. 17c

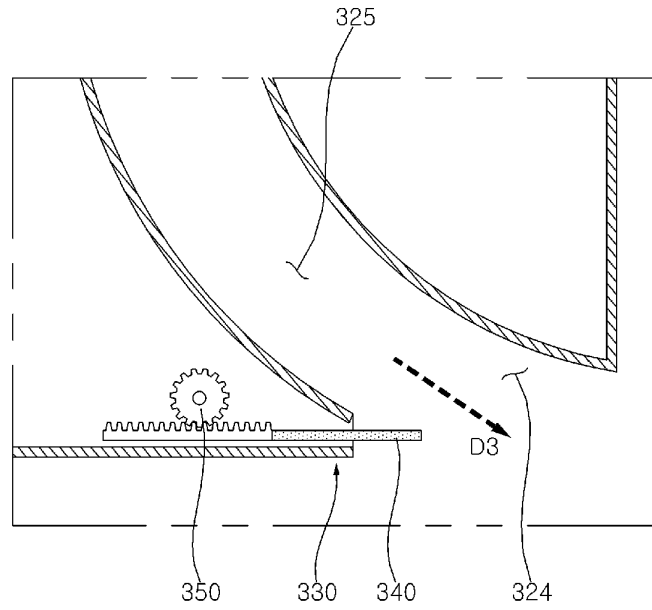


Fig. 18

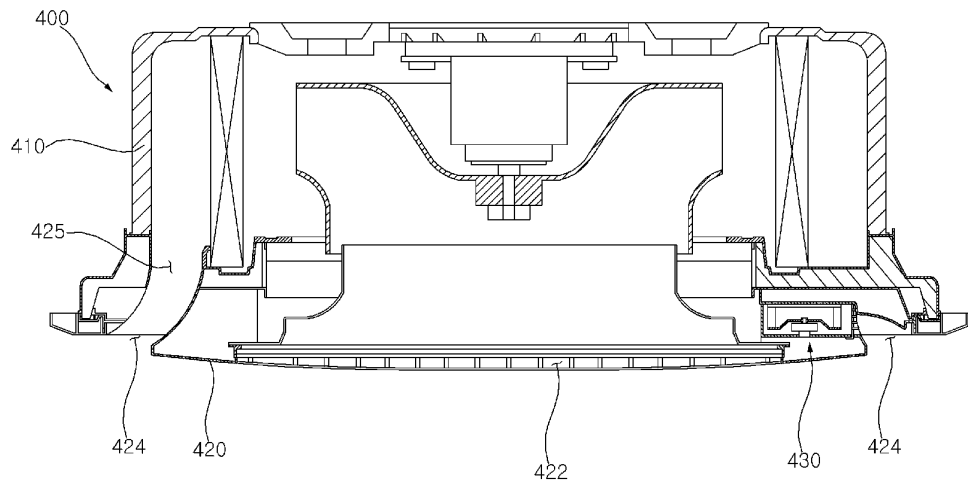


Fig. 19a

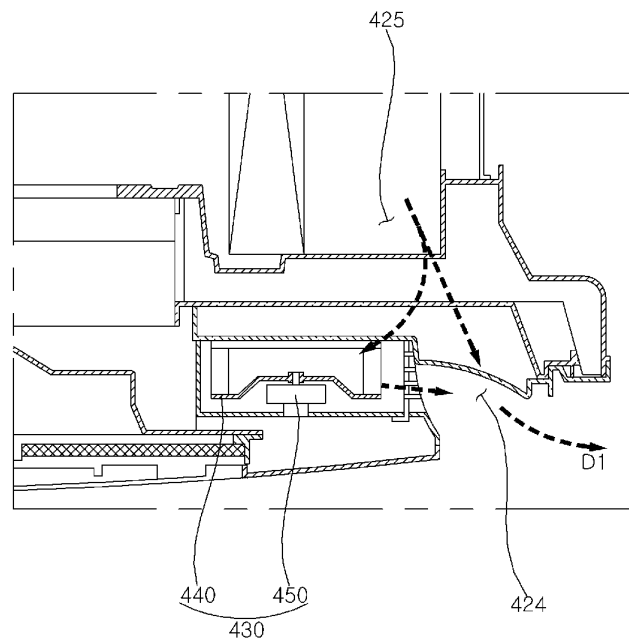


Fig. 19b


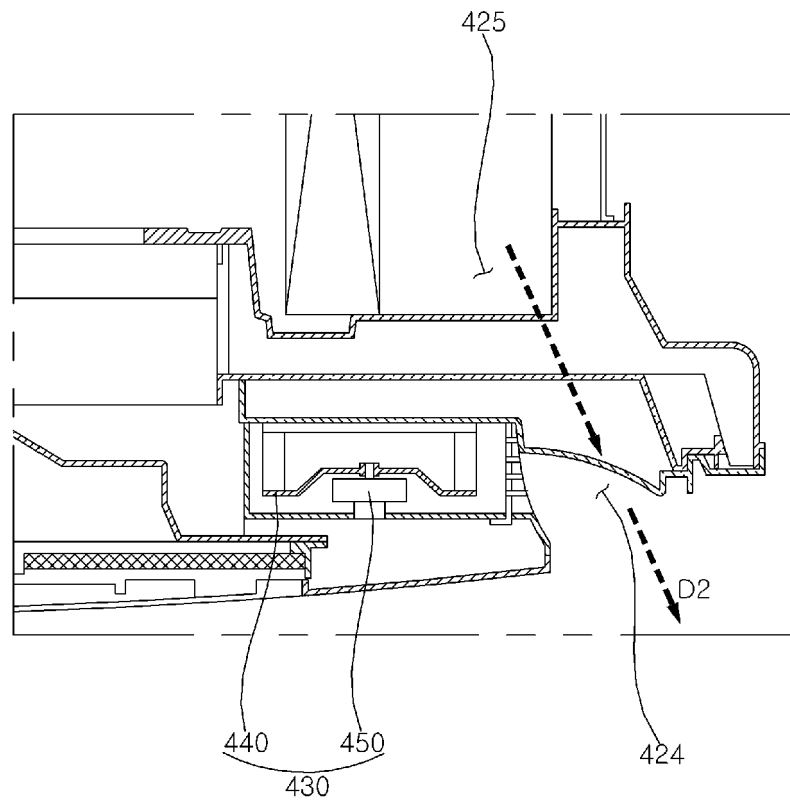


Fig. 19c

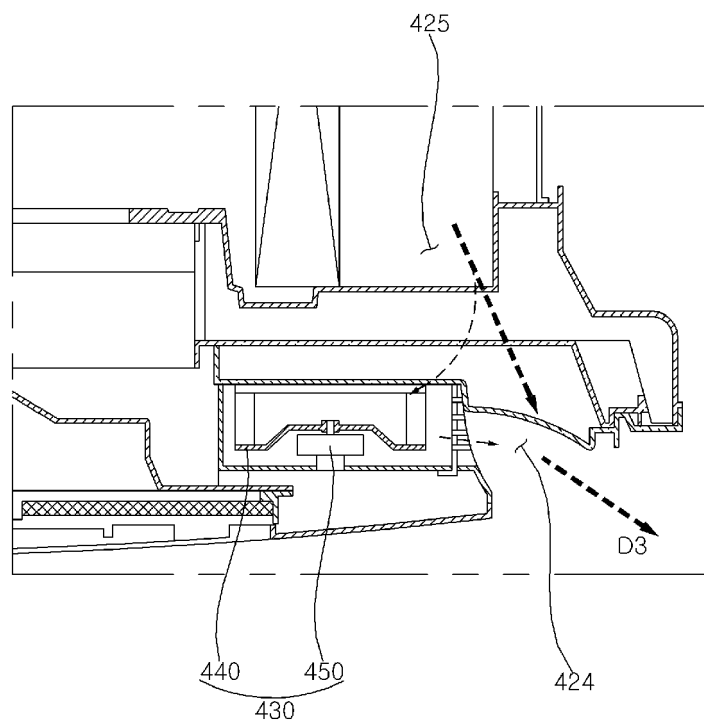

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2513694 A [0002]
- KR 102034663 B1 [0005]