



HU000029566T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 029 566**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

- (21) Magyar ügyszám: **E 08 172834**
(22) A bejelentés napja: **2008. 12. 23.**
(96) Az európai bejelentés bejelentési száma:
EP 20080172834
(97) Az európai bejelentés közzétételi adatai:
EP 2077560 A2 **2009. 07. 08.**
(97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2077560 B1 **2016. 05. 18.**
- (51) Int. Cl.: **G21C 3/08** (2006.01)
G21C 3/28 (2006.01)
G21C 3/58 (2006.01)
G21C 5/18 (2006.01)
G21C 5/20 (2006.01)

(30) Elsőbbségi adatok: 116730 P 2008. 11. 21. US PCT/RU2007/000732 2007. 12. 26. WO	(73) Jogosult(ak): Thorium Power, Inc., McLean, VA 22102 (US)
(72) Feltaláló(k): Bashkirtsev, Sergey Mikhailovich, Moscow 125080 (RU) Kuznetsov, Valentin Federovich, Moscow 111402 (RU) Kevrolev, Valery Vladimirovich, Moscow 123368 (RU) Morozov, Alexey Glebovich, Moscow 111402 (RU)	(74) Képviselő: ARINOVA Szabadalmi és Védjegy Iroda, Budapest

- (54) **Fűtőelem, fűtőelem-egység és eljárás egy fűtőelem-egység alkalmazására**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 077 560 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
18.05.2016 Bulletin 2016/20

(51) Int Cl.:
G21C 3/08 ^(2006.01) **G21C 3/58** ^(2006.01)
G21C 5/18 ^(2006.01) **G21C 3/28** ^(2006.01)
G21C 5/20 ^(2006.01)

(21) Application number: **08172834.7**

(22) Date of filing: **23.12.2008**

(54) **A fuel element, a fuel assembly and a method of using a fuel assembly**

Brennstoffelement, Brennstoffanordnung und Verfahren zur Verwendung der Brennstoffanordnung

Élément combustible, ensemble de combustible et procédé d'utilisation d'un ensemble de combustible

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(30) Priority: **21.11.2008 US 116730 P**
26.12.2007 PCT/RU2007/000732

(43) Date of publication of application:
08.07.2009 Bulletin 2009/28

(60) Divisional application:
10166457.1 / 2 228 801

(73) Proprietor: **Thorium Power, Inc.**
McLean, VA 22102 (US)

(72) Inventors:
• **Bashkirtsev, Sergey Mikhailovich**
Moscow 125080 (RU)

- **Kuznetsov, Valentin Federovich**
Moscow 111402 (RU)
- **Kevrolev, Valery Vladimirovich**
Moscow 123368 (RU)
- **Morozov, Alexey Glebovich**
Moscow 111402 (RU)

(74) Representative: **Beck Greener**
Fulwood House
12 Fulwood Place
London WC1V 6HR (GB)

(56) References cited:
EP-A- 0 871 958 WO-A-93/16477
DE-A1- 1 464 481 DE-A1- 1 514 124
FR-A- 1 444 002 GB-A- 853 511
GB-A- 1 043 782 GB-A- 1 068 964
US-A- 3 335 060 US-A- 3 957 575
US-A- 6 026 136 US-I4- T 947 011

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 077 560 B1

Description

[0001] The present invention relates to a fuel element, a fuel assembly and a method of using a fuel assembly.

[0002] The invention relates in general to light water reactor designs in which thorium is used as fuel and in particular to designs of jacketless fuel assemblies, which make up the cores of pressurized water reactors (PWRs) such as the VVER-1000.

[0003] Nuclear power remains an important energy resource throughout the world. Many countries that lack adequate indigenous fossil fuel resources rely primarily on nuclear power to produce electricity. In many other countries, nuclear power is used as a competitive source of electricity which also increases the diversity of the types of energy used. In addition, nuclear power also makes a very important contribution to the achievement of such goals as controlling fossil fuel pollution (such as acid rain and global warming) and conserving fossil fuel for future generations.

[0004] Although safety is certainly a major issue in the design and operation of nuclear reactors, another key issue is the danger of the proliferation of materials that could be used in nuclear weapons. This danger is especially relevant to countries with unstable governments, whose possession of nuclear arms could pose a significant threat to world security. Nuclear power therefore should be generated and used in a way that does not lead to the proliferation of nuclear weapons and the resulting risk of their use.

[0005] All current nuclear reactors create large amounts of material customarily referred to as reactor-grade plutonium. A typical 1000 MW reactor, for example, creates about 200 - 300 kg per year of reactor-grade plutonium, which can be suitable for producing nuclear weapons. Hence the fuel discharged from the cores of conventional reactors is highly proliferative material, and security measures are required to prevent the discharged fuel from falling into the hands of unauthorized individuals. There is a similar security problem with the enormous stockpiles of weapons-grade plutonium created in the U.S. and the countries of the former Soviet Union in the process of dismantling of nuclear weapons.

[0006] There are other problems in the operation of conventional nuclear reactors associated with the constant need to dispose of long-life radioactive waste and the rapid depletion of worldwide supply of natural uranium raw material.

[0007] To solve these problems, there have been recent attempts to develop nuclear reactors that use relatively small amounts of nonproliferative enriched uranium (enriched uranium has a U-235 content of 20% or less) and do not generate significant amounts of proliferative materials such as plutonium. Examples of such reactors have been disclosed in international applications WO-A-85/01826 and WO-A-93/16477, which disclose seed-blanket reactors that obtain a substantial percentage of their power from blanket zones with thorium fuel. The

blanket zones surround a seed zone containing fuel rods of nonproliferative enriched uranium. The uranium in the seed fuel rods releases neutrons which are captured by the thorium in the blanket zones, thus creating fissionable U-233, which burns in place and releases heat for the reactor power plant.

[0008] The use of thorium as nuclear reactor fuel is attractive because worldwide thorium reserves are considerably larger than uranium reserves. In addition, both of the aforementioned reactors are "nonproliferative" in the sense that neither the initial fuel loaded nor the fuel discharged at the end of each fuel cycle is suitable for producing nuclear weapons. This result is achieved by using only nonproliferative enriched uranium as seed fuel, selecting moderator/fuel volume ratios to minimize plutonium production, and adding a small amount of nonproliferative enriched uranium to the blanket zone, where the U-238 component is evenly mixed with the residual U-233 at the end of the blanket cycle and "denatures" (changes the natural properties of) the U-233, as a result of which it becomes unsuitable for making nuclear weapons.

[0009] Unfortunately, neither of the aforementioned reactor designs is truly "nonproliferative." In particular, it has been discovered that both of the designs result in a level of production of proliferative plutonium in the seed zone which is higher than the minimum possible level. The use of a circular seed zone with both an inner or central blanket zone and an outer, surrounding blanket zone cannot provide reactor operation as a "nonproliferative" reactor, since the thin, annular seed zone has a correspondingly small "optical thickness," which results in a seed (neutron) spectrum which dominates the considerably harder spectrum of the inner and blanket zones. This results in a higher proportion of epithermal neutrons in the seed zone and production of a higher than minimum quantity of proliferative plutonium.

[0010] In addition, neither of the previous reactor designs has been optimized from the standpoint of operational parameters. For example, moderator/fuel volume ratios in the seed zone and blanket zones are particularly critical for minimizing the amount of plutonium in the seed zone, so that adequate heat is released by the seed fuel rods, and optimum conversion of thorium to U-233 in the blanket zone is ensured. Research shows that the preferred moderator/fuel ratios indicated in the international applications are too high in the seed zones and too low in the blanket zones.

[0011] The previous reactor core designs also are not especially effective in consuming nonproliferative enriched uranium in the seed fuel elements. As a result, the fuel rods discharged at the end of each seed fuel cycle contained so much residual uranium that they had to be reprocessed for reuse in another reactor core.

[0012] The reactor disclosed in application WO-A-93/16477 also requires a complex mechanical reactor control system which makes it unsuitable for refitting a conventional reactor core. Similarly, the reactor core dis-

closed in application WO-A-85/01826 cannot easily be transferred into a conventional core, because its design parameters are not compatible with the conventional core parameters.

[0013] Finally, both of the previous reactor designs were designed specifically to burn nonproliferative enriched uranium with thorium and are not suitable for consuming large amounts of plutonium. Hence neither design provides a solution to the problem of stockpiled plutonium.

[0014] A reactor with a core which includes a set of seed-blanket assemblies, each of which contains a central seed region which includes seed fuel elements made of a material capable of nuclear fission containing uranium-235 and uranium-238, an annular blanket that surrounds the seed region and includes blanket fuel elements containing primarily thorium and 10% by volume or less enriched uranium, a moderator in the seed region, with a volume ratio of moderator to fuel in the range of 2.5 to 5.0, and a moderator in the blanket region, with a ratio of moderator to fuel in the range of 1.5 to 2.0, is known according to patent RU 2176826. Each of the seed fuel elements is made of uranium-zirconium alloy, and the seed zone makes up 25-40% of the total volume of each seed-blanket module.

[0015] The known reactor provides optimum operation from the standpoint of economy and is not "proliferative." This reactor can be used to consume large amounts of plutonium with the thorium without generating proliferative wastes. The reactor produces substantially smaller amounts of hot waste, which significantly reduces the need for long-term waste storage sites.

[0016] However, the seed-blanket assemblies used in the reactor are not suitable for use in existing light water reactors such as the VVER-1000.

[0017] A fuel assembly for a light water reactor similar to the reactor described above, which, specifically, has a hexagonal cross-sectional form, which makes it possible to install the fuel assembly from the seed-blanket modules in a conventional light water reactor, is known from the description for patent RU 2222837.

[0018] Other than the presentation of the cross-sectional form of the assembly, however, the description for the aforementioned patent contains no information on the configuration of the assembly which would allow installing it in an existing light water reactor such as the VVER-1000 without modifying the reactor design.

[0019] A fuel assembly for a light water reactor including a bundle of fuel elements and guide channels in spacer grids, a tailpiece and a head, wherein the spacer grids are connected to each other and to the tailpiece by elements arranged along the length of the fuel assembly, and the head is made up of upper and lower tieplates, cladding situated between the plates, and a spring unit, and wherein outer ribs on the head shell are connected to each other along projections of the rim and along the lower parts by perforated plates, is known according to patent RU 2294570.

[0020] The known fuel assembly is classified as a design for jacketless fuel assemblies, which make up the cores of pressurized water reactors (PWRs) such as the VVER-1000, and has enhanced operating properties due to increased rigidity, reduced head length and increased free space between the fuel rod bundle and the head, with a simultaneous increase in the length of the fuel rods. This design makes it possible to increase the fuel load in the fuel assembly with greater depletion depth and thereby to increase the reactor core power and the life cycle of the fuel assembly.

[0021] However, all the fuel elements in this assembly are made of the fissionable material traditionally used in reactors such as the VVER-1000; consequently, the creation of large amounts of reactor-grade plutonium is a characteristic drawback of reactors with such assemblies.

[0022] One object of one or more embodiments of the invention is the creation of a fuel assembly which, on the one hand, generates a substantial percentage of its power in a thorium-fueled blanket region and does not create proliferative wastes and, on the other hand, can be installed in an existing light water reactor such as the VVER-1000 without requiring substantial modifications. hexagon, with channel placed around the fuel rod bundle; a guide grid attached to the upper part of the channel for placing fuel elements so as to allow their free axial movement; a central tube forming a guide channel to accommodate controls, and peripheral tubes attached to the support grid, which form guide channels for inserting absorber rods and control rods, and placed in the head with the capability of elastic axial displacement; the blanket subassembly includes a frame structure comprised of six lengthwise angle units with spacer grids attached to them, with an opening in the central area to accommodate the channel of the seed subassembly; a bundle of fuel elements comprised of thorium with an addition of enriched uranium situated in the frame structure; and the tailpiece of the blanket subassembly, to which fuel elements of the blanket subassembly are attached, and which can be coupled with the support tube of the light water reactor, with the said tailpiece of the blanket subassembly and the tailpiece of the seed subassembly being attached by a locking mechanism and forming the tailpiece of the fuel assembly.

[0023] The head can be equipped with a pressure element that is in contact with the channel of the seed subassembly.

[0024] According to a second aspect of the present invention, there is provided a fuel assembly having in plan the form of a regular hexagon contains a seed subassembly, a blanket subassembly surrounding it, a head, a tailpiece that can be coupled with the support tube of the light water reactor and a frame structure, wherein the seed subassembly contains a bundle of fuel elements, each of which has a kernel comprised of enriched uranium or reactor-grade plutonium, with the said kernel being enclosed by a cladding made of zirconium

alloy and having a three-lobed profile forming spiral spacer ribs; the tailpiece of the seed subassembly with a support grid attached to it to hold the fuel elements of the seed subassembly; a channel connected to the tailpiece of the seed subassembly having in plan the form of a regular hexagon, with the channel placed around the fuel rod bundle; a guide grid attached to the upper part of the channel for placing fuel elements so as to allow their free axial movement; a central tube forming a guide channel to accommodate controls, and peripheral tubes, which form guide channels for inserting absorber rods and control rods, and placed in the head with the capability of elastic axial displacement; the blanket subassembly includes a frame structure comprised of six lengthwise angle units with spacer grids attached to them, with an opening in the central area to accommodate the channel of the seed subassembly; a bundle of fuel elements comprised of thorium with an addition of enriched uranium situated in the frame structure and attached to the bottom tie plate (the tailpiece); and several support tubes attached to the tailpiece, with the head equipped to allow elastic axial displacement of the support tubes.

[0025] Displacer of zirconium or zirconium alloy having the cross-sectional form of a regular triangle is situated primarily along the longitudinal axis of the kernel in at least one of the embodiments of the invention to promote more uniform temperature distribution in the kernel volume.

[0026] The axial coiling pitch of the spiral spacer ribs also ranges from 5% to 20% of the fuel rod length in at least one of the embodiments of the invention.

[0027] In addition, the fuel rods of the seed subassembly in at least one embodiment of the invention have a circumferential orientation such that the three-lobed profiles of any two adjacent fuel rods have a common plane of symmetry which passes through the axes of the two adjacent fuel elements in at least one cross section of the fuel rod bundle.

[0028] Also in at least one of the embodiments of the invention, the kernel preferably is comprised of U-Zr alloy with up to 30% by volume uranium, with up to 20% enrichment with the U-235 isotope, and the kernel is comprised of Pu-Zr alloy with up to 30% by volume reactor-grade plutonium.

[0029] According to a third aspect of the present invention, there is provided a light water reactor containing a set of fuel assemblies, at least one of which is constructed according to one of the aspects described above. Either some or all of the fuel assemblies placed in the reactor may conform to the alternatives described above.

[0030] One or more embodiments of the present invention provides a fuel element for use in a fuel assembly of a nuclear reactor. The fuel element includes a kernel comprising fissionable material. The fuel element has a multi-lobed profile that forms spiral ribs. There may be three ribs. The fuel element may include a cladding enclosing the kernel, and the cladding may include a zirconium alloy. The fuel element may include a displacer with

a cross sectional shape in the form of a regular triangle, the displacer extending along a longitudinal axis of the kernel. The displacer may comprise zirconium or a zirconium alloy.

[0031] According to a first aspect of the present invention, there is provided a fuel assembly for use in a nuclear reactor, the fuel assembly comprising:

- a seed subassembly comprising a seed frame and a plurality of seed fuel elements supported by the seed frame;
- a blanket subassembly comprising a blanket frame and a plurality of blanket fuel elements supported by the blanket frame; and
- a locking mechanism that releasably locks the seed and blanket frames together, the seed subassembly being detachable from the blanket subassembly when the locking mechanism is released.

[0032] One or more embodiments of the present invention provides a fuel assembly for use in a nuclear reactor. The fuel assembly includes a seed subassembly comprising a seed frame and a plurality of seed fuel elements supported by the seed frame. The fuel assembly also includes a blanket subassembly comprising a blanket frame and a plurality of blanket fuel elements supported by the blanket frame. The fuel assembly further includes a locking mechanism that releasably locks the seed and blanket frames together. The seed assembly is detachable from the blanket subassembly when the locking mechanism is released. The blanket subassembly may laterally surround the seed subassembly. The blanket subassembly may include a central opening into which the seed subassembly fits. The plurality of seed fuel elements may include fissionable material, and the plurality of blanket fuel elements may comprise thorium.

[0033] According to a second aspect of the present invention, there is provided a method of using a fuel assembly, the fuel assembly comprising a seed subassembly that includes fissionable material and a blanket subassembly that includes thorium, the seed and blanket subassemblies being attached to each other, the method comprising, sequentially:

- (a) placing the fuel assembly in a core of a nuclear reactor;
- (b) burning at least some of the fissionable material in the core of the nuclear reactor;
- (c) detaching the seed subassembly from the blanket subassembly; and
- (d) attaching a new seed subassembly to the blanket subassembly, the new seed subassembly comprising additional fissionable material.

[0034] One or more embodiments of the present invention provides a method of using a fuel assembly according to one or more of the above embodiments. The seed and blanket subassemblies are attached to each

other. The method includes, sequentially:

- (a) placing the fuel assembly in a core of a nuclear reactor;
- (b) burning at least some of the fissionable material in the core of the nuclear reactor;
- (c) detaching the seed subassembly from the blanket subassembly; and
- (d) attaching a new seed subassembly to the blanket subassembly, the new seed subassembly comprising additional fissionable material.

[0035] The method may also include:

- (e) burning at least some of the additional fissionable material in the core of the nuclear reactor.

seed subassembly, a blanket subassembly surrounding it, a top tie plate (the head), a bottom tie plate (the tailpiece) and a frame structure, wherein the seed subassembly contains a bundle of fuel elements, each of which has a kernel comprised of enriched uranium or reactor-grade plutonium, with the said kernel being enclosed by a cladding made of zirconium alloy and having a three-lobed profile forming spiral spacer ribs; the bottom tie plate (the tailpiece) of the seed subassembly with a support grid attached to it to hold the fuel elements of the seed subassembly; a channel connected to the bottom tie plate (the tailpiece) of the seed subassembly having in plan the form of a regular hexagon, with channel placed around the fuel rod bundle; a guide grid attached to the upper part of the channel for placing fuel elements so as to allow their free axial movement; a central tube forming a guide channel to accommodate controls, and peripheral tubes attached to the support grid, which form guide channels for inserting absorber rods and control rods, and placed in the top tie plate (the head) with the capability of elastic axial displacement; the blanket subassembly includes a frame structure comprised of six lengthwise angle units with spacer grids attached to them, with an opening in the central area to accommodate the channel of the seed subassembly; a bundle of fuel elements comprised of thorium with an addition of enriched uranium situated in the frame structure; and the bottom tie plate (the tailpiece) of the blanket subassembly, to which fuel elements of the blanket subassembly are attached, and which can be coupled with the support tube of the light water reactor, with the said bottom tie plate (the tailpiece) of the blanket subassembly and bottom tie plate (the tailpiece) of the seed subassembly being attached by a locking mechanism and forming the bottom tie plate (the tailpiece) of the fuel assembly.

[0036] Preferably, a displacer made of zirconium or zirconium alloy with a cross sectional shape in the form of a regular triangle is placed along the longitudinal axis of the kernel.

[0037] In one embodiment, the pitch of the axial twist of spiral spacing ribs is from 5% to 20% of the fuel element

length.

[0038] Preferably, the fuel elements of the seed subassembly are positioned at the periphery in such a way that in at least one cross section of the fuel rod bundle, the three-lobed profiles of any two adjacent fuel elements have a common plane of symmetry passing through the axes of these adjacent fuel elements.

[0039] In one embodiment, the kernel is comprised of U-Zr alloy, with uranium fraction of up to 30% by volume, with the said uranium being enriched up to 20% by uranium isotope U-235.

[0040] In one embodiment, the kernel is comprised of Pu-Zr alloy, with reactor-grade plutonium fraction of up to 30% by volume.

[0041] Preferably, the top tie plate (the head) is equipped with a pressure element that is in contact with the channel of the seed subassembly.

[0042] According to a fifth aspect of the present invention, there is provided a fuel assembly for a light water reactor having in plan the form of a regular hexagon, including a seed subassembly, a blanket subassembly surrounding it, a top tie plate (the head), a bottom tie plate (the tailpiece) that can be coupled with the support tube of the light water reactor and a frame structure, wherein the seed subassembly contains a bundle of fuel elements, each of which has a kernel comprised of enriched uranium or reactor-grade plutonium, with the said kernel being enclosed by a cladding made of zirconium alloy and having a three-lobed profile forming spiral spacer ribs; the bottom tie plate (the tailpiece) of the seed subassembly with a support grid attached to it to hold the fuel elements of the seed subassembly; a channel connected to the bottom tie plate (the tailpiece) of the seed subassembly having in plan the form of a regular hexagon, with channel placed around the fuel rod bundle; a guide grid attached to the upper part of the channel for placing fuel elements so as to allow their free axial movement; a central tube forming a guide channel to accommodate controls, and peripheral tubes, which form guide channels for inserting absorber rods and control rods, and placed in the top tie plate (the head) with the capability of elastic axial displacement; the blanket subassembly includes a frame structure comprised of six lengthwise angle units with spacer grids attached to them, with an opening in the central area to accommodate the channel of the seed subassembly; a bundle of fuel elements comprised of thorium with an addition of enriched uranium situated in the frame structure and attached to the bottom tie plate (the tailpiece); and several support tubes attached to the bottom tie plate (the tailpiece), with the top tie plate (the head) equipped to allow elastic axial displacement of the support tubes.

[0043] Preferably, a displacer made of zirconium or zirconium alloy with a cross sectional shape in the form of a regular triangle is placed along the longitudinal axis of the kernel.

[0044] In one embodiment, the pitch of the axial twist of spiral spacing ribs is from 5% to 20% of the fuel element

length.

[0045] Preferably, the fuel elements of the seed sub-assembly are positioned at the periphery in such a way that in at least one cross section of the fuel rod bundle, the three-lobed profiles of any two adjacent fuel elements have a common plane of symmetry passing through the axes of these adjacent fuel elements.

[0046] Preferably, the kernel is comprised of U-Zr alloy, with uranium fraction of up to 30% by volume, with the said uranium being enriched up to 20% by uranium isotope U-235.

[0047] In one embodiment, the kernel is comprised of Pu-Zr alloy, with reactor-grade plutonium fraction of up to 30% by volume.

[0048] According to a sixth aspect of the present invention, there is provided a light water reactor containing a number of fuel assemblies, distinguished by the fact that it contains at least one fuel assembly according to the fourth aspect of the present invention optionally including any

[0049] Additional and/or alternative objects, features, aspects, and advantages of one or more embodiments of the present invention will become apparent from the following description, the accompanying drawings, and the appended claims.

[0050] The features and advantages of various embodiments of this invention will be apparent from the following detailed description of the preferred embodiments thereof together with the attached drawings.

[0051] Examples of embodiments of the present invention will now be described in detail with reference to the accompanying drawings, in which:

Fig. 1 is a schematic cross-sectional illustration of a nuclear reactor core containing fuel assemblies constructed according to an embodiment of this invention;

Fig. 2 is a general side view of a fuel assembly according to the first embodiment of the invention, including cutaway views;

Fig. 3 is the head of the fuel assembly as per Fig. 2 in enlarged longitudinal section view;

Fig. 4 is the tailpiece of the fuel assembly as per Fig. 2 in enlarged longitudinal section view;

Fig. 5 is a cross-sectional view of a seed fuel rod;

Fig. 6 is the A-A cross-sectional view of the fuel assembly as per Fig. 2;

Fig. 7 is a general side view of a fuel assembly according to the second embodiment of the invention, including cutaway views;

Fig. 8 is the head of the fuel assembly as per Fig. 7

in enlarged longitudinal section view;

Fig. 9 is the tailpiece of the fuel assembly as per Fig. 7 in enlarged longitudinal section view.

[0052] Figure 1 shows the a nuclear reactor core 1 containing a set of fuel assemblies 2 which include a seed region and a blanket region, which form a hexagonal configuration, wherein the fuel assemblies themselves have in plan the form of a regular hexagon. The core 1 has the same geometric configuration and dimensions as the core in a conventional WER-1000 light water reactor, so that the reactor can be refitted with such assemblies to form a core of 163 fuel assemblies 2. The difference between the core 1 and the core of the WER-1000 reactor lies in the composition and structure of the fuel assemblies 2, as will be disclosed in greater detail below. The core 1 and fuel assemblies 2 presented here have been developed for use in a conventional VVER-1000 light water reactor; however, a similar core and fuel assemblies can be created for use in other standard or specially designed reactors without going beyond the scope of this invention.

[0053] The core 1 is surrounded by a reflector 3, which preferably is comprised of a set of reflector assemblies 4. Each reflector assembly 4 preferably contains a mixture of water and metal of the core basket/high-pressure vessel. In addition, easy reflector assembly 4 may be comprised primarily of thorium oxide.

[0054] Figure 2 shows a general view of the first alternative configuration for each of the fuel assemblies 2.

[0055] A fuel assembly 2 contains a seed subassembly 5, a blanket subassembly 6 surrounding it, a head 7, and a tailpiece 8 with its supporting part 9 in contact with the support tube of the reactor (not shown). The fuel assembly has in plan the form of a regular hexagon. The seed subassembly 5 contains a fuel rod bundle 10 which includes a number of rods, such as 108, placed on a support grid 11, which is attached to the tailpiece of the seed subassembly 5. A channel 12 with a hexagonal cross section is connected to the tailpiece of the seed subassembly 5 and encloses the fuel rod bundle 10. A guide grid 13 for placing fuel elements 10 so as to allow their free axial movement is attached to the upper part of the channel 12. Each of the seed fuel elements has a kernel 14, which includes enriched uranium or reactor-grade plutonium. The kernel is comprised primarily of U-Zr alloy, with a uranium concentration of 25% or less by volume in the fuel composition and 19.7% uranium-235 enrichment. The kernel 14 is enclosed by cladding 15 of zirconium alloy and has a three-lobed profile forming spiral spacer ribs 16 (Fig. 5). A displacer 17 of zirconium or zirconium alloy with the cross-sectional form of a regular triangle is placed along the longitudinal axis of the kernel. The seed fuel rods 10 may be fabricated as a single assembly unit by joint pressing (extrusion through a die). The axial coiling pitch of the spiral spacer ribs 16 is selected according to the condition of placing the axes of

adjacent fuel rods 10 with a spacing equal to the width across corners in the cross section of a fuel rod and is 5% to 20% of the fuel rod length. Stability of the vertical arrangement of the fuel rods 10 is provided: at the bottom - by the support grid 11; at the top - by the guide grid 13; relative to the height of the core - by a system of bands (not shown) spaced evenly in the channel relative to the height of the bundle. The seed fuel elements 10 have a circumferential orientation such that the three-lobed profiles of any two adjacent fuel rods have a common plane of symmetry which passes through the axes of the two adjacent fuel elements (Fig. 5) in at least one cross section of the fuel rod bundle.

[0056] In addition, the seed subassembly contains a central tube 18 that forms a guide channel to accommodate controls, and peripheral tubes 19 attached to the support grid 13 which form guide channels for inserting control absorber elements based on boron carbide (B_4C) and dysprosium titanate ($Dy_2O_3 \cdot TiO_2$) (not shown) and burnable absorber rods based on boron carbide and gadolinium oxide (Gd_2O_3) (not shown) and are placed in the head 7 with the capability of elastic axial displacement. The peripheral tubes 19 that form the guide channels are made of zirconium alloy.

[0057] The head 7 (Fig. 3) is comprised of a spring unit, which includes precompressed springs 20, an upper plate 21, cladding 22 and a lower plate 23. The cladding 22 is comprised of two telescoped parts: the upper part 24 rigidly connected to the upper plate 21, and the lower part 25 rigidly connected to the lower plate 23. The spring unit including the springs 20 is placed inside the cladding 22. The peripheral tubes 19 fit into sleeves 26 and are capable of acting on the bottom ends of the sleeves (due to the presence of a step on the outer surface of the tube 19, for example). The sleeves 26 have flanges against which the compression springs of the spring unit 20 rest. The other ends of the springs 20 rest against the upper plate 21. The upper ends of the tubes 19 pass freely through openings in the upper plate 21, and the sleeves 26 pass through openings in the lower plate 23. The tubes 19 have stops 27 at the top ends. The central tube 18 is installed in a manner similar to the peripheral tubes 19, except that it passes freely through the lower plate without the use of a sleeve. The spring 20 through which the central tube 18 passes rests directly against the lower plate 23 of the head 7. A stay 28 with a stop 29 at the upper end is attached to the lower plate 23 to limit the distance between the plates 21 and 23; the stay 28 passes freely through an opening in the upper plate 21. A pressure element 30 in contact with the channel 12 of the seed subassembly 5 is attached to the lower plate 23. Hence a load applied to the upper plate 21 with the channel 12 fixed against axial movement is transmitted to the support grid 11 both by way of the peripheral tubes 19 and directly through the channel 12.

[0058] The head may be constructed without the sleeves 26. In that case, all the springs 20 of the spring unit rest against the lower plate 23, and the peripheral

tubes 19 pass freely through matching openings in the lower plate 23 (similar to the central tube 18). The entire load applied to the upper plate 21 with the channel 12 fixed against movement is transmitted to the support grid 11 directly through the channel 12.

[0059] The tailpiece of the seed subassembly 5 has a locking device 31 attached to the casing which includes a cylindrical wall 32 with openings 33, balls 34 placed in the openings, and a locking element 35 with an annular slot 36 capable of axial movement. The locking device 31, which provides connection of the seed subassembly 5 with the tailpiece 37 of the blanket subassembly, can be also be constructed in any other form; it is important only that it provide a detachable connection of the tailpieces of the seed and blanket subassemblies.

[0060] The blank subassembly 6 includes a frame structure 38, a bundle of fuel rods 39 situated in the frame, and a tailpiece 40.

[0061] The frame structure 38 is comprised of six lengthwise angle units 41 with spacer grids 42 attached to them by resistance spot welding. Each spacer grid 42 is a honeycomb grid forming a set of cells (specifically 228) attached to the rim in outer and inner hexagons. The spacer grid 42 provides the required spacing of the fuel rods 39 and the required length of contact with them to allow the fuel rods 39 to slide in the spacer grid cells when they expand in length due to radiation and heat, the minimum possible sliding forces for the fuel rods to reduce internal stresses in the bundle, and the required initial tightness to avoid fretting corrosion of the fuel elements during operation. The spacer grids 42 have an opening in the central area to accommodate the channel 12 of the seed subassembly 5.

[0062] The angle units are rigidly connected in the lower part to the tailpiece 40 of the blanket subassembly 6, to which the support grid 43 of the blanket subassembly to hold the fuel rods 39 is attached. The support grid 43 of the blanket subassembly 6 provides mechanical strength under loads in modes with normal operating conditions, modes with violations of normal operating conditions, and design accidents and also provides the hydraulic resistances required according to calculations.

[0063] The fuel rod bundle 39 of the blanket subassembly includes a set of fuel elements (specifically 228 elements) made of a composition including 12% by volume UO_2 and 88% by volume ThO_2 with 19.7% U-235 enrichment.

[0064] The ratio of the volume of all fuel elements of the seed subassembly V_{seed} to the volume of all fuel elements of the blanket subassembly V_{blank} is approximately 0.72.

[0065] The tailpiece 40 of the blanket subassembly 6 includes a support grid 43, a casing 44 and a ring 46 rigidly connected to it by braces 45; the ring interacts with the locking device 31. The ends of the blanket fuel elements 39 are attached to the support grid 43. The support grid 43 provides mechanical strength under loads modes with normal operating conditions, modes with violations

of normal operating conditions, and design accidents and also provides the required hydraulic resistance to the flow of coolant (water). The casing 44 can be coupled with the support tube (not shown) of the light water reactor and acts as a guide device for delivering coolant to the areas of the seed and blanket subassemblies.

[0066] Figures 7 - 9 show the second alternative for construction of each of the fuel assemblies 2.

[0067] This alternative design differs from the design shown in Figs. 2 - 4 in that the seed and blanket subassemblies are not rigidly connected to each other. As shown in Fig. 9, the tailpiece of the seed subassembly has a cylindrical bottom tie plate 47 instead of the locking device 31, and the casing 44 in the tailpiece of 40 of the blanket subassembly 6 lacks braces 45 and ring 46 shown in Fig. 4. The cladding 22 of the head 7 (Fig. 8), in contrast to the version shown in Fig. 3, is constructed in one piece, and an additional spring unit 48 is rigidly attached (e.g., welded) to it. The additional spring unit 48 chiefly includes several (e.g., six) additional upper plates 49 evenly distributed around the circumference and rigidly connected to the cladding 22, an additional lower plate 50 rigidly linked to the lower plate 23, cladding 51 attached to the additional plates 49 and 50, compression springs 52 and support tubes 53. The support tubes 53 are attached by the bottom ends to the support grid 43 of the blanket module 6. The upper parts of the support tubes 53 are constructed and positioned in the additional upper and lower plates 49 and 50 similar to the peripheral tubes 19; i.e., the tubes 53 fit into sleeves 26 and are capable of acting on the sleeves in an upward direction. The compression springs 52 of the additional spring unit 48 rest at one end against flanges of the sleeves 26 and at the other end against the additional upper plates 21. The upper parts of the support tubes 53 pass freely through openings in the additional upper plates 49, and the sleeves 26 pass through openings in the additional lower plate 50. The support tubes 53 have stops 54 at the top ends.

[0068] Before a fuel assembly is placed in the reactor, the seed subassembly 5 and the blanket subassembly 6 are first assembled separately.

[0069] In assembly of the seed subassembly according to the first embodiment, the fuel elements 10 are connected to the guide grid 13 attached to the channel 12, and the central tube 18 and peripheral tubes 19 are connected to the head, in addition to being attached to the guide grid 13. The tubes 18 and 19 pass through sleeves 17 situated in openings in the lower plate, through the springs 20 and through openings in the upper plate 21. Then the stops 27 are attached to the top ends of the tubes (by a threaded or bayonet joint, for example).

[0070] The fuel elements 39 of the blanket subassembly are placed in a frame structure 9 by passing them through spacer grids 42 and attaching them to the support grid 43.

[0071] Then the assembled seed and blanket subassemblies are connected to form a single fuel assembly

by passing the channel 12 of the seed subassembly 5 through openings in the central part of the spacer grids 42. The configuration of these openings in the central part of the spacer grids 42 matches the cross-sectional shape of the channel 12, so that the channel 12 passes freely through the openings. The locking element 35 in the tailpiece of the seed subassembly is shifted upward, so that the balls 34 situated in openings 33 of the cylindrical wall 32 are capable of movement in an annular groove 36, thus allowing the cylindrical wall 32 to pass through the ring 46. After the tailpiece of the seed subassembly is stopped against the upper end face of the ring 46, the locking element 35 is shifted downward. The balls 34 are forced out of the groove 36, shift outward in the openings 33 and jut out of the wall 32. As a result, due to interaction of the displaced balls and the bottom end face of the ring 46, the tailpiece of the seed subassembly cannot move upward in relation to the tailpiece of the blanket subassembly. Thus the seed and blanket subassemblies form a single fuel assembly 2.

[0072] After a fuel assembly 2 is placed in the reactor 1, and the tailpiece 8 is resting in the support tube (not shown) of the light water reactor, the fuel assembly 2 is held down by the upper plate of the reactor (not shown) by resting against the face of the cladding of the upper plate 21 of the head 7. Then the force is transmitted to the spring unit with springs 20, which is compressed by an amount designed to keep the fuel assembly 2 from floating up in the flow of coolant from below; the upper plate 21 of the head 7 moves downward in relation to the lower plate 23 by the amount of compression of the spring unit. The possibility of downward movement of the upper plate 21 relative to the lower plate 23 of the head 7 is provided by telescoping of the upper part 24 of the cladding 22, which is rigidly connected to the upper plate 21, and the lower part 25 of the cladding 22, which is rigidly connected to the lower plate 23.

[0073] Then the force from the bottom ends of the springs 20 of the spring unit is transmitted through the sleeves 26, acting on the peripheral tubes 19 by their bottom ends, to the peripheral tubes 19 and then to the support grid 11 and through the tailpiece of the seed subassembly, the locking device 31, the ring 46 and the braces 45 to the tailpiece 44 of the blanket subassembly 6, which comes into contact with the support tube (not shown) of the light water reactor.

[0074] In addition, part of the compression force from the upper plate of the reactor is transmitted to the channel 12 of the seed subassembly by the action on the pressure element 30 of the force of a spring 20 enclosing the central tube 18 and resting directly against the lower plate 23, which is rigidly connected to the pressure element. If the head 7 does not have sleeves 26, the entire compression force is transmitted by way of the channel 12.

[0075] Coolant passes into the fuel assembly 2 through the casing 44 of the tailpiece of the blanket subassembly 6; the coolant flow is divided into two parts, one of which runs inside the casing 12 of the seed subassembly and

bathes the seed fuel elements 10, while the other runs outside the case 12 and bathes the fuel elements 39 of the blanket subassembly.

[0076] The compression force of the head 7 acting from the upper plate of the reactor (not shown) keeps the fuel elements from floating up in the specified coolant flow.

[0077] The passage of the required (for extracting nominal power from the fuel assembly) coolant flow through the seed and blanket subassemblies at the nominal pressure gradient (used in existing VVER-1000 reactors) relative to the height of the fuel assemblies with preservation of the serviceability of the assemblies is provided:

- by the use of a channel 12 between the seed and blanket subassemblies;
- by the shape of the seed fuel elements 10 (three-lobed profile), their mutual circumferential orientation and the axial coiling pitch of the spiral spacer ribs 16, which promotes a well-developed heat-transfer surface and a significantly more even coolant temperature distribution in the cross section of the seed subassembly due to forced convective mixing of the coolant.

[0078] The complete hydraulic characteristics of the fuel assembly 2 practically coincide with the characteristics of a standard fuel assembly, which ensures maintaining the resistance of the core of a VVER-1000 reactor with fuel assemblies according to one or more embodiments of the invention at the nominal level. Hence installing fuel assemblies according to one or more embodiments of this invention in a VVER-1000 will not cause a change in the coolant flow rate in the primary loop of the reactor.

[0079] The fuel elements 10 of the seed subassembly, as they heat up during operation, begin to lengthen upward due to thermal and radiation expansion; the bundle of fuel elements expands independently of peripheral tubes 19, since the latter pass through the cells of the guide grid 13 with a guaranteed clearance. Hence the bundle of fuel elements 10 has no effect on the load-bearing peripheral tubes 19 and does not deform them; consequently, geometric stability of the form of the fuel assembly 2 is preserved during operation.

[0080] The fuel elements 39 of the blanket subassembly expand in length during operation and begin to take up the free space between their ends and the head 7 due to radiation expansion.

[0081] The operation of a fuel assembly 2 according to the second embodiment of the invention is similar, except that the casing 44 of the blanket subassembly is pressed against the support tube of the reactor by transmission of the compression force from the upper plate of the reactor through the support tubes 53, and the seed subassembly, which is not attached to the blanket subassembly, is prevented from floating up by the action of the springs 20 against the flanges of the sleeves 26,

which transmit the force to the support grid 11 of the seed subassembly.

[0082] The use of one or more embodiments of this invention makes it possible to achieve a saving of natural uranium due to the presence of a thorium part (blanket subassembly) in the fuel assembly design, since the thorium during the depletion process accumulates secondary nuclear fuel in the form of uranium-233, burning of which makes a substantial contribution to the power output of a reactor core with such fuel assemblies. This leads to an improvement in nonproliferation characteristics and simplifies the problems in handling spent fuel assemblies, since the accumulation of the traditional secondary nuclear fuel (reactor-grade plutonium, which can be used to produce nuclear weapons) for VVER-1000 reactors is reduced significantly (by 80%), and the new secondary nuclear fuel, uranium-233 (or more accurately, what is left after it burns "in place" in a thorium blanket module), is not usable for producing nuclear weapons due to contamination with the uranium-232 isotope and even isotopes of plutonium. Problems in handling spent fuel assemblies can be simplified by reducing the volume of waste by increasing the specified life cycle of the fuel and reducing the content of isotopes with long-term radiation toxicity in discharged fuel.

[0083] The fuel assembly design according to one or more embodiments of this invention makes it possible to use the fuel assembly in VVER-1000 reactors due to both mechanical and hydraulic and neutronic compatibility with the design of standard fuel assemblies.

[0084] Mechanical compatibility with the standard fuel assembly for the VVER-1000 reactor is ensured by:

- the presence of a frame structure that provides resistance to deformation during long-term operation and high fuel depletion levels;
- identical connection dimensions;
- the use of tailpiece, head and frame structure designs compatible with the corresponding parts of corner standard fuel assemblies;
- compatibility of the seed subassembly design with standard control mechanisms and load-handling devices.

[0085] The complete hydraulic characteristics of a fuel assembly according to one or more embodiments of this invention practically coincide with the characteristics of a standard fuel assembly due to the presence of a system of two parallel channels formed by the seed and blanket subassemblies and joined by common distribution (delivery) and collection headers. The seed and blanket subassemblies are hydraulically connected in the inlet and outlet segments. This fuel assembly structure ensures maintaining the resistance of the core of a VVER-1000 reactor with fuel assemblies according to one or more embodiments of the invention at the nominal level. Hence installing fuel assemblies according to one or more embodiments of this invention in a VVER-1000 reactor will

not cause a change in the coolant flow rate in the primary loop of the reactor. The ratio of hydraulic resistances between the inlet to the assembly, the active part of the blanket subassembly and the outlet from the assembly in fuel assemblies according to one or more embodiments of this invention and the standard fuel assembly are similar, which ensures hydraulic compatibility of fuel assemblies according to one or more embodiments of the invention with standard assemblies and the absence of coolant overflows between them. This makes it possible to use some fuel assemblies according to one or more embodiments of this invention in a reactor at the same time with standard fuel assemblies for the reactor.

[0086] Neutronic compatibility with the standard fuel assembly is provided by the following:

- the specified burn-up level is achieved by utilizing specific fuel compositions and compositions with burnable absorbers;
- standard power output of the fuel assembly is achieved by utilizing specific fractions of fuel loading in seed and blanket fuel compositions;
- satisfaction of requirements for an uneven profile of power output is achieved by utilizing specific fractions of fuel loading in various rows of seed rods and the composition of fuel loading in the blanket;
- preservation of reactivity effects within the range typical for standard fuel assemblies is achieved by utilizing special characteristics of fuel compositions;
- the ability to regulate the level of output and reduce the output using standard control systems is achieved by utilizing standard technological channels for guiding control rods in the peripheral tubes in the seed subassembly which are compatible with the subassembly.

[0087] Another advantage of one or more embodiments of the invention is that the seed-blanket fuel assembly according to one or more embodiments of this invention is sectional, which makes it possible to change the seed subassembly independently. Changing the seed subassembly more frequently produces more favorable conditions (with respect to neutron balance and irradiation time) for the thorium placed in the blanket subassembly of the fuel assembly.

[0088] Embodiments of the present invention have been described with particular reference to the examples illustrated. However, it will be appreciated that variations and modifications may be made to the examples described within the scope of the present invention, as set out in present claims.

Claims

1. A fuel assembly for use in a nuclear reactor, the fuel assembly comprising:

a seed subassembly comprising a seed frame and a plurality of seed fuel elements supported by the seed frame;

a blanket subassembly comprising a blanket frame and a plurality of blanket fuel elements supported by the blanket frame; and

a locking mechanism that releasably locks the seed and blanket frames together, the seed subassembly being detachable from the blanket subassembly when the locking mechanism is released.

2. The fuel assembly of claim 1, wherein the blanket subassembly laterally surrounds the seed subassembly.

3. The fuel assembly of claim 1 or 2, wherein the blanket subassembly comprises a central opening into which the seed subassembly fits.

4. The fuel assembly of any of claims 1 to 3, wherein the plurality of seed fuel elements comprise fissionable material, and wherein the plurality of blanket fuel elements comprise thorium.

5. A method of using a fuel assembly, the fuel assembly comprising a seed subassembly that includes fissionable material and a blanket subassembly that includes thorium, the seed and blanket subassemblies being attached to each other, the method comprising, sequentially:

(a) placing the fuel assembly in a core of a nuclear reactor;

(b) burning at least some of the fissionable material in the core of the nuclear reactor;

(c) detaching the seed subassembly from the blanket subassembly; and

(d) attaching a new seed subassembly to the blanket subassembly, the new seed subassembly comprising additional fissionable material.

6. The method of claim 5, further comprising:

(e) burning at least some of the additional fissionable material in the core of the nuclear reactor.

Patentansprüche

1. Brennelement zur Verwendung in einem Kernreaktor, das Brennelement umfassend:

eine Seed-Baugruppe, umfassend einen Seed-Rahmen und eine Vielzahl von vom Seed-Rahmen gestützten Seed-Brennelementen, eine Brutmantel-Baugruppe, umfassend einen

- Brutmantel-Rahmen und eine Vielzahl von vom Brutmantel-Rahmen gestützten Brutmantel-Brennelementen, und einen Arretiermechanismus, der die Seed- und Brutmantel-Rahmen lösbar miteinander arretiert, wobei die Seed-Baugruppe von der Brutmantel-Baugruppe demontierbar ist, wenn der Arretiermechanismus gelöst wird.
2. Brennelement nach Anspruch 1, wobei die Brutmantel-Baugruppe die Seed-Baugruppe seitlich umschließt.
3. Brennelement nach Anspruch 1 oder 2, wobei die Brutmantel-Baugruppe eine zentrale Öffnung aufweist, in welche die Seed-Baugruppe passt.
4. Brennelement nach Anspruch 1 bis 3, wobei die Vielzahl von Seed-Brennelementen spaltbares Material aufweist, und wobei die Vielzahl von Brutmantel-Brennelementen Thorium aufweist.
5. Verfahren zur Verwendung eines Brennelements, wobei das Brennelement eine Seed-Baugruppe, die spaltbares Material enthält, und eine Brutmantel-Baugruppe, die Thorium enthält, aufweist, wobei die Seed- und Brutmantel-Rahmen miteinander verbunden sind, das Verfahren sequentiell umfassend:
- (a) Platzieren des Brennelements in einem Kern eines Kernreaktors,
- (b) Verbrennen von wenigstens etwas vom spaltbaren Material im Kern des Kernreaktors,
- (c) Demontieren der Seed-Baugruppe von der Brutmantel-Baugruppe, und
- (d) Verbinden einer neuen Seed-Baugruppe mit der Brutmantel-Baugruppe, wobei die neue Seed-Baugruppe zusätzliches spaltbares Material aufweist.
6. Verfahren nach Anspruch 5, zusätzlich umfassend:
- (e) Verbrennen von wenigstens etwas vom zusätzlichen spaltbaren Material im Kern des Kernreaktors.
7. Ensemble combustible selon la revendication 1, où le sous-ensemble à couches fertiles entoure latéralement le sous-ensemble à germes.
8. Ensemble combustible selon la revendication 1 ou la revendication 2, où le sous-ensemble à couches fertiles comprend une ouverture centrale pouvant accueillir le sous-ensemble à germes.
9. Ensemble combustible selon l'une quelconque des revendications 1 à 3, où la pluralité des éléments combustibles à germes comprend des matières fissiles, et où la pluralité des éléments combustibles à couches fertiles comprend du thorium.
10. Procédé d'utilisation d'un ensemble combustible, l'ensemble combustible comportant un sous-ensemble à germes qui inclut des matières fissiles et un sous-ensemble à couches fertiles comprenant le thorium, le sous-ensemble à germes et le sous-ensemble à couches fertiles étant reliés l'un à l'autre, le procédé consistant à, de manière séquentielle :
- (a) placer l'ensemble combustible dans le coeur d'un réacteur nucléaire;
- (b) brûler au moins une partie des matières fissiles dans le coeur du réacteur nucléaire;
- (c) séparer le sous-ensemble à germes du sous-ensemble à couches fertiles; et
- (d) fixer un nouveau sous-ensemble à germes au sous-ensemble à couches fertiles, le nouveau sous-ensemble à germes comprenant d'autres matières fissiles.
11. Procédé selon la revendication 5 consistant en outre à:
- (e) brûler au moins une partie des matières fissiles supplémentaires dans le coeur du réacteur nucléaire.
12. Ensemble combustible (610) pour utilisation dans un réacteur nucléaire, l'ensemble combustible comprenant:
- un sous-ensemble à germes comprenant un châssis à germes et une pluralité d'éléments combustibles à germes supportés par le châssis à germes;
- un sous-ensemble à couches fertiles compre-

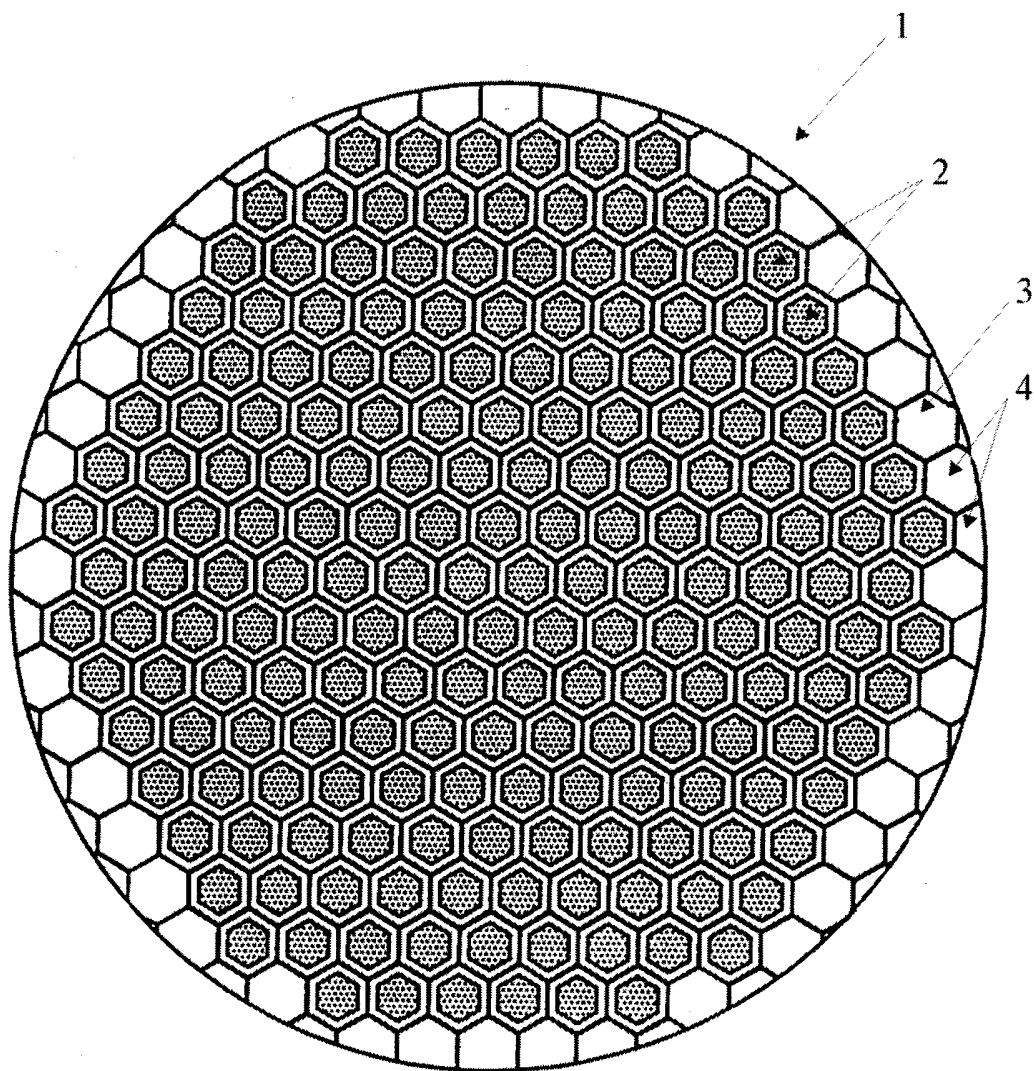


FIG. 1

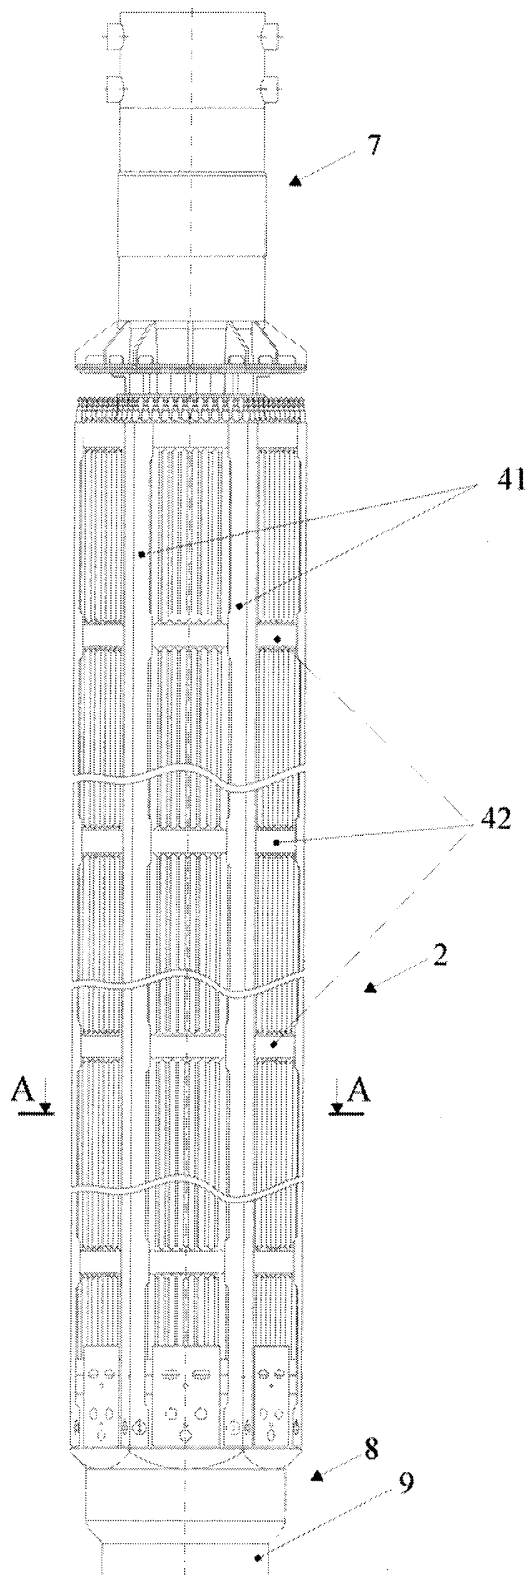


FIG. 2

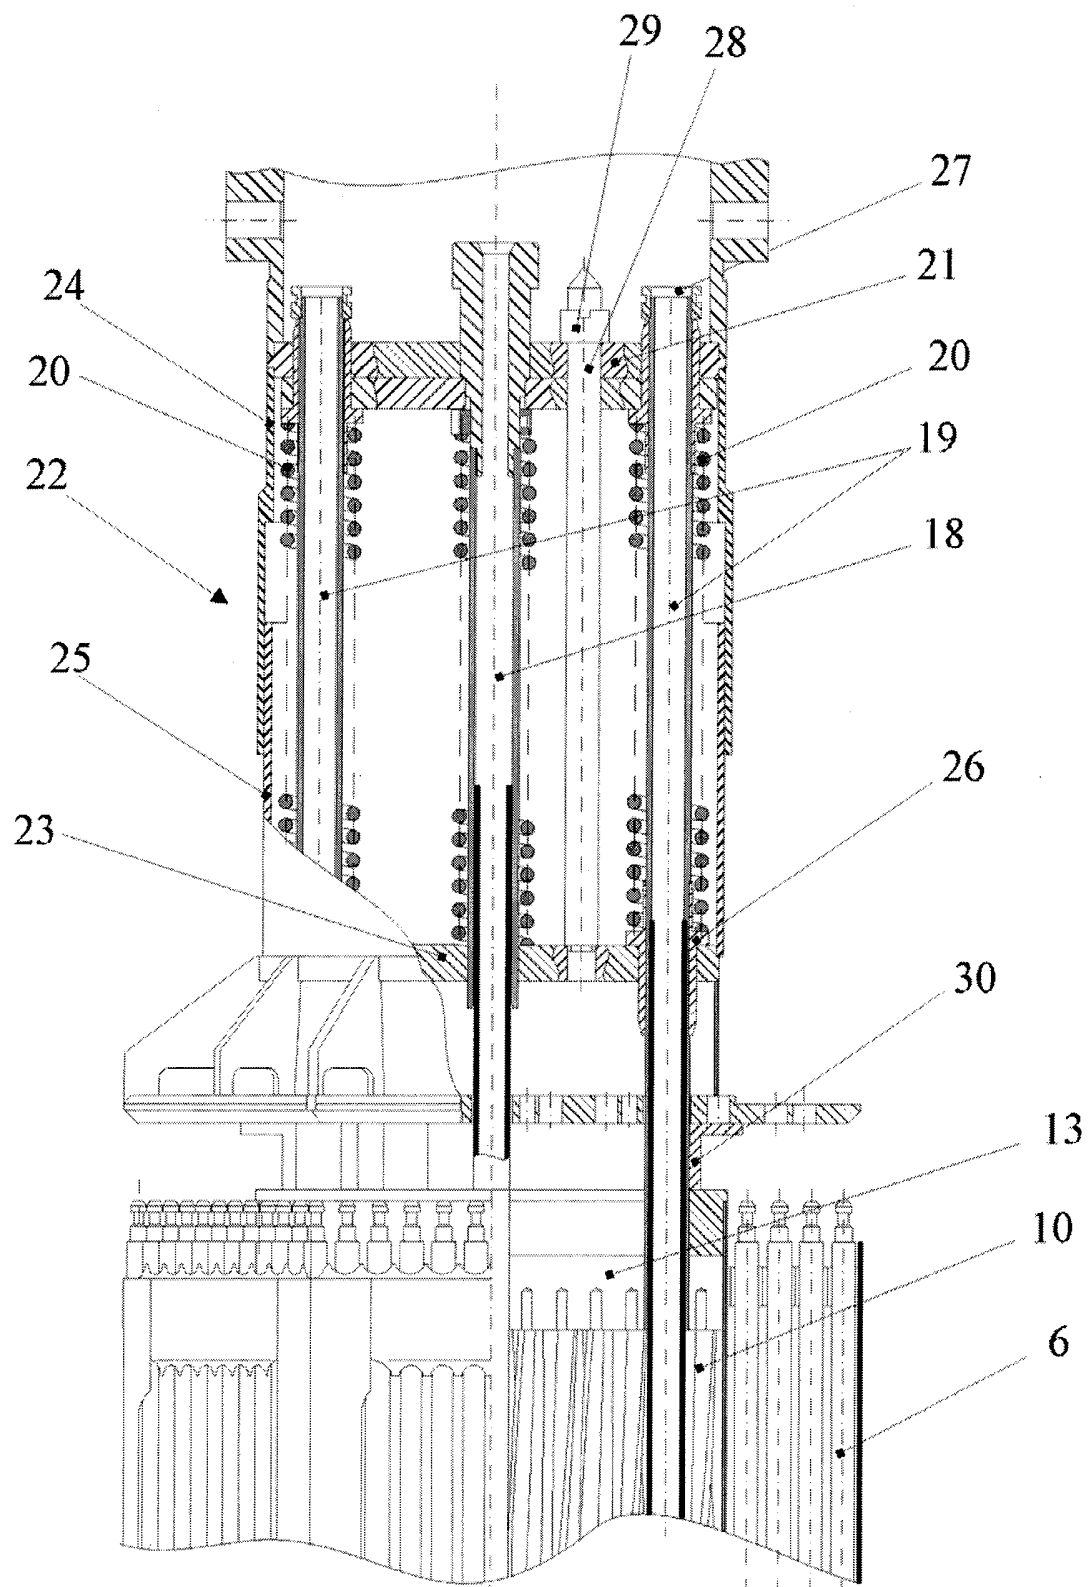


FIG. 3

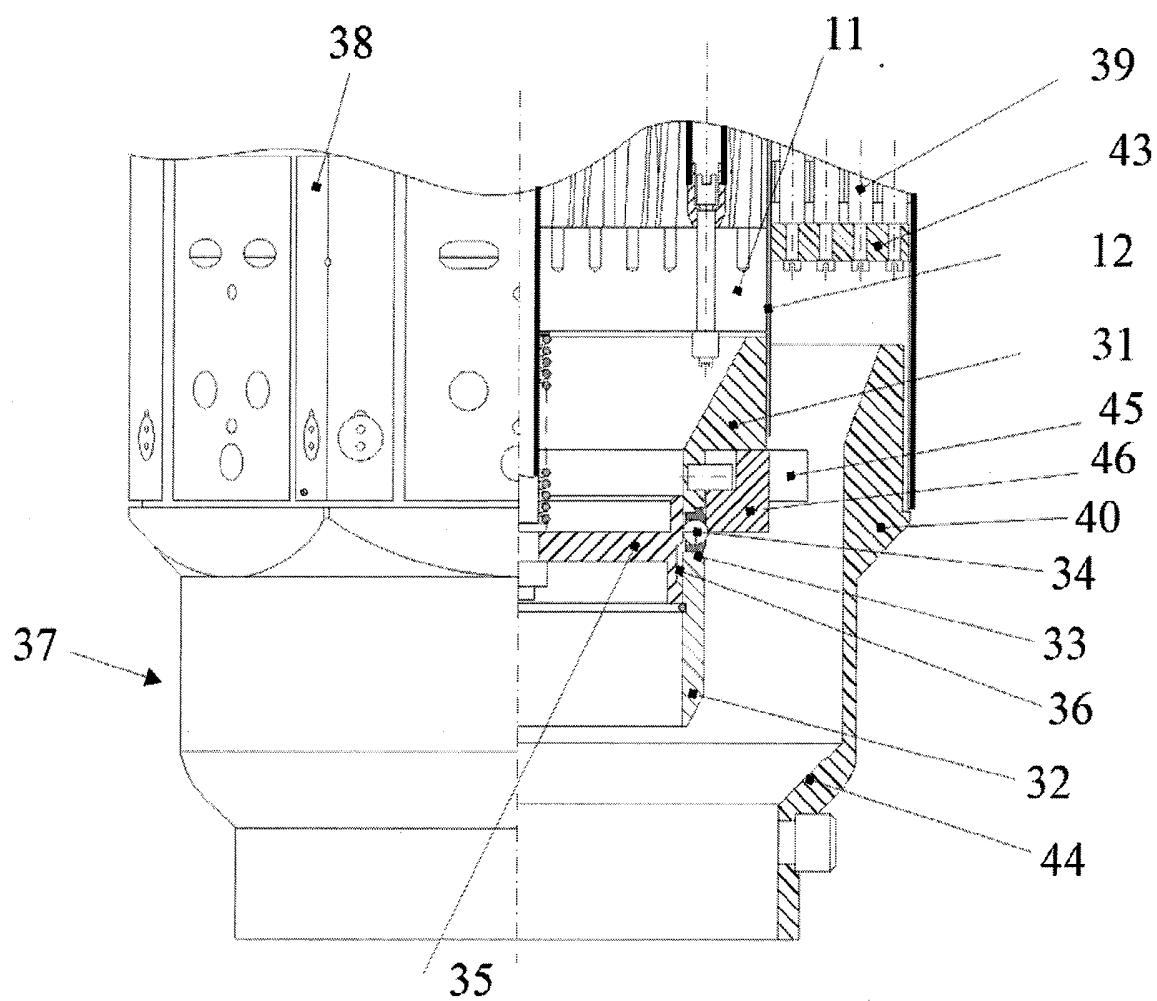


FIG. 4

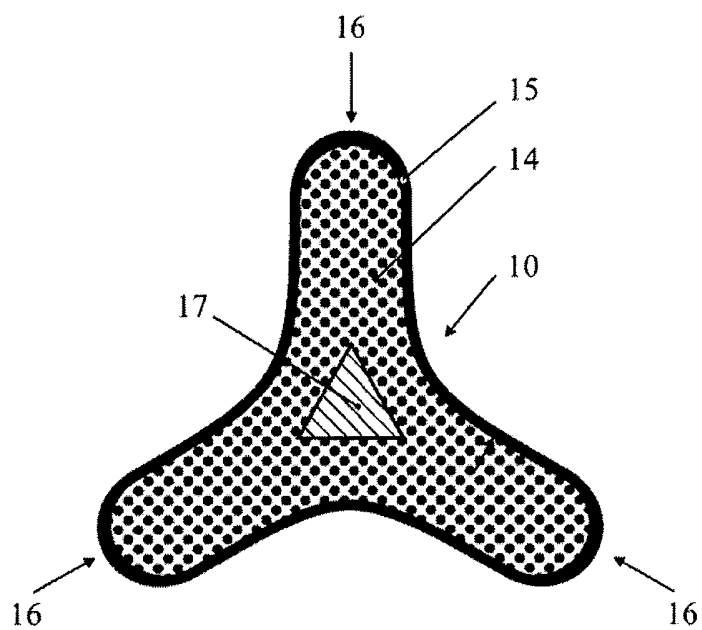


FIG. 5

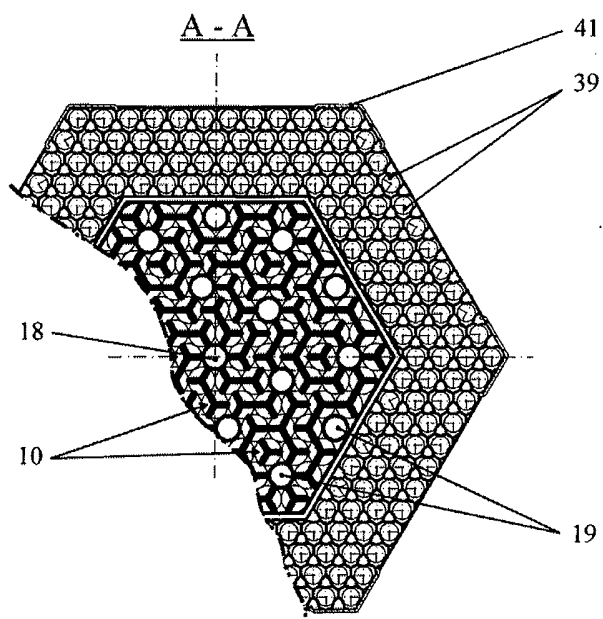


FIG. 6

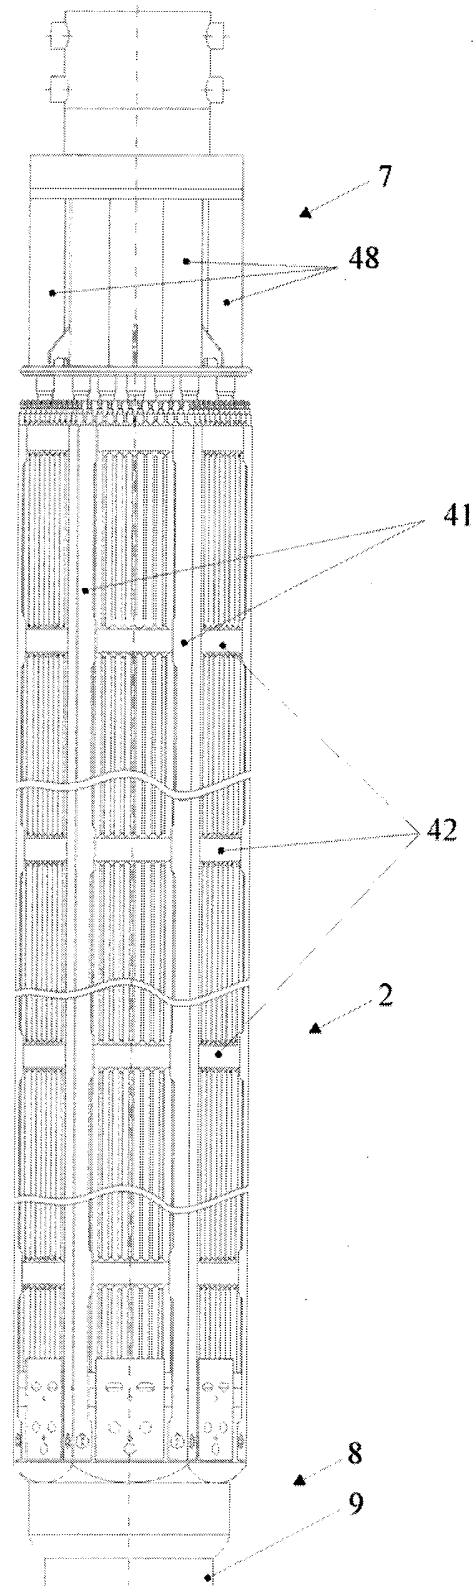


FIG. 7

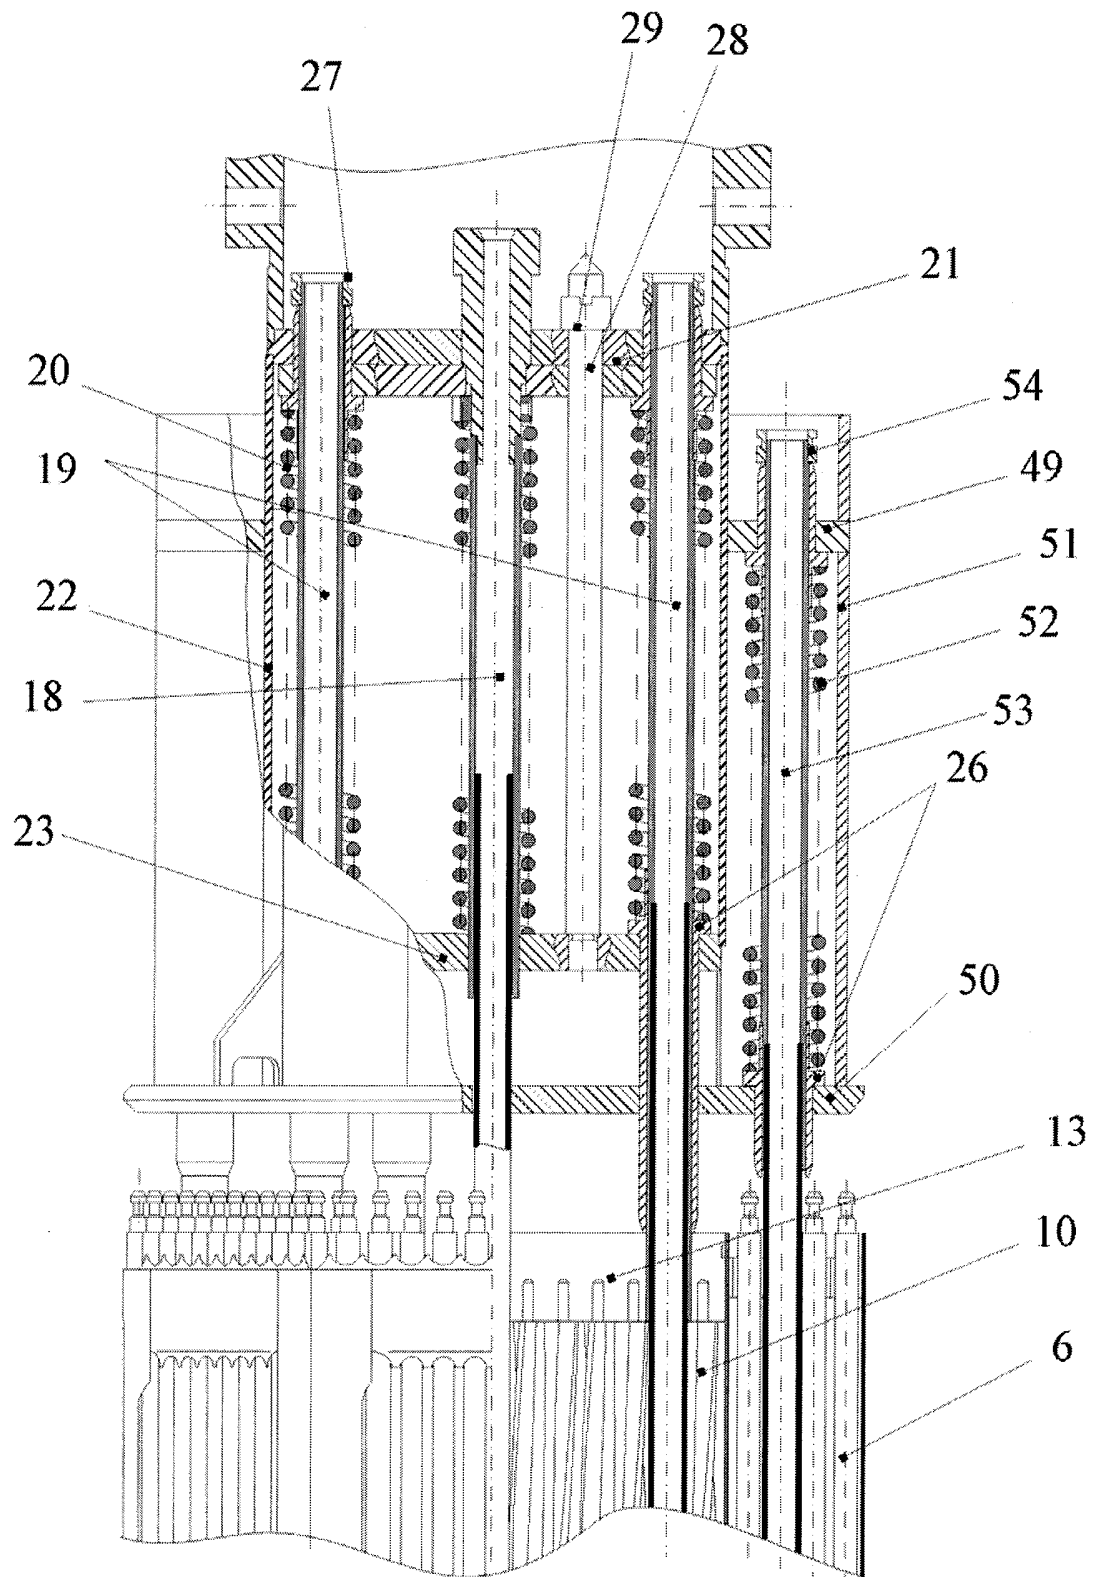


FIG. 8

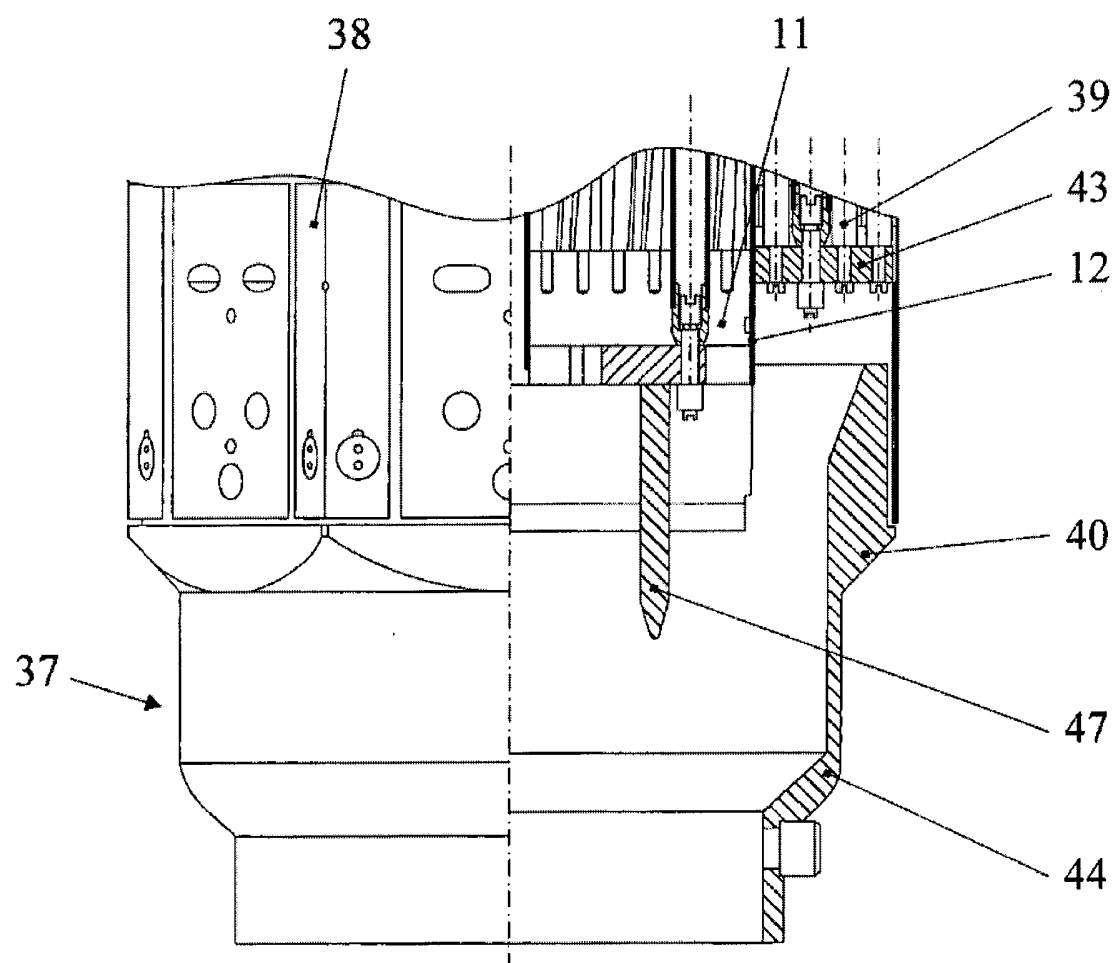


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 8501826 A [0007] [0012]
- WO 9316477 A [0007] [0012]
- RU 2176826 [0014]
- RU 2222837 [0017]
- RU 2294570 [0019]

FŰTŐELEM, FŰTŐELEM-EGYSÉG ÉS ELJÁRÁS EGY FŰTŐELEM-EGYSÉG ALKALMAZÁSÁRA

Szabadalmi igénypontok

1. Fűtőelem-egység egy nukleáris reaktorban történő alkalmazásra, ahol a fűtőelem-egység magában foglalja a következőket:
 - egy mag-részegységet (angolul: „seed subassembly”), amely magában foglal egy mag-keretet (angolul: „seed frame”) és több mag-fűtőelemet (angolul: „seed fuel elements”), amelyek a mag-keret által vannak tartva;
 - egy köpeny-részegységet (angolul: „blanket subassembly”), amely magában foglal egy köpeny-keretet (angolul: „blanket frame”) és több köpeny-fűtőelemet (angolul: „blanket fuel elements”), amelyek a köpeny-keret által vannak tartva; és
 - egy rögzítő szerkezetet, amely oldható módon egymáshoz rögzíti a mag- és a köpeny-kereteket, ahol a mag-részegység szétkapcsolható a köpeny-részegységtől, amikor a rögzítő szerkezet ki van oldva.
2. Fűtőelem-egység az 1. igénypont szerint, ahol a köpeny-részegység oldalról körülzárja a mag-részegységet.
3. Fűtőelem-egység az 1. vagy 2. igénypont szerint, ahol a köpeny-részegység magában foglal egy centrális nyílást, amelybe a mag-részegység beilleszkedik.
4. Fűtőelem-egység az 1.-től 3.-ig igénypontok bármelyike szerint, ahol a több mag-fűtőelem hasadóanyagot tartalmaz, és ahol a több köpeny-fűtőelem tóriumot tartalmaz.
5. Eljárás egy fűtőelem-egység alkalmazására, ahol a fűtőelem-egység magában foglal egy mag-részegységet (angolul: „seed subassembly”), amely hasadóanyagot tartalmaz, és egy köpeny-részegységet (angolul: „blanket subassembly”), amely tóriumot tartalmaz, ahol a mag- és a köpeny-részegységek össze vannak kapcsolva egymással, ahol az eljárás magában foglalja, egymást követően, a következőket:
 - (a) a fűtőelem-egység behelyezése egy nukleáris reaktor egy magjába;
 - (b) a hasadóanyag legalább egy részének elégetése a nukleáris reaktornak a magjában;
 - (c) a mag-részegység szétkapcsolása a köpeny-részegységtől; és
 - (d) egy új mag-részegység összekapcsolása a köpeny-részegységgel, ahol az új mag-részegység további hasadóanyagot tartalmaz.
6. Eljárás az 5. igénypont szerint, amely továbbá magában foglalja a következőket:
 - (e) a további hasadóanyag legalább egy részének elégetése a nukleáris reaktornak a magjában.